



FCC RADIO TEST REPORT

FCC ID : A4RGD1YQ
Equipment : Phone
Model Name : GD1YQ
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 16, 2020 and testing was started from Apr. 28, 2020 and completed on Jul. 07, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	27
3.5 Radiated Band Edges and Spurious Emission Measurement	36
3.6 AC Conducted Emission Measurement.....	41
3.7 Antenna Requirements.....	43
4 List of Measuring Equipment	44
5 Uncertainty of Evaluation.....	46
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR011718-01B	01	Initial issue of report	Jul. 10, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 6.33 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 8.75 dB at 0.204 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Cindy Liu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	GD1YQ
FCC ID	A4RGD1YQ
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDM/HSPA/LTE/5G NR /NFC/GNSS/WPC/WPT WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
06021FDD40012C	Conducted Measurement
03281FDD4000BB	Radiated Spurious Emission
03311FDD40001W	Conducted Emission

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE (1Mbps) : 18.60 dBm (0.0724W) Bluetooth LE (2Mbps) : 18.60 dBm (0.0724W)
99% Occupied Bandwidth	Bluetooth LE (1Mbps) : 1.020MHz Bluetooth LE (2Mbps) : 2.008MHz
Antenna Type	ILA Antenna type with gain -2.2 dBi
Type of Modulation	Bluetooth LE : GFSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and Accessory (Adapter or Earphone). The worst cases (Z plane with Adapter and WPC Mode) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + USB Cable 1 (Charging from Adapter 2)
Remark: For Radiated Test Cases, the tests were performed with Adapter 2 and USB Cable 1.	

2.3 Connection Diagram of Test System


<AC Conducted Emission Mode >

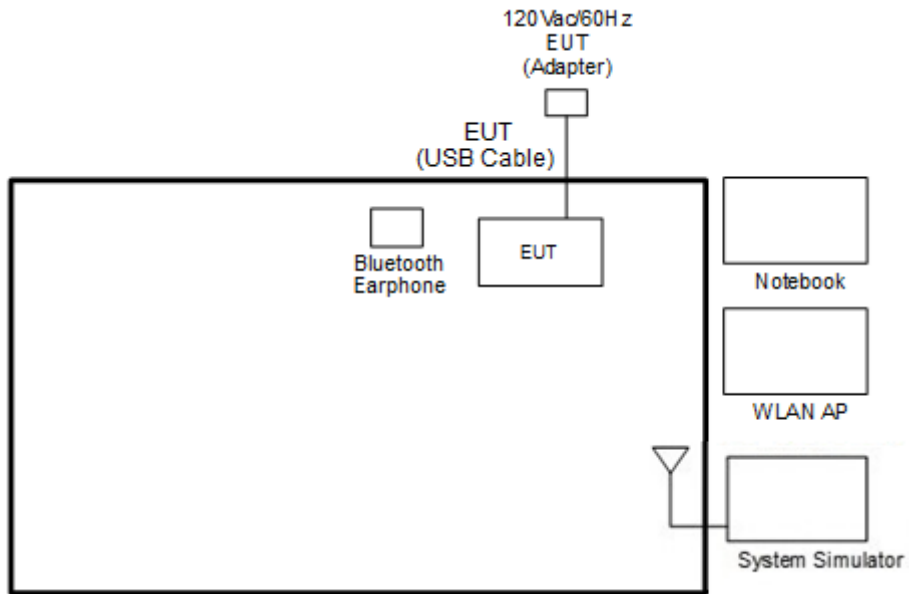

<Bluetooth – LE Tx Mode>

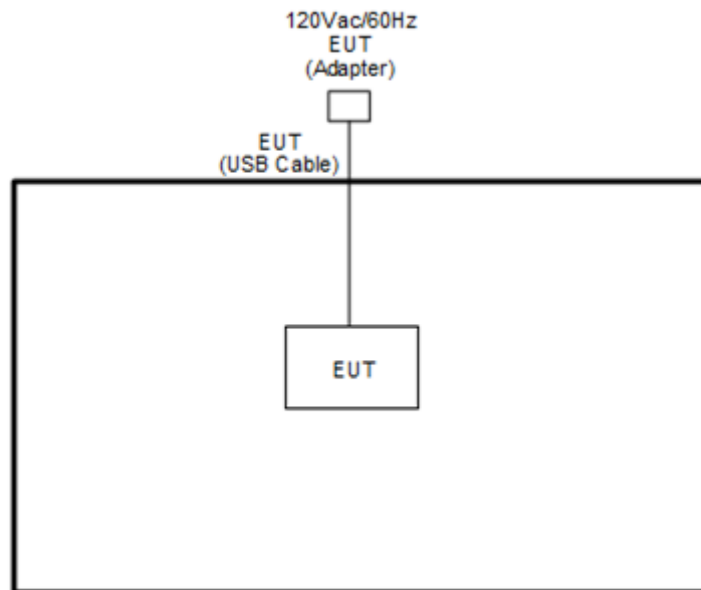

<WPC Mode>

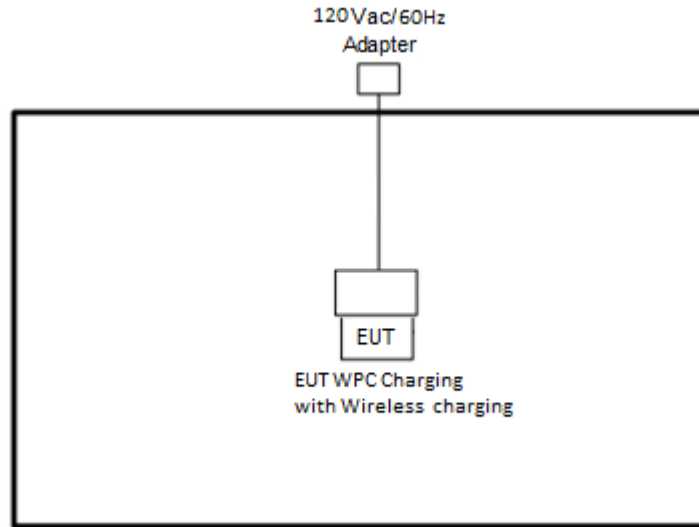

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Google	G1007/ G1008	A4RG1007	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Wireless charging	YU-live	K8	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT V4.0.00153.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<1Mbps>

6 dB Bandwidth Plot on Channel 00

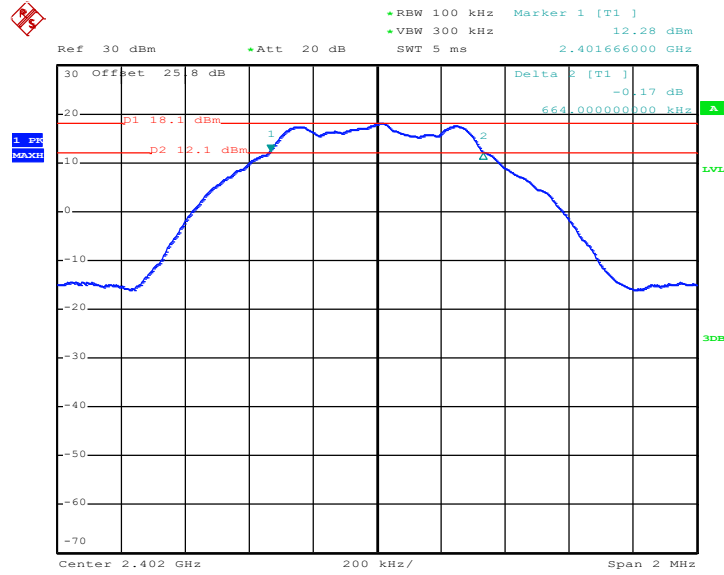

Date: 28.APR.2020 23:20:17


6 dB Bandwidth Plot on Channel 19

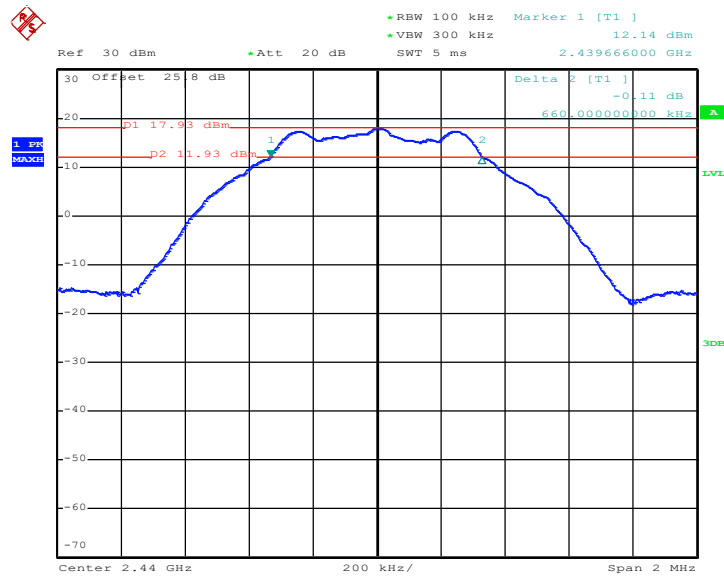

Date: 28.APR.2020 23:24:12




6 dB Bandwidth Plot on Channel 39

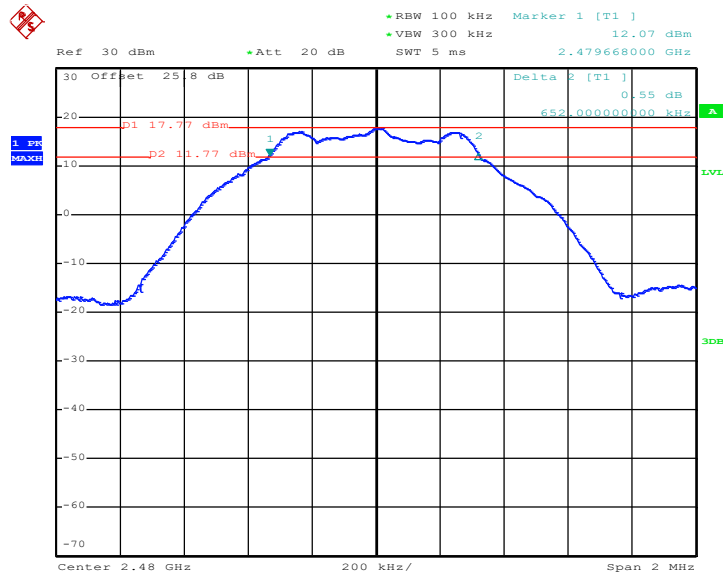

Date: 28.APR.2020 23:29:26

<2Mbps>


6 dB Bandwidth Plot on Channel 00

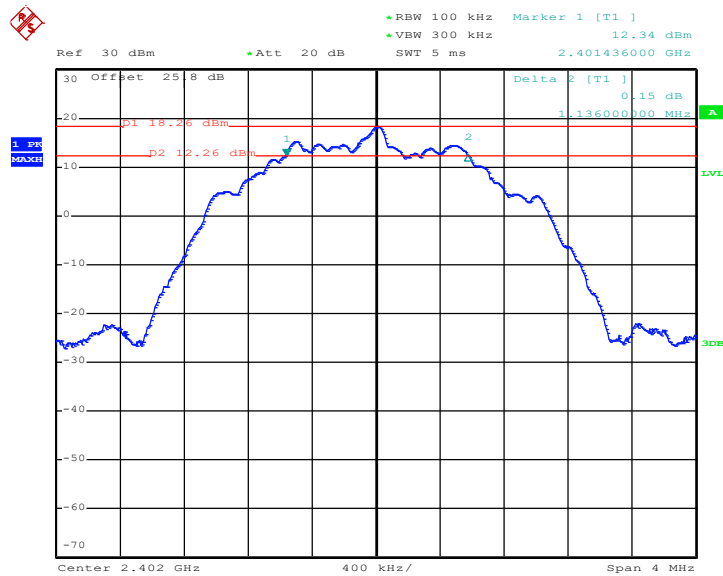

Date: 28.APR.2020 23:32:16




6 dB Bandwidth Plot on Channel 19

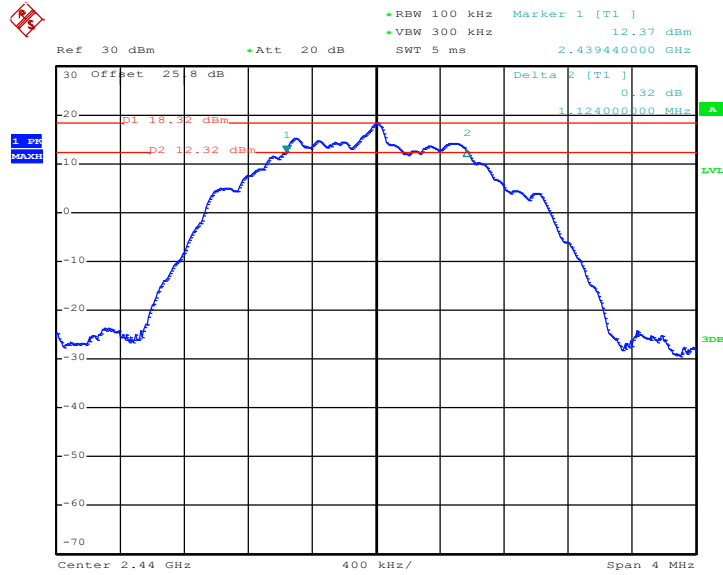

Date: 28.APR.2020 23:35:18

6 dB Bandwidth Plot on Channel 39

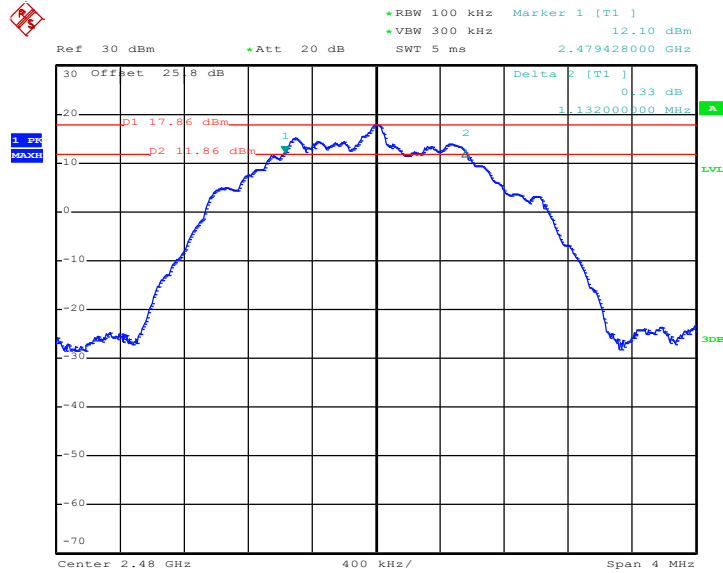

Date: 28.APR.2020 23:37:40




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

99% Bandwidth Plot on Channel 00

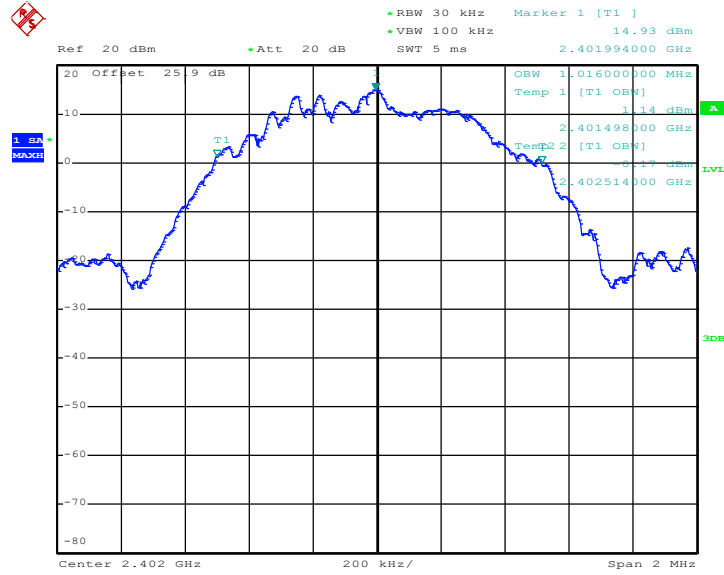

Date: 24.MAY.2020 23:49:48


99% Occupied Bandwidth Plot on Channel 19

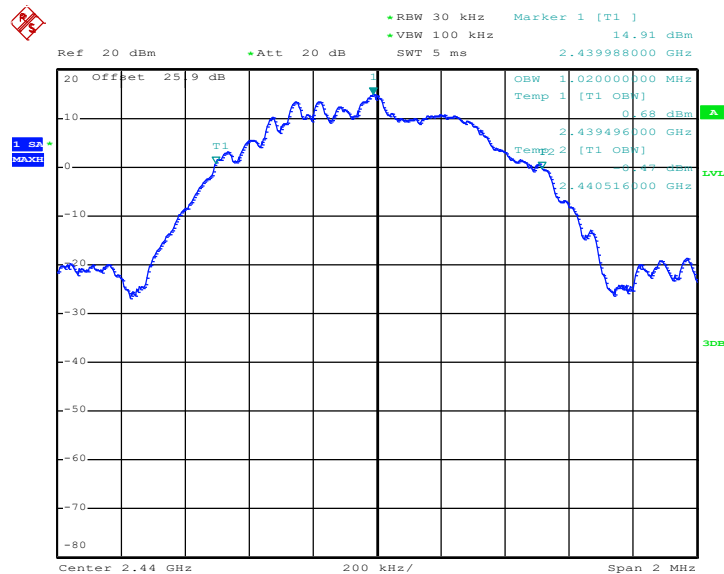

Date: 24.MAY.2020 23:52:30




99% Occupied Bandwidth Plot on Channel 39

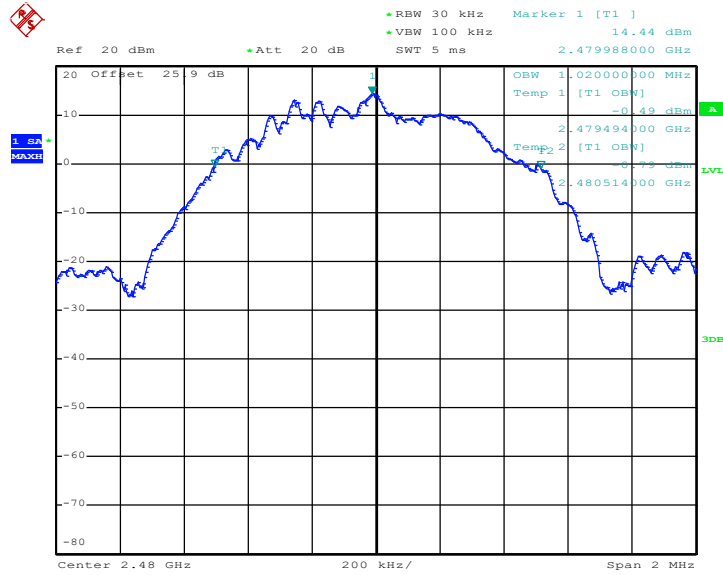

Date: 24.MAY.2020 23:56:12

<2Mbps>


99% Bandwidth Plot on Channel 00

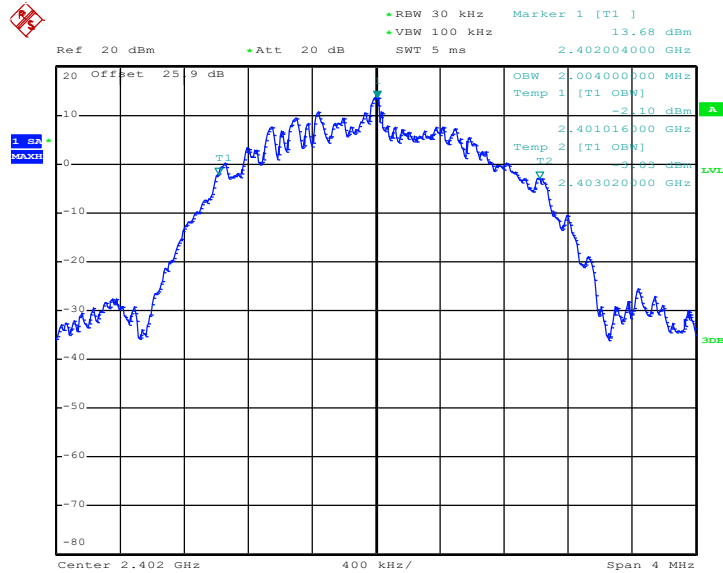

Date: 25.MAY.2020 00:02:31




99% Occupied Bandwidth Plot on Channel 19

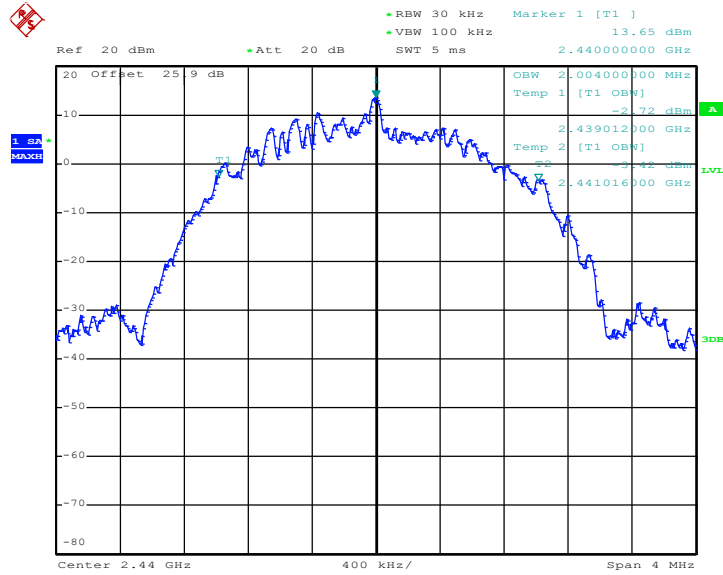

Date: 25.MAY.2020 00:06:18

99% Occupied Bandwidth Plot on Channel 39

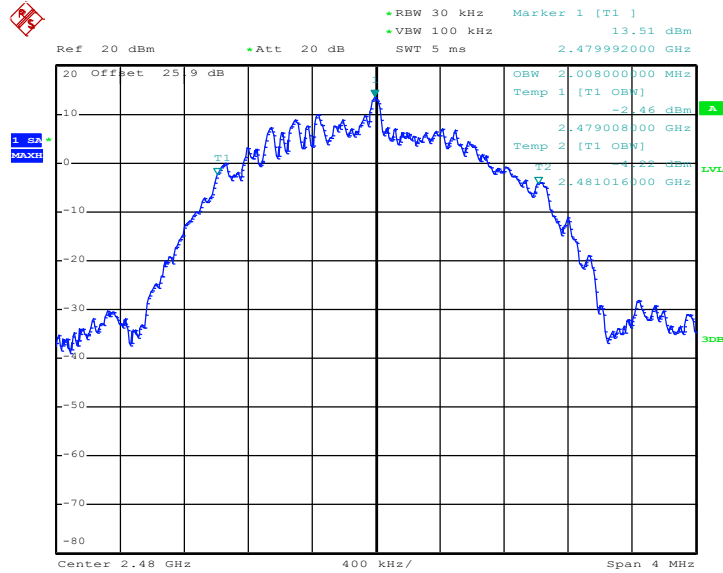

Date: 25.MAY.2020 00:12:07

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

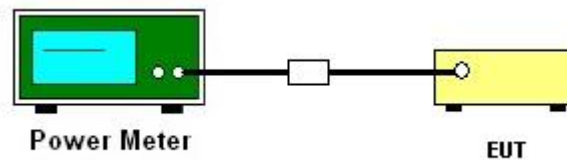

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

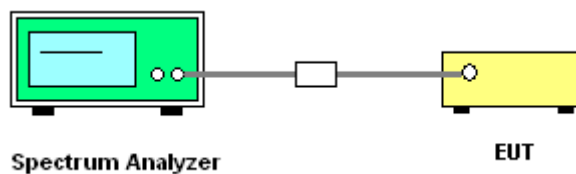

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<1Mbps>

PSD 100kHz Plot on Channel 00

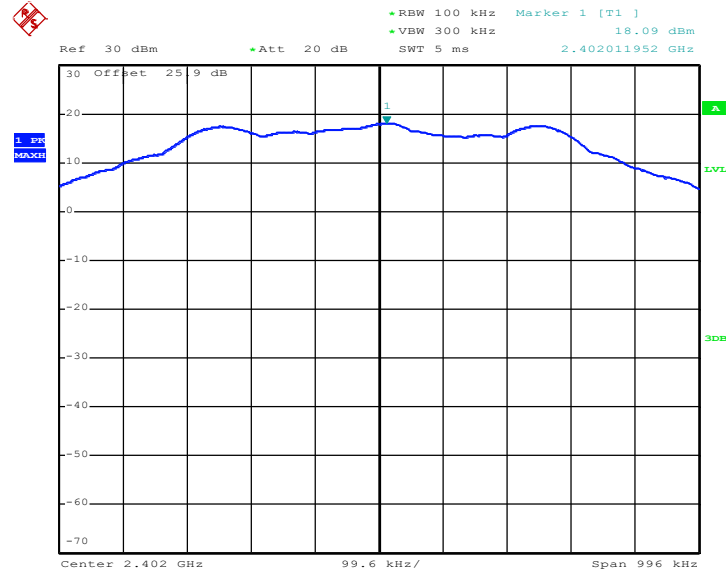

Date: 24.MAY.2020 23:34:59


PSD 100kHz Plot on Channel 19

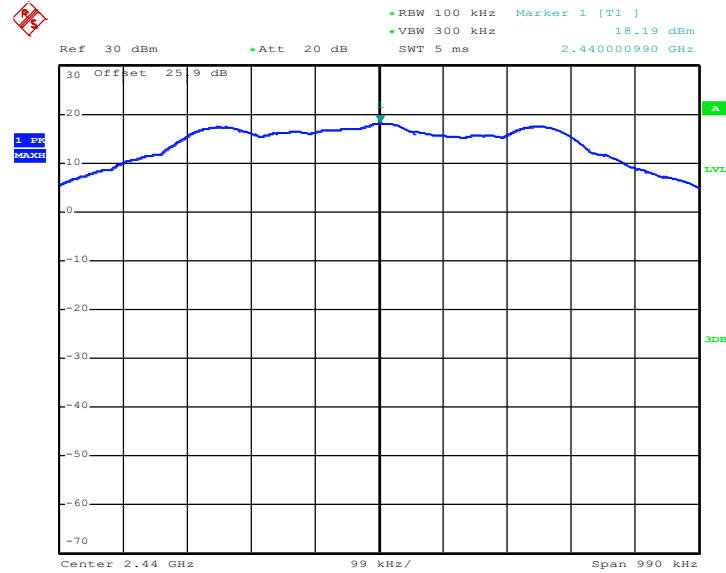

Date: 24.MAY.2020 23:51:11




PSD 100kHz Plot on Channel 39

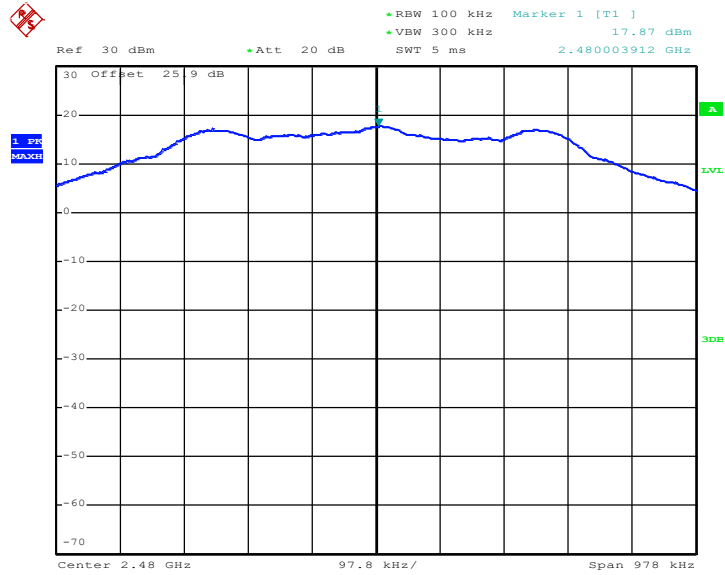

Date: 24.MAY.2020 23:53:53

<2Mbps>


PSD 100kHz Plot on Channel 00

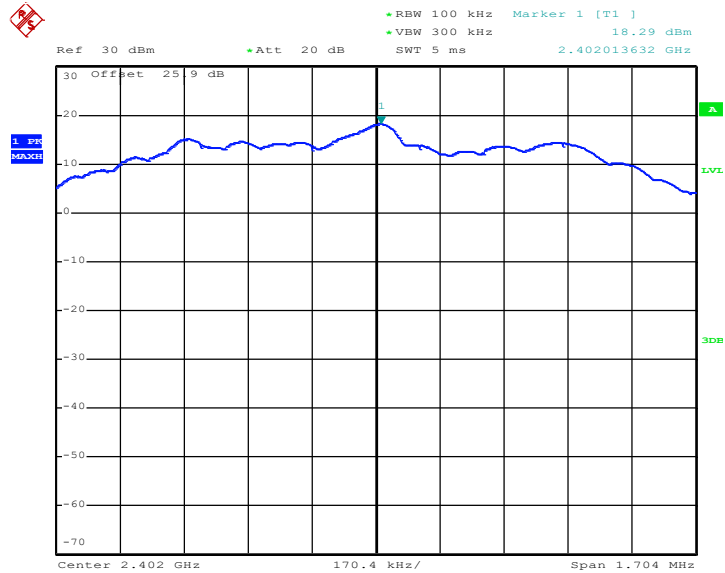

Date: 24.MAY.2020 23:58:42




PSD 100kHz Plot on Channel 19

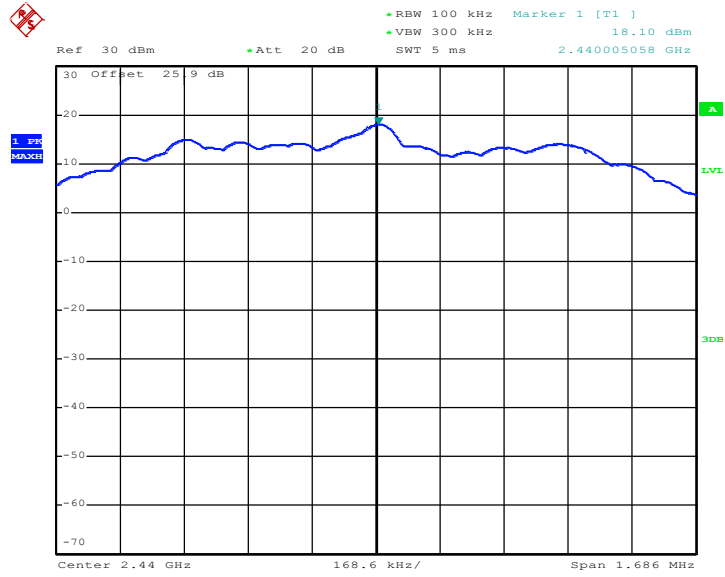

Date: 25.MAY.2020 00:03:26

PSD 100kHz Plot on Channel 39

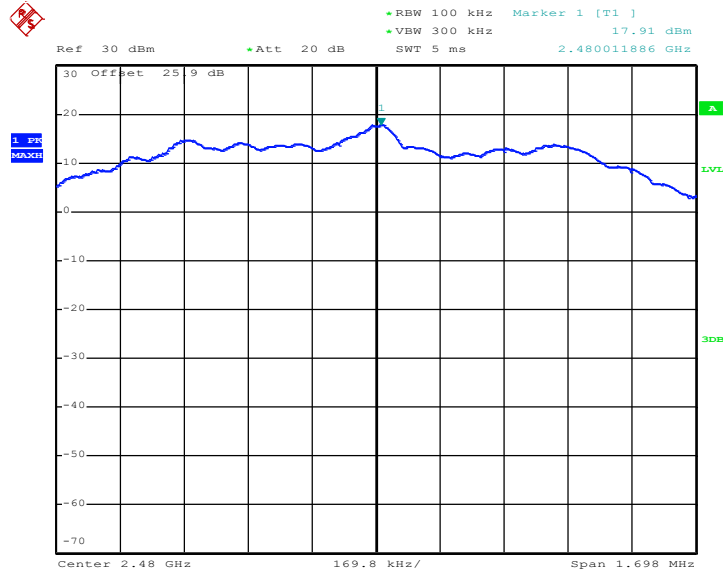


Date: 25.MAY.2020 00:08:18



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<1Mbps>

PSD 3kHz Plot on Channel 00

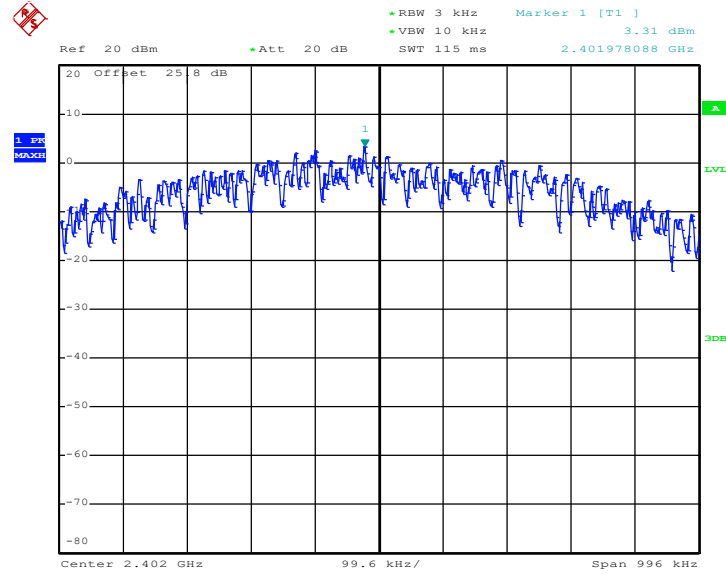

Date: 28.APR.2020 23:20:40


PSD 3kHz Plot on Channel 19

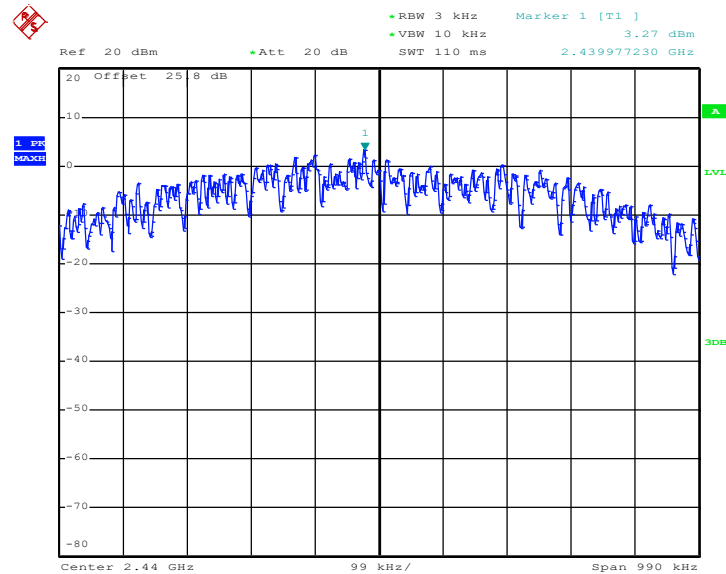

Date: 28.APR.2020 23:24:47




PSD 3kHz Plot on Channel 39

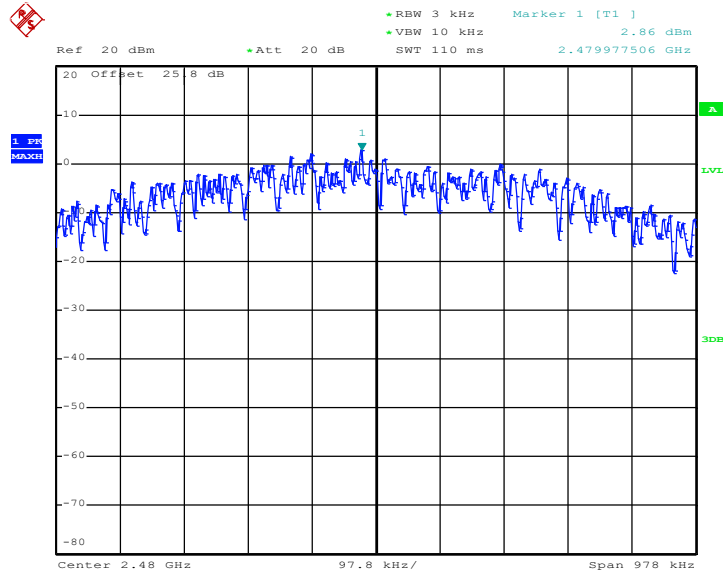

Date: 28.APR.2020 23:30:07

<2Mbps>


PSD 3kHz Plot on Channel 00

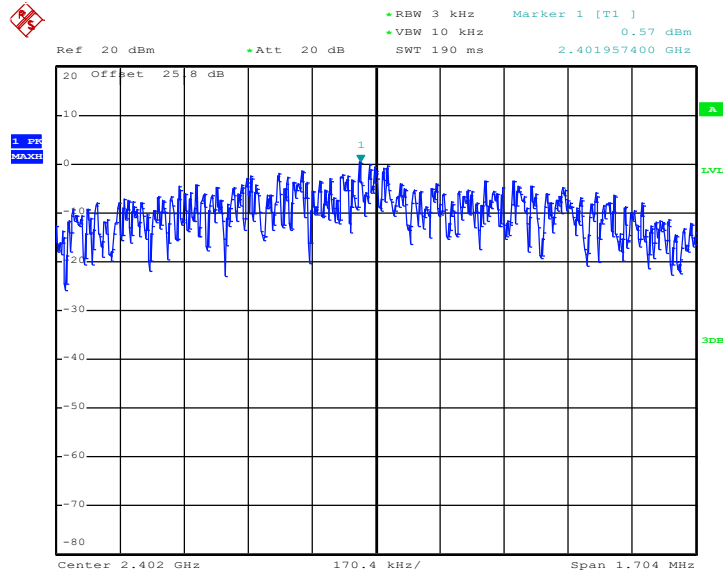

Date: 28.APR.2020 23:32:41




PSD 3kHz Plot on Channel 19

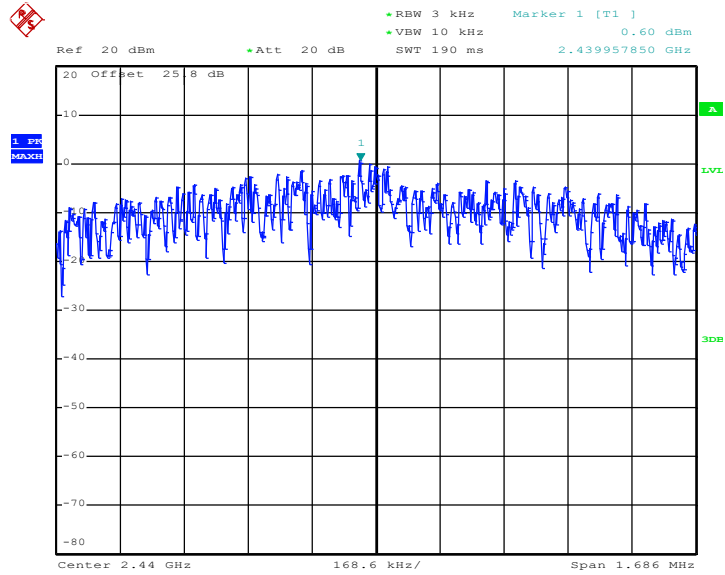

Date: 28.APR.2020 23:35:36

PSD 3kHz Plot on Channel 39

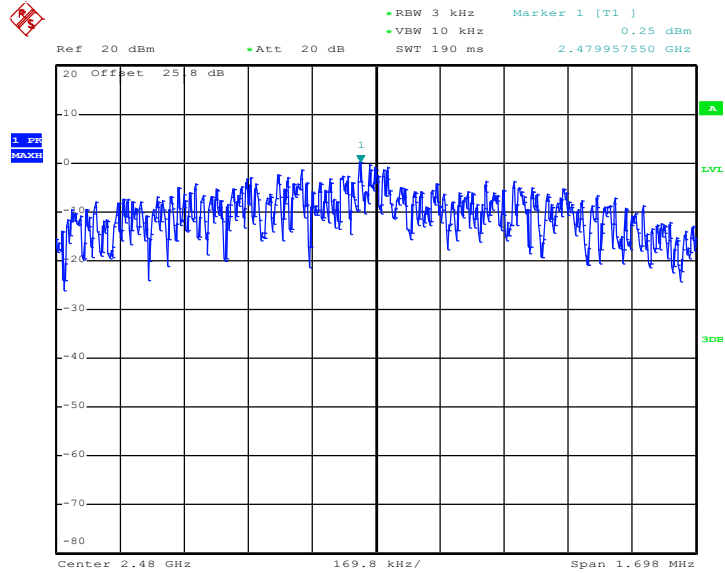

Date: 28.APR.2020 23:37:59

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

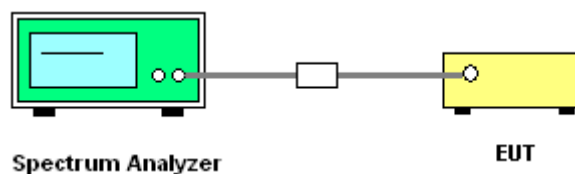




3.4.5 Test Result of Conducted Band Edges Plots


<1Mbps>

Low Band Edge Plot on Channel 00

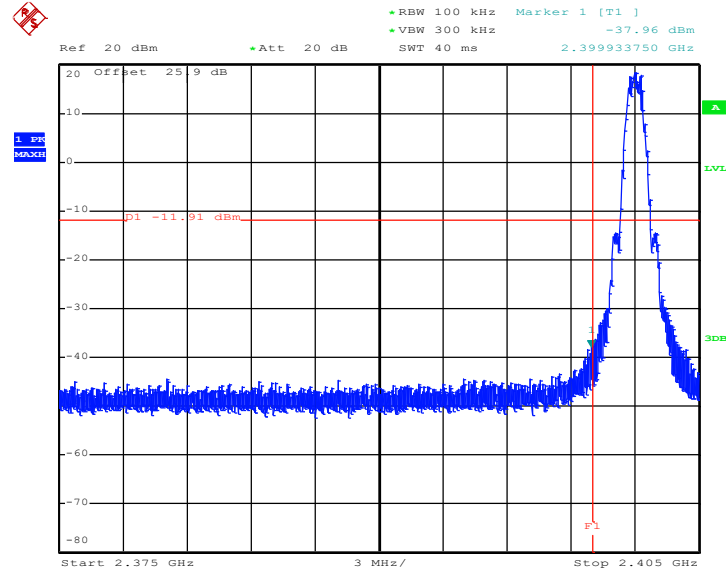

Date: 24.MAY.2020 23:57:08

High Band Edge Plot on Channel 39

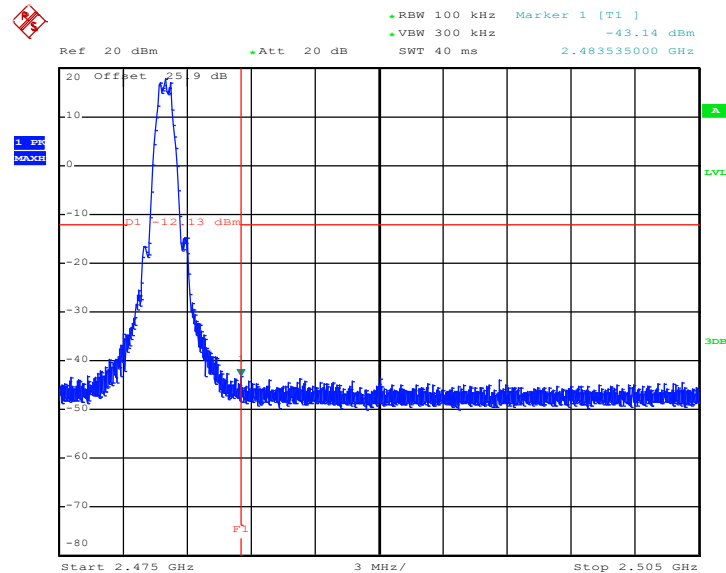


Date: 24.MAY.2020 23:54:38




<2Mbps>

Low Band Edge Plot on Channel 00

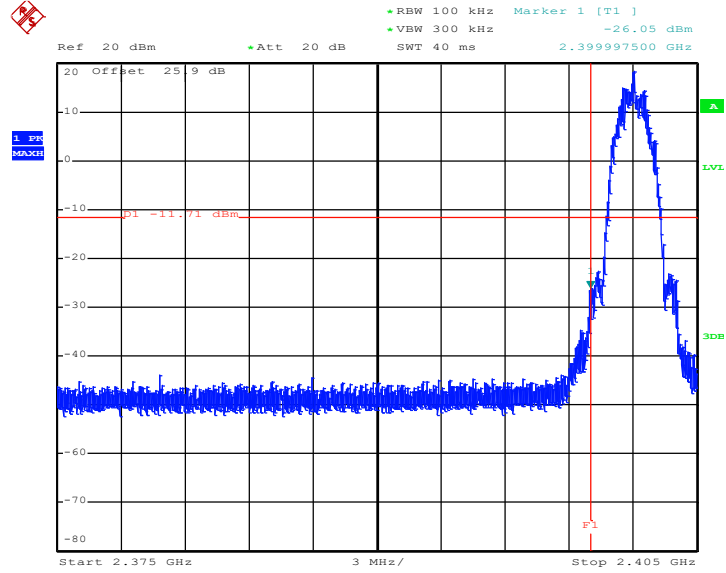

Date: 25.MAY.2020 00:00:11

High Band Edge Plot on Channel 39

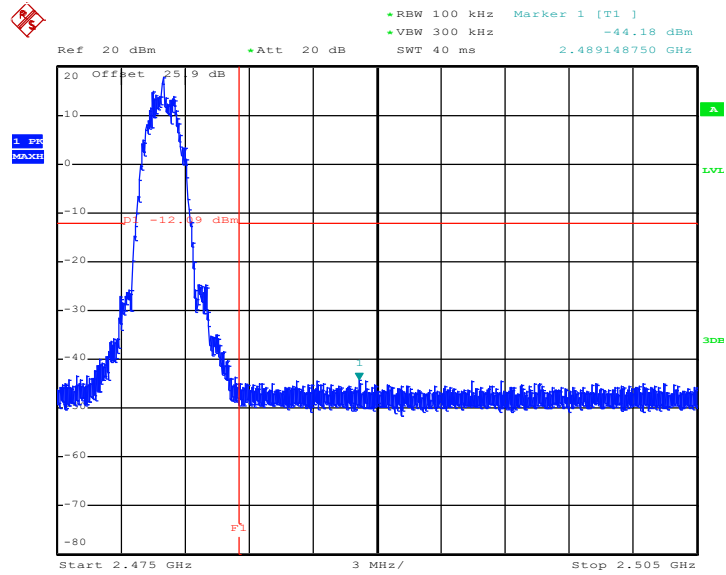


Date: 25.MAY.2020 00:09:18




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

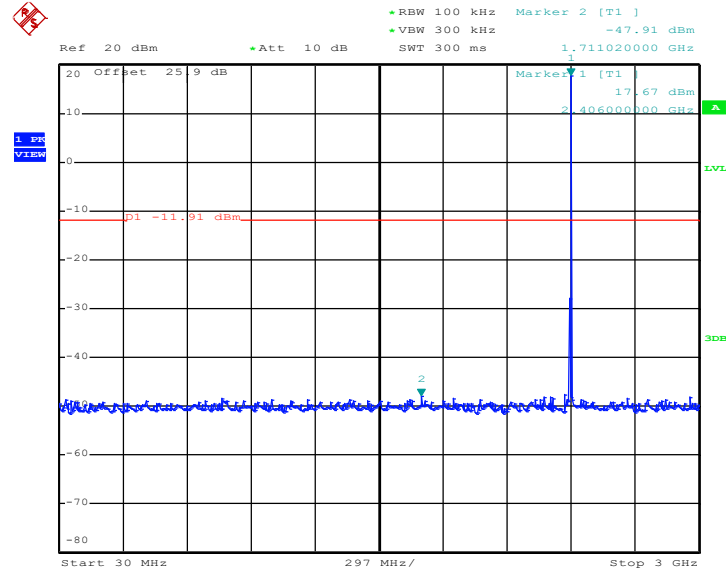

Date: 24.MAY.2020 23:49:14


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

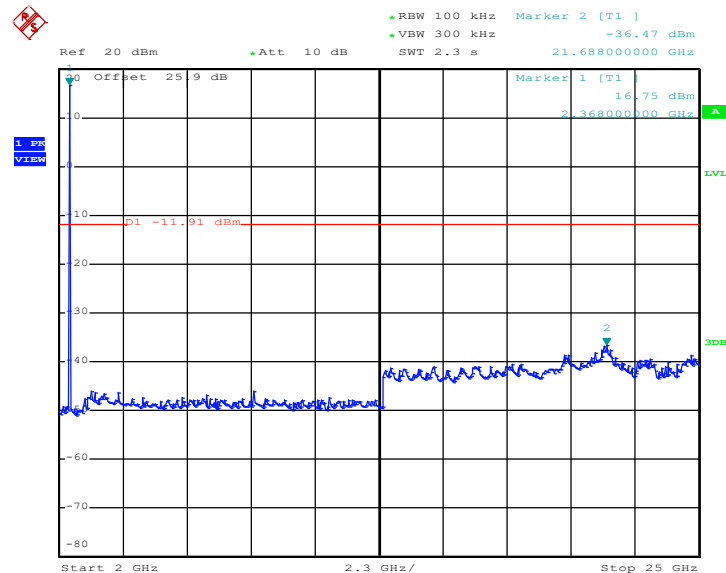

Date: 24.MAY.2020 23:49:31




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

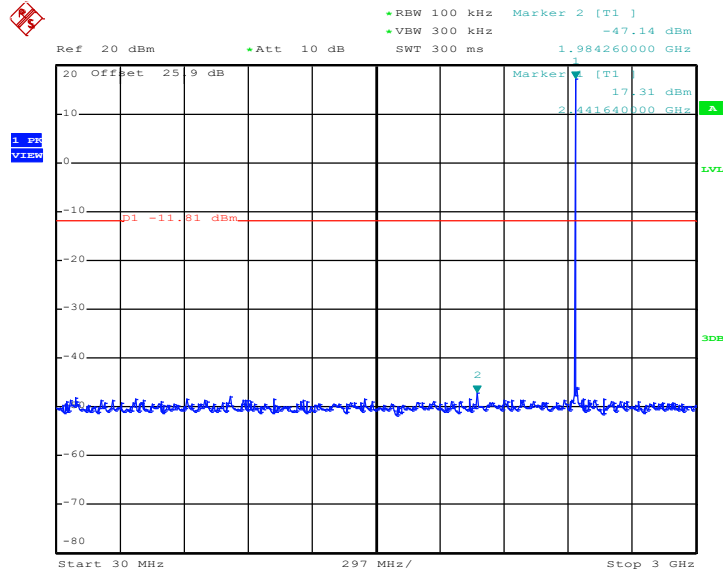

Date: 24.MAY.2020 23:51:56


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

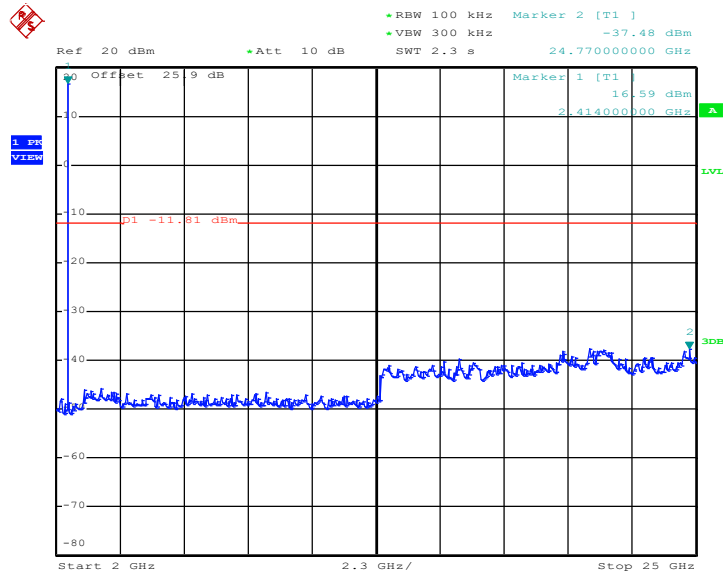

Date: 24.MAY.2020 23:52:12




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

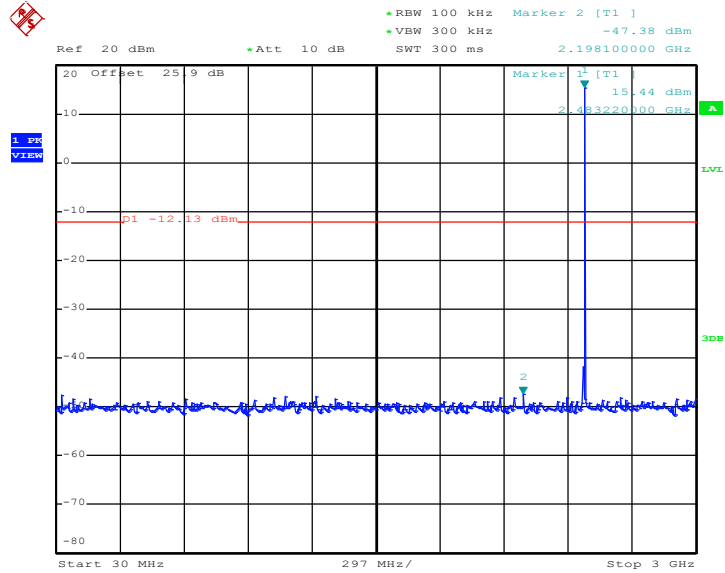

Date: 24.MAY.2020 23:54:55


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

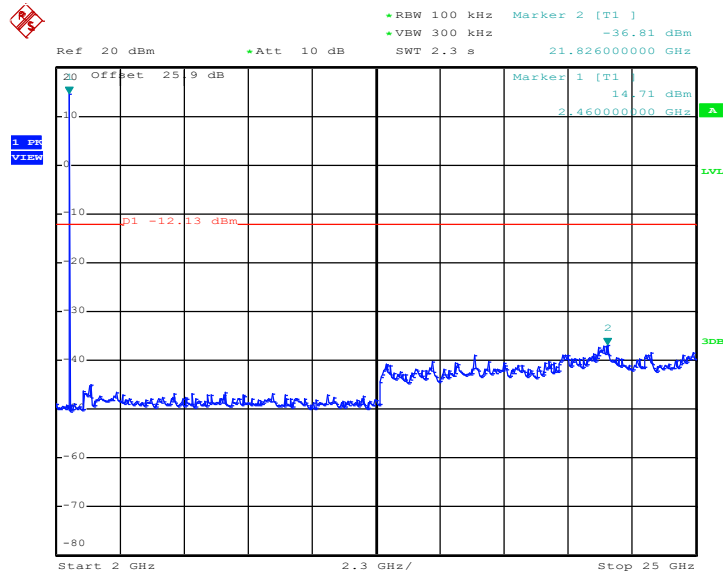

Date: 24.MAY.2020 23:55:12




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 00

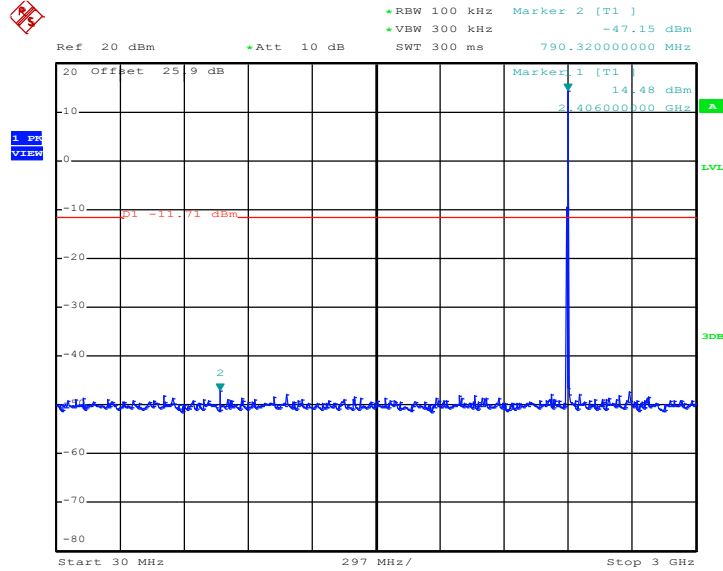

Date: 25.MAY.2020 00:01:56


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 00

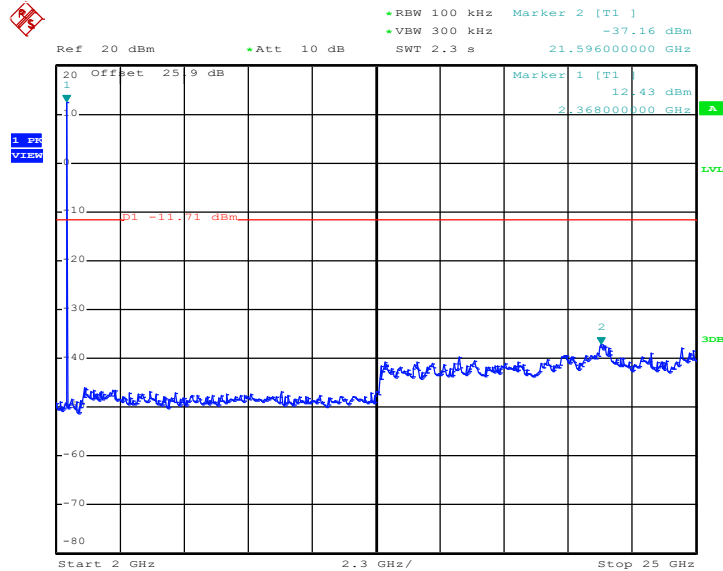

Date: 25.MAY.2020 00:02:11




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

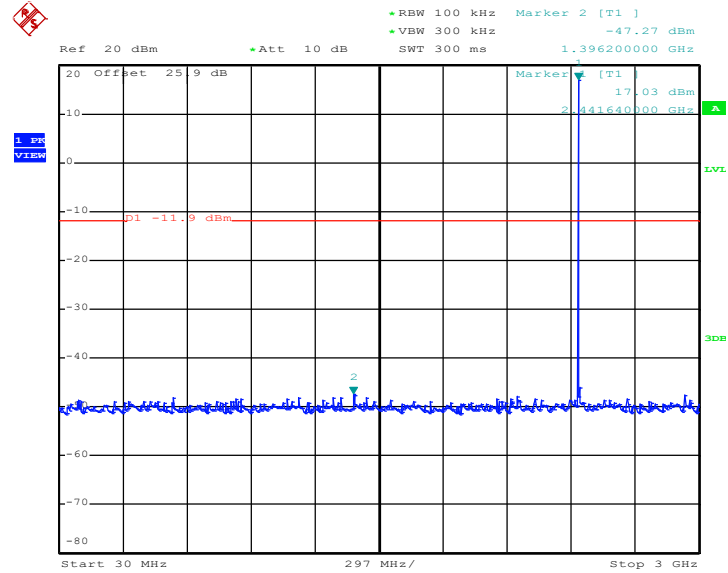

Date: 25.MAY.2020 00:05:39


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

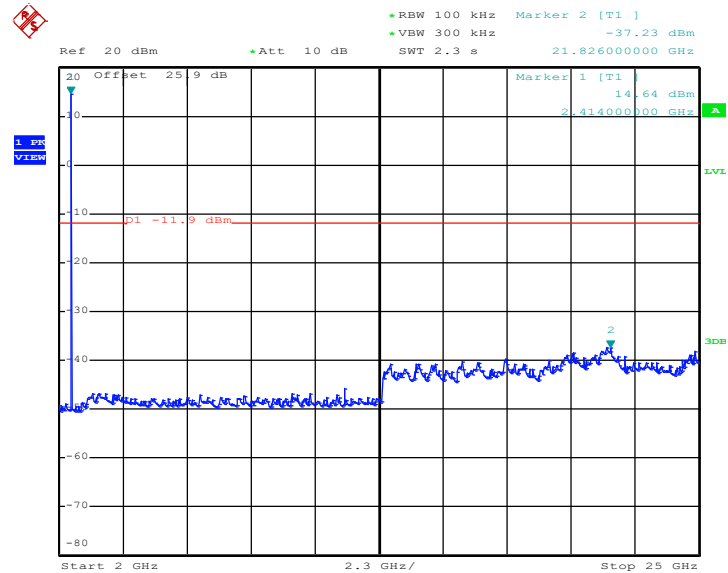

Date: 25.MAY.2020 00:05:58




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

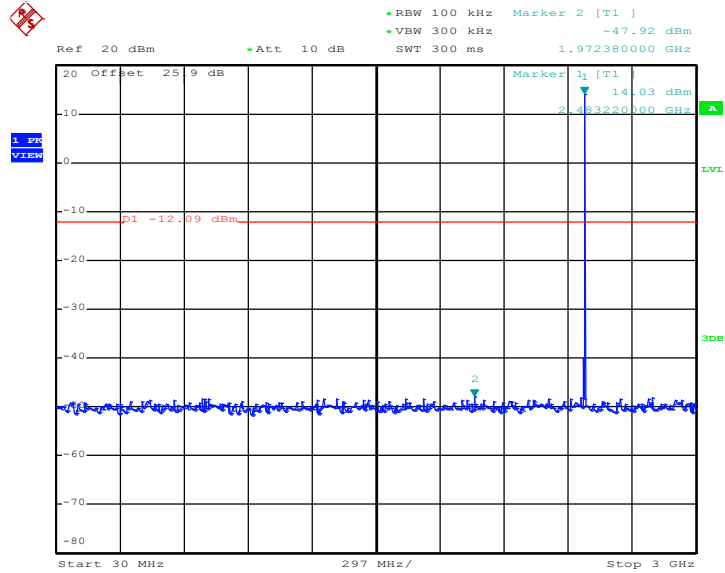

Date: 25.MAY.2020 00:11:31

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

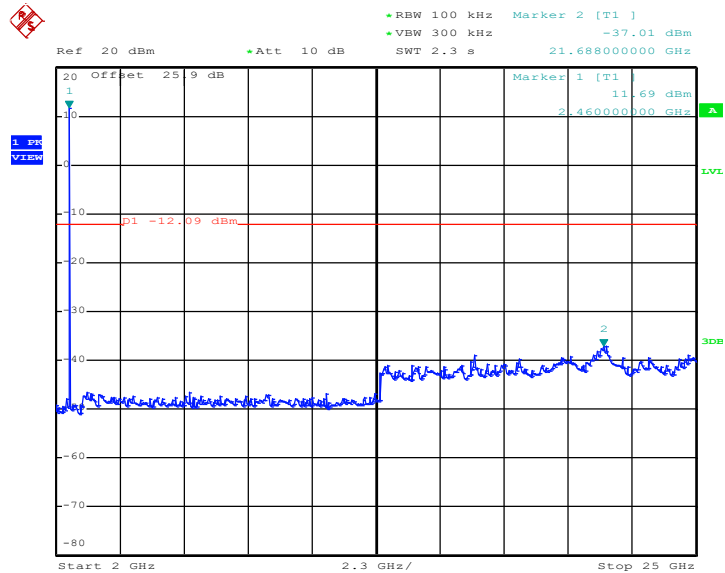

Date: 25.MAY.2020 00:11:49



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

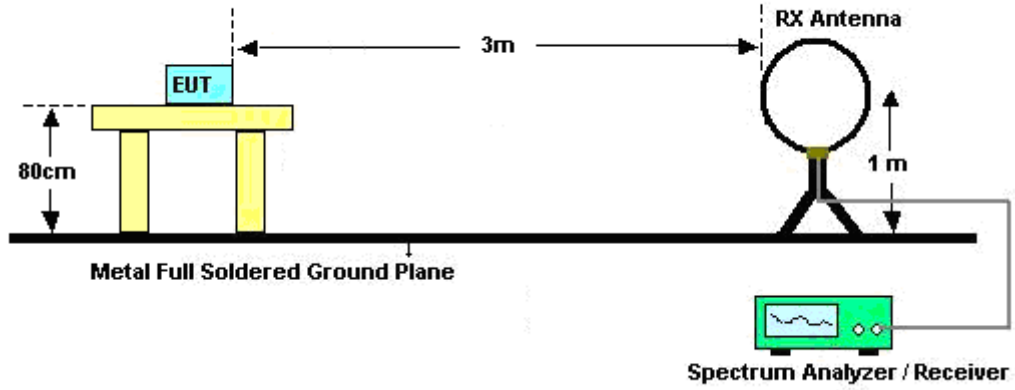


For radiated emissions from 30MHz to 1GHz

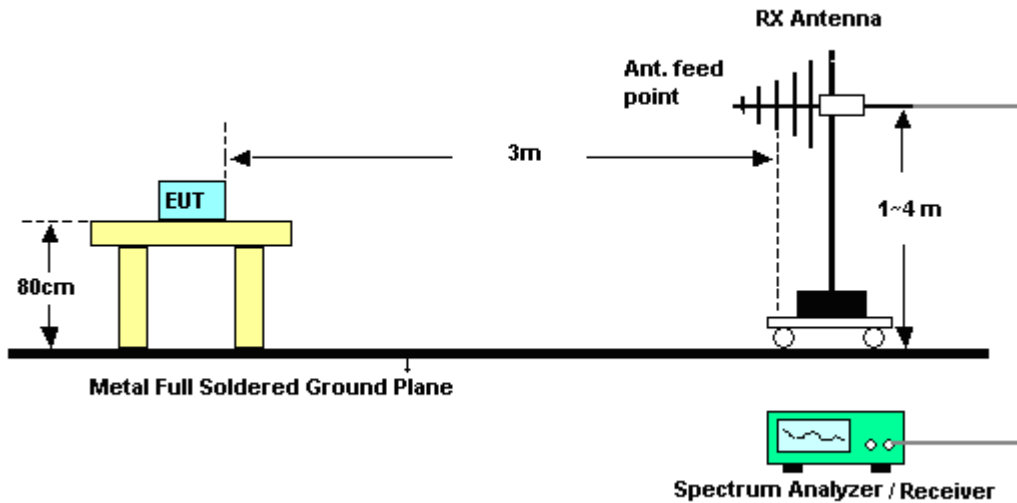

For radiated emissions above 1GHz

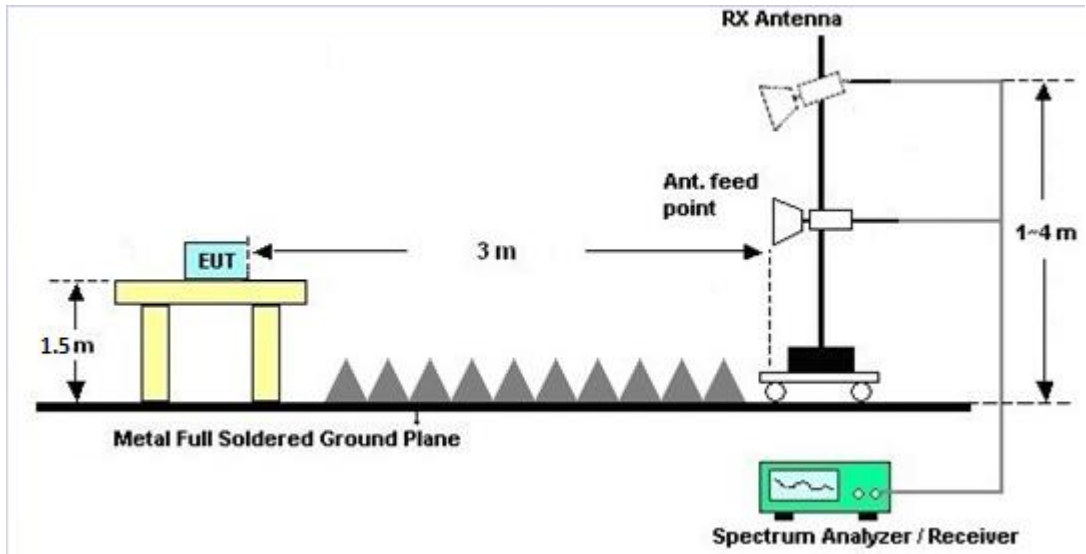

For radiated emissions above 18GHz

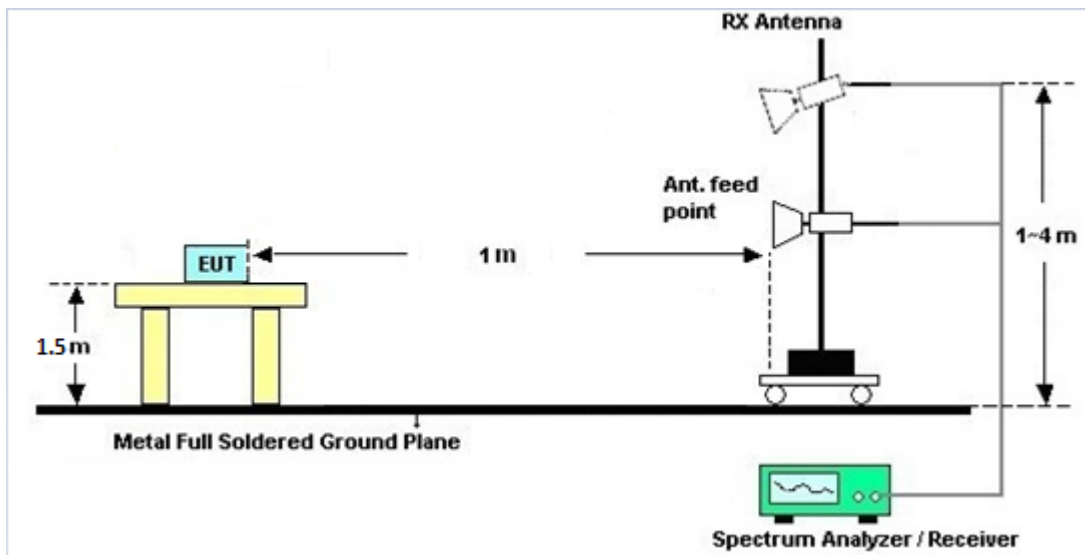



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

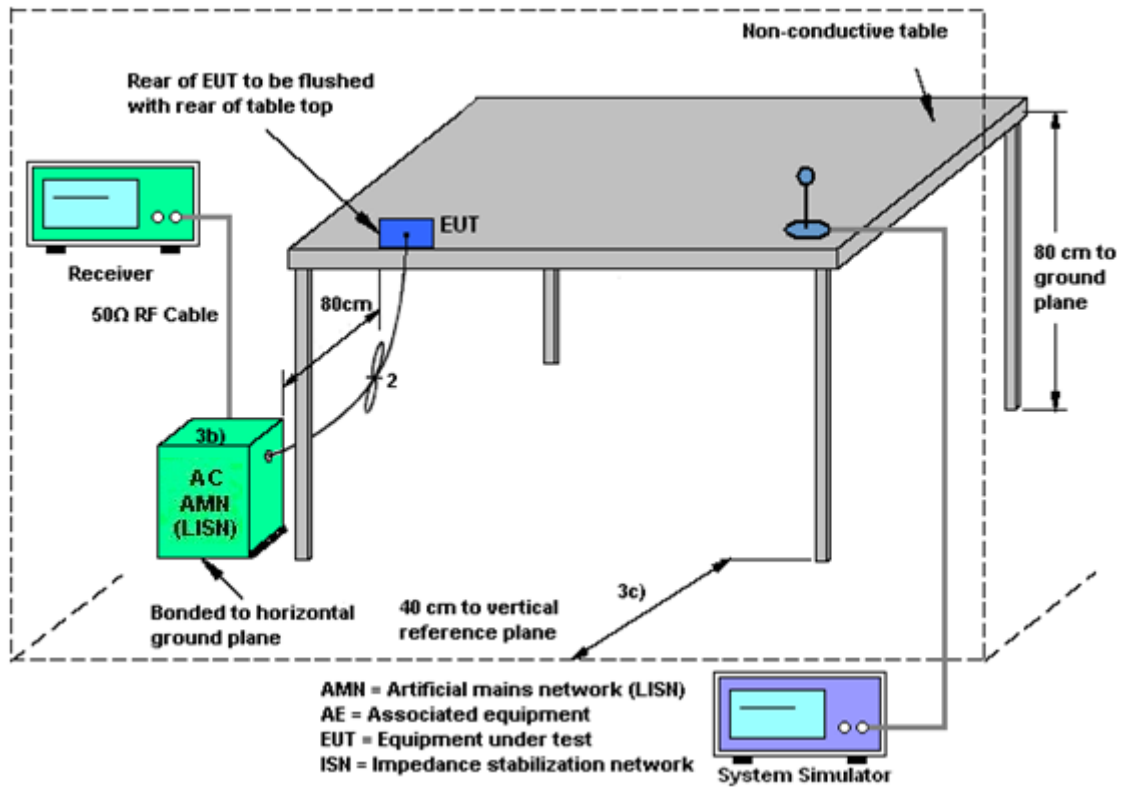

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	May 06, 2020~ Jul. 07, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	May 06, 2020~ Jul. 07, 2020	Oct. 11, 2020	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz~18GHz	Nov. 04, 2019	May 06, 2020~ Jul. 07, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	May 06, 2020~ Jul. 07, 2020	Nov. 06, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	May 06, 2020~ Jul. 07, 2020	Jan. 08, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 14, 2019	May 06, 2020~ Jul. 07, 2020	Nov. 13, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 28, 2019	May 06, 2020~ Jul. 07, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	3GHz High Pass Filter	Sep. 15, 2019	May 06, 2020~ Jul. 07, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1.53GHz Low Pass Filter	Sep. 15, 2019	May 06, 2020~ Jul. 07, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz~30MHz	Mar. 12, 2020	May 06, 2020~ Jul. 07, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 12, 2020	May 06, 2020~ Jul. 07, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30MHz~18GHz	Mar. 12, 2020	May 06, 2020~ Jul. 07, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 12, 2020	May 06, 2020~ Jul. 07, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11681/ 4PE	30MHz~18GHz	Mar. 12, 2020	May 06, 2020~ Jul. 07, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 06, 2020~ Jul. 07, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	May 06, 2020~ Jul. 07, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 06, 2020~ Jul. 07, 2020	N/A	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	171000180 0054002	1GHz~18GHz	Aug. 06, 2019	May 06, 2020~ Jul. 07, 2020	Aug. 05, 2020	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	May 06, 2020~ Jul. 07, 2020	Dec. 12, 2020	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	BBHA9170 980	18GHz-40GHz	N/A	May 06, 2020~ Jul. 07, 2020	N/A	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Apr. 28, 2020 ~ May 24, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	Apr. 28, 2020 ~ May 24, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Aug. 14, 2019	Apr. 28, 2020 ~ May 24, 2020	Aug. 13, 2020	Conducted (TH05-HY)
Switch Control Manframe	Burgeon	ETF-058	EC130048 4	N/A	Aug. 22, 2019	Apr. 28, 2020 ~ May 24, 2020	Aug. 21, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 24, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Jun. 24, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 07, 2019	Jun. 24, 2020	Nov. 06, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Jun. 24, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 24, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Jun. 24, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Jun. 24, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2020/4/28~5/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.016	0.664	0.50	Pass
BLE	1Mbps	1	19	2440	1.020	0.660	0.50	Pass
BLE	1Mbps	1	39	2480	1.020	0.652	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	18.60	30.00	-2.20	16.40	36.00	Pass
BLE	1Mbps	1	19	2440	18.20	30.00	-2.20	16.00	36.00	Pass
BLE	1Mbps	1	39	2480	18.10	30.00	-2.20	15.90	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	18.09	3.31	-2.20	8.00	Pass
BLE	1Mbps	1	19	2440	18.19	3.27	-2.20	8.00	Pass
BLE	1Mbps	1	39	2480	17.87	2.86	-2.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.004	1.136	0.50	Pass
BLE	2Mbps	1	19	2440	2.004	1.124	0.50	Pass
BLE	2Mbps	1	39	2480	2.008	1.132	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	18.60	30.00	-2.20	16.40	36.00	Pass
BLE	2Mbps	1	19	2440	18.50	30.00	-2.20	16.30	36.00	Pass
BLE	2Mbps	1	39	2480	18.40	30.00	-2.20	16.20	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	18.29	0.57	-2.20	8.00	Pass
BLE	2Mbps	1	19	2440	18.10	0.60	-2.20	8.00	Pass
BLE	2Mbps	1	39	2480	17.91	0.25	-2.20	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~25°C
		Relative Humidity :	42~50%

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

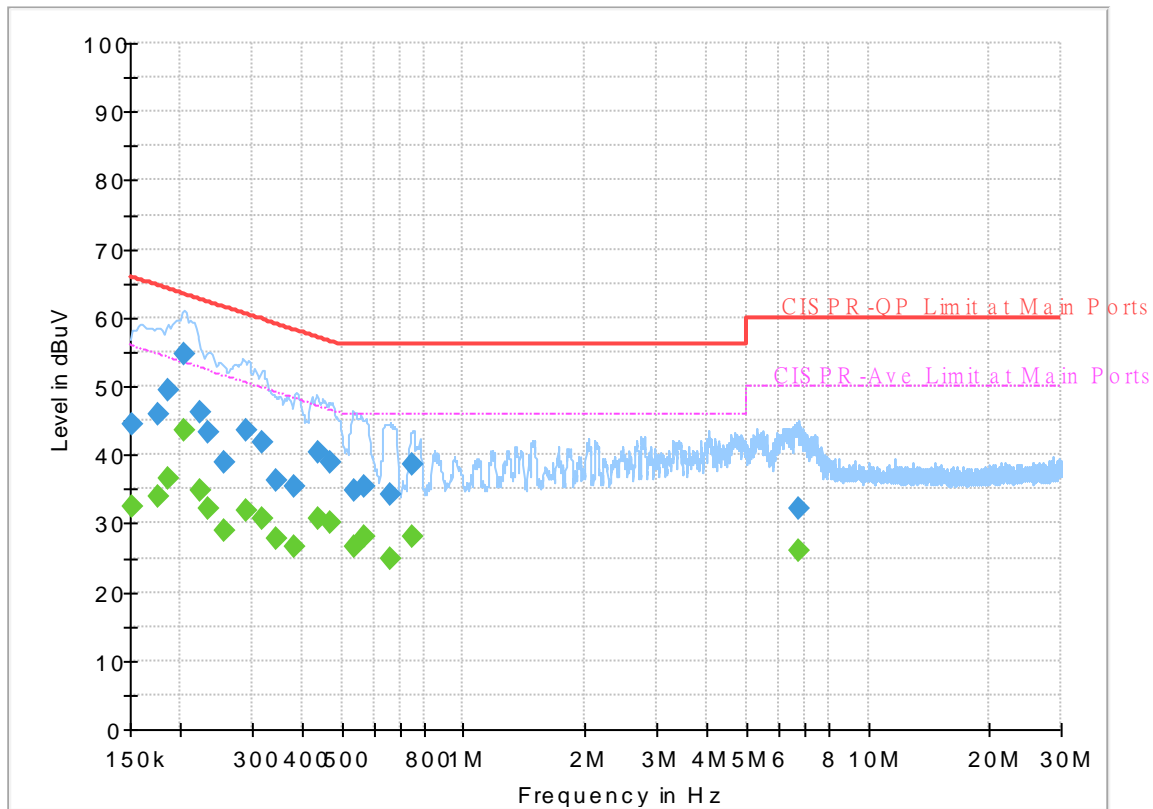

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	32.36	55.88	23.52	L1	OFF	19.6
0.152250	44.48	---	65.88	21.40	L1	OFF	19.6
0.175110	---	33.80	54.71	20.91	L1	OFF	19.6
0.175110	45.84	---	64.71	18.87	L1	OFF	19.6
0.186000	---	36.60	54.21	17.61	L1	OFF	19.6
0.186000	49.42	---	64.21	14.79	L1	OFF	19.6
0.203910	---	43.63	53.45	9.82	L1	OFF	19.6
0.203910	54.70	---	63.45	8.75	L1	OFF	19.6
0.224250	---	34.90	52.66	17.76	L1	OFF	19.6
0.224250	46.26	---	62.66	16.40	L1	OFF	19.6
0.234960	---	32.19	52.27	20.08	L1	OFF	19.6
0.234960	43.20	---	62.27	19.07	L1	OFF	19.6
0.255300	---	28.98	51.58	22.60	L1	OFF	19.6
0.255300	38.80	---	61.58	22.78	L1	OFF	19.6
0.289500	---	31.80	50.54	18.74	L1	OFF	19.6
0.289500	43.52	---	60.54	17.02	L1	OFF	19.6
0.319290	---	30.74	49.73	18.99	L1	OFF	19.6
0.319290	41.92	---	59.73	17.81	L1	OFF	19.6
0.344670	---	27.67	49.09	21.42	L1	OFF	19.6
0.344670	36.30	---	59.09	22.79	L1	OFF	19.6
0.381750	---	26.64	48.24	21.60	L1	OFF	19.6

0.381750	35.28	---	58.24	22.96	L1	OFF	19.6
0.435570	---	30.66	47.15	16.49	L1	OFF	19.6
0.435570	40.37	---	57.15	16.78	L1	OFF	19.6
0.470310	---	30.11	46.51	16.40	L1	OFF	19.6
0.470310	38.86	---	56.51	17.65	L1	OFF	19.6
0.537000	---	26.62	46.00	19.38	L1	OFF	19.6
0.537000	34.72	---	56.00	21.28	L1	OFF	19.6
0.571110	---	27.94	46.00	18.06	L1	OFF	19.6
0.571110	35.46	---	56.00	20.54	L1	OFF	19.6
0.662910	---	24.83	46.00	21.17	L1	OFF	19.6
0.662910	34.19	---	56.00	21.81	L1	OFF	19.6
0.750210	---	27.95	46.00	18.05	L1	OFF	19.6
0.750210	38.68	---	56.00	17.32	L1	OFF	19.6
6.726660	---	25.95	50.00	24.05	L1	OFF	19.9
6.726660	32.20	---	60.00	27.80	L1	OFF	19.9

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

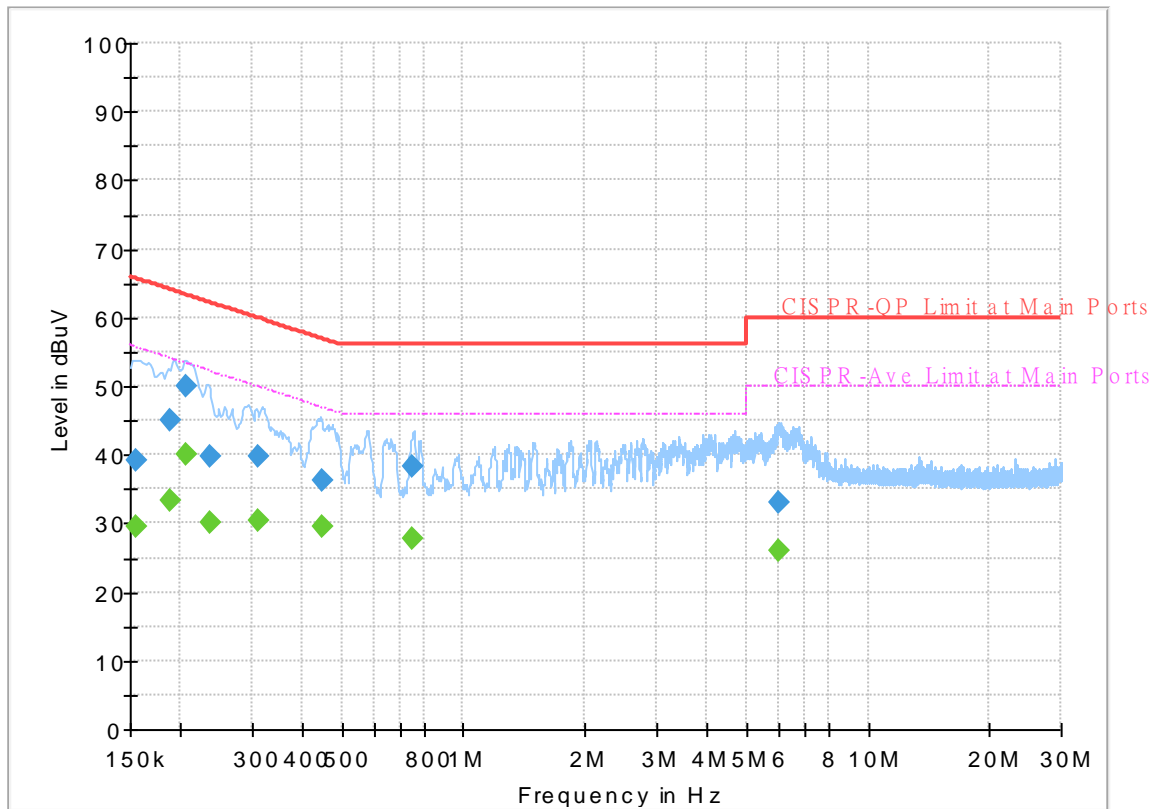

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	39.22	---	65.75	26.53	N	OFF	19.5
0.154500	---	29.55	55.75	26.20	N	OFF	19.5
0.189330	44.92	---	64.07	19.15	N	OFF	19.5
0.189330	---	33.35	54.07	20.72	N	OFF	19.5
0.206070	49.94	---	63.36	13.42	N	OFF	19.5
0.206070	---	40.08	53.36	13.28	N	OFF	19.5
0.235410	39.71	---	62.26	22.55	N	OFF	19.5
0.235410	---	30.11	52.26	22.15	N	OFF	19.5
0.312000	39.72	---	59.92	20.20	N	OFF	19.5
0.312000	---	30.29	49.92	19.63	N	OFF	19.5
0.449250	36.25	---	56.89	20.64	N	OFF	19.5
0.449250	---	29.50	46.89	17.39	N	OFF	19.5
0.750750	38.44	---	56.00	17.56	N	OFF	19.5
0.750750	---	27.90	46.00	18.10	N	OFF	19.5
6.047340	33.16	---	60.00	26.84	N	OFF	19.7
6.047340	---	26.01	50.00	23.99	N	OFF	19.7



Appendix C. Radiated Spurious Emission

Test Engineer :	Cookie Ku , Fu Chen and Troye Hsieh	Temperature :	19.6~21.6°C
		Relative Humidity :	64.1~69.1%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2356.62	53.18	-20.82	74	42.24	27.59	16.59	33.24	362	143	P	H	
		2364.495	43.7	-10.3	54	32.78	27.57	16.59	33.24	362	143	A	H	
	*	2402	105.68	-	-	94.78	27.5	16.63	33.23	362	143	P	H	
	*	2402	105.03	-	-	94.13	27.5	16.63	33.23	362	143	A	H	
													H	
			2317.035	53.48	-20.52	74	42.51	27.67	16.55	33.25	100	53	P	V
			2347.8	43.89	-10.11	54	32.95	27.6	16.58	33.24	100	53	A	V
	*		2402	108.16	-	-	97.26	27.5	16.63	33.23	100	53	P	V
	*		2402	107.54	-	-	96.64	27.5	16.63	33.23	100	53	A	V
														V
BLE CH 19 2440MHz		2318.96	53.08	-20.92	74	42.12	27.66	16.55	33.25	313	138	P	H	
		2321.52	43.58	-10.42	54	32.62	27.66	16.55	33.25	313	138	A	H	
	*	2440	104.8	-	-	93.93	27.42	16.67	33.22	313	138	P	H	
	*	2440	104.09	-	-	93.22	27.42	16.67	33.22	313	138	A	H	
			2498	52.8	-21.2	74	42.06	27.21	16.74	33.21	313	138	P	H
			2499.52	43.45	-10.55	54	32.72	27.2	16.74	33.21	313	138	A	H
			2337.52	53.86	-20.14	74	42.92	27.62	16.57	33.25	105	112	P	V
			2372.08	43.68	-10.32	54	32.76	27.56	16.6	33.24	105	112	A	V
	*		2440	109.55	-	-	98.68	27.42	16.67	33.22	105	112	P	V
	*		2440	108.95	-	-	98.08	27.42	16.67	33.22	105	112	A	V
			2485.36	52.6	-21.4	74	41.83	27.26	16.72	33.21	105	112	P	V
			2484.24	43.5	-10.5	54	32.73	27.26	16.72	33.21	105	112	A	V



BLE CH 39 2480MHz	*	2480	103.3	-	-	92.51	27.28	16.72	33.21	298	137	P	H
	*	2480	102.77	-	-	91.98	27.28	16.72	33.21	298	137	A	H
		2485.76	55.37	-18.63	74	44.6	27.26	16.72	33.21	298	137	P	H
		2483.8	44	-10	54	33.23	27.26	16.72	33.21	298	137	A	H
													H
													H
	*	2480	108.1	-	-	97.31	27.28	16.72	33.21	116	52	P	V
	*	2480	107.6	-	-	96.81	27.28	16.72	33.21	116	52	A	V
		2483.56	57.51	-16.49	74	46.73	27.27	16.72	33.21	116	52	P	V
		2483.52	44.59	-9.41	54	33.81	27.27	16.72	33.21	116	52	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.39	-32.61	74	59.92	31	10.93	60.46	100	0	P	H
													H
													H
													H
		4804	42.23	-31.77	74	60.76	31	10.93	60.46	100	0	P	V
													V
													V
BLE CH 19 2440MHz		4880	41.53	-32.47	74	59.96	31	10.97	60.4	100	0	P	H
		7320	47.35	-26.65	74	56.6	36.5	13.36	59.11	100	0	P	H
													H
													H
		4880	40.33	-33.67	74	58.76	31	10.97	60.4	100	0	P	V
		7320	47.64	-26.36	74	56.89	36.5	13.36	59.11	100	0	P	V
													V
BLE CH 39 2480MHz		4960	40.92	-33.08	74	59.1	31.14	11.01	60.33	100	0	P	H
		7440	46.08	-27.92	74	55.53	36.38	13.21	59.04	100	0	P	H
													H
													H
		4960	41.29	-32.71	74	59.47	31.14	11.01	60.33	100	0	P	V
		7440	45.84	-28.16	74	55.29	36.38	13.21	59.04	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2384.235	53.14	-20.86	74	42.24	27.53	16.61	33.24	360	28	P	H	
		2339.19	45.62	-8.38	54	34.68	27.62	16.57	33.25	360	28	A	H	
	*	2402	105.44	-	-	94.54	27.5	16.63	33.23	360	28	P	H	
	*	2402	104.19	-	-	93.29	27.5	16.63	33.23	360	28	A	H	
													H	
													H	
			2334.045	53.23	-20.77	74	42.29	27.63	16.56	33.25	100	245	P	V
			2325.645	45.41	-8.59	54	34.45	27.65	16.56	33.25	100	245	A	V
	*		2402	108.86	-	-	97.96	27.5	16.63	33.23	100	245	P	V
	*		2402	107.56	-	-	96.66	27.5	16.63	33.23	100	245	A	V
													V	
												V		
BLE CH 19 2440MHz		2365.72	53.33	-20.67	74	42.4	27.57	16.6	33.24	388	38	P	H	
		2362.64	45.38	-8.62	54	34.46	27.57	16.59	33.24	388	38	A	H	
	*	2440	107.01	-	-	96.14	27.42	16.67	33.22	388	38	P	H	
	*	2440	105.82	-	-	94.95	27.42	16.67	33.22	388	38	A	H	
			2499.79	52.94	-21.06	74	42.21	27.2	16.74	33.21	388	38	P	H
			2497.06	44.67	-9.33	54	33.93	27.21	16.74	33.21	388	38	A	H
			2312.66	53.62	-20.38	74	42.66	27.67	16.54	33.25	106	112	P	V
			2340.1	45.22	-8.78	54	34.28	27.62	16.57	33.25	106	112	A	V
	*		2440	110.35	-	-	99.48	27.42	16.67	33.22	106	112	P	V
	*		2440	109.04	-	-	98.17	27.42	16.67	33.22	106	112	A	V
			2492.79	53.11	-20.89	74	42.36	27.23	16.73	33.21	106	112	P	V
		2495.24	45.19	-8.81	54	34.45	27.22	16.73	33.21	106	112	A	V	



BLE CH 39 2480MHz	*	2480	103.62	-	-	92.83	27.28	16.72	33.21	379	136	P	H
	*	2480	102.4	-	-	91.61	27.28	16.72	33.21	379	136	A	H
		2483.68	56.35	-17.65	74	45.57	27.27	16.72	33.21	379	136	P	H
		2483.6	46.69	-7.31	54	35.91	27.27	16.72	33.21	379	136	A	H
													H
													H
	*	2480	107.42	-	-	96.63	27.28	16.72	33.21	100	110	P	V
	*	2480	106	-	-	95.21	27.28	16.72	33.21	100	110	A	V
		2483.52	59.84	-14.16	74	49.06	27.27	16.72	33.21	100	110	P	V
		2483.52	47.67	-6.33	54	36.89	27.27	16.72	33.21	100	110	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.17	-32.83	74	59.7	60.46	31.51	10.42	100	0	P	H
													H
													H
													H
		4804	40.47	-33.53	74	59	60.46	31.51	10.42	100	0	P	V
													V
													V
BLE CH 19 2440MHz		4880	41.06	-32.94	74	59.49	60.4	31.5	10.47	100	0	P	H
		7320	47.69	-26.31	74	56.94	59.11	36.92	12.94	100	0	P	H
													H
													H
		4880	40.39	-33.61	74	58.82	60.4	31.5	10.47	100	0	P	V
		7320	48.17	-25.83	74	57.42	59.11	36.92	12.94	100	0	P	V
													V
BLE CH 39 2480MHz		4960	41.78	-32.22	74	59.96	31.14	11.01	60.33	100	0	P	H
		7440	44.97	-29.03	74	54.42	36.38	13.21	59.04	100	0	P	H
													H
													H
		4960	41.73	-32.27	74	59.91	31.14	11.01	60.33	100	0	P	V
		7440	45.19	-28.81	74	54.64	36.38	13.21	59.04	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		22389	40.72	-33.28	74	46.59	38.6	9.01	53.48	150	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23502	42.11	-31.89	74	47.22	38.9	9.29	53.3	150	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30	25.29	-14.71	40	32.8	24.15	0.76	32.42	100	0	P	H	
		80.44	25.22	-14.78	40	43.16	13.2	1.3	32.44	-	-	P	H	
		161.92	27.1	-16.4	43.5	41.66	16.06	1.89	32.51	-	-	P	H	
		848.68	28.46	-17.54	46	27.46	28.75	4.2	31.95	-	-	P	H	
		881.66	29.25	-16.75	46	27.77	29.03	4.26	31.81	-	-	P	H	
		947.62	30.71	-15.29	46	27.43	29.95	4.43	31.1	-	-	P	H	
														H
														H
														H
														H
														H
														H
			40.67	33.46	-6.54	40	46.17	18.85	0.92	32.48	100	0	P	V
			53.28	22.52	-17.48	40	41.31	12.68	1.06	32.53	-	-	P	V
			153.19	26.07	-17.43	43.5	40.14	16.6	1.82	32.49	-	-	P	V
			884.57	28.73	-17.27	46	27.29	28.97	4.27	31.8	-	-	P	V
			938.89	30.06	-15.94	46	27.39	29.48	4.41	31.22	-	-	P	V
			959.26	31.05	-14.95	46	26.9	30.64	4.46	30.95	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<WPC Mode>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz	*	2480	107.46	-	-	96.67	27.28	16.72	33.21	100	294	P	H
	*	2480	106.27	-	-	95.48	27.28	16.72	33.21	100	294	A	H
		2483.6	60.05	-13.95	74	49.27	27.27	16.72	33.21	100	294	P	H
		2483.56	47.38	-6.62	54	36.6	27.27	16.72	33.21	100	294	A	H
													H
													H
	*	2480	103.52	-	-	92.73	27.28	16.72	33.21	374	63	P	V
	*	2480	102.19	-	-	91.4	27.28	16.72	33.21	374	63	A	V
		2483.6	56.76	-17.24	74	45.98	27.27	16.72	33.21	374	63	P	V
		2483.52	45.47	-8.53	54	34.69	27.27	16.72	33.21	374	63	A	V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	43.79	-30.21	74	59.9	31.14	11.01	58.26	100	0	P	H
		7440	44.06	-29.94	74	53.06	36.38	13.21	58.59	100	0	P	H
													H
													H
		4960	43.92	-30.08	74	60.03	31.14	11.5	58.26	100	0	P	V
		7440	43.75	-30.25	74	52.75	36.38	13.58	58.59	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		23726	42.2	-31.8	74	47.35	38.9	9.25	53.3	150	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			20954	41.38	-32.62	74	48.93	37.83	8.03	53.41	150	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30.97	19.54	-20.46	40	27.32	23.86	0.78	32.42	-	-	P	H	
		127.97	23.6	-19.9	43.5	37.02	17.4	1.62	32.44	-	-	P	H	
		182.29	20.65	-22.85	43.5	36.57	14.63	2	32.55	-	-	P	H	
		862.26	29.77	-16.23	46	28.42	29.01	4.23	31.89	-	-	P	H	
		926.28	30.12	-15.88	46	28.06	29.06	4.38	31.38	-	-	P	H	
		959.26	30.35	-15.65	46	26.2	30.64	4.46	30.95	100	0	P	H	
														H
														H
														H
														H
														H
														H
			35.82	31.97	-8.03	40	42.28	21.29	0.85	32.45	100	0	P	V
			80.44	22.97	-17.03	40	40.91	13.2	1.3	32.44	-	-	P	V
			123.12	26.35	-17.15	43.5	39.93	17.28	1.57	32.43	-	-	P	V
			808.91	28.48	-17.52	46	28.54	28	4.06	32.12	-	-	P	V
			877.78	29.52	-16.48	46	28.03	29.07	4.25	31.83	-	-	P	V
			945.68	30.77	-15.23	46	27.62	29.85	4.43	31.13	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Cookie Ku , Fu Chen and Troye Hsieh	Temperature :	19.6~21.6°C
		Relative Humidity :	64.1~69.1%

Note symbol

-L	Low channel location
-R	High channel location



<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000KHz SWT:Auto Detector : Peak</p>

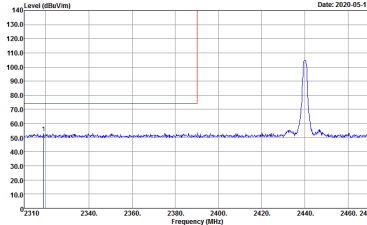
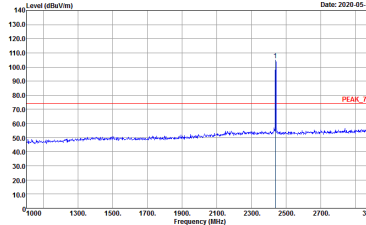
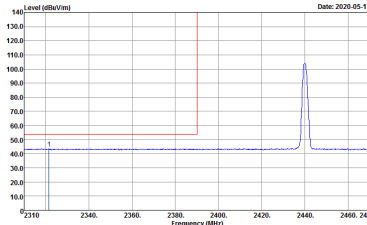
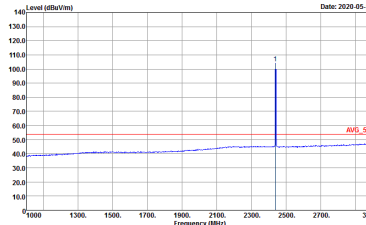


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>

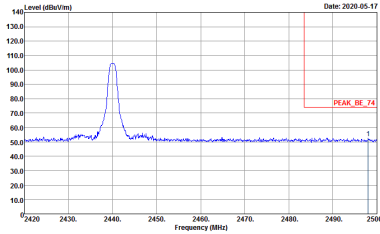
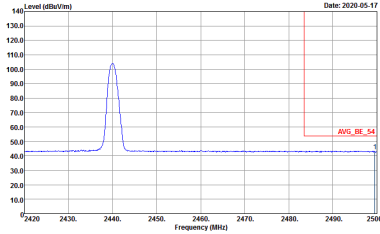


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>	<p>Left blank</p>

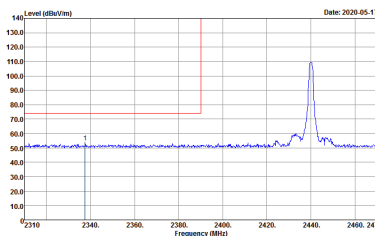
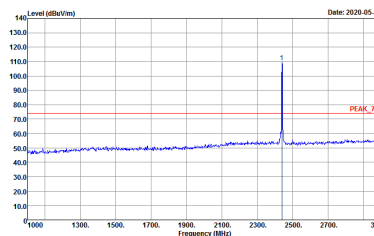
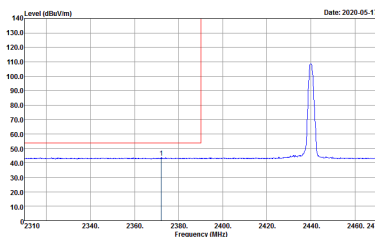
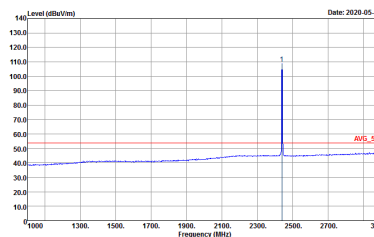


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>



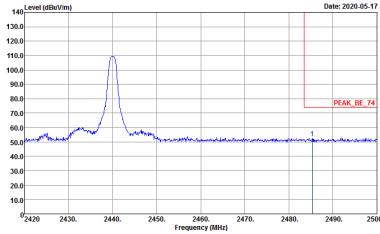
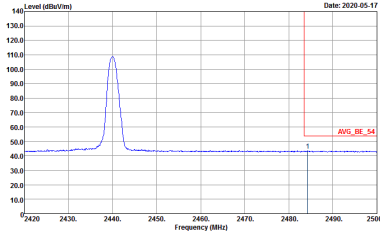


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>	Left blank

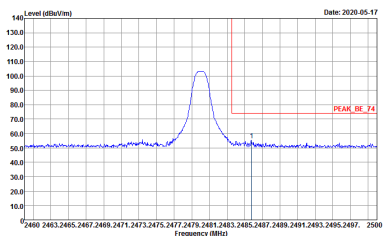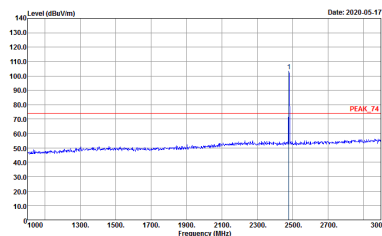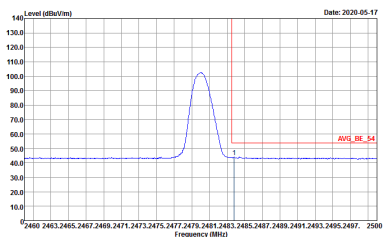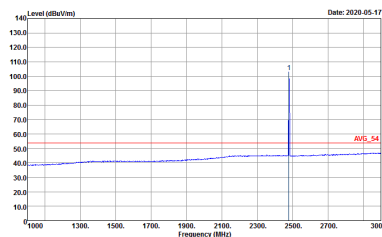

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>

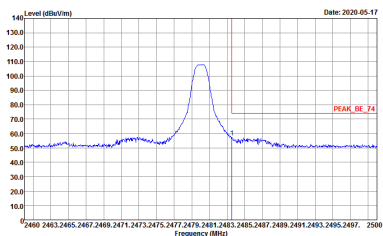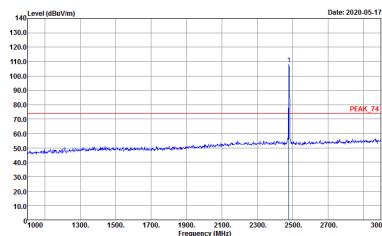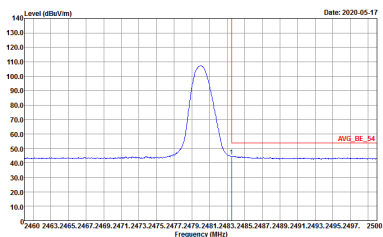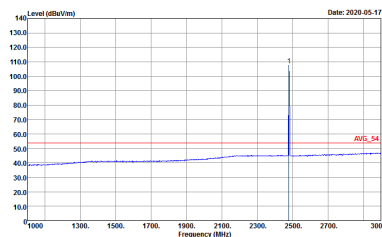

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak</p>

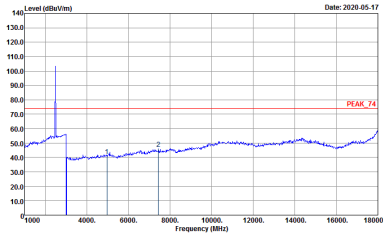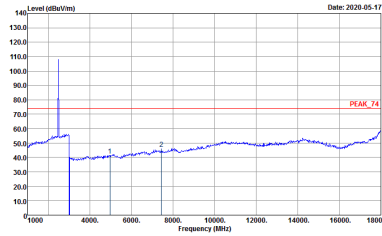





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
Peak	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak</p>



<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

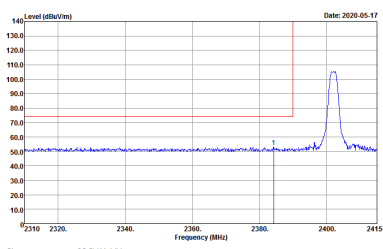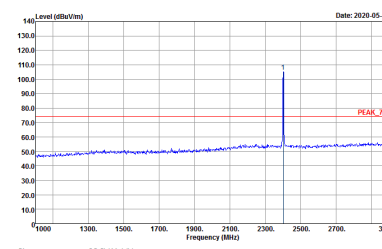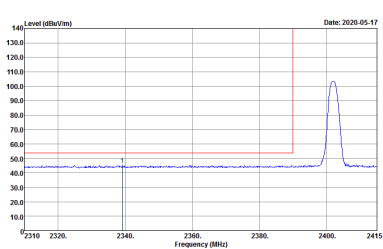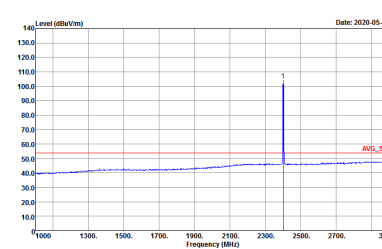BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>

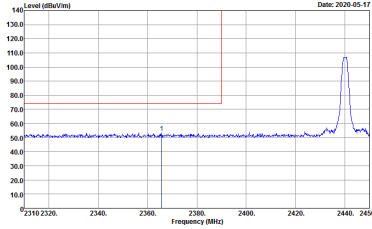
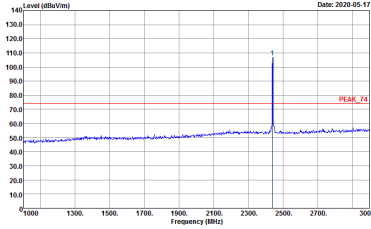
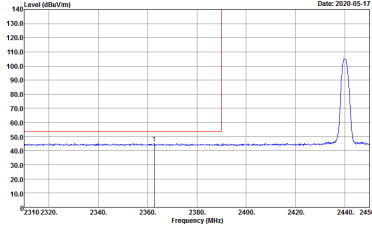
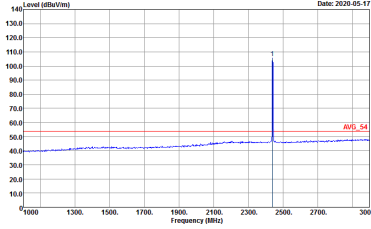


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_F4 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_F4 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	Left blank

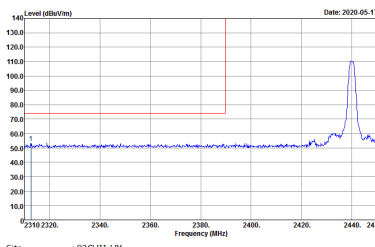
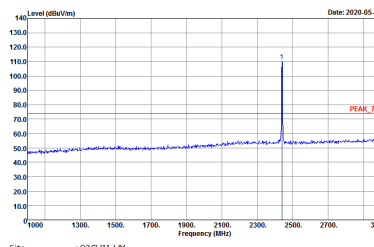
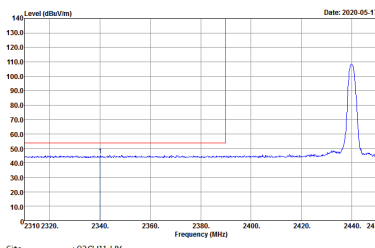
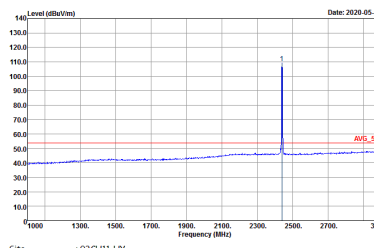


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>



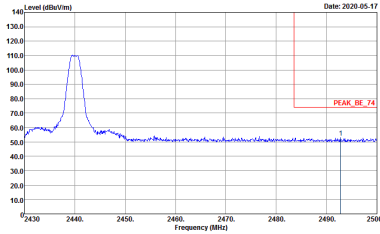
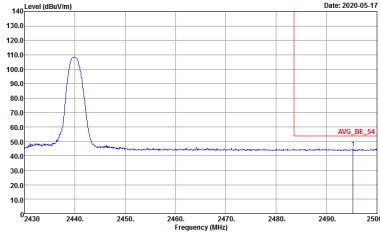


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	Left blank

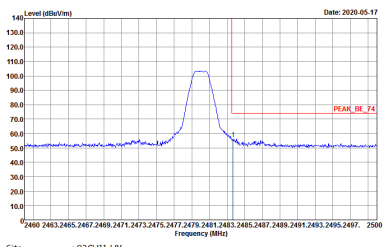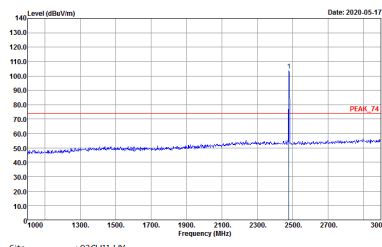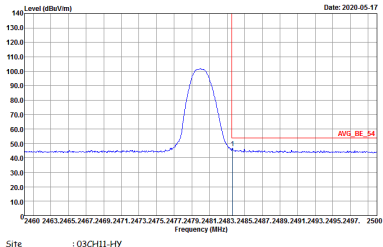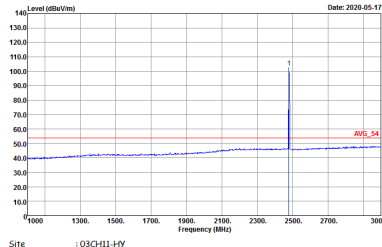

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	 <p>Date: 2020-05-17</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>

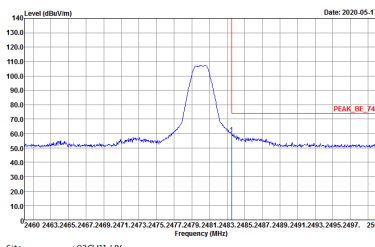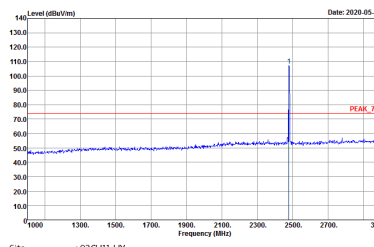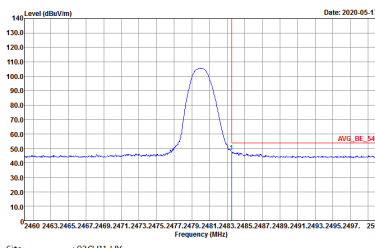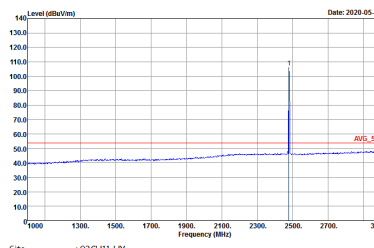

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Horizontal spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 0 to 18000 MHz. A red horizontal line is labeled PEAK_74. The date is 2020-05-17. The site is 03CH11-HY, condition is PEAK_74 3m HORN 91200-HF HORIZONTAL, and the detector is Peak.</p>	<p>Vertical spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 0 to 18000 MHz. A red horizontal line is labeled PEAK_74. The date is 2020-05-17. The site is 03CH11-HY, condition is PEAK_74 3m HORN 91200-HF VERTICAL, and the detector is Peak.</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg	<p>Horizontal spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue line representing the spectrum with a prominent peak at 2480 MHz. A red horizontal line labeled 'PEAK_74' is drawn across the plot at approximately 80 dBuV/m. The x-axis ranges from 2000 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. The date is 2020-05-17. Site: 03CH11-HY, Condition: PEAK_74 3m HORN 91200-HF HORIZONTAL, Detector: Peak.</p>	<p>Vertical spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue line representing the spectrum with a prominent peak at 2480 MHz. A red horizontal line labeled 'PEAK_74' is drawn across the plot at approximately 80 dBuV/m. The x-axis ranges from 2000 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. The date is 2020-05-17. Site: 03CH11-HY, Condition: PEAK_74 3m HORN 91200-HF VERTICAL, Detector: Peak.</p>



Emission above 18 GHz
2.4GHz BLE (SHF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg	<p>Site : 03CH11-HY Condition : PEAK_74_1M 1m SHF HORN BBHA9170576 HORIZONTAL cut :</p>	<p>Site : 03CH11-HY Condition : PEAK_74_1M 1m SHF HORN BBHA9170576 VERTICAL cut :</p>



Emission below 1GHz
2.4GHz BLE (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot showing Level (dBu/1m) vs Frequency (MHz) from 50 to 1000 MHz. The plots show a red line for the limit and a blue line for the actual emission. A 'QP' label is present in the top right of each plot. Below the plots, the site and condition information is provided: Site: 03CHI1-HY, Condition: QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL/VERTICAL, Detector: Peak.





QP / Peak



<WPC Mode>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

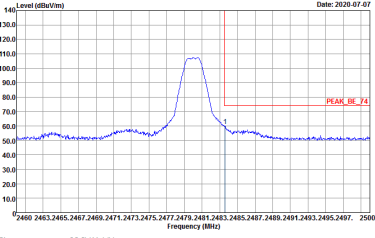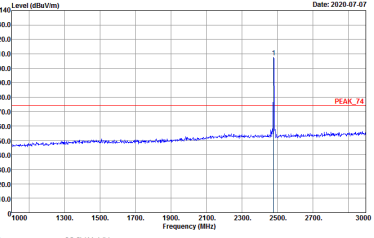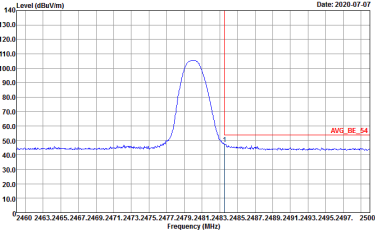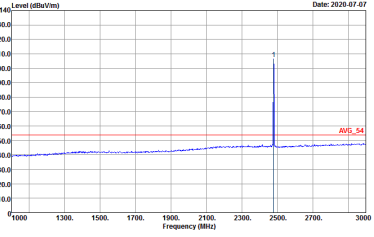BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Date: 2020-07-07</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	 <p>Date: 2020-07-07</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>
Avg.	 <p>Date: 2020-07-07</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	 <p>Date: 2020-07-07</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak</p>





Emission above 18GHz
2.4GHz BLE (SHF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg	<p>Horizontal plot showing Level (dBu/m) vs Frequency (MHz). The y-axis ranges from 10.0 to 140.0 dBu/m, and the x-axis ranges from 18000 to 25000 MHz. A peak is observed at approximately 24.18 MHz, labeled 'PEAK_74_1M'. The plot date is 2020-07-06. Site: 03CH11-HY, Condition: PEAK_74_1M SHF HORN 88HA9170576 HORIZONTAL.</p>	<p>Vertical plot showing Level (dBu/m) vs Frequency (MHz). The y-axis ranges from 10.0 to 140.0 dBu/m, and the x-axis ranges from 18000 to 25000 MHz. A peak is observed at approximately 24.18 MHz, labeled 'PEAK_74_1M'. The plot date is 2020-07-06. Site: 03CH11-HY, Condition: PEAK_74_1M SHF HORN 88HA9170576 VERTICAL.</p>



Emission below 1GHz
2.4GHz BLE (LF)

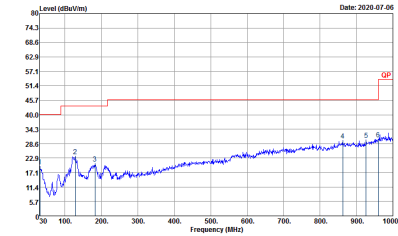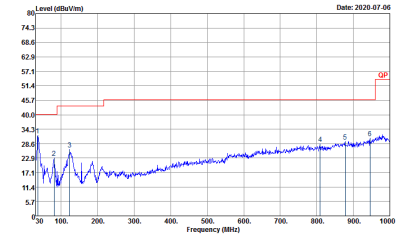BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>




Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth –LE for 1Mbps	61.54	384	2.60	3kHz	2.11
Bluetooth –LE for 2Mbps	31.85	200	5.00	10kHz	4.97




Bluetooth - LE for 1Mbps

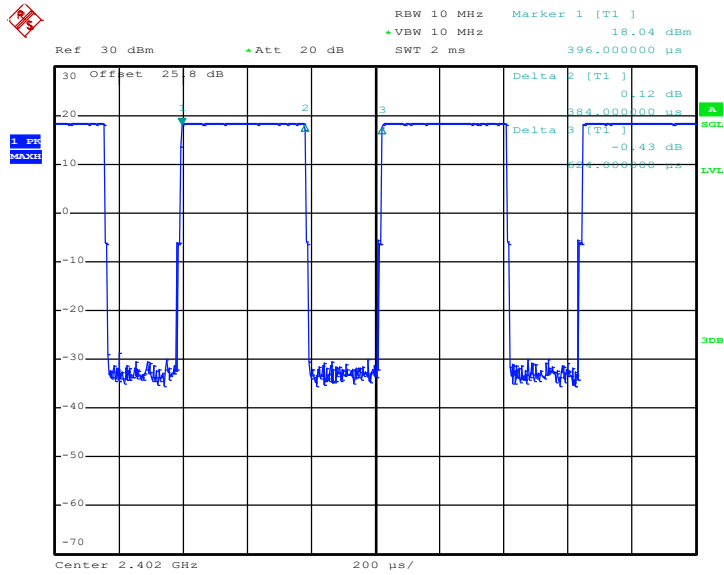

Date: 28.APR.2020 22:52:23

Bluetooth - LE for 2Mbps

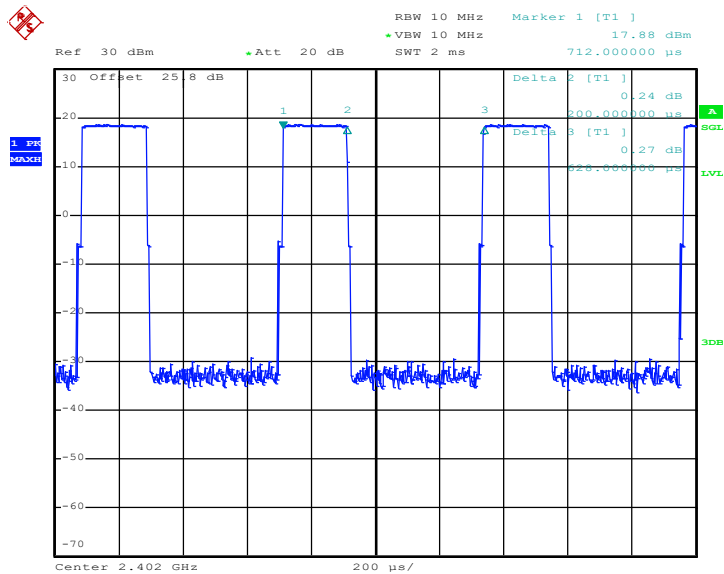

Date: 28.APR.2020 23:00:04

—THE END—