



FCC RADIO TEST REPORT

FCC ID : A4RGD1YQ
Equipment : Phone
Model Name : GD1YQ
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2, 90(R)

The product was received on Apr. 29, 2020 and testing was started from Apr. 29, 2020 and completed on Jul. 20, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Product Feature of Equipment Under Test.....5

 1.2 Product Specification of Equipment Under Test.....5

 1.3 Modification of EUT6

 1.4 Testing Site6

 1.5 Applied Standards7

2 Test Configuration of Equipment Under Test8

 2.1 Test Mode8

 2.2 Connection Diagram of Test System9

 2.3 Support Unit used in test configuration and system9

 2.4 Measurement Results Explanation Example.....9

 2.5 Frequency List of Low/Middle/High Channels 10

3 Conducted Test Items.....11

 3.1 Measuring Instruments 11

 3.2 Conducted Output Power Measurement and ERP 12

 3.3 Peak-to-Average Ratio 13

 3.4 Occupied Bandwidth..... 14

 3.5 Conducted Band Edge 15

 3.6 Emission Mask..... 16

 3.7 Conducted Spurious Emission 17

 3.8 Frequency Stability 18

4 Radiated Test Items19

 4.1 Measuring Instruments 19

 4.2 Radiated Spurious Emission21

5 List of Measuring Equipment.....22

6 Uncertainty of Evaluation24

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of ERP and Radiated Test



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	Pass	-
3.6	§2.1051 §90.210 (n)	Emission Mask	Pass	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	Pass	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	Under limit 17.76 dB at 1584.000 MHz for Primary Antenna Under limit 18.12 dB at 1584.000 MHz for ASDIV Antenna

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	GD1YQ
FCC ID	A4RGD1YQ
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDM/HSPA/LTE/5G NR /NFC/GNSS/WPC/WPT WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
04031FDD4000G8	Conducted Measurement ERP
04071FDD40000A	Radiated Spurious Emission

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	790.5 ~ 795.5 MHz
Rx Frequency	760.5 ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	<Primary Antenna> 24.45 dBm <ASDIV Antenna> 24.41 dBm
Antenna Type	<Primary Antenna>: Monopole Antenna <ASDIV Antenna>: Monopole Antenna
Type of Modulation	QPSK / 16QAM / 64QAM

<Primary Antenna>

Radio Tech	Band Number	Antenna name	Gain
LTE	B14	ANT0	-4.0

<ASDIV Antenna>

Radio Tech	Band Number	Antenna name	Gain
LTE	B14	ANT1	-7.2



1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY
Test Engineer	Luffy Lin
Temperature	22~25°C
Relative Humidity	51~55%

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu
Temperature	24.3~26.4°C
Relative Humidity	56.1~68.1%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and Accessory (Adapter or Earphone). The worst cases (Primary Antenna: X plane with Adapter; ASDIV Antenna :Y Plane with Adapter) were recorded in this report.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	14	-	-		v	-	-	v	v	v	v		v		v	
26dB and 99% Bandwidth	14	-	-	v	v	-	-	v	v	v			v	v	v	v
Conducted Band Edge	14	-	-	v	v	-	-	v	v	v	v		v	v		v
Emission Mask	14	-	-	v	v	-	-	v	v	v	v		v	v	v	v
Conducted Spurious Emission	14	-	-	v	v	-	-	v	v	v	v			v	v	v
Frequency Stability	14	-	-		v	-	-	v	v	v			v		v	
E.R.P	14	-	-	v	v	-	-	v	v	v	v			v	v	v
Radiated Spurious Emission	14	Worst Case											v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The mark "- " means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performed with Adapter 2. The radiated spurious emissions measurement in 1559-1610 MHz were wideband emissions. 															

2.2 Connection Diagram of Test System

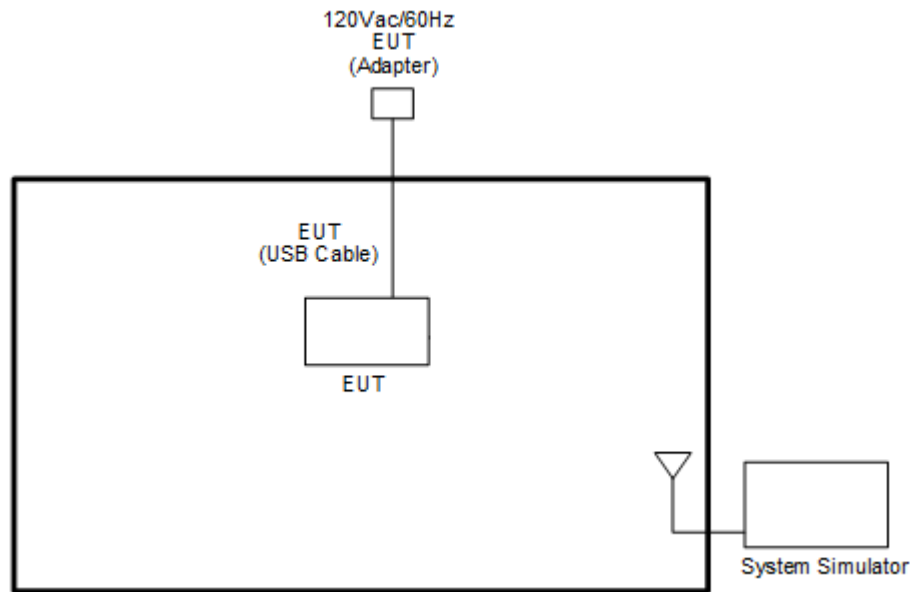

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.5 + 10 = 14.5 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

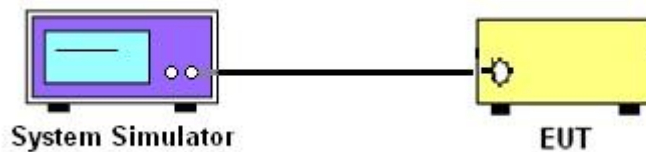

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

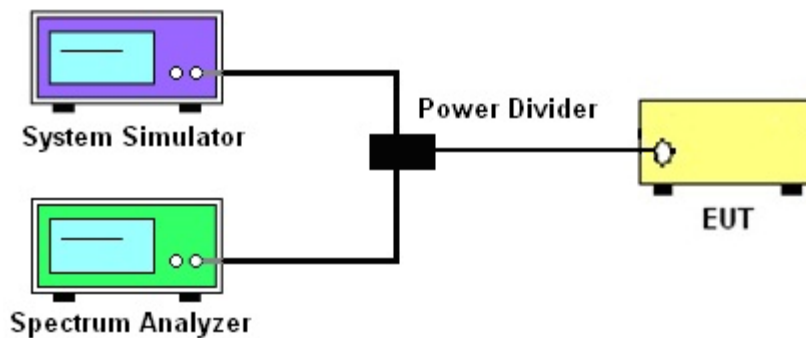

3.1.4 Frequency Stability

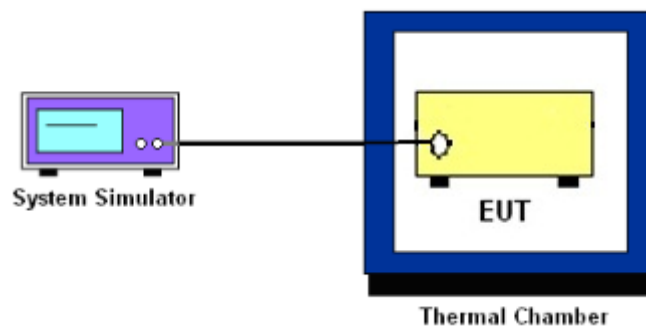

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement and ERP

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Emission Mask

3.6.1 Description of Emissions Mask Measurement

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated emissions below 30MHz

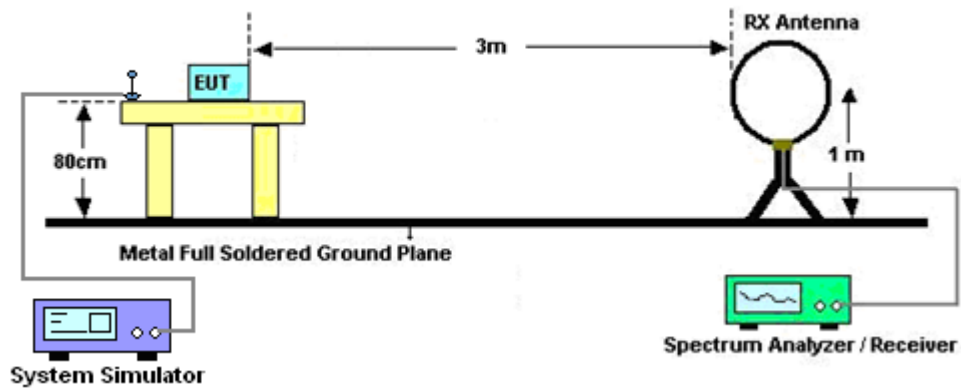

For radiated test from 30MHz to 1GHz

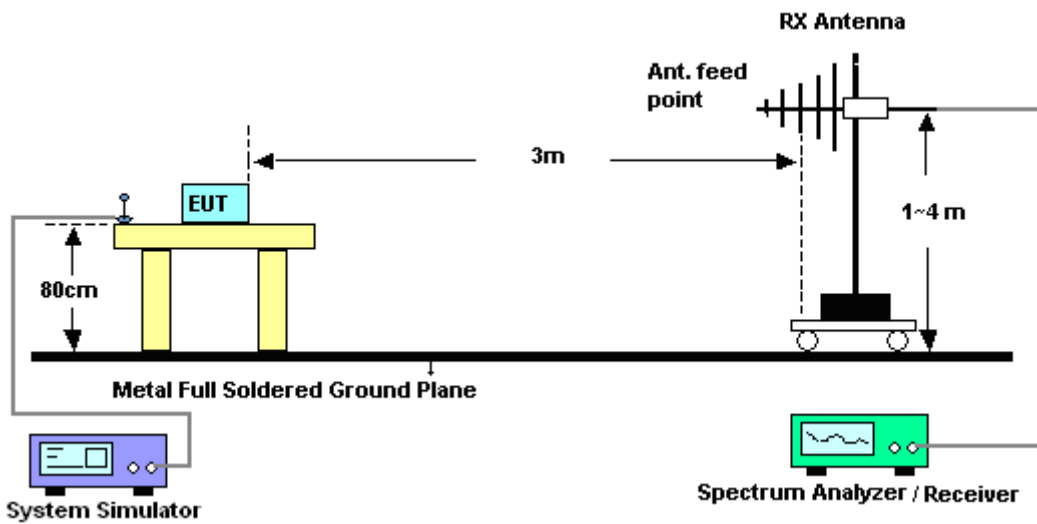

For radiated test above 1GHz

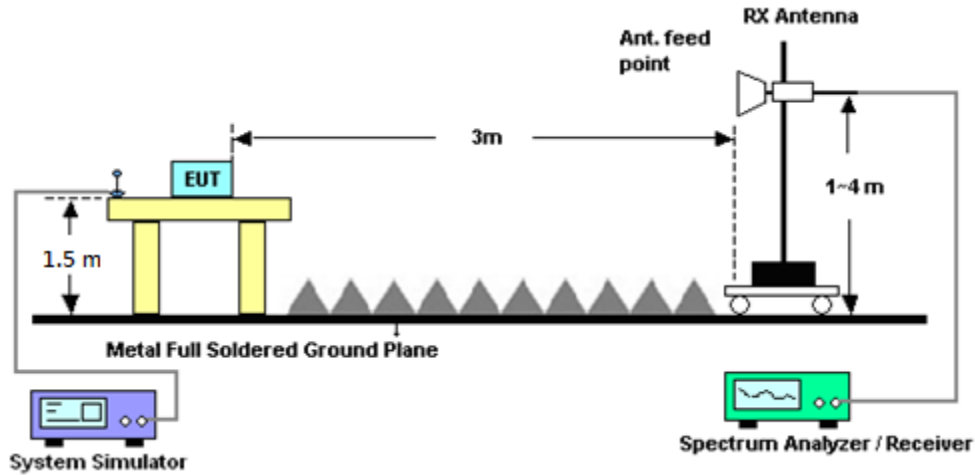

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission

4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Apr. 29, 2020~ Jun. 20, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	Apr. 29, 2020~ Jun. 20, 2020	Oct 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-132 8	1GHz ~ 18GHz	Nov. 14, 2019	Apr. 29, 2020~ Jun. 20, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-152 2	1GHz ~ 18GHz	Sep. 19, 2019	Apr. 29, 2020~ Jun. 20, 2020	Sep. 18, 2020	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Apr. 29, 2020~ Jun. 20, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA00101800 -30-10P	160118000 2	1GHz~18GHz	Feb. 07, 2020	Apr. 29, 2020~ Jun. 20, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Dec. 20, 2019	Apr. 29, 2020~ Jun. 20, 2020	Dec. 19, 2020	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Apr. 29, 2020~ Jun. 20, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP140349	N/A	Oct. 25, 2019	Apr. 29, 2020~ Jun. 20, 2020	Oct. 24, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Dec. 12, 2019	Apr. 29, 2020~ Jun. 20, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	Apr. 29, 2020~ Jun. 20, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 29, 2020~ Jun. 20, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Apr. 29, 2020~ Jun. 20, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 29, 2020~ Jun. 20, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-00098 9	N/A	N/A	Apr. 29, 2020~ Jun. 20, 2020	N/A	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-1 2SS	SN2	1.2GHz Low Pass Filter	Mar. 21, 2020	Apr. 29, 2020~ Jun. 20, 2020	Mar. 20, 2021	Radiation (03CH12-HY)
Filter	Wainwright	H3G018G1	SN477221	3GHz High Pass Filter	N/A	Apr. 29, 2020~ Jun. 20, 2020	N/A	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8821C	626200253 41	-	Oct. 24, 2019	Apr. 30, 2020~ Jul. 03, 2020	Oct. 23, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	Apr. 30, 2020~ Jul. 03, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 02, 2019	Apr. 30, 2020~ Jul. 03, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	Apr. 30, 2020~ Jul. 03, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 13, 2020	Apr. 30, 2020~ Jul. 03, 2020	Jan. 12, 2021	Conducted (TH05-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.24
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.62
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

<Primary Antenna>

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		24.45	
10	1	25			24.40	
10	1	49			24.35	
10	25	0			23.49	
10	25	12			23.52	
10	25	25			23.56	
10	50	0			23.48	
10	1	0	16-QAM	-	23.89	-
10	1	25			23.76	
10	1	49			23.78	
10	25	0			22.50	
10	25	12			22.51	
10	25	25			22.54	
10	50	0			22.48	
10	1	0	64-QAM		22.70	
10	1	25			22.76	
10	1	49			22.63	
10	25	0			21.53	
10	25	12			21.53	
10	25	25			21.59	
10	50	0			21.51	
5	1	0	QPSK	24.38	24.44	24.43
5	1	12		24.41	24.36	24.42
5	1	24		24.30	24.27	24.31
5	12	0		23.39	23.43	23.43
5	12	7		23.49	23.44	23.47
5	12	13		23.55	23.46	23.55
5	25	0		23.42	23.43	23.48
5	1	0	16-QAM	23.82	23.81	23.87
5	1	12		23.68	23.68	23.69
5	1	24		23.70	23.70	23.78
5	12	0		22.50	22.41	22.41
5	12	7		22.41	22.50	22.46
5	12	13		22.51	22.49	22.51
5	25	0		22.41	22.48	22.39
5	1	0	64-QAM	22.70	22.61	22.65
5	1	12		22.75	22.68	22.75
5	1	24		22.60	22.63	22.54
5	12	0		21.51	21.47	21.46
5	12	7		21.44	21.47	21.47
5	12	13		21.50	21.54	21.54
5	25	0		21.42	21.49	21.51



<ASDIV Antenna>

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		24.41	
10	1	25			24.31	
10	1	49			24.29	
10	25	0			23.42	
10	25	12			23.41	
10	25	25			23.47	
10	50	0			23.40	
10	1	0	16-QAM		23.76	
10	1	25			23.78	
10	1	49			23.69	
10	25	0			22.40	
10	25	12			22.44	
10	25	25			22.45	
10	50	0			22.40	
10	1	0	64-QAM		22.65	
10	1	25			22.68	
10	1	49			22.59	
10	25	0			21.45	
10	25	12			21.48	
10	25	25			21.50	
10	50	0			21.42	
5	1	0	QPSK	24.39	24.32	24.35
5	1	12		24.22	24.29	24.26
5	1	24		24.24	24.25	24.24
5	12	0		23.34	23.34	23.40
5	12	7		23.34	23.33	23.38
5	12	13		23.44	23.43	23.46
5	25	0		23.37	23.31	23.32
5	1	0	16-QAM	23.74	23.67	23.76
5	1	12		23.69	23.68	23.72
5	1	24		23.59	23.64	23.60
5	12	0		22.30	22.32	22.35
5	12	7		22.38	22.34	22.44
5	12	13		22.36	22.36	22.36
5	25	0		22.37	22.38	22.35
5	1	0	64-QAM	22.58	22.60	22.65
5	1	12		22.59	22.59	22.63
5	1	24		22.53	22.51	22.49
5	12	0		21.38	21.43	21.37
5	12	7		21.47	21.39	21.47
5	12	13		21.43	21.43	21.50
5	25	0		21.42	21.41	21.33



LTE Band 14


Peak-to-Average Ratio

Mode	LTE Band 14 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	3.62	5.07	5.57	6.03	
Highest CH	-	-	-	-	
Mode	LTE Band 14 / 10MHz				
Mod.	64QAM		-		Limit: 13dB
RB Size	1RB	Full RB	-	-	Result
Lowest CH	-	-	-	-	PASS
Middle CH	7.07	6.49	-	-	
Highest CH	-	-	-	-	




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

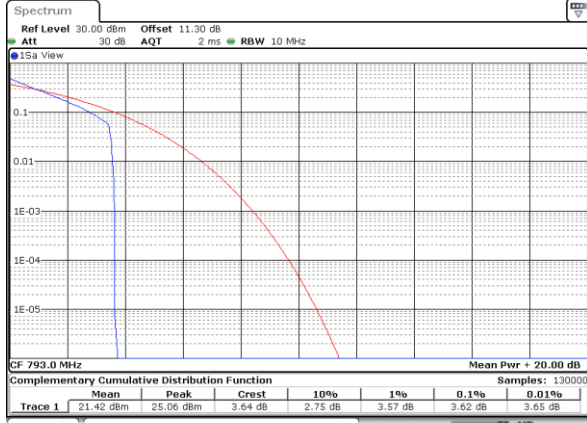

Date: 15 MAY 2020 17:25:31


Middle Channel / Full RB

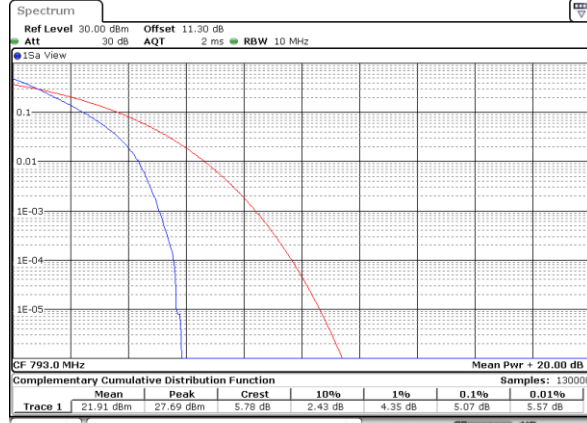

Date: 15 MAY 2020 17:25:53


LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

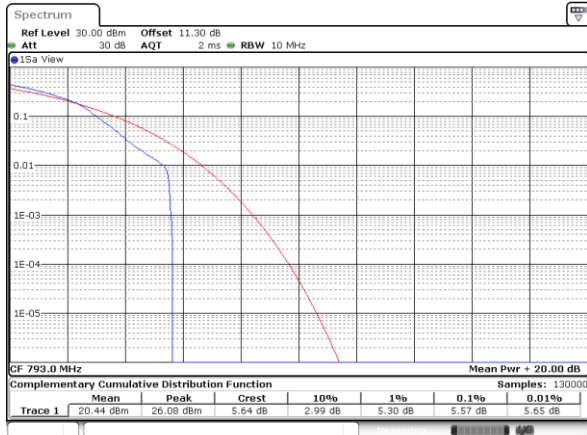

Date: 15 MAY 2020 17:25:02


Middle Channel / Full RB

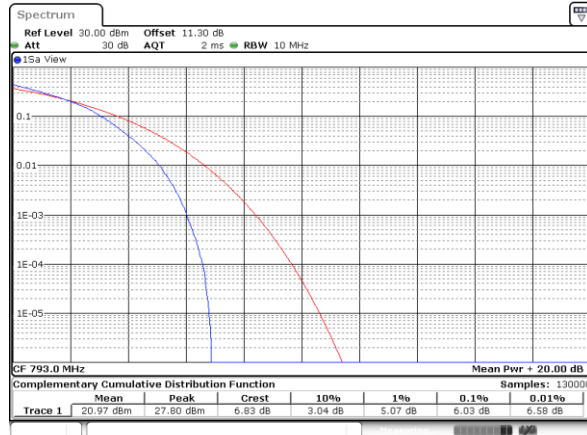

Date: 15 MAY 2020 17:25:19


LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

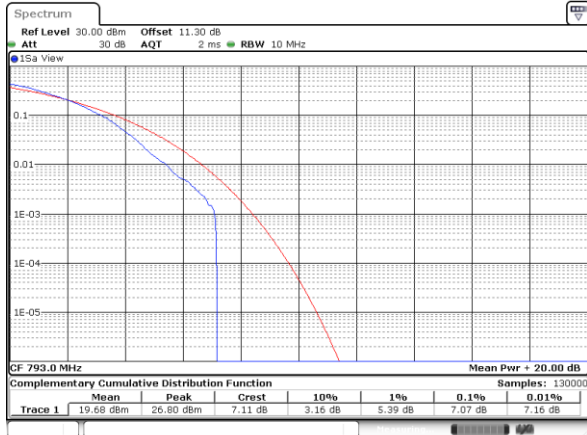

Date: 15 MAY 2020 17:24:12

Middle Channel / Full RB

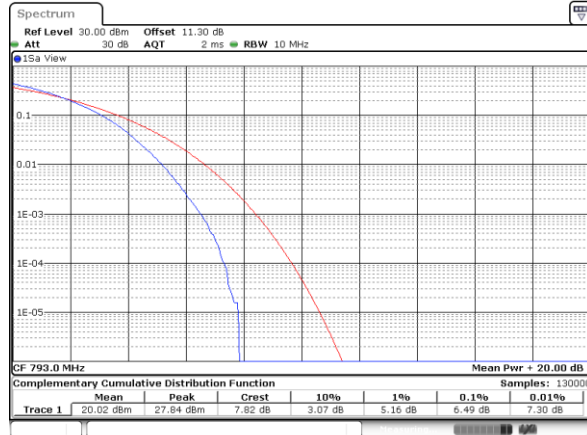

Date: 15 MAY 2020 17:24:24




26dB Bandwidth

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.88	4.86	-	-	-	-	-	-
Middle CH	-	-	-	-	4.89	4.82	9.81	9.67	-	-	-	-
Highest CH	-	-	-	-	4.89	4.88	-	-	-	-	-	-
Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.86	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.93	-	9.81	-	-	-	-	-
Highest CH	-	-	-	-	4.92	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

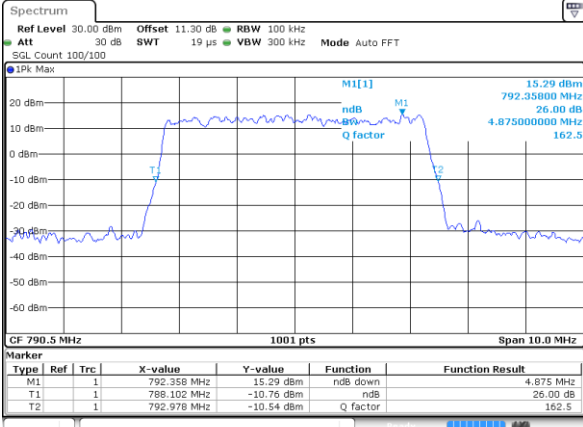


Date: 15 MAY 2020 15:51:42

Lowest Channel / 5MHz / 16QAM

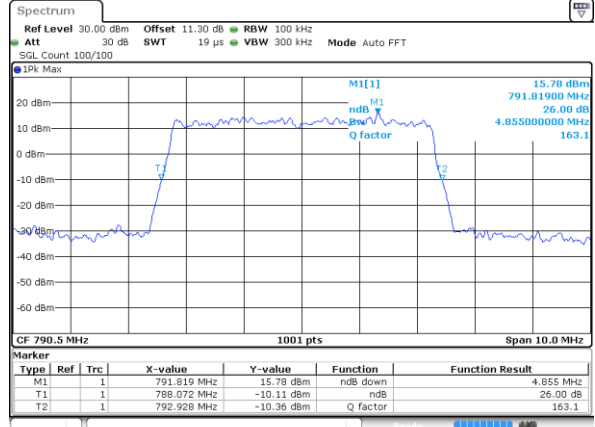


Date: 15 MAY 2020 15:51:30

Middle Channel / 5MHz / QPSK

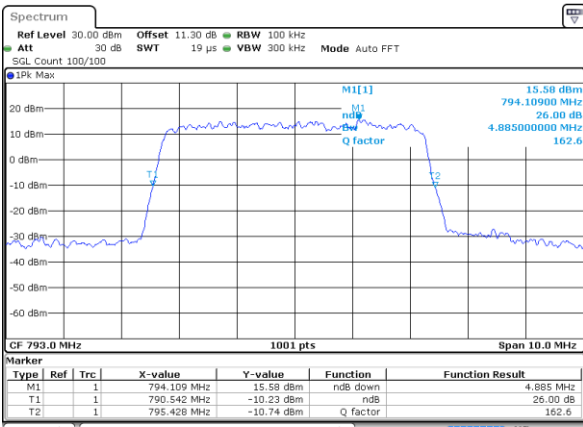


Date: 15 MAY 2020 16:01:38

Middle Channel / 5MHz / 16QAM

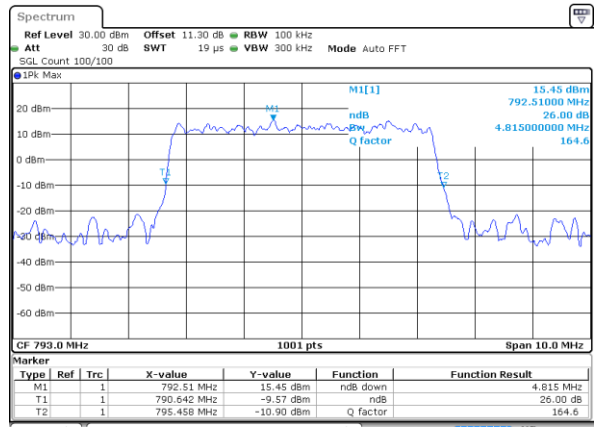


Date: 15 MAY 2020 16:01:49

Highest Channel / 5MHz / QPSK

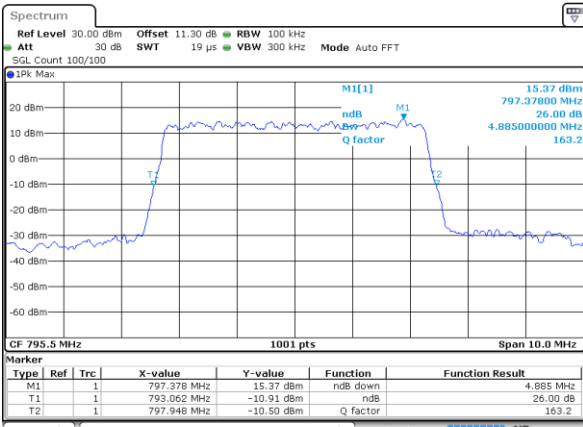

Date: 15 MAY 2020 16:03:00

Highest Channel / 5MHz / 16QAM

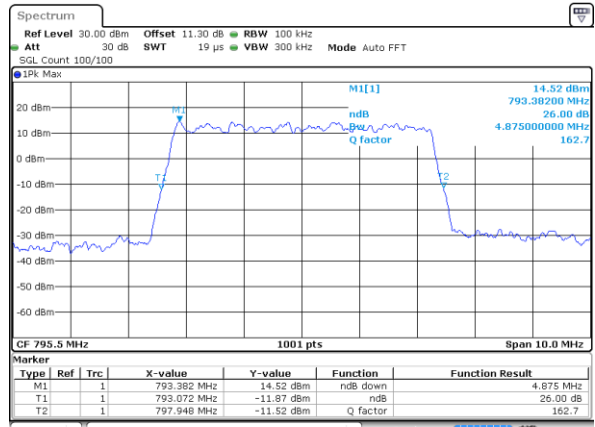


Date: 15 MAY 2020 16:02:48




LTE Band 14

Middle Channel / 10MHz / QPSK

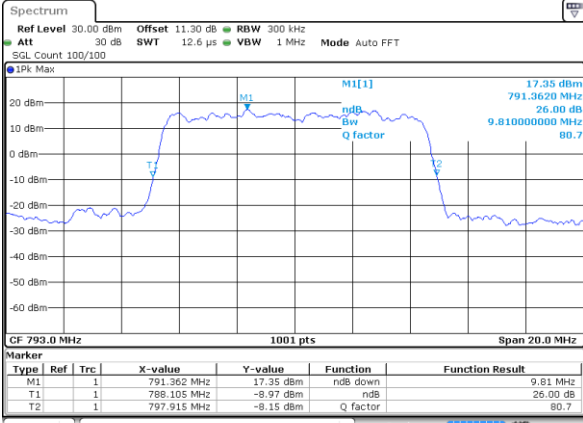

Date: 15 MAY 2020 16:22:11

Middle Channel / 10MHz / 16QAM

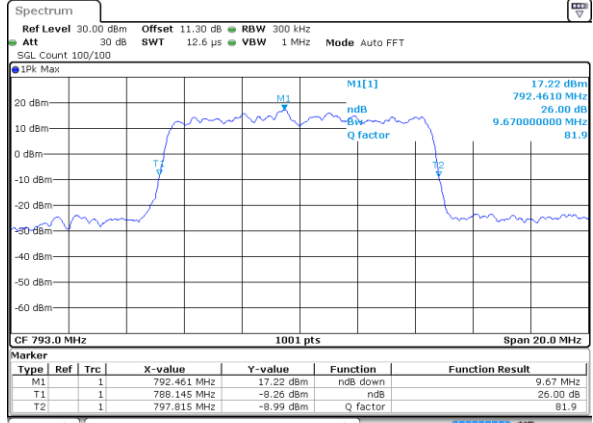


Date: 15 MAY 2020 16:21:59




LTE Band 14

Lowest Channel / 5MHz / 64QAM

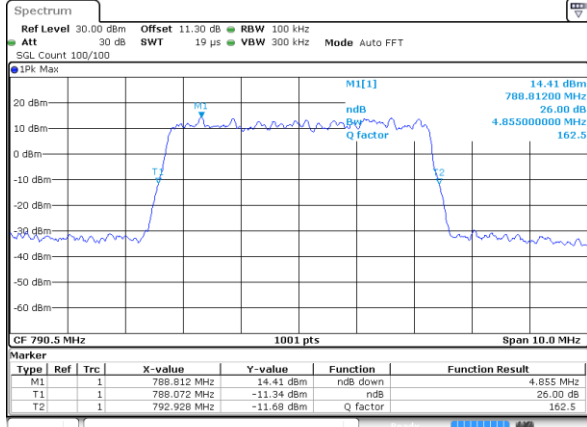


Date: 15 MAY 2020 16:11:38

Middle Channel / 5MHz / 64QAM

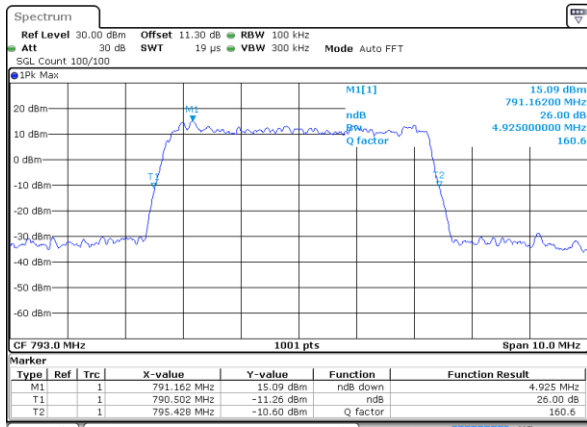


Date: 15 MAY 2020 16:16:41

Middle Channel / 10MHz / 64QAM

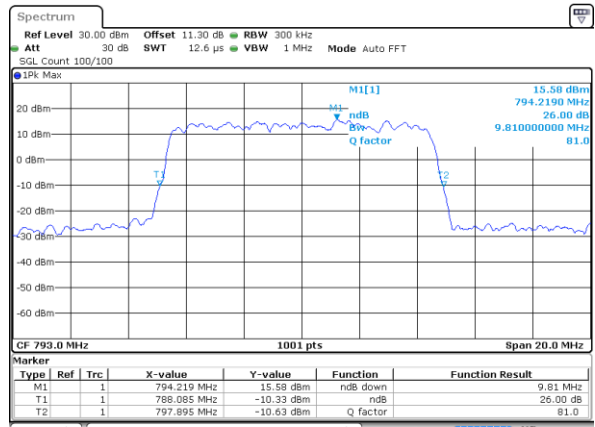

Date: 15 MAY 2020 16:34:05

Highest Channel / 5MHz / 64QAM

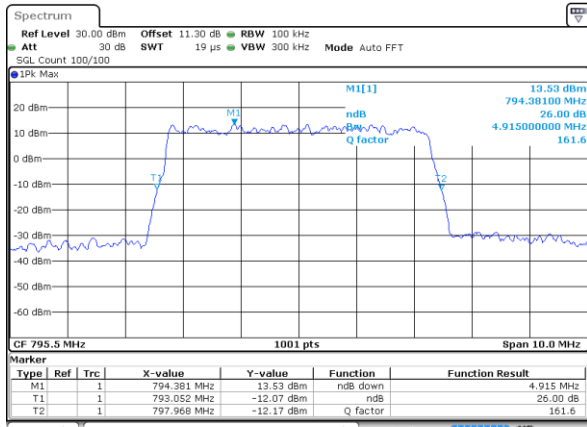

Date: 15 MAY 2020 16:17:17




Occupied Bandwidth

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.48	4.49	-	-	-	-	-	-
Middle CH	-	-	-	-	4.49	4.51	8.95	8.97	-	-	-	-
Highest CH	-	-	-	-	4.51	4.49	-	-	-	-	-	-
Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.51	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.49	-	9.03	-	-	-	-	-
Highest CH	-	-	-	-	4.48	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

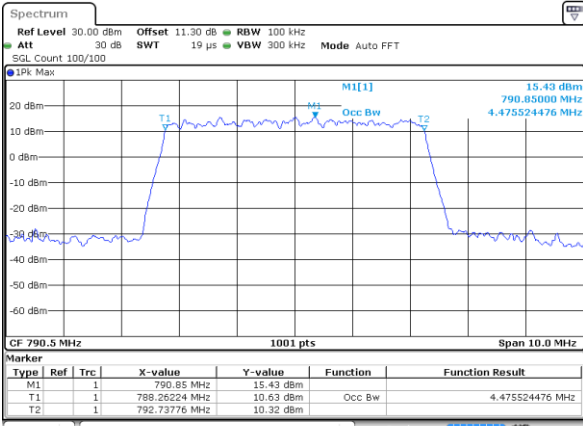


Date: 15 MAY 2020 15:51:06

Lowest Channel / 5MHz / 16QAM

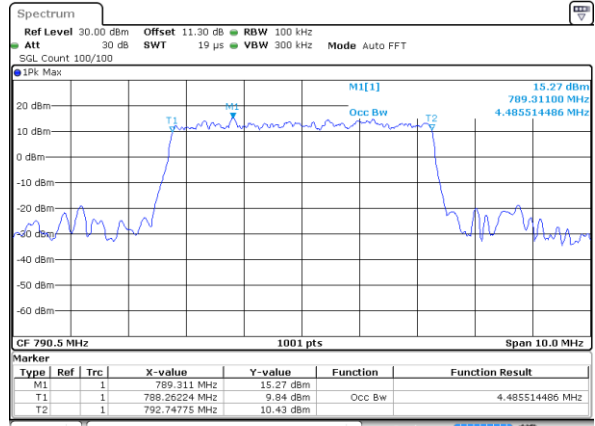


Date: 15 MAY 2020 15:51:18

Middle Channel / 5MHz / QPSK

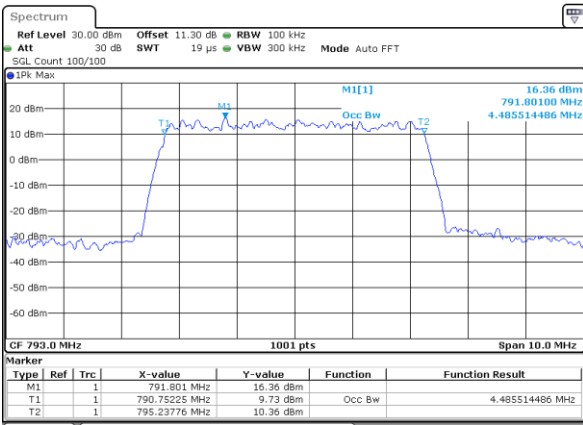


Date: 15 MAY 2020 16:02:13

Middle Channel / 5MHz / 16QAM

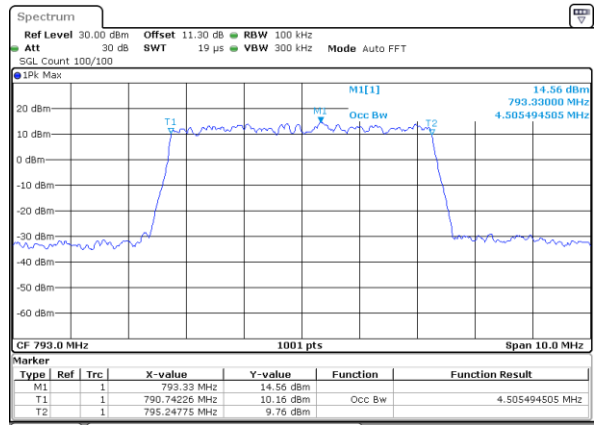


Date: 15 MAY 2020 16:02:01

Highest Channel / 5MHz / QPSK

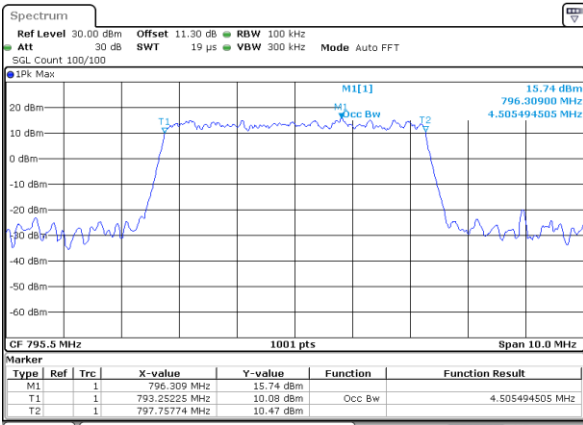

Date: 15 MAY 2020 16:02:24

Highest Channel / 5MHz / 16QAM

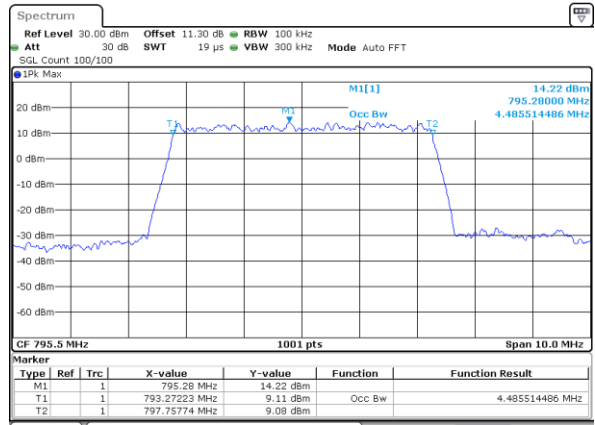


Date: 15 MAY 2020 16:02:36




LTE Band 14

Middle Channel / 10MHz / QPSK

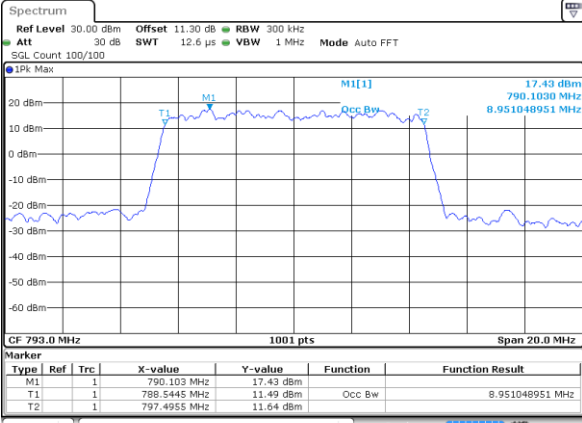

Date: 15 MAY 2020 16:21:35

Middle Channel / 10MHz / 16QAM

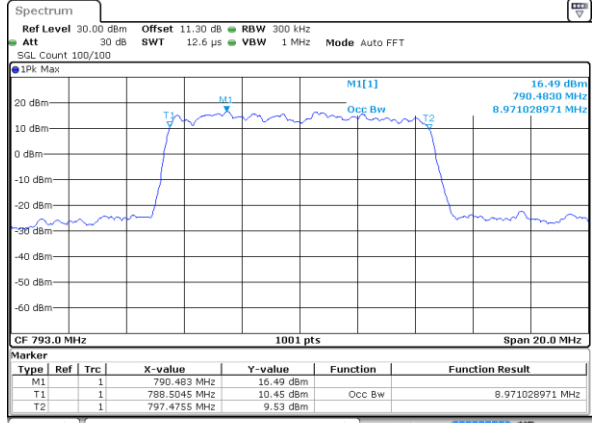


Date: 15 MAY 2020 16:21:48




LTE Band 14

Lowest Channel / 5MHz / 64QAM

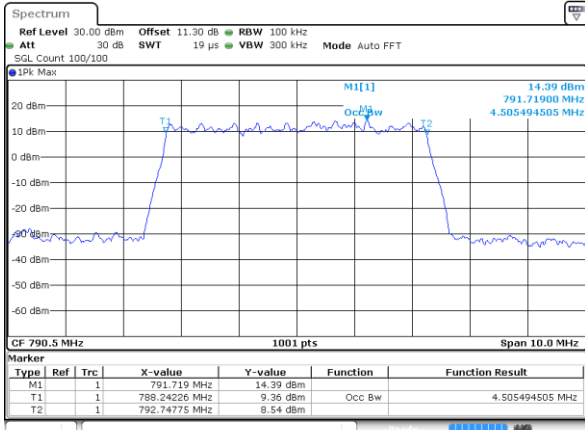


Date: 15 MAY 2020 16:11:26

Middle Channel / 5MHz / 64QAM

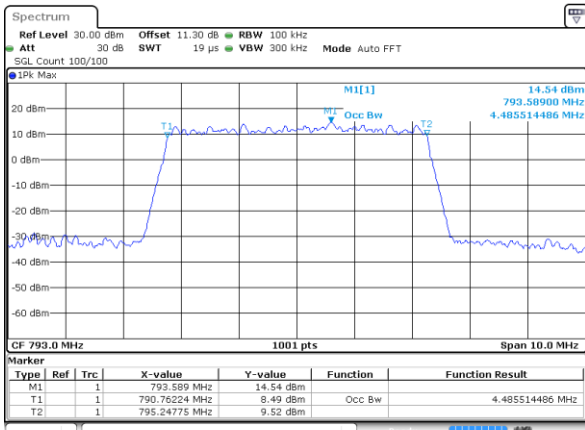


Date: 15 MAY 2020 16:16:53

Middle Channel / 10MHz / 64QAM

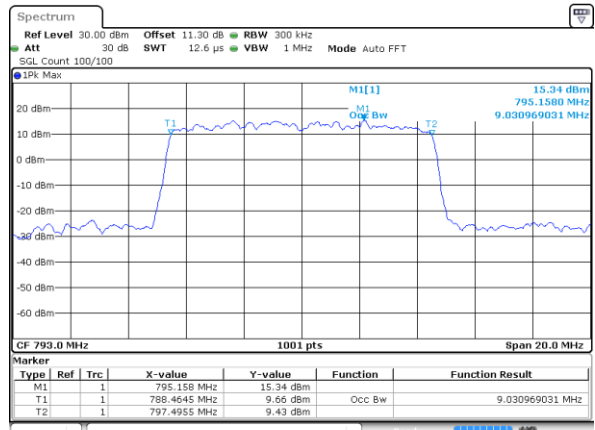

Date: 15 MAY 2020 16:33:54

Highest Channel / 5MHz / 64QAM

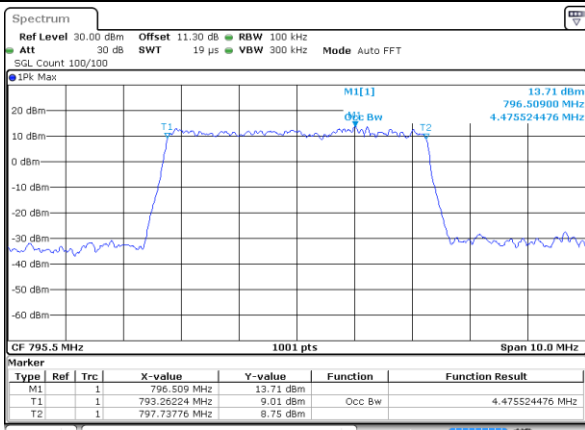


Date: 15 MAY 2020 16:17:05



Conducted Band Edge


LTE Band 14 / 5MHz / QPSK

Lowest Band Edge / 1 RB

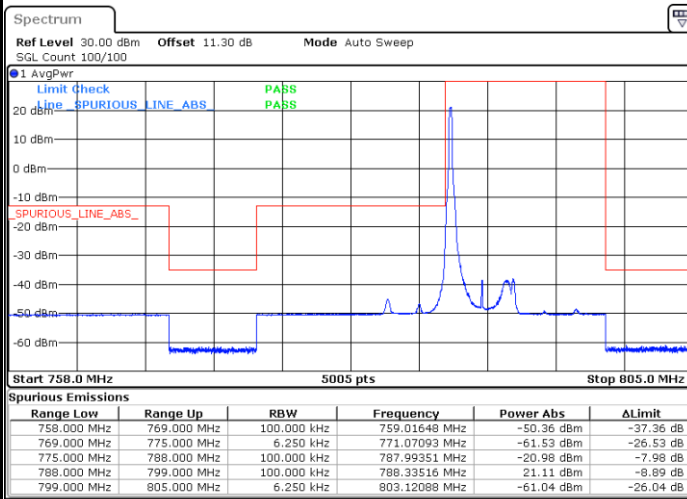


Date: 15.MAY.2020 15:58:25

Highest Band Edge / 1 RB

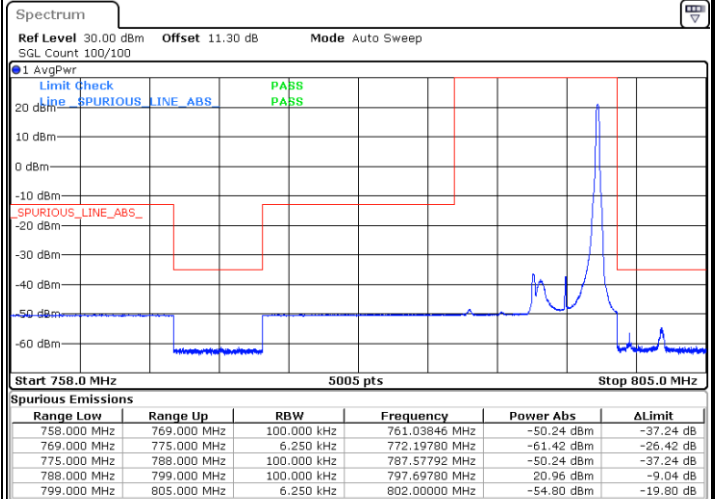


Date: 15.MAY.2020 16:09:43

Lowest Band Edge / Full RB

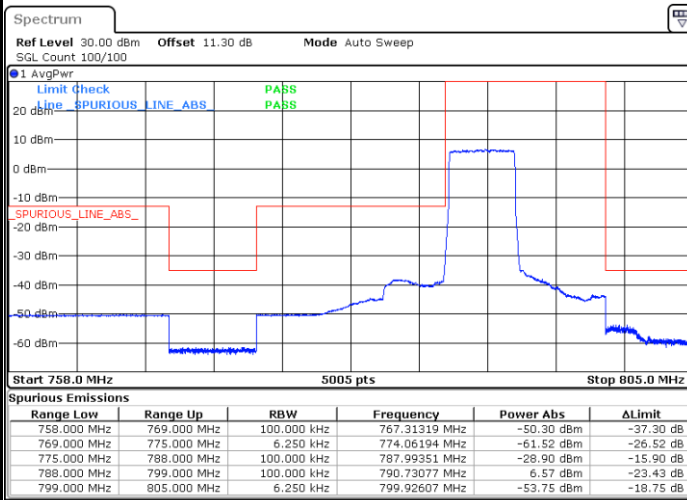

Date: 15.MAY.2020 15:53:23

Highest Band Edge / Full RB

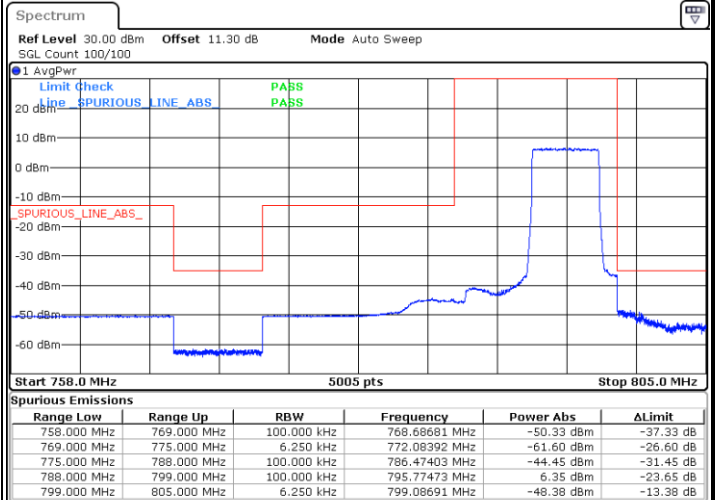


Date: 15.MAY.2020 16:04:41




LTE Band 14 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

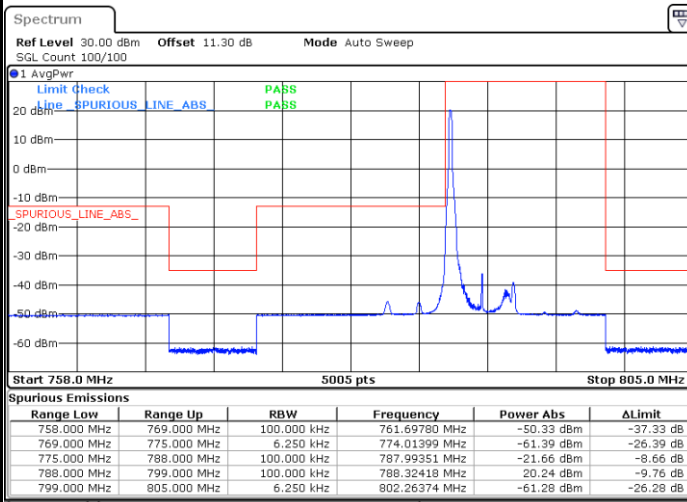


Date: 15.MAY.2020 15:56:44

Highest Band Edge / 1 RB

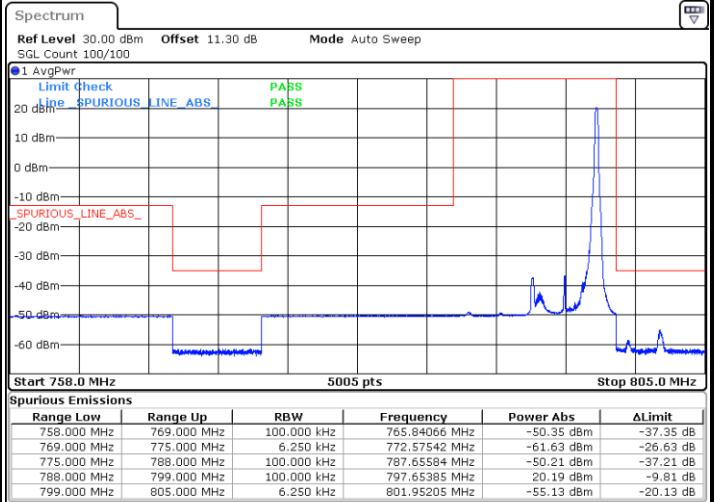


Date: 15.MAY.2020 16:08:02

Lowest Band Edge / Full RB

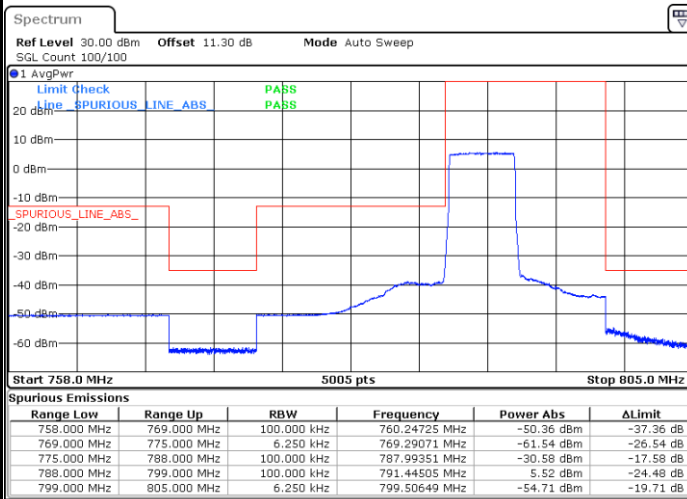

Date: 15.MAY.2020 15:55:03

Highest Band Edge / Full RB

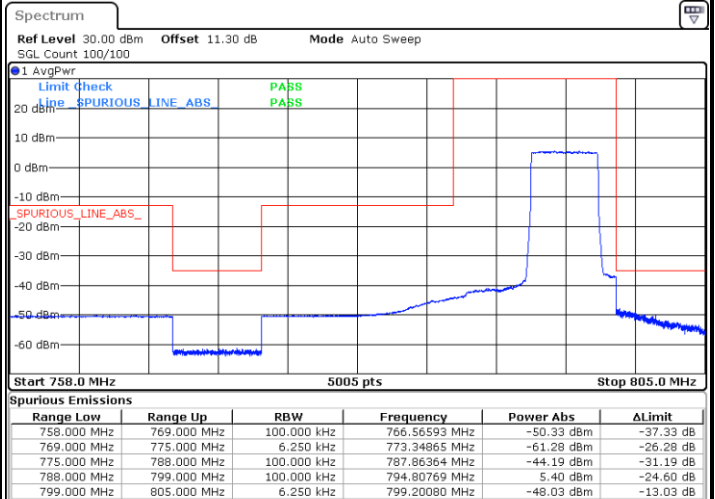


Date: 15.MAY.2020 16:06:22




LTE Band 14 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

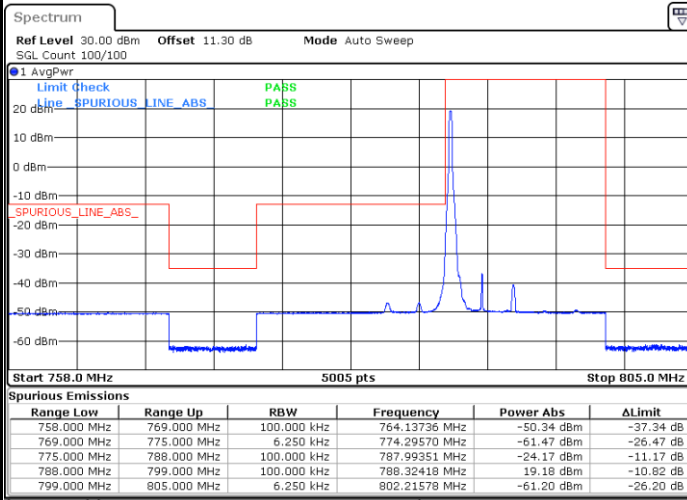


Date: 15.MAY.2020 16:14:59

Highest Band Edge / 1 RB

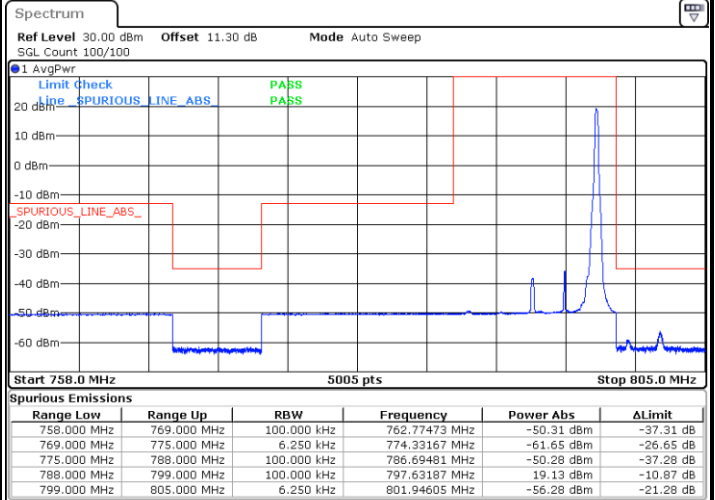


Date: 15.MAY.2020 16:20:38

Lowest Band Edge / Full RB

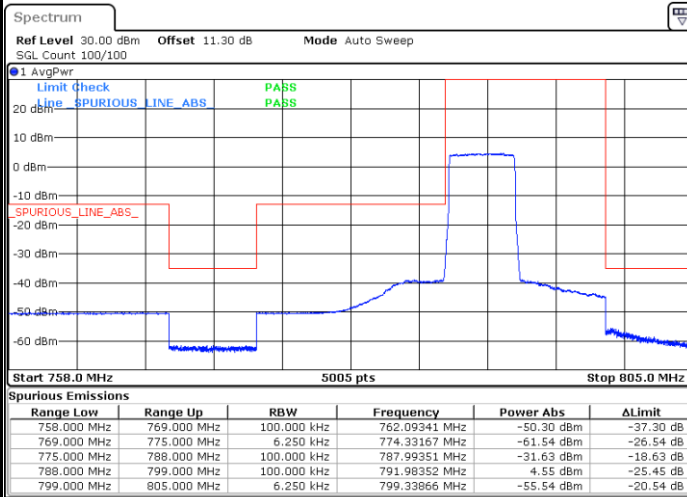

Date: 15.MAY.2020 16:13:19

Highest Band Edge / Full RB

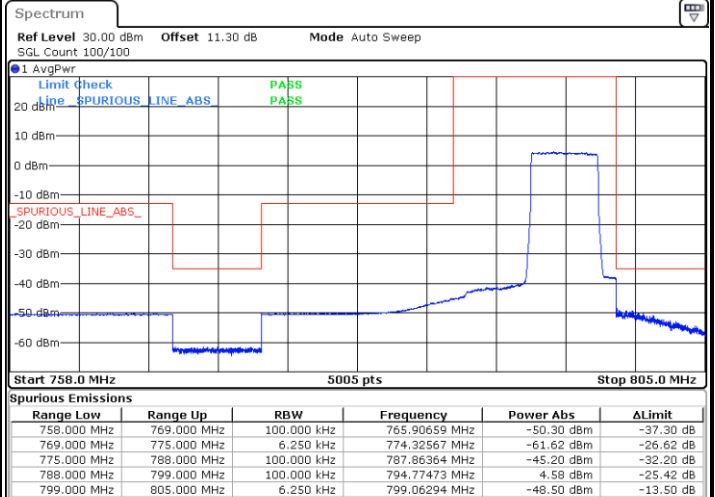


Date: 15.MAY.2020 16:18:58




LTE Band 14 / 10MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

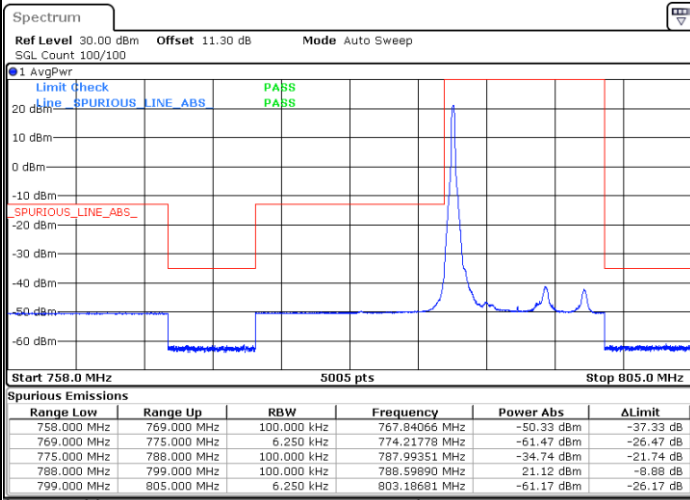


Date: 15.MAY.2020 16:28:51

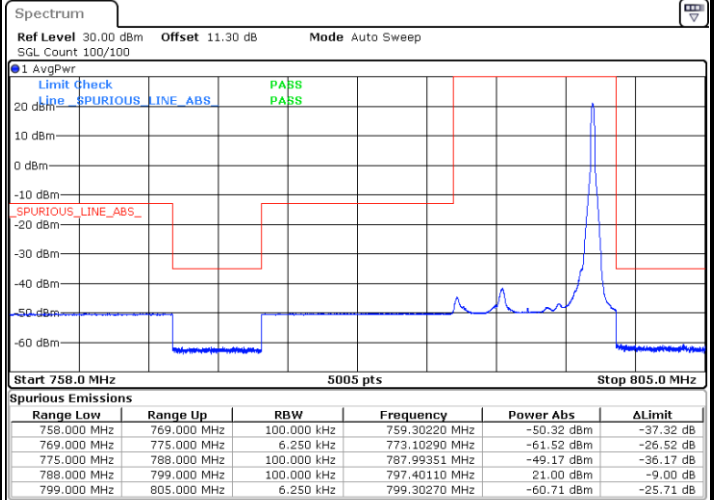

Date: 15.MAY.2020 16:30:31

Band Edge / Full RB

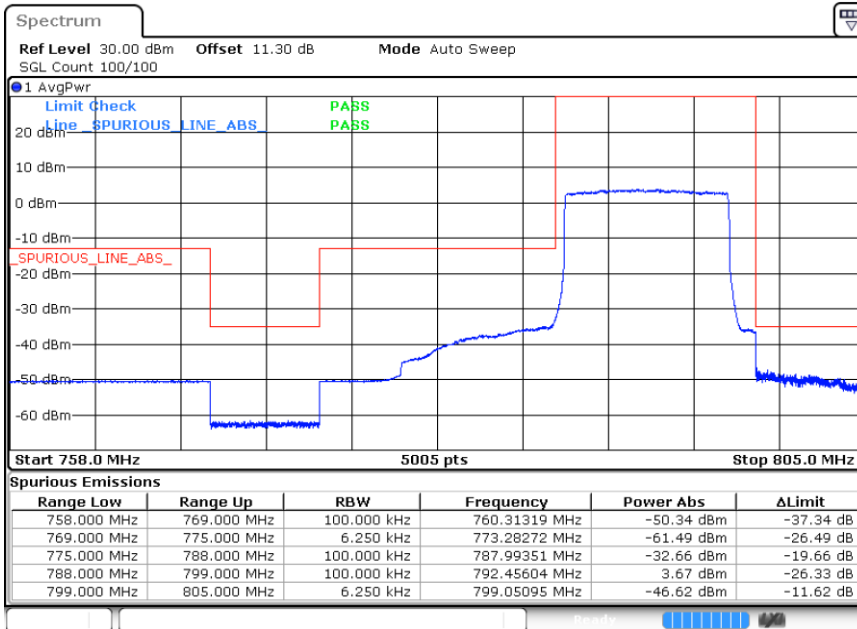


Date: 15.MAY.2020 16:23:51




LTE Band 14 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

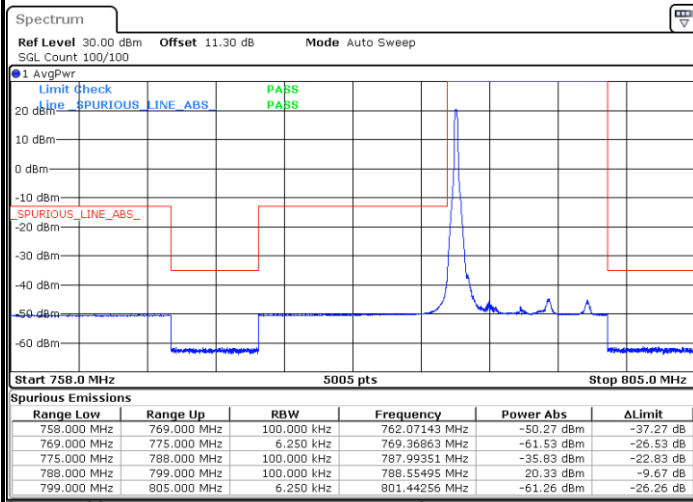


Date: 15.MAY.2020 16:27:11

Highest Band Edge / 1 RB

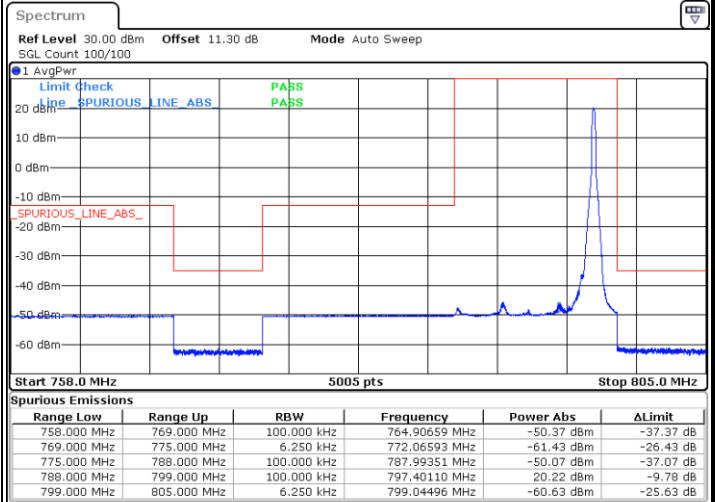

Date: 15.MAY.2020 16:32:11

Band Edge / Full RB

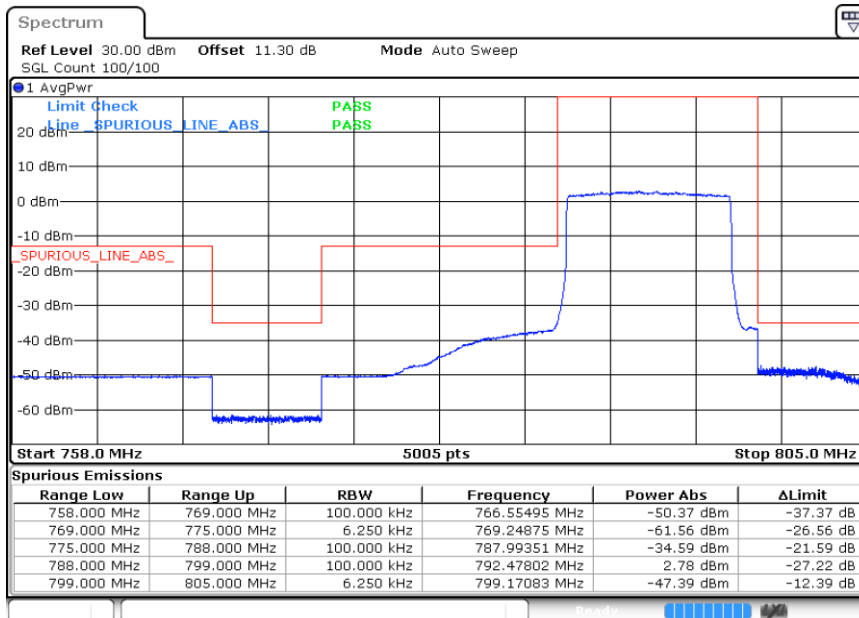



Date: 15.MAY.2020 16:25:31



LTE Band 14 / 10MHz / 64QAM

Lowest Band Edge / 1 RB


Highest Band Edge / 1 RB

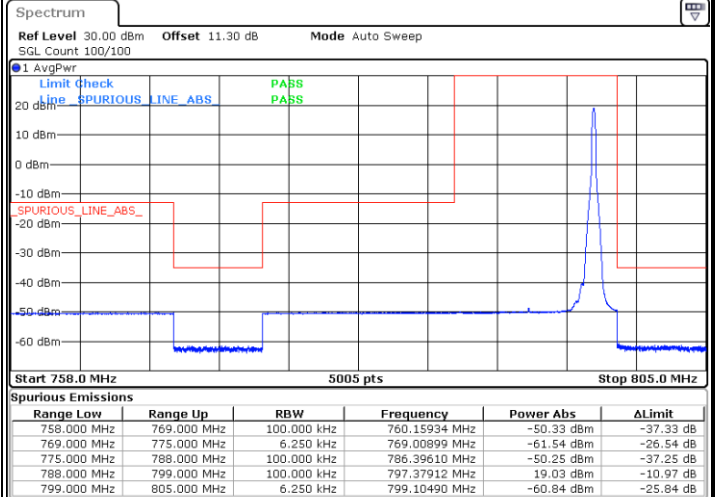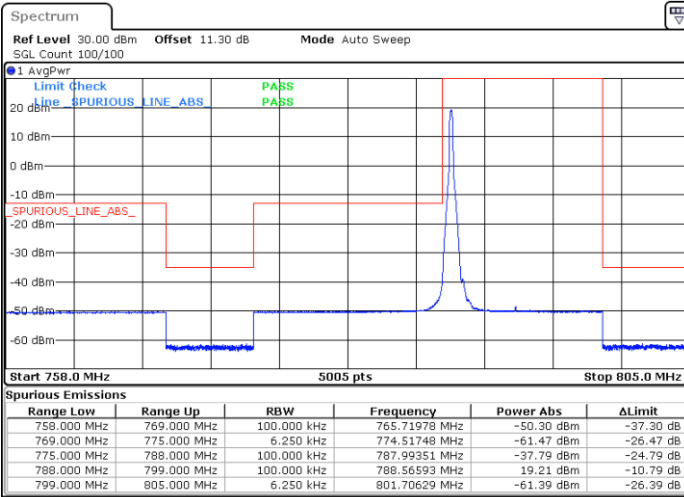

Date: 15.MAY.2020 16:37:25

Date: 15.MAY.2020 16:39:05


Band Edge / Full RB

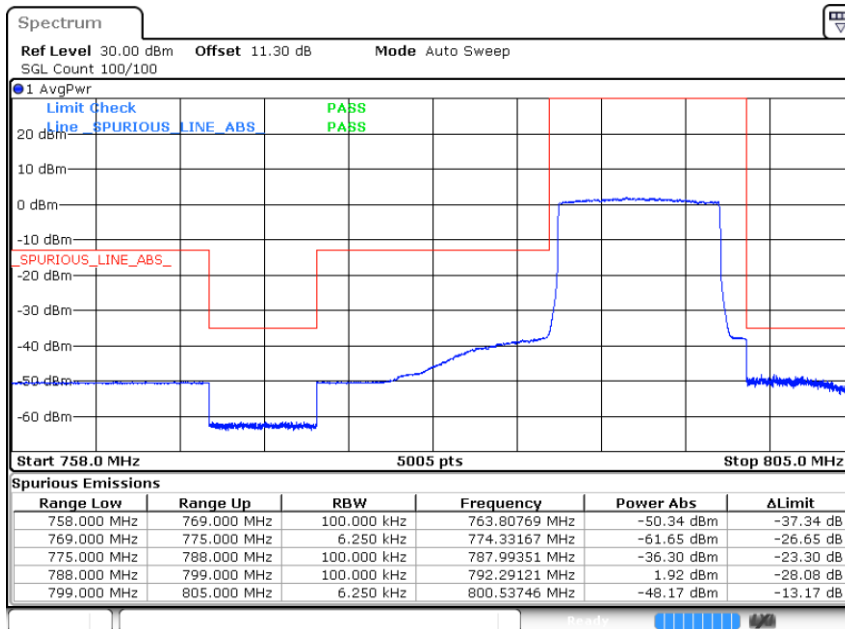

Date: 15.MAY.2020 16:35:45



Conducted Spurious Emission

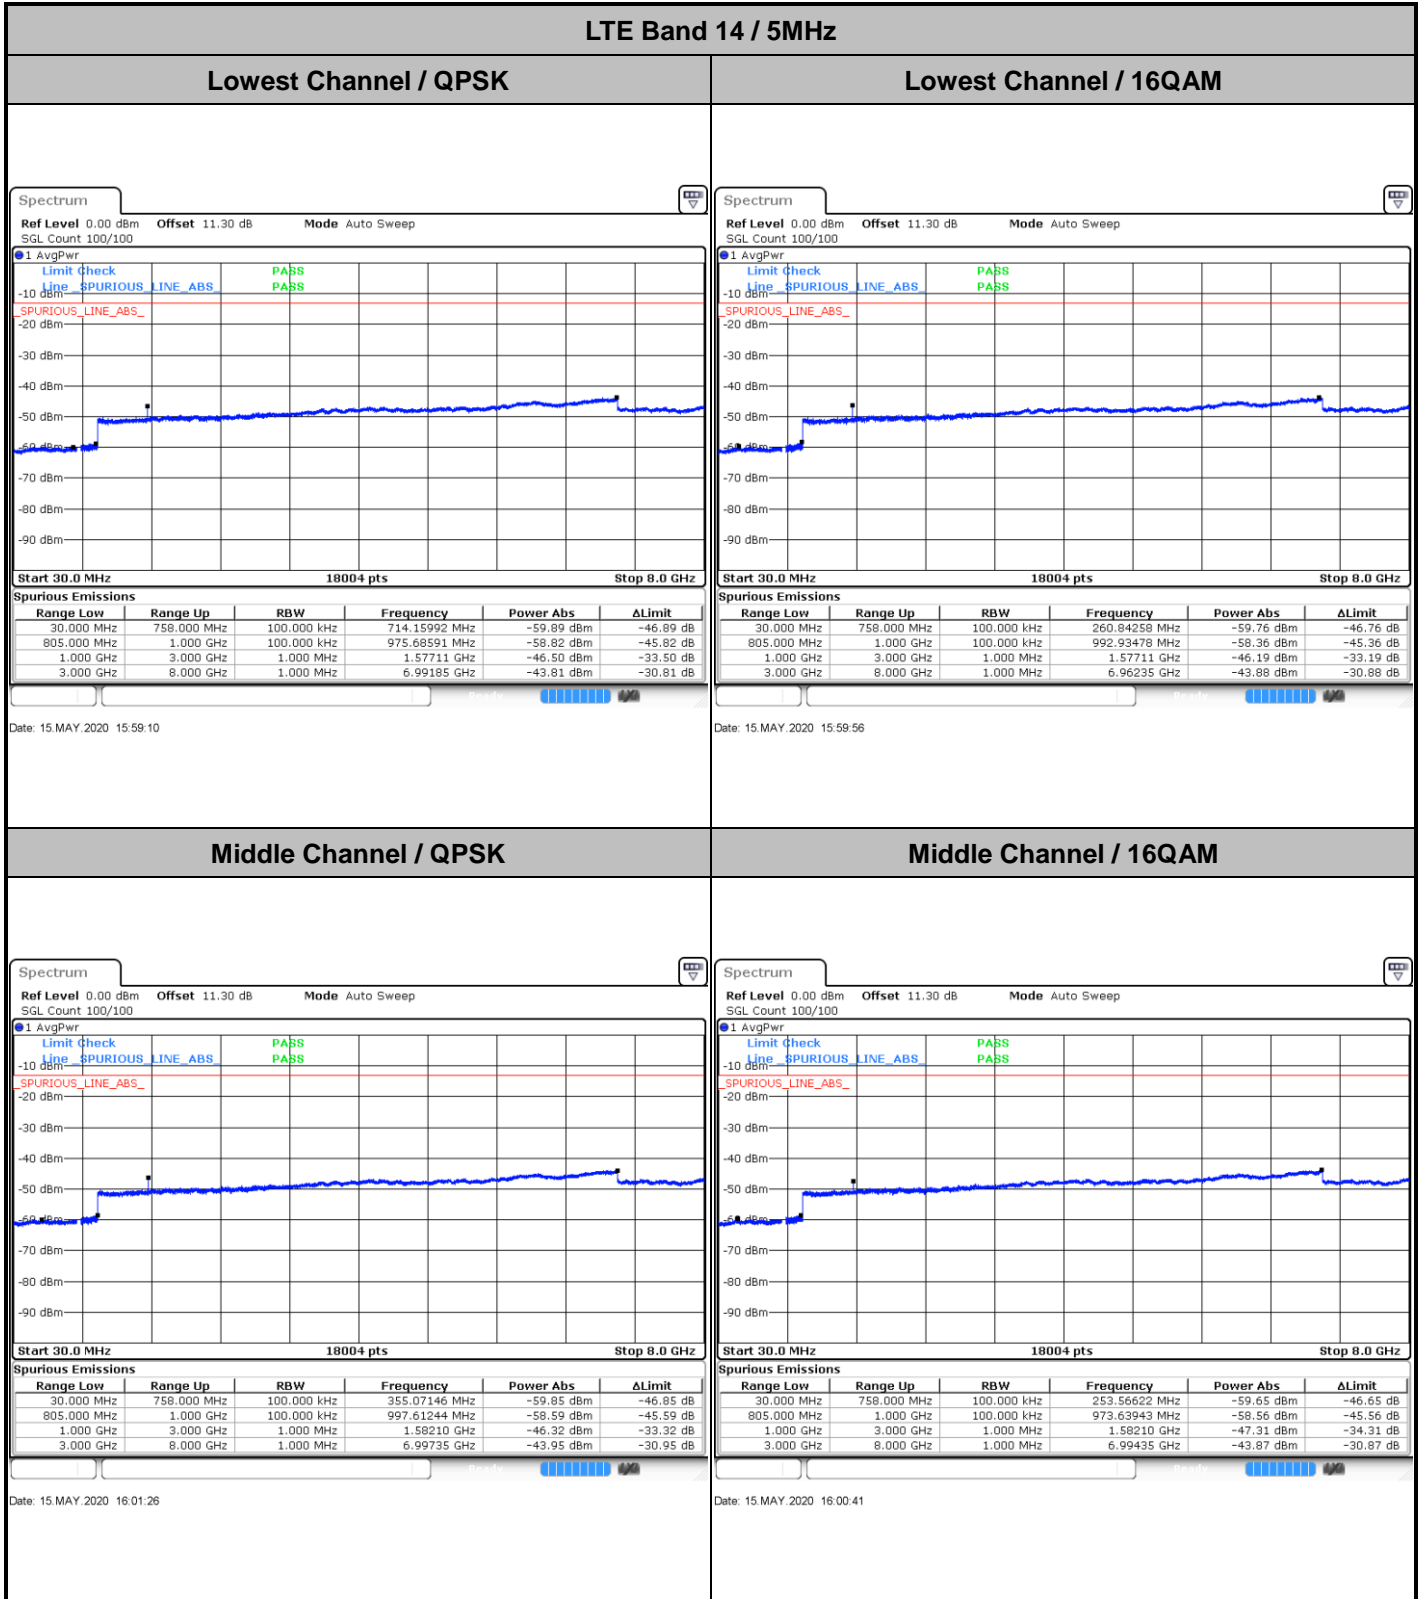





LTE Band 14 / 5MHz

Highest Channel / QPSK

Highest Channel / 16QAM

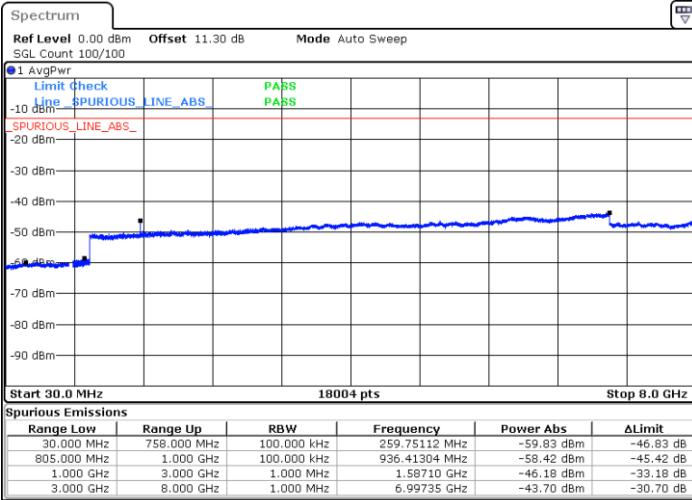

Date: 15.MAY.2020 16:10:28

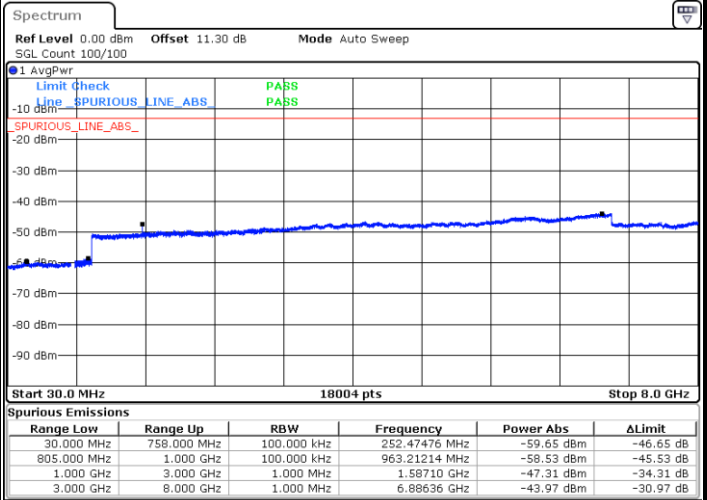


Date: 15.MAY.2020 16:11:14


LTE Band 14 / 10MHz

Middle Channel / QPSK

Middle Channel / 16QAM

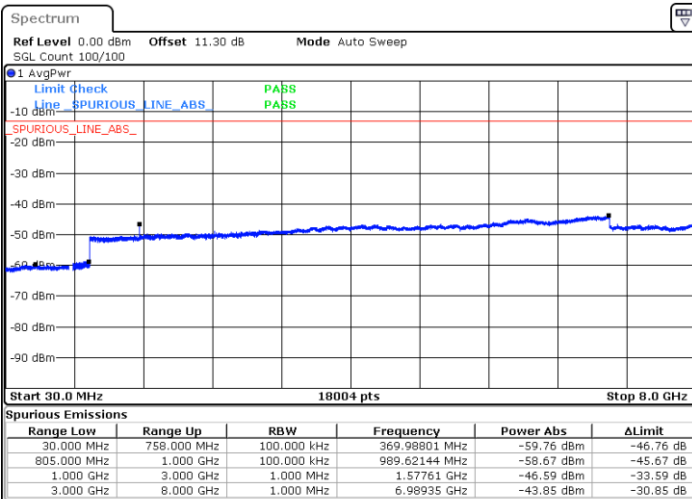

Date: 15.MAY.2020 16:33:41

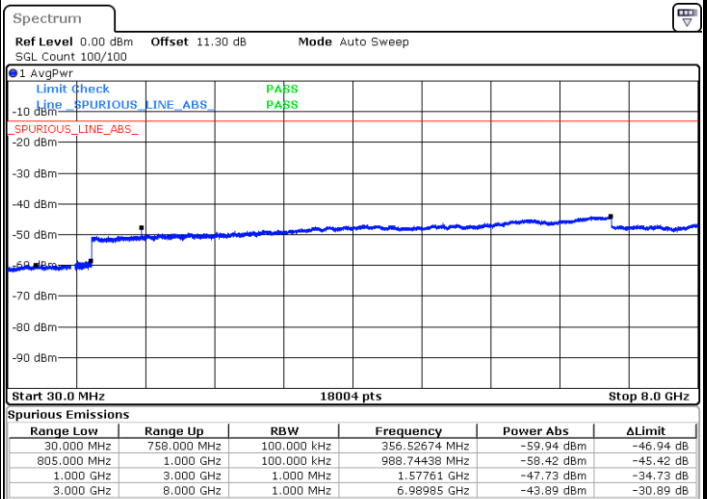



Date: 15.MAY.2020 16:32:56



LTE Band 14 / 5MHz

Lowest Channel / 64QAM


Middle Channel / 64QAM

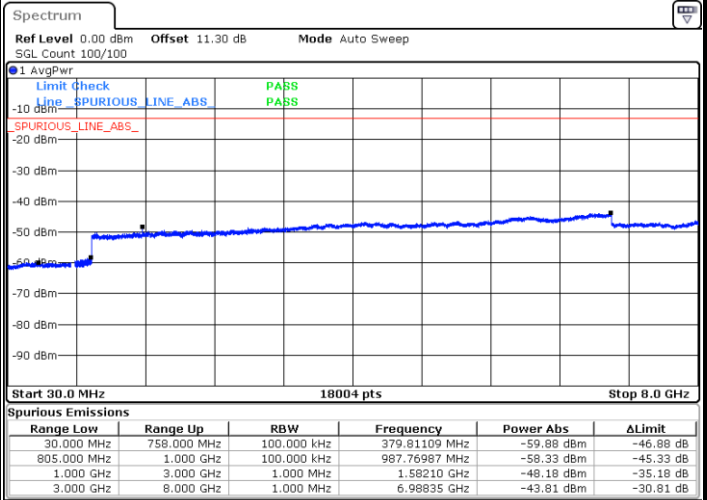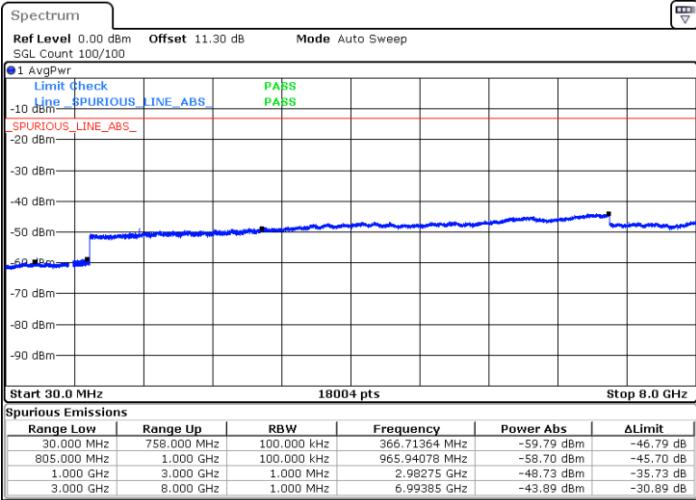

Date: 15.MAY.2020 16:15:45

Date: 15.MAY.2020 16:16:30

Highest Channel / 64QAM

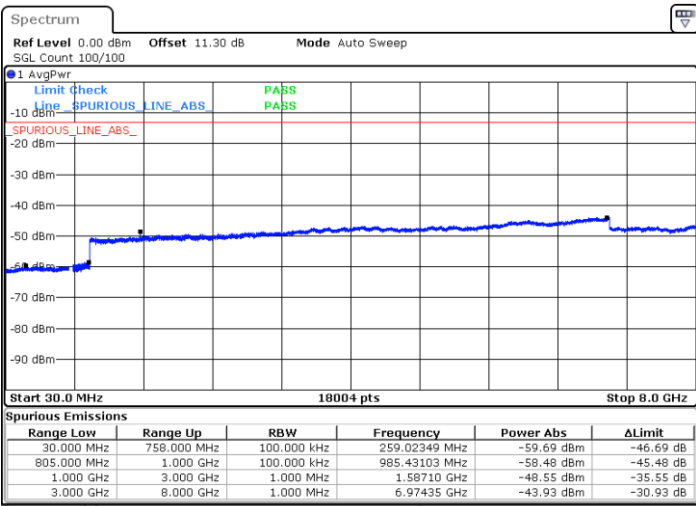


Date: 15.MAY.2020 16:21:23



LTE Band 14 / 10MHz

Middle Channel / 64QAM

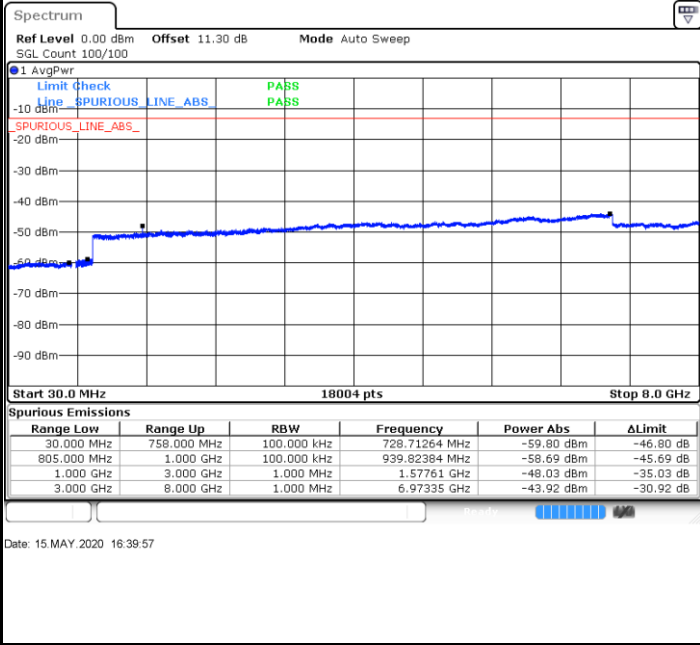





Mask

LTE Band 14 / 5MHz / QPSK

Lowest Channel / 1RB

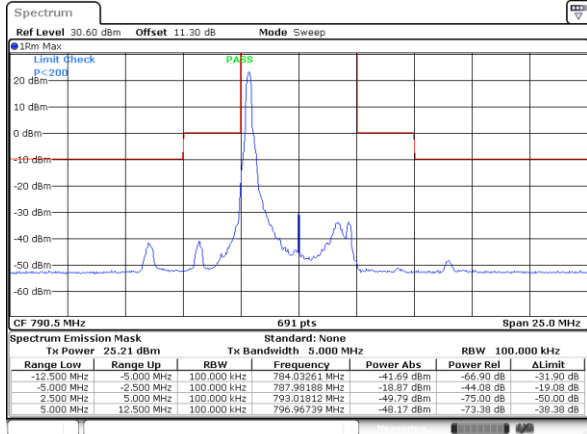


Date: 30 JUN 2020 22:44:47

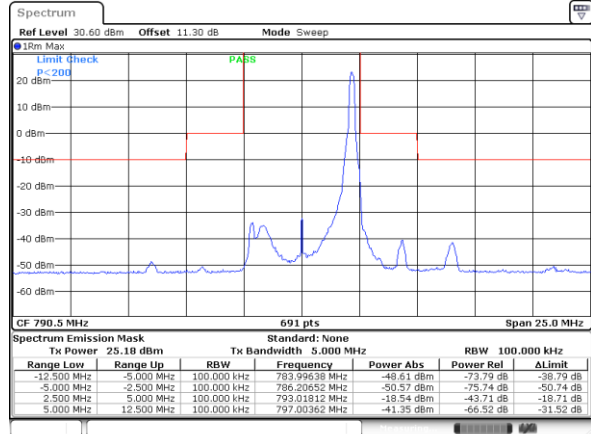

Date: 30 JUN 2020 22:45:17

Lowest Channel / Full RB

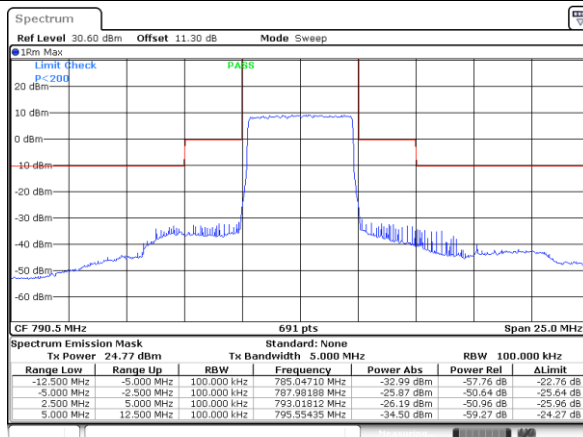


Date: 30 JUN 2020 22:42:26




LTE Band 14 / 5MHz / 16QAM

Lowest Channel / 1RB

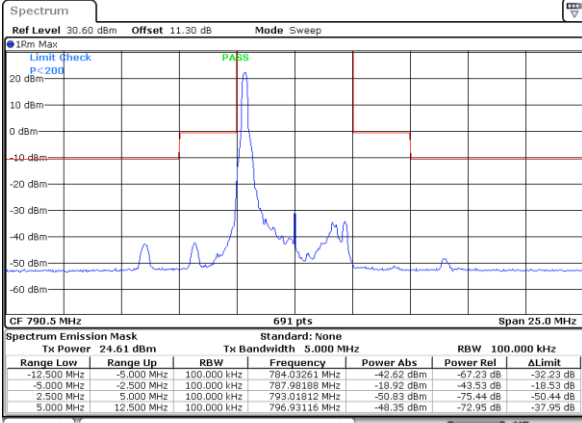


Date: 30 JUN 2020 22:44:18

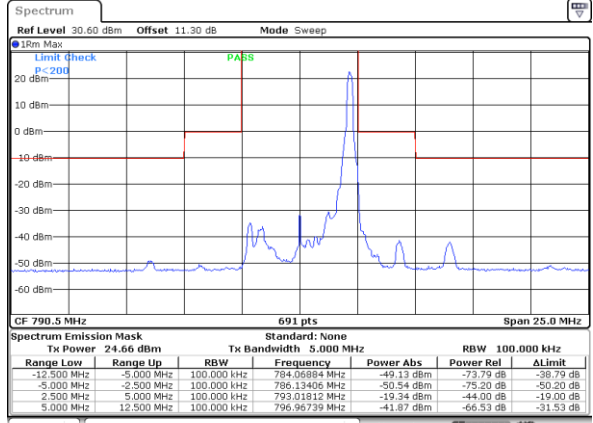

Date: 30 JUN 2020 22:45:16

Lowest Channel / Full RB

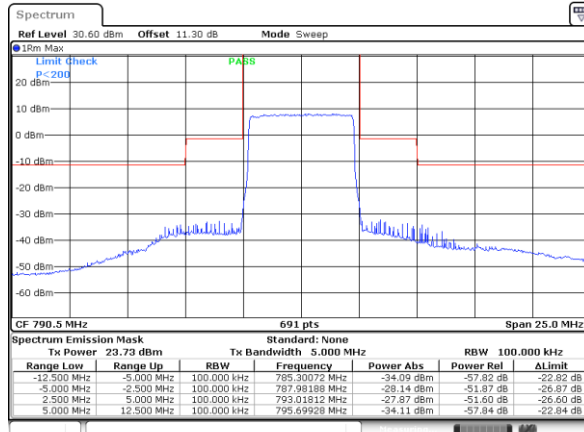


Date: 30 JUN 2020 22:42:49




LTE Band 14 / 5MHz / 64QAM

Lowest Channel / 1RB

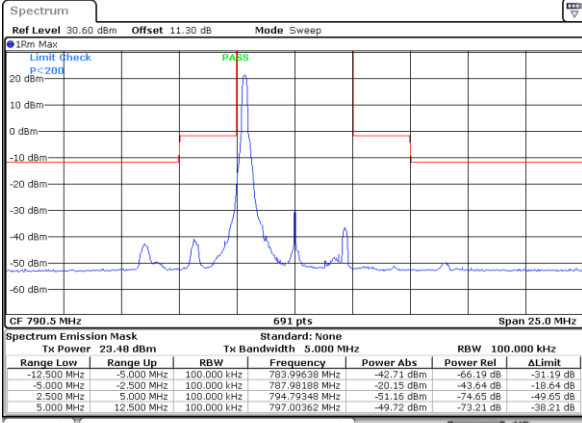


Date: 30 JUN 2020 22:43:48

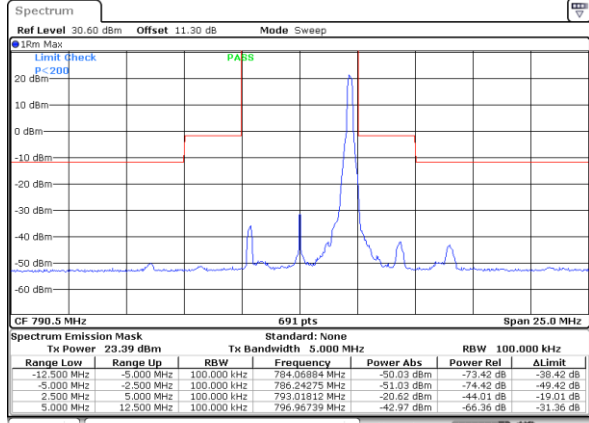

Date: 30 JUN 2020 22:46:16

Lowest Channel / Full RB

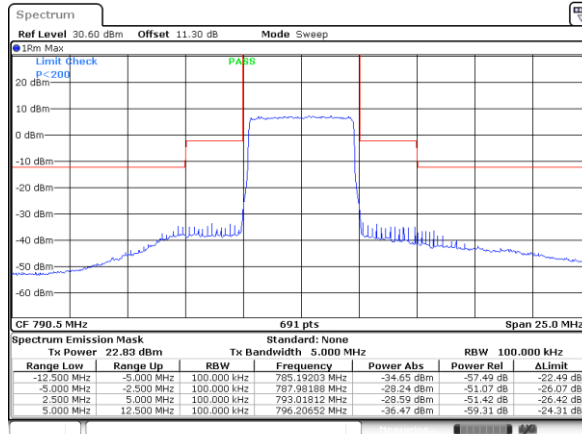


Date: 30 JUN 2020 22:43:19




LTE Band 14 / 5MHz / QPSK

Middle Channel / 1RB

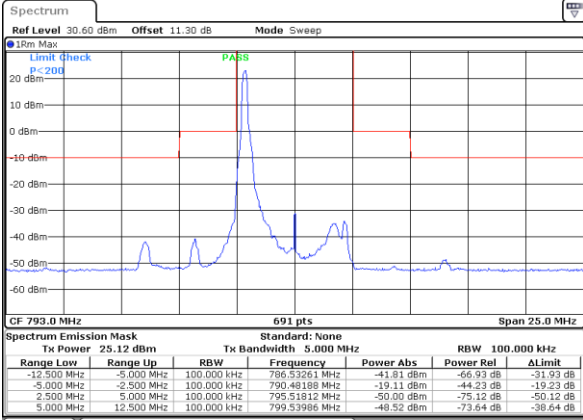


Date: 30 JUN 2020 22:48:12

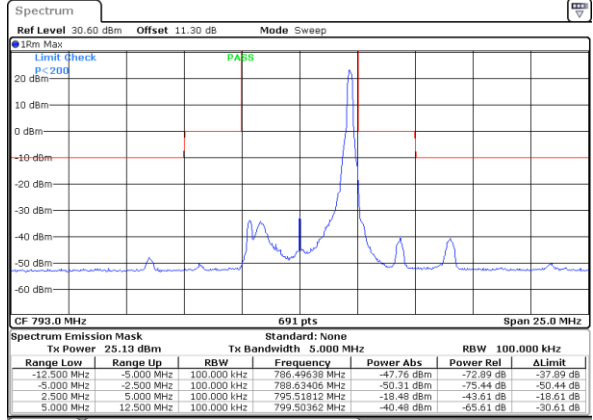

Date: 30 JUN 2020 22:47:143

Middle Channel / Full RB

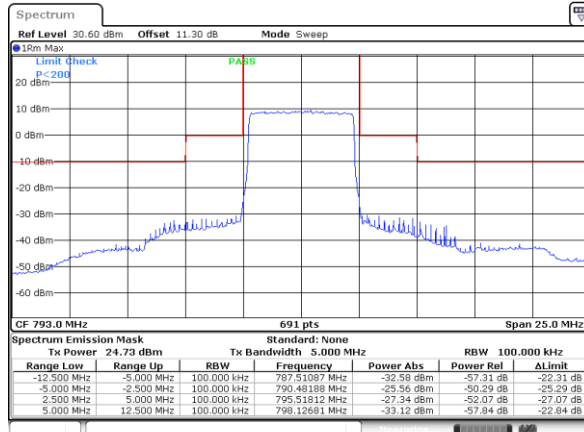


Date: 30 JUN 2020 22:50:37




LTE Band 14 / 5MHz / 16QAM

Middle Channel / 1RB

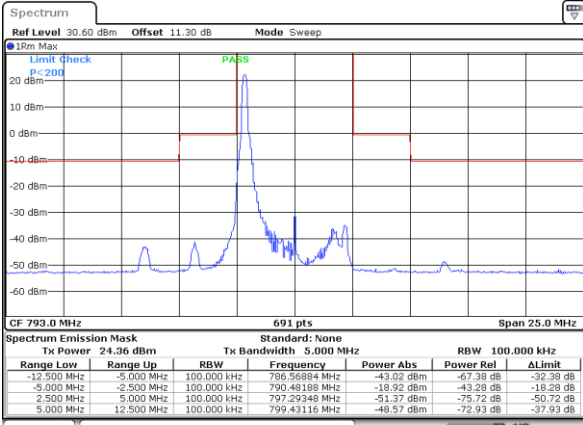


Date: 30 JUN 2020 22:48:41

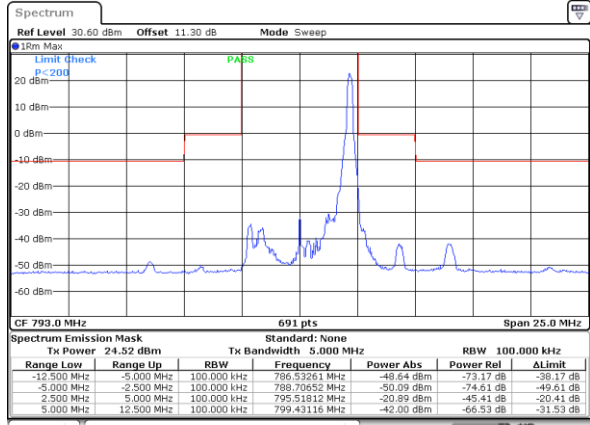

Date: 30 JUN 2020 22:47:14

Middle Channel / Full RB

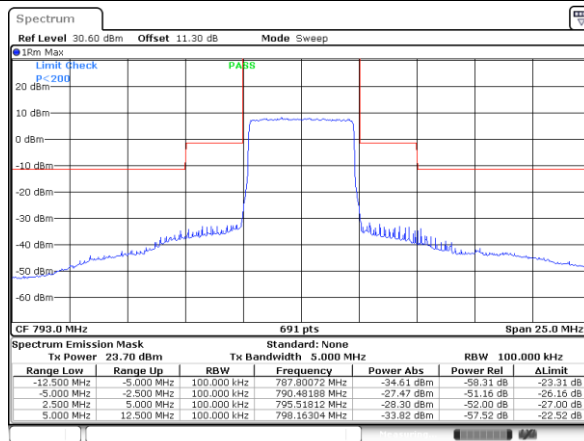


Date: 30 JUN 2020 22:50:08




LTE Band 14 / 5MHz / 64QAM

Middle Channel / 1RB

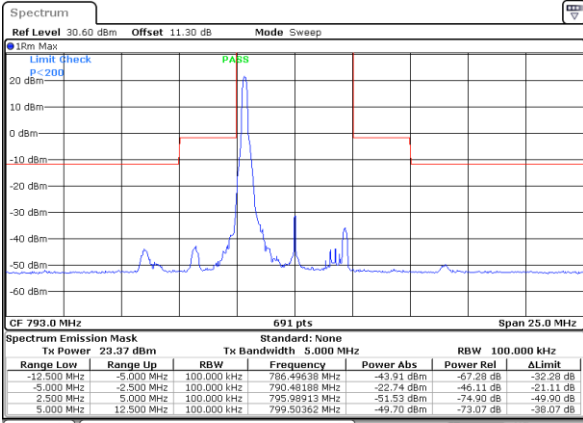


Date: 30 JUN 2020 22:49:10

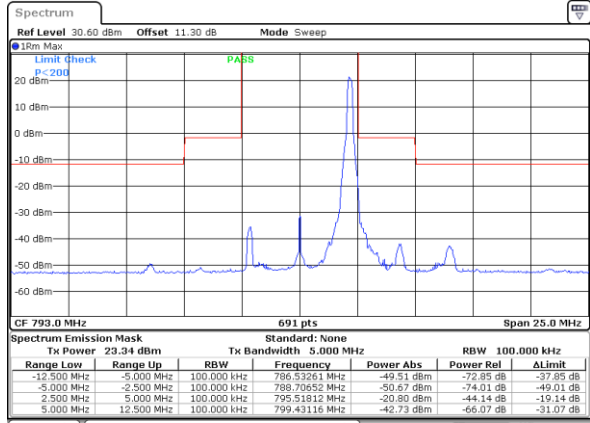

Date: 30 JUN 2020 22:46:45

Middle Channel / Full RB

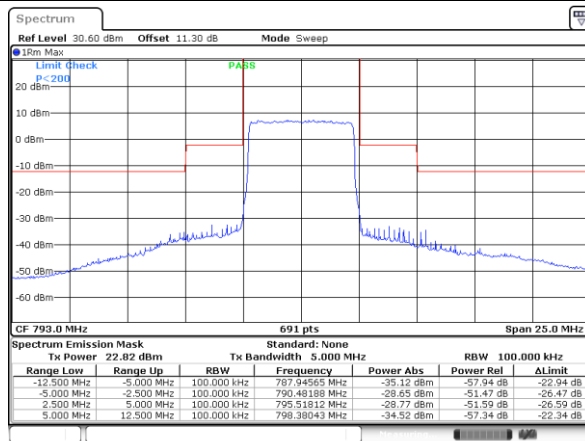


Date: 30 JUN 2020 22:49:39




LTE Band 14 / 5MHz / QPSK

Highest Channel / 1RB

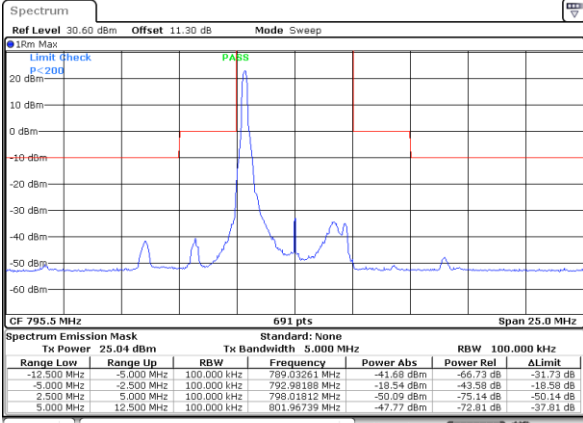


Date: 30 JUN 2020 22:53:33

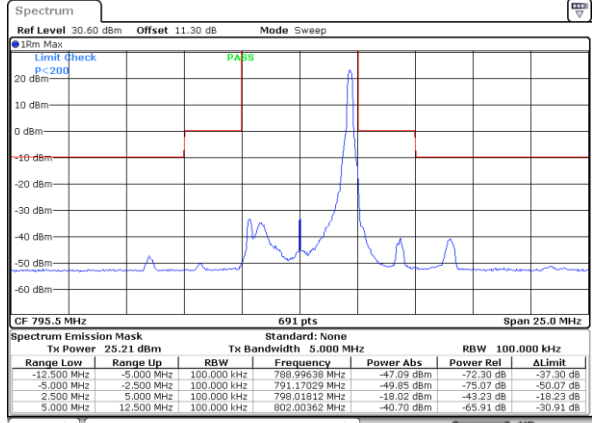

Date: 30 JUN 2020 22:54:03

Highest Channel / Full RB

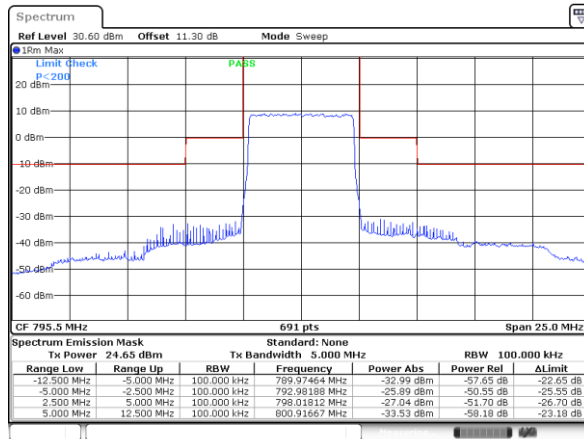


Date: 30 JUN 2020 22:51:06




LTE Band 14 / 5MHz / 16QAM

Highest Channel / 1RB

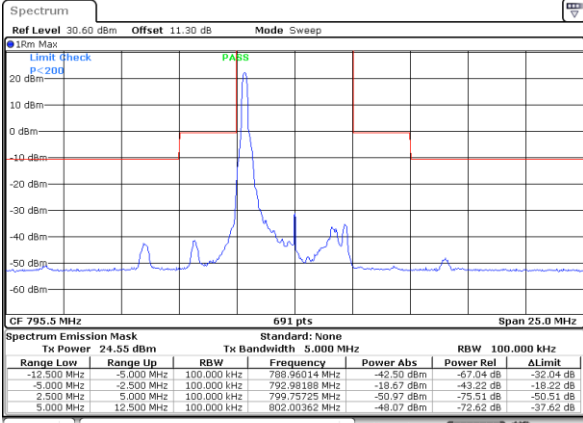


Date: 30 JUN 2020 22:53:04

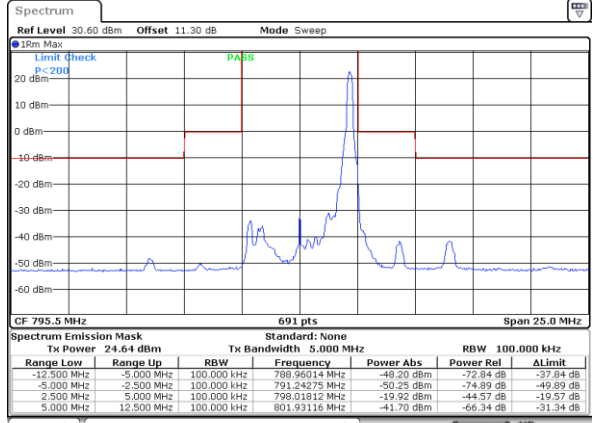

Date: 30 JUN 2020 22:54:32

Highest Channel / Full RB

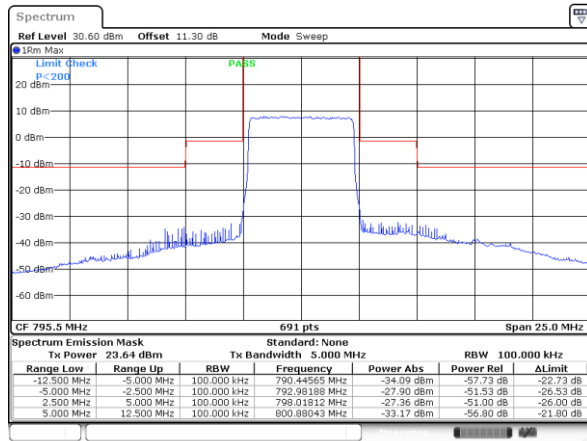


Date: 30 JUN 2020 22:51:35




LTE Band 14 / 5MHz / 64QAM

Highest Channel / 1RB

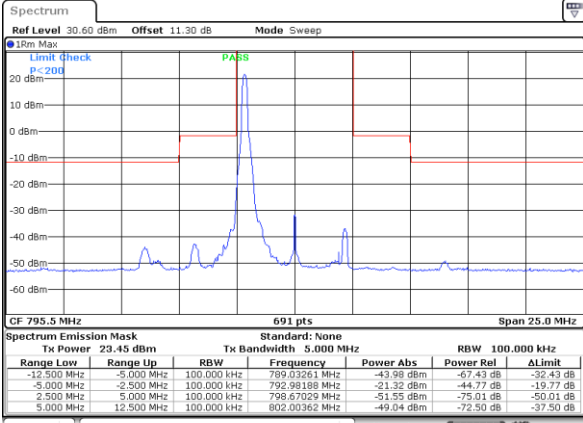


Date: 30 JUN 2020 22:52:134

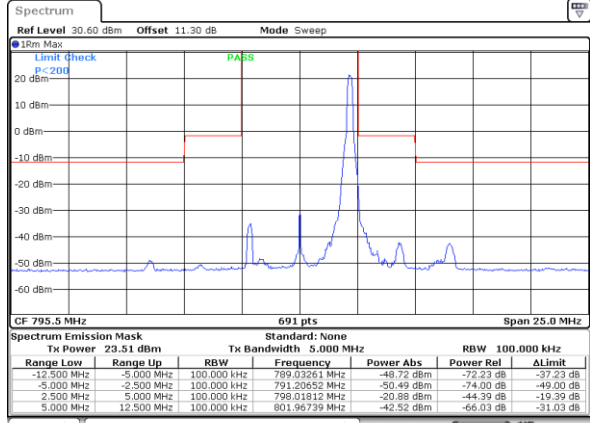

Date: 30 JUN 2020 22:55:102

Highest Channel / Full RB

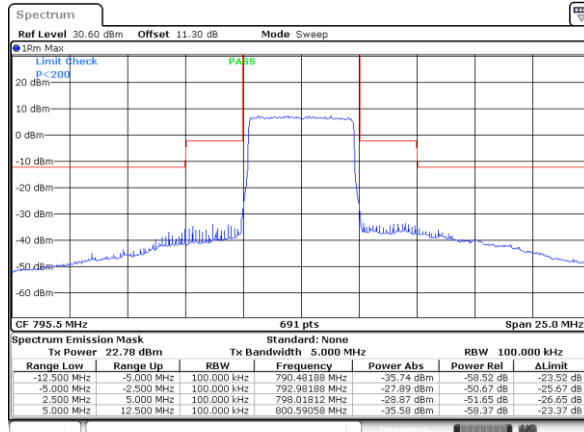


Date: 30 JUN 2020 22:52:105




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

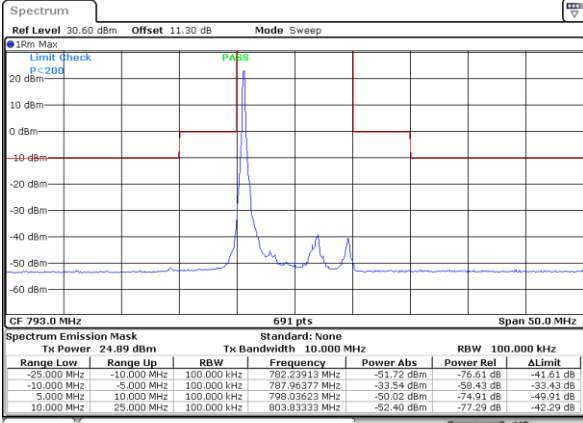


Date: 30 JUN 2020 22:56:58

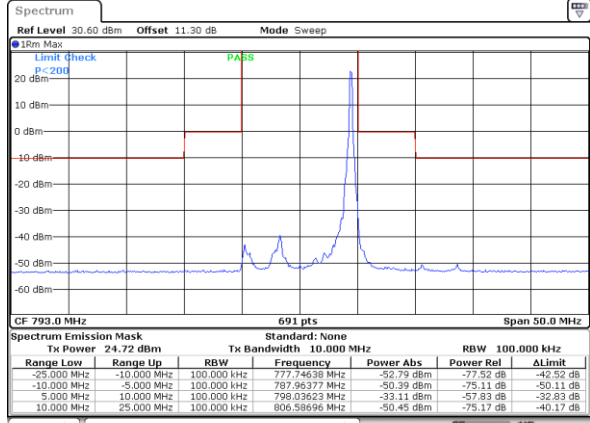

Date: 30 JUN 2020 22:56:30

Middle Channel / Full RB

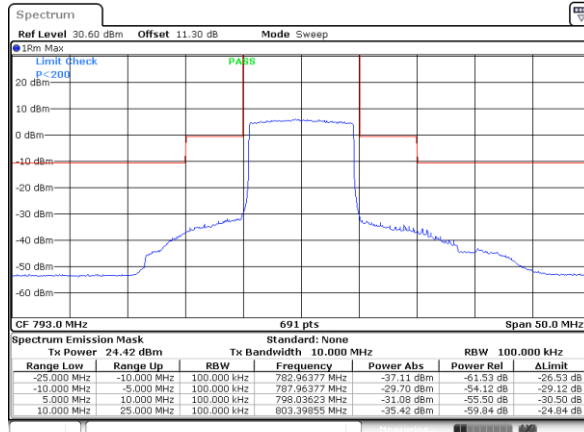


Date: 30 JUN 2020 22:59:23




LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

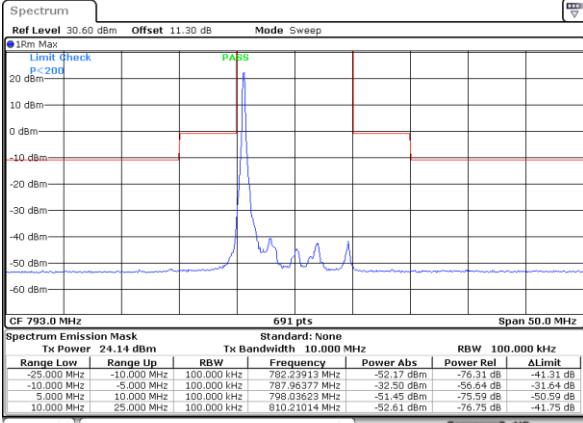


Date: 30 JUN 2020 22:57:27

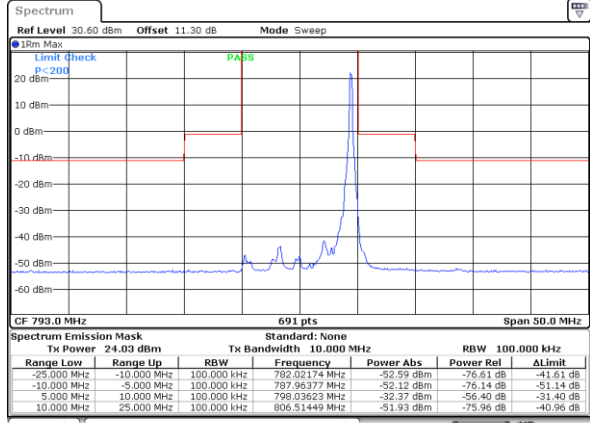

Date: 30 JUN 2020 22:56:01

Middle Channel / Full RB

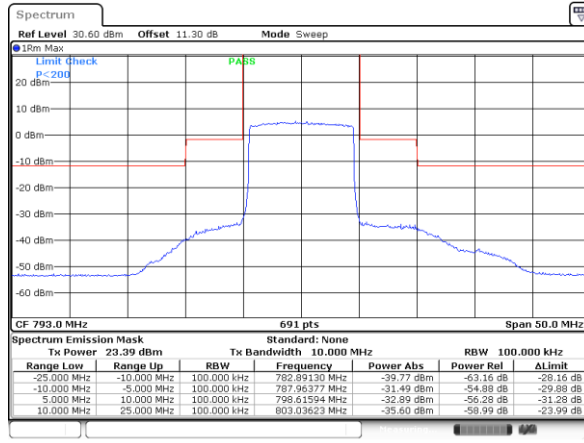


Date: 30 JUN 2020 22:58:54




LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

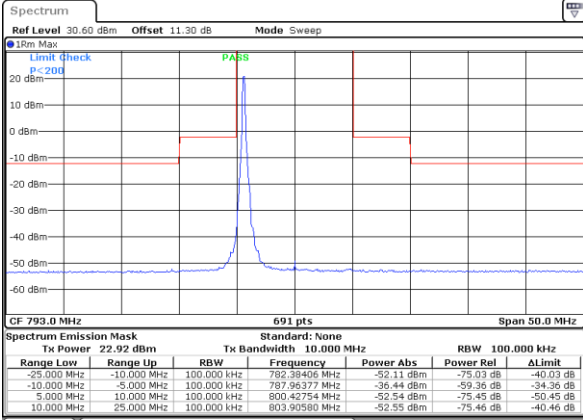


Date: 30 JUN 2020 22:57:56

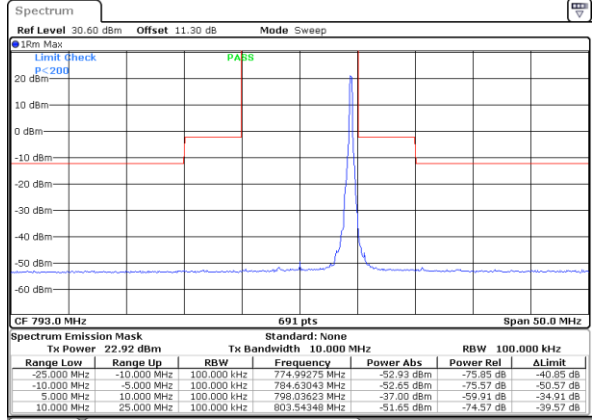

Date: 30 JUN 2020 22:55:32

Middle Channel / Full RB

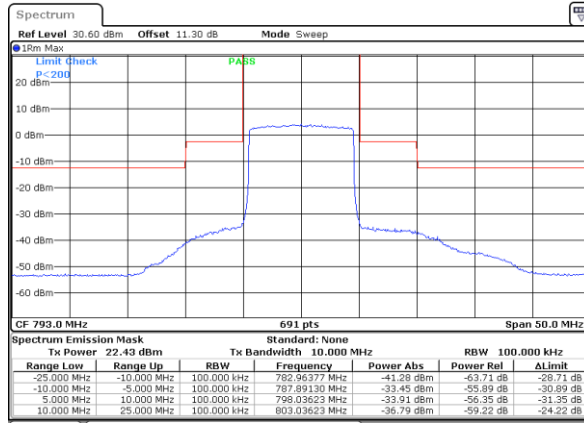

Date: 30 JUN 2020 22:58:25



Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0132	PASS
40	Normal Voltage	0.0116	
30	Normal Voltage	0.0165	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0033	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0015	
-20	Normal Voltage	0.0016	
-30	Normal Voltage	0.0021	
20	Maximum Voltage	0.0043	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0055	

Note:

1. Normal Voltage =3.87 V. ; Battery End Point (BEP) =3.49 V. ; Maximum Voltage =4.45 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP and Radiated Test

ERP

<Primary Antenna>

LTE Band 14 / 5MHz (Average) (GT - LC = -4 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	24.38	0.2742	18.23	0.0665
Middle		1	0	24.44	0.2780	18.29	0.0675
Highest		1	0	24.43	0.2773	18.28	0.0673
Lowest	16QAM	1	0	23.82	0.2410	17.67	0.0585
Middle		1	0	23.81	0.2404	17.66	0.0583
Highest		1	0	23.87	0.2438	17.72	0.0592
Lowest	64QAM	1	12	22.75	0.1884	16.60	0.0457
Middle		1	12	22.68	0.1854	16.53	0.0450
Highest		1	12	22.75	0.1884	16.60	0.0457
Limit	ERP < 3W			Result		PASS	

LTE Band 14 / 10MHz (Average) (GT - LC = -4 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	24.45	0.2786	18.30	0.0676
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	0	23.89	0.2449	17.74	0.0594
Highest		-	-	-	-	-	-
Lowest	64QAM	-	-	-	-	-	-
Middle		1	25	22.76	0.1888	16.61	0.0458
Highest		-	-	-	-	-	-
Limit	ERP < 3W			Result		PASS	



<ASDIV Antenna>

LTE Band 14 / 5MHz (Average) (GT - LC = -7.2 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	24.39	0.2746	15.04	0.0319
Middle		1	0	24.32	0.2704	14.97	0.0314
Highest		1	0	24.35	0.2723	15.00	0.0316
Lowest	16QAM	1	0	23.74	0.2366	14.39	0.0275
Middle		1	0	23.67	0.2328	14.32	0.0270
Highest		1	0	23.76	0.2377	14.41	0.0276
Lowest	64QAM	1	0	22.58	0.1811	13.23	0.0210
Middle		1	0	22.60	0.1820	13.25	0.0211
Highest		1	0	22.65	0.1841	13.30	0.0214
Limit	ERP < 3W			Result		PASS	

LTE Band 14 / 10MHz (Average) (GT - LC = -7.2 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	24.41	0.2761	15.06	0.0321
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	25	23.78	0.2388	14.43	0.0277
Highest		-	-	-	-	-	-
Lowest	64QAM	-	-	-	-	-	-
Middle		1	25	22.68	0.1854	13.33	0.0215
Highest		-	-	-	-	-	-
Limit	ERP < 3W			Result		PASS	



Radiated Spurious Emission

<Primary Antenna>

<Ant. 0>

LTE Band 14

LTE Band 14 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1584	-60.41	-42.15	-18.26	-73.89	-65.78	0.90	8.42	H
	2368	-54.17	-13	-41.17	-72.6	-61.41	1.12	10.52	H
	3162	-53.72	-13	-40.72	-74.02	-61.96	1.30	11.69	H
									H
									H
	1584	-60.71	-42.15	-18.56	-73.72	-66.08	0.90	8.42	V
	2368	-55.06	-13	-42.06	-73.26	-62.30	1.12	10.52	V
	3162	-53.59	-13	-40.59	-74.33	-61.83	1.30	11.69	V
									V
									V
Middle	1584	-59.91	-42.15	-17.76	-73.39	-65.28	0.90	8.42	H
	2376	-55.24	-13	-42.24	-73.63	-62.49	1.12	10.53	H
	3172	-54.02	-13	-41.02	-74.34	-62.28	1.30	11.71	H
									H
									H
	1584	-60.75	-42.15	-18.60	-73.76	-66.12	0.90	8.42	V
	2376	-56.24	-13	-43.24	-74.44	-63.49	1.12	10.53	V
	3172	-53.41	-13	-40.41	-74.19	-61.67	1.30	11.71	V



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	1592	-60.36	-42.15	-18.21	-73.78	-65.76	0.90	8.45	H
	2384	-54.92	-13	-41.92	-73.25	-62.18	1.12	10.54	H
	3182	-54.27	-13	-41.27	-74.61	-62.55	1.30	11.74	H
									H
									H
									H
									H
	1592	-60.84	-42.15	-18.69	-73.85	-66.24	0.90	8.45	V
	2384	-55.93	-13	-42.93	-74.13	-63.19	1.12	10.54	V
	3182	-53.65	-13	-40.65	-74.47	-61.93	1.30	11.74	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-60.26	-42.15	-18.11	-73.8	-65.60	0.90	8.39	H
	2368	-49.82	-13	-36.82	-68.25	-57.06	1.12	10.52	H
	3152	-54.15	-13	-41.15	-74.43	-62.37	1.30	11.66	H
									H
									H
									H
									H
	1576	-60.08	-42.15	-17.93	-73.09	-65.42	0.90	8.39	V
	2368	-55.06	-13	-42.06	-73.26	-62.30	1.12	10.52	V
	3152	-53.88	-13	-40.88	-74.58	-62.10	1.30	11.66	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<ASDIV Antenna>

<Ant. 1>

LTE Band 14

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1584	-60.66	-42.15	-18.51	-74.14	-66.03	0.90	8.42	H
	2368	-47.45	-13	-34.45	-65.88	-54.69	1.12	10.52	H
	3162	-54.22	-13	-41.22	-74.52	-62.46	1.30	11.69	H
									H
									H
	1584	-61.17	-42	-19.02	-74.18	-66.54	0.90	8.42	V
	2368	-48.12	-13	-35.12	-66.32	-55.36	1.12	10.52	V
	3162	-53.87	-13	-40.87	-74.61	-62.11	1.30	11.69	V
									V
									V
Middle	1584	-60.27	-42.15	-18.12	-73.75	-65.64	0.90	8.42	H
	2376	-47.74	-13	-34.74	-66.13	-54.99	1.12	10.53	H
	3172	-54.20	-13	-41.20	-74.52	-62.46	1.30	11.71	H
									H
									H
	1584	-61.12	-42.15	-18.97	-74.13	-66.49	0.90	8.42	V
	2376	-47.49	-13	-34.49	-65.69	-54.74	1.12	10.53	V
	3172	-53.77	-13	-40.77	-74.55	-62.03	1.30	11.71	V
									V
									V



LTE Band 14 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	1592	-60.73	-42.15	-18.58	-74.15	-66.13	0.90	8.45	H
	2384	-46.78	-13	-33.78	-65.11	-54.04	1.12	10.54	H
	3182	-54.30	-13	-41.30	-74.64	-62.58	1.30	11.74	H
									H
									H
									H
									H
	1592	-61.23	-42.15	-19.08	-74.24	-66.63	0.90	8.45	V
	2384	-46.69	-13	-33.69	-64.89	-53.95	1.12	10.54	V
	3182	-54.13	-13	-41.13	-74.95	-62.41	1.30	11.74	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-60.58	-42.15	-18.43	-74.12	-65.92	0.90	8.39	H
	2368	-48.29	-13	-35.29	-66.72	-55.53	1.12	10.52	H
	3152	-54.56	-13	-41.56	-74.84	-62.78	1.30	11.66	H
									H
									H
									H
									H
	1576	-60.59	-42.15	-18.44	-73.6	-65.93	0.90	8.39	V
	2368	-48.30	-13	-35.30	-66.5	-55.54	1.12	10.52	V
	3152	-53.95	-13	-40.95	-74.65	-62.17	1.30	11.66	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

—————THE END—————