

# TEST REPORT

Reference No..... : WTX24X01018808W002  
FCC ID..... : A4X-MPP15-1LNNB  
Applicant..... : CE LINK LIMITED  
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Manufacturer..... : DONGGUAN CE LINK LIMITED  
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Product Name..... : QI2 Wireless Charger  
Model No..... : MPP15-1LNNB  
Standards..... : KDB 680106 D01 V04  
KDB 447498 D01 V06  
Date of Receipt sample.... : 2024-01-23  
Date of Test..... : 2024-03-05 to 2024-03-21  
Date of Issue..... : 2024-03-21  
Test Report Form No. .... : WTX\_KDB 680106 D01 V04W  
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Gala Wang

Approved by:



Jason Su

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
1.2 AUXILIARY EQUIPMENT LIST AND DETAILS .....5  
1.3 TEST EQUIPMENT LIST AND DETAILS .....6

**2. RF EXPOSURE TEST REPORT .....7**  
2.1 STANDARD APPLICABLE.....7  
2.2 TEST CONDITIONS .....7  
2.3 TEST PROCEDURE.....8  
2.4 TEST RESULT.....9  
2.5 MEASUREMENT UNCERTAINTY .....11  
2.6 TEST PHOTOS .....12

**APPENDIX PHOTOGRAPHS.....13**

**Report version**

Version No.	Date of issue	Description
Rev.00	2024-03-21	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Factory#1: SuiChuan CE LINK LIMITED  
 Address of factory: SuiChuan county industrial park east zone, Ji'an city, Jiangxi Province, China.

Factory#2: CE LINK VIET NAM COMPANY LIMITED.  
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	QI2 Wireless Charger
Trade Name:	CE-LINK
Model No.:	MPP15-1LNNB
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110-205kHz@5W 127.85-359.99kHz@15W
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Rated Voltage:	Input: DC5V/9V
Rated Current:	Input: 3A/2.2A
Rated Power:	Output: 5W/15W

## 1.2 Auxiliary Equipment List and Details

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	1.5	Unshielded	Without Ferrite

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	Iotie	CHCRIO160	/
Wireless Charging Load	NuVolta	NUI 6X8 EVM MPP V2.1 231124	/

### Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

### 1.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200AC	180ZX10226	2024-03-05	2025-03-04

## 2. RF Exposure Test Report

### 2.1 Standard Applicable

According to §1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)



Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz \* = Plane-wave equivalent power density

### 2.2 Test Conditions

Test Mode	Description	Remark
TM1	Wireless Charging	Connect to the Adapter; AC120V 60Hz for adapter, Wireless Charging (5W)
TM2	Wireless Charging	Connect to the Adapter; AC120V 60Hz for adapter, Wireless Charging (15W)
Note: The EUT was tested with empty load, half load, and full load, and recorded the worst mode (full load) data in the report.		
<b>Measurement Distance:</b>	15 cm and 20 cm	

## 2.3 Test Procedure

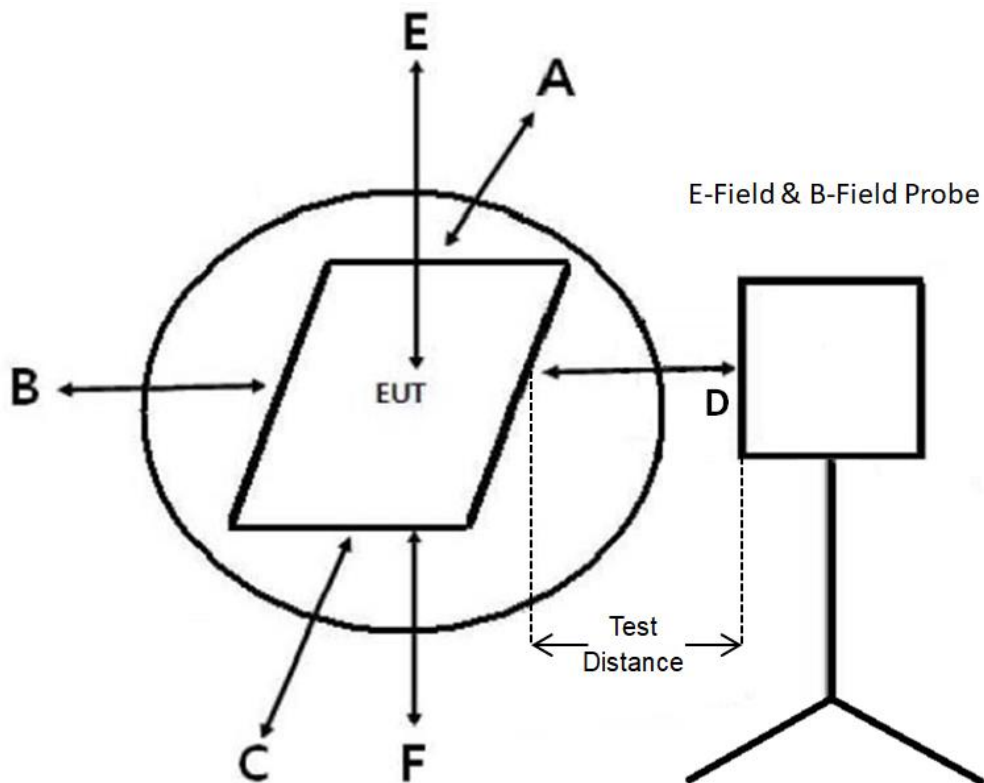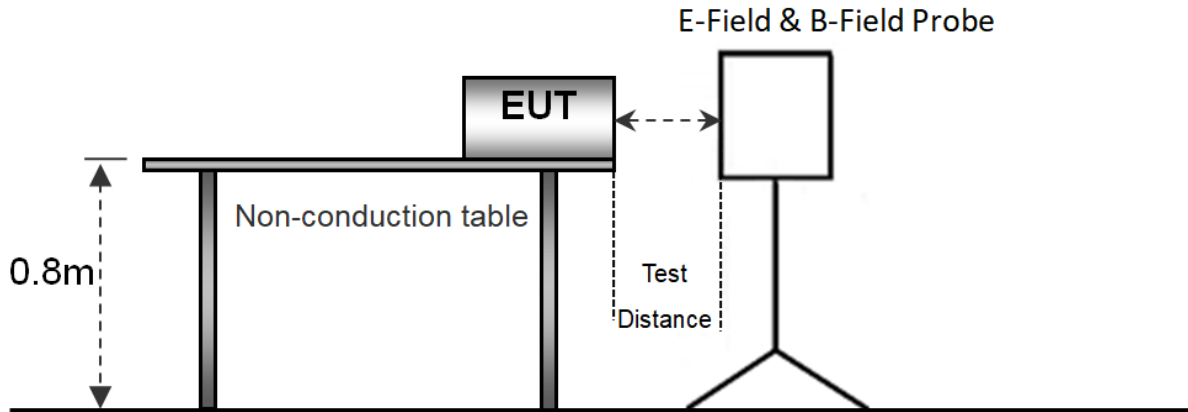

- Probe Model: EHP-200AC; The probe sensor is 8 mm below the surface.
- The measurement probe was placed at test distance (15 cm for A,B,C,D,F and 20 cm for E), which is between the edge of the charger and the edge of probe.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 v04



## 2.4 Test Result

The EUT complies with item 5.2 of KDB 680106 D01 v04

1. The power transfer frequency is below 1 MHz.  
Yes, the device operate in the frequency range from 110-205kHz and 127.85kHz to 359.99kHz.
2. The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.  
Yes, the maximum output power of the primary coil is equal to 15W.
3. A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)  
Yes, the surfaces of the transmitter and client device enclosures has be in physical contact.
4. Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portableexposure conditions).  
Yes, It is mobile exposure conditions only.
5. The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.  
Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test list.
6. For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well.  
Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test list; and the coils can't transmitted simultaneous.

Test Mode: TM1

<b>Electric Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (V/m)</b>	<b>Limit(V/m)</b>	<b>50% Limit (V/m)</b>
Point E	5.14	614	307
Point F	1.99	614	307
Point A	4.12	614	307
Point B	5.06	614	307
Point C	3.12	614	307
Point D	3.00	614	307
<b>Magnetic Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (A/m)</b>	<b>Limit(A/m)</b>	<b>50% Limit (A/m)</b>
Point E	0.12	1.63	0.815
Point F	0.36	1.63	0.815
Point A	0.32	1.63	0.815
Point B	0.31	1.63	0.815
Point C	0.29	1.63	0.815
Point D	0.20	1.63	0.815


Test Mode: TM2

<b>Electric Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (V/m)</b>	<b>Limit(V/m)</b>	<b>50% Limit (V/m)</b>
Point E	5.21	614	307
Point F	2.01	614	307
Point A	4.24	614	307
Point B	5.12	614	307
Point C	3.14	614	307
Point D	3.22	614	307
<b>Magnetic Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (A/m)</b>	<b>Limit(A/m)</b>	<b>50% Limit (A/m)</b>
Point E	0.25	1.63	0.815
Point F	0.42	1.63	0.815
Point A	0.41	1.63	0.815
Point B	0.37	1.63	0.815
Point C	0.25	1.63	0.815
Point D	0.21	1.63	0.815

### 2.5 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Electric Field Emissions	Radiated	$\pm 1.56$ (V/m)
Magnetic Field Emissions	Radiated	$\pm 0.08$ (A/m)

2.6 Test Photos

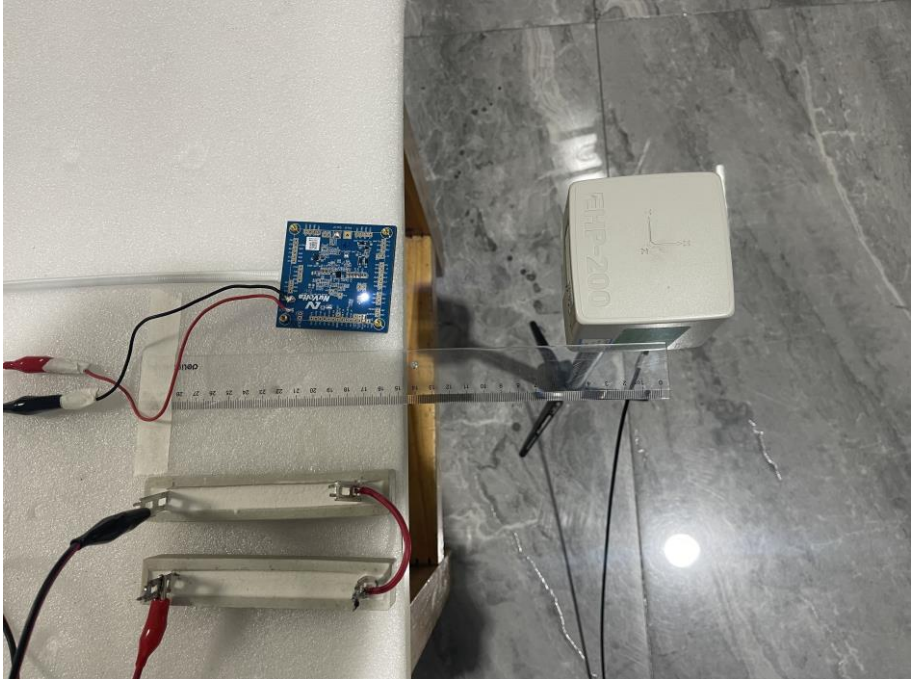

## APPENDIX PHOTOGRAPHS

---

Please refer to "ANNEX"

\*\*\*\* END OF REPORT \*\*\*\*