

CE LINK LIMITED

TEST REPORT

SCOPE OF WORK

SAR Assessment– TM0022P

REPORT NUMBER

211029036SZN-002

ISSUE DATE

19 January 2022

[REVISED DATE]

[-----]

PAGES

7

DOCUMENT CONTROL NUMBER

RF Exposure

© 2017 INTERTEK



Test Report

Applicant : CE LINK LIMITED
Building M, Li Cheng Technology Industrial Zone, Gong
He Village, Sha JingTown, Shen Zhen, China

Sample Description

Product : Wireless Charging Pad 10W
Model No. : TM0022P
Brand Name : GOTO
Electrical Rating : Input: DC 5V/2A, 9V/2A, 12V/1.5A from adapter
Wireless charging maximum output: 10W

Date Received : 21 October 2021
Date Test Conducted : 21 October 2021 to 06 January 2022

Test Requested : Test for compliance with CFR 47 part 1
Test Method : Environmental evaluation and exposure limit according
to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310
KDB 680106 D01 RF Exposure Wireless Charging App
v03r01

Test Result : Pass
Conclusion : When determining of test conclusion, measurement
uncertainty of tests have been considered.

***** End of Page *****

Prepared and Checked By:

Approved By:

Jeff Liang
Engineer

Peter Kang
Senior Technical Supervisor
Date: 19 January 2022

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch


101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288

Fax: (86 755) 8601 6751

Test Report

Test Setup Configuration

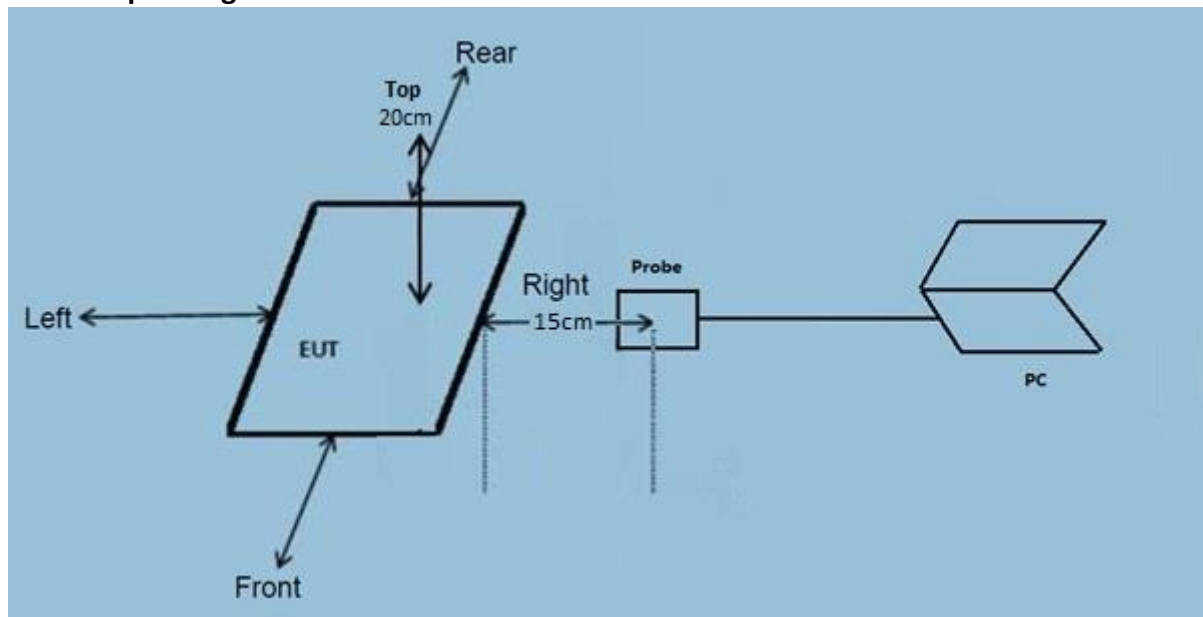

Note

- The RF exposure test is performed in the shield room.
- The test distance is at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils.

Test Equipment List

Name of instrument	Model	Manufacturer	Cal. Date	Due Date
Electric and Magnetic Field Analyzer	EHP-50F	Narda	2021-07-20	2022-07-20

This product was tested in the following configuration:

Description	Manufacturer	Detail
Mobile Phone (Provided by Intertek)	Samsung	S7
USB cable (Provided by Applicant)	NIL	Unshielded, Length 120cm
USB Power Adapter (Provided by Applicant)	N/A	Model No: W0920U-1U05F Input: 100-240VAC 50/60Hz 0.45A Max Output: 3.6V~6.0V=3A, 6V~9V12.0V=2A, 9V~12=1.5A

Justification

Pertest mode	Description
Mode 1	Standby mode
Mode 2	Mobile phone is charging at 1% battery power
Mode 3	Mobile phone is charging at 50% battery power
Mode 4	Mobile phone is charging at 99% battery power

The EUT was powered by AC 120V/60Hz during the test. The test system was pre-scanning tested based on the consideration of following EUT operation mode. The EUT is equipped with two coil antennas, but cannot be simultaneous operation, only single operation, both coils have been tested and reported the worst-case data. Only the worst-case data is shown in this report.

Reference Limit:

Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3 – 1.34	614	1.63	(100) *	30

Note: * = Plane wave equivalent power density

Test Result:

During test, the mobile handset is being charged.

Worst Case Operating Mode: Mode 3

H-Field Strength at 15 cm surrounding the EUT and 20cm away from the surface from the coil of the EUT

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.127-0.197	1% Battery Level	0.0035	0.0031	0.0089	0.0032	0.0037	1.63
0.127-0.197	50% Battery Level	0.0031	0.0035	0.0088	0.0031	0.0035	1.63
0.127-0.197	99% Battery Level	0.0031	0.0031	0.0087	0.0032	0.0036	1.63
0.127-0.197	Stand-by	0.0035	0.0031	0.0089	0.0031	0.0035	1.63

E-Field Strength at 15 cm surrounding the EUT and 20cm away from the surface from the coil of the EUT


Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.127-0.197	1% Battery Level	0.0296	0.0294	0.0812	0.0269	0.0300	614
0.127-0.197	50% Battery Level	0.0295	0.0294	0.0809	0.0266	0.0298	614
0.127-0.197	99% Battery Level	0.0295	0.0293	0.0810	0.0268	0.0297	614
0.127-0.197	Stand-by	0.0293	0.0290	0.0811	0.0266	0.0300	614

Configuration photo of the test:


H-Field & E-Field Strength test photos




Front

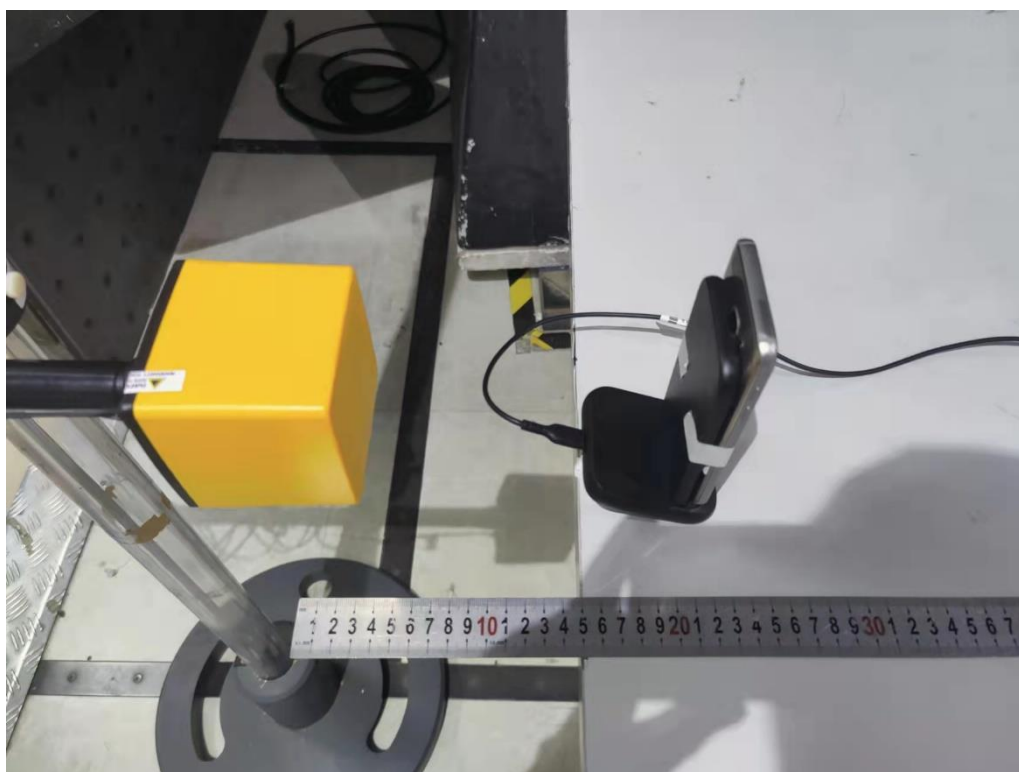

Rear

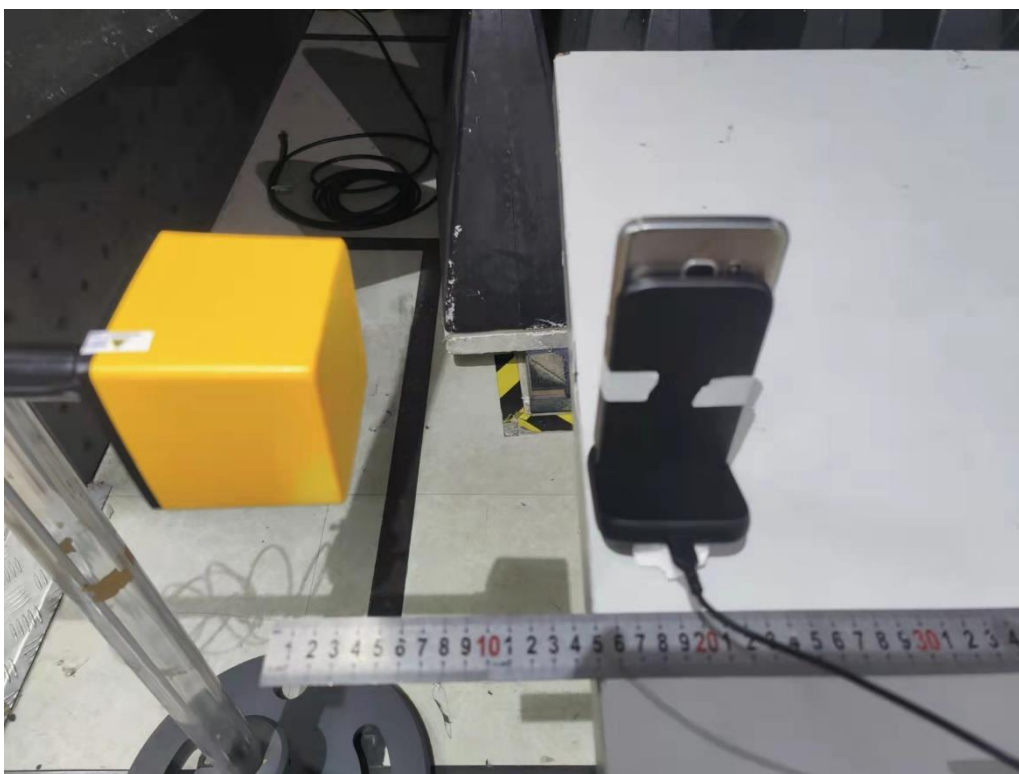

Left

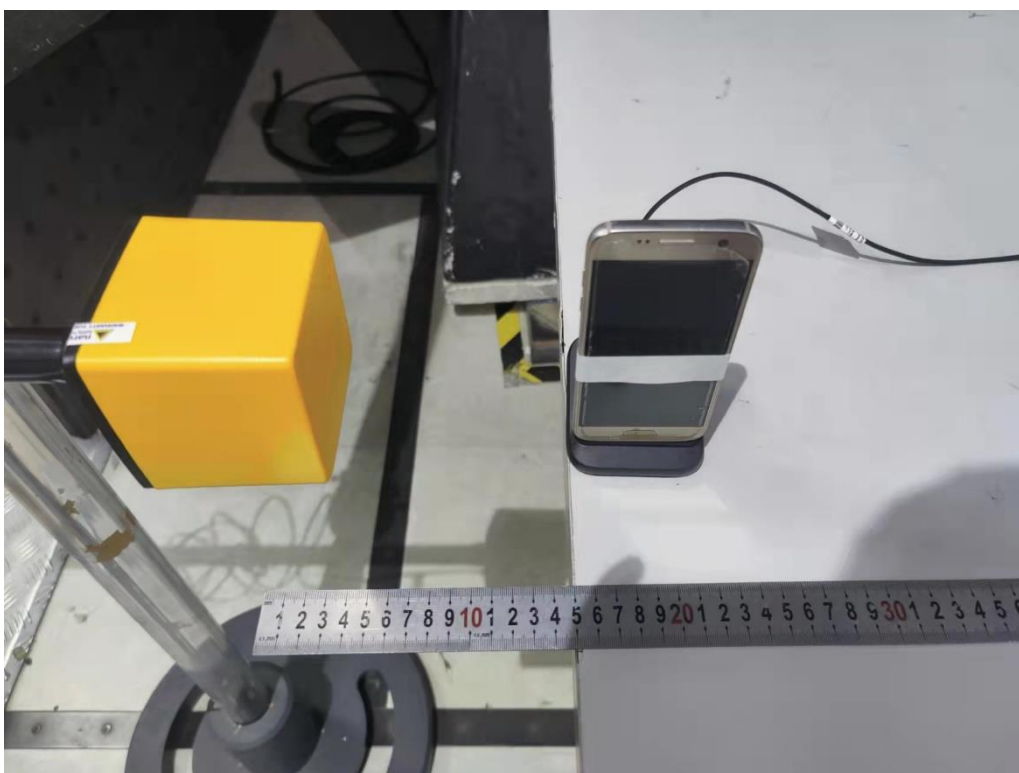

Right



Top

***** End of Report*****