

# TEST REPORT

Reference No..... : WTX21X08091895W-2  
FCC ID ..... : A4X-WPC05-1TANA  
Applicant ..... : CE LINK LIMITED  
Address..... : Building M,LiCheng Technology Industrial Zone,GongHe Village,ShaJing  
Town,ShenZhen City,China  
Product Name ..... : Wireless Charger  
Test Model. .... : WPC05-1TANA  
Standards ..... : KDB 680106 D01 V03  
Date of Receipt sample .... : Aug. 31, 2021  
Date of Test..... : Aug. 31, 2021 to Sept. 16, 2021  
Date of Issue ..... : Sept. 16, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

  
Mike Shi / Project Engineer

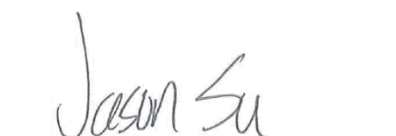  
Jason Su / RF Manager

  
Silin Chen / Manager

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

1.2 TEST EQUIPMENT LIST AND DETAILS .....5

**2. RF EXPOSURE TEST REPORT.....6**

2.1 STANDARD APPLICABLE.....6

2.2 TEST CONDITIONS .....6

2.3 TEST PROCEDURE.....7

2.4 TEST RESULT.....7

2.5 TEST PHOTOS .....9

**APPENDIX PHOTOGRAPHS.....10**

**Report version**

Version No.	Date of issue	Description
Rev.00	Sept. 16, 2021	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: CE LINK LIMITED  
Address of applicant: Building M,LiCheng Technology Industrial Zone,GongHe Village,ShaJing Town,ShenZhen City,China

Manufacturer: ANFU CE LINK LIMITED  
Address of manufacturer: Anfu County Industrial Zone, Ji'an city, Jiangxi Province, P.R. China.

Factory name1: SuiChuan CE LINK LIMITED  
Factory address1: SuiChuan county industrial park east zone, Ji'an city ,Jiangxi province, China.

Factory name2: CE LINK VIET NAM COMPANY LIMITED.  
Factory address2: Lot. CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Wireless Charger
Trade Name:	CE-LINK, powerlot
Model No.:	WPC05-1TANA
Adding Model(s):	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	326KHz+/-14K
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Input:	DC5V 1A
Wireless output:	0.5A, 2.5W max
Power adapter:	/

#### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Watch	Apple	A2093	/

1.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200AC	180ZX10226	2021-05-20	2024-05-19

## 2. RF Exposure Test Report

### 2.1 Standard Applicable

According to § 1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz \* = Plane-wave equivalent power density

### 2.2 Test Conditions

Test Mode	Description	Remark
TM1	Wireless charging	Input DC5V 1A Wireless output 2.5W Max
Measurement Distance:	15 cm and 20 cm	

## 2.3 Test Procedure

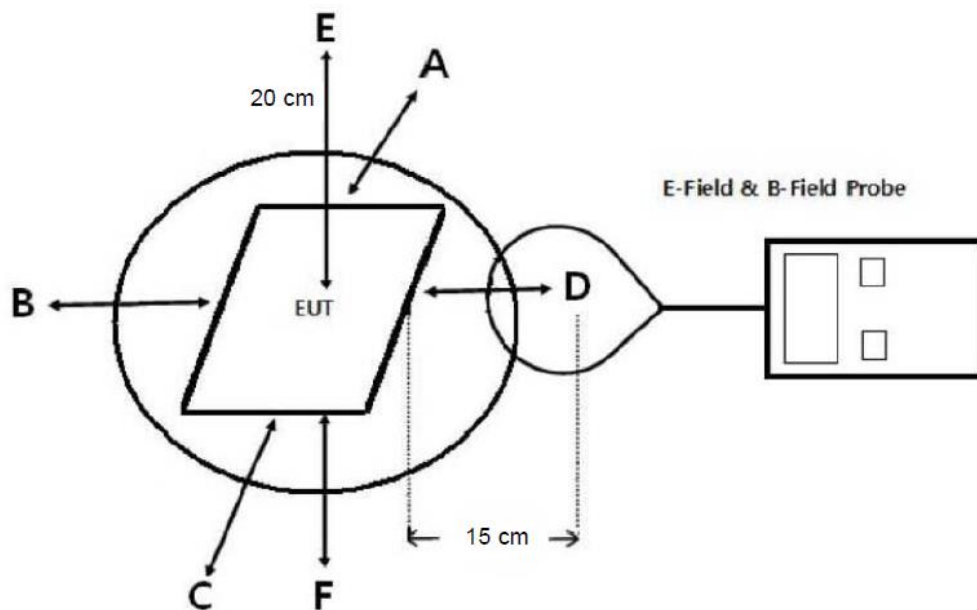

- The measurement probe was placed at test distance (15 cm for A, B, C, D, F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 V03.

## 2.4 Test Result

The EUT dose comply with item 5.2 of KDB 680106 D01V03

- Power transfer frequency is less than 1 MHz  
Yes, the device operates in the frequency range from 312 kHz to 340 kHz.
- Output power from each primary coil is less than or equal to 15 watts  
Yes, the maximum output power of the primary coil is less than 15 W.
- The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils  
Yes, the client device includes only single primary coils.
- Client device is inserted in or placed directly in contact with the transmitter  
Yes, Client device is placed directly in contact with the transmitter.
- Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, It is mobile exposure conditions only.

6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.


Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1 list, and the coils can't transmitted simultaneous.

*Test Mode: TM1*

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	5.49	614	307
Point F	4.79	614	307
Point A	3.13	614	307
Point B	3.60	614	307
Point C	3.97	614	307
Point D	2.21	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.21	1.63	0.815
Point F	0.24	1.63	0.815
Point A	0.20	1.63	0.815
Point B	0.41	1.63	0.815
Point C	0.12	1.63	0.815
Point D	0.31	1.63	0.815



## 2.5 Test Photos

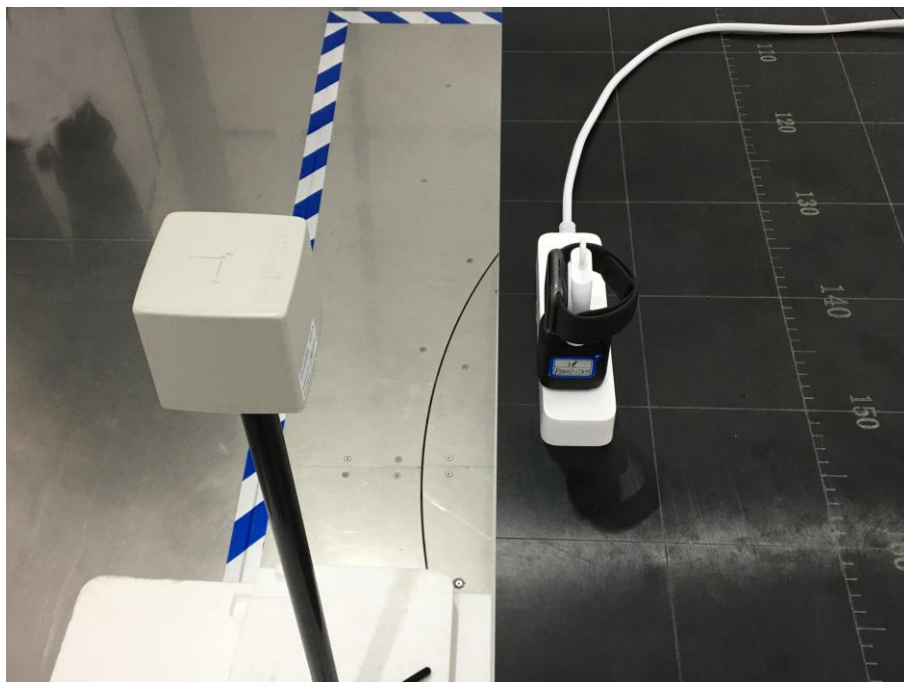

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***