

# TEST REPORT

Reference No..... : WTX21X07076051W-2  
FCC ID ..... : A4X-WPC10-1TCNA  
Applicant ..... : CE LINK LIMITED  
Address ..... : Building M,LiCheng Technology Industrial Zone,GongHe Village,ShaJing  
Town,ShenZhen City,China.  
Product Name ..... : Wireless Charger  
Test Model. .... : WPC10-1TCNA  
Standards ..... : KDB 680106 D01 V03  
Date of Receipt sample .... : Jul. 28, 2021  
Date of Test..... : Jul. 28, 2021 to Aug. 10, 2021  
Date of Issue ..... : Aug. 10, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China




Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

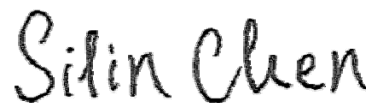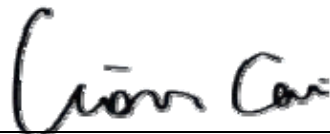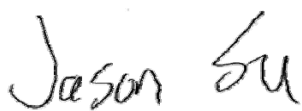

Jason Su / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
    1.2 TEST EQUIPMENT LIST AND DETAILS .....5  
**2. RF EXPOSURE TEST REPORT .....6**  
    2.1 STANDARD APPLICABLE.....6  
    2.2 TEST CONDITIONS .....6  
    2.3 TEST PROCEDURE.....7  
    2.4 TEST RESULT.....7  
    2.5 TEST PHOTOS .....10  
**APPENDIX PHOTOGRAPHS.....11**

**Report version**

Version No.	Date of issue	Description
Rev.00	Aug. 10, 2021	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant:	CE LINK LIMITED
Address of applicant:	Building M,LiCheng Technology Industrial Zone, GongHe Village,ShaJing Town,ShenZhen City, China.
Manufacturer:	Dongguan CE LINK LIMITED
Address of manufacturer:	22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China.
Factory 1:	SuiChuan CE LINK LIMITED
Address of factory	SuiChuan county industrial park east zone, Ji'an city Jiangxi province, China.
Factory 2:	CE LINK VIET NAM COMPANY LIMITED.
Address of factory	Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Wireless Charger
Trade Name:	CE-LINK
Model No.:	WPC10-1TCNA
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205KHz
Power adapter	/
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Modulation Type:	ASK
Rated Voltage:	Input: DC5V, 9V Output:DC5V, 9V
Rated Current:	Input:3A, 2.22A Output:1A, 1.1A
Rated Power:	Output: 5W, 7.5W, 10W

## Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
wireless charging load	YBZ	YBZ wireless charging tester	/
Adapter	XIAOMI	MDY-08-ES	/

## 1.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200AC	180ZX10226	2021-05-20	2024-05-19

## 2. RF Exposure Test Report

### 2.1 Standard Applicable

According to § 1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz \* = Plane-wave equivalent power density

### 2.2 Test Conditions

Test Mode	Description	Remark
TM1	Wireless Charging	Input DC5V3A; Output DC5V1A
TM2	Wireless Charging	Input DC9V2.22A; Output DC9V1.1A
<b>Measurement Distance:</b>		
		15 cm

## 2.3 Test Procedure

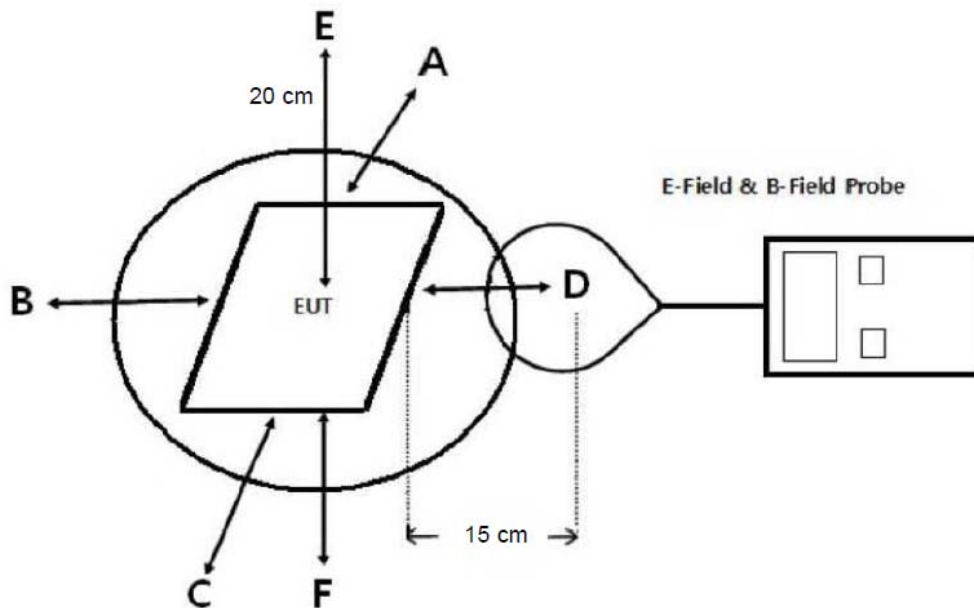

- The measurement probe was placed at test distance(15 cm for A,B,C,D,F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points(A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 V03.

## 2.4 Test Result

The EUT dose comply with item 5.2 of KDB 680106 D01V03

- Power transfer frequency is less than 1 MHz  
Yes, the device operate in the frequency range from 110kHz to 205kHz.
- Output power from each primary coil is less than or equal to 15 watts  
Yes, the maximum output power of the primary coil is less than 15W.
- The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils  
Yes, the client device includes only single primary coils.
- Client device is inserted in or placed directly in contact with the transmitter  
Yes, Client device is placed directly in contact with the transmitter.
- Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, It is mobile exposure conditions only.

6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1, TM2 list, and the coils can't transmitted simultaneous.

*Test Mode: TM1*


<b>Electric Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (V/m)</b>	<b>Limit(V/m)</b>	<b>50% Limit (V/m)</b>
Point E	1.9859	614	307
Point F	1.9853	614	307
Point A	1.9854	614	307
Point B	1.9849	614	307
Point C	1.9851	614	307
Side D	1.9856	614	307
<b>Magnetic Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (A/m)</b>	<b>Limit(A/m)</b>	<b>50% Limit (A/m)</b>
Point E	0.5206	1.63	0.815
Point F	0.5191	1.63	0.815
Point A	0.5195	1.63	0.815
Point B	0.5201	1.63	0.815
Point C	0.5204	1.63	0.815
Side D	0.5190	1.63	0.815



*Test Mode: TM2*

<b>Electric Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (V/m)</b>	<b>Limit(V/m)</b>	<b>50% Limit (V/m)</b>
Point E	2.8645	614	307
Point F	2.8617	614	307
Point A	2.8627	614	307
Point B	2.8631	614	307
Point C	2.8618	614	307
Side D	2.8622	614	307
<b>Magnetic Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (A/m)</b>	<b>Limit(A/m)</b>	<b>50% Limit (A/m)</b>
Point E	0.7319	1.63	0.815
Point F	0.7308	1.63	0.815
Point A	0.7312	1.63	0.815
Point B	0.7315	1.63	0.815
Point C	0.7312	1.63	0.815
Side D	0.7314	1.63	0.815

**2.5 Test Photos**

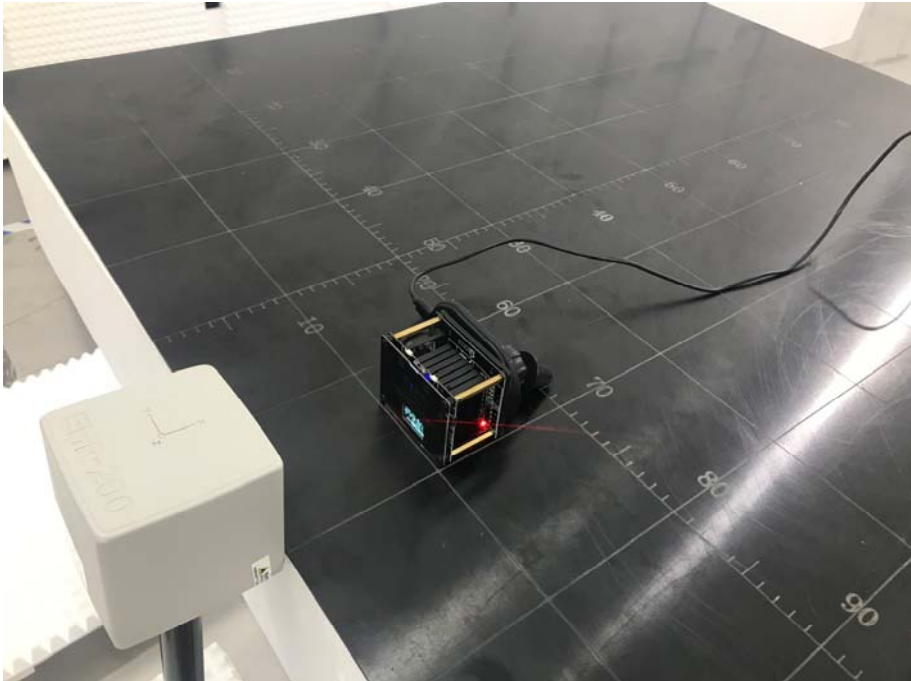

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***