

TEST REPORT

Reference No...... : WTX22X03046854W-1
FCC ID : A4X18PNCWPC10
Applicant : CE LINK LIMITED
Address : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China.
Manufacturer : SuiChuan CE LINK LIMITED
Address : SuiChuan county industrial park east zone, Ji'an city, Jiangxi province, China.
Product Name : Magnetic Wireless Charger with Power Bank
Model No...... : PC1P18PNC-WPC10
Standards : FCC Part 18
Date of Receipt sample : 2022-03-17
Date of Test..... : 2022-03-17 to 2022-04-11
Date of Issue : 2022-04-11
Test Report Form No. : WTX_Part 18W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 EUT SETUP AND OPERATION MODE6
1.6 MEASUREMENT UNCERTAINTY7
1.7 TEST EQUIPMENT LIST AND DETAILS8

2. SUMMARY OF TEST RESULTS9

3. CONDUCTED EMISSIONS10
3.1 STANDARD APPLICABLE.....10
3.2 TEST PROCEDURE.....10
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10
3.4 ENVIRONMENTAL CONDITIONS10
3.5 TEST RECEIVER SETUP11
3.6 SUMMARY OF TEST RESULTS/PLOTS11

4. RADIATED EMISSIONS.....16
4.1 TEST PROCEDURE.....16
4.2 TEST RECEIVER SETUP18
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....18
4.4 ENVIRONMENTAL CONDITIONS18
4.5 SUMMARY OF TEST RESULTS/PLOTS18

APPENDIX PHOTOGRAPHS.....25

Report version

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00 | 2022-04-11 | Original |
| / | / | / |

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory name: CE LINK VIET NAM COMPANY LIMITED
 Factory address: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

| General Description of EUT | |
|--|---|
| Product Name: | Magnetic Wireless Charger with Power Bank |
| Trade Name: | CE-LINK |
| Model No.: | PC1P18PNC-WPC10 |
| Adding Model(s): | / |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i> | |

| Technical Characteristics of EUT | |
|----------------------------------|---|
| Frequency Range: | 110~205kHz |
| Modulation Type: | FSK |
| Antenna Type: | Coil Antenna |
| Antenna Gain | 0dBi |
| Rated Voltage: | Battery Capacity: 4000mAh(14.8Wh) Type C Input: 5V 3A, 9V 1.67A Type C output: 5V 3A, 9V 2A Wireless Charger: 5W/7.5W/10W Total Output: 18W Max |
| Rated Current: | Input : 3A/ 1.67A Output : 3A/ 2A |
| Rated Power: | Wireless Output : 5W, 7.5W, 10W |

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

| Test Mode | Description | Remark | Power Supply Mode |
|-----------|-------------------|--------|-------------------|
| TM1 | Wireless Charging | / | Output 5W |
| TM2 | Wireless Charging | / | Output 10W |

EUT Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| / | / | / | / |

Auxiliary Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|------------------------|--------------|------------------------------|---------------|
| Adapter | GaN2 Pro | CCDAN65C2 | / |
| Wireless Charging Load | YBZ | YBZ wireless charging tester | / |

Special Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| USB Cable | 1.02 | Unshielded | Without Ferrite |

1.6 Measurement Uncertainty

| Measurement uncertainty | | |
|-------------------------|------------|--------------------------|
| Parameter | Conditions | Uncertainty |
| Conducted Emissions | Conducted | 9-150kHz ± 3.74 dB |
| | | 0.15-30MHz ± 3.34 dB |
| Radiated Emissions | Radiated | 30-200MHz ± 4.52 dB |
| | | 0.2-1GHz ± 5.56 dB |
| | | 1-6GHz ± 3.84 dB |
| | | 6-18GHz ± 3.92 dB |

1.7 Test Equipment List and Details

| Description | Manufacturer | Model | Serial No. | Cal Date | Due Date |
|--------------------------|-----------------|-------------|------------|------------|------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP | 836079/035 | 2021-03-30 | 2022-03-29 |
| Spectrum Analyzer | Rohde & Schwarz | FSP | 836079/035 | 2022-03-22 | 2023-03-21 |
| EMI Test Receiver | Rohde & Schwarz | ESVB | 825471/005 | 2021-04-12 | 2022-04-11 |
| Amplifier | Agilent | 8447F | 3113A06717 | 2022-01-07 | 2023-01-06 |
| Amplifier | C&D | PAP-1G18 | 2002 | 2021-04-12 | 2022-04-11 |
| Trilog Broadband Antenna | Schwarz beck | VULB9163 | 9163-333 | 2021-03-20 | 2023-03-19 |
| Horn Antenna | ETS | 3117 | 00086197 | 2021-03-19 | 2023-03-18 |
| Loop Antenna | Schwarz beck | FMZB 1516 | 9773 | 2021-03-20 | 2023-03-19 |
| Trilog Broadband Antenna | Schwarz beck | VULB9163(B) | 9163-635 | 2021-04-09 | 2023-04-08 |
| Amplifier | Agilent | 8447D | 2944A10179 | 2021-04-12 | 2022-04-11 |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100911 | 2021-04-15 | 2022-04-14 |

| Software List | | | |
|---|--------------|--------|---------|
| Description | Manufacturer | Model | Version |
| EMI Test Software (Radiated Emission)* | Farad | EZ-EMC | RA-03A1 |
| EMI Test Software (Conducted Emission)* | Farad | EZ-EMC | RA-03A1 |

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST | RESULT |
|--------------|---------------------|-----------|
| § 18.307 (b) | Conducted Emission | Compliant |
| § 18.305 (b) | Radiated Emission | Compliant |

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:

| Frequency (MHz) | Conducted limit (dB μ V) | |
|-----------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |


3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

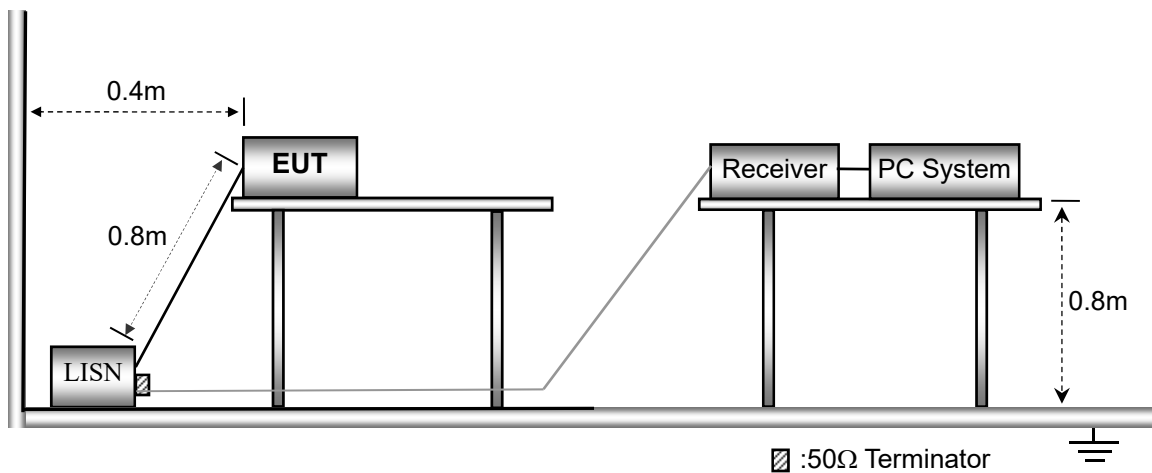

3.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 60% |
| ATM Pressure: | 1016 mbar |


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal


3.6 Summary of Test Results/Plots

| | | | |
|------------|-----|-----------|------|
| Test mode: | TM1 | Polarity: | Line |
|------------|-----|-----------|------|

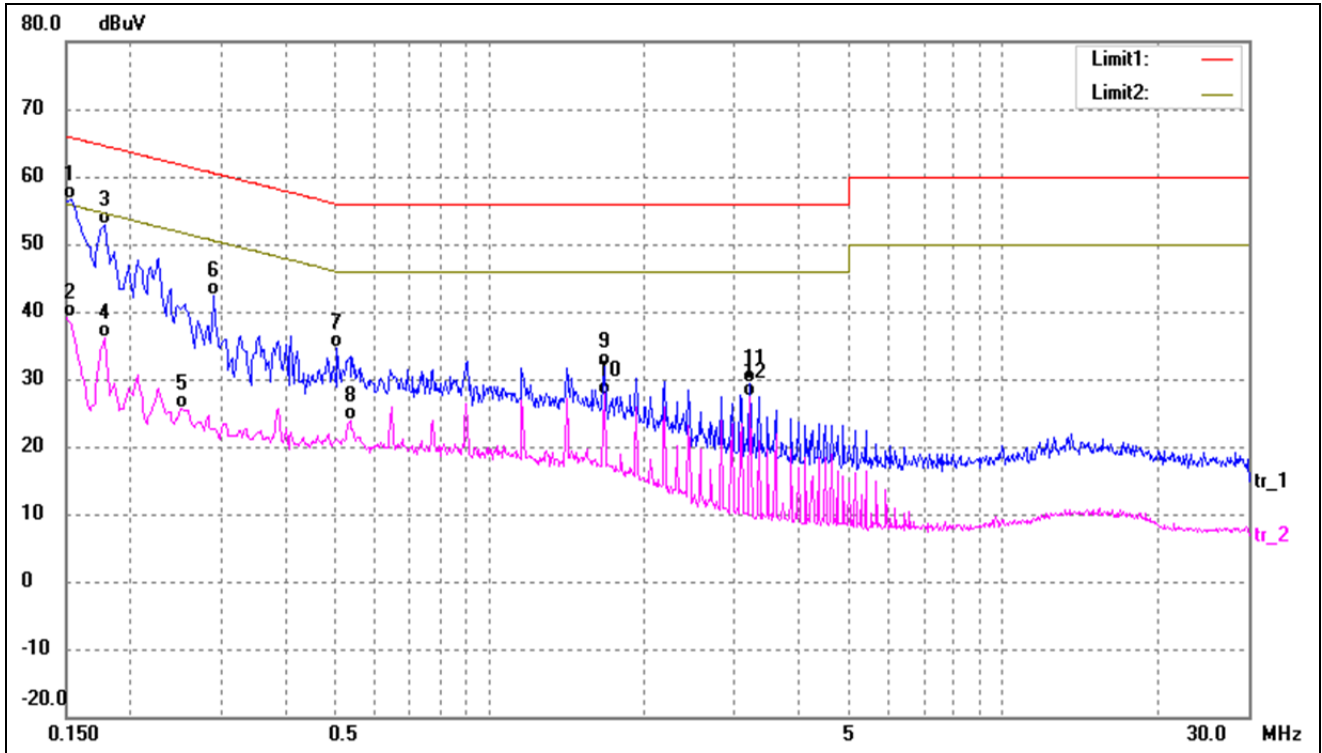


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|----------|
| 1* | 0.1539 | 46.26 | 10.37 | 56.63 | 65.78 | -9.15 | QP |
| 2 | 0.1539 | 28.84 | 10.37 | 39.21 | 55.78 | -16.57 | AVG |
| 3 | 0.1780 | 42.50 | 10.37 | 52.87 | 64.57 | -11.70 | QP |
| 4 | 0.1780 | 25.86 | 10.37 | 36.23 | 54.57 | -18.34 | AVG |
| 5 | 0.2500 | 15.31 | 10.35 | 25.66 | 51.75 | -26.09 | AVG |
| 6 | 0.2900 | 31.92 | 10.34 | 42.26 | 60.52 | -18.26 | QP |
| 7 | 0.5060 | 24.34 | 10.26 | 34.60 | 56.00 | -21.40 | QP |
| 8 | 0.5340 | 13.67 | 10.28 | 23.95 | 46.00 | -22.05 | AVG |
| 9 | 1.6740 | 21.65 | 10.27 | 31.92 | 56.00 | -24.08 | QP |
| 10 | 1.6740 | 17.48 | 10.27 | 27.75 | 46.00 | -18.25 | AVG |
| 11 | 3.2220 | 19.42 | 10.08 | 29.50 | 56.00 | -26.50 | QP |
| 12 | 3.2220 | 17.27 | 10.08 | 27.35 | 46.00 | -18.65 | AVG |

| | | | |
|------------|-----|-----------|---------|
| Test mode: | TM1 | Polarity: | Neutral |
|------------|-----|-----------|---------|

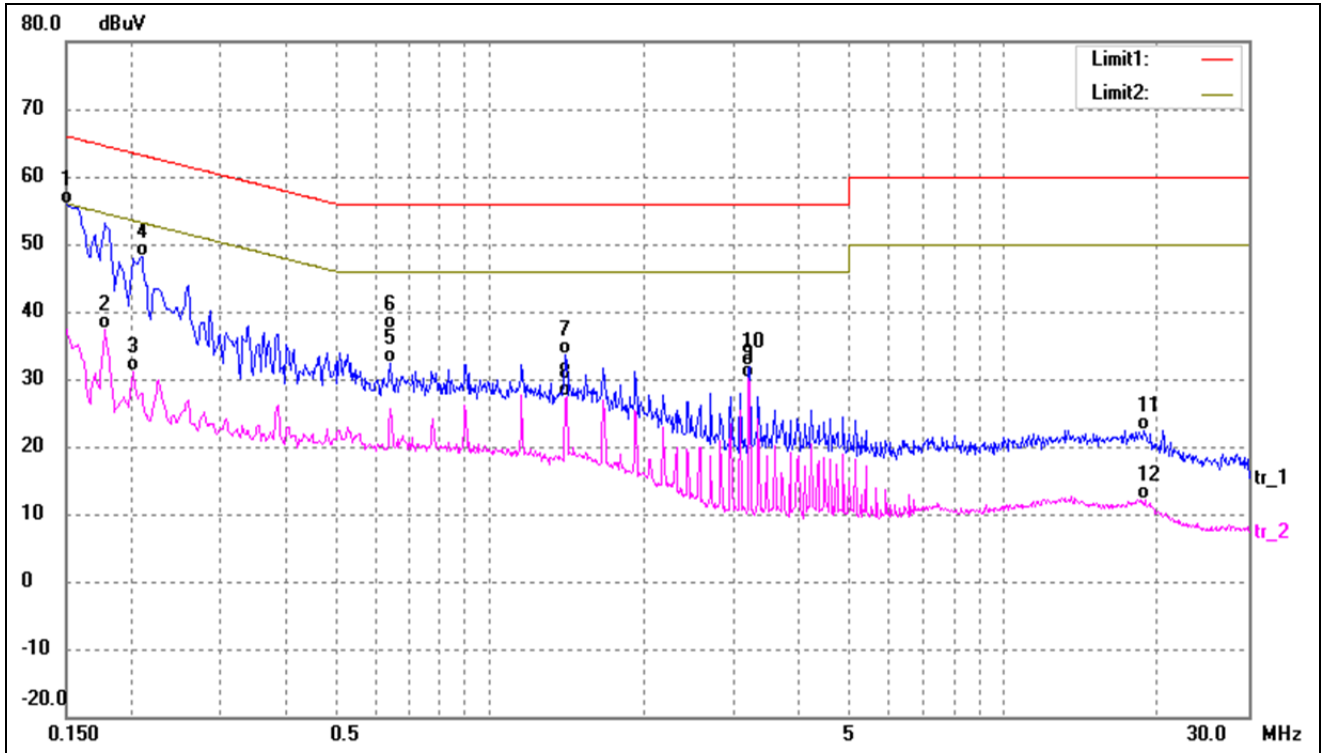


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|----------|
| 1 | 0.1500 | 45.57 | 10.38 | 55.95 | 65.99 | -10.04 | QP |
| 2 | 0.1780 | 26.93 | 10.37 | 37.30 | 54.57 | -17.27 | AVG |
| 3 | 0.2020 | 20.70 | 10.37 | 31.07 | 53.52 | -22.45 | AVG |
| 4 | 0.2100 | 37.82 | 10.37 | 48.19 | 63.20 | -15.01 | QP |
| 5 | 0.6419 | 22.13 | 10.34 | 32.47 | 56.00 | -23.53 | QP |
| 6* | 0.6419 | 27.00 | 10.34 | 37.34 | 46.00 | -8.66 | AVG |
| 7 | 1.4100 | 23.36 | 10.39 | 33.75 | 56.00 | -22.25 | QP |
| 8 | 1.4140 | 17.10 | 10.38 | 27.48 | 46.00 | -18.52 | AVG |
| 9 | 3.2060 | 20.07 | 10.08 | 30.15 | 46.00 | -15.85 | AVG |
| 10 | 3.2139 | 21.72 | 10.08 | 31.80 | 56.00 | -24.20 | QP |
| 11 | 18.7939 | 12.22 | 10.23 | 22.45 | 60.00 | -37.55 | QP |
| 12 | 18.9180 | 1.91 | 10.23 | 12.14 | 50.00 | -37.86 | AVG |

| | | | |
|------------|-----|-----------|------|
| Test mode: | TM2 | Polarity: | Line |
|------------|-----|-----------|------|

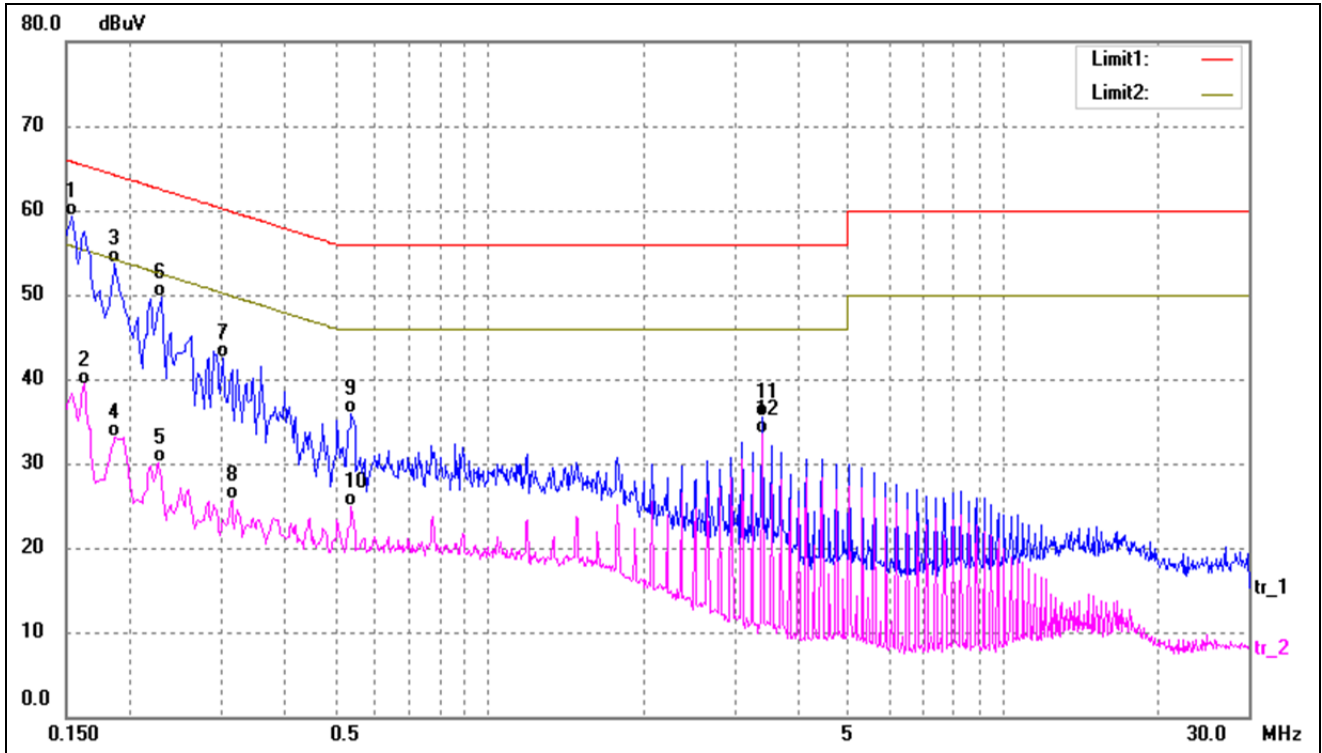

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|----------|
| 1* | 0.1539 | 49.00 | 10.37 | 59.37 | 65.78 | -6.41 | QP |
| 2 | 0.1620 | 29.03 | 10.37 | 39.40 | 55.36 | -15.96 | AVG |
| 3 | 0.1860 | 43.29 | 10.37 | 53.66 | 64.21 | -10.55 | QP |
| 4 | 0.1860 | 22.77 | 10.37 | 33.14 | 54.21 | -21.07 | AVG |
| 5 | 0.2260 | 19.70 | 10.36 | 30.06 | 52.59 | -22.53 | AVG |
| 6 | 0.2300 | 39.26 | 10.36 | 49.62 | 62.45 | -12.83 | QP |
| 7 | 0.3020 | 32.24 | 10.34 | 42.58 | 60.19 | -17.61 | QP |
| 8 | 0.3140 | 15.42 | 10.33 | 25.75 | 49.86 | -24.11 | AVG |
| 9 | 0.5380 | 25.55 | 10.28 | 35.83 | 56.00 | -20.17 | QP |
| 10 | 0.5380 | 14.61 | 10.28 | 24.89 | 46.00 | -21.11 | AVG |
| 11 | 3.3980 | 25.35 | 10.07 | 35.42 | 56.00 | -20.58 | QP |
| 12 | 3.4020 | 23.45 | 10.07 | 33.52 | 46.00 | -12.48 | AVG |

| | | | |
|------------|-----|-----------|---------|
| Test mode: | TM2 | Polarity: | Neutral |
|------------|-----|-----------|---------|

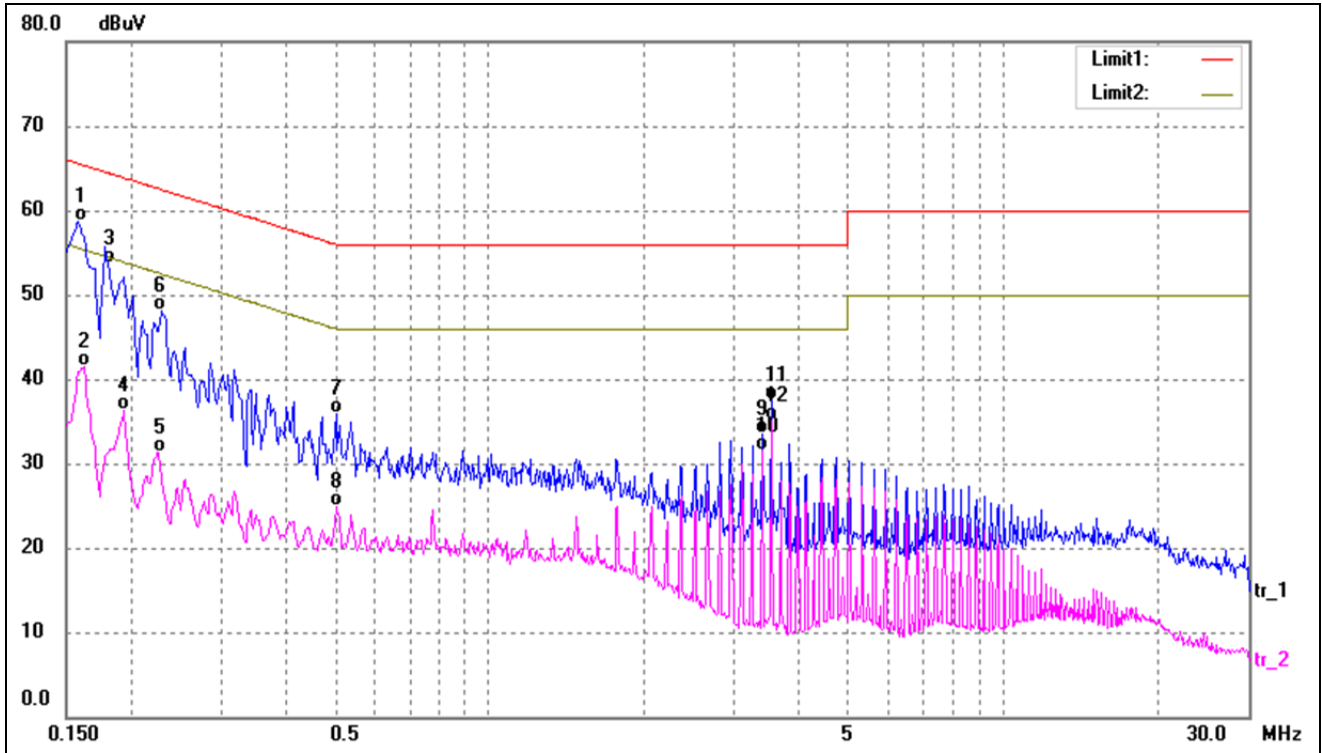

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|----------|
| 1* | 0.1580 | 48.34 | 10.37 | 58.71 | 65.56 | -6.85 | QP |
| 2 | 0.1620 | 31.07 | 10.37 | 41.44 | 55.36 | -13.92 | AVG |
| 3 | 0.1806 | 43.31 | 10.37 | 53.68 | 64.45 | -10.77 | QP |
| 4 | 0.1940 | 25.97 | 10.37 | 36.34 | 53.86 | -17.52 | AVG |
| 5 | 0.2260 | 20.95 | 10.36 | 31.31 | 52.59 | -21.28 | AVG |
| 6 | 0.2300 | 37.79 | 10.36 | 48.15 | 62.45 | -14.30 | QP |
| 7 | 0.5020 | 25.61 | 10.26 | 35.87 | 56.00 | -20.13 | QP |
| 8 | 0.5020 | 14.58 | 10.26 | 24.84 | 46.00 | -21.16 | AVG |
| 9 | 3.3900 | 23.47 | 10.07 | 33.54 | 56.00 | -22.46 | QP |
| 10 | 3.3900 | 21.52 | 10.07 | 31.59 | 46.00 | -14.41 | AVG |
| 11 | 3.5380 | 27.42 | 10.06 | 37.48 | 56.00 | -18.52 | QP |
| 12 | 3.5380 | 25.08 | 10.06 | 35.14 | 46.00 | -10.86 | AVG |

4. Radiated Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

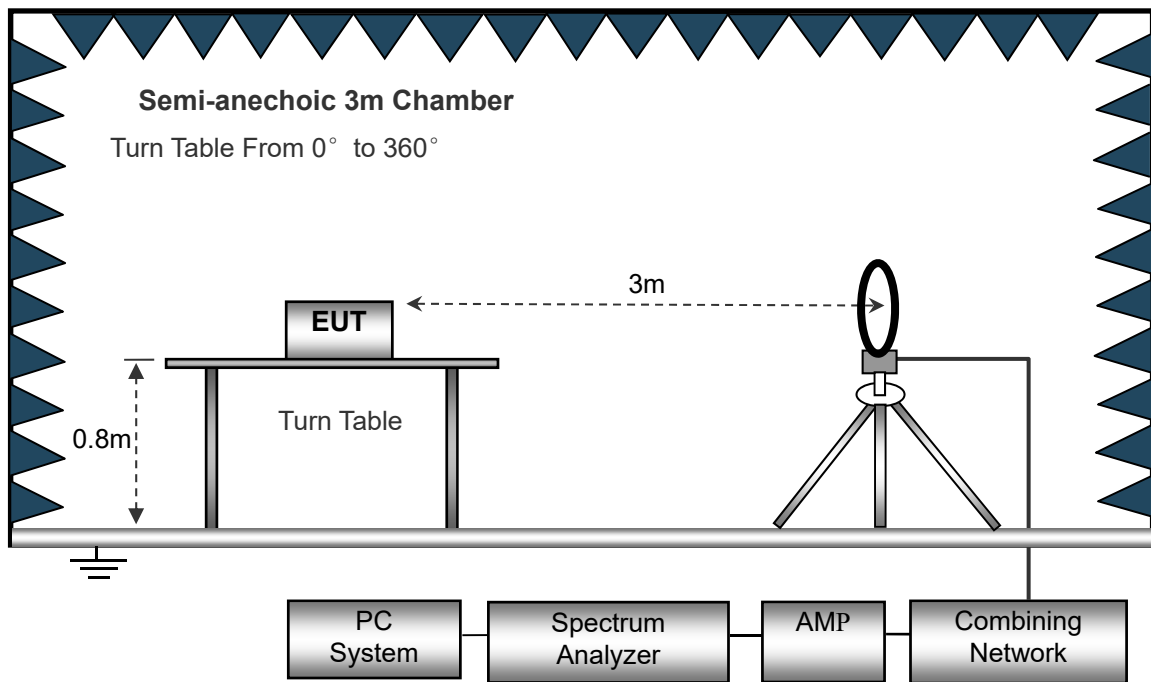

The test setup for emission measurement from 30 MHz to 1 GHz..

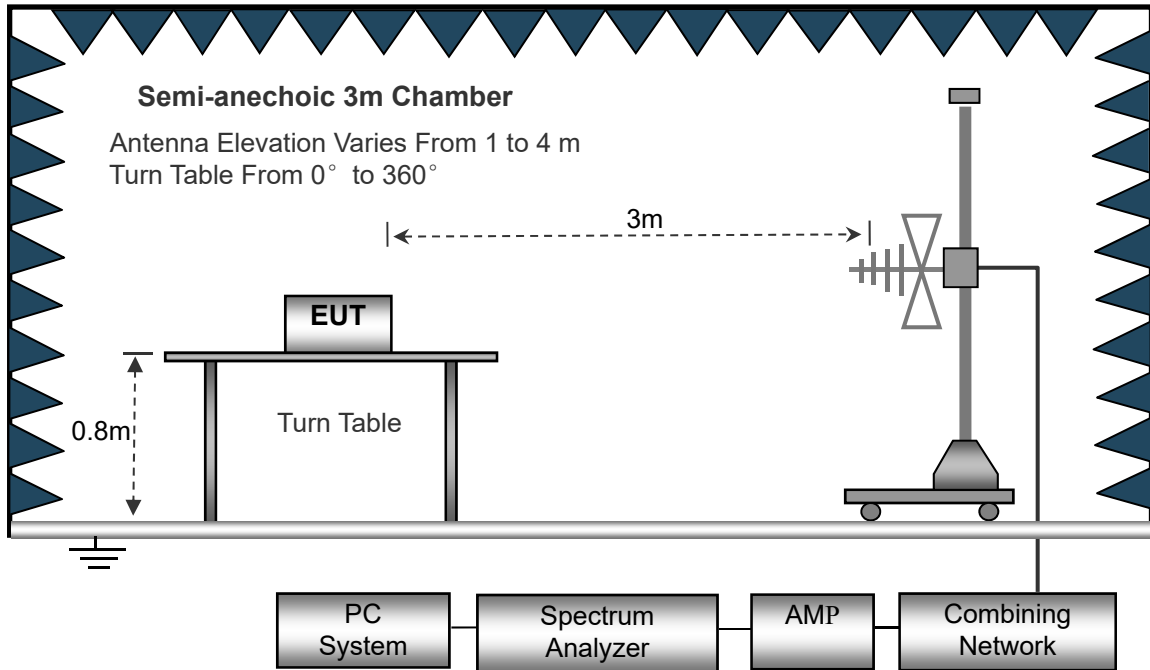

The test setup for emission measurement above 1 GHz..

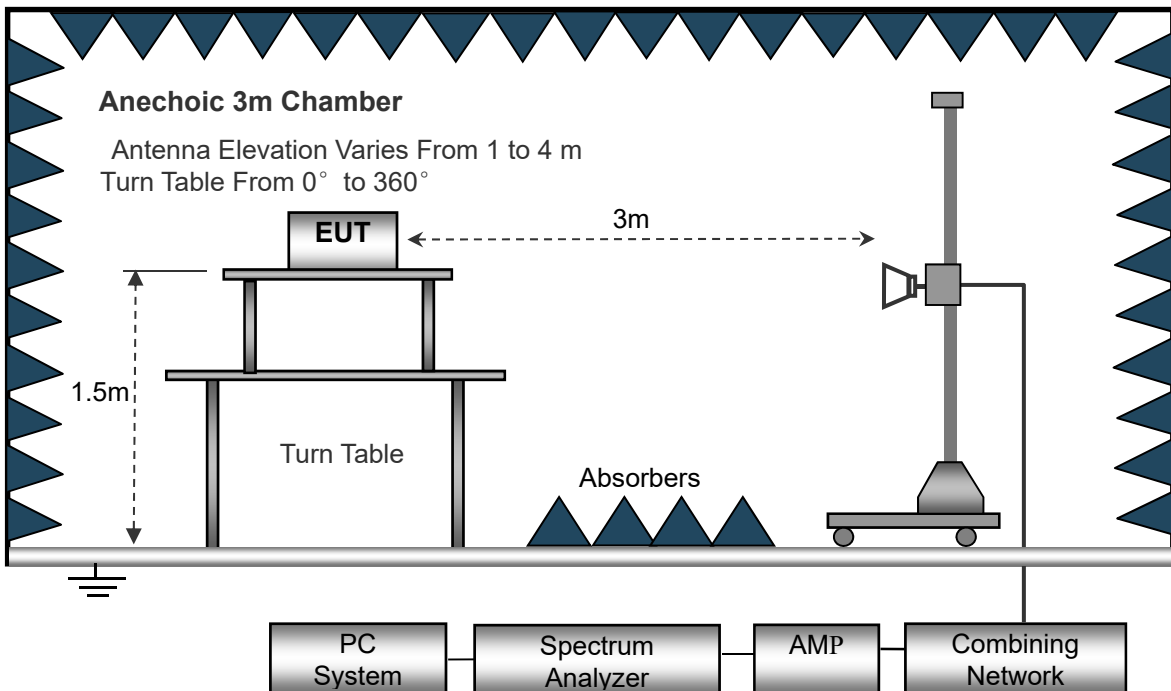

4.2 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 22.5 °C |
| Relative Humidity: | 54 % |
| ATM Pressure: | 1011 mbar |

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

| | | | |
|------------|-----|-----------|------------|
| Test mode: | TM1 | Polarity: | Horizontal |
|------------|-----|-----------|------------|

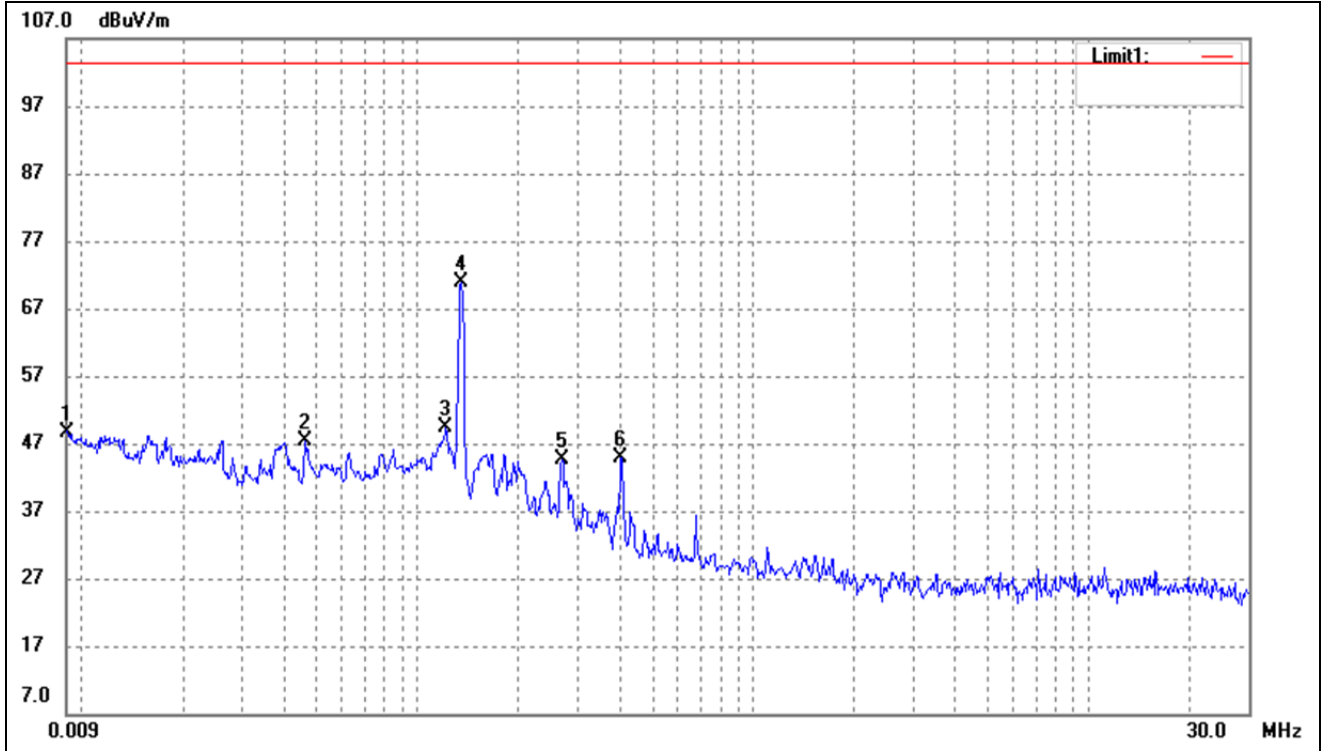

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 0.0089 | 74.95 | -26.20 | 48.75 | 103.50 | -54.75 | - | - | peak |
| 2 | 0.0463 | 73.56 | -26.13 | 47.43 | 103.50 | -56.07 | - | - | peak |
| 3 | 0.1215 | 75.28 | -26.01 | 49.27 | 103.50 | -54.23 | - | - | peak |
| 4 | 0.1351 | 96.87 | -26.00 | 70.87 | 103.50 | -32.63 | - | - | peak |
| 5 | 0.2693 | 70.61 | -25.88 | 44.73 | 103.50 | -58.77 | - | - | peak |
| 6 | 0.4041 | 70.76 | -25.76 | 45.00 | 103.50 | -58.50 | - | - | peak |


| | | | |
|------------|-----|-----------|------------|
| Test mode: | TM2 | Polarity: | Horizontal |
|------------|-----|-----------|------------|

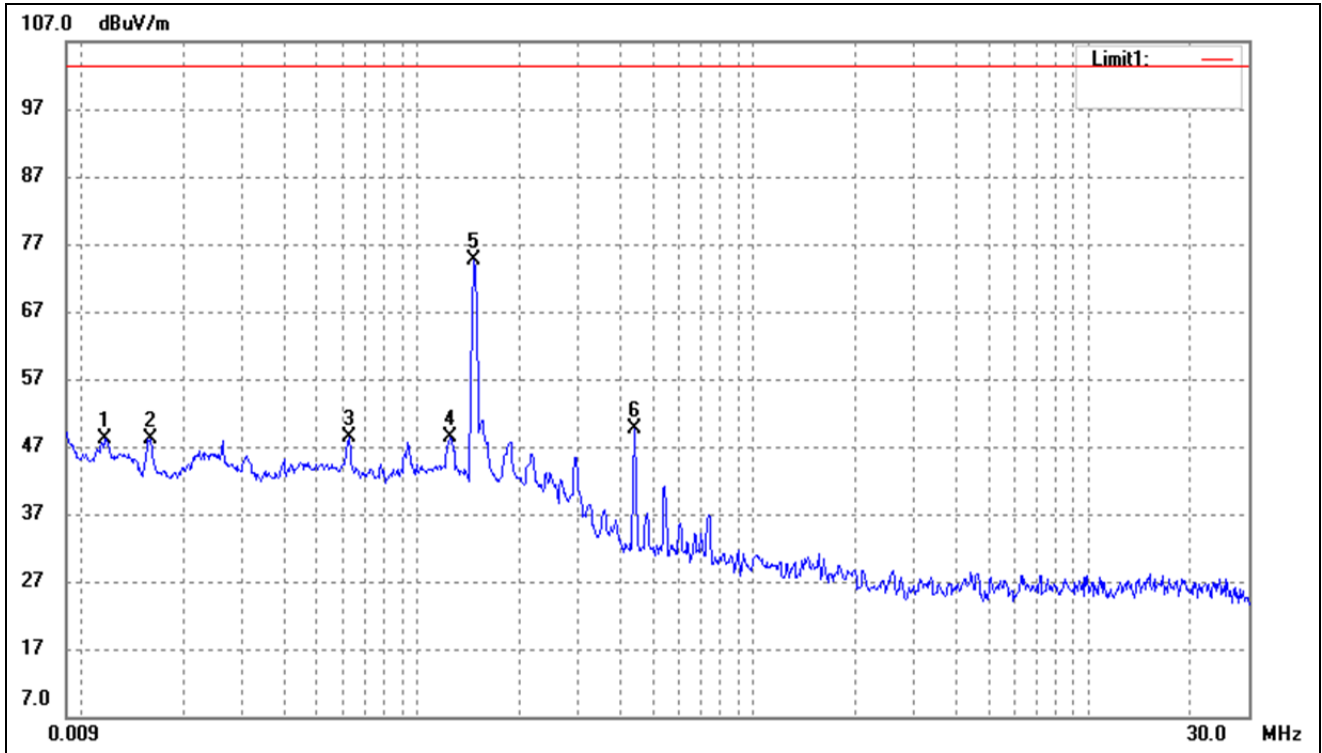

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 0.0117 | 74.40 | -26.20 | 48.20 | 103.50 | -55.30 | - | - | peak |
| 2 | 0.0160 | 74.37 | -26.18 | 48.19 | 103.50 | -55.31 | - | - | peak |
| 3 | 0.0625 | 74.42 | -26.10 | 48.32 | 103.50 | -55.18 | - | - | peak |
| 4 | 0.1257 | 74.29 | -26.01 | 48.28 | 103.50 | -55.22 | - | - | peak |
| 5 | 0.1477 | 100.70 | -25.99 | 74.71 | 103.50 | -28.79 | - | - | peak |
| 6 | 0.4418 | 75.33 | -25.73 | 49.60 | 103.50 | -53.90 | - | - | peak |


Plot of Radiated Emissions Test Data (Above 30MHz)

| | | | |
|------------|-----|-----------|------------|
| Test mode: | TM1 | Polarity: | Horizontal |
|------------|-----|-----------|------------|

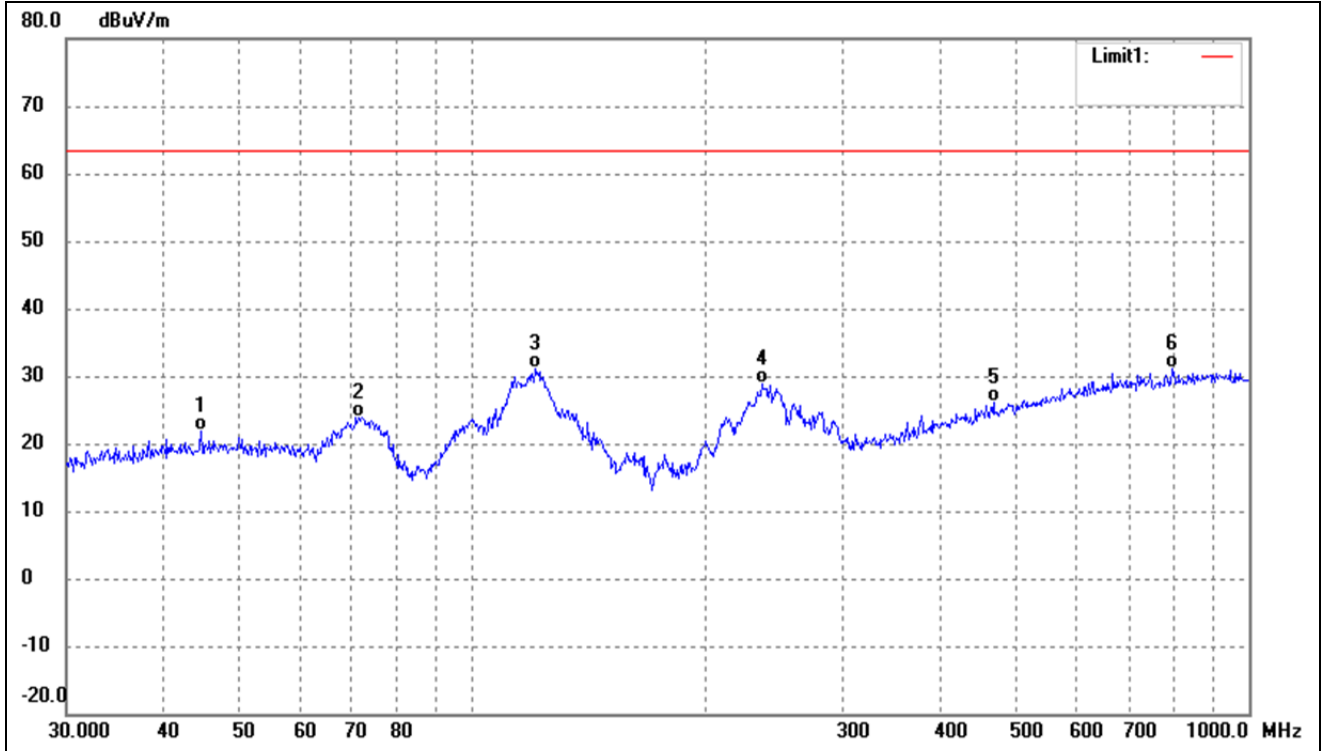


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 44.7434 | 28.79 | -6.98 | 21.81 | 63.50 | -41.69 | - | - | QP |
| 2 | 71.3300 | 34.15 | -10.25 | 23.90 | 63.50 | -39.60 | - | - | QP |
| 3 | 120.6991 | 40.97 | -9.72 | 31.25 | 63.50 | -32.25 | - | - | QP |
| 4 | 235.8164 | 37.48 | -8.71 | 28.77 | 63.50 | -34.73 | - | - | QP |
| 5 | 468.8762 | 28.20 | -2.09 | 26.11 | 63.50 | -37.39 | - | - | QP |
| 6 | 796.1830 | 29.08 | 2.08 | 31.16 | 63.50 | -32.34 | - | - | QP |

| | | | |
|------------|-----|-----------|----------|
| Test mode: | TM1 | Polarity: | Vertical |
|------------|-----|-----------|----------|

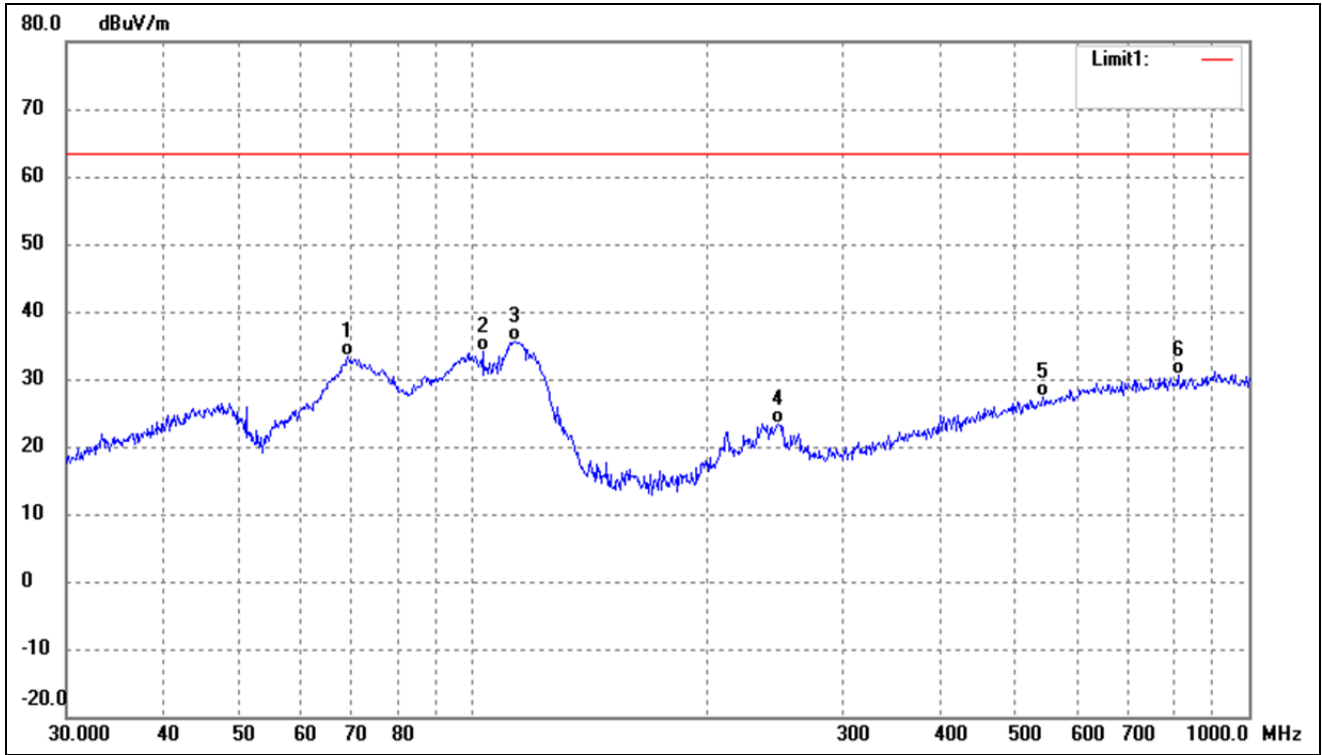


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1 | 69.1141 | 43.31 | -10.01 | 33.30 | 63.50 | -30.20 | - | - | QP |
| 2 | 103.0800 | 42.99 | -8.77 | 34.22 | 63.50 | -29.28 | - | - | QP |
| 3 | 113.3163 | 44.74 | -9.11 | 35.63 | 63.50 | -27.87 | - | - | QP |
| 4 | 247.6819 | 31.78 | -8.38 | 23.40 | 63.50 | -40.10 | - | - | QP |
| 5 | 543.2742 | 27.91 | -0.57 | 27.34 | 63.50 | -36.16 | - | - | QP |
| 6 | 810.2654 | 28.58 | 2.16 | 30.74 | 63.50 | -32.76 | - | - | QP |

| | | | |
|------------|-----|-----------|------------|
| Test mode: | TM2 | Polarity: | Horizontal |
|------------|-----|-----------|------------|

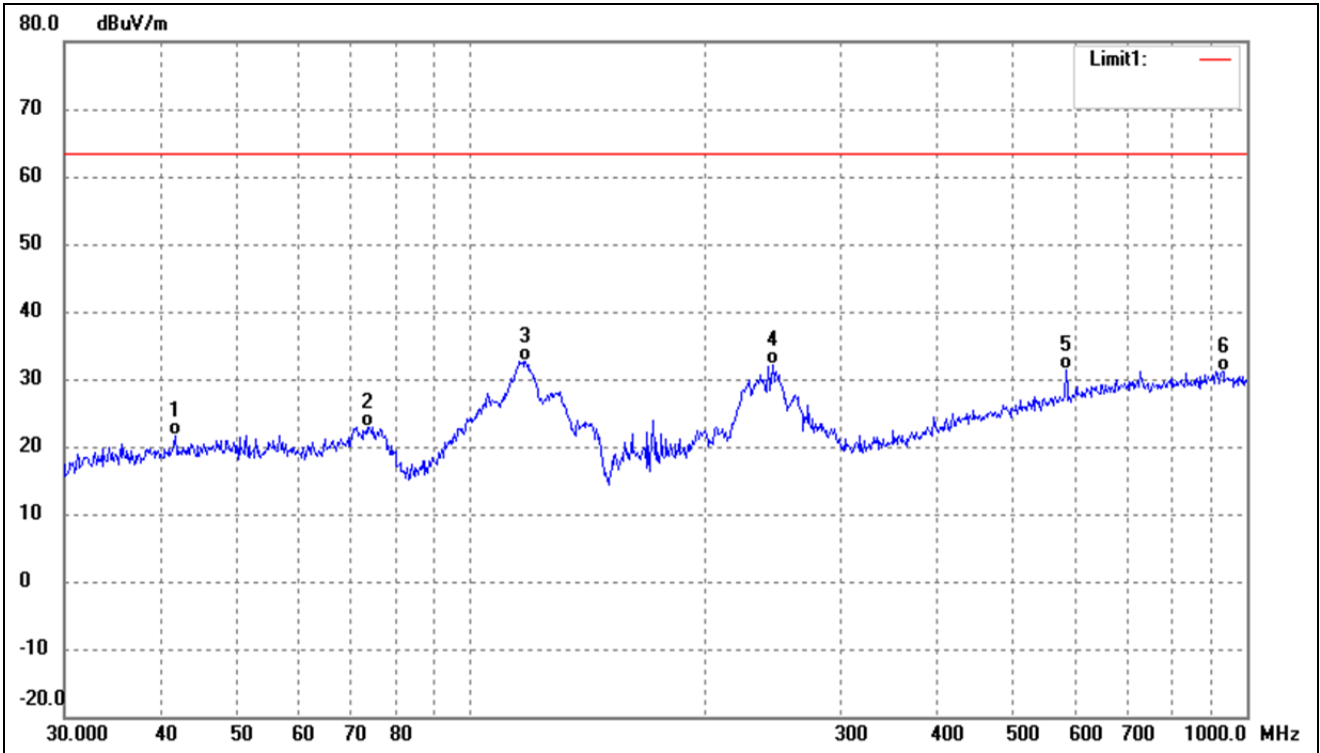

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 41.7130 | 28.57 | -7.00 | 21.57 | 63.50 | -41.93 | - | - | QP |
| 2 | 73.6170 | 33.27 | -10.38 | 22.89 | 63.50 | -40.61 | - | - | QP |
| 3 | 117.7725 | 42.17 | -9.43 | 32.74 | 63.50 | -30.76 | - | - | QP |
| 4 | 245.0900 | 40.49 | -8.45 | 32.04 | 63.50 | -31.46 | - | - | QP |
| 5 | 584.7895 | 31.27 | 0.11 | 31.38 | 63.50 | -32.12 | - | - | QP |
| 6 | 932.2715 | 28.47 | 2.64 | 31.11 | 63.50 | -32.39 | - | - | QP |

| | | | |
|------------|-----|-----------|----------|
| Test mode: | TM2 | Polarity: | Vertical |
|------------|-----|-----------|----------|

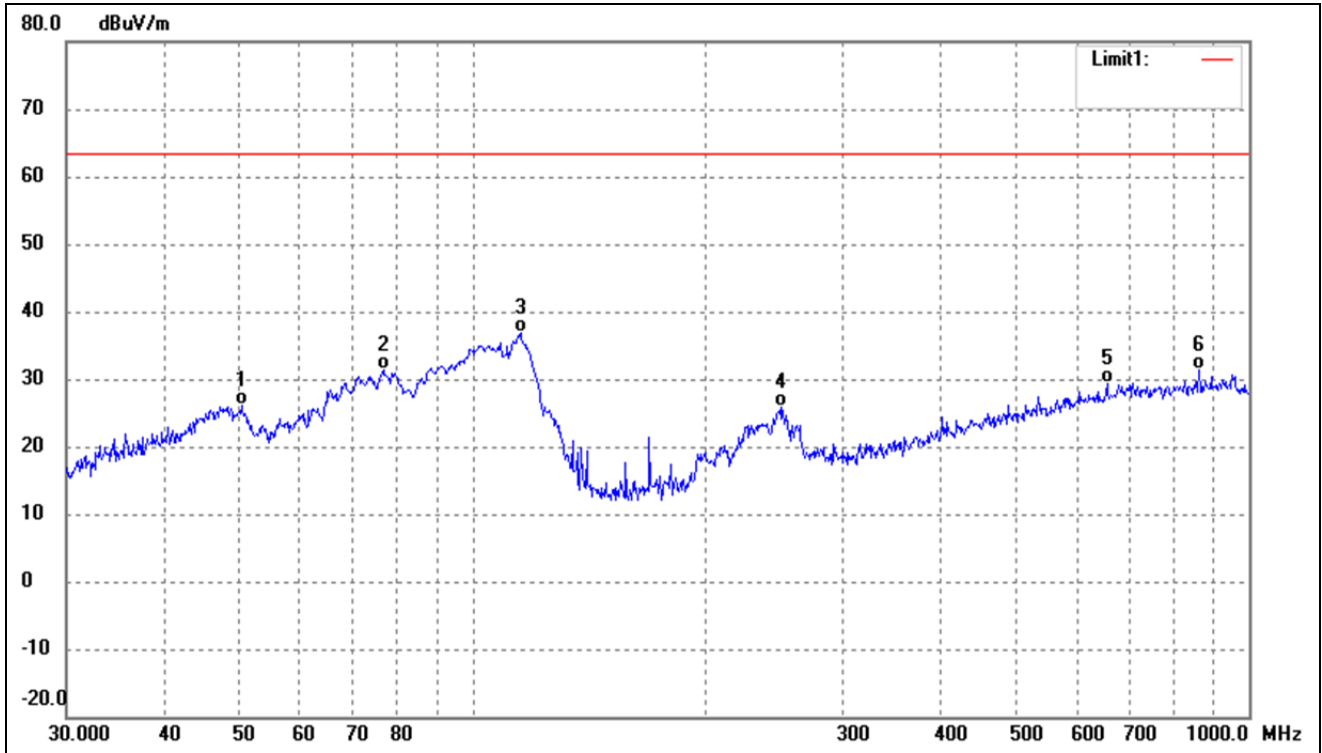

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 50.4089 | 33.06 | -7.02 | 26.04 | 63.50 | -37.46 | - | - | QP |
| 2 | 76.7808 | 41.87 | -10.56 | 31.31 | 63.50 | -32.19 | - | - | QP |
| 3 | 115.3205 | 46.06 | -9.26 | 36.80 | 63.50 | -26.70 | - | - | QP |
| 4 | 249.4250 | 34.17 | -8.32 | 25.85 | 63.50 | -37.65 | - | - | QP |
| 5 | 656.5300 | 28.37 | 0.98 | 29.35 | 63.50 | -34.15 | - | - | QP |
| 6 | 863.0562 | 28.91 | 2.48 | 31.39 | 63.50 | -32.11 | - | - | QP |

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******