

# FCC Report

**Applicant:** Zhejiang Feishen Vehicle Co., LTD.

**Address of Applicant:** North Lake Road Hardware Science And Technology  
In ZheJiang Province, China

**Equipment Under Test (EUT)**

Product Name: 2.4G Radio Control system

Model No.: GT0006

**FCC ID:** A6EFSCMYKQGT0006

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247:2015

**Date of sample receipt:** August 01, 2016

**Date of Test:** August 02-18, 2016

**Date of report issued:** August 22, 2016

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular logo for GTS (Global United Technology Services Co., Ltd.) is visible. The logo contains the text "GTS" in the center, "GLOBAL TESTING" below it, and "UNITED TECHNOLOGY SERVICES CO., LTD." around the perimeter. A handwritten signature in black ink is written over the logo.

Robinson Lo  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

| Version No. | Date            | Description |
|-------------|-----------------|-------------|
| 00          | August 22, 2016 | Original    |
|             |                 |             |
|             |                 |             |
|             |                 |             |
|             |                 |             |

Prepared By:

*Yang. Liu*

Date:

August 22, 2016

Project Engineer

Check By:

*Andy. Wu*

Date:

August 22, 2016

Reviewer

## 3 Contents

Page

|       |   |    |
|-------|---|----|
| 1     | COVER PAGE .....                                  | 1  |
| 2     | VERSION .....                                     | 2  |
| 3     | CONTENTS .....                                    | 3  |
| 4     | TEST SUMMARY .....                                | 4  |
| 4.1   | MEASUREMENT UNCERTAINTY .....                     | 4  |
| 5     | GENERAL INFORMATION .....                         | 5  |
| 5.1   | CLIENT INFORMATION .....                          | 5  |
| 5.2   | GENERAL DESCRIPTION OF EUT .....                  | 5  |
| 5.3   | TEST MODE .....                                   | 8  |
| 5.4   | TEST FACILITY.....                                | 8  |
| 5.5   | TEST LOCATION .....                               | 8  |
| 5.6   | OTHER INFORMATION REQUESTED BY THE CUSTOMER ..... | 8  |
| 5.7   | DESCRIPTION OF SUPPORT UNITS .....                | 8  |
| 5.8   | TEST INSTRUMENTS LIST.....                        | 9  |
| 6     | TEST RESULTS AND MEASUREMENT DATA.....            | 10 |
| 6.1   | ANTENNA REQUIREMENT.....                          | 10 |
| 6.2   | CONDUCTED PEAK OUTPUT POWER.....                  | 11 |
| 6.3   | 20dB EMISSION BANDWIDTH .....                     | 13 |
| 6.4   | CARRIER FREQUENCIES SEPARATION.....               | 15 |
| 6.5   | HOPPING CHANNEL NUMBER .....                      | 18 |
| 6.6   | DWELL TIME.....                                   | 20 |
| 6.7   | PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....     | 25 |
| 6.8   | BAND EDGE .....                                   | 26 |
| 6.8.1 | Conducted Emission Method.....                    | 26 |
| 6.8.2 | Radiated Emission Method.....                     | 28 |
| 6.9   | SPURIOUS EMISSION.....                            | 30 |
| 6.9.1 | Conducted Emission Method.....                    | 30 |
| 6.9.2 | Radiated Emission Method.....                     | 32 |
| 7     | TEST SETUP PHOTO .....                            | 41 |
| 8     | EUT CONSTRUCTIONAL DETAILS .....                  | 44 |

## 4 Test Summary

| Test Item                               | Section           | Result |
|---|-------------------|--------|
| Antenna Requirement                     | 15.203/15.247 (c) | Pass   |
| AC Power Line Conducted Emission        | 15.207            | N/A    |
| Conducted Peak Output Power             | 15.247 (b)(1)     | Pass   |
| 20dB Occupied Bandwidth                 | 15.247 (a)(1)     | Pass   |
| Carrier Frequencies Separation          | 15.247 (a)(1)     | Pass   |
| Hopping Channel Number                  | 15.247 (a)(1)     | Pass   |
| Dwell Time                              | 15.247 (a)(1)     | Pass   |
| Pseudorandom Frequency Hopping Sequence | 15.247(a)(1)      | Pass   |
| Radiated Emission                       | 15.205/15.209     | Pass   |
| Band Edge                               | 15.247(d)         | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.10:2013*

### 4.1 Measurement Uncertainty

| Test Item   | Frequency Range | Measurement Uncertainty | Notes |
|---|-----------------|-------------------------|-------|
| Radiated Emission   | 9kHz ~ 30MHz    | $\pm 4.34\text{dB}$     | (1)   |
| Radiated Emission   | 30MHz ~ 1000MHz | $\pm 4.24\text{dB}$     | (1)   |
| Radiated Emission   | 1GHz ~ 26.5GHz  | $\pm 4.68\text{dB}$     | (1)   |
| AC Power Line Conducted Emission  | 0.15MHz ~ 30MHz | $\pm 3.45\text{dB}$     | (1)   |
| Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%. |                 |                         |       |

## 5 General Information

### 5.1 Client Information

|                                  |  |
|----------------------------------|--|
| Applicant:                       | Zhejiang Feishen Vehicle Co., LTD.   |
| Address of Applicant:            | North Lake Road Hardware Science And Technology In Zhejiang Province, China                |
| Manufacturer/Factory:            | FLYSKY RC MODEL TECHNOLOGY CO., LTD  |
| Address of Manufacturer/Factory: | West building3, Huangjiangyuan Ind, Park QIAOLI North Gate Changping Town, Dongguan, China |

### 5.2 General Description of EUT

|                        |                             |
|------------------------|-----------------------------|
| Product Name:          | 2.4G Radio Control system   |
| Model No.:             | GT0006                      |
| Operation Frequency:   | 2405.5MHz~2475.0MHz         |
| Channel numbers:       | 140                         |
| Modulation technology: | GFSK                        |
| Antenna Type:          | Integral Antenna            |
| Antenna gain:          | 2dBi                        |
| Power supply:          | DC 6.0V (4 * 1.5V size"AA") |

Remark: The system works in the frequency range of 2405.5MHz to 2475MHz. This band has been divided to 140 independent channels. Each radio system uses 16 different channels, the minimum channel separation is  $\geq 1$ MHz. By using various switch-on times, hopping scheme and channel frequencies, the system can guarantee a jamming free radio transmission. The channel list is below.

| Operation Frequency each of channel |                 |         |                 |         |                 |         |                 |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1                                   | 2405.50         | 36      | 2423.00         | 71      | 2440.50         | 106     | 2458.00         |
| 2                                   | 2406.00         | 37      | 2423.50         | 72      | 2441.00         | 107     | 2458.50         |
| 3                                   | 2406.50         | 38      | 2424.00         | 73      | 2441.50         | 108     | 2459.00         |
| 4                                   | 2407.00         | 39      | 2424.50         | 74      | 2442.00         | 109     | 2459.50         |
| 5                                   | 2407.50         | 40      | 2425.00         | 75      | 2442.50         | 110     | 2460.00         |
| 6                                   | 2408.00         | 41      | 2425.50         | 76      | 2443.00         | 111     | 2460.50         |
| 7                                   | 2408.50         | 42      | 2426.00         | 77      | 2443.50         | 112     | 2461.00         |
| 8                                   | 2409.00         | 43      | 2426.50         | 78      | 2444.00         | 113     | 2461.50         |
| 9                                   | 2409.50         | 44      | 2427.00         | 79      | 2444.50         | 114     | 2462.00         |
| 10                                  | 2410.00         | 45      | 2427.50         | 80      | 2445.00         | 115     | 2462.50         |
| 11                                  | 2410.50         | 46      | 2428.00         | 81      | 2445.50         | 116     | 2463.00         |
| 12                                  | 2411.00         | 47      | 2428.50         | 82      | 2446.00         | 117     | 2463.50         |
| 13                                  | 2411.50         | 48      | 2429.00         | 83      | 2446.50         | 118     | 2464.00         |
| 14                                  | 2412.00         | 49      | 2429.50         | 84      | 2447.00         | 119     | 2464.50         |
| 15                                  | 2412.50         | 50      | 2430.00         | 85      | 2447.50         | 120     | 2465.00         |
| 16                                  | 2413.00         | 51      | 2430.50         | 86      | 2448.00         | 121     | 2465.50         |
| 17                                  | 2413.50         | 52      | 2431.00         | 87      | 2448.50         | 122     | 2466.00         |
| 18                                  | 2414.00         | 53      | 2431.50         | 88      | 2449.00         | 123     | 2466.50         |
| 19                                  | 2414.50         | 54      | 2432.00         | 89      | 2449.50         | 124     | 2467.00         |
| 20                                  | 2415.00         | 55      | 2432.50         | 90      | 2450.00         | 125     | 2467.50         |
| 21                                  | 2415.50         | 56      | 2433.00         | 91      | 2450.50         | 126     | 2468.00         |
| 22                                  | 2416.00         | 57      | 2433.50         | 92      | 2451.00         | 127     | 2468.50         |
| 23                                  | 2416.50         | 58      | 2434.00         | 93      | 2451.50         | 128     | 2469.00         |
| 24                                  | 2417.00         | 59      | 2434.50         | 94      | 2452.00         | 129     | 2469.50         |
| 25                                  | 2417.50         | 60      | 2435.00         | 95      | 2452.50         | 130     | 2470.00         |
| 26                                  | 2418.00         | 61      | 2435.50         | 96      | 2453.00         | 131     | 2470.50         |
| 27                                  | 2418.50         | 62      | 2436.00         | 97      | 2453.50         | 132     | 2471.00         |
| 28                                  | 2419.00         | 63      | 2436.50         | 98      | 2454.00         | 133     | 2471.50         |
| 29                                  | 2419.50         | 64      | 2437.00         | 99      | 2454.50         | 134     | 2472.00         |
| 30                                  | 2420.00         | 65      | 2437.50         | 100     | 2455.00         | 135     | 2472.50         |
| 31                                  | 2420.50         | 66      | 2438.00         | 101     | 2455.50         | 136     | 2473.00         |
| 32                                  | 2421.00         | 67      | 2438.50         | 102     | 2456.00         | 137     | 2473.50         |
| 33                                  | 2421.50         | 68      | 2439.00         | 103     | 2456.50         | 138     | 2474.00         |
| 34                                  | 2422.00         | 69      | 2439.50         | 104     | 2457.00         | 139     | 2474.50         |
| 35                                  | 2422.50         | 70      | 2440.00         | 105     | 2457.50         | 140     | 2475.00         |

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The lowest channel  | 2405.5MHz |
| The middle channel  | 2440.0MHz |
| The Highest channel | 2475.0MHz |

## 5.3 Test mode

|                   |                                    |
|-------------------|------------------------------------|
| Transmitting mode | Keep the EUT in transmitting mode. |
|-------------------|------------------------------------|

## 5.4 Test Facility

|  |
|--|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>• <b>FCC —Registration No.: 600491</b><br/>Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.</li><li>• <b>Industry Canada (IC) —Registration No.: 9079A-2</b><br/>The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.</li></ul> |
|--|

## 5.5 Test Location

|   |
|---|
| All other tests were performed at:  |
| Global United Technology Services Co., Ltd.<br>Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,<br>Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102<br>Tel: 0755-27798480<br>Fax: 0755-27798960 |

## 5.6 Other Information Requested by the Customer

|       |
|-------|
| None. |
|-------|

## 5.7 Description of Support Units

|       |
|-------|
| None. |
|-------|




## 5.8 Test Instruments list


| Radiated Emission: |                                  |                                |                             |               |                     |                         |
|--------------------|----------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                   | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber        | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | July. 03 2015       | July. 02 2020           |
| 2                  | Control Room                     | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | Spectrum Analyzer                | Agilent                        | E4440A                      | GTS536        | June. 29 2016       | June. 28 2017           |
| 4                  | EMI Test Receiver                | Rohde & Schwarz                | ESU26                       | GTS203        | June. 29 2016       | June. 28 2017           |
| 5                  | Loop Antenna                     | ZHINAN                         | ZN30900A                    | GTS534        | June. 29 2016       | June. 28 2017           |
| 6                  | BiConiLog Antenna                | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | June. 29 2016       | June. 28 2017           |
| 7                  | Double -ridged waveguide<br>horn | SCHWARZBECK<br>MESS-ELEKTRONIK | 9120D-829                   | GTS208        | June. 29 2016       | June. 28 2017           |
| 8                  | Horn Antenna                     | ETS-LINDGREN                   | 3160                        | GTS217        | June. 29 2016       | June. 28 2017           |
| 9                  | EMI Test Software                | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 10                 | Coaxial Cable                    | GTS                            | N/A                         | GTS213        | June. 29 2016       | June. 28 2017           |
| 11                 | Coaxial Cable                    | GTS                            | N/A                         | GTS211        | June. 29 2016       | June. 28 2017           |
| 12                 | Coaxial cable                    | GTS                            | N/A                         | GTS210        | June. 29 2016       | June. 28 2017           |
| 13                 | Coaxial Cable                    | GTS                            | N/A                         | GTS212        | June. 29 2016       | June. 28 2017           |
| 14                 | Amplifier(100kHz-3GHz)           | HP                             | 8347A                       | GTS204        | June. 29 2016       | June. 28 2017           |
| 15                 | Amplifier(2GHz-20GHz)            | HP                             | 8349B                       | GTS206        | June. 29 2016       | June. 28 2017           |
| 16                 | Amplifier (18-26GHz)             | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June. 29 2016       | June. 28 2017           |
| 17                 | Band filter                      | Amindeon                       | 82346                       | GTS219        | June. 29 2016       | June. 28 2017           |
| 18                 | Power Meter                      | Anritsu                        | ML2495A                     | GTS540        | June 29 2016        | June 28 2017            |
| 19                 | Power Sensor                     | Anritsu                        | MA2411B                     | GTS541        | June 29 2016        | June 28 2017            |

## 6 Test results and Measurement Data

### 6.1 Antenna requirement

|  |                                     |
|--|-------------------------------------|
| <b>Standard requirement:</b>   | FCC Part15 C Section 15.203 /247(c) |
| <p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> |                                     |
| <b>EUT Antenna:</b>  |                                     |
| <p><i>The antenna is integral antenna, the best case gain of the antenna is 2dBi</i></p>    |                                     |


## 6.2 Conducted Peak Output Power
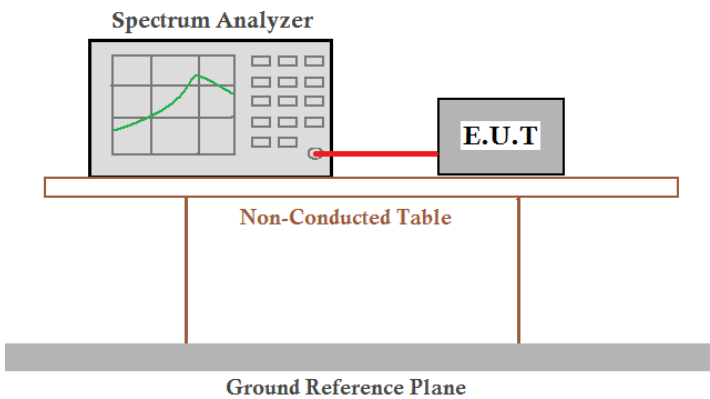
|                   |  |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(1)   |
| Test Method:      | DA 00-705, ANSI C63.10:2013  |
| Limit:            | 20.97dBm   |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details   |
| Test mode:        | Refer to section 5.3 for details   |
| Test results:     | Pass   |


### Measurement Data

| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
|--------------|-------------------------|-------------|--------|
| Lowest       | 8.88                    | 20.97       | Pass   |
| Middle       | 12.72                   |             |        |
| Highest      | 12.60                   |             |        |


Test plot as follows:

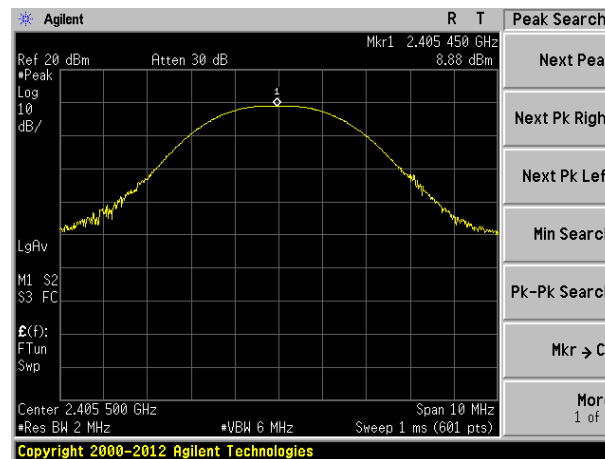

Lowest channel

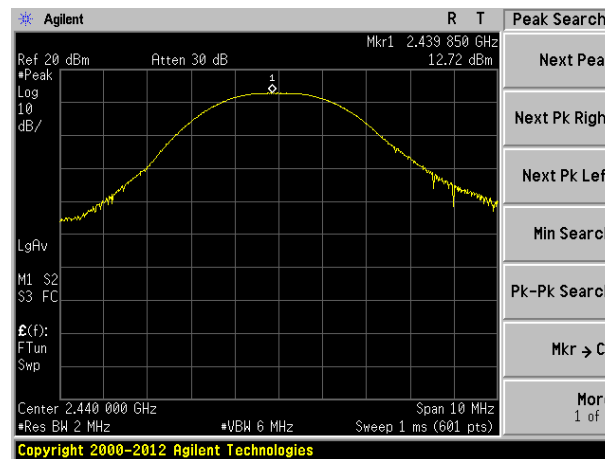


Middle channel

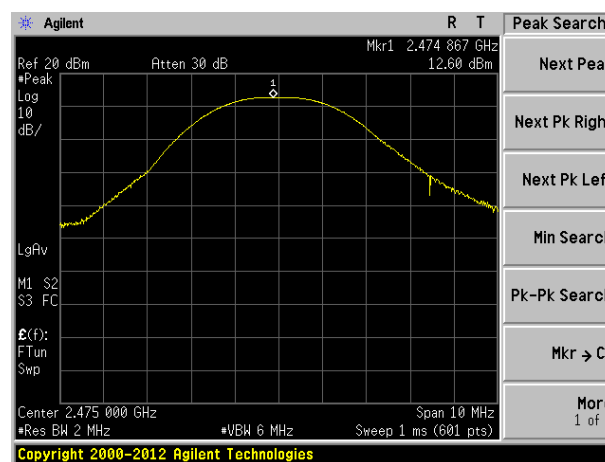

Highest channel


## 6.3 20dB Emission Bandwidth
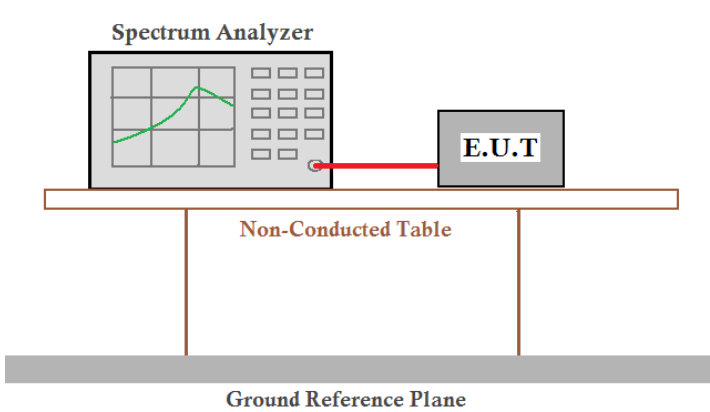
|                   |   |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)  |
| Test Method:      | DA 00-705, ANSI C63.10:2013   |
| Limit:            | N/A   |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details  |
| Test mode:        | Refer to section 5.3 for details  |
| Test results:     | Pass  |


## Measurement Data

| Test channel | 20dB Emission Bandwidth (MHz) | Result |
|--------------|-------------------------------|--------|
| Lowest       | 1.059                         | Pass   |
| Middle       | 1.065                         |        |
| Highest      | 1.061                         |        |


Test plot as follows:

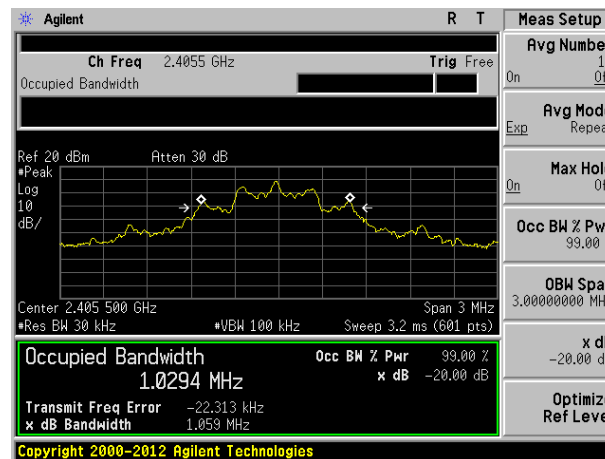

Lowest channel

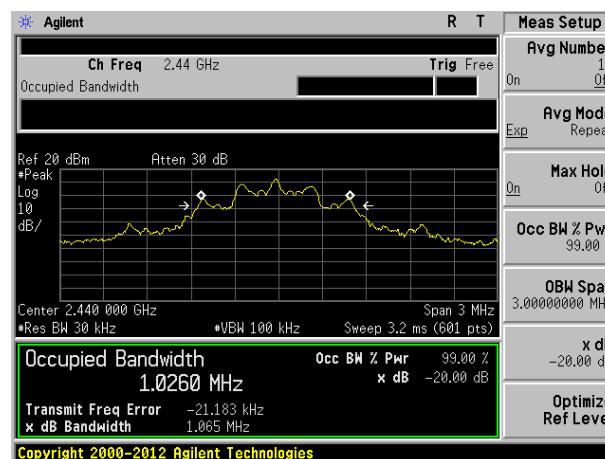


Middle channel

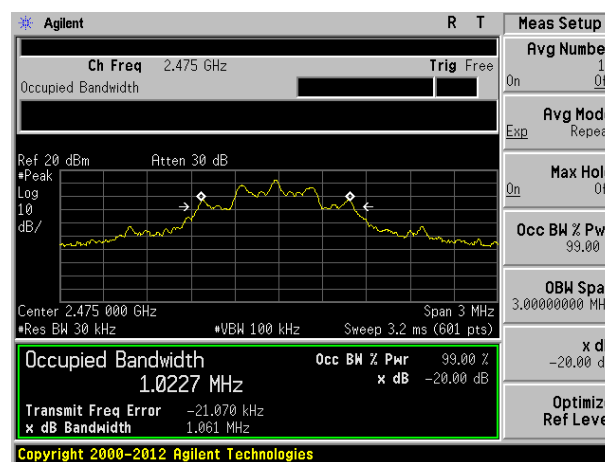

Highest channel

## 6.4 Carrier Frequencies Separation
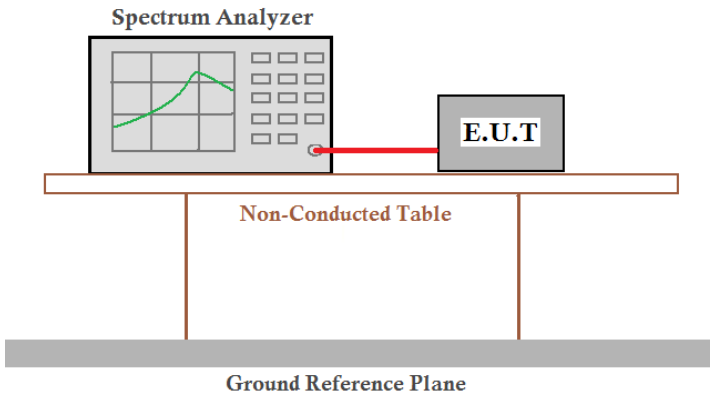
|                   |  |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)   |
| Test Method:      | DA 00-705, ANSI C63.10:2013  |
| Receiver setup:   | RBW=100KHz, VBW=300KHz, detector=Peak  |
| Limit:            | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)   |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details   |
| Test mode:        | Refer to section 5.3 for details   |
| Test results:     | Pass   |

**Measurement Data**


| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
|--------------|--------------------------------------|-------------|--------|
| Lowest       | 5017                                 | 710         | Pass   |
| Middle       | 2500                                 | 710         | Pass   |
| Highest      | 5017                                 | 710         | Pass   |

*Note: According to section 6.3*


| Mode | 20dB bandwidth (kHz)<br>(worse case) | Limit (kHz)<br>(Carrier Frequencies Separation) |
|------|--------------------------------------|---|
| GFSK | 1065                                 | 710   |




Test plot as follows:

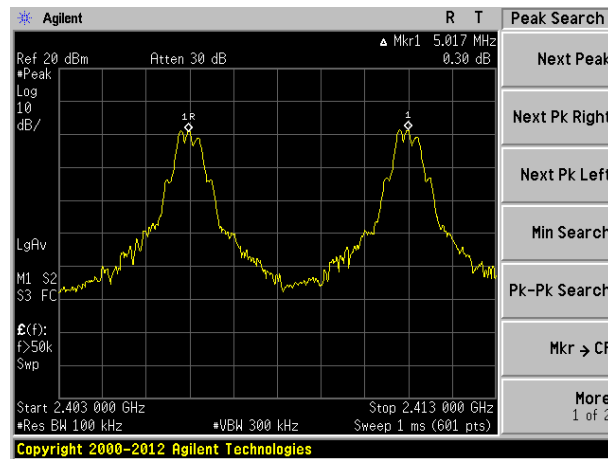

Lowest channel

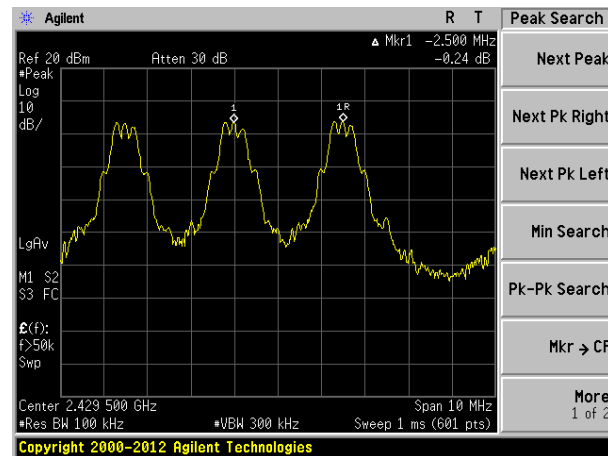


Middle channel

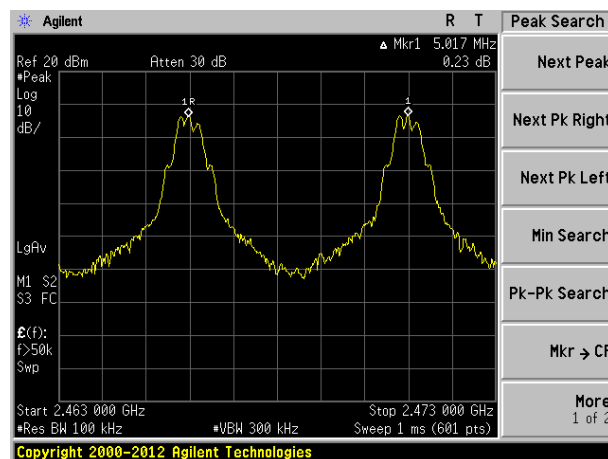


Highest channel

## 6.5 Hopping Channel Number

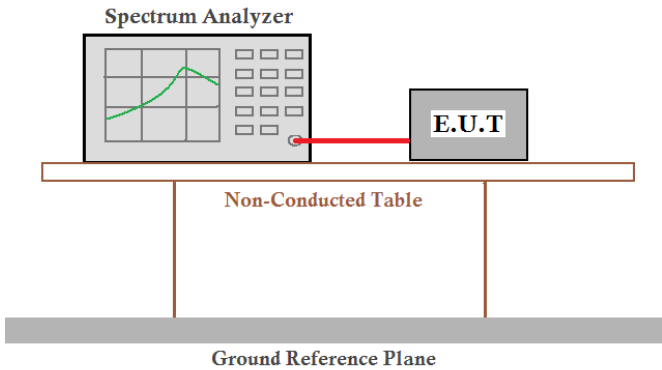
|                   |  |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)(iii)  |
| Test Method:      | DA 00-705, ANSI C63.10:2013  |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak   |
| Limit:            | 15 channels  |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details   |
| Test mode:        | Refer to section 5.3 for details   |
| Test results:     | Pass   |

## Measurement Data:

| Hopping channel numbers | Limit | Result |
|-------------------------|-------|--------|
| 16                      | 15    | Pass   |

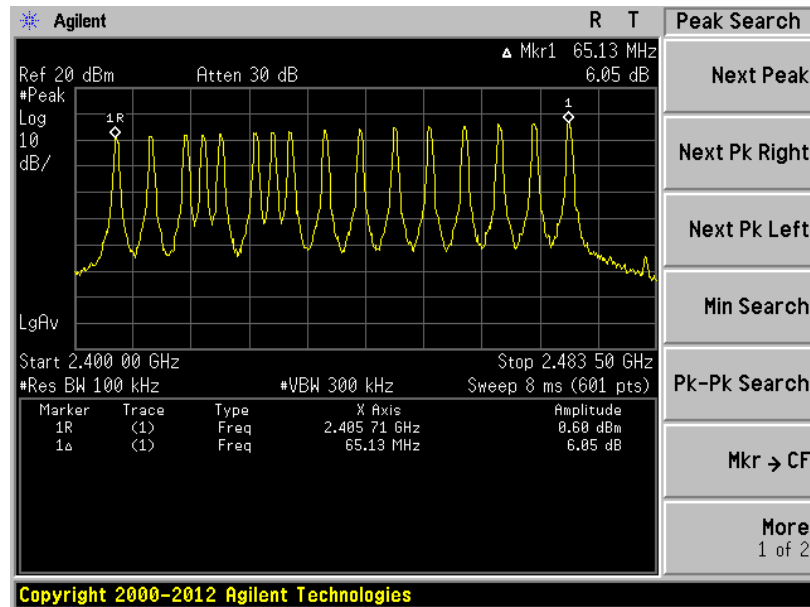

## 6.6 Dwell Time
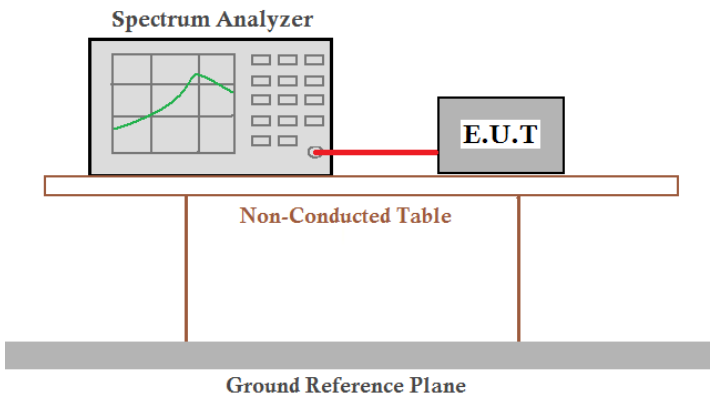
|                   |  |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)(iii)  |
| Test Method:      | DA 00-705, ANSI C63.10:2013  |
| Receiver setup:   | RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak  |
| Limit:            | 0.4 Second   |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details   |
| Test mode:        | Refer to section 5.3 for details   |
| Test results:     | Pass   |

**Measurement Data**

| Frequency | Ton (ms) | Dwell time(ms) | Limit(ms) | Result |
|-----------|----------|----------------|-----------|--------|
| 2.4055GHz | 0.555    | 149.78         | 400       | Pass   |
| 2.440GHz  | 0.560    | 150.53         | 400       | Pass   |
| 2.475GHz  | 0.560    | 150.53         | 400       | Pass   |

The formula as below:


2405.5MHz: Dwell time = Ton \* Ton times in 1s \* 0.4s \* channel numbers=0.555ms\*42\*0.4\*16=149.78ms

2440MHz: Dwell time = Ton \* Ton times in 1s \* 0.4s \* channel numbers=0.560ms\*42\*0.4\*16=150.53ms


2475MHz: Dwell time = Ton \* Ton times in 1s \* 0.4s \* channel numbers=0.560ms\*42\*0.4\*16=150.53ms

**Test plot as follows:**

|            |           |
|------------|-----------|
| Frequency: | 2405.5MHz |
|------------|-----------|

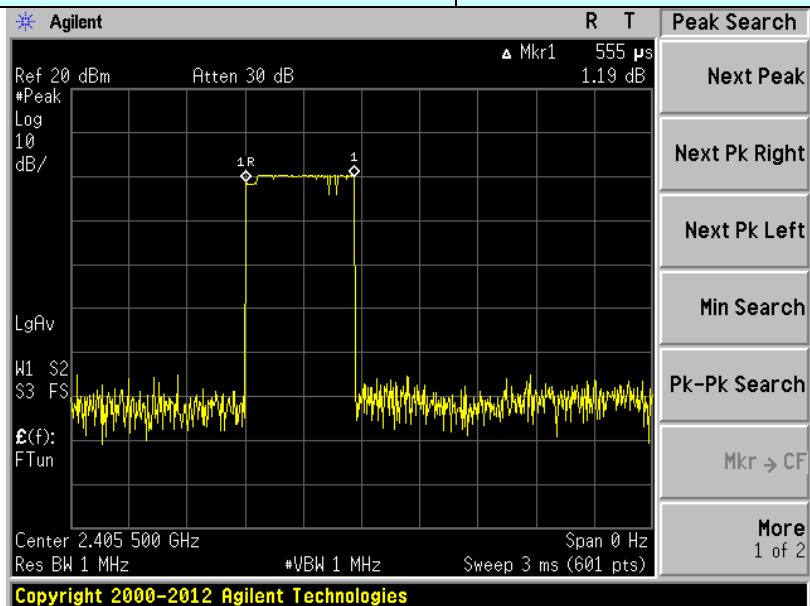


Ton

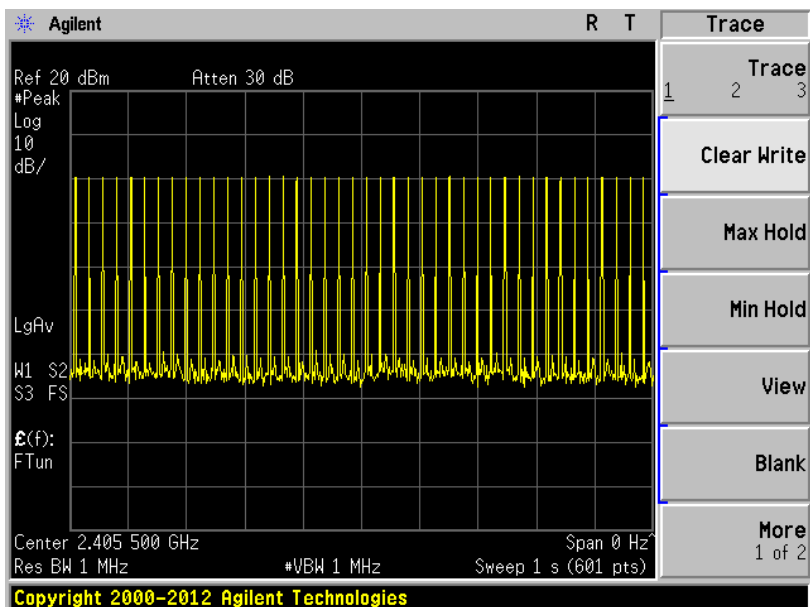


Ton times in 1s

|            |         |
|------------|---------|
| Frequency: | 2440MHz |
|------------|---------|

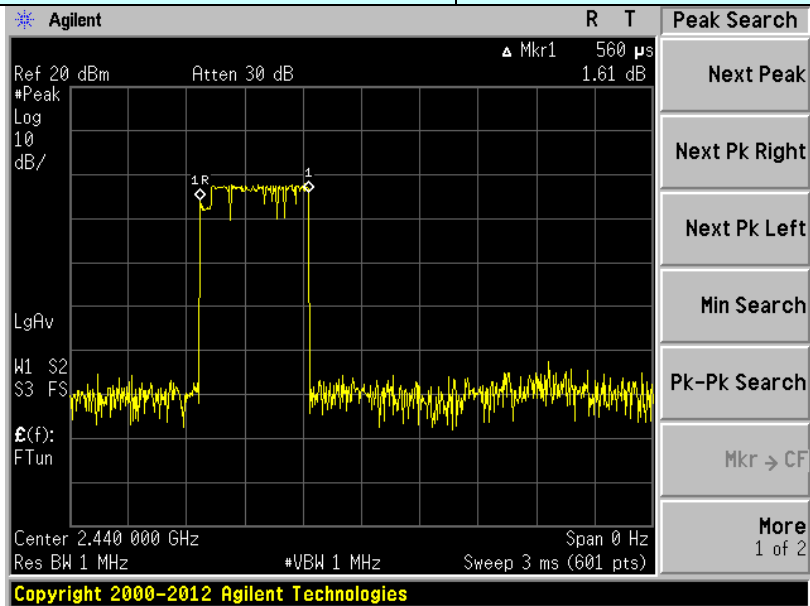


Ton

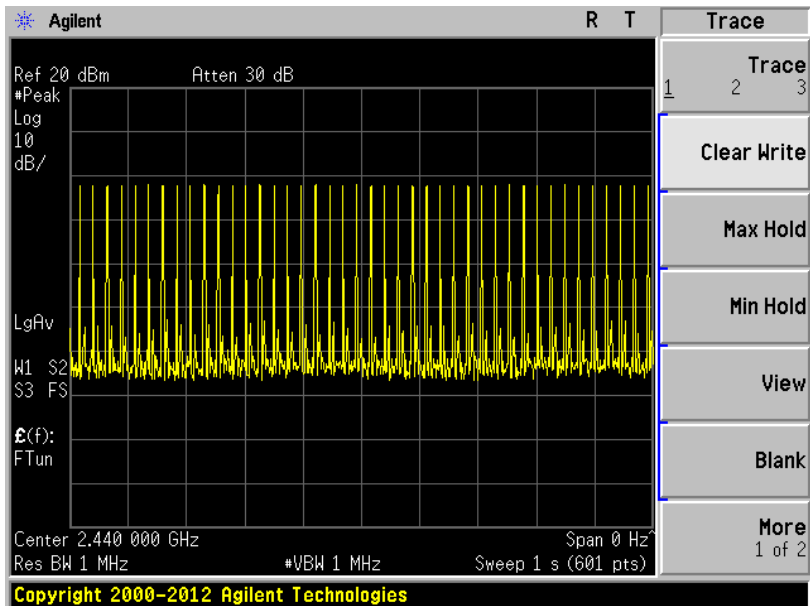


Ton times in 1s

|            |         |
|------------|---------|
| Frequency: | 2475MHz |
|------------|---------|

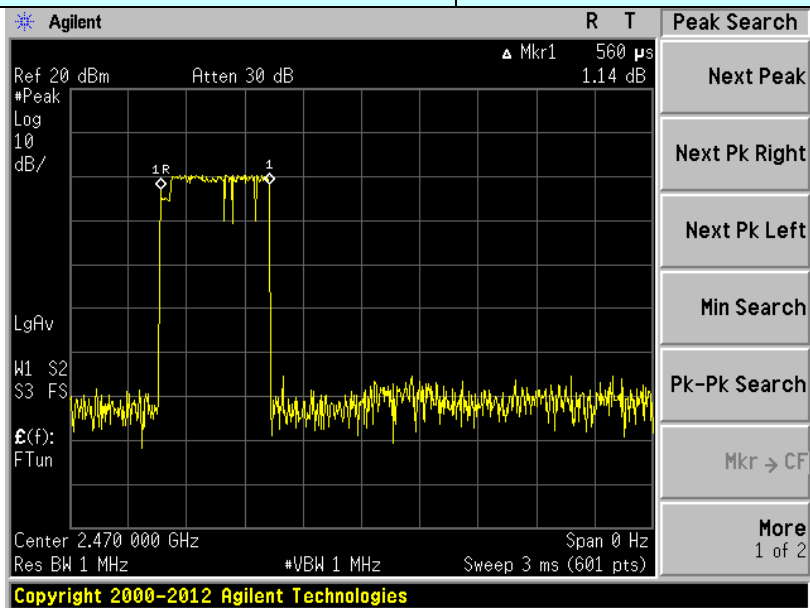

Ton

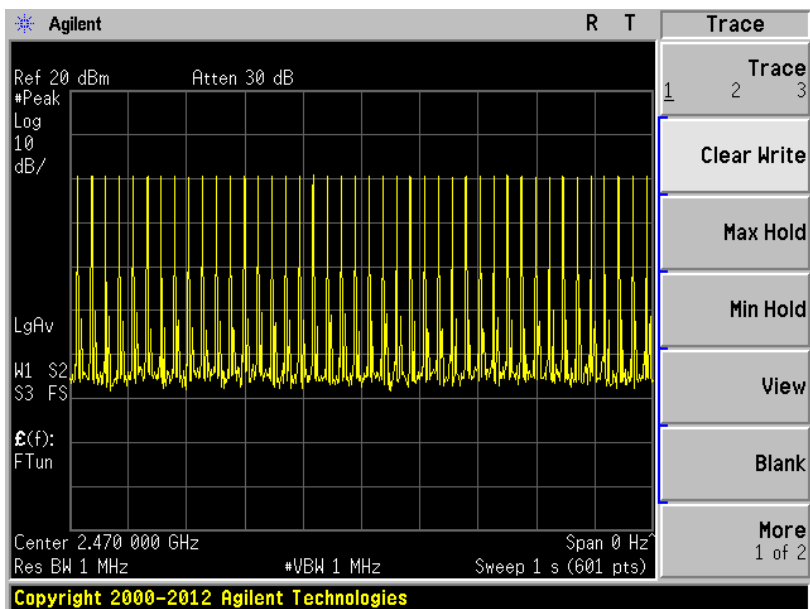

Ton times in 1s




## 6.7 Pseudorandom Frequency Hopping Sequence

| Test Requirement:  | FCC Part15 C Section 15.247 (a)(1) requirement: |
|--|---|
| <p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>   |   |
| EUT Pseudorandom Frequency Hopping Sequence  |   |
| <p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="242 1001 1287 1151" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p><i>Each frequency used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p> |   |


## 6.8 Band Edge

### 6.8.1 Conducted Emission Method

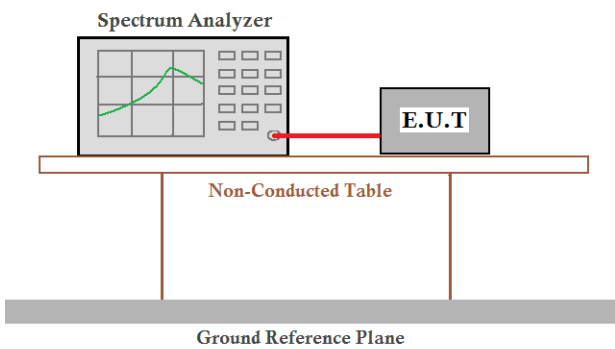
|                   |   |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (d)   |
| Test Method:      | DA 00-705, ANSI C63.10:2013   |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, Detector=Peak   |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>                             |
| Test Instruments: | Refer to section 5.8 for details  |
| Test mode:        | Refer to section 5.3 for details  |
| Test results:     | Pass  |

Test plot as follows:

| Test channel: | Lowest channel |
|---------------|----------------|
|---------------|----------------|

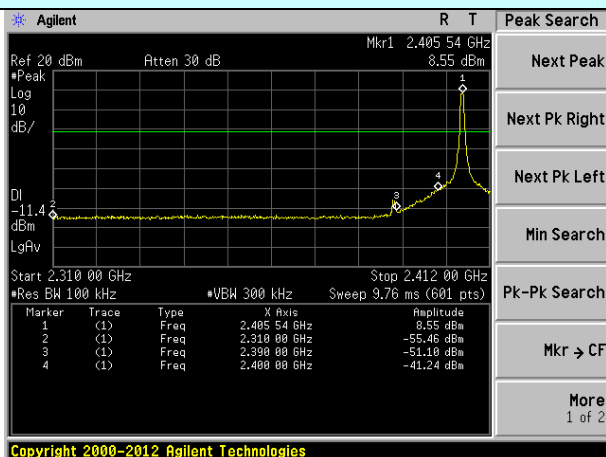


No-hopping mode

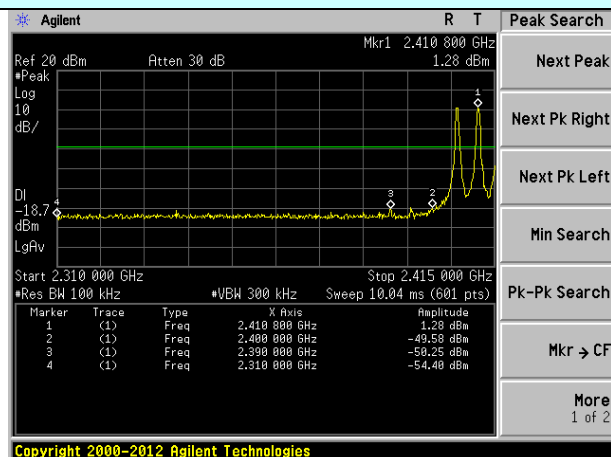


Hopping mode

| Test channel: | Highest channel |
|---------------|-----------------|
|---------------|-----------------|

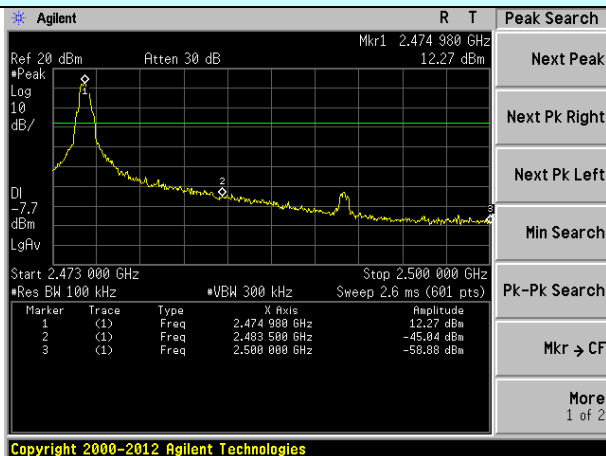


No-hopping mode

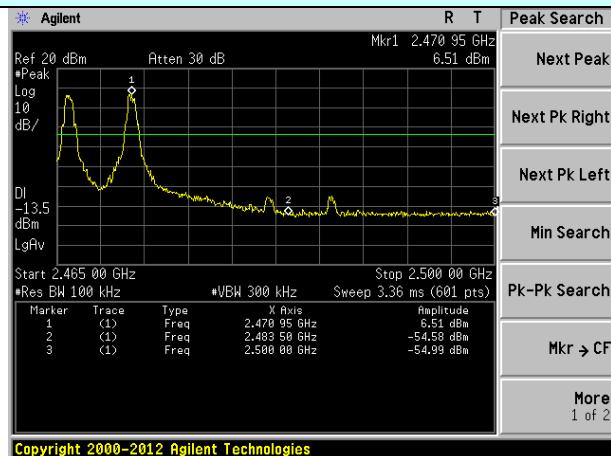

Hopping mode

## 6.8.2 Radiated Emission Method
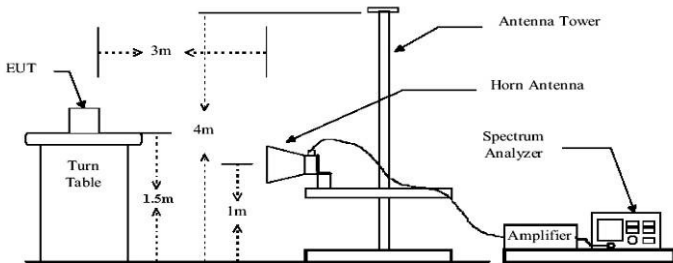
|                       |  |          |                    |      |               |
|-----------------------|--|----------|--------------------|------|---------------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205   |          |                    |      |               |
| Test Method:          | ANSI C63.10:2013   |          |                    |      |               |
| Test Frequency Range: | All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case   |          |                    |      |               |
| Test site:            | Measurement Distance: 3m   |          |                    |      |               |
| Receiver setup:       | Frequency  | Detector | RBW                | VBW  | Remark        |
|                       | Above 1GHz   | Peak     | 1MHz               | 3MHz | Peak Value    |
|                       |  | Peak     | 1MHz               | 10Hz | Average Value |
| Limit:                | Frequency  |          | Limit (dBuV/m @3m) |      | Remark        |
|                       | Above 1GHz   |          | 54.00              |      | Average Value |
|                       |  |          | 74.00              |      | Peak Value    |
| Test setup:           |   |          |                    |      |               |
| Test Procedure:       | <div>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</div> <div>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</div> <div>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</div> <div>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</div> <div>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</div> |          |                    |      |               |
| Test Instruments:     | Refer to section 5.8 for details   |          |                    |      |               |
| Test mode:            | Refer to section 5.3 for details   |          |                    |      |               |
| Test results:         | Pass   |          |                    |      |               |

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

|               |        |
|---------------|--------|
| Test channel: | Lowest |
|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 53.29             | 27.59                 | 5.38            | 30.18              | 56.08          | 74.00               | -17.92          | Vertical     |
| 2400.00         | 56.48             | 27.58                 | 5.39            | 30.18              | 59.27          | 74.00               | -14.73          | Vertical     |
| 2390.00         | 55.02             | 27.59                 | 5.38            | 30.18              | 57.81          | 74.00               | -16.19          | Horizontal   |
| 2400.00         | 61.94             | 27.58                 | 5.39            | 30.18              | 64.73          | 74.00               | -9.27           | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 40.08             | 27.59                 | 5.38            | 30.18              | 42.87          | 54.00               | -11.13          | Vertical     |
| 2400.00         | 41.82             | 27.58                 | 5.39            | 30.18              | 44.61          | 54.00               | -9.39           | Vertical     |
| 2390.00         | 41.81             | 27.59                 | 5.38            | 30.18              | 44.60          | 54.00               | -9.40           | Horizontal   |
| 2400.00         | 45.13             | 27.58                 | 5.39            | 30.18              | 47.92          | 54.00               | -6.08           | Horizontal   |

|               |         |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 56.38             | 27.53                 | 5.47            | 29.93              | 59.45          | 74.00               | -14.55          | Vertical     |
| 2500.00         | 51.12             | 27.55                 | 5.49            | 29.93              | 54.23          | 74.00               | -19.77          | Vertical     |
| 2483.50         | 58.64             | 27.53                 | 5.47            | 29.93              | 61.71          | 74.00               | -12.29          | Horizontal   |
| 2500.00         | 51.29             | 27.55                 | 5.49            | 29.93              | 54.40          | 74.00               | -19.60          | Horizontal   |

**Average value:**


| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 41.57             | 27.53                 | 5.47            | 29.93              | 44.64          | 54.00               | -9.36           | Vertical     |
| 2500.00         | 39.27             | 27.55                 | 5.49            | 29.93              | 42.38          | 54.00               | -11.62          | Vertical     |
| 2483.50         | 43.21             | 27.53                 | 5.47            | 29.93              | 46.28          | 54.00               | -7.72           | Horizontal   |
| 2500.00         | 39.27             | 27.55                 | 5.49            | 29.93              | 42.38          | 54.00               | -11.62          | Horizontal   |


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


## 6.9 Spurious Emission

### 6.9.1 Conducted Emission Method

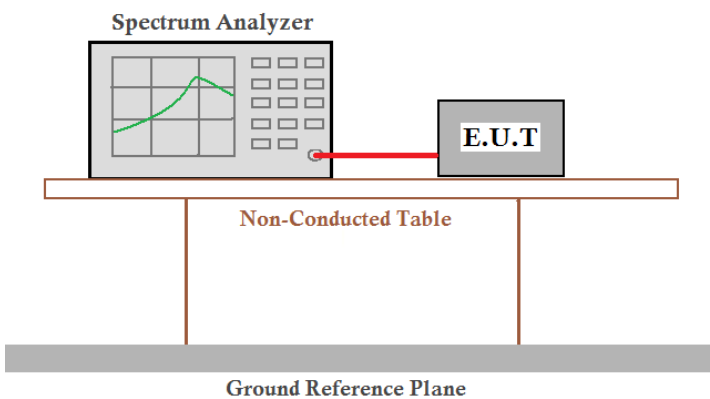
|                   |   |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (d)   |
| Test Method:      | ANSI C63.10:2013  |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup:       |  <p>The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>                                    |
| Test Instruments: | Refer to section 5.8 for details  |
| Test mode:        | Refer to section 5.3 for details  |
| Test results:     | Pass  |

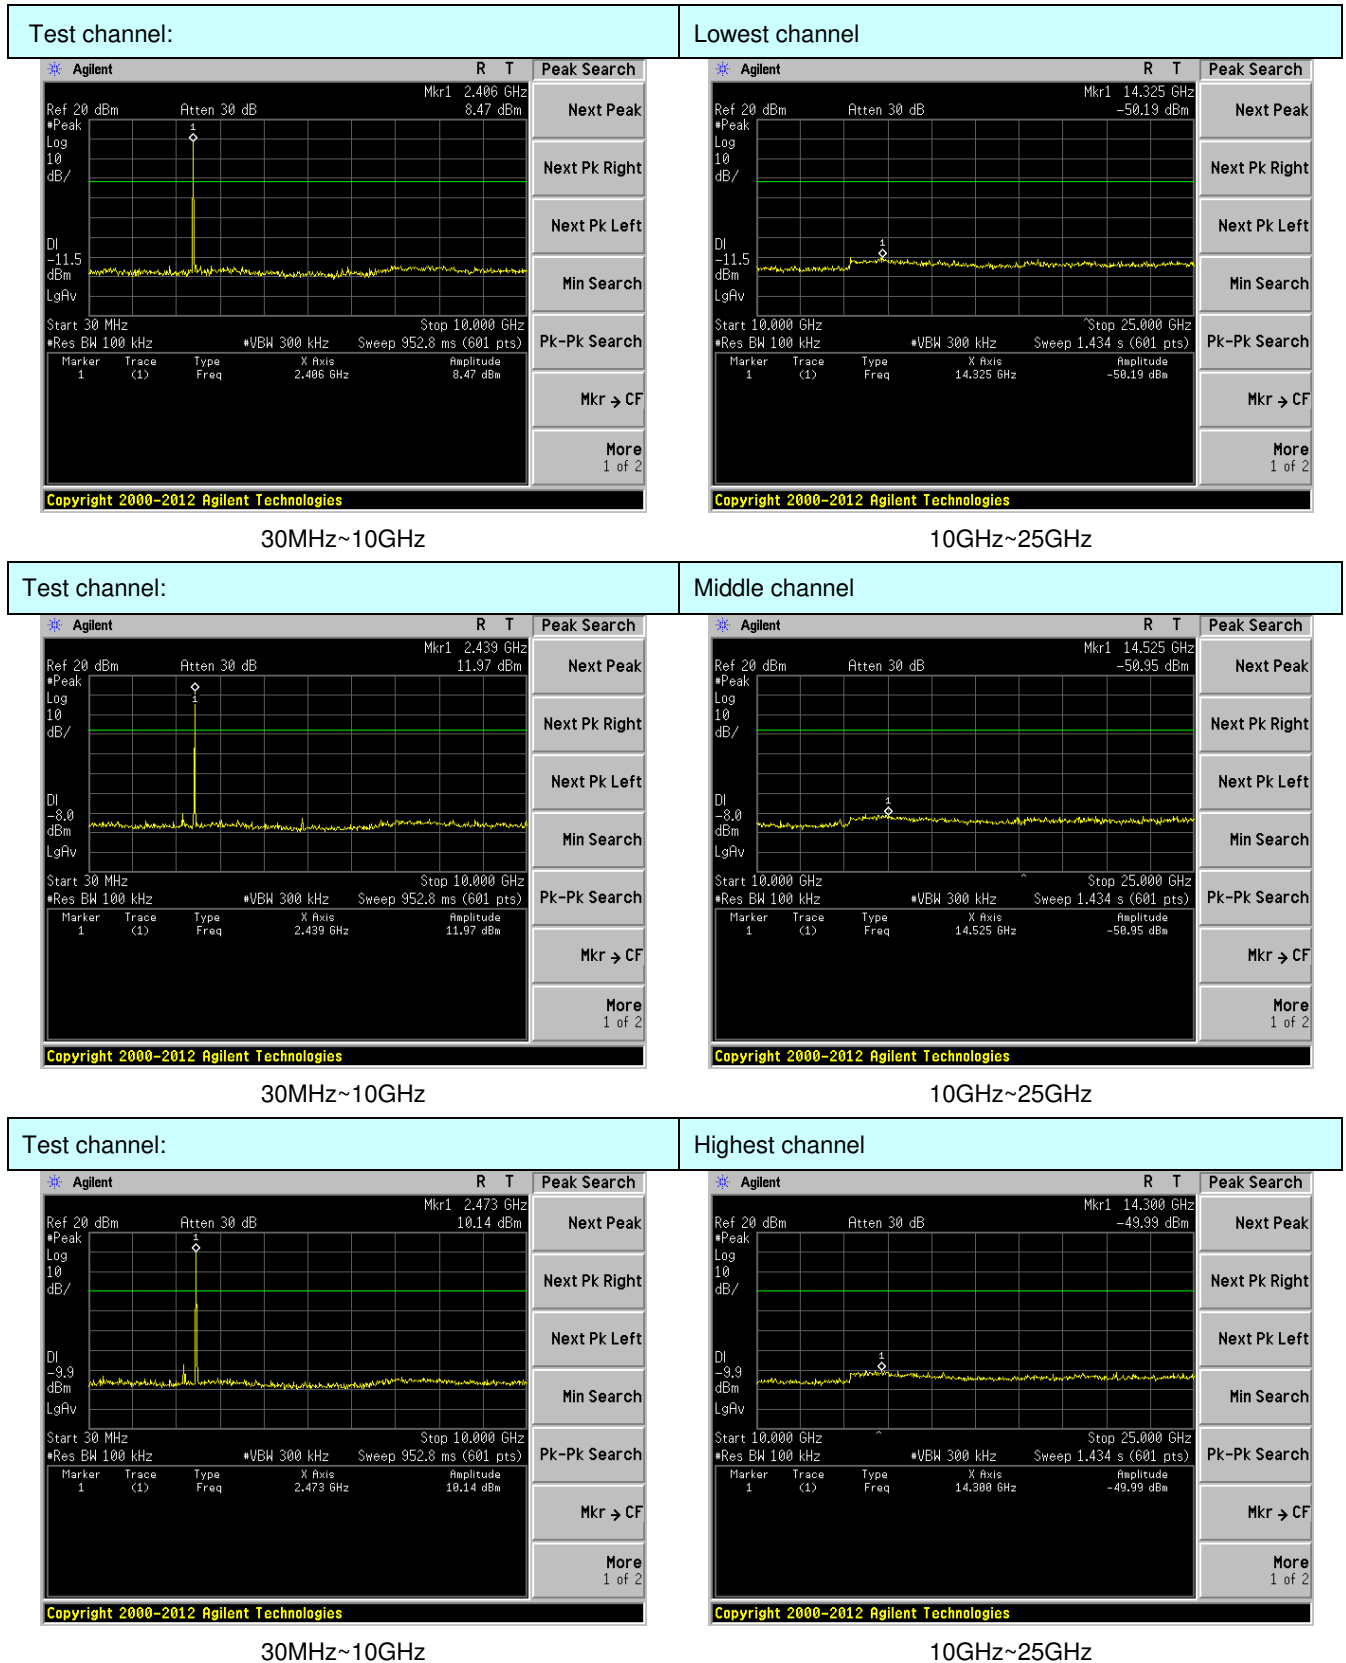

## 6.9.2 Radiated Emission Method
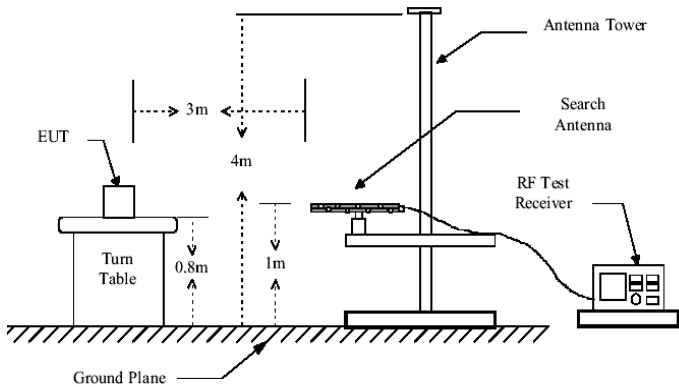
|                                |   |              |         |                      |            |
|--------------------------------|---|--------------|---------|----------------------|------------|
| Test Requirement:              | FCC Part15 C Section 15.209   |              |         |                      |            |
| Test Method:                   | ANSI C63.10:2013  |              |         |                      |            |
| Test Frequency Range:          | 9kHz to 25GHz   |              |         |                      |            |
| Test site:                     | Measurement Distance: 3m  |              |         |                      |            |
| Receiver setup:                | Frequency   | Detector     | RBW     | VBW                  | Value      |
|                                | 9KHz-150KHz   | Quasi-peak   | 200Hz   | 600Hz                | Quasi-peak |
|                                | 150KHz-30MHz  | Quasi-peak   | 9KHz    | 30KHz                | Quasi-peak |
|                                | 30MHz-1GHz  | Quasi-peak   | 100KHz  | 300KHz               | Quasi-peak |
|                                | Above 1GHz  | Peak         | 1MHz    | 3MHz                 | Peak       |
|                                |   | Peak         | 1MHz    | 10Hz                 | Average    |
| Limit:<br>(Spurious Emissions) | Frequency   | Limit (uV/m) | Value   | Measurement Distance |            |
|                                | 0.009MHz-0.490MHz   | 2400/F(KHz)  | QP      | 300m                 |            |
|                                | 0.490MHz-1.705MHz   | 24000/F(KHz) | QP      | 300m                 |            |
|                                | 1.705MHz-30MHz  | 30           | QP      | 30m                  |            |
|                                | 30MHz-88MHz   | 100          | QP      | 3m                   |            |
|                                | 88MHz-216MHz  | 150          | QP      |                      |            |
|                                | 216MHz-960MHz   | 200          | QP      |                      |            |
|                                | 960MHz-1GHz   | 500          | QP      |                      |            |
|                                | Above 1GHz  | 500          | Average |                      |            |
|                                |   | 5000         | Peak    |                      |            |
| Test setup:                    | Below 1GHz  |              |         |                      |            |
|                                | <div></div> |              |         |                      |            |
| Test setup:                    | Above 1GHz  |              |         |                      |            |
|                                |   |              |         |                      |            |

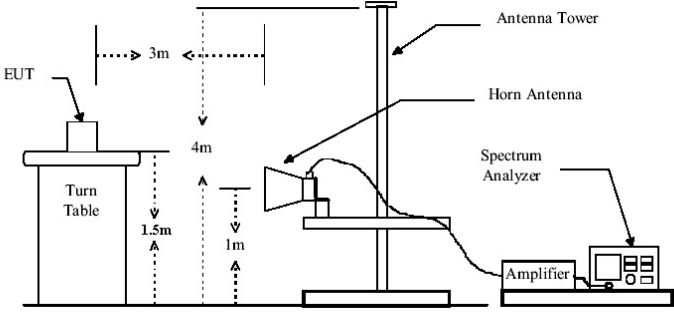


|                   |  |
|-------------------|--|
|                   |    |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details   |
| Test mode:        | Refer to section 5.3 for details   |
| Test results:     | Pass   |

## Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. The measured filed strength at frequencies below 30MHz are lower than the limit over 30dB. So the data isn't reported.


**Measurement data:**

■ 9KHz ~ 30MHz

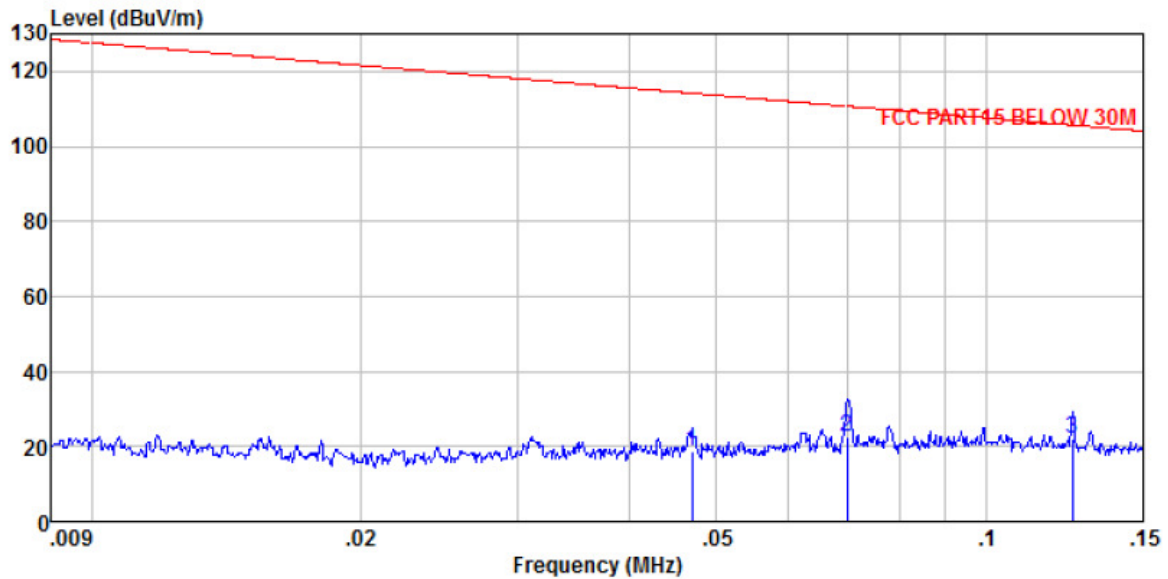

Site : 3m chamber  
 Condition : FCC PART15 BELOW 30M 3m  
 Job No. : 0402  
 Test Mode : Transmitting mode  
 Test Engineer: Sky

|   | Freq  | ReadAntenna | Cable  |      | Limit  | Over   |                |
|---|-------|-------------|--------|------|--------|--------|----------------|
|   |       | Level       | Factor | Loss | Line   | Limit  | Remark         |
|   | MHz   | dBuV        | dB/m   | dB   | dBuV/m | dBuV/m | dB             |
| 1 | 0.047 | -2.61       | 21.24  | 0.11 | 18.74  | 114.17 | -95.43 Average |
| 2 | 0.070 | -0.29       | 22.91  | 0.14 | 22.76  | 110.70 | -87.94 Average |
| 3 | 0.125 | -1.72       | 23.64  | 0.18 | 22.10  | 105.67 | -83.57 Average |

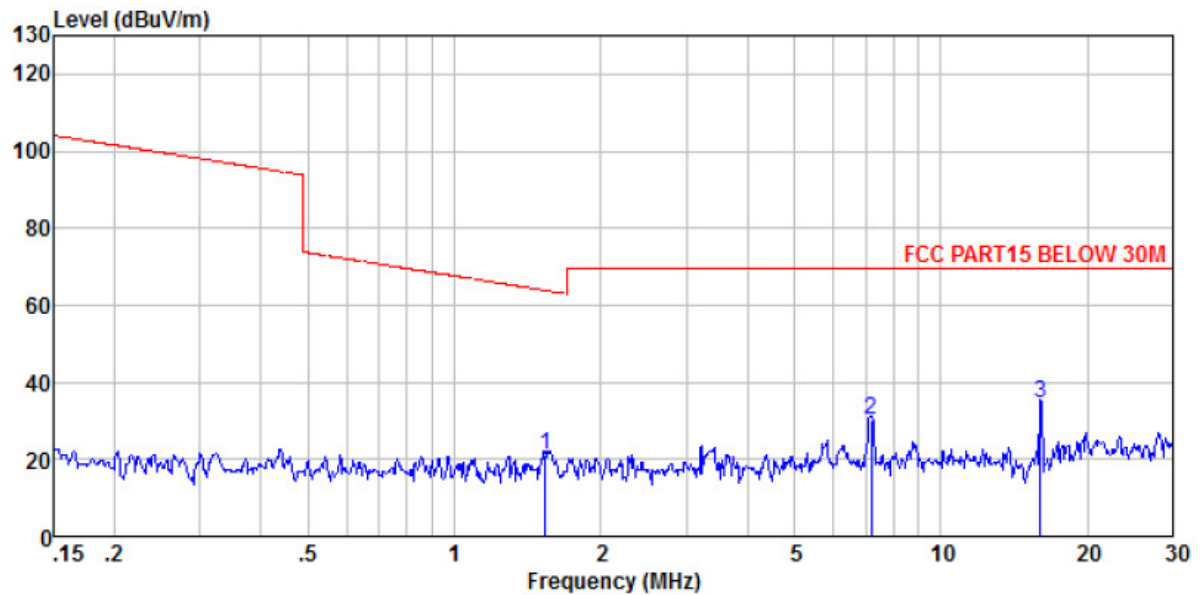


Site : 3m chamber  
 Condition : FCC PART15 BELOW 30M 3m  
 Job No. : 0402  
 Test Mode : Transmitting mode  
 Test Engineer: Sky

|       | Read   | Antenna | Cable |        | Limit  | Over  |           |
|-------|--------|---------|-------|--------|--------|-------|-----------|
| Freq  | Level  | Factor  | Loss  | Level  | Line   | Limit | Remark    |
| ----- | -----  | -----   | ----- | -----  | -----  | ----- | -----     |
| MHz   | dBuV   | dB/m    | dB    | dBuV/m | dBuV/m | dB    |           |
| 1     | 1.535  | 0.06    | 20.81 | 0.36   | 21.23  | 63.88 | -42.65 QP |
| 2     | 7.213  | 7.03    | 22.92 | 0.46   | 30.41  | 69.54 | -39.13 QP |
| 3     | 16.055 | 9.97    | 23.93 | 0.52   | 34.42  | 69.54 | -35.12 QP |

■ 30MHz ~ 1GHz


Vertical:

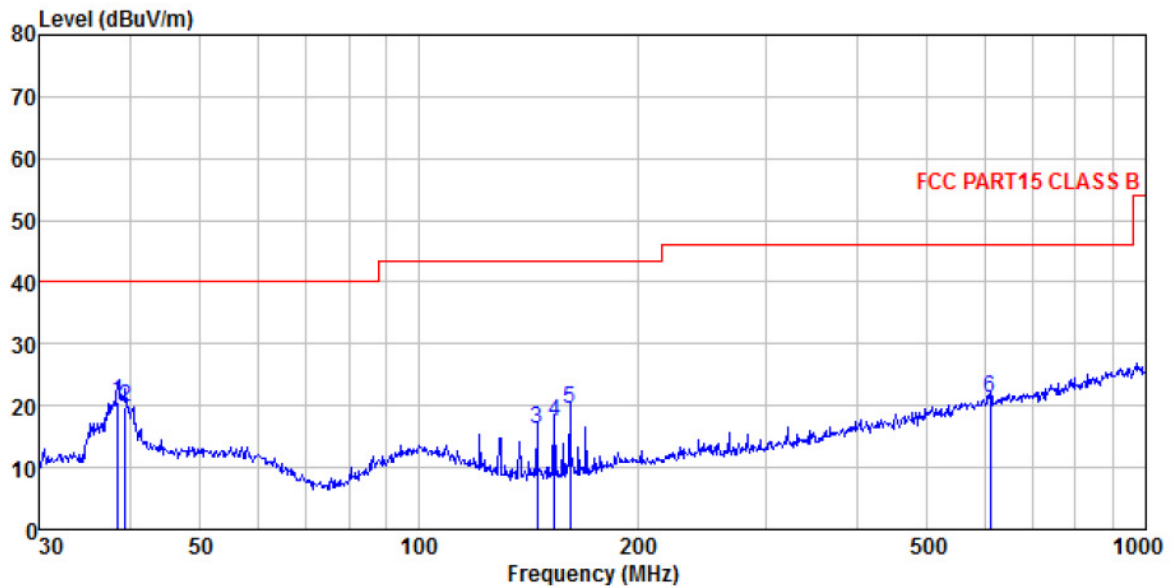

Site : 3m chamber  
 Condition : FCC PART15 CLASS B VULB9163-2013M VERTICAL  
 Job No. : 0402  
 Test Mode : Transmitting mode  
 Test Engineer: Sky

|   | Freq    | Read  | Antenna | Cable | Preamp | Level  | Limit  | Over   |        |
|---|---------|-------|---------|-------|--------|--------|--------|--------|--------|
|   | MHz     | Level | Factor  | Loss  | Factor | dBuV/m | dBuV/m | Limit  | Remark |
|   | MHz     | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |        |
| 1 | 38.481  | 34.78 | 15.20   | 0.65  | 30.05  | 20.58  | 40.00  | -19.42 | QP     |
| 2 | 39.437  | 33.64 | 15.44   | 0.65  | 30.05  | 19.68  | 40.00  | -20.32 | QP     |
| 3 | 145.351 | 33.96 | 10.23   | 1.54  | 29.43  | 16.30  | 43.50  | -27.20 | QP     |
| 4 | 153.739 | 34.86 | 10.42   | 1.59  | 29.39  | 17.48  | 43.50  | -26.02 | QP     |
| 5 | 161.474 | 36.56 | 10.72   | 1.64  | 29.35  | 19.57  | 43.50  | -23.93 | QP     |
| 6 | 609.922 | 26.35 | 20.48   | 3.76  | 29.29  | 21.30  | 46.00  | -24.70 | QP     |

**Horizontal:**

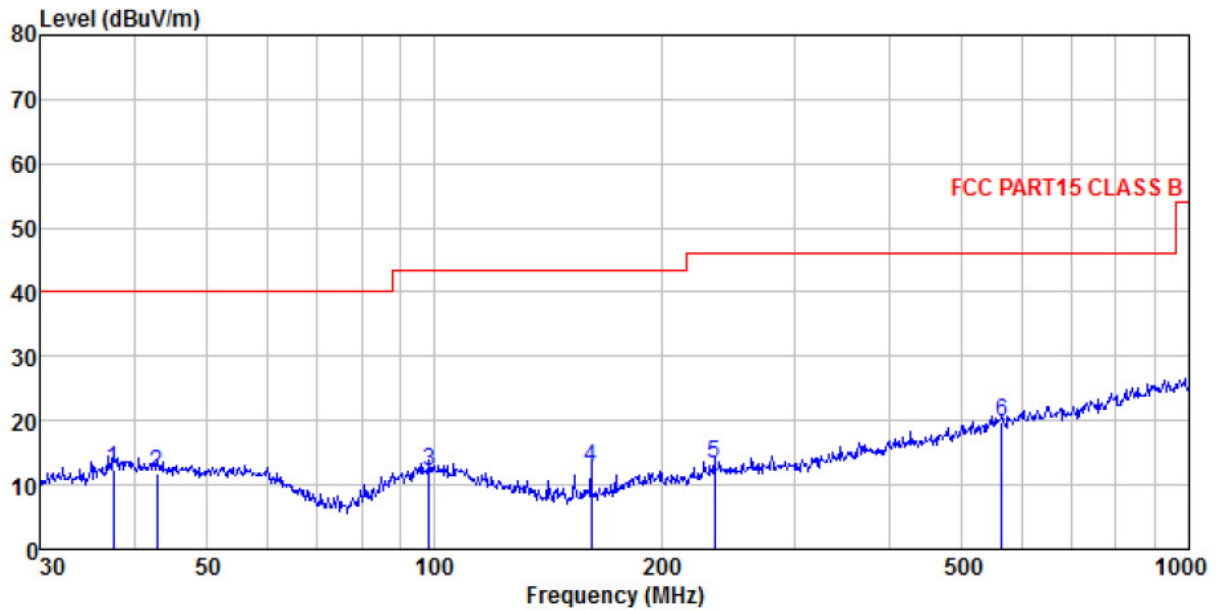

Site : 3m chamber  
 Condition : FCC PART15 CLASS B VULB9163-2013M HORIZONTAL  
 Job No. : 0402  
 Test Mode : Transmitting mode  
 Test Engineer: Sky

|   | Freq    | ReadAntenna | Cable Preamp |       | Limit  | Over   |                 |
|---|---------|-------------|--------------|-------|--------|--------|-----------------|
|   | Level   | Factor      | Loss Factor  | Level | Line   | Limit  | Remark          |
|   | MHz     | dBuV        | dB/m         | dB    | dBuV/m | dBuV/m | dB              |
| 1 | 37.548  | 26.99       | 14.96        | 0.64  | 30.06  | 12.53  | 40.00 -27.47 QP |
| 2 | 42.900  | 25.65       | 15.56        | 0.69  | 30.03  | 11.87  | 40.00 -28.13 QP |
| 3 | 98.487  | 25.44       | 15.06        | 1.18  | 29.71  | 11.97  | 43.50 -31.53 QP |
| 4 | 161.474 | 29.78       | 10.72        | 1.64  | 29.35  | 12.79  | 43.50 -30.71 QP |
| 5 | 234.991 | 26.83       | 13.83        | 2.05  | 29.52  | 13.19  | 46.00 -32.81 QP |
| 6 | 564.639 | 25.73       | 19.83        | 3.58  | 29.30  | 19.84  | 46.00 -26.16 QP |

## ■ Above 1GHz

|               |        |
|---------------|--------|
| Test channel: | Lowest |
|---------------|--------|

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4811.00         | 31.66             | 31.78                 | 8.60            | 32.09                    | 39.95          | 74.00               | -34.05          | Vertical     |
| 7216.50         | 28.01             | 36.15                 | 11.66           | 31.99                    | 43.83          | 74.00               | -30.17          | Vertical     |
| 9622.00         | 27.13             | 38.01                 | 14.14           | 31.60                    | 47.68          | 74.00               | -26.32          | Vertical     |
| 12027.50        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14433.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4811.00         | 32.08             | 31.78                 | 8.60            | 32.09                    | 40.37          | 74.00               | -33.63          | Horizontal   |
| 7216.50         | 28.09             | 36.15                 | 11.66           | 31.99                    | 43.91          | 74.00               | -30.09          | Horizontal   |
| 9622.00         | 26.51             | 38.01                 | 14.14           | 31.60                    | 47.06          | 74.00               | -26.94          | Horizontal   |
| 12027.50        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14433.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

### Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4811.00         | 20.84             | 31.78                 | 8.60            | 32.09                    | 29.13          | 54.00               | -24.87          | Vertical     |
| 7216.50         | 18.67             | 36.15                 | 11.66           | 31.99                    | 34.49          | 54.00               | -19.51          | Vertical     |
| 9622.00         | 17.29             | 38.01                 | 14.14           | 31.60                    | 37.84          | 54.00               | -16.16          | Vertical     |
| 12027.50        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14433.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4811.00         | 22.33             | 31.78                 | 8.60            | 32.09                    | 30.62          | 54.00               | -23.38          | Horizontal   |
| 7216.50         | 18.67             | 36.15                 | 11.66           | 31.99                    | 34.49          | 54.00               | -19.51          | Horizontal   |
| 9622.00         | 16.65             | 38.01                 | 14.14           | 31.60                    | 37.20          | 54.00               | -16.80          | Horizontal   |
| 12027.50        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14433.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

|               |        |
|---------------|--------|
| Test channel: | Middle |
|---------------|--------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4880.00         | 30.66             | 31.85                 | 8.66            | 32.12                    | 39.05          | 74.00               | -34.95          | Vertical     |
| 7320.00         | 28.45             | 36.37                 | 11.72           | 31.89                    | 44.65          | 74.00               | -29.35          | Vertical     |
| 9760.00         | 26.89             | 38.35                 | 14.25           | 31.59                    | 47.90          | 74.00               | -26.10          | Vertical     |
| 12200.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14640.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4880.00         | 31.62             | 31.85                 | 8.66            | 32.12                    | 40.01          | 74.00               | -33.99          | Horizontal   |
| 7320.00         | 28.73             | 36.37                 | 11.72           | 31.89                    | 44.93          | 74.00               | -29.07          | Horizontal   |
| 9760.00         | 28.40             | 38.35                 | 14.25           | 31.59                    | 49.41          | 74.00               | -24.59          | Horizontal   |
| 12200.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14640.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4880.00         | 20.84             | 31.85                 | 8.66            | 32.12                    | 29.23          | 54.00               | -24.77          | Vertical     |
| 7320.00         | 18.26             | 36.37                 | 11.72           | 31.89                    | 34.46          | 54.00               | -19.54          | Vertical     |
| 9760.00         | 16.82             | 38.35                 | 14.25           | 31.59                    | 37.83          | 54.00               | -16.17          | Vertical     |
| 12200.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14640.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4880.00         | 21.56             | 31.85                 | 8.66            | 32.12                    | 29.95          | 54.00               | -24.05          | Horizontal   |
| 7320.00         | 18.51             | 36.37                 | 11.72           | 31.89                    | 34.71          | 54.00               | -19.29          | Horizontal   |
| 9760.00         | 18.02             | 38.35                 | 14.25           | 31.59                    | 39.03          | 54.00               | -14.97          | Horizontal   |
| 12200.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14640.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

|               |         |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

## Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4950.00         | 32.91             | 31.91                 | 8.71            | 32.16                    | 41.37          | 74.00               | -32.63          | Vertical     |
| 7425.00         | 27.69             | 36.56                 | 11.79           | 31.80                    | 44.24          | 74.00               | -29.76          | Vertical     |
| 9900.00         | 27.16             | 38.81                 | 14.35           | 31.85                    | 48.47          | 74.00               | -25.53          | Vertical     |
| 12375.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14850.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4950.00         | 33.60             | 31.91                 | 8.71            | 32.16                    | 42.06          | 74.00               | -31.94          | Horizontal   |
| 7425.00         | 27.53             | 36.56                 | 11.79           | 31.80                    | 44.08          | 74.00               | -29.92          | Horizontal   |
| 9900.00         | 26.96             | 38.81                 | 14.35           | 31.85                    | 48.27          | 74.00               | -25.73          | Horizontal   |
| 12375.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14850.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

## Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4950.00         | 22.29             | 31.91                 | 8.71            | 32.16                    | 30.75          | 54.00               | -23.25          | Vertical     |
| 7425.00         | 17.22             | 36.56                 | 11.79           | 31.80                    | 33.77          | 54.00               | -20.23          | Vertical     |
| 9900.00         | 17.48             | 38.81                 | 14.35           | 31.85                    | 38.79          | 54.00               | -15.21          | Vertical     |
| 12375.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14850.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4950.00         | 23.31             | 31.91                 | 8.71            | 32.16                    | 31.77          | 54.00               | -22.23          | Horizontal   |
| 7425.00         | 17.56             | 36.56                 | 11.79           | 31.80                    | 34.11          | 54.00               | -19.89          | Horizontal   |
| 9900.00         | 16.81             | 38.81                 | 14.35           | 31.85                    | 38.12          | 54.00               | -15.88          | Horizontal   |
| 12375.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14850.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

## Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.




## 7 Test Setup Photo

Radiated Emission

SE Below 30MHz

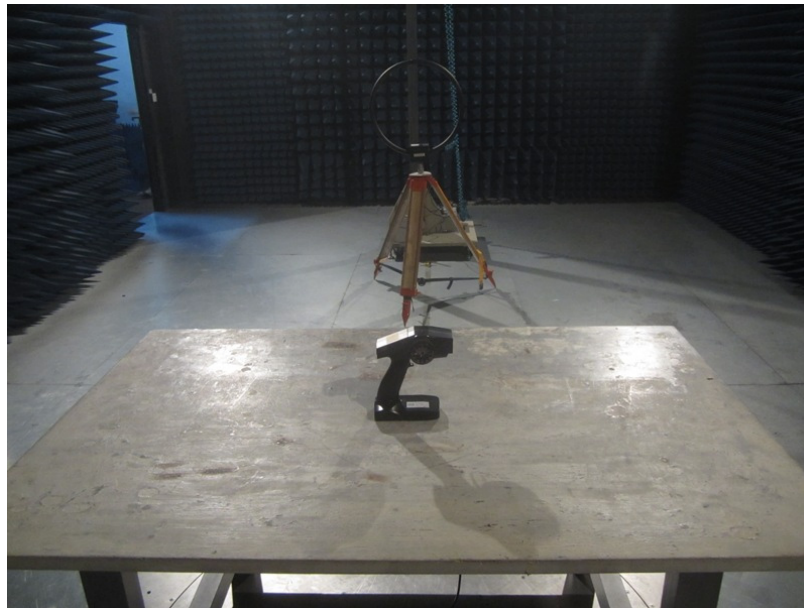


SE 30MHz-1GHz

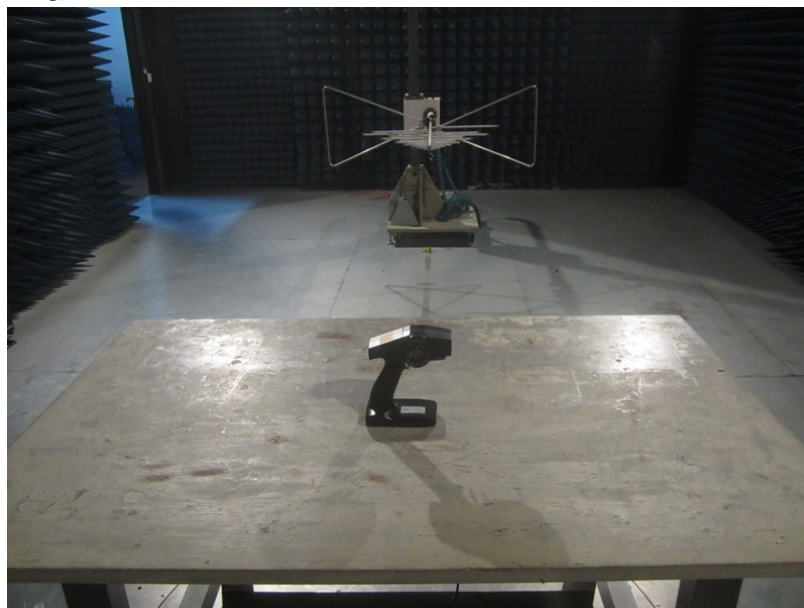

SE 1GHz-18GHz



SE 18GHz-25GHz

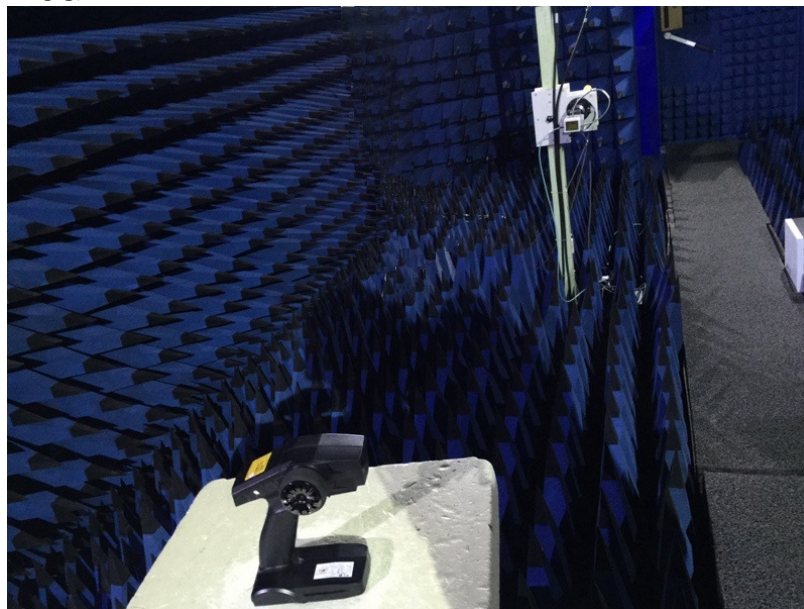






## 8 EUT Constructional Details






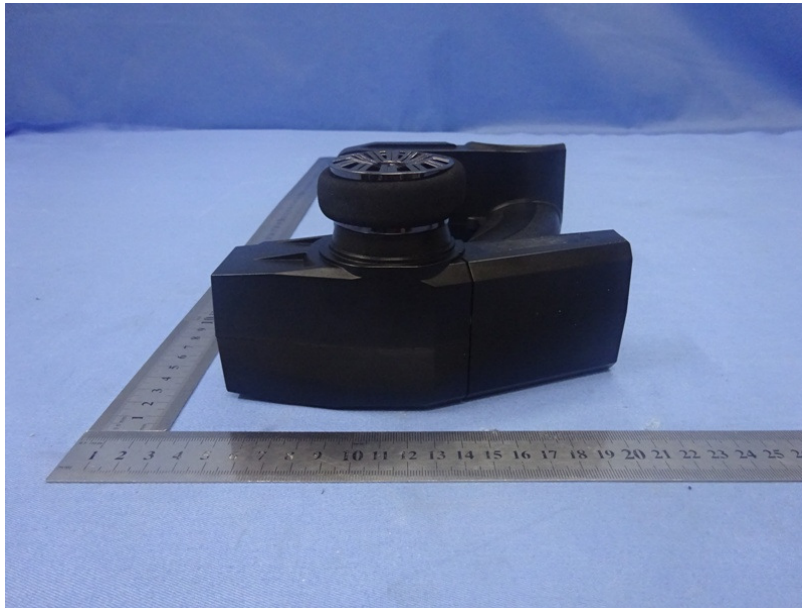













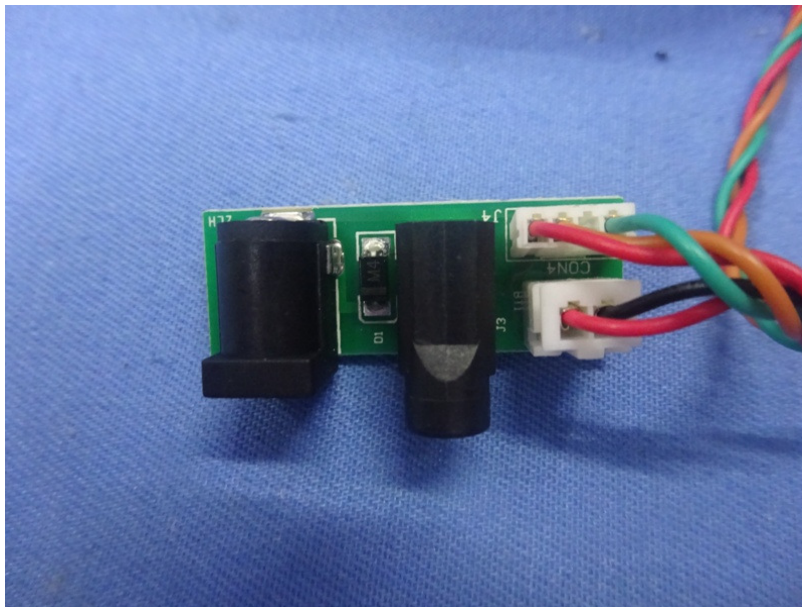
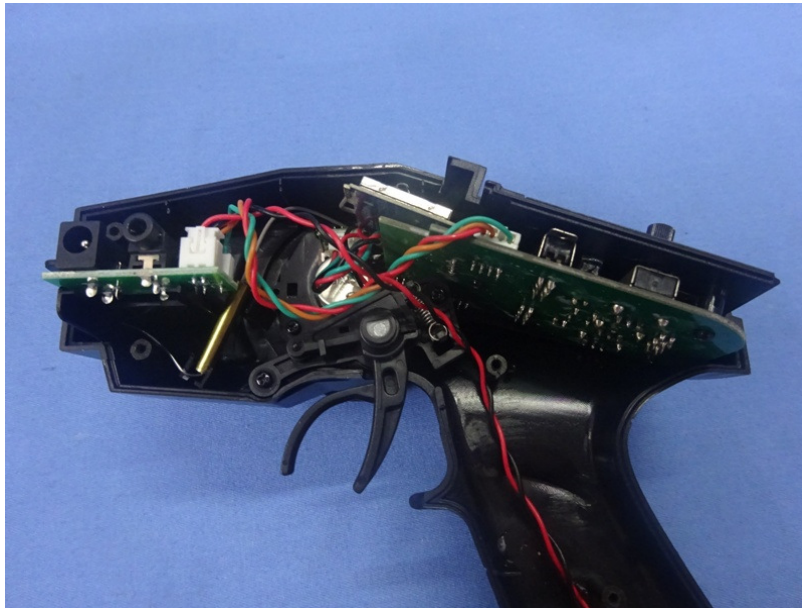


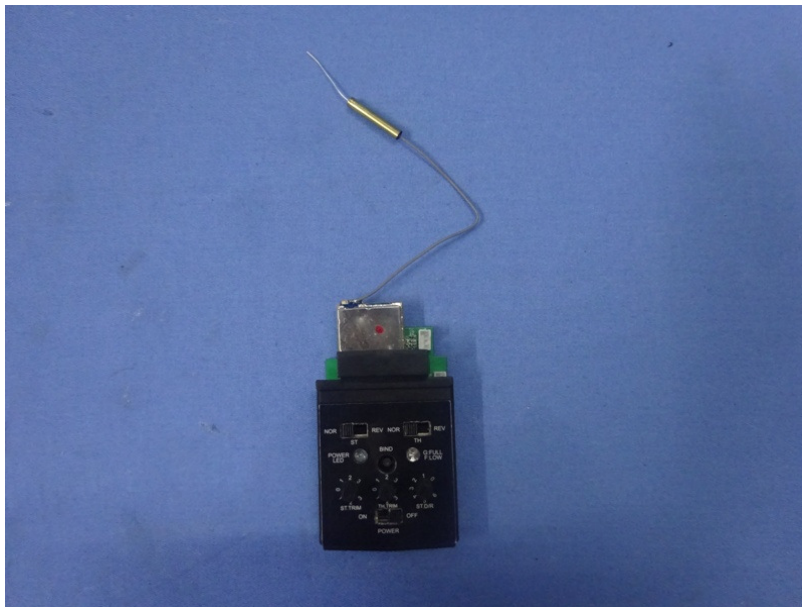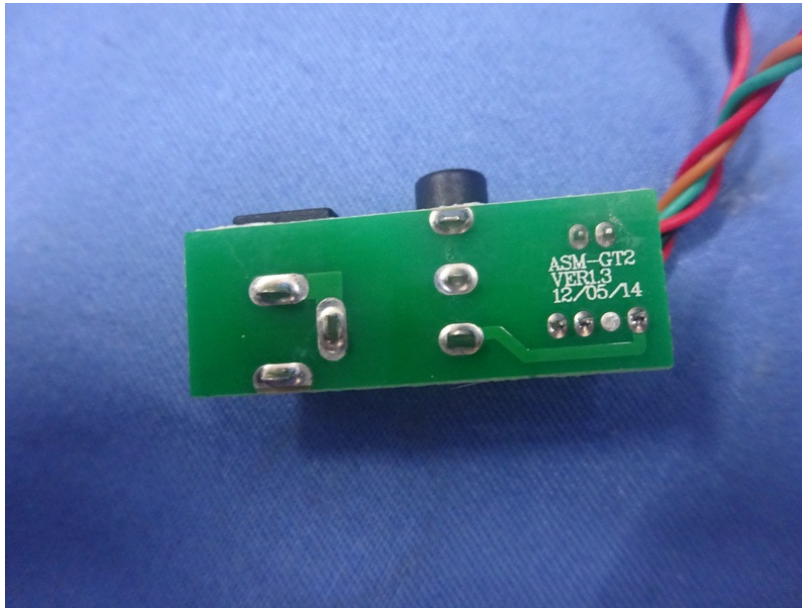

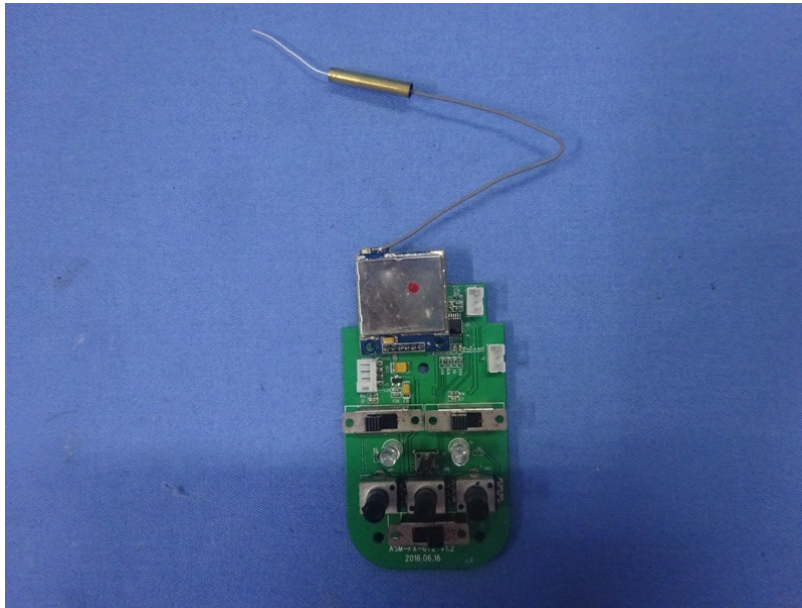





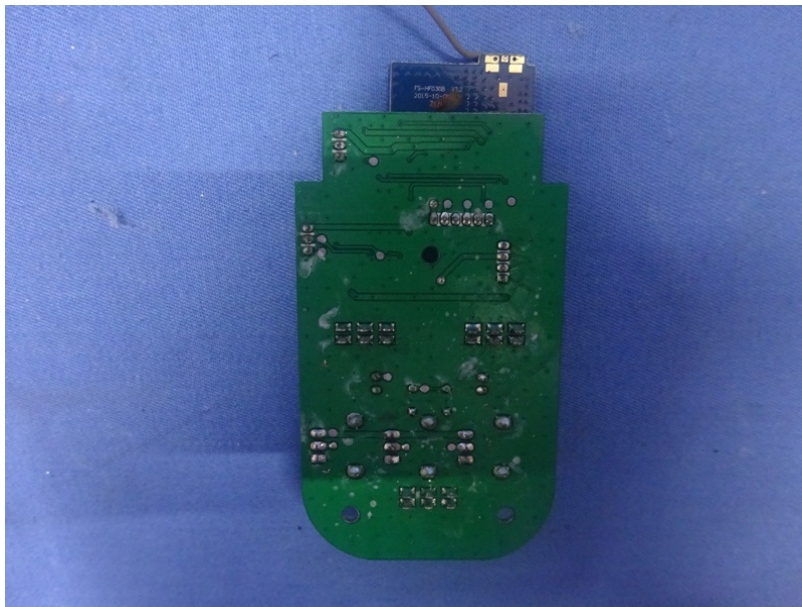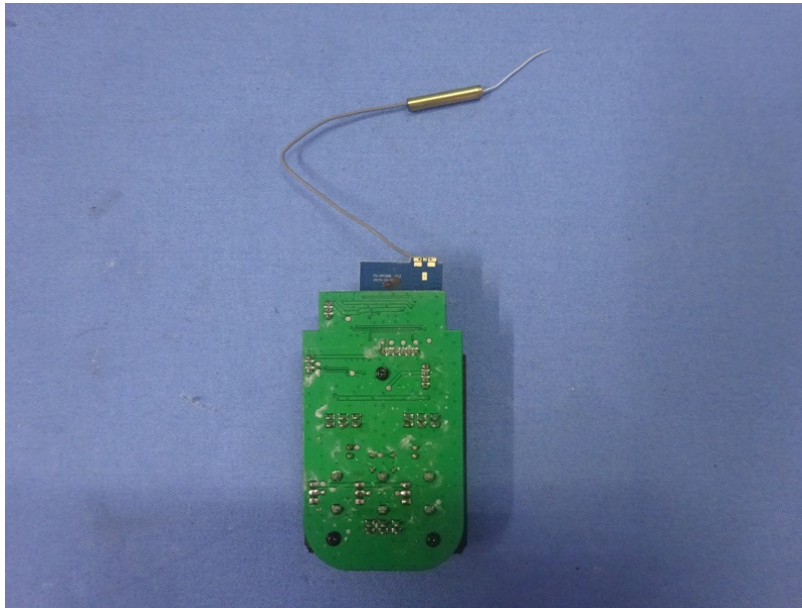

---End---