



RF TEST REPORT

Applicant	MOBILE DEVICES INGENIERIE
FCC ID	A6GC4D-4GMUSV6
Product	TELEMATICS EMBEDDED SYSTEMS
Brand	MOBILE DEVICES INGENIERIE
Model	C4D-4MUSAA_V6, C4D-4MUSAB_V6
Marketing	C4D-4MUSAA_V6, C4D-4MUSAB_V6
Report No.	R1804A0153-R1V1
Issue Date	May 24, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR 47 Part 24E (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Jiangpeng Lan

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

- 1. Test Laboratory4
 - 1.1. Notes of the test report.....4
 - 1.2. Test facility.....4
 - 1.3. Testing Location5
- 2. General Description of Equipment under Test.....6
- 3. Applied Standards.....7
- 4. Test Configuration.....8
- 5. Test Case Results.....9
 - 5.1. RF Power Output.....9
 - 5.2. Effective Isotropic Radiated Power 11
 - 5.3. Occupied Bandwidth 14
 - 5.4. Band Edge Compliance..... 18
 - 5.5. Peak-to-Average Power Ratio (PAPR) 27
 - 5.6. Frequency Stability 29
 - 5.7. Spurious Emissions at Antenna Terminals 32
 - 5.8. Radiates Spurious Emission 42
- 6. Main Test Instruments53
- ANNEX A: EUT Appearance and Test Setup.....54
 - A.1 EUT Appearance 54
 - A.2 Test Setup..... 55



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	24.232(c)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 /24.238(a)	PASS
5	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 24.235	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
8	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: April 11, 2018 ~ April 17, 2018			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	MOBILE DEVICES INGENIERIE
Applicant address	100 AVENUE DE STALINGRAD VILLEJUIF / France
Manufacturer	MOBILE DEVICES INGENIERIE
Manufacturer address	100 AVENUE DE STALINGRAD VILLEJUIF / France

General information

EUT Description			
Model	C4D-4MUSAA_V6, C4D-4MUSAB_V6		
IMEI	355154080329739		
Hardware Version	SAP00335+SAP00387+SAP00388 SAP00328+SAP00341+SAP00387		
Software Version	V2075		
Power Supply	Battery/ External Power Supply		
Antenna Type	Internal Antenna		
Test Mode(s)	LTE Band 2		
Test Modulation	(LTE)QPSK,16QAM		
LTE Category	M1		
Maximum E.I.R.P	LTE Band 2:	22.87dBm	
Rated Power Supply Voltage	12 V		
Extreme Voltage	Minimum: 8 V Maximum: 14 V		
Extreme Temperature	Lowest:-20°C Highest: +50°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
EUT Accessory			
Battery	Manufacturer: HOWELL Model: 552535H LION POLYMER		
Note: The information of the EUT is declared by the manufacturer.			

Model	C4D-4MUSAA_V6	C4D-4MUSAB_V6
SN	SAP00335+SAP00387+SAP00388	SAP00328+SAP00341+SAP00387
Difference	additional multiplexed OBD	/
Other	The same	The same
Note: Customer declaration, The difference between C4D-4MUSAA_V6 and C4D-4MUSAB_V6 is the additional multiplexed OBD for C4D-4MUSAA_V6. There are more than one models, each one should be applied throughout the compliance test respectively, however, only the worst case (C4D-4MUSAA_V6) will be recorded in this report.		



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2017)

FCC CFR 47 Part 24E (2017)

ANSI/TIA-603-E (2016)

KDB 971168 D01 Power Meas License Digital Systems v03

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	-	O	-
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O	-	-	O	O	-	O
Conducted Spurious Emissions	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1.RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

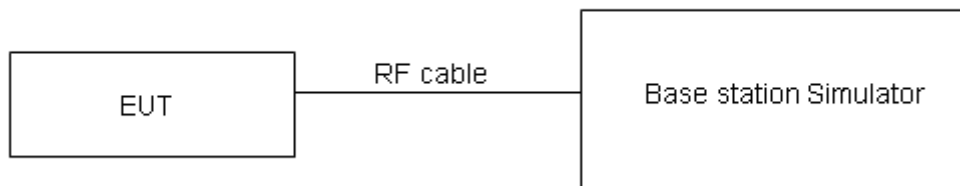

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Bandwidth	Channel/ Frequency(MHz)	RB	Index	Conducted Power (dBm)	
					QPSK	16QAM
LTE Band 2	1.4MHz	18607/1850.7	1#0	0	22.77	21.21
			6#0	0	20.63	20.93
		18900/1880	1#0	0	22.50	21.73
			6#0	0	20.69	20.52
		19193/1909.3	1#5	0	22.77	22.17
			6#0	0	21.07	20.75
	3MHz	18615/1851.5	1#0	0	22.58	22.14
			6#0	0	20.53	20.46
		18900/1880	1#0	0	22.53	22.03
			6#0	0	20.72	20.67
		19185/1908.5	1#5	1	22.78	22.59
			6#0	1	20.83	20.52
	5MHz	18625/1852.5	1#0	0	22.75	22.74
			6#0	0	21.56	20.22
		18900/1880	1#0	0	22.80	22.36
			6#0	0	21.88	21.05
		19175/1907.5	1#5	3	22.27	22.96
			6#0	3	21.87	21.31
	10MHz	18650/1855	1#0	0	22.59	22.21
			4#0	0	22.88	22.28
		18900/1880	1#0	0	22.72	22.30
			4#0	0	22.83	22.26
		19150/1905	1#5	7	23.18	22.99
			4#2	7	23.26	22.69
	15MHz	18675/1857.5	1#0	0	22.73	22.49
			6#0	0	22.71	23.07
		18900/1880	1#0	0	22.42	23.19
			6#0	0	22.83	22.91
		19125/1902.5	1#5	11	22.96	22.87
			6#0	11	22.93	23.33
	20MHz	18700/1860	1#0	0	22.97	22.77
			6#0	0	23.02	23.16
18900/1880		1#0	0	22.52	23.10	
		6#0	0	22.89	23.03	
19100/1900		1#5	15	23.15	22.90	
		6#0	15	22.94	23.27	

5.2. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa



Methods of Measurement

The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-E (2016).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

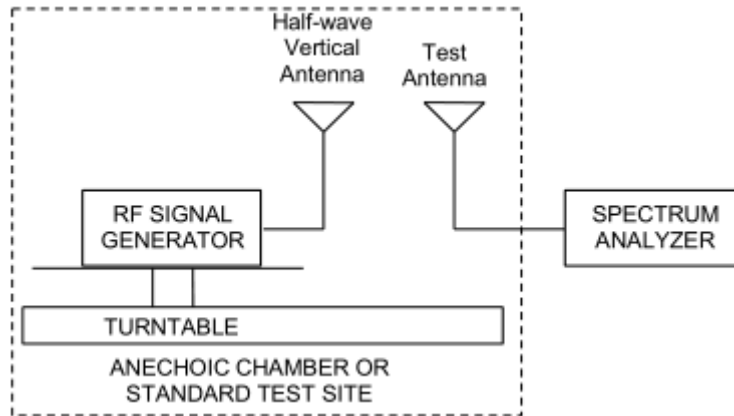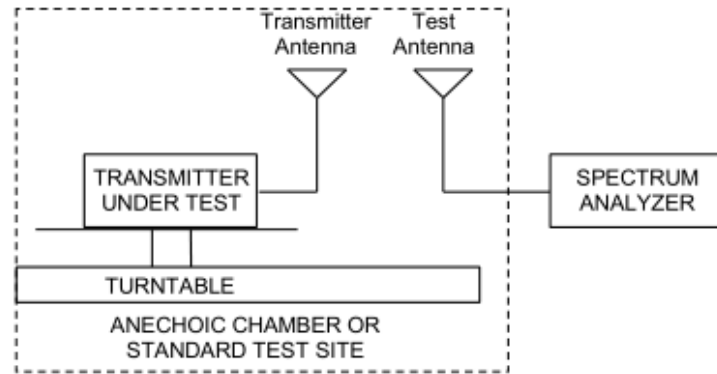

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2\text{ W}$ (33 dBm)
-------	----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19\text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

LTE Band 2								
bandwidth	Channel	Frequency (MHz)	Polarization	RB	Index	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1850.7	Horizontal	1#0	0	22.13	33	Pass
	Mid	1880	Horizontal	1#2	0	22.56	33	Pass
	High	1909.3	Horizontal	1#5	0	22.67	33	Pass
3 MHz (QPSK)	Low	1851.5	Horizontal	1#0	0	21.36	33	Pass
	Mid	1880	Horizontal	1#5	0	21.12	33	Pass
	High	1908.5	Horizontal	1#5	1	21.39	33	Pass
5 MHz (QPSK)	Low	1852.5	Horizontal	1#0	0	22.59	33	Pass
	Mid	1880	Horizontal	1#5	1	22.65	33	Pass
	High	1907.5	Horizontal	1#5	3	22.43	33	Pass
10 MHz (QPSK)	Low	1855	Horizontal	4#0	0	22.12	33	Pass
	Mid	1880	Horizontal	4#2	3	22.04	33	Pass
	High	1905	Horizontal	4#2	7	22.35	33	Pass
15 MHz (QPSK)	Low	1857.5	Horizontal	1#0	0	22.87	33	Pass
	Mid	1880	Horizontal	1#5	5	22.71	33	Pass
	High	1902.5	Horizontal	1#5	11	22.64	33	Pass
20 MHz (QPSK)	Low	1860	Horizontal	6#0	0	22.31	33	Pass
	Mid	1880	Horizontal	6#0	7	22.50	33	Pass
	High	1900	Horizontal	6#0	15	22.19	33	Pass
1.4 MHz (16QAM)	Low	1850.7	Horizontal	1#0	0	21.84	33	Pass
	Mid	1880	Horizontal	1#2	0	22.27	33	Pass
	High	1909.3	Horizontal	1#5	0	22.38	33	Pass
3 MHz (16QAM)	Low	1851.5	Horizontal	1#0	0	21.07	33	Pass
	Mid	1880	Horizontal	1#5	0	20.83	33	Pass
	High	1908.5	Horizontal	1#5	1	21.10	33	Pass
5 MHz (16QAM)	Low	1852.5	Horizontal	1#0	0	22.30	33	Pass
	Mid	1880	Horizontal	1#5	1	22.36	33	Pass
	High	1907.5	Horizontal	1#5	3	22.14	33	Pass
10 MHz (16QAM)	Low	1855	Horizontal	4#0	0	21.83	33	Pass
	Mid	1880	Horizontal	4#2	3	21.75	33	Pass
	High	1905	Horizontal	4#2	7	22.06	33	Pass
15 MHz (16QAM)	Low	1857.5	Horizontal	1#0	0	22.58	33	Pass
	Mid	1880	Horizontal	1#5	5	22.42	33	Pass
	High	1902.5	Horizontal	1#5	11	22.35	33	Pass
20 MHz (16QAM)	Low	1860	Horizontal	6#0	0	22.02	33	Pass
	Mid	1880	Horizontal	6#0	7	22.21	33	Pass
	High	1900	Horizontal	6#0	15	21.90	33	Pass

5.3.Occupied Bandwidth

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2, 99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

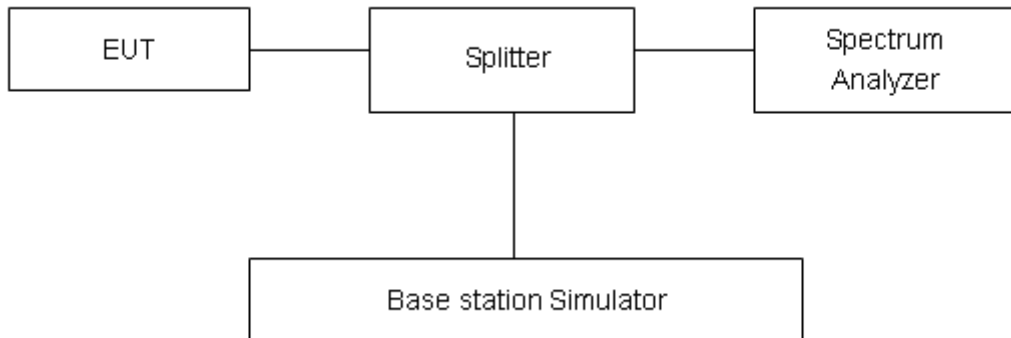

Limits

No specific occupied bandwidth requirements in part 2.1049.







Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.



Test Result

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
Band2	1.4MHz	QPSK	18900/1880	6#0	0	1.1113	1.341
		16QAM	18900/1880	6#0	0	0.9513	1.209
	3MHz	QPSK	18900/1880	6#0	0	1.1624	2.048
		16QAM	18900/1880	6#0	0	0.9880	1.329
	5MHz	QPSK	18900/1880	6#0	0	1.1640	1.851
		16QAM	18900/1880	6#0	0	1.0433	1.619
	10MHz	QPSK	18900/1880	6#0	0	1.2174	1.869
		16QAM	18900/1880	6#0	0	1.0471	1.575
	15MHz	QPSK	18900/1880	6#0	0	1.2128	1.962
		16QAM	18900/1880	6#0	0	1.1411	2.076
	20MHz	QPSK	18900/1880	6#0	0	1.2532	1.930
		16QAM	18900/1880	6#0	0	1.1874	2.129

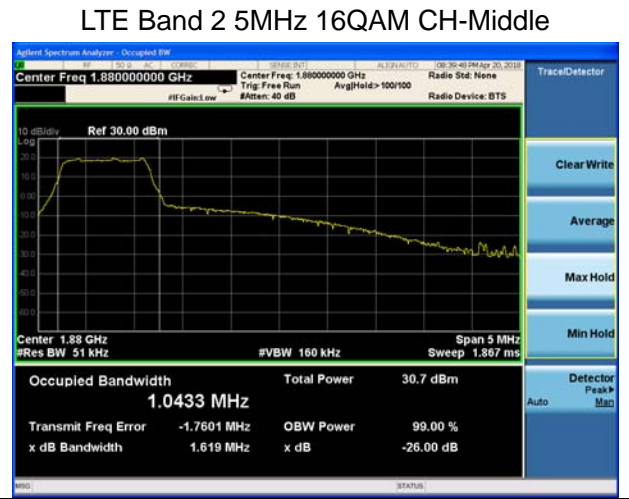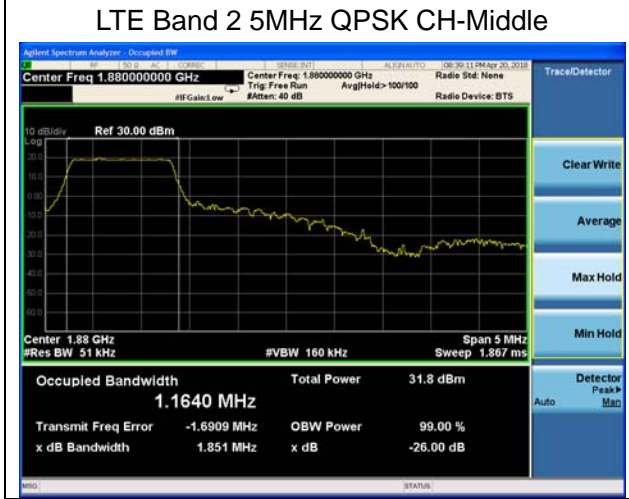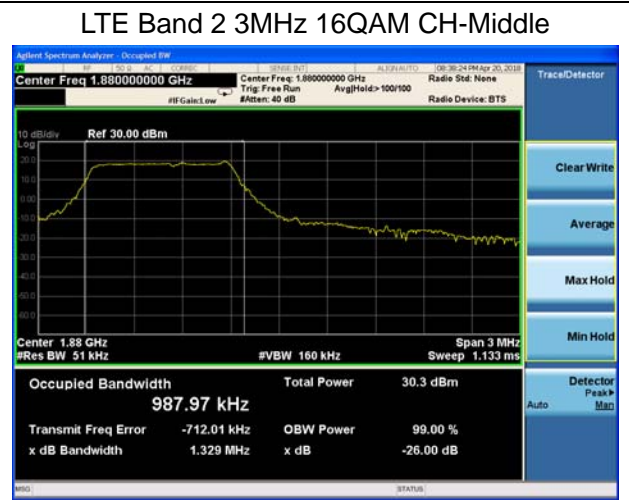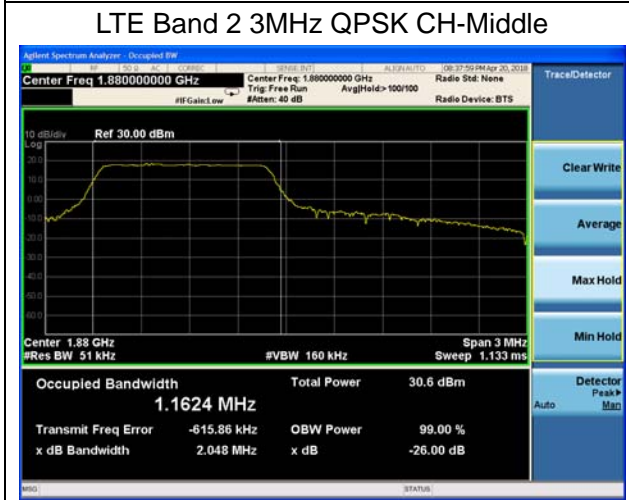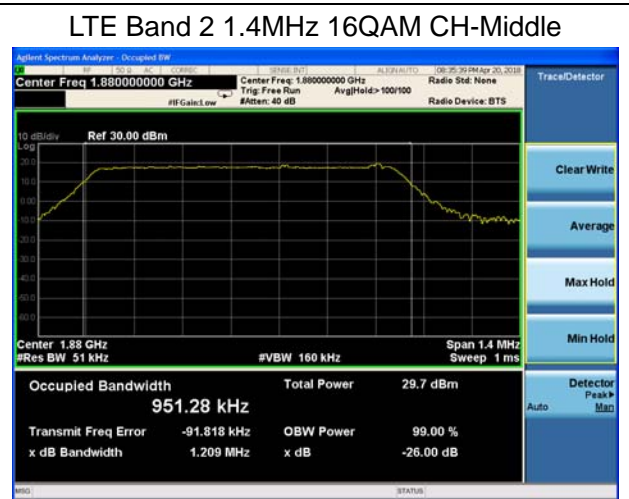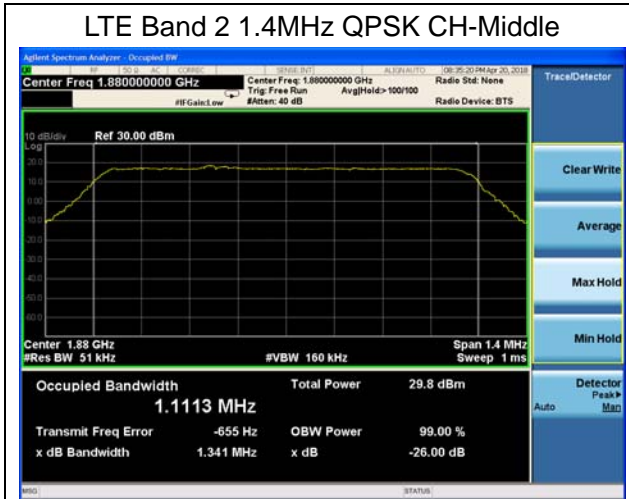


LTE Band 2 10MHz QPSK CH-Middle

LTE Band 2 10MHz 16QAM CH-Middle




LTE Band 2 15MHz QPSK CH-Middle

LTE Band 2 15MHz 16QAM CH-Middle

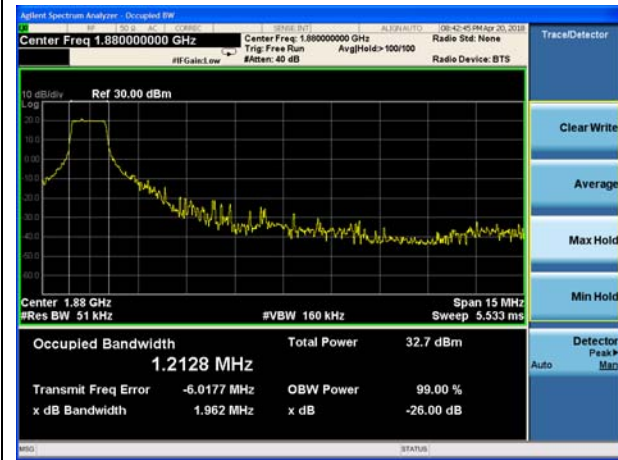

LTE Band 2 20MHz QPSK CH-Middle

LTE Band 2 20MHz 16QAM CH-Middle

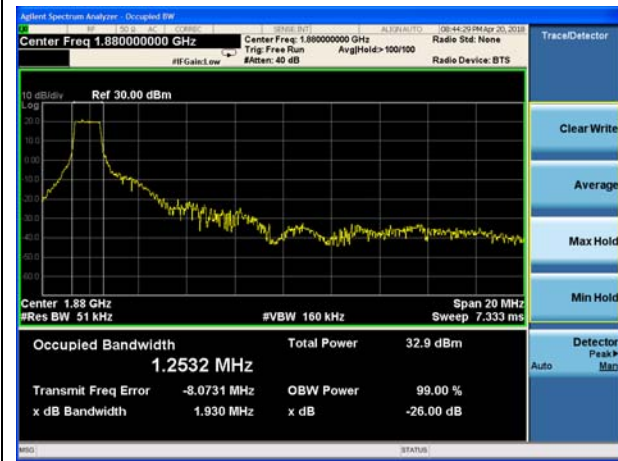

5.4. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2, Spectrum analyzer plots are included on the following pages.

Test Setup

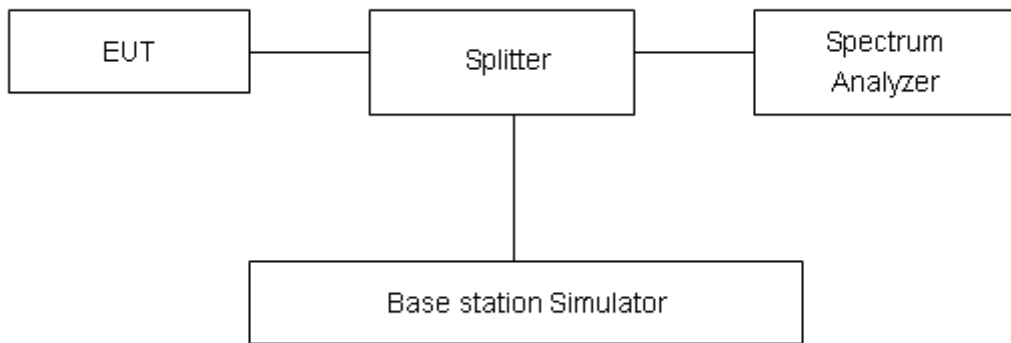

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log10 (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.



Test Result:

LTE Band 2 1.4MHz QPSK 1RB CH-Low




LTE Band 2 1.4MHz QPSK 1RB CH-High



LTE Band 2 1.4MHz QPSK 100%RB CH-Low



LTE Band 2 1.4MHz QPSK 100%RB CH-High

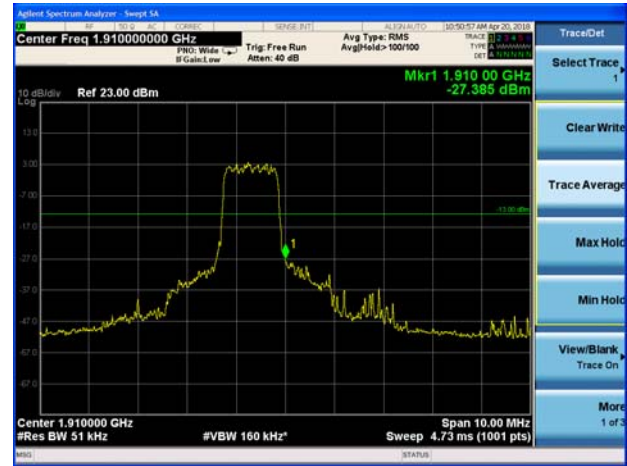

LTE Band 2 3MHz QPSK 1RB CH-Low




LTE Band 2 3MHz QPSK 1RB CH-High






LTE Band 2 3MHz QPSK 100%RB CH-Low

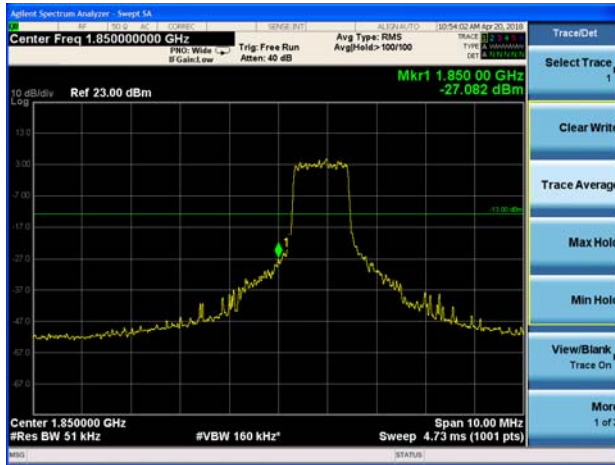

LTE Band 2 3MHz QPSK 100%RB CH-High



LTE Band 2 5MHz QPSK 1RB CH-Low

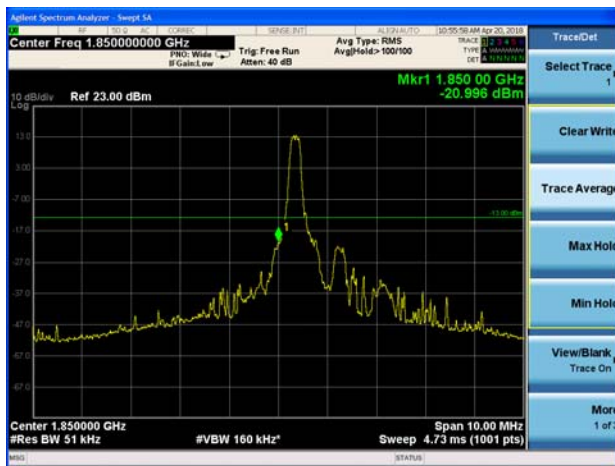


LTE Band 2 5MHz QPSK 1RB CH-High



LTE Band 2 5MHz QPSK 100%RB CH-Low




LTE Band 2 5MHz QPSK 100%RB CH-High

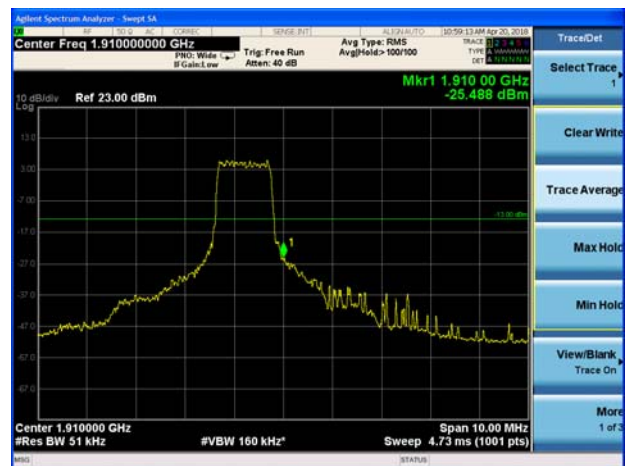


LTE Band 2 10MHz QPSK 1RB CH-Low



LTE Band 2 10MHz QPSK 1RB CH-High

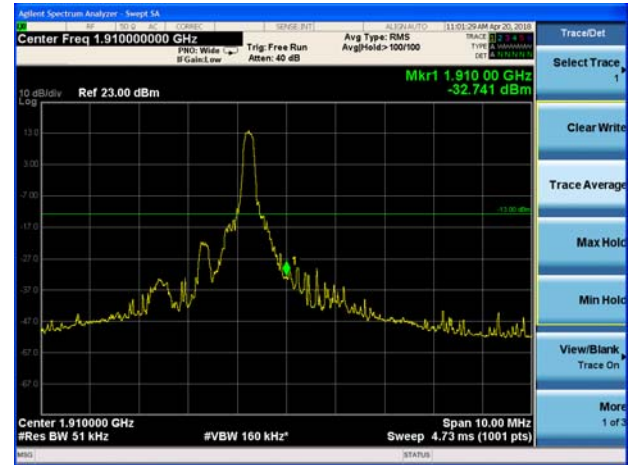


LTE Band 2 10MHz QPSK 100%RB CH-Low

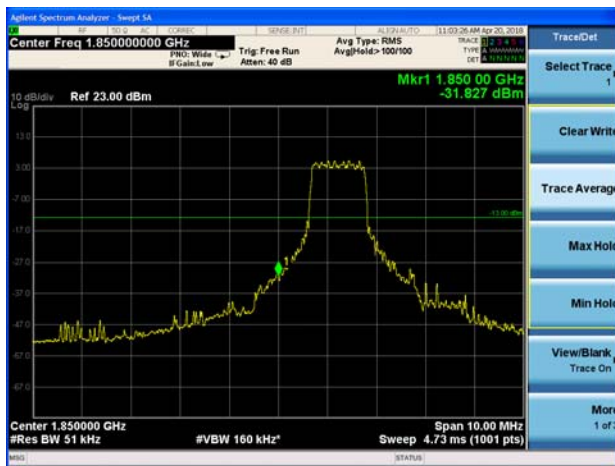


LTE Band 2 10MHz QPSK 100%RB CH-High



LTE Band 2 15MHz QPSK 1RB CH-Low

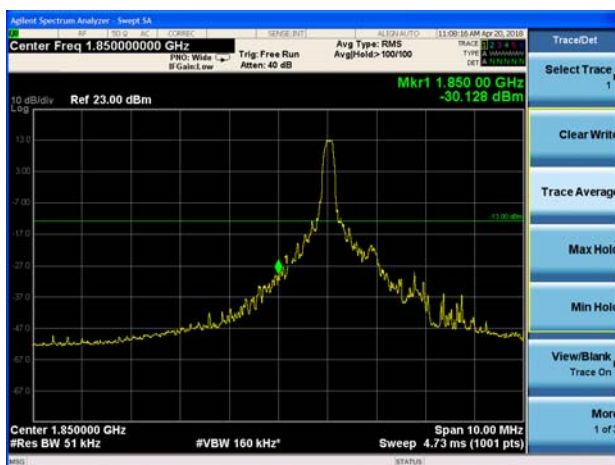

LTE Band 2 15MHz QPSK 1RB CH-High

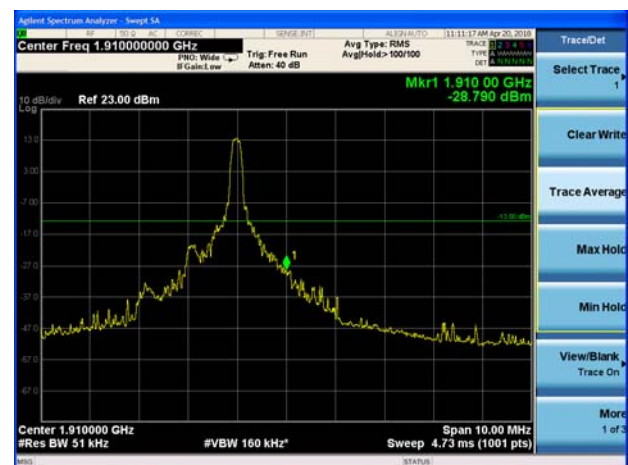


LTE Band 2 15MHz QPSK 100%RB CH-Low




LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low

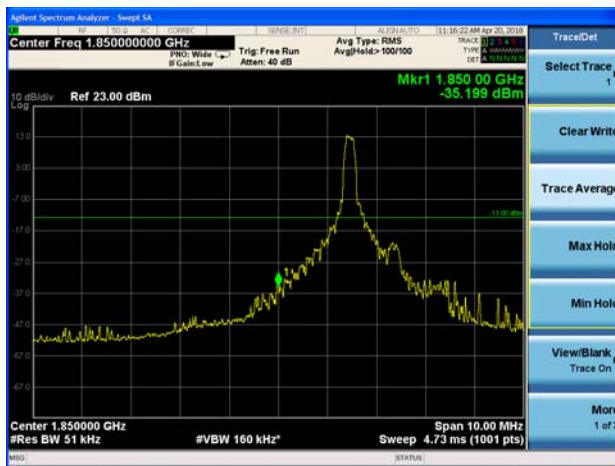


LTE Band 2 20MHz QPSK 1RB CH-High

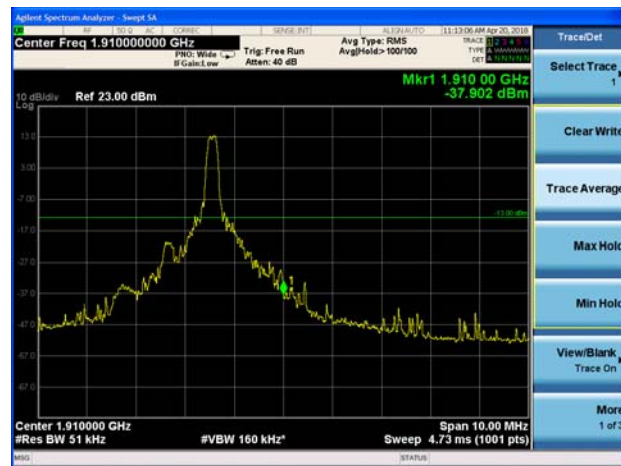

LTE Band 2 20MHz QPSK 100%RB CH-Low



LTE Band 2 20MHz QPSK 100%RB CH-High

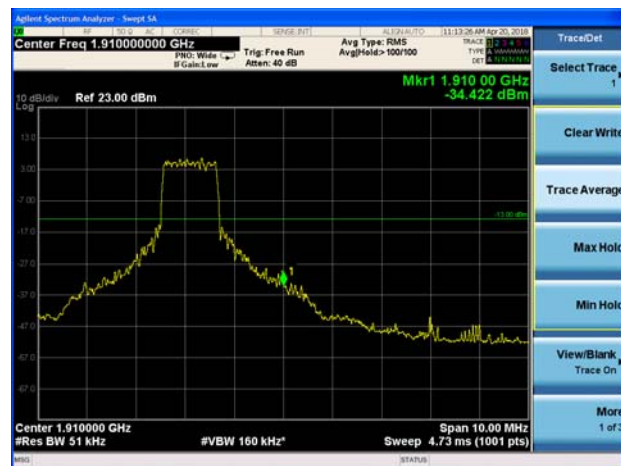




LTE Band 2 1.4MHz 16QAM 1RB CH-Low




LTE Band 2 1.4MHz 16QAM 1RB CH-High




LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

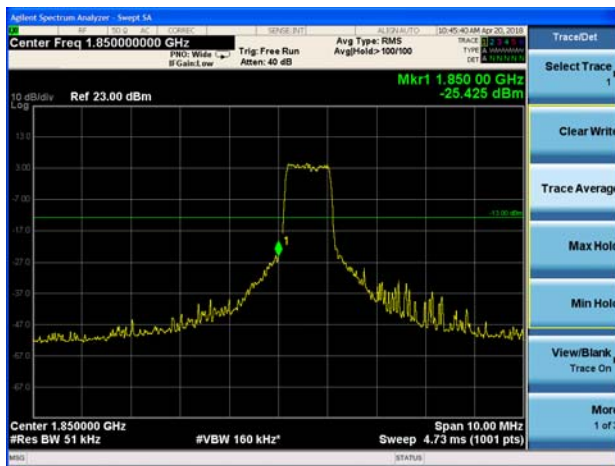


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

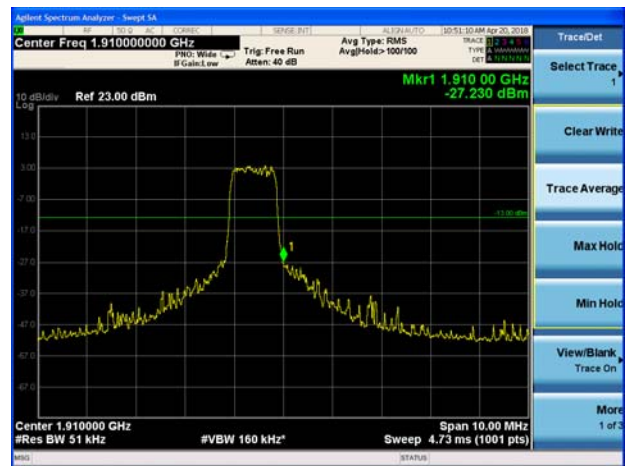


LTE Band 2 3MHz 16QAM 1RB CH-Low

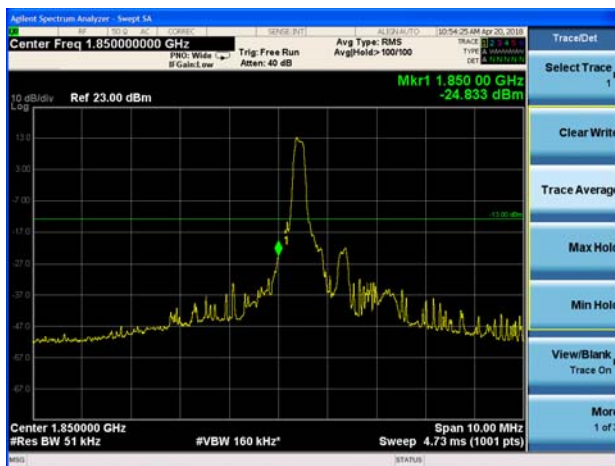


LTE Band 2 3MHz 16QAM 1RB CH-High

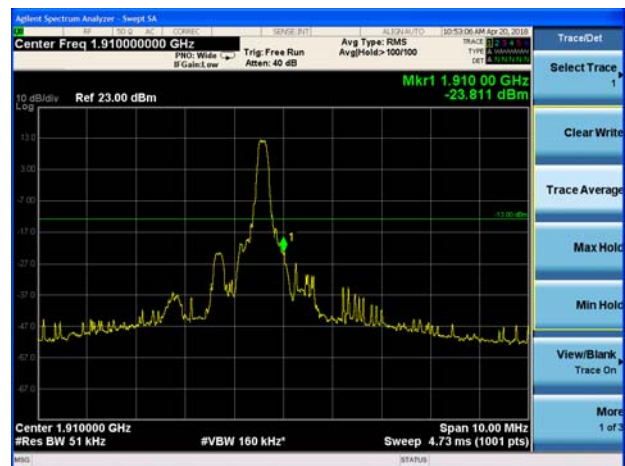

LTE Band 2 3MHz 16QAM 100%RB CH-Low

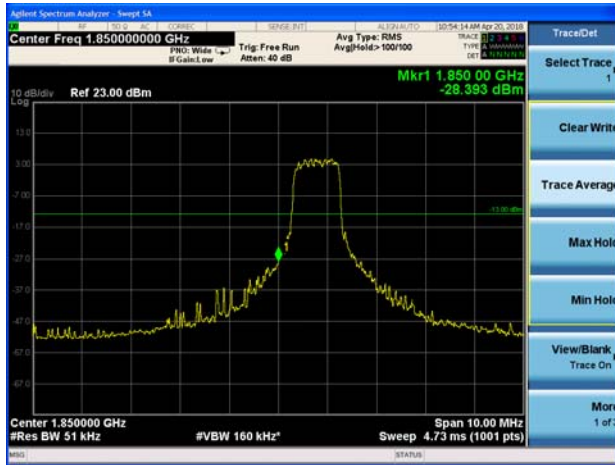


LTE Band 2 3MHz 16QAM 100%RB CH-High

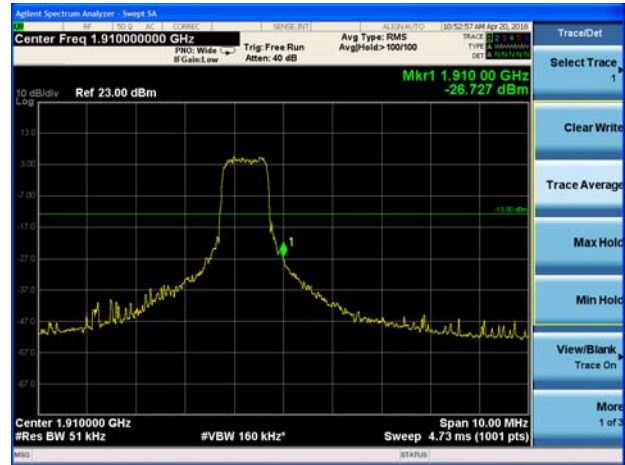


LTE Band 2 5MHz 16QAM 1RB CH-Low




LTE Band 2 5MHz 16QAM 1RB CH-High

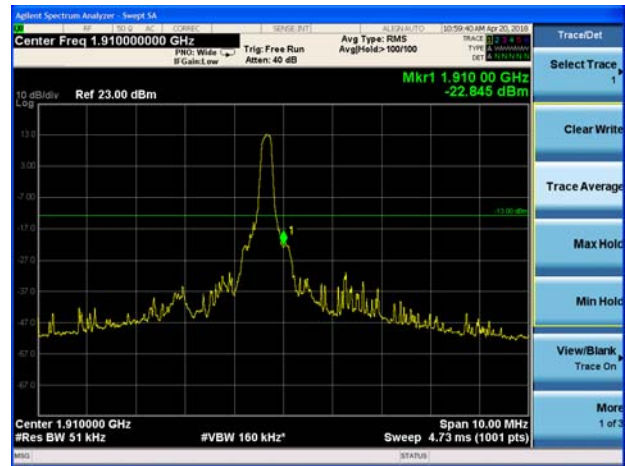

LTE Band 2 5MHz 16QAM 100%RB CH-Low

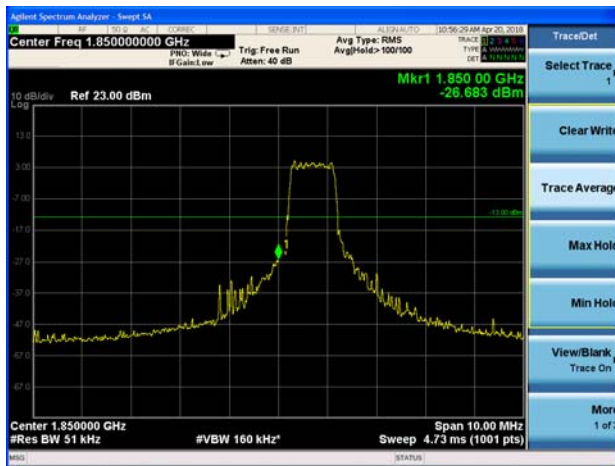

LTE Band 2 5MHz 16QAM 100%RB CH-High

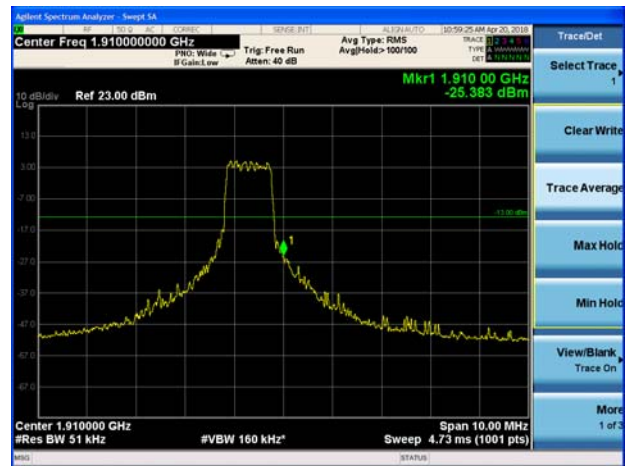





LTE Band 2 10MHz 16QAM 1RB CH-Low



LTE Band 2 10MHz 16QAM 1RB CH-High

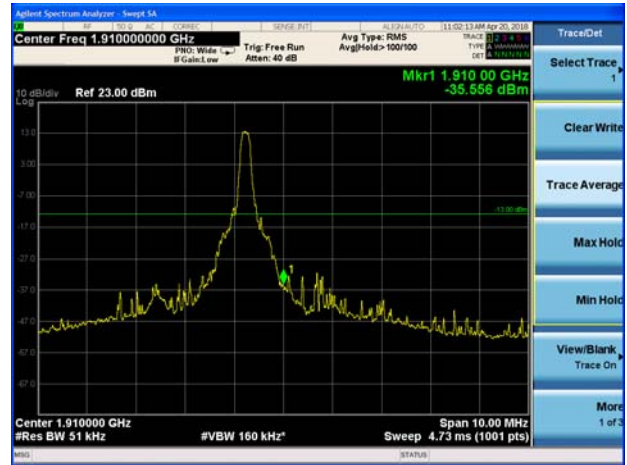


LTE Band 2 10MHz 16QAM 100%RB CH-Low

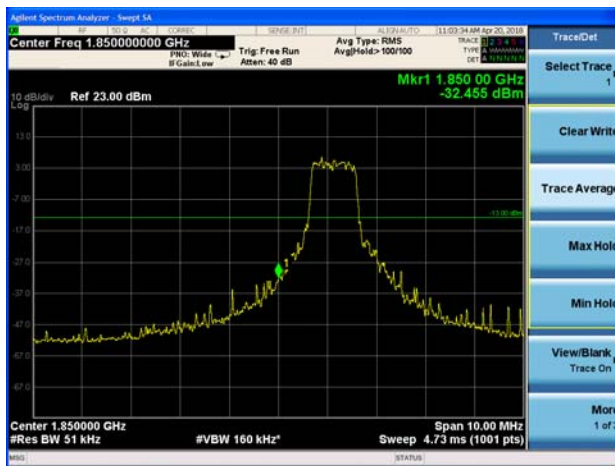


LTE Band 2 10MHz 16QAM 100%RB CH-High



LTE Band 2 15MHz 16QAM 1RB CH-Low

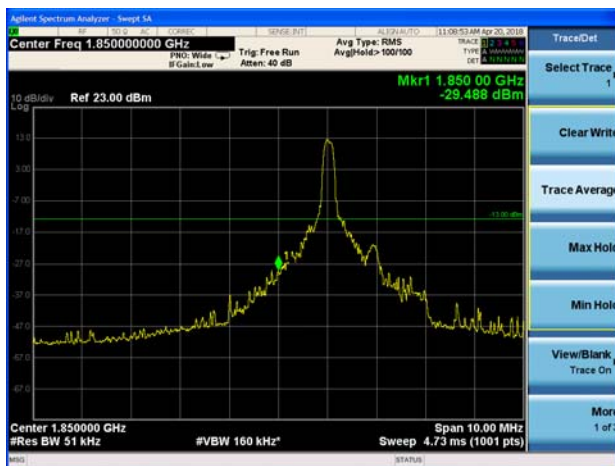


LTE Band 2 15MHz 16QAM 1RB CH-High

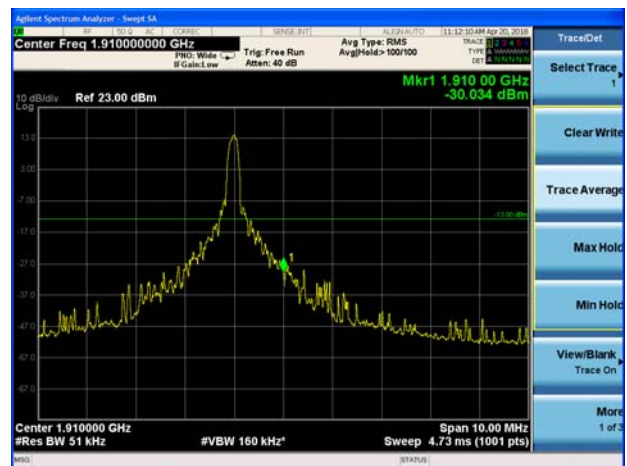




LTE Band 2 15MHz 16QAM 100%RB CH-Low

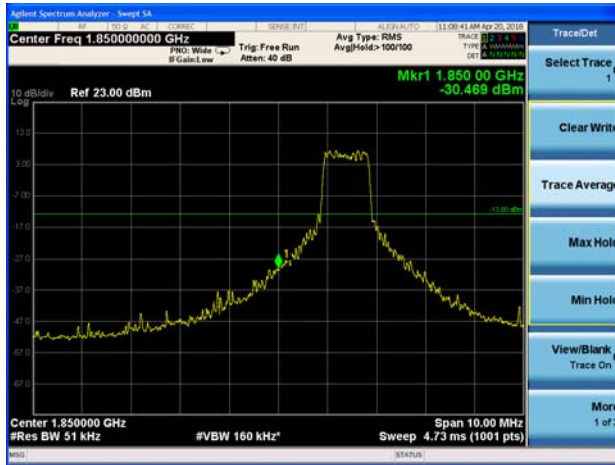


LTE Band 2 15MHz 16QAM 100%RB CH-High

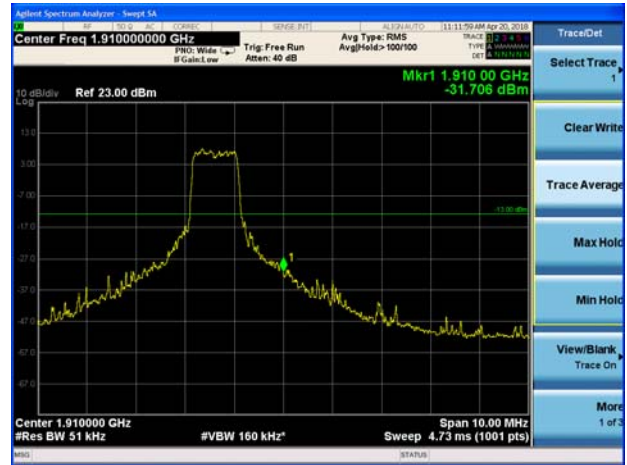


LTE Band 2 20MHz 16QAM 1RB CH-Low




LTE Band 2 20MHz 16QAM 1RB CH-High

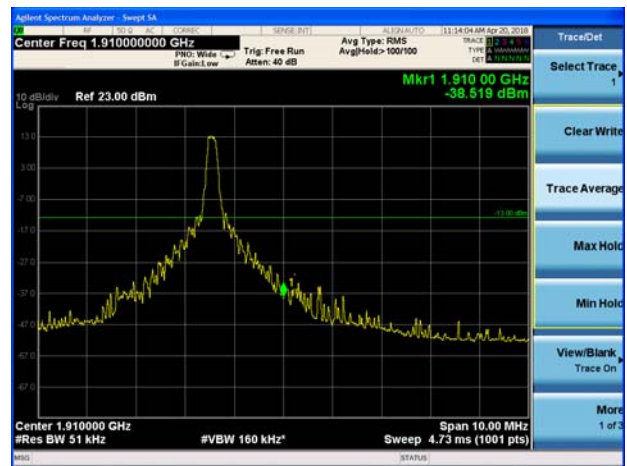

LTE Band 2 20MHz 16QAM 100%RB CH-Low

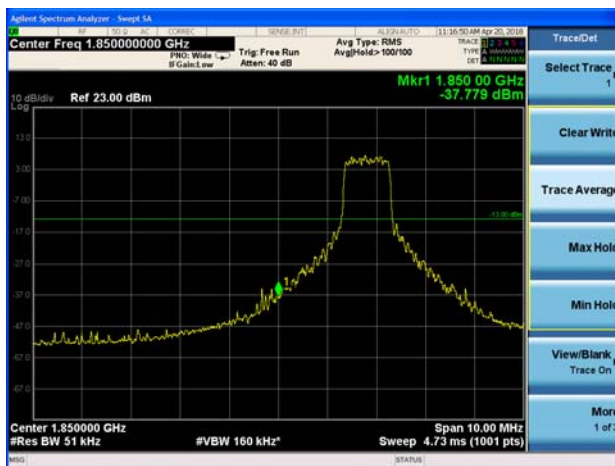

LTE Band 2 20MHz 16QAM 100%RB CH-High

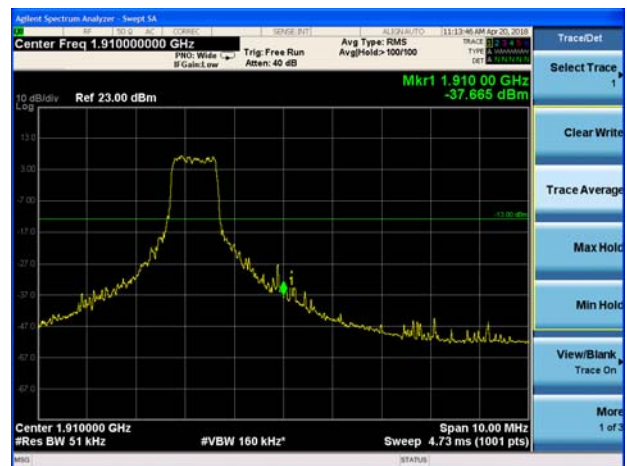

5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

Test Setup

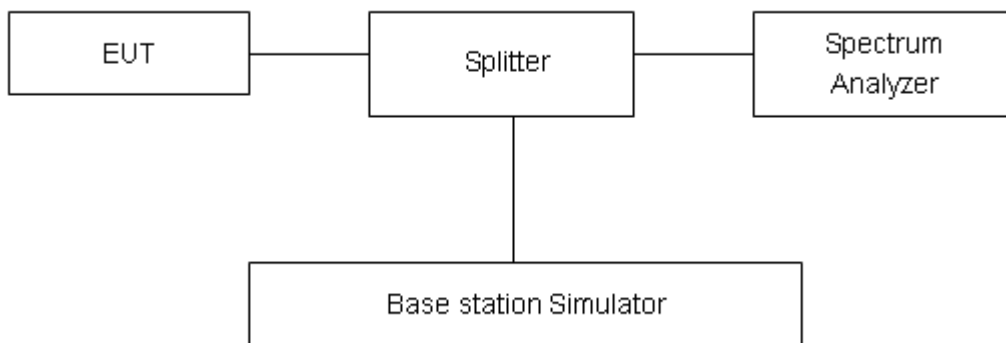

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)		
				Peak(dBm)	Avg(dBm)	PAPR(dB)
Band2	1.4MHz	QPSK	18900/1880	29.19	20.69	8.50
		16QAM	18900/1880	29.75	20.52	9.23
	3MHz	QPSK	18900/1880	27.50	20.72	6.78
		16QAM	18900/1880	27.42	20.67	6.75
	5MHz	QPSK	18900/1880	28.06	21.88	6.18
		16QAM	18900/1880	29.13	21.05	8.08
	10MHz	QPSK	18900/1880	29.10	22.83	6.27
		16QAM	18900/1880	29.58	22.26	7.32
	15MHz	QPSK	18900/1880	29.43	22.83	6.60
		16QAM	18900/1880	30.03	22.91	7.12
	20MHz	QPSK	18900/1880	30.29	22.89	7.40
		16QAM	18900/1880	30.25	23.03	7.22

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 8V and 14 V, with a nominal voltage of 12V.

Test setup

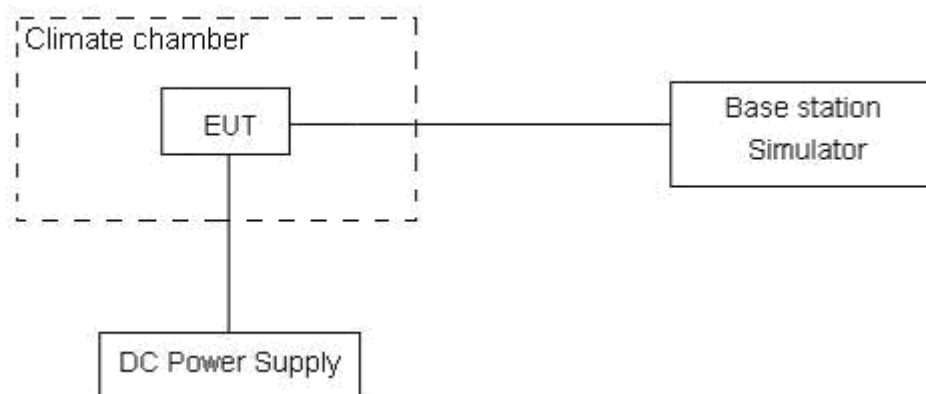

**Limits**

No specific frequency stability requirements in part 24.235

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.



Test Result

LTE Band 2					
(QPSK, 20MHz Bandwidth)					
Condition		1850	1910	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1851.2401	1908.7401	0.92	0.00049
Extreme (50°C)		1851.2598	1908.7598	4.62	0.00246
Extreme (40°C)		1851.2530	1908.7530	-3.35	-0.00178
Extreme (30°C)		1851.2444	1908.7444	1.73	0.00092
Extreme (20°C)		1851.3094	1908.8094	-13.95	-0.00742
Extreme (10C)		1851.2371	1908.7371	0.36	0.00019
Extreme (0°C)		1851.2409	1908.7409	-1.07	-0.00057
Extreme (-10°C)		1851.2549	1908.7549	-3.70	-0.00197
Extreme (-20°C)		1851.2676	1908.7676	-6.09	-0.00324
Extreme (-30°C)		1851.2499	1908.7499	2.76	0.00147
25°C		LV	1851.2379	1908.7379	-0.51
	HV	1851.2420	1908.7420	-1.28	-0.00068
(16QAM, 20MHz Bandwidth)					
Condition		1850	1910	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1851.3303	1908.7303	-5.62	-0.00299
Extreme (50°C)		1851.3106	1908.7106	5.03	0.00268
Extreme (40°C)		1851.3174	1908.7174	-7.94	-0.00422
Extreme (30°C)		1851.3260	1908.7264	-8.46	-0.00450
Extreme (20°C)		1851.2612	1908.6613	-17.12	-0.00911
Extreme (10C)		1851.3333	1908.7333	-1.76	-0.00094
Extreme (0°C)		1851.3295	1908.7295	-3.76	-0.00200
Extreme (-10°C)		1851.3155	1908.7155	-13.37	-0.00711
Extreme (-20°C)		1851.3028	1908.7028	-10.51	-0.00559
Extreme (-30°C)		1851.3205	1908.7205	1.63	0.00087
25°C		LV	1851.3325	1908.7325	4.59
	HV	1851.3284	1908.7284	-11.54	-0.00614

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

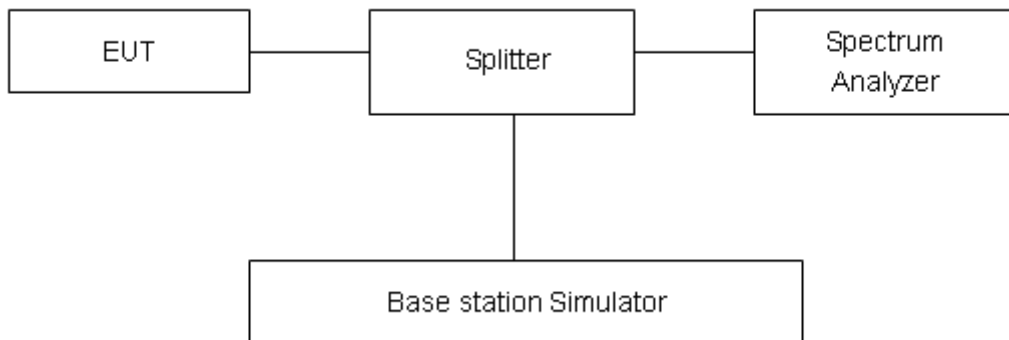

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log₁₀ (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB


Test Result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

The signal beyond the limit is carrier.


LTE Band 2 1.4MHz CH-Low 30MHz~1GHz

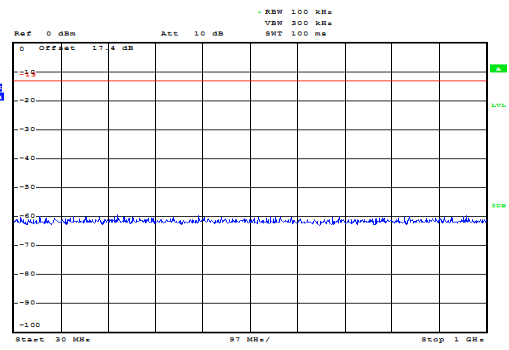


LTE Band 2 1.4MHz CH-Middle 30MHz~1GHz

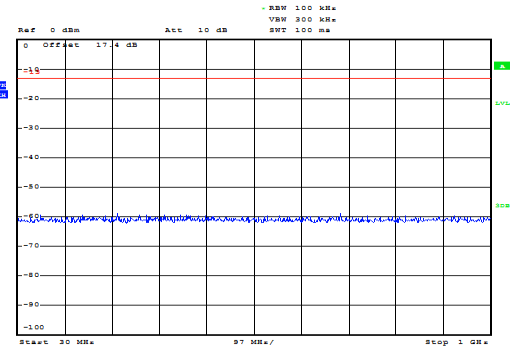


LTE Band 2 1.4MHz CH-Low 1GHz~3GHz

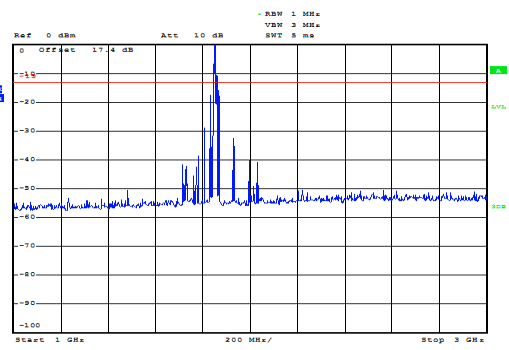


LTE Band 2 1.4MHz CH-Middle 1GHz~3GHz

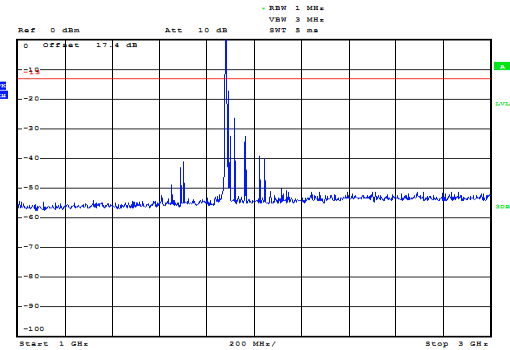

LTE Band 2 1.4MHz CH-Low 3GHz~20GHz

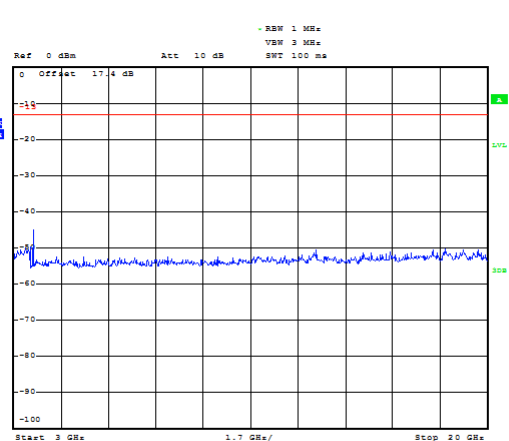


LTE Band 2 1.4MHz CH-Middle 3GHz~20GHz

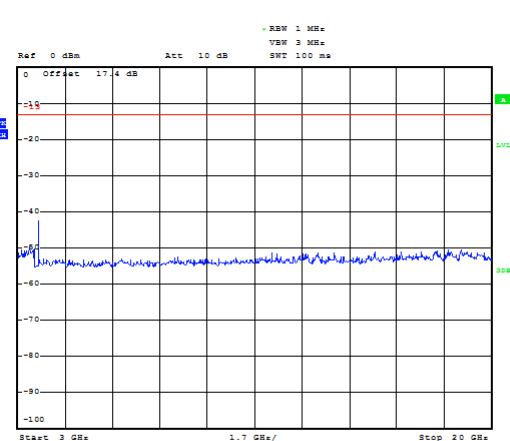





LTE Band 2 1.4MHz CH-High 30MHz~1GHz

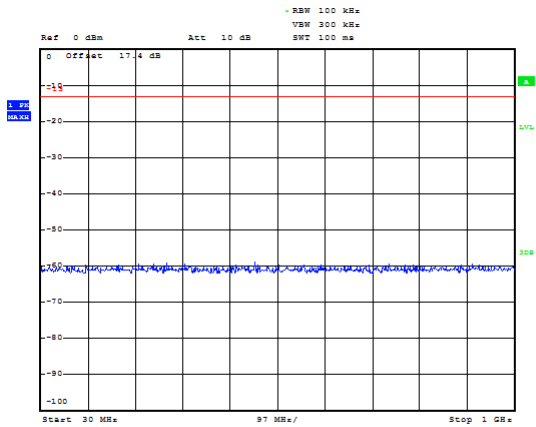


LTE Band 2 3MHz CH-Low 30MHz~1GHz

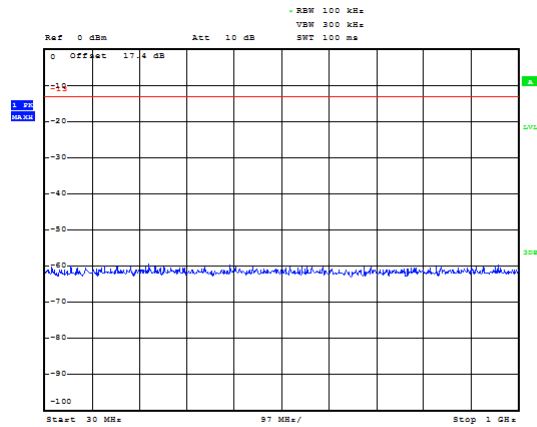


LTE Band 2 1.4MHz CH-High 1GHz~3GHz

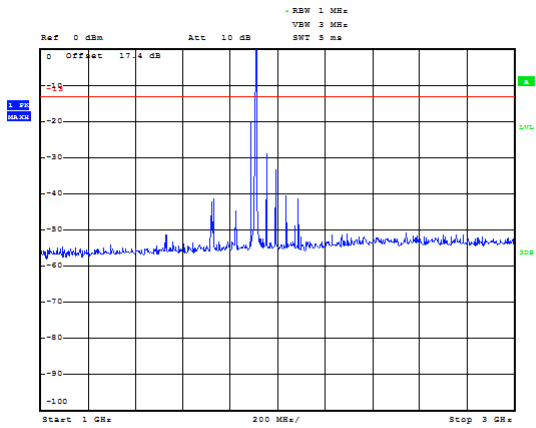


LTE Band 2 3MHz CH-Low 1GHz~3GHz

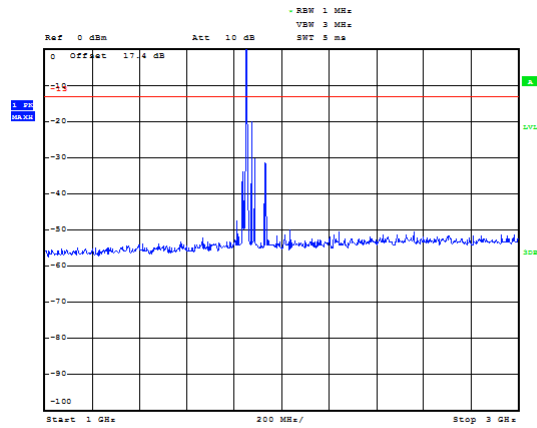

LTE Band 2 1.4MHz CH-High 3GHz~20GHz

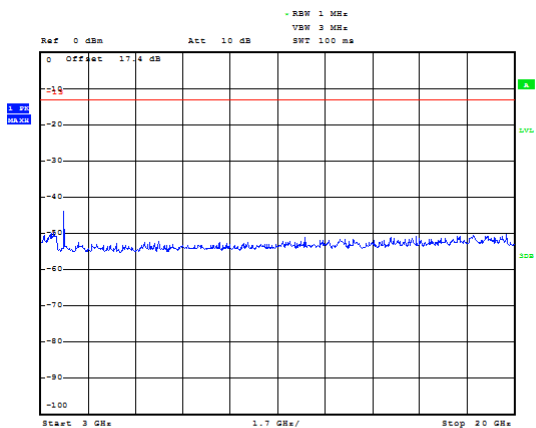


LTE Band 2 3MHz CH-Low 3GHz~20GHz

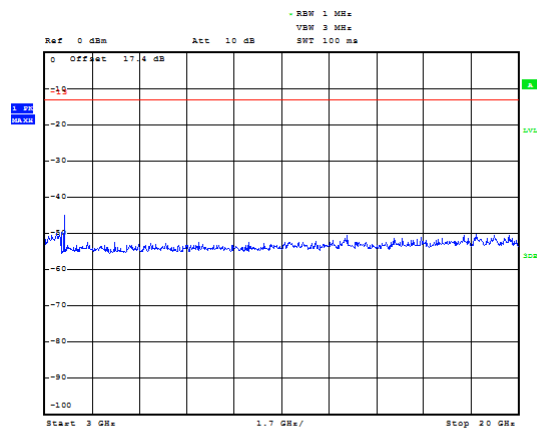





LTE Band 2 3MHz CH-Middle 30MHz~1GHz

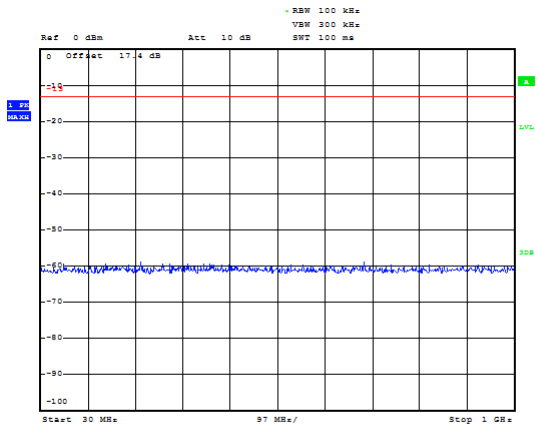


LTE Band 2 3MHz CH-High 30MHz~1GHz

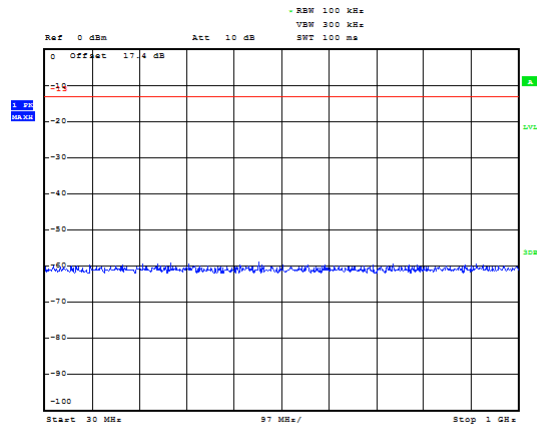


LTE Band 2 3MHz CH-Middle 1GHz~3GHz

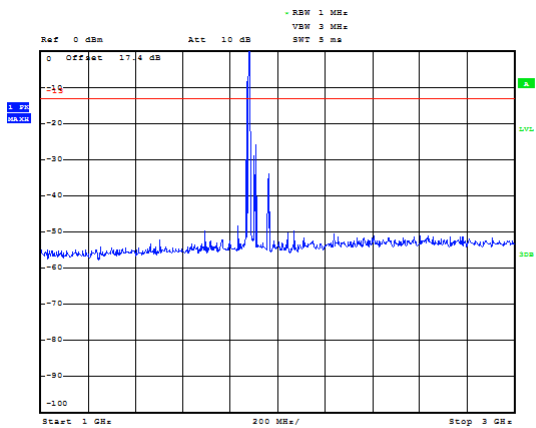


LTE Band 2 3MHz CH-High 1GHz~3GHz

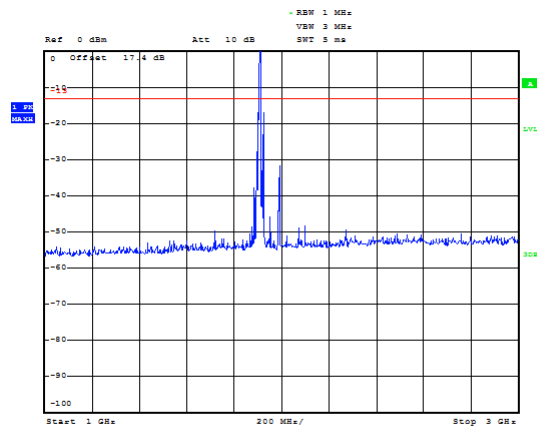

LTE Band 2 3MHz CH-Middle 3GHz~20GHz

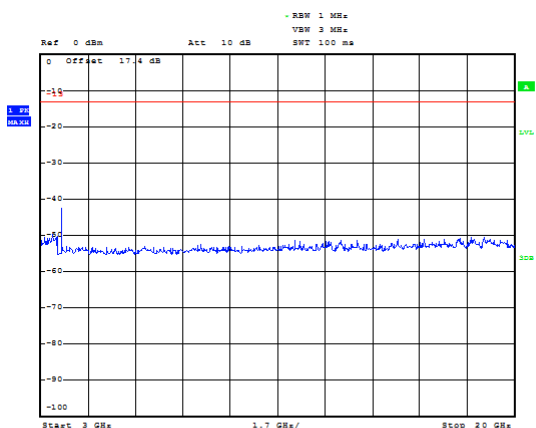


LTE Band 2 3MHz CH-High 3GHz~20GHz

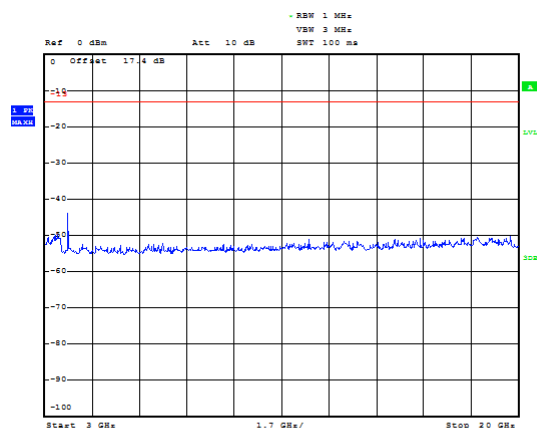





LTE Band 2 5MHz CH-Low 30MHz~1GHz

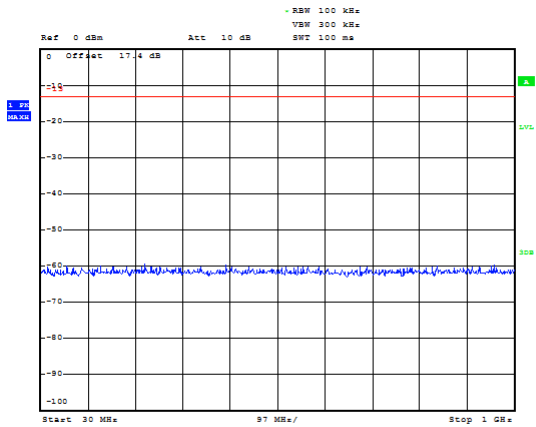


LTE Band 2 5MHz CH-Middle 30MHz~1GHz

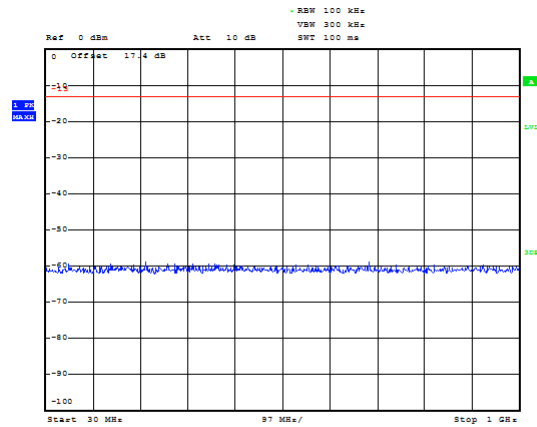


LTE Band 2 5MHz CH-Low 1GHz~3GHz

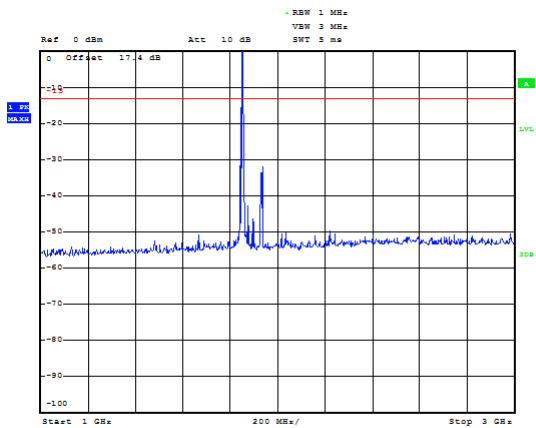


LTE Band 2 5MHz CH-Middle 1GHz~3GHz

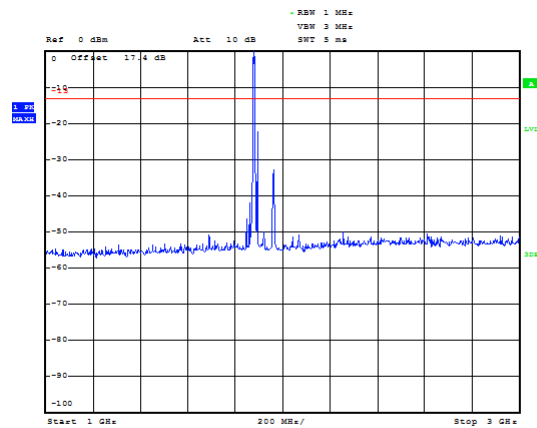

LTE Band 2 5MHz CH-Low 3GHz~20GHz

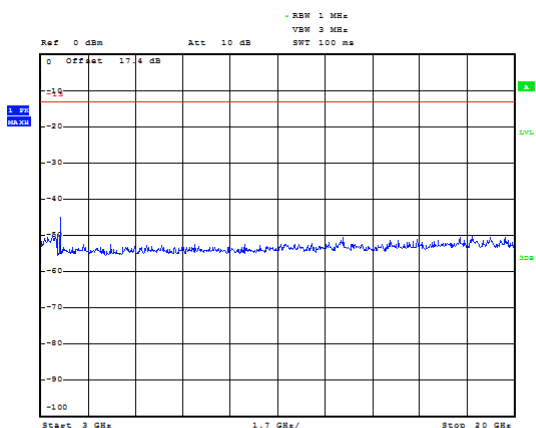


LTE Band 2 5MHz CH-Middle 3GHz~20GHz

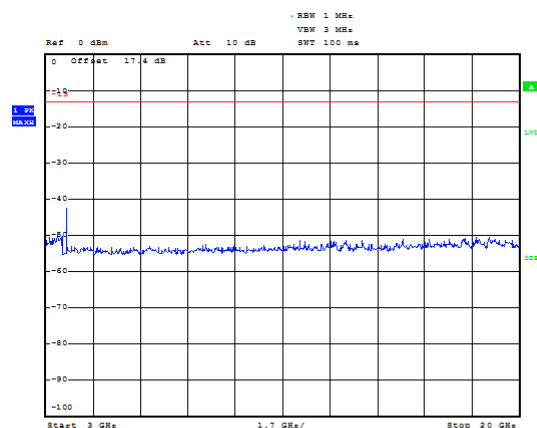





LTE Band 2 5MHz CH-High 30MHz~1GHz

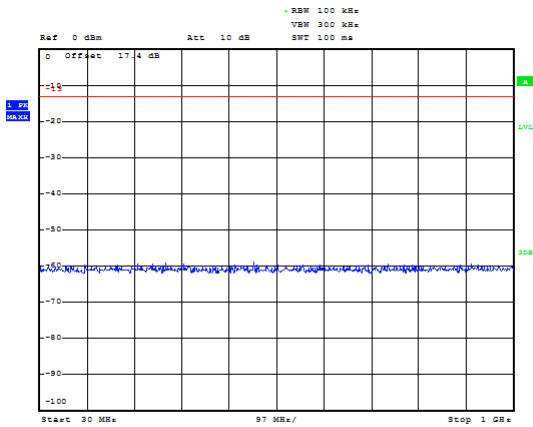


LTE Band 2 10MHz CH-Low 30MHz~1GHz

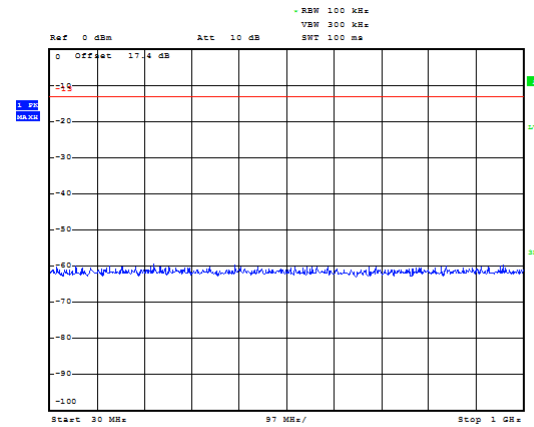


LTE Band 2 5MHz CH-High 1GHz~3GHz

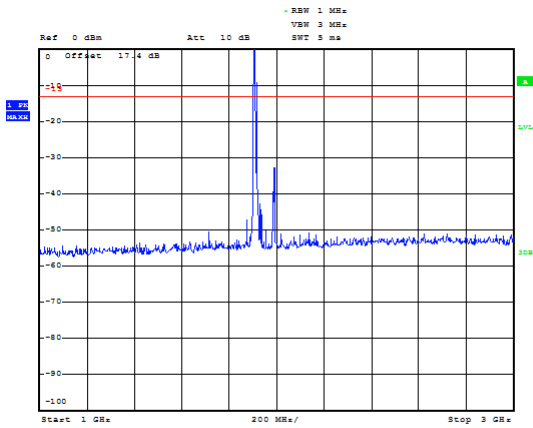


LTE Band 2 10MHz CH-Low 1GHz~3GHz

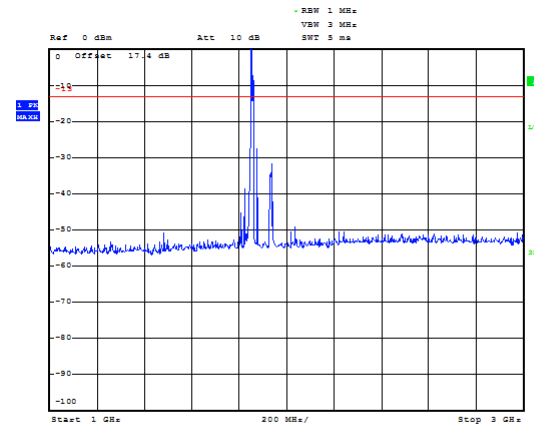

LTE Band 2 5MHz CH-High 3GHz~20GHz

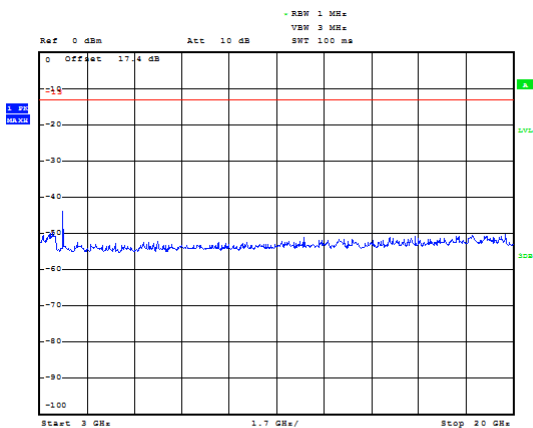


LTE Band 2 10MHz CH-Low 3GHz~20GHz

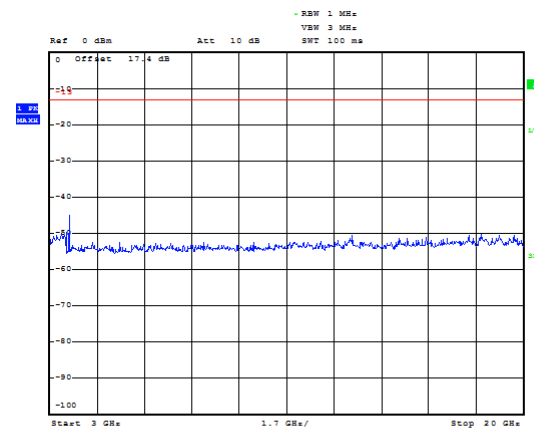





LTE Band 2 10MHz CH-Middle 30MHz~1GHz

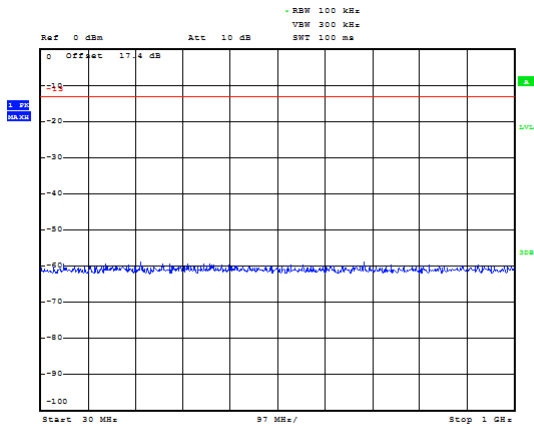


LTE Band 2 10MHz CH-High 30MHz~1GHz

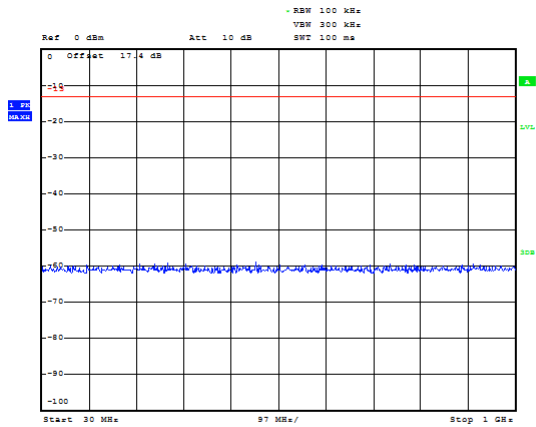


LTE Band 2 10MHz CH-Middle 1GHz~3GHz

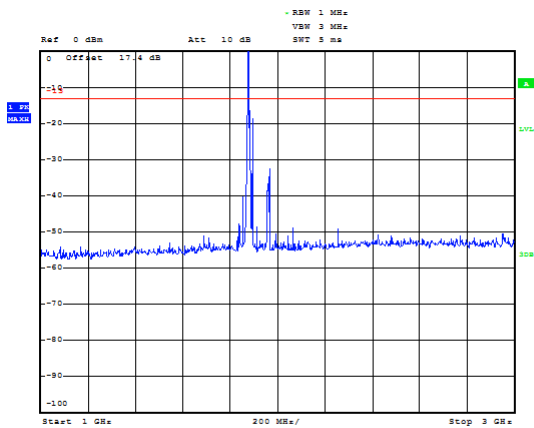


LTE Band 2 10MHz CH-High 1GHz~3GHz

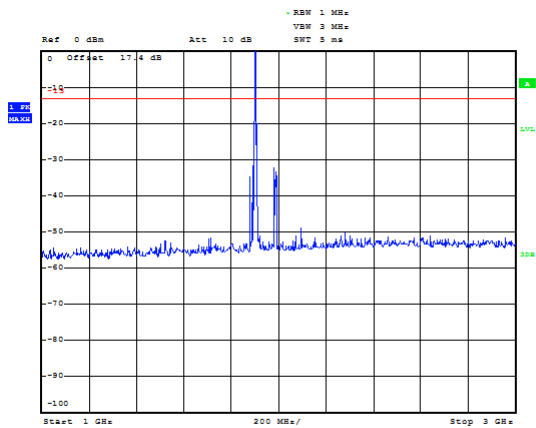

LTE Band 2 10MHz CH-Middle 3GHz~20GHz

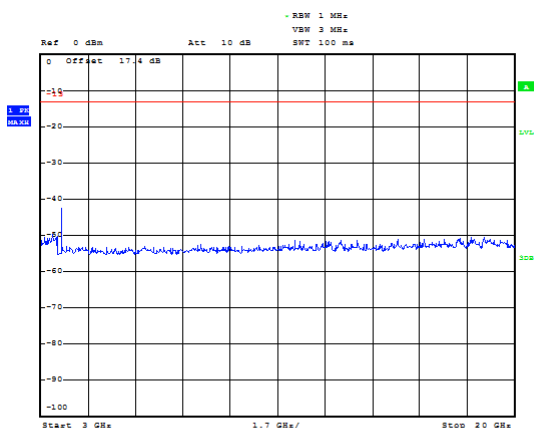


LTE Band 2 10MHz CH-High 3GHz~20GHz

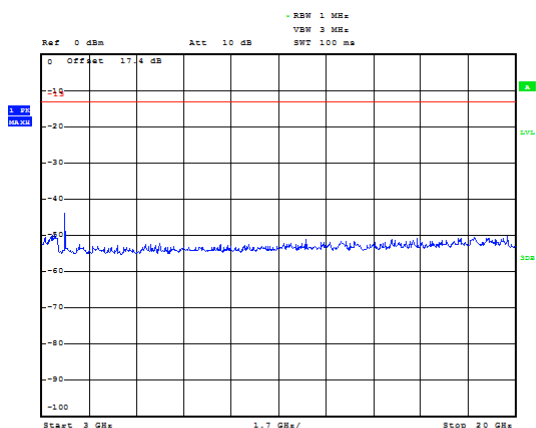





LTE Band 2 15MHz CH-Low 30MHz~1GHz

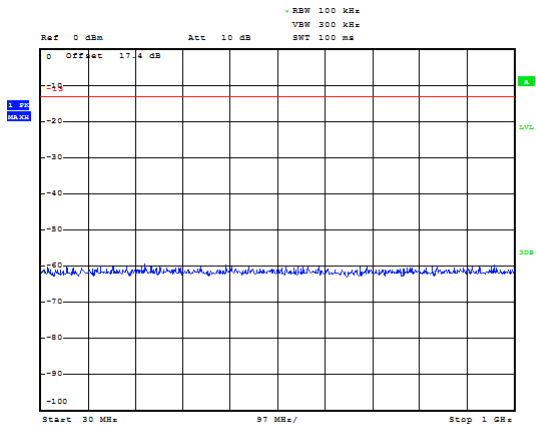


LTE Band 2 15MHz CH-Middle 30MHz~1GHz

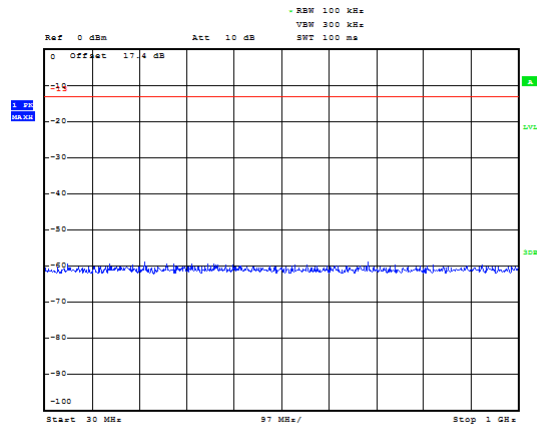


LTE Band 2 15MHz CH-Low 1GHz~3GHz

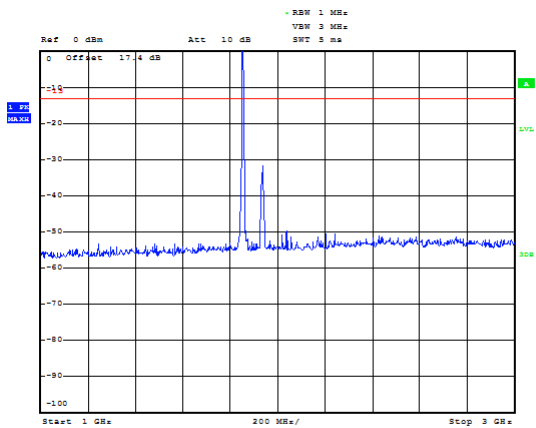


LTE Band 2 15MHz CH-Middle 1GHz~3GHz

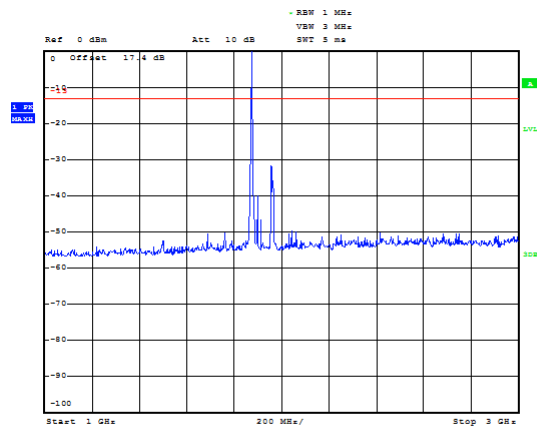

LTE Band 2 15MHz CH-Low 3GHz~20GHz

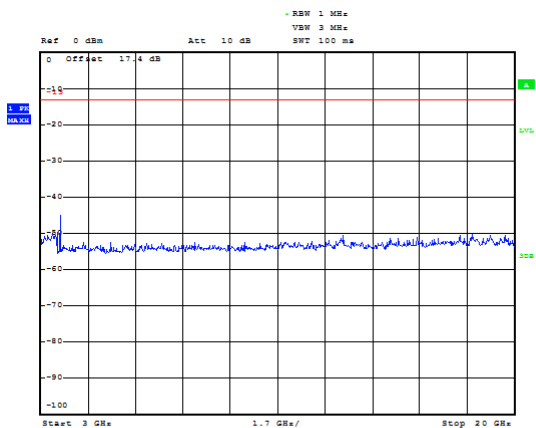


LTE Band 2 15MHz CH-Middle 3GHz~20GHz

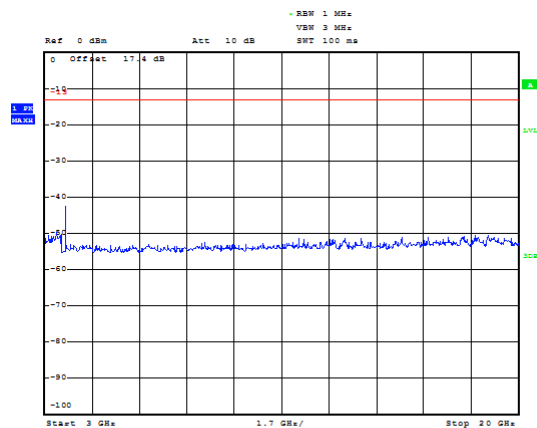





LTE Band 2 15MHz CH-High 30MHz~1GHz

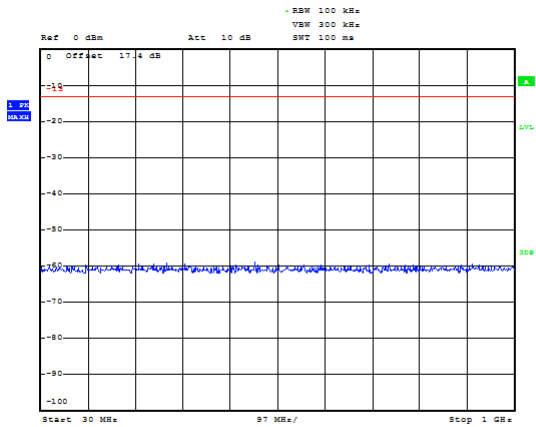


LTE Band 2 20MHz CH-Low 30MHz~1GHz

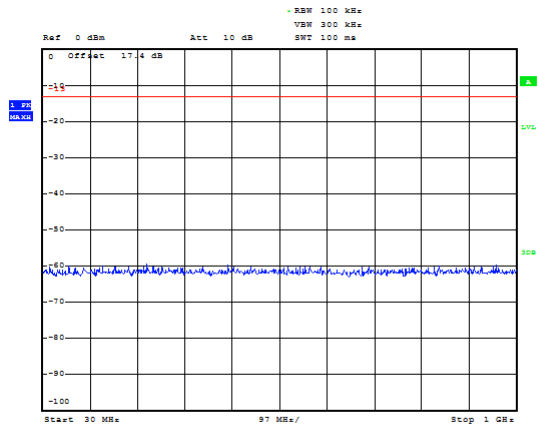


LTE Band 2 15MHz CH-High 1GHz~3GHz

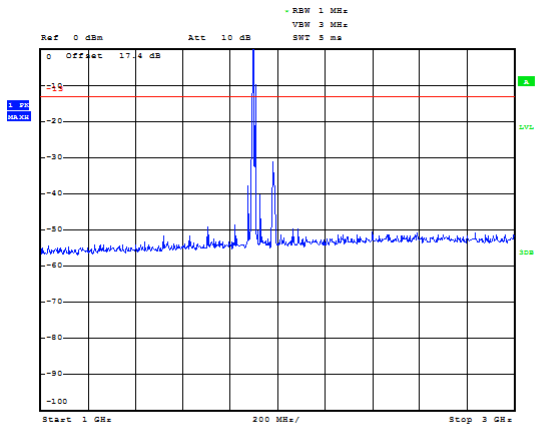


LTE Band 2 20MHz CH-Low 1GHz~3GHz

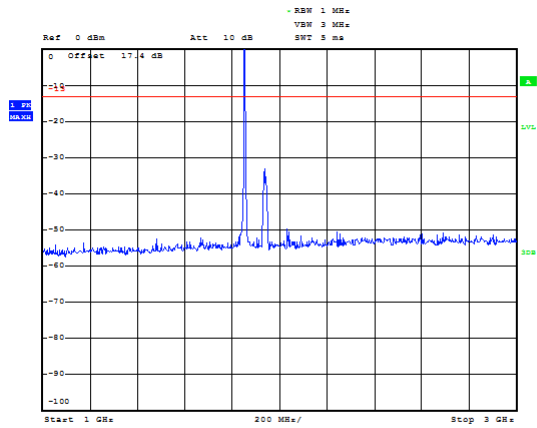

LTE Band 2 15MHz CH-High 3GHz~20GHz

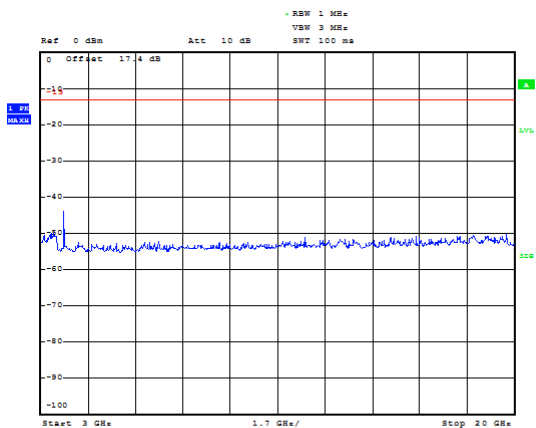


LTE Band 2 20MHz CH-Low 3GHz~20GHz

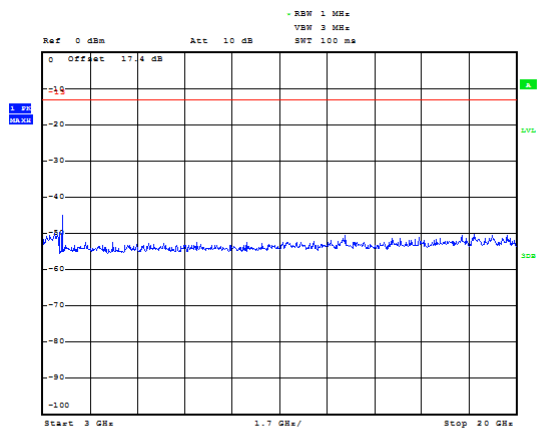





LTE Band 2 20MHz CH-Middle 30MHz~1GHz

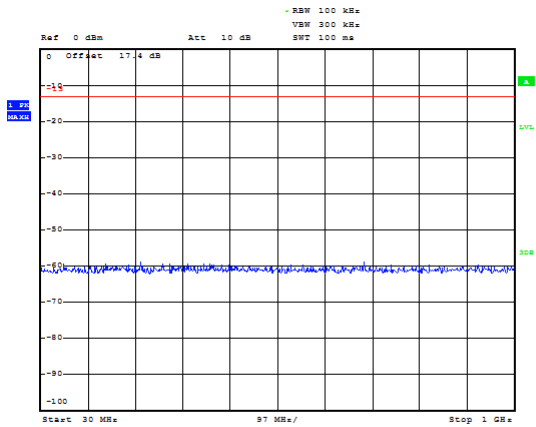


LTE Band 2 20MHz CH-High 30MHz~1GHz

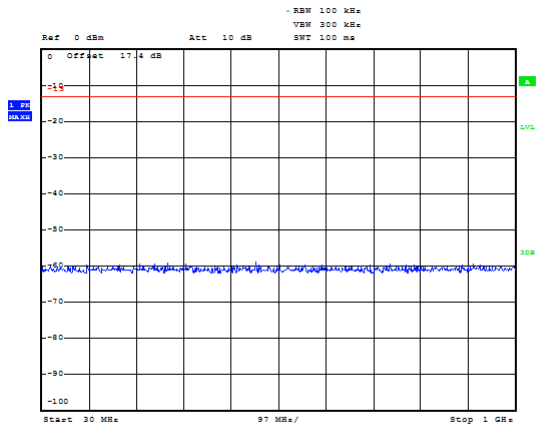


LTE Band 2 20MHz CH-Middle 1GHz~3GHz

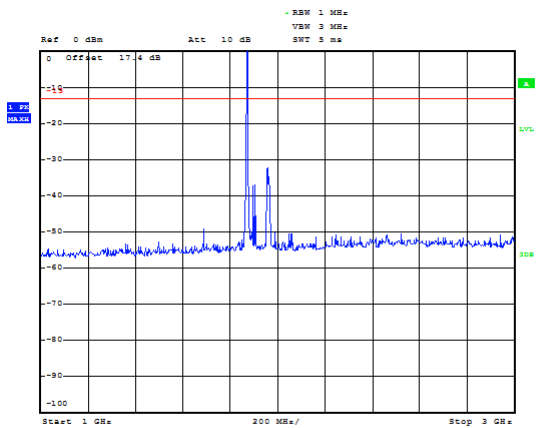


LTE Band 2 20MHz CH-High 1GHz~3GHz

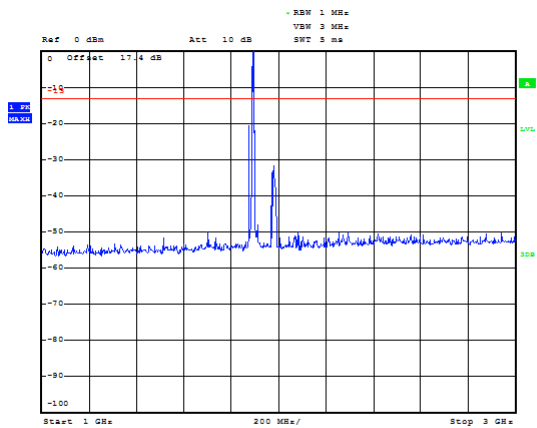

LTE Band 2 20MHz CH-Middle 3GHz~20GHz

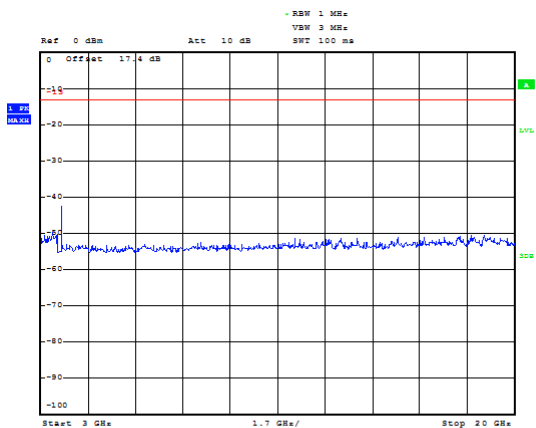

LTE Band 2 20MHz CH-High 3GHz~20GHz

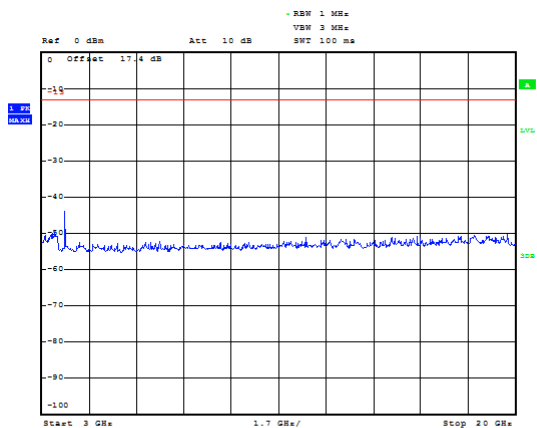

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-E (2016).
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

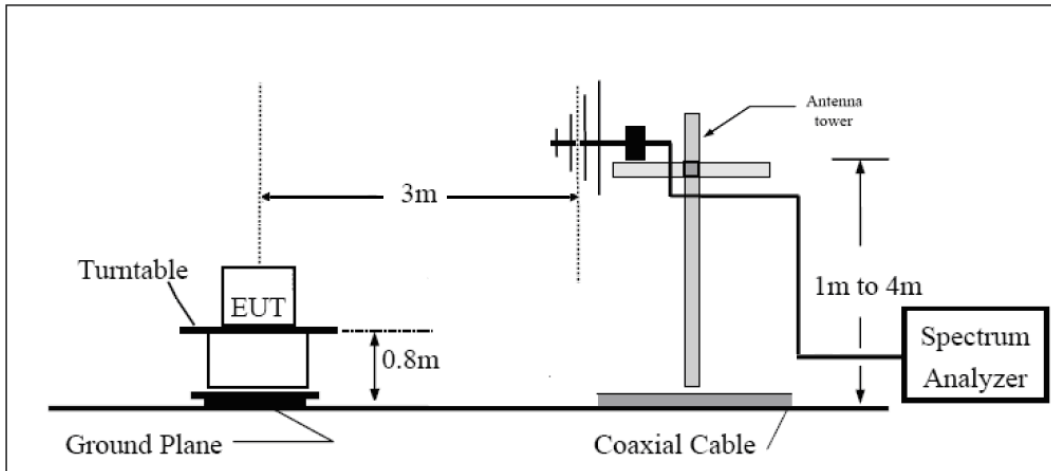

Above 1GHz

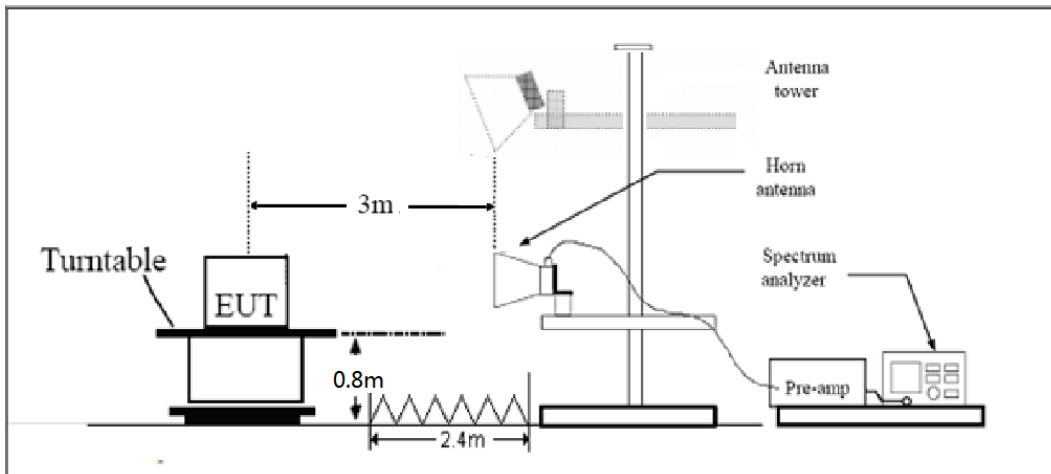

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

LTE Band 2, 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.5	-55.75	5.1	11.05	Horizontal	-49.8	-13.0	36.8	270
3	5550.8	-52.13	5.42	12.65	Horizontal	-44.9	-13.0	31.9	180
4	7402.8	-47.95	6.7	13.85	Horizontal	-40.8	-13.0	27.8	135
5	9253.5	-47.44	7.01	14.75	Horizontal	-39.7	-13.0	26.7	270
6	11104.2	-47.57	7.48	15.95	Horizontal	-39.1	-13.0	26.1	180
7	12954.9	-45.94	7.51	16.55	Horizontal	-36.9	-13.0	23.9	225
8	14805.6	-41.81	8.24	15.35	Horizontal	-34.7	-13.0	21.7	45
9	16656.3	-42.14	8.41	14.95	Horizontal	-35.6	-13.0	22.6	270
10	18507.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-55.05	5.10	11.05	Horizontal	-49.1	-13.0	36.1	135
3	5638.9	-50.53	5.42	12.65	Horizontal	-43.3	-13.0	30.3	270
4	7520.0	-49.55	6.70	13.85	Horizontal	-42.4	-13.0	29.4	180
5	9400.0	-48.04	7.01	14.75	Horizontal	-40.3	-13.0	27.3	225
6	11280.0	-46.97	7.48	15.95	Horizontal	-38.5	-13.0	25.5	270
7	13160.0	-47.64	7.51	16.55	Horizontal	-38.6	-13.0	25.6	180
8	15040.0	-44.81	8.24	15.35	Horizontal	-37.7	-13.0	24.7	135
9	16920.0	-43.04	8.41	14.95	Horizontal	-36.5	-13.0	23.5	270
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.5	-50.75	5.10	11.05	Horizontal	-44.8	-13.0	31.8	225
3	5726.6	-45.93	5.42	12.65	Horizontal	-38.7	-13.0	25.7	45
4	7637.2	-49.75	6.70	13.85	Horizontal	-42.6	-13.0	29.6	270
5	9546.5	-48.74	7.01	14.75	Horizontal	-41.0	-13.0	28.0	180
6	11455.8	-45.97	7.48	15.95	Horizontal	-37.5	-13.0	24.5	135
7	13365.1	-46.14	7.51	16.55	Horizontal	-37.1	-13.0	24.1	270
8	15274.4	-45.11	8.24	15.35	Horizontal	-38.0	-13.0	25.0	180
9	17183.7	-43.34	8.41	14.95	Horizontal	-36.8	-13.0	23.8	225
10	19093.0	/	/	/	/	/	/	/	/

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 3MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.1	-56.65	5.10	11.05	Horizontal	-50.7	-13.0	37.7	90
3	5550.8	-51.63	5.42	12.65	Horizontal	-44.4	-13.0	31.4	270
4	7406.0	-49.05	6.70	13.85	Horizontal	-41.9	-13.0	28.9	180
5	9257.5	-46.74	7.01	14.75	Horizontal	-39.0	-13.0	26.0	135
6	11109.0	-47.07	7.48	15.95	Horizontal	-38.6	-13.0	25.6	270
7	12960.5	-46.94	7.51	16.55	Horizontal	-37.9	-13.0	24.9	180
8	14812.0	-41.91	8.24	15.35	Horizontal	-34.8	-13.0	21.8	225
9	16663.5	-43.54	8.41	14.95	Horizontal	-37.0	-13.0	24.0	45
10	18515.0	/	/	/	/	/	/	/	/

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 3MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-55.65	5.10	11.05	Horizontal	-49.7	-13.0	36.7	180
3	5640.0	-50.33	5.42	12.65	Horizontal	-43.1	-13.0	30.1	270
4	7520.0	-48.65	6.70	13.85	Horizontal	-41.5	-13.0	28.5	45
5	9400.0	-47.54	7.01	14.75	Horizontal	-39.8	-13.0	26.8	90
6	11280.0	-46.77	7.48	15.95	Horizontal	-38.3	-13.0	25.3	135
7	13160.0	-48.94	7.51	16.55	Horizontal	-39.9	-13.0	26.9	225
8	15040.0	-44.51	8.24	15.35	Horizontal	-37.4	-13.0	24.4	180
9	16920.0	-43.04	8.41	14.95	Horizontal	-36.5	-13.0	23.5	270
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 3MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.0	-52.05	5.10	11.05	Horizontal	-46.1	-13.0	33.1	270
3	5725.5	-43.43	5.42	12.65	Horizontal	-36.2	-13.0	23.2	180
4	7634.0	-49.05	6.70	13.85	Horizontal	-41.9	-13.0	28.9	225
5	9542.5	-48.94	7.01	14.75	Horizontal	-41.2	-13.0	28.2	45
6	11451.0	-45.77	7.48	15.95	Horizontal	-37.3	-13.0	24.3	90
7	13359.5	-45.64	7.51	16.55	Horizontal	-36.6	-13.0	23.6	180
8	15268.0	-44.31	8.24	15.35	Horizontal	-37.2	-13.0	24.2	270
9	17176.5	-43.14	8.41	14.95	Horizontal	-36.6	-13.0	23.6	135
10	19085.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3705.0	-56.15	5.10	11.05	Horizontal	-50.2	-13.0	37.2	225
3	5557.5	-50.83	5.42	12.65	Horizontal	-43.6	-13.0	30.6	45
4	7410.0	-47.75	6.70	13.85	Horizontal	-40.6	-13.0	27.6	90
5	9262.5	-45.94	7.01	14.75	Horizontal	-38.2	-13.0	25.2	180
6	11115.0	-44.57	7.48	15.95	Horizontal	-36.1	-13.0	23.1	270
7	12967.5	-45.84	7.51	16.55	Horizontal	-36.8	-13.0	23.8	180
8	14820.0	-41.21	8.24	15.35	Horizontal	-34.1	-13.0	21.1	225
9	16672.5	-43.24	8.41	14.95	Horizontal	-36.7	-13.0	23.7	45
10	18525.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-56.15	5.10	11.05	Horizontal	-50.2	-13.0	37.2	180
3	5640.0	-49.23	5.42	12.65	Horizontal	-42.0	-13.0	29.0	135
4	7520.0	-49.15	6.70	13.85	Horizontal	-42.0	-13.0	29.0	270
5	9400.0	-47.64	7.01	14.75	Horizontal	-39.9	-13.0	26.9	180
6	11280.0	-45.37	7.48	15.95	Horizontal	-36.9	-13.0	23.9	225
7	13160.0	-47.94	7.51	16.55	Horizontal	-38.9	-13.0	25.9	45
8	15040.0	-43.91	8.24	15.35	Horizontal	-36.8	-13.0	23.8	90
9	16920.0	-41.64	8.41	14.95	Horizontal	-35.1	-13.0	22.1	270
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3815.0	-53.55	5.10	11.05	Horizontal	-47.6	-13.0	34.6	225
3	5722.5	-46.33	5.42	12.65	Horizontal	-39.1	-13.0	26.1	45
4	7630.0	-49.45	6.70	13.85	Horizontal	-42.3	-13.0	29.3	135
5	9537.5	-49.94	7.01	14.75	Horizontal	-42.2	-13.0	29.2	180
6	11445.0	-45.47	7.48	15.95	Horizontal	-37.0	-13.0	24.0	225
7	13352.5	-44.64	7.51	16.55	Horizontal	-35.6	-13.0	22.6	45
8	15260.0	-44.21	8.24	15.35	Horizontal	-37.1	-13.0	24.1	90
9	17167.5	-42.84	8.41	14.95	Horizontal	-36.3	-13.0	23.3	270
10	19075.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 10MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3710.0	-55.75	5.10	11.05	Horizontal	-49.8	-13.0	36.8	225
3	5565.0	-49.03	5.42	12.65	Horizontal	-41.8	-13.0	28.8	45
4	7420.0	-47.85	6.70	13.85	Horizontal	-40.7	-13.0	27.7	90
5	9275.0	-46.64	7.01	14.75	Horizontal	-38.9	-13.0	25.9	180
6	11130.0	-46.27	7.48	15.95	Horizontal	-37.8	-13.0	24.8	270
7	12985.0	-46.74	7.51	16.55	Horizontal	-37.7	-13.0	24.7	135
8	14840.0	-41.11	8.24	15.35	Horizontal	-34.0	-13.0	21.0	180
9	16695.0	-43.04	8.41	14.95	Horizontal	-36.5	-13.0	23.5	225
10	18550.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-54.95	5.10	11.05	Horizontal	-49.0	-13.0	36.0	90
3	5640.0	-46.53	5.42	12.65	Horizontal	-39.3	-13.0	26.3	180
4	7520.0	-47.95	6.70	13.85	Horizontal	-40.8	-13.0	27.8	270
5	9400.0	-48.14	7.01	14.75	Horizontal	-40.4	-13.0	27.4	180
6	11280.0	-46.97	7.48	15.95	Horizontal	-38.5	-13.0	25.5	225
7	13160.0	-47.24	7.51	16.55	Horizontal	-38.2	-13.0	25.2	45
8	15040.0	-44.31	8.24	15.35	Horizontal	-37.2	-13.0	24.2	90
9	16920.0	-41.94	8.41	14.95	Horizontal	-35.4	-13.0	22.4	180
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3810.0	-53.35	5.10	11.05	Horizontal	-47.4	-13.0	34.4	270
3	5715.0	-42.73	5.42	12.65	Horizontal	-35.5	-13.0	22.5	180
4	7620.0	-48.55	6.70	13.85	Horizontal	-41.4	-13.0	28.4	225
5	9525.0	-48.84	7.01	14.75	Horizontal	-41.1	-13.0	28.1	45
6	11430.0	-45.37	7.48	15.95	Horizontal	-36.9	-13.0	23.9	90
7	13335.0	-45.64	7.51	16.55	Horizontal	-36.6	-13.0	23.6	180
8	15240.0	-43.81	8.24	15.35	Horizontal	-36.7	-13.0	23.7	270
9	17145.0	-43.14	8.41	14.95	Horizontal	-36.6	-13.0	23.6	45
10	19050.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 15MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3715.0	-55.85	5.10	11.05	Horizontal	-49.9	-13.0	36.9	45
3	5572.5	-49.13	5.42	12.65	Horizontal	-41.9	-13.0	28.9	90
4	7430.0	-46.95	6.70	13.85	Horizontal	-39.8	-13.0	26.8	90
5	9287.5	-47.04	7.01	14.75	Horizontal	-39.3	-13.0	26.3	45
6	11145.0	-46.87	7.48	15.95	Horizontal	-38.4	-13.0	25.4	135
7	13002.5	-46.34	7.51	16.55	Horizontal	-37.3	-13.0	24.3	225
8	14860.0	-42.71	8.24	15.35	Horizontal	-35.6	-13.0	22.6	45
9	16717.5	-42.64	8.41	14.95	Horizontal	-36.1	-13.0	23.1	90
10	18575.0	/	/	/	/	/	/	/	/

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-54.55	5.10	11.05	Horizontal	-48.6	-13.0	35.6	135
3	5640.0	-48.83	5.42	12.65	Horizontal	-41.6	-13.0	28.6	45
4	7520.0	-48.85	6.70	13.85	Horizontal	-41.7	-13.0	28.7	90
5	9400.0	-47.64	7.01	14.75	Horizontal	-39.9	-13.0	26.9	180
6	11280.0	-45.97	7.48	15.95	Horizontal	-37.5	-13.0	24.5	270
7	13160.0	-48.34	7.51	16.55	Horizontal	-39.3	-13.0	26.3	225
8	15040.0	-45.11	8.24	15.35	Horizontal	-38.0	-13.0	25.0	135
9	16920.0	-41.44	8.41	14.95	Horizontal	-34.9	-13.0	21.9	225
10	18800.0	/	/	/	/	/	/	/	/

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 15MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3805.0	-52.05	5.10	11.05	Horizontal	-46.1	-13.0	33.1	90
3	5707.5	-42.43	5.42	12.65	Horizontal	-35.2	-13.0	22.2	135
4	7610.0	-49.45	6.70	13.85	Horizontal	-42.3	-13.0	29.3	225
5	9512.5	-48.84	7.01	14.75	Horizontal	-41.1	-13.0	28.1	45
6	11415.0	-44.87	7.48	15.95	Horizontal	-36.4	-13.0	23.4	90
7	13317.5	-45.94	7.51	16.55	Horizontal	-36.9	-13.0	23.9	135
8	15220.0	-44.01	8.24	15.35	Horizontal	-36.9	-13.0	23.9	135
9	17122.5	-42.84	8.41	14.95	Horizontal	-36.3	-13.0	23.3	90
10	19025.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 20MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3720.0	-56.25	5.10	11.05	Horizontal	-50.3	-13.0	37.3	135
3	5580.0	-49.63	5.42	12.65	Horizontal	-42.4	-13.0	29.4	90
4	7440.0	-48.35	6.70	13.85	Horizontal	-41.2	-13.0	28.2	45
5	9300.0	-45.34	7.01	14.75	Horizontal	-37.6	-13.0	24.6	90
6	11160.0	-46.97	7.48	15.95	Horizontal	-38.5	-13.0	25.5	90
7	13020.0	-46.34	7.51	16.55	Horizontal	-37.3	-13.0	24.3	135
8	14880.0	-41.51	8.24	15.35	Horizontal	-34.4	-13.0	21.4	225
9	16740.0	-42.84	8.41	14.95	Horizontal	-36.3	-13.0	23.3	135
10	18600.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2, 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-55.65	5.10	11.05	Horizontal	-49.7	-13.0	36.7	90
3	5640.0	-49.03	5.42	12.65	Horizontal	-41.8	-13.0	28.8	45
4	7520.0	-48.85	6.70	13.85	Horizontal	-41.7	-13.0	28.7	45
5	9400.0	-47.14	7.01	14.75	Horizontal	-39.4	-13.0	26.4	180
6	11280.0	-47.17	7.48	15.95	Horizontal	-38.7	-13.0	25.7	270
7	13160.0	-48.34	7.51	16.55	Horizontal	-39.3	-13.0	26.3	225
8	15040.0	-44.81	8.24	15.35	Horizontal	-37.7	-13.0	24.7	135
9	16920.0	-42.34	8.41	14.95	Horizontal	-35.8	-13.0	22.8	180
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2, 20MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3800.0	-55.15	5.10	11.05	Horizontal	-49.2	-13.0	36.2	45
3	5700.0	-46.53	5.42	12.65	Horizontal	-39.3	-13.0	26.3	225
4	7600.0	-49.95	6.70	13.85	Horizontal	-42.8	-13.0	29.8	135
5	9500.0	-49.64	7.01	14.75	Horizontal	-41.9	-13.0	28.9	90
6	11400.0	-44.47	7.48	15.95	Horizontal	-36.0	-13.0	23.0	45
7	13300.0	-45.94	7.51	16.55	Horizontal	-36.9	-13.0	23.9	90
8	15200.0	-43.61	8.24	15.35	Horizontal	-36.5	-13.0	23.5	45
9	17100.0	-43.44	8.41	14.95	Horizontal	-36.9	-13.0	23.9	135
10	19000.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.




6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2017-05-14	2018-05-13
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	2017-05-14	2018-05-13
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
Signal generator	R&S	SMB 100A	102594	2017-05-14	2018-05-13
Signal generator	R&S	SMR27	100365	2017-05-14	2018-05-13
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2020-01-29
RF Cable	Agilent	SMA 15cm	0001	2018-02-03	2018-08-02
Preamplifier	R&S	SCU18	102327	2017-06-18	2018-06-17
Software	R&S	EMC32	V 8.52.0	NA	NA
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2017-05-14	2018-05-13

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance

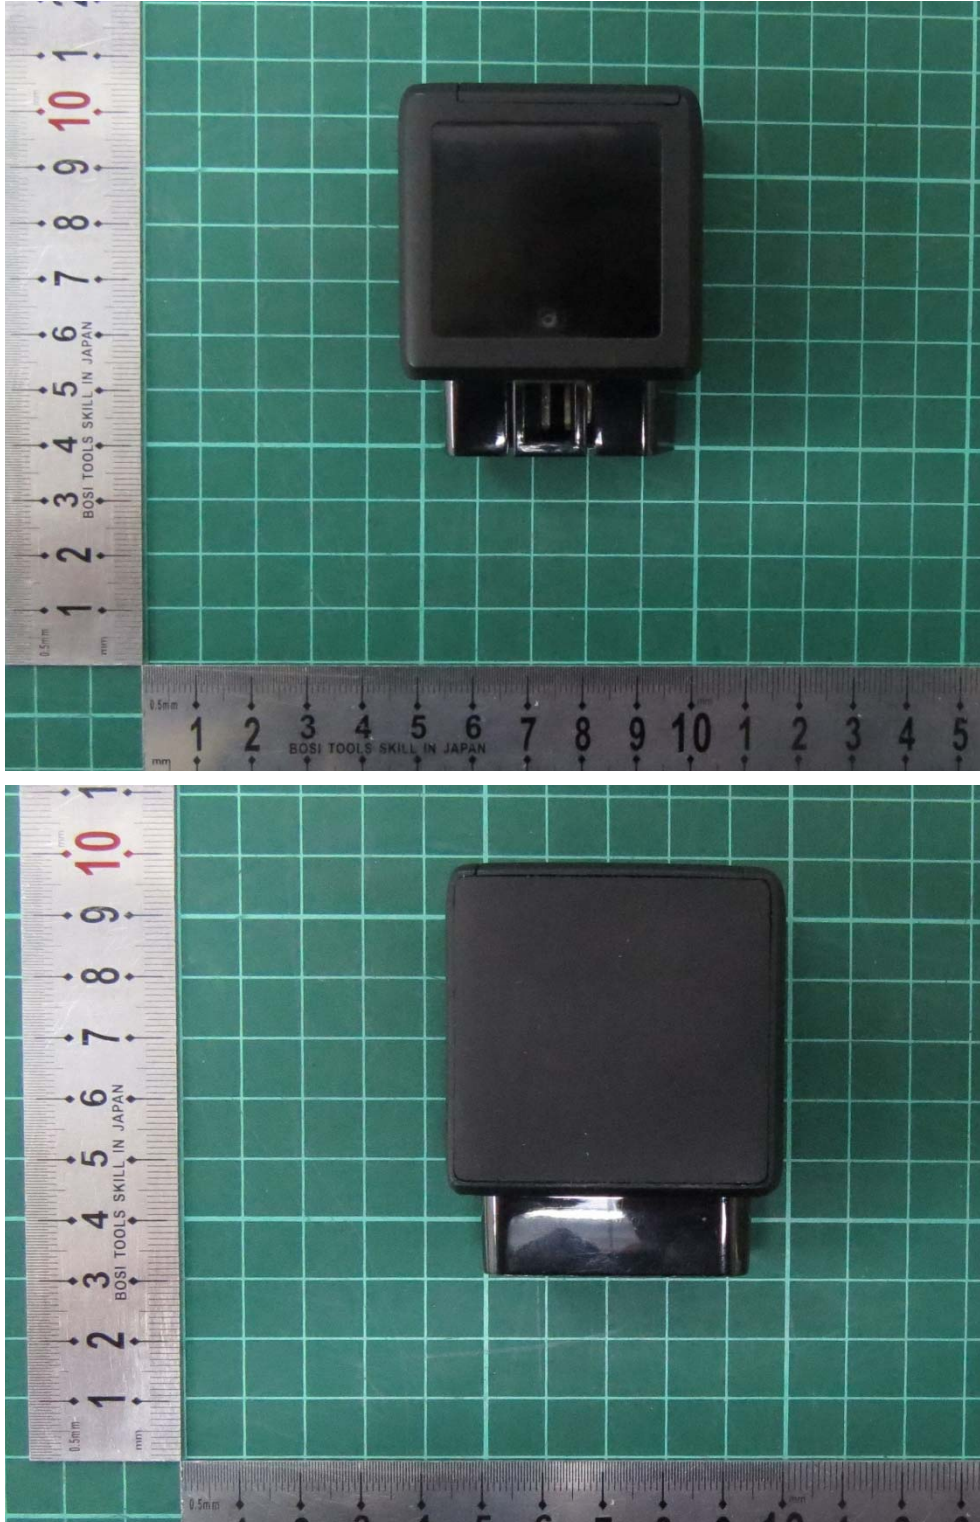

Picture 1 EUT

A.2 Test Setup



Picture 2: Radiated Spurious Emissions Test setup