

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBHWX-WTW-P23100519-2
FCC ID: A94442368
Product: SOUNDLINK MAX PORTABLE SPEAKER
Brand: Bose
Model No.: 442368
Received Date: 2023/10/23
Test Date: 2023/12/28 ~ 2024/2/27
Issued Date: 2024/3/7

Applicant: Bose Corporation
Address: The Mountain, Framingham, MA 01701 USA
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan
FCC Registration / 788550 / TW0003
Designation Number:

Approved by: _____

Jeremy Lin

, Date: _____

2024/3/7

Jeremy Lin / Project Engineer

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Gina Liu / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	7
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	9
3.6 Test Program Used and Operation Descriptions	10
3.7 Connection Diagram of EUT and Peripheral Devices	10
3.8 Configuration of Peripheral Devices and Cable Connections	11
4 Test Instruments	12
4.1 RF Output Power	12
4.2 Number of Hopping Frequency Used	12
4.3 Dwell Time on Each Channel	12
4.4 Hopping Channel Separation	12
4.5 20 dB Bandwidth	12
4.6 Conducted Out of Band Emissions	12
4.7 AC Power Conducted Emissions	13
4.8 Unwanted Emissions below 1 GHz	14
4.9 Unwanted Emissions above 1 GHz.....	15
5 Limits of Test Items.....	16
5.1 RF Output Power	16
5.2 Number of Hopping Frequency Used	16
5.3 Dwell Time on Each Channel	16
5.4 Hopping Channel Separation	16
5.5 20 dB Bandwidth	16
5.6 Conducted Out of Band Emissions	16
5.7 AC Power Conducted Emissions	16
5.8 Unwanted Emissions below 1 GHz	17
5.9 Unwanted Emissions above 1 GHz.....	17
6 Test Arrangements.....	18
6.1 RF Output Power	18
6.1.1 Test Setup	18
6.1.2 Test Procedure	18
6.2 Number of Hopping Frequency Used	18
6.2.1 Test Setup	18
6.2.2 Test Procedure	18
6.3 Dwell Time on Each Channel	19
6.3.1 Test Setup	19
6.3.2 Test Procedure	19
6.4 Hopping Channel Separation	19
6.4.1 Test Setup	19
6.4.2 Test Procedure	19
6.5 20 dB Bandwidth	20
6.5.1 Test Setup	20
6.5.2 Test Procedure	20
6.6 Conducted Out of Band Emissions	20
6.6.1 Test Setup	20
6.6.2 Test Procedure	20
6.7 AC Power Conducted Emissions	21



6.7.1	Test Setup	21
6.7.2	Test Procedure	21
6.8	Unwanted Emissions below 1 GHz	22
6.8.1	Test Setup	22
6.8.2	Test Procedure	23
6.9	Unwanted Emissions above 1 GHz	24
6.9.1	Test Setup	24
6.9.2	Test Procedure	24
7	Test Results of Test Item	25
7.1	RF Output Power	25
7.2	Number of Hopping Frequency Used	26
7.3	Dwell Time on Each Channel	27
7.4	Hopping Channel Separation	28
7.5	20 dB Bandwidth	29
7.6	Conducted Out of Band Emissions	30
7.7	AC Power Conducted Emissions	32
7.8	Unwanted Emissions below 1 GHz	36
7.9	Unwanted Emissions above 1 GHz	40
8	Pictures of Test Arrangements	48
9	Information of the Testing Laboratories	49



Release Control Record

Issue No.	Description	Date Issued
RFBHWX-WTW-P23100519-2	Original release.	2024/3/7

1 Certificate

Product: SOUNDLINK MAX PORTABLE SPEAKER

Brand: Bose

Test Model: 442368

Sample Status: Engineering sample

Applicant: Bose Corporation

Test Date: 2023/12/28 ~ 2024/2/27

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247 (a)(1)	RF Output Power	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	Hopping Channel Separation	Pass	Meet the requirement of limit.
15.247(a)(1)	20 dB Bandwidth	-	Refer to Note 1
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -22.94 dB at 0.47800 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.0 dB at 204.32 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -11.5 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes:

1. If the Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
20 dB Bandwidth	-	206.5 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	30 MHz ~ 1 GHz	2.02 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.01 dB
	18 GHz ~ 40 GHz	1.15 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	SOUNDLINK MAX PORTABLE SPEAKER
Brand	Bose
Test Model	442368
Status of EUT	Engineering sample
Power Supply Rating	Refer to note
Modulation Type	$\pi/4$ QPSK (HSL2, HSL3) $\pi/4$ DQPSK (HSL4) 8PSK (HSL5) D8PSK (HSL6)
Modulation Technology	FHSS
Transfer Rate	Up to 6 Mbps
Operating Frequency	2.404 GHz ~ 2.478 GHz
Number of Channel	38
Output Power	7.78 mW (8.91 dBm)

Note:

1. The EUT uses following accessories.

Battery			
Brand	Model	Specification	
BOSE	084952	Power Rating : 10.89Vdc Manufacturer : Inventus Power, Inc.	
AC Adapter 1			
Brand	Model	Part Number	Specification
BOSE	F5V-3C-TC-US	830485-0010	DC Output : 5 Vdc, 3A Manufacturer : GROUP INTELLECT POWER TECHNOLOGY
AC Adapter 2			
Brand	Model	Part Number	Specification
BOSE	S015AWU0500300	830485-0010	DC Output : 5 Vdc, 3A Manufacturer : TEN PAO
USB Cable			
Rating	Part number	Specification	
20 V	831814-1500	Signal Line : 1.5M	

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	Gain (dBi)	Antenna Type	Connector Type
	2400~2483.5 MHz		
1	4.52	Inverted-F PCB	none(like solder)

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.3 Channel List

38 channels are provided for HSL-C:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460		
10	2422	20	2442	30	2462		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. The EUT had been pre-tested on modulation type HSL2, HSL3, HSL 4, HSL 5, HSL 6. The worst case was found when data rate was HSL2 and HSL6 and chosen for final test.
Worst Case:	1. X-axis/ Y-axis/ Z-axis Worst Condition: X-axis


Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Tested Channel & Tested Frequency	Modulation	Data Rate Parameter
RF Output Power	A	HSL2	1, 19, 38	$\pi/4$ QPSK	2Mb/s
		HSL6	1, 19, 38	D8PSK	6Mb/s
Number of Hopping Frequency Used	A	HSL2	Hopping	$\pi/4$ QPSK	2Mb/s
		HSL6	Hopping	D8PSK	6Mb/s
Dwell Time on Each Channel	A	HSL2	Hopping	$\pi/4$ QPSK	2Mb/s
		HSL6	Hopping	D8PSK	6Mb/s
Hopping Channel Separation / 20 dB Bandwidth	A	HSL2	1, 19, 38	$\pi/4$ QPSK	2Mb/s
		HSL6	1, 19, 38	D8PSK	6Mb/s
Conducted Out of Band Emissions	A	HSL2	Hopping 1, 19, 38	$\pi/4$ QPSK	2Mb/s
		HSL6	Hopping 1, 19, 38	D8PSK	6Mb/s
AC Power Conducted Emissions	A, B	HSL6	19	D8PSK	6Mb/s
Unwanted Emissions below 1 GHz	A, B	HSL6	19	D8PSK	6Mb/s
Unwanted Emissions above 1 GHz	A	HSL2	1, 19, 38	$\pi/4$ QPSK	2Mb/s
		HSL6	1, 19, 38	D8PSK	6Mb/s
EUT Configure Mode	A	Adapter 1			
	B	Adapter 2			

3.5 Duty Cycle of Test Signal

HSL-C 2M: Duty cycle = 2.2 ms / 100 ms x 100% = 2.2%

HSL-C 6M: Duty cycle = 2.2 ms / 100 ms x 100% = 2.2%

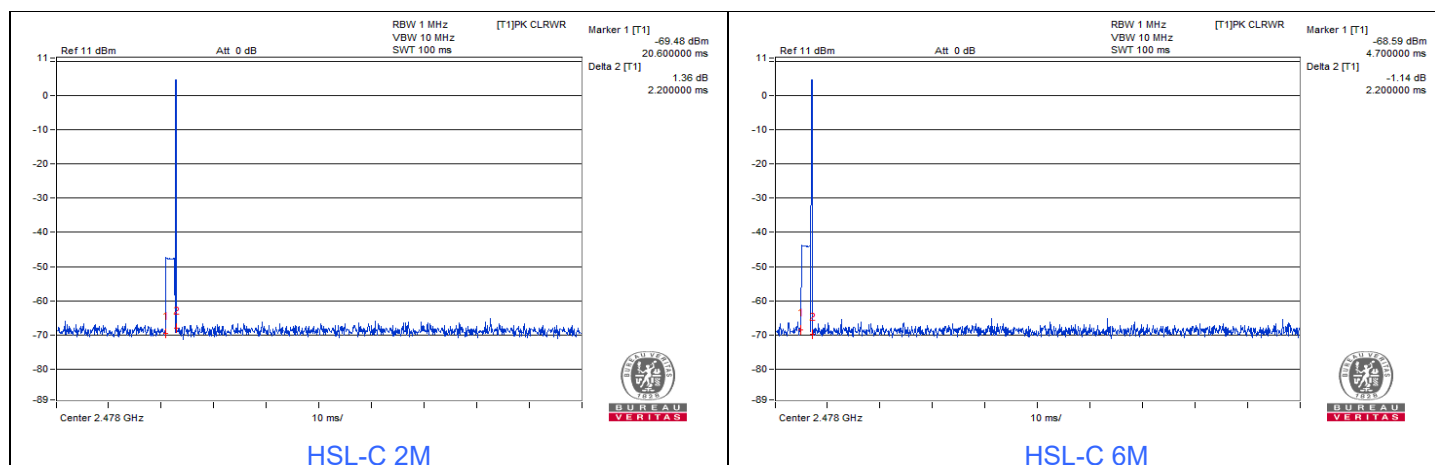


3.6 Test Program Used and Operation Descriptions

Controlling software Blue Test3 version: 3.3.15.1537 has been activated to set the EUT under transmission condition continuously at specific channel frequency.


3.7 Connection Diagram of EUT and Peripheral Devices

For Unwanted Emissions above 1 GHz

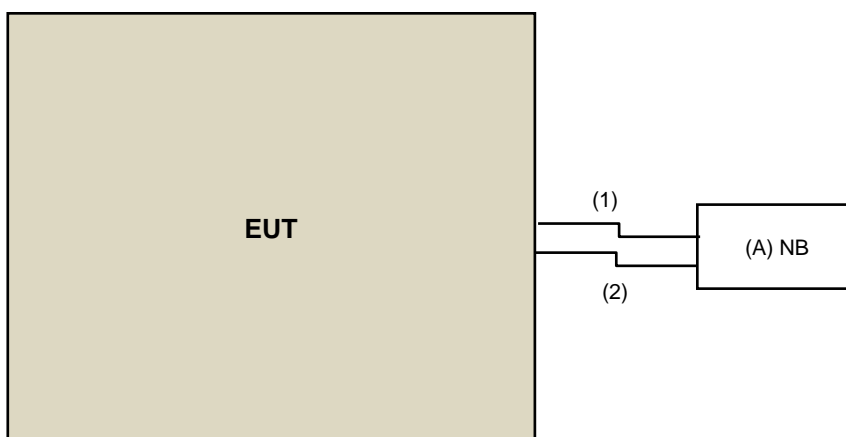

Under Table

For Unwanted Emissions below 1 GHz & AC Power Conducted Emissions

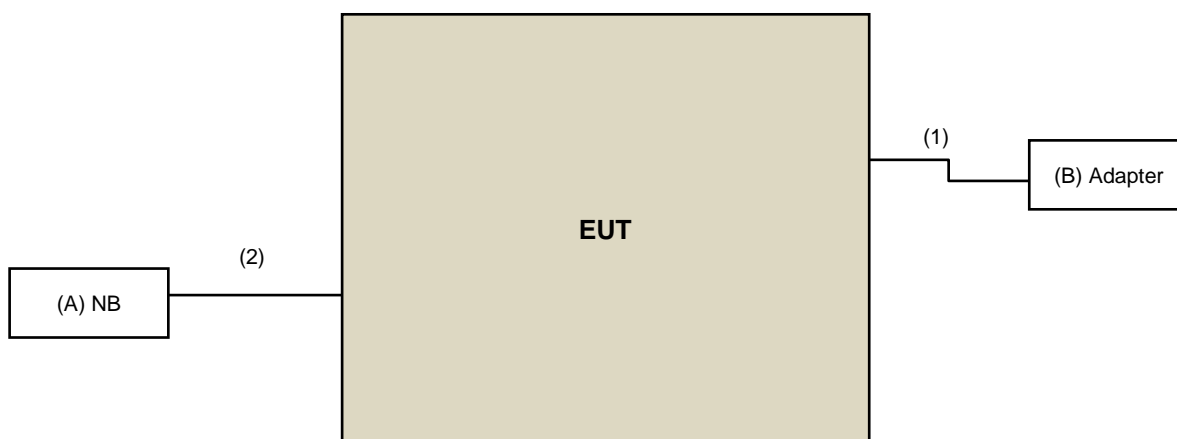

Under Table

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	NB	Lenovo	P00048A	N/A	N/A	Provided by Lab
B	Adapter	BOSE	F5V-3C-TC-US	N/A	N/A	Supplied by applicant, For Mode A
		BOSE	S015AWU0500300	N/A	N/A	Supplied by applicant, For Mode B

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB type C Cable	1	1.5	NO	0	Supplied by applicant
2	AUX Cable	1	1.5	NO	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/2/21

4.2 Number of Hopping Frequency Used

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/2/21

4.3 Dwell Time on Each Channel

Refer to section 4.2 to get information of the instruments.

4.4 Hopping Channel Separation

Refer to section 4.2 to get information of the instruments.

4.5 20 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.6 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011315	13	2023/11/22	2024/11/21
50 ohm terminal resistance	E1-011279	04	2023/11/22	2024/11/21
	E1-011280	05	2023/11/22	2024/11/21
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2023/11/7	2024/11/6
EMI Test Receiver R&S	ESR3	102783	2023/12/13	2024/12/12
Fixed Attenuator SGH	BNC10W10dB	PAD-COND2-01	2023/9/2	2024/9/1
LISN R&S	ESH2-Z5	100100	2023/3/7	2024/3/6
	ESH3-Z5	100312	2023/9/12	2024/9/11
RF Coaxial Cable Woken	5D-FB	Cable-cond2-01	2023/9/2	2024/9/1
Software BVADT	BVADT_Cond_ V7.3.7.4	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2023/8/31	2024/8/30

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2024/1/31 ~ 2024/2/26

4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-616	2023/10/18	2024/10/17
MXE EMI Receiver Agilent	N9038A	MY52260177	2023/9/15	2024/9/14
Preamplifier Agilent	310N	187226	2023/6/13	2024/6/12
PXA Signal Analyzer Keysight	N9030A	MY54490561	2023/7/25	2024/7/24
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4)	2023/6/13	2024/6/12
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2023/6/13	2024/6/12
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2024/1/10 ~ 2024/2/27

4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	UNAT_5+	PAD-CH6-01	N/A	N/A
Antenna Tower Controller Max-Full	MF-7802	N/A	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	8	N/A	N/A
Horn Antenna ETS-Lindgren	3117	00143293	2023/11/12	2024/11/11
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2023/10/16	2024/10/15
MXE EMI Receiver Agilent	N9038A	MY52260177	2023/9/15	2024/9/14
Preamplifier Agilent	83017A	MY39501373	2023/6/13	2024/6/12
Preamplifier EMCI	EMC 184045	980116	2023/9/27	2024/9/26
PXA Signal Analyzer Keysight	N9030A	MY54490561	2023/7/25	2024/7/24
RF Coaxial Cable ETS-Lindgren	EMC104-SM-SM-10000	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-4)	2023/6/13	2024/6/12
	RFC-SMS-100-SMS-24-IN	Cable-CH1-02(RFC-SMS-100-SMS-24)	2023/6/13	2024/6/12
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2023/1/7	2024/1/6
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2023/1/7	2024/1/6
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	TT-1510	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802	N/A	N/A	N/A

Notes:

1. The test was performed in XD - 966 chamber 6.
2. Tested Date: 2023/12/28

5 Limits of Test Items

5.1 RF Output Power

The Maximum Output Power Measurement is 125 mW (21 dBm).

5.2 Number of Hopping Frequency Used

At least 15 channels frequencies, and should be equally spaced.

5.3 Dwell Time on Each Channel

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.4 Hopping Channel Separation

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

5.5 20 dB Bandwidth

Maximum bandwidth is not specified.

5.6 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.9 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



6.1.2 Test Procedure

Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Number of Hopping Frequency Used

6.2.1 Test Setup

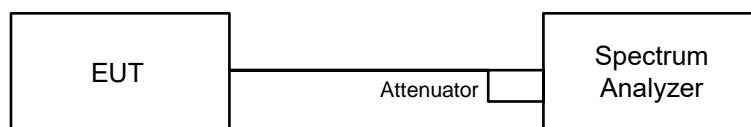


6.2.2 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

6.3 Dwell Time on Each Channel

6.3.1 Test Setup

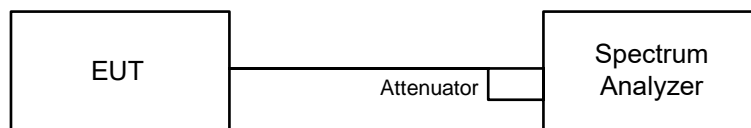


6.3.2 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

6.4 Hopping Channel Separation

6.4.1 Test Setup




6.4.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

6.5 20 dB Bandwidth

6.5.1 Test Setup

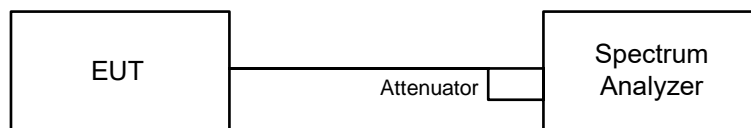


6.5.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

6.6 Conducted Out of Band Emissions

6.6.1 Test Setup



6.6.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

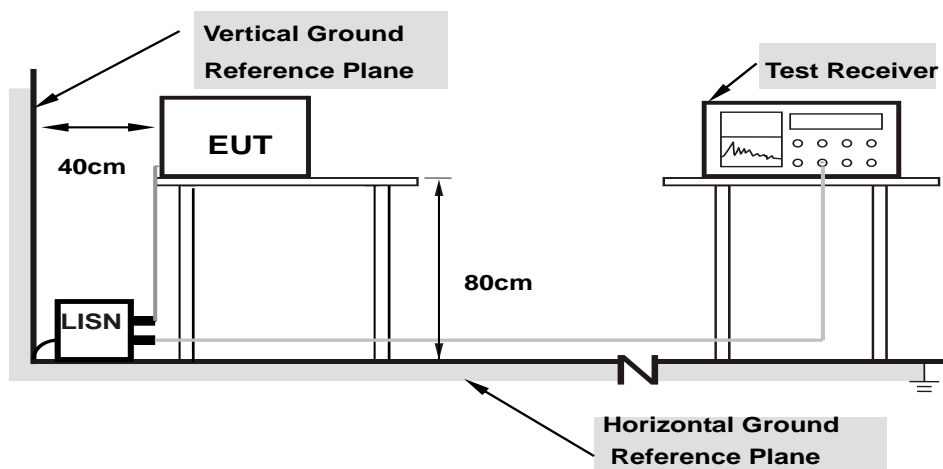

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.8 Unwanted Emissions below 1 GHz

6.8.1 Test Setup

For Radiated emission below 30 MHz

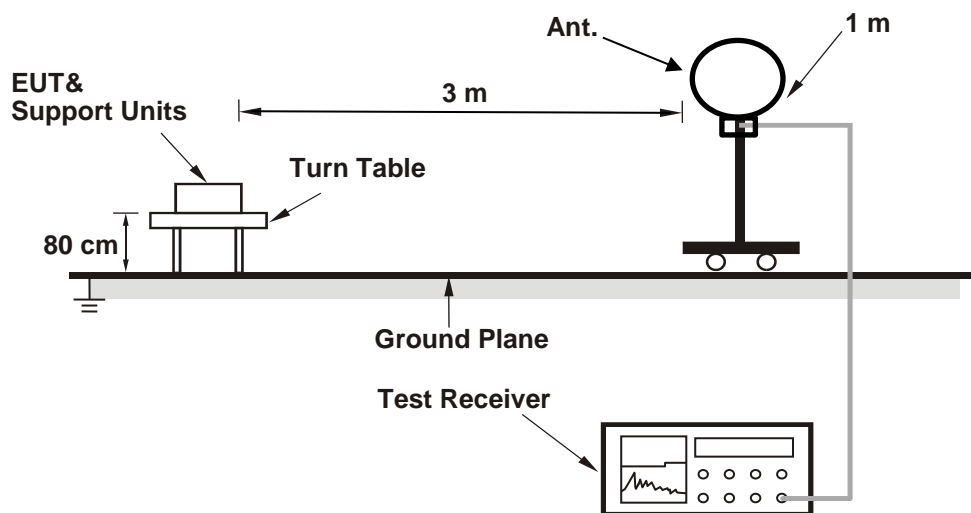

For Radiated emission above 30 MHz

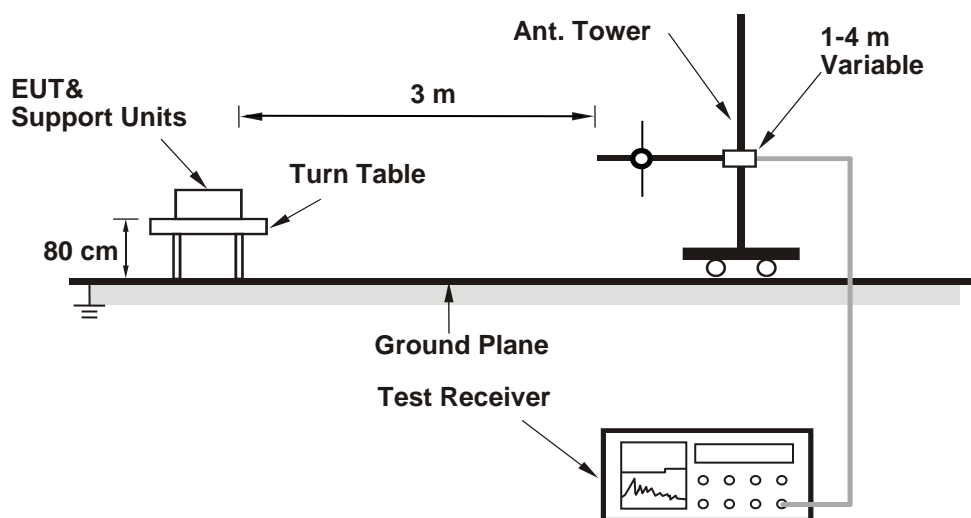

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

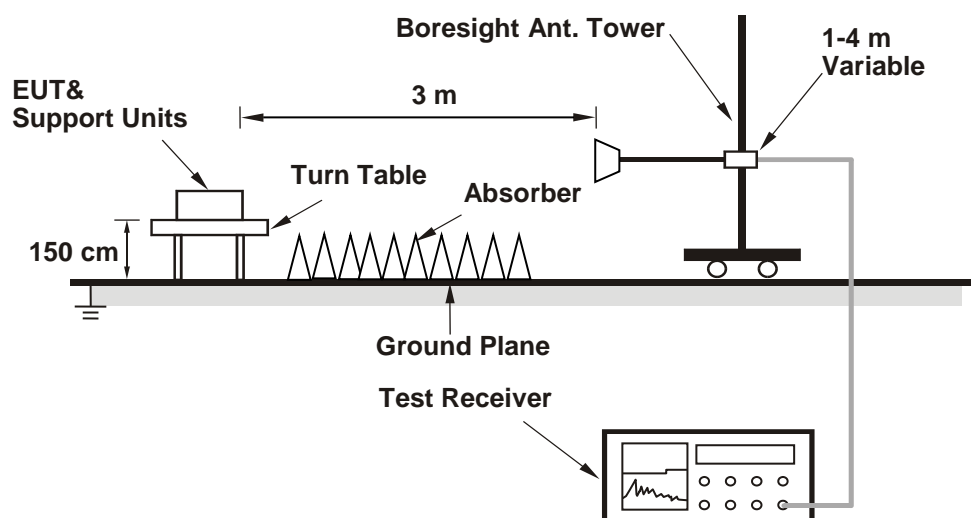

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- According to ANSI C63.10 section 6.6.4 and 4.1.4.2.2. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. For duty cycle correction factor values, see the Test Signal Duty Cycle section in this report.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	---------------	---------------------------	--------------	------------	-----------

For Peak Power

HSL-C 2M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2404	6.776	8.31	21	Pass
19	2440	6.761	8.30	21	Pass
38	2478	6.397	8.06	21	Pass

Note: The antenna gain is 4.52 dBi < 6 dBi, so the output power limit shall not be reduced.

HSL-C 6M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2404	7.762	8.90	21	Pass
19	2440	7.78	8.91	21	Pass
38	2478	7.447	8.72	21	Pass

Note: The antenna gain is 4.52 dBi < 6 dBi, so the output power limit shall not be reduced.

For Average Power

HSL-C 2M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	3.589	5.55
19	2440	3.573	5.53
38	2478	3.499	5.44

HSL-C 6M


Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	3.597	5.56
19	2440	3.793	5.79
38	2478	3.516	5.46



7.2 Number of Hopping Frequency Used


Input Power:	120 Vac, 60Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	---------------	---------------------------	--------------	------------	-----------

HSL-C 2M

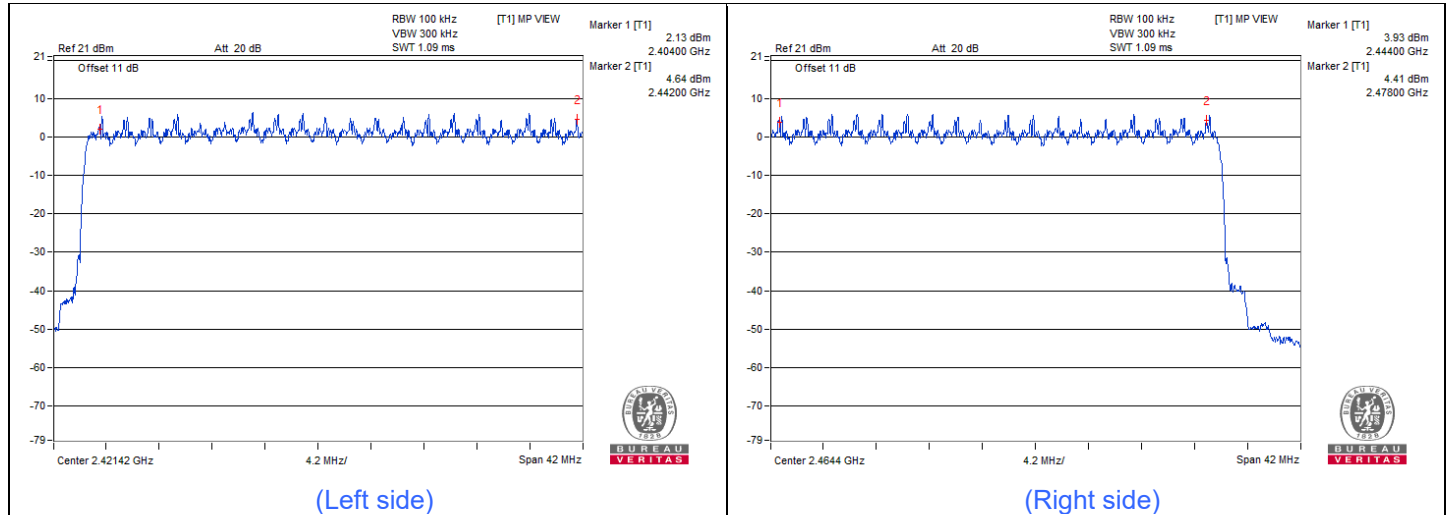

Note: There are 38 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

HSL-C 6M

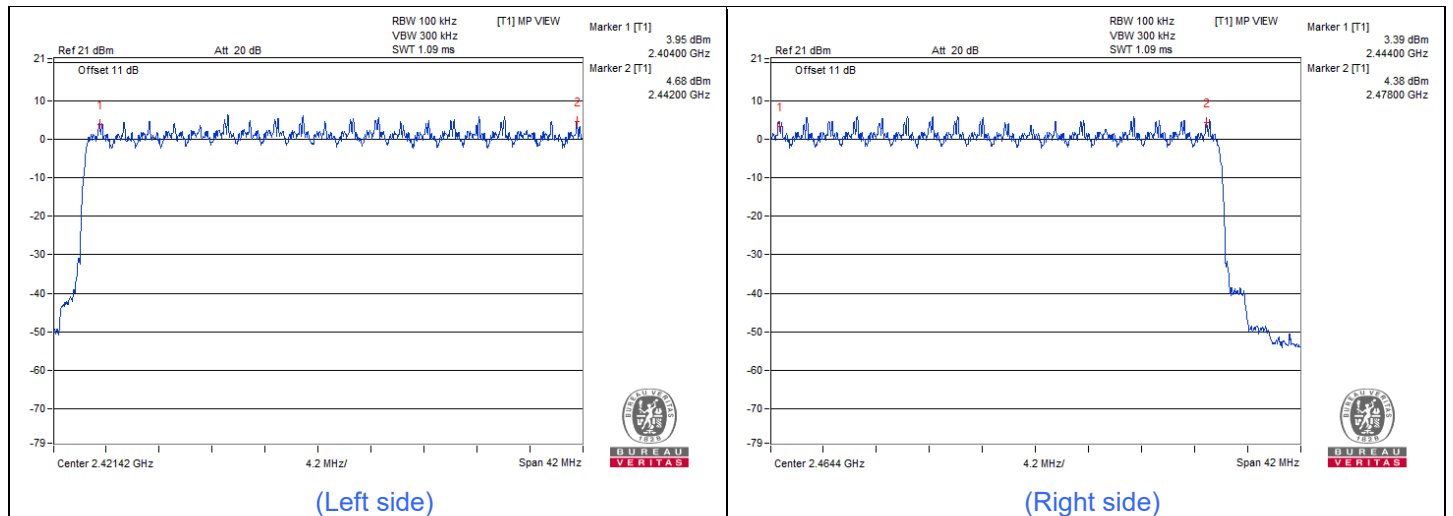


Note: There are 38 hopping frequencies in the hopping mode. On the plots, it shows that the hopping frequencies are equally spaced.

7.3 Dwell Time on Each Channel

Input Power:	120 Vac, 60Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	---------------	---------------------------	--------------	------------	-----------


HSL-C 2M

Mode	Number of transmission in 15.2 sec	Length of transmission time (msec)	Result (msec)	Limit (msec)	Test Result
FHSS	10 (times / 5 sec) * 3.04 = 31 times	0.153	4.743	400	Pass

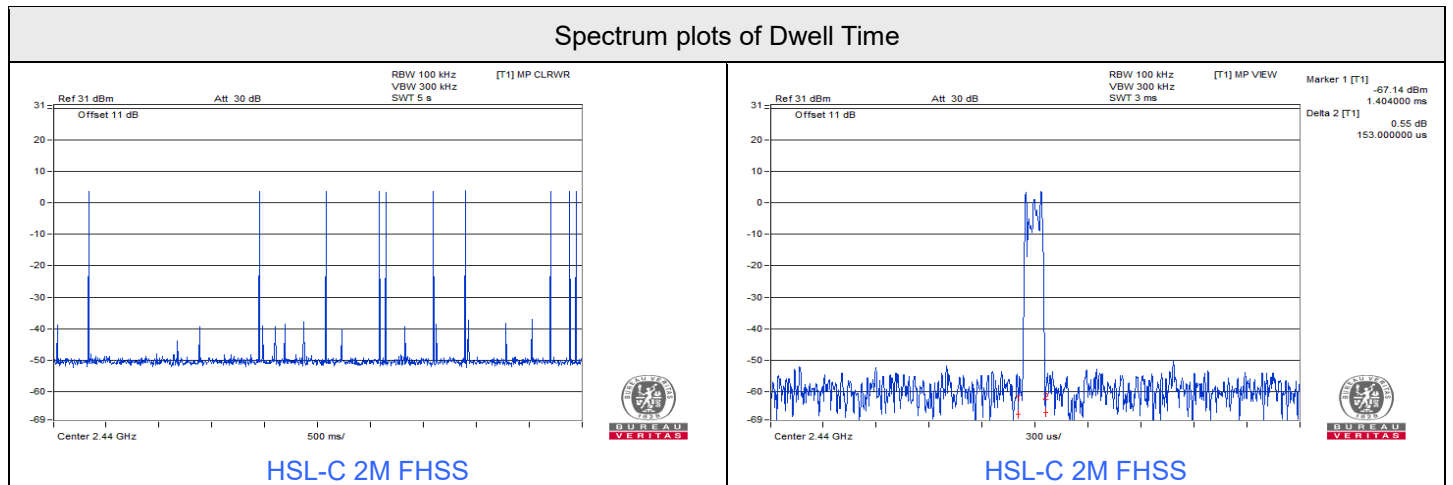

HSL-C 6M

Mode	Number of transmission in 15.2 sec	Length of transmission time (msec)	Result (msec)	Limit (msec)	Test Result
FHSS	22 (times / 5 sec) * 3.04 = 67 times	0.141	9.447	400	Pass

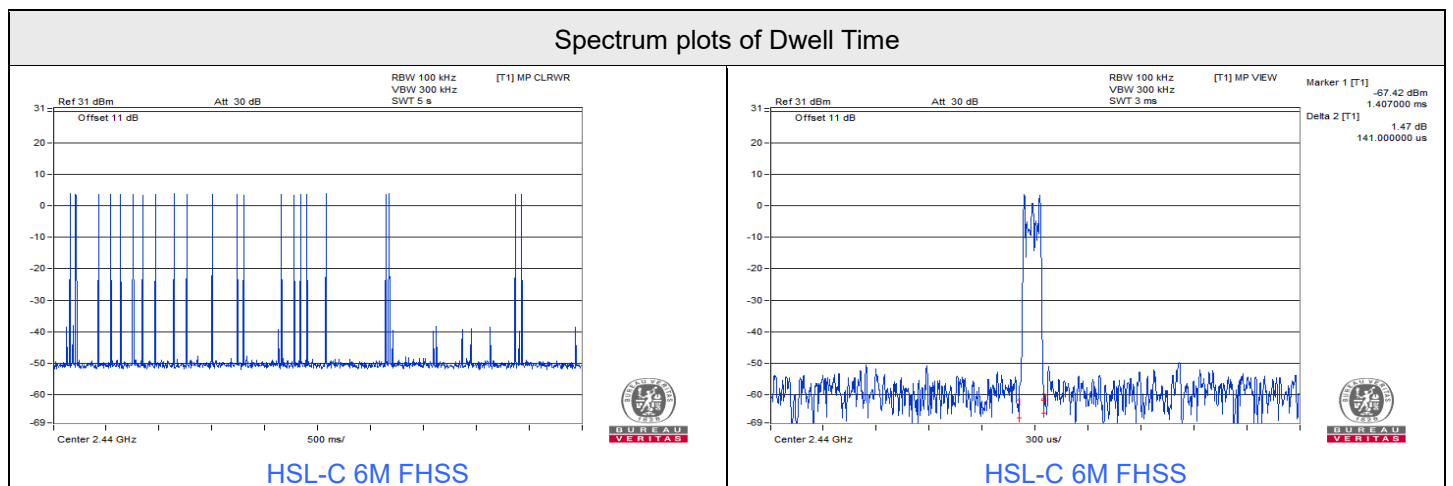

7.4 Hopping Channel Separation

Input Power:	120 Vac, 60Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	---------------	---------------------------	--------------	------------	-----------

HSL-C 2M


Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
1	2404	2.01	1.71	Pass
19	2440	2.01	1.71	Pass
38	2478	2.01	1.71	Pass

Note: The minimum limit is two-third 20dB bandwidth.

HSL-C 6M

Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Minimum Limit (MHz)	Test Result
1	2404	2.00	1.69	Pass
19	2440	2.01	1.7	Pass
38	2478	2.01	1.7	Pass

Note: The minimum limit is two-third 20dB bandwidth.

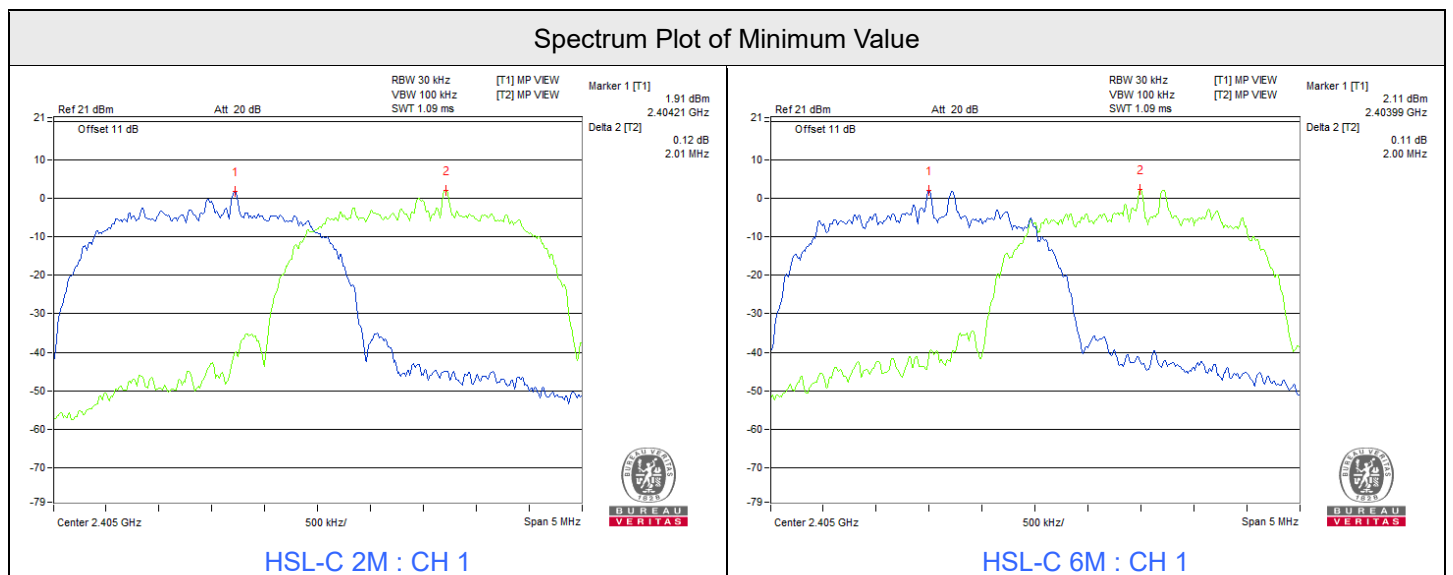

7.5 20 dB Bandwidth


Input Power:	120 Vac, 60Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	---------------	---------------------------	--------------	------------	-----------

HSL-C 2M

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	2404	2.56
19	2440	2.56
38	2478	2.56

HSL-C 6M

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	2404	2.53
19	2440	2.54
38	2478	2.54

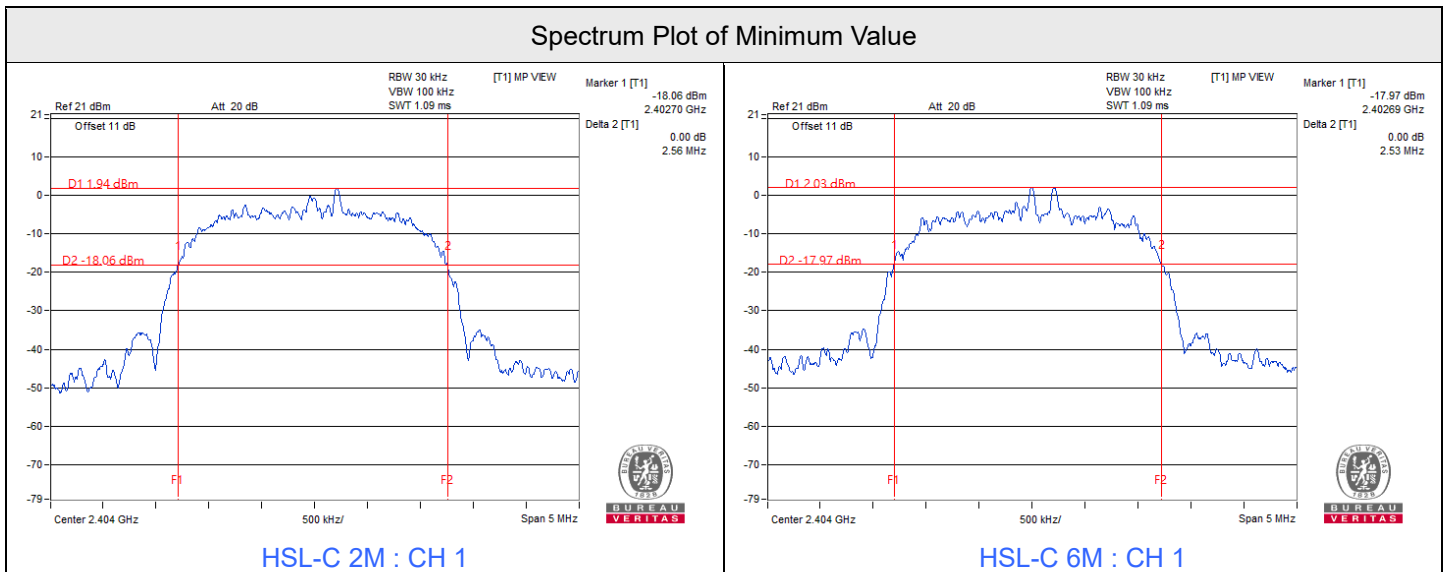

7.6 Conducted Out of Band Emissions


Input Power:	120 Vac, 60Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	---------------	---------------------------	--------------	------------	-----------

HSL-C 2M







HSL-C 6M

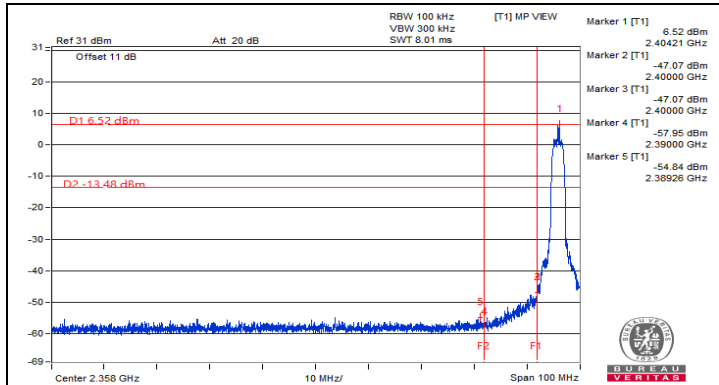


Hopping disabled (Low Channel)

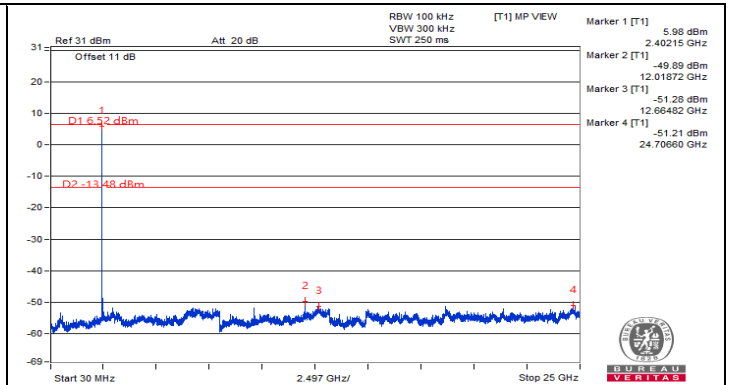


Hopping disabled (Low Channel)

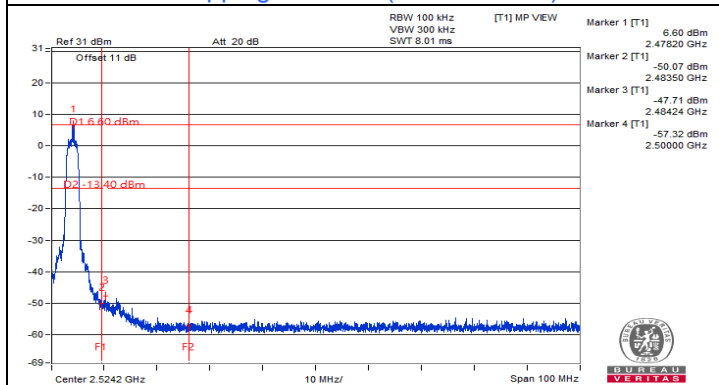


Hopping disabled (High Channel)

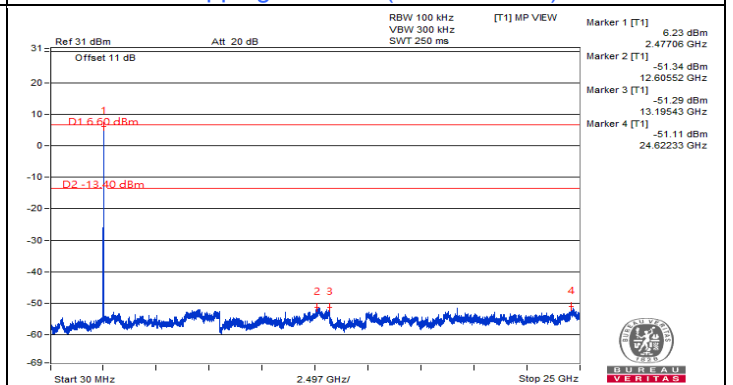


Hopping disabled (High Channel)

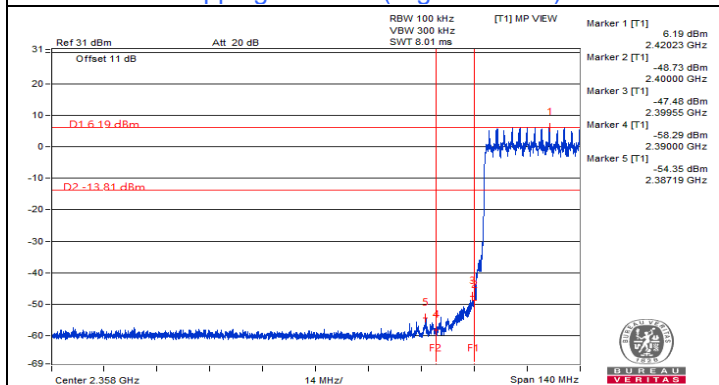


Hopping enabled

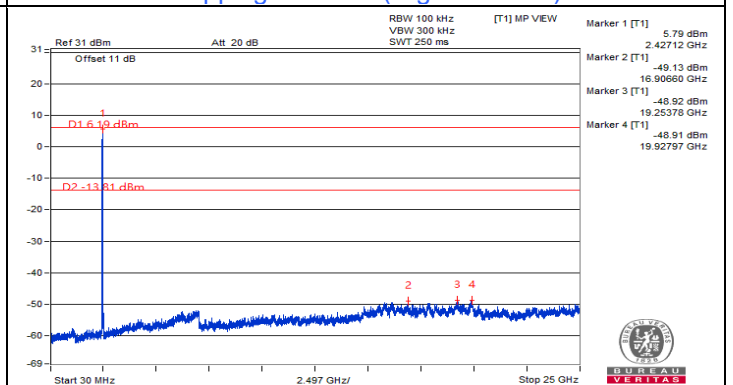

Hopping enabled

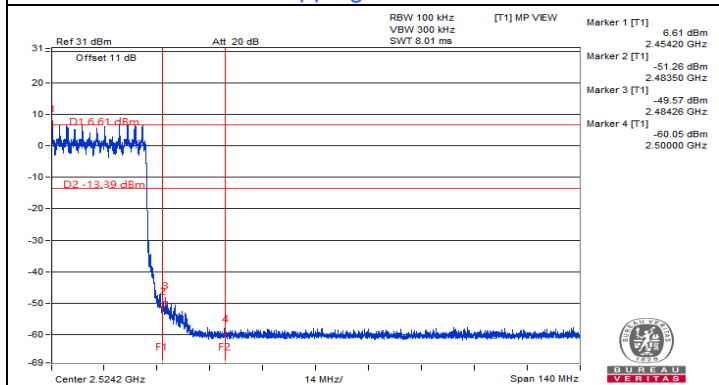

Hopping enabled

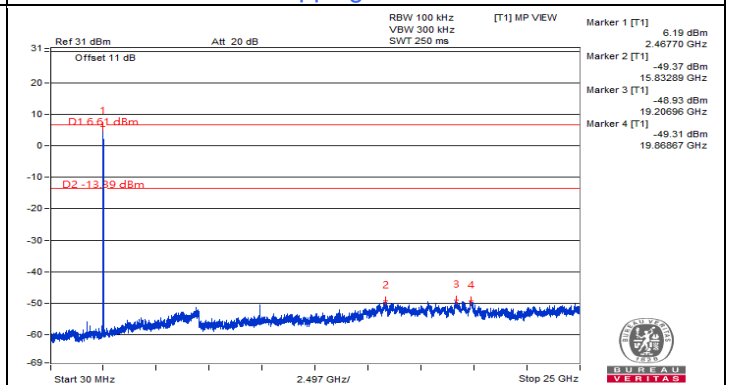

Hopping enabled

7.7 AC Power Conducted Emissions

Mode A


RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	26°C, 73% RH
Tested By	Vincent Chen		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	10.33	21.12	13.27	31.45	23.60	65.16	55.16	-33.71	-31.56
2	0.25800	10.36	11.69	2.61	22.05	12.97	61.50	51.50	-39.45	-38.53
3	0.47400	10.42	16.59	8.41	27.01	18.83	56.44	46.44	-29.43	-27.61
4	0.60600	10.42	8.25	2.64	18.67	13.06	56.00	46.00	-37.33	-32.94
5	0.79400	10.43	10.83	2.23	21.26	12.66	56.00	46.00	-34.74	-33.34
6	5.39000	10.53	8.44	3.84	18.97	14.37	60.00	50.00	-41.03	-35.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

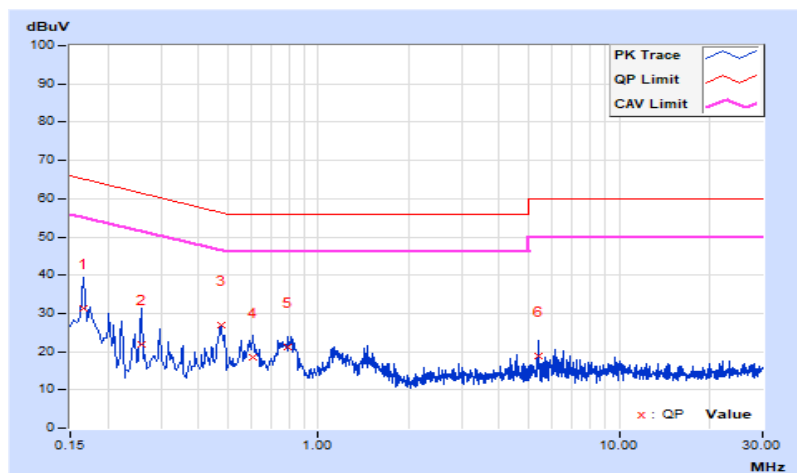


RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	26°C, 73% RH
Tested By	Vincent Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	10.34	20.75	9.99	31.09	20.33	65.16	55.16	-34.07	-34.83
2	0.20200	10.36	15.98	0.69	26.34	11.05	63.53	53.53	-37.19	-42.48
3	0.47800	10.44	22.19	12.99	32.63	23.43	56.37	46.37	-23.74	-22.94
4	0.61000	10.44	8.78	1.65	19.22	12.09	56.00	46.00	-36.78	-33.91
5	0.79400	10.45	8.60	1.76	19.05	12.21	56.00	46.00	-36.95	-33.79
6	6.19000	10.59	7.36	4.66	17.95	15.25	60.00	50.00	-42.05	-34.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

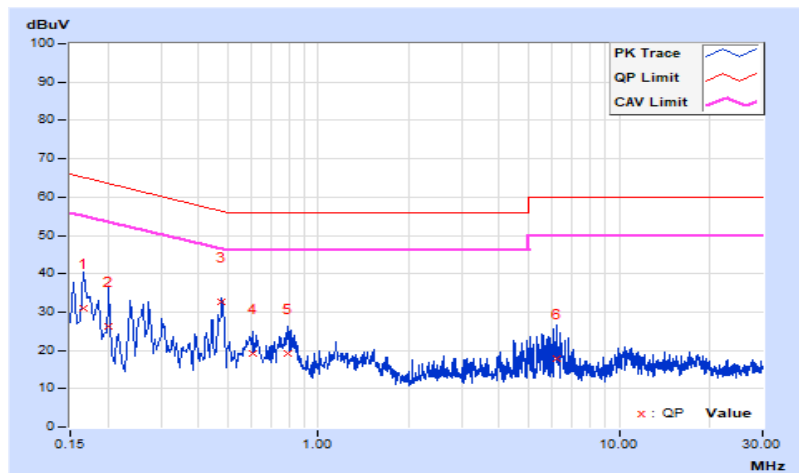

Mode B


RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	18°C, 65% RH
Tested By	Vincent Chen		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.37	16.18	7.10	26.55	17.47	66.00	56.00	-39.45	-38.53
2	0.16579	10.38	16.15	7.81	26.53	18.19	65.17	55.17	-38.64	-36.98
3	0.53400	10.50	12.20	3.28	22.70	13.78	56.00	46.00	-33.30	-32.22
4	1.04200	10.54	6.83	2.60	17.37	13.14	56.00	46.00	-38.63	-32.86
5	3.03800	10.61	7.14	1.20	17.75	11.81	56.00	46.00	-38.25	-34.19
6	9.13400	10.72	8.10	1.09	18.82	11.81	60.00	50.00	-41.18	-38.19

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

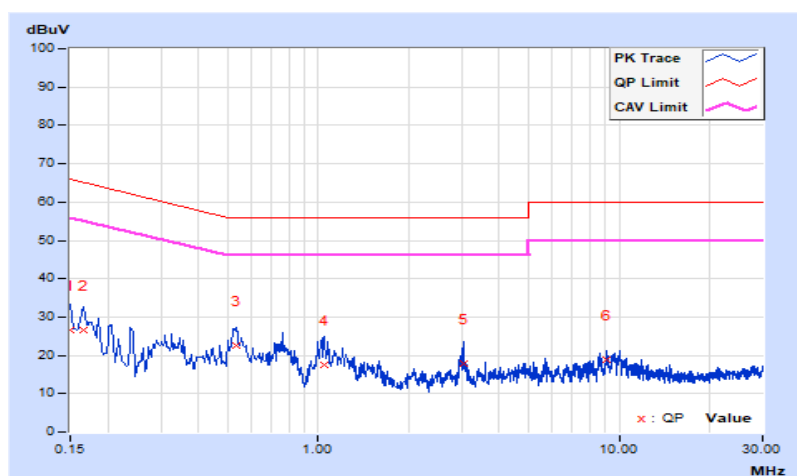


RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	18°C, 65% RH
Tested By	Vincent Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17800	10.42	17.97	10.69	28.39	21.11	64.58	54.58	-36.19	-33.47
2	0.29000	10.48	12.08	3.14	22.56	13.62	60.52	50.52	-37.96	-36.90
3	0.52567	10.54	17.93	8.78	28.47	19.32	56.00	46.00	-27.53	-26.68
4	1.29400	10.57	4.84	2.06	15.41	12.63	56.00	46.00	-40.59	-33.37
5	3.48200	10.69	7.58	2.48	18.27	13.17	56.00	46.00	-37.73	-32.83
6	9.27800	10.84	7.36	1.66	18.20	12.50	60.00	50.00	-41.80	-37.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

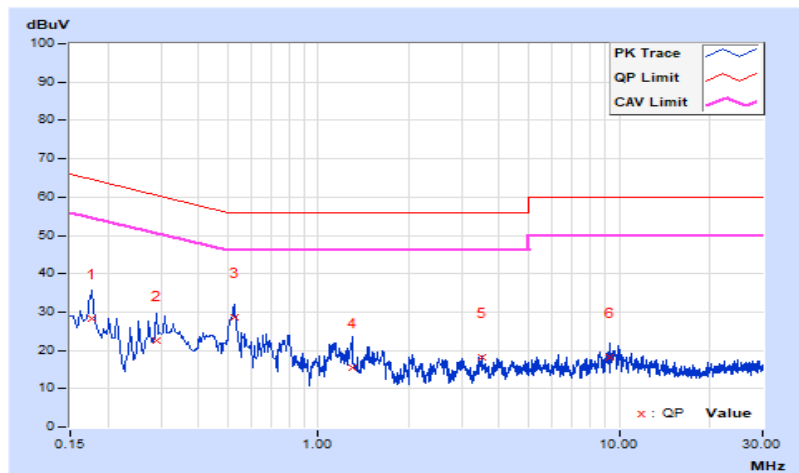

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	87.56	26.4 QP	40.0	-13.6	1.55 H	293	50.2	-23.8
2	204.32	37.5 QP	43.5	-6.0	1.12 H	164	58.4	-20.9
3	284.56	26.1 QP	46.0	-19.9	1.77 H	154	43.6	-17.5
4	349.84	20.3 QP	46.0	-25.7	2.14 H	176	36.4	-16.1
5	594.65	18.2 QP	46.0	-27.8	1.77 H	192	28.4	-10.2
6	812.26	22.5 QP	46.0	-23.5	1.29 H	320	29.5	-7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

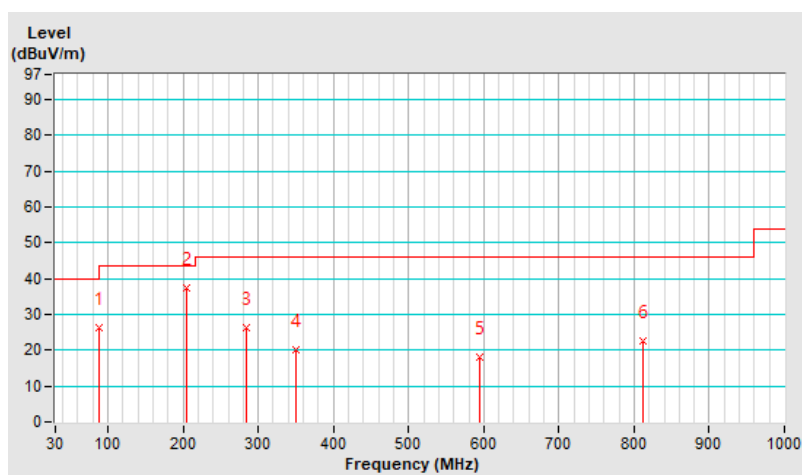


RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.31	30.4 QP	40.0	-9.6	1.24 V	351	49.2	-18.8
2	88.04	24.0 QP	43.5	-19.5	1.35 V	94	47.8	-23.8
3	197.35	31.6 QP	43.5	-11.9	1.88 V	104	52.4	-20.8
4	397.26	20.4 QP	46.0	-25.6	1.52 V	331	35.1	-14.7
5	609.18	18.2 QP	46.0	-27.8	1.49 V	201	28.0	-9.8
6	720.52	20.9 QP	46.0	-25.1	1.53 V	149	29.5	-8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

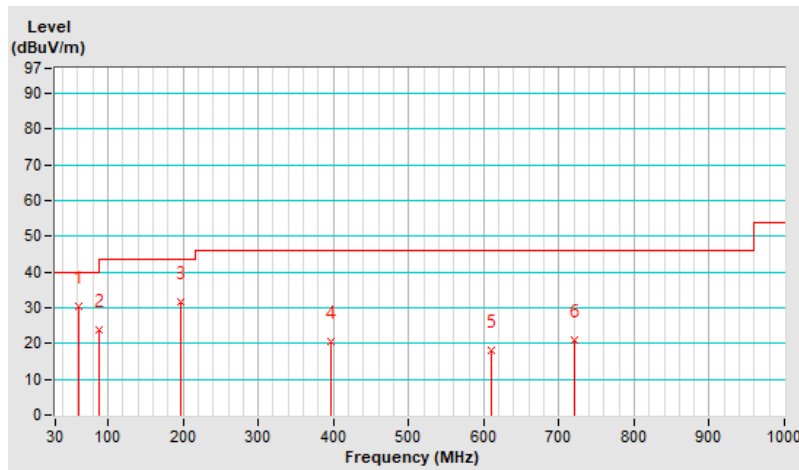


Mode B

RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	85.37	25.7 QP	40.0	-14.3	1.55 H	204	49.3	-23.6
2	207.69	35.8 QP	43.5	-7.7	1.24 H	275	56.7	-20.9
3	286.11	25.9 QP	46.0	-20.1	1.84 H	25	43.4	-17.5
4	352.25	19.6 QP	46.0	-26.4	1.78 H	155	35.5	-15.9
5	596.23	19.3 QP	46.0	-26.7	1.95 H	81	29.5	-10.2
6	814.50	23.3 QP	46.0	-22.7	1.29 H	342	30.3	-7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

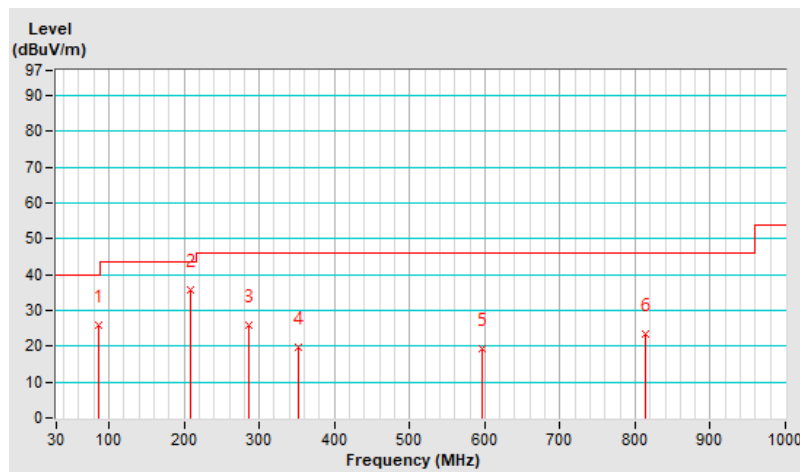


RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.55	28.5 QP	40.0	-11.5	1.60 V	136	47.3	-18.8
2	87.42	23.6 QP	40.0	-16.4	1.58 V	310	47.4	-23.8
3	195.63	31.1 QP	43.5	-12.4	2.29 V	105	51.8	-20.7
4	402.52	20.7 QP	46.0	-25.3	1.46 V	187	35.3	-14.6
5	612.32	17.6 QP	46.0	-28.4	1.79 V	106	27.4	-9.8
6	722.17	21.7 QP	46.0	-24.3	1.95 V	336	30.2	-8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

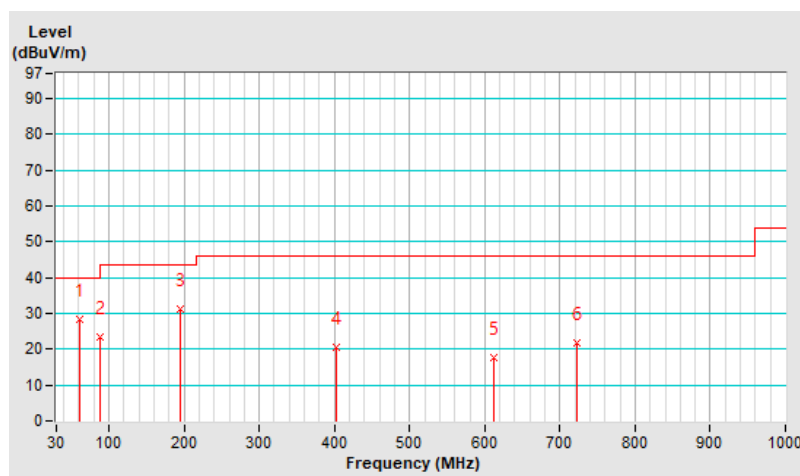

7.9 Unwanted Emissions above 1 GHz

RF Mode	BT QHS 2M	Channel	CH 1 : 2404 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.0 PK	74.0	-22.0	2.39 H	226	14.4	37.6
2	2390.00	41.7 AV	54.0	-12.3	2.39 H	226	4.1	37.6
3	*2404.00	106.5 PK			2.39 H	226	68.9	37.6
4	*2404.00	73.3 AV			2.39 H	226	35.7	37.6
5	4808.00	61.6 PK	74.0	-12.4	1.47 H	253	49.5	12.1
6	4808.00	28.4 AV	54.0	-25.6	1.47 H	253	16.3	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.1 PK	74.0	-21.9	1.59 V	243	14.5	37.6
2	2390.00	41.1 AV	54.0	-12.9	1.59 V	243	3.5	37.6
3	*2404.00	104.3 PK			1.59 V	243	66.7	37.6
4	*2404.00	71.1 AV			1.59 V	243	33.5	37.6
5	4804.00	60.8 PK	74.0	-13.2	3.42 V	105	48.7	12.1
6	4804.00	27.6 AV	54.0	-26.4	3.42 V	105	15.5	12.1

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.2 \text{ ms} / 100 \text{ ms}) = -33.2 \text{ dB}$



RF Mode	BT QHS 2M	Channel	CH 19 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	106.5 PK			2.39 H	226	68.7	37.8
2	*2440.00	73.3 AV			2.39 H	226	35.5	37.8
3	4880.00	61.1 PK	74.0	-12.9	2.11 H	164	48.8	12.3
4	4880.00	27.9 AV	54.0	-26.1	2.11 H	164	15.6	12.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.2 PK			1.59 V	243	66.4	37.8
2	*2440.00	71.0 AV			1.59 V	243	33.2	37.8
3	4880.00	61.4 PK	74.0	-12.6	1.66 V	124	49.1	12.3
4	4880.00	28.2 AV	54.0	-25.8	1.66 V	124	15.9	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.2 \text{ ms} / 100 \text{ ms}) = -33.2 \text{ dB}$



RF Mode	BT QHS 2M	Channel	CH 38 : 2478 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	106.7 PK			1.80 H	216	68.7	38.0
2	*2478.00	73.5 AV			1.80 H	216	35.5	38.0
3	2483.50	58.4 PK	74.0	-15.6	1.80 H	216	51.1	7.3
4	2483.50	25.2 AV	54.0	-28.8	1.80 H	216	17.9	7.3
5	4956.00	61.1 PK	74.0	-12.9	1.81 H	93	48.6	12.5
6	4956.00	27.9 AV	54.0	-26.1	1.81 H	93	15.4	12.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	104.5 PK			1.43 V	256	66.5	38.0
2	*2478.00	71.3 AV			1.43 V	256	33.3	38.0
3	2483.50	56.8 PK	74.0	-17.2	1.43 V	256	49.5	7.3
4	2483.50	23.6 AV	54.0	-30.4	1.43 V	256	16.3	7.3
5	4956.00	61.8 PK	74.0	-12.2	1.48 V	126	49.3	12.5
6	4956.00	28.6 AV	54.0	-25.4	1.48 V	126	16.1	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
20 log(Duty cycle) = 20 log(2.2 ms / 100 ms) = -33.2 dB



RF Mode	BT QHS 6M	Channel	CH 1 : 2404 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.8 PK	74.0	-21.2	2.39 H	226	15.2	37.6
2	2390.00	41.4 AV	54.0	-12.6	2.39 H	226	3.8	37.6
3	*2404.00	106.6 PK			2.39 H	226	69.0	37.6
4	*2404.00	73.4 AV			2.39 H	226	35.8	37.6
5	4808.00	61.5 PK	74.0	-12.5	1.41 H	25	49.4	12.1
6	4808.00	28.3 AV	54.0	-25.7	1.41 H	25	16.2	12.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.3 PK	74.0	-21.7	1.59 V	243	14.7	37.6
2	2390.00	41.2 AV	54.0	-12.8	1.59 V	243	3.6	37.6
3	*2404.00	104.4 PK			1.59 V	243	66.8	37.6
4	*2404.00	71.2 AV			1.59 V	243	33.6	37.6
5	4808.00	61.3 PK	74.0	-12.7	1.82 V	134	49.2	12.1
6	4808.00	28.1 AV	54.0	-25.9	1.82 V	134	16.0	12.1

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(2.2 \text{ ms} / 100 \text{ ms}) = -33.2 \text{ dB}$$



RF Mode	BT QHS 6M	Channel	CH 19 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	106.4 PK			2.39 H	226	68.6	37.8
2	*2440.00	73.2 AV			2.39 H	226	35.4	37.8
3	4880.00	61.0 PK	74.0	-13.0	2.11 H	283	48.7	12.3
4	4880.00	27.8 AV	54.0	-26.2	2.11 H	283	15.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.3 PK			1.59 V	243	66.5	37.8
2	*2440.00	71.1 AV			1.59 V	243	33.3	37.8
3	4880.00	61.3 PK	74.0	-12.7	1.74 V	325	49.0	12.3
4	4880.00	28.1 AV	54.0	-25.9	1.74 V	325	15.8	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:
 $20 \log(\text{Duty cycle}) = 20 \log(2.2 \text{ ms} / 100 \text{ ms}) = -33.2 \text{ dB}$



RF Mode	BT QHS 6M	Channel	CH 38 : 2478 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 61% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	106.7 PK			1.80 H	216	68.7	38.0
2	*2478.00	73.5 AV			1.80 H	216	35.5	38.0
3	2483.50	62.5 PK	74.0	-11.5	1.80 H	216	55.2	7.3
4	2483.50	29.3 AV	54.0	-24.7	1.80 H	216	22.0	7.3
5	4956.00	61.4 PK	74.0	-12.6	2.27 H	161	48.9	12.5
6	4956.00	28.2 AV	54.0	-25.8	2.27 H	161	15.7	12.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	104.5 PK			1.43 V	256	66.5	38.0
2	*2478.00	71.3 AV			1.43 V	256	33.3	38.0
3	2483.50	60.5 PK	74.0	-13.5	1.43 V	256	53.2	7.3
4	2483.50	27.3 AV	54.0	-26.7	1.43 V	256	20.0	7.3
5	4956.00	61.1 PK	74.0	-12.9	2.03 V	234	48.6	12.5
6	4956.00	27.9 AV	54.0	-26.1	2.03 V	234	15.4	12.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty cycle correction factor is calculated from following formula:


$$20 \log(\text{Duty cycle}) = 20 \log(2.2 \text{ ms} / 100 \text{ ms}) = -33.2 \text{ dB}$$

Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

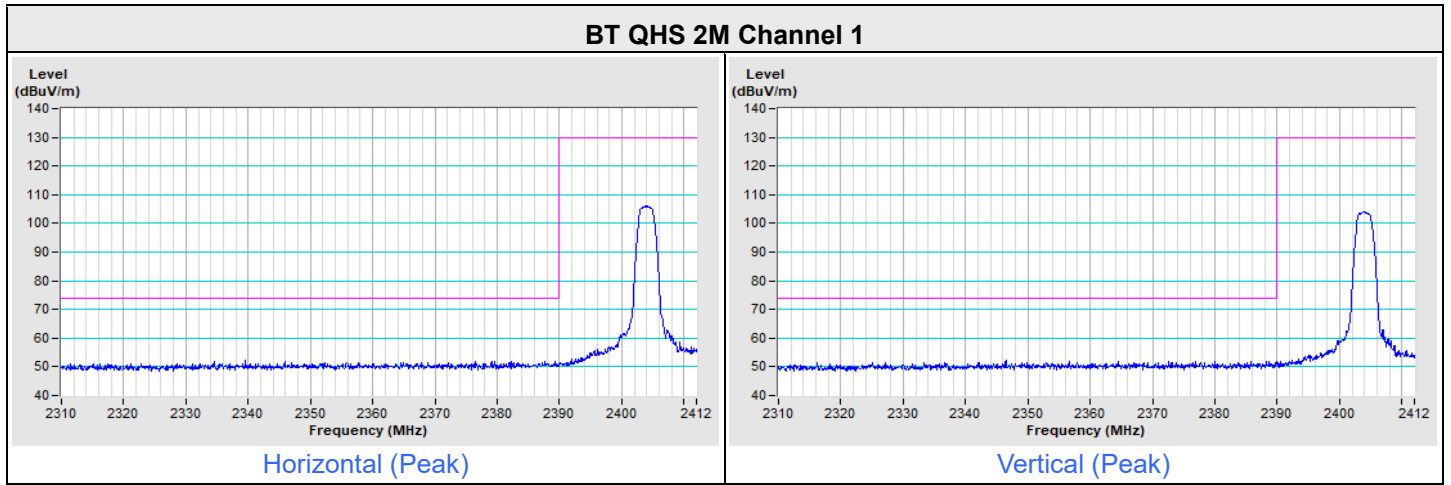


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

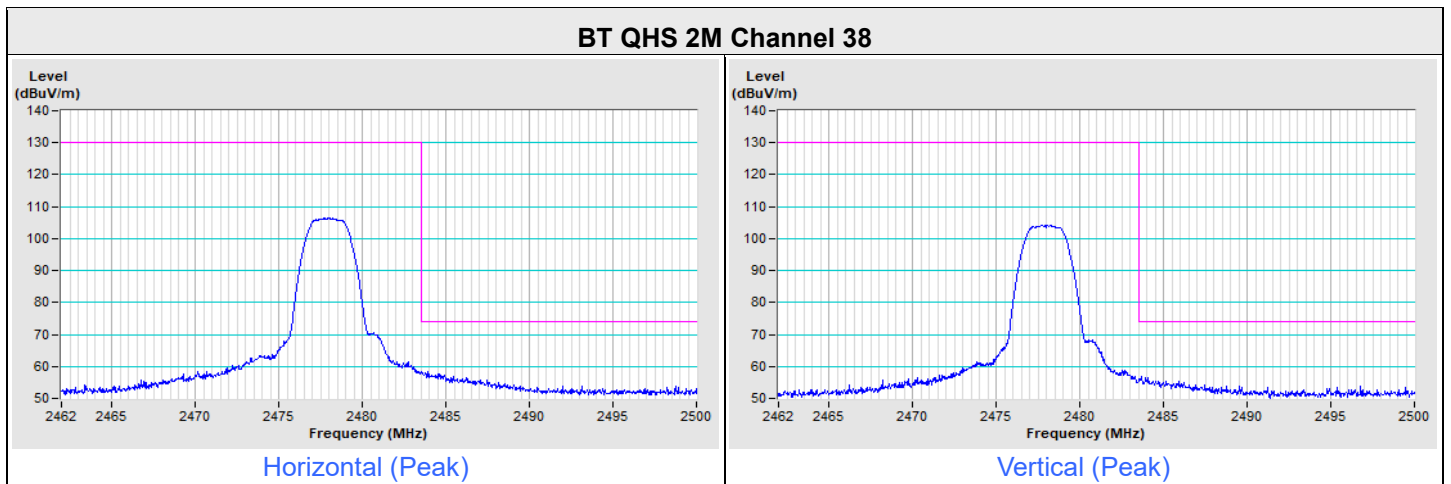


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

BT QHS 6M Channel 1

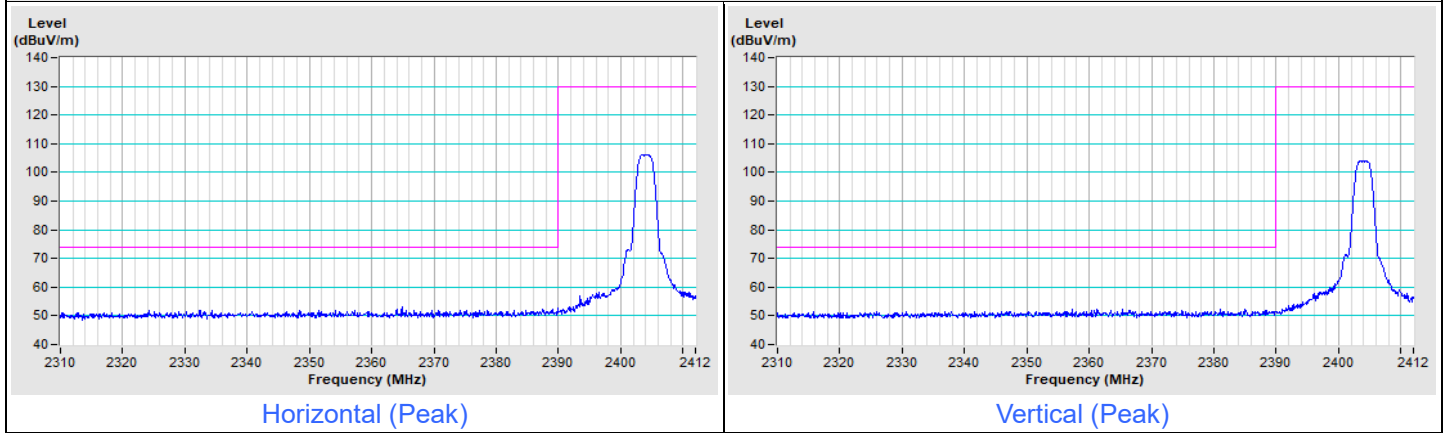

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

BT QHS 6M Channel 38

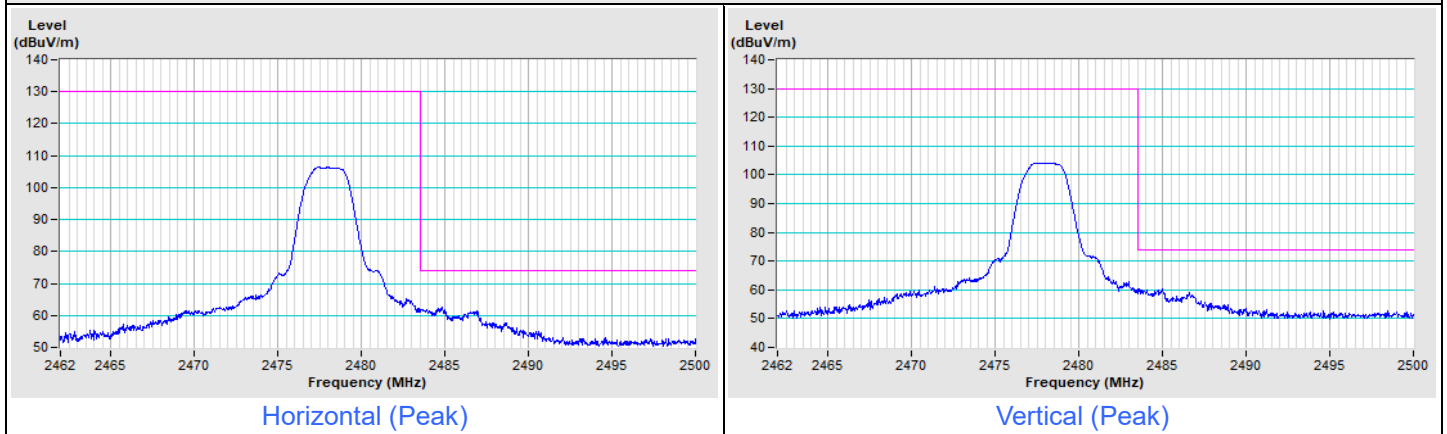

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---