

TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO2101861

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED & RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS AND OCCUPIED BANDWIDTH
PAGE 4.....METHOD OF MEASURING OCCUPIED BANDWIDTH
PAGE 5.....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 6.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 7.....FREQUENCY STABILITY
PAGE 8.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....FCC ID LABEL SAMPLE & FCC ID LABEL LOCATION
EXHIBIT 2A.....EXTERNAL PHOTO - FRONT VIEW
EXHIBIT 2B.....EXTERNAL PHOTO - REAR VIEW
EXHIBIT 2C.....EXTERNAL PHOTO - SIDE VIEW
EXHIBIT 2D-2E.....INTERNAL PHOTO - SOLDER SIDE
EXHIBIT 2F.....INTERNAL PHOTO - COMPONENT SIDE
EXHIBIT 3.....TEST SETUP PHOTOGRAPH
EXHIBIT 4.....BLOCK DIAGRAM
EXHIBIT 5.....SCHEMATIC
EXHIBIT 6.....USER'S MANUAL
EXHIBIT 7A-7B.....CIRCUIT DESCRIPTION
EXHIBIT 8A-8B.....TUNING PROCEDURE
EXHIBIT 9.....AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT 10A.....MODULATION LIMITING PLOT - 300 Hz
EXHIBIT 10B.....MODULATION LIMITING PLOT - 1000 Hz
EXHIBIT 10C.....MODULATION LIMITING PLOT - 3000 Hz
EXHIBIT 11.....AUDIO LOW PASS FILTER GRAPH
EXHIBIT 12A.....OCCUPIED BANDWIDTH CW PLOT
EXHIBIT 12B.....OCCUPIED BANDWIDTH PLOT

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO2101861

REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC

PAGE: TABLE OF CONTENTS

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown in exhibit 9. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

2.1047(b) Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown in exhibits 10A - 10C. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

95.637(b) Post Limiter Filter The filter must be between the modulation limiter and the modulated stage. At any frequency between 3 & 20KHz the filter must have an attenuation of $60 \log (f/3)$ greater than the attenuation at 1KHz. See the plot; exhibit 11.

2.989(c) EMISSION BANDWIDTH:

95.633(c)

Data in the plots shows that the sidebands from greater than 50% to 100% of the authorized bandwidth must be attenuated by at least 25dB and from 100 to 250% the sidebands must be attenuated by at least 35dB. Beyond 250% the sidebands must be attenuated by at least $43 + \log_{10}(TP)$. The transmitter was modulated with 2500 Hz, adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram follows. See the occupied bandwidth plots; exhibits 12A-12B.

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO2101861


REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC

PAGE #: 3

Radiotelephone transmitter with modulation limiter.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

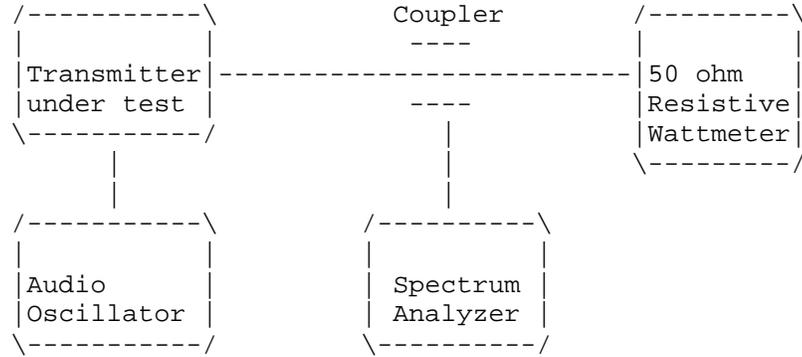

APPLICANT: RADIOSHACK CORPORATION
FCC ID: AAO2101861
REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC
PAGE #: 4

2.1051 Not Applicable, no antenna terminal allowed.

2.1053 UNWANTED_RADIATION:
95.635(b)(4)

REQUIREMENTS: Emissions must be attenuated by at least the following below the output of the transmitter.

$$43 + 10\log(TP) = 43 + 10\log(0.50) = 39.99 \text{ dB}$$

TEST DATA:

EMISSON FREQUENCY MHz	MR @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	ATTN dB	MARGIN dB	ANT POL
462.70	104.36	1.60	18.44	124.40	0.00	0.00	V
925.40	45.50	2.90	24.10	72.50	52.54	11.90	V
1388.10	38.40	1.00	25.55	64.95	60.09	19.46	V
1850.80	34.30	1.01	27.40	62.71	62.33	21.70	V
2313.50	38.30	1.08	28.78	68.16	56.88	16.25	V
2776.10	34.20	1.15	29.94	65.29	59.76	19.12	V
3238.70	35.30	1.22	31.10	67.61	57.43	16.80	H
3701.40	43.80	1.29	32.25	77.34	47.70	7.07	H
4164.00	30.20	1.35	33.18	64.74	60.30	19.67	H
4627.00	21.80	1.42	33.71	56.93	68.11	27.48	H

MARGIN = (Field strength of Fund - 39.99dB) - FS OF EMISSION

METHOD OF MEASUREMENT: The procedure used was TIT/EIA STANDARD 603 USING THE SUBSTITUTION method. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, and an appropriate antenna - see test equipment list. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, Newberry, FL 32669.


APPLICANT: RADIOSHACK CORPORATION
FCC ID: AAO2101861
REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC
PAGE #: 5

2.1053
95.635

UNWANTED_RADIATION:

Method of Measuring Radiated Spurious Emissions

Hewlett Packard
Spectrum
Analyzer
HP8566B

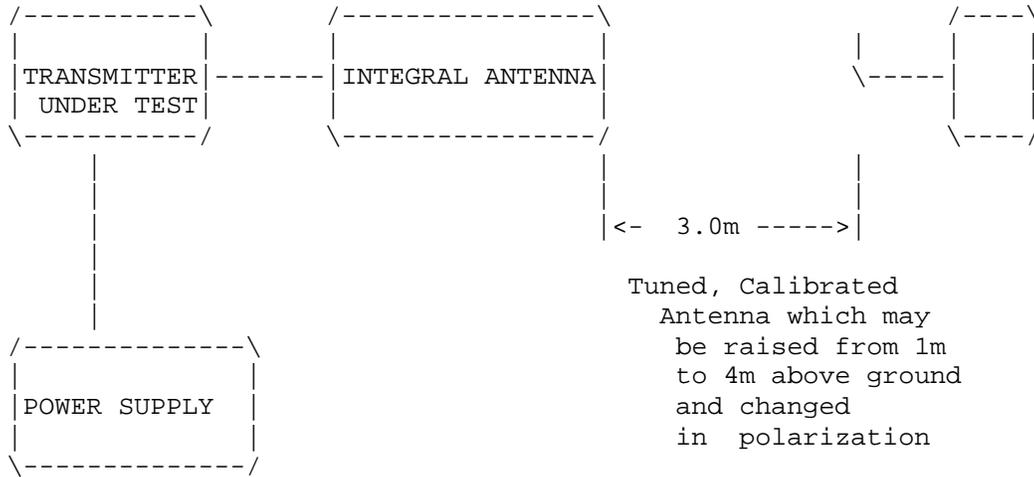

Equipment placed 80cm above ground on a rotatable platform.

APPLICANT: RADIOSHACK CORPORATION
FCC ID: AAO2101861
REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC
PAGE #: 6

Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -20 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 4.5 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 462.662 500

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	462.662 500	0.00
-20_____	462.662 307	-0.42
-10_____	462.663 157	1.42
0_____	462.663 165	1.44
+10_____	462.662 878	0.82
+20_____	462.662 425	-0.16
+30_____	462.662 011	-1.06
+40_____	462.661 900	-1.30
+50_____	462.662 400	-0.22
BATT. End-Point 3.8V/dc	462.662 279	-0.48
BATT. End-Point 5.2V/dc	462.662 297	-0.44

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -1.30 to +1.44 ppm. The maximum frequency variation with voltage was -0.48 ppm.

APPLICANT: RADIOSHACK CORPORATION
 FCC ID: AAO2101861
 REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC
 PAGE #: 7

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO2101861

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 1/19/01
2. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057, Cal 3/15/00
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
Cal. 3/16/01
4. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
Cal. 3/15/00
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
Cal. 3/15/00
6. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
Cal. 1/21/01
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 11/20/00
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545, Cal. 1/26/01
13. X Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 11/21/00
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/00
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 2/1/01
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 11/16/00
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 2/1/01

APPLICANT: RADIOSHACK CORPORATION

FCC ID: AAO2101861

REPORT #: T:\CUS\R\RADSHACK\335ZBK1\335ZBK1RPT.DOC

PAGE #: 8