

FCC Radio Test Report

FCC ID: ACJ-SC-C70

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1706C058
Equipment : Compact Stereo System
Model Name : SC-C70
Applicant : Panasonic Corporation of North America
Address : Two Riverfront Plaza, 9th Floor, Newark, New Jersey
07102-5490, United States

Date of Receipt : Jun. 06, 2017
Date of Test : Jun. 06, 2017 ~ Jun. 29, 2017
Issued Date : Jun. 30, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . BANDWIDTH TEST	20
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20
6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	21

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	22
7.1 APPLIED PROCEDURES / LIMIT	22
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT TEST CONDITIONS	22
7.1.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY TEST	23
8.1 APPLIED PROCEDURES / LIMIT	23
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
9 . MEASUREMENT INSTRUMENTS LIST	24
10 . EUT TEST PHOTO	26
ATTACHMENT A - CONDUCTED EMISSION	30
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	33
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	38
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	51
ATTACHMENT E - BANDWIDTH	148
ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER	165
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	168
ATTACHMENT H - POWER SPECTRAL DENSITY	217

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1706C058	Original Issue.	Jun. 30, 2017

1. CERTIFICATION

Equipment : Compact Stereo System
Brand Name : Technics
Model Name : SC-C70
Applicant : Panasonic Corporation of North America
Manufacturer : Panasonic Corporation
Address : 1-15 Matsuo-cho, Kadoma City, Osaka 571-8504, Japan
Factory : Panasonic AVC Networks Johor Malaysia Sdn.Bhd
Address : IE,PLO 460,Jalan Bandar, 81700 Pasir Gudang,Johor, Malaysia
Date of Test : Jun. 06, 2017 ~ Jun. 29, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1706C058) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
15.207		Conducted Emission	PASS	
15.247(d)		Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		6dB Bandwidth	PASS	
15.247(b)(3)		Peak Output Power	PASS	
15.247(e)		Power Spectral Density	PASS	
15.203		Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209		Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Compact Stereo System	
Brand Name	Technics	
Model Name	SC-C70	
Model Difference	N/A	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps
	Output Power (Max.)_Ant 1	802.11b: 19.14dBm 802.11g: 23.87dBm 802.11n(20MHz): 23.74dBm 802.11n(40MHz): 22.31dBm
	Output Power (Max.)_Ant 2	802.11b: 19.28dBm 802.11g: 24.03dBm 802.11n(20MHz): 23.95dBm 802.11n(40MHz): 22.55dBm
Power Source	AC mains	
Power Rating	AC 120V 60Hz	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	-1.43
2	N/A	N/A	PCB	N/A	1.59

Note: The EUT with a Smart antenna have two transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

For Band Edge Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

6dB Spectrum Bandwidth	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Maximum Conducted Output Power	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Power Spectral Density	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
 802.11g mode: OFDM (6Mbps)
 802.11n HT20 mode : BPSK (6.5Mbps)
 802.11n HT40 mode : BPSK (13.5Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	HC_Date_Test		
Frequency (MHz)	2412	2437	2462
802.11b	N/A	N/A	N/A
802.11g	N/A	N/A	N/A
802.11n (20MHz)	N/A	N/A	N/A
Frequency	2422	2437	2452
802.11n (40MHz)	N/A	N/A	N/A

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

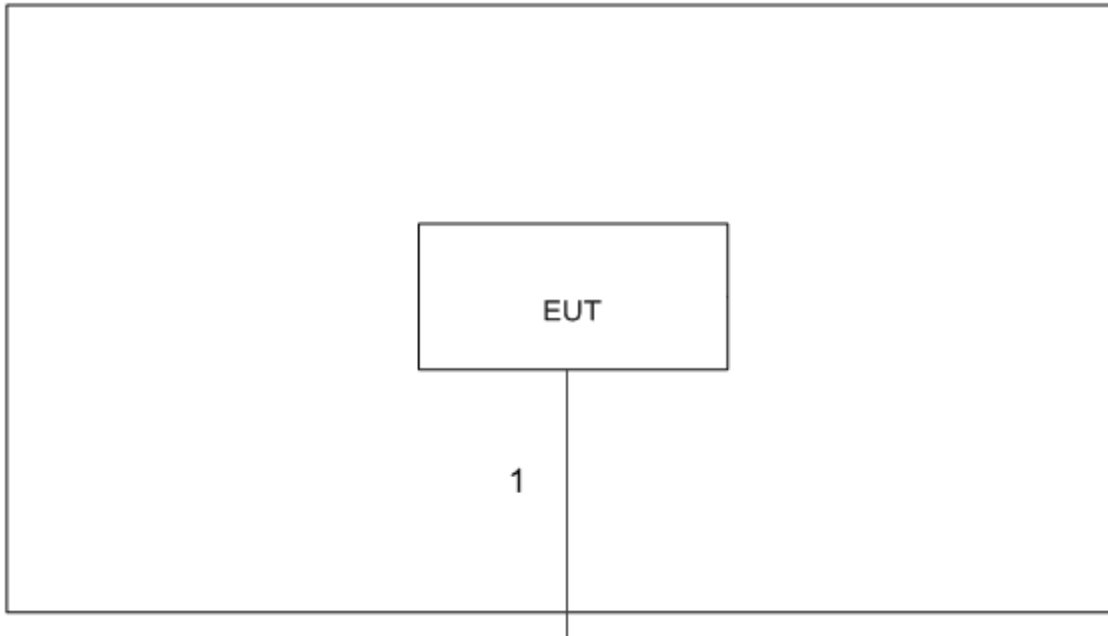

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	AC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

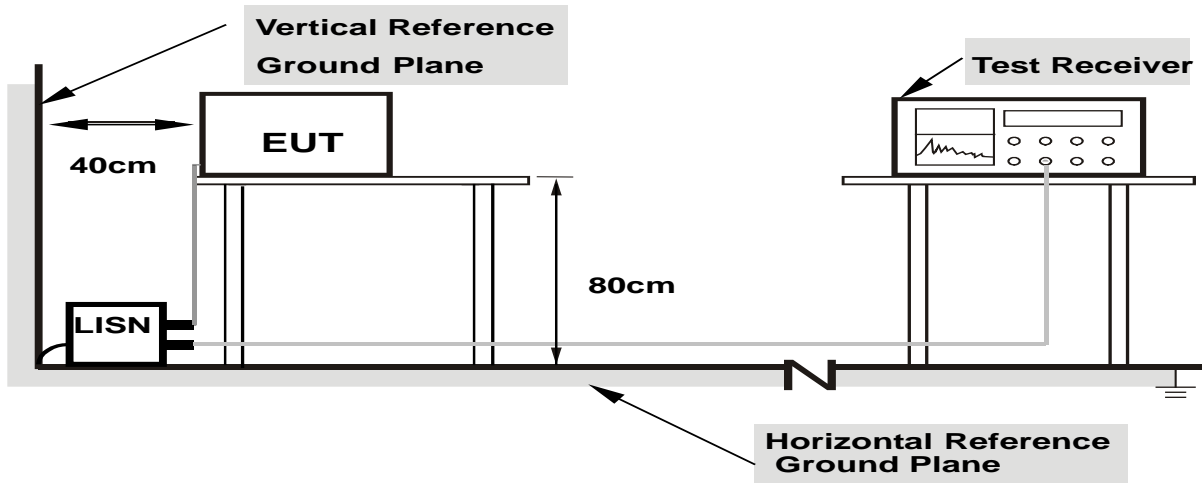

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

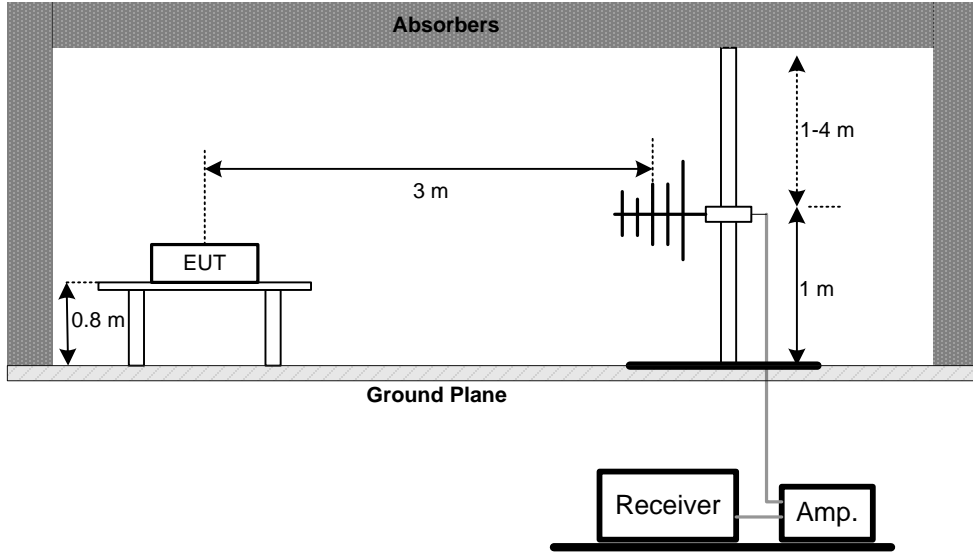

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

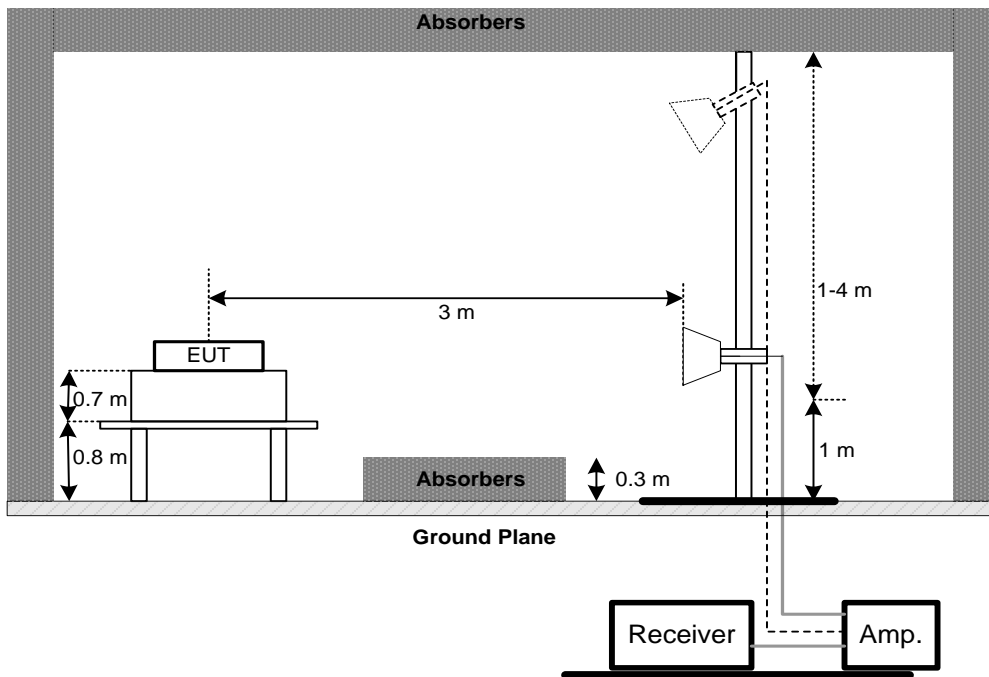

(C) For Radiated Emissions Below 30MHz

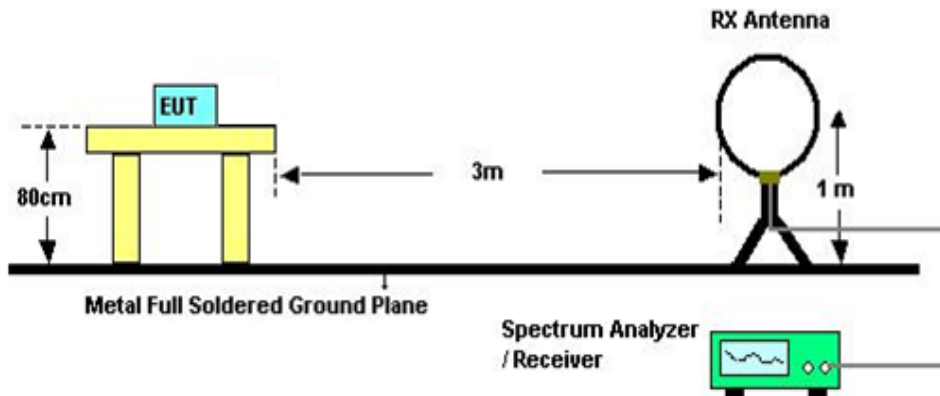

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 26, 2018
2	LISN	R&S	ENV216	101447	Mar. 26, 2018
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 09, 2018
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Nov. 08, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 25, 2018
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 26, 2018
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2017
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
10	Test Cable	emci	EMC104-SM-SM-10000(1GHz-26.5GHz)	C-68	Jun. 25, 2018
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 22, 2018
13	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Sep. 04, 2017
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Sep. 04, 2017

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017


Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX Mode


Line

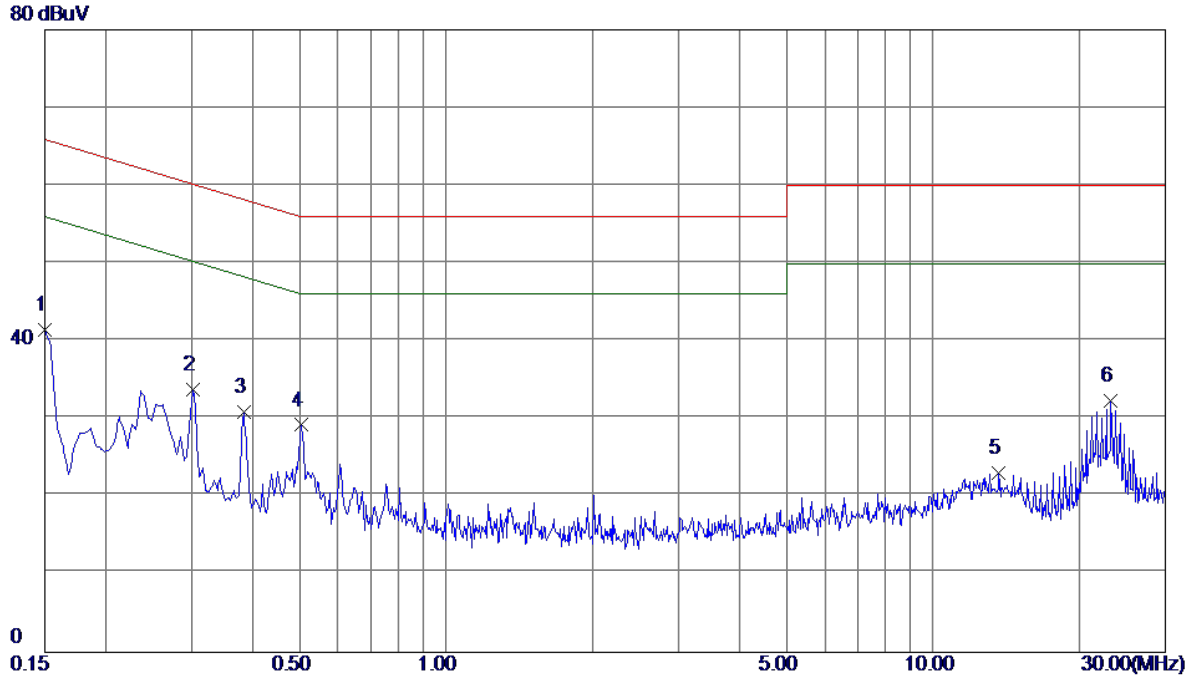

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	31.59	9.79	41.38	66.00	-24.62	Peak	
2	0.3030	24.01	9.76	33.77	60.16	-26.39	Peak	
3	0.3840	21.06	9.79	30.85	58.19	-27.34	Peak	
4	0.5055	19.40	9.80	29.20	56.00	-26.80	Peak	
5	13.6230	12.46	10.52	22.98	60.00	-37.02	Peak	
6	23.2080	21.59	10.74	32.33	60.00	-27.67	Peak	

Test Mode : TX Mode

Neutral

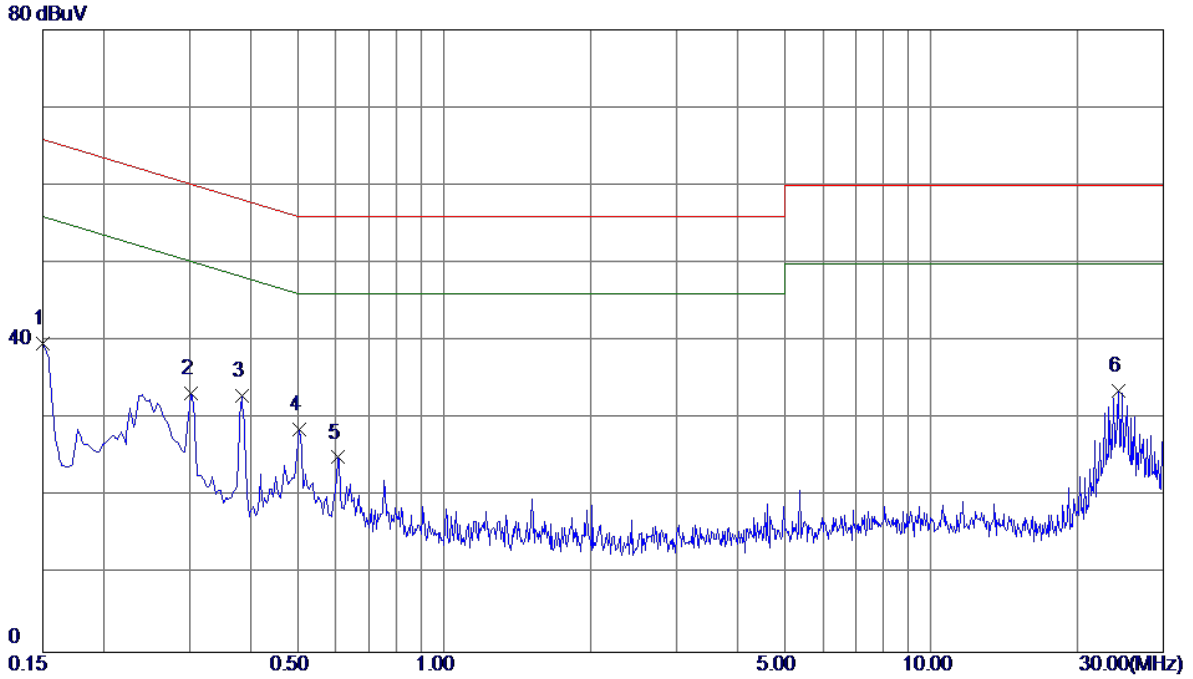


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	30.03	9.68	39.71	66.00	-26.29	Peak	
2	0.3030	23.55	9.68	33.23	60.16	-26.93	Peak	
3 *	0.3840	23.34	9.69	33.03	58.19	-25.16	Peak	
4	0.5055	18.87	9.70	28.57	56.00	-27.43	Peak	
5	0.6045	15.33	9.71	25.04	56.00	-30.96	Peak	
6	24.2294	22.69	10.92	33.61	60.00	-26.39	Peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX B MODE CHANNEL 01


Ant 0°

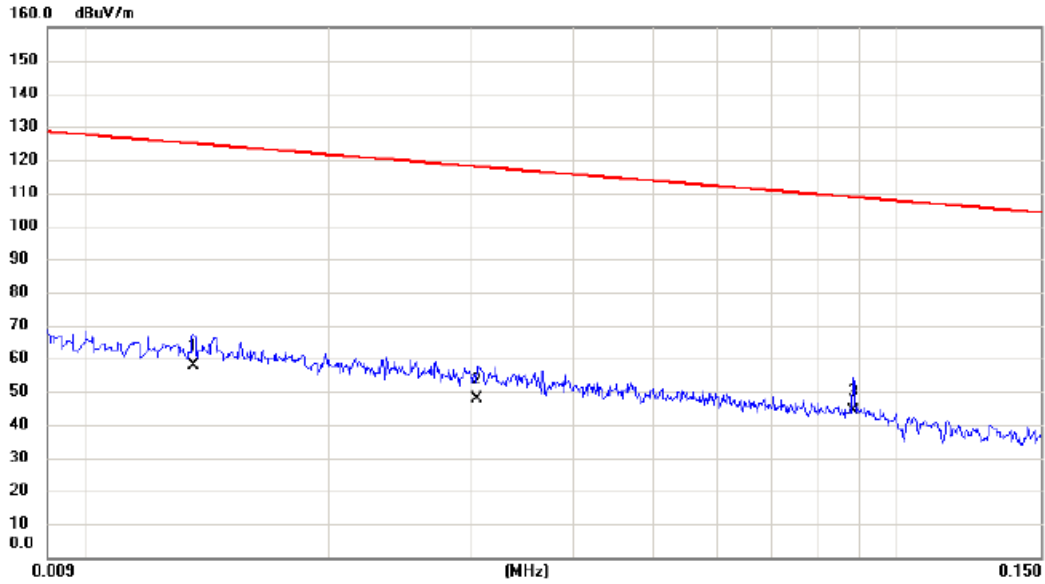

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0136	37.51	20.45	57.96	124.93	-66.97	AVG	
2		0.0304	28.46	19.31	47.77	117.95	-70.18	AVG	
3	*	0.0881	26.39	17.92	44.31	108.71	-64.40	AVG	

Test Mode: TX B MODE CHANNEL 01


Ant 0°

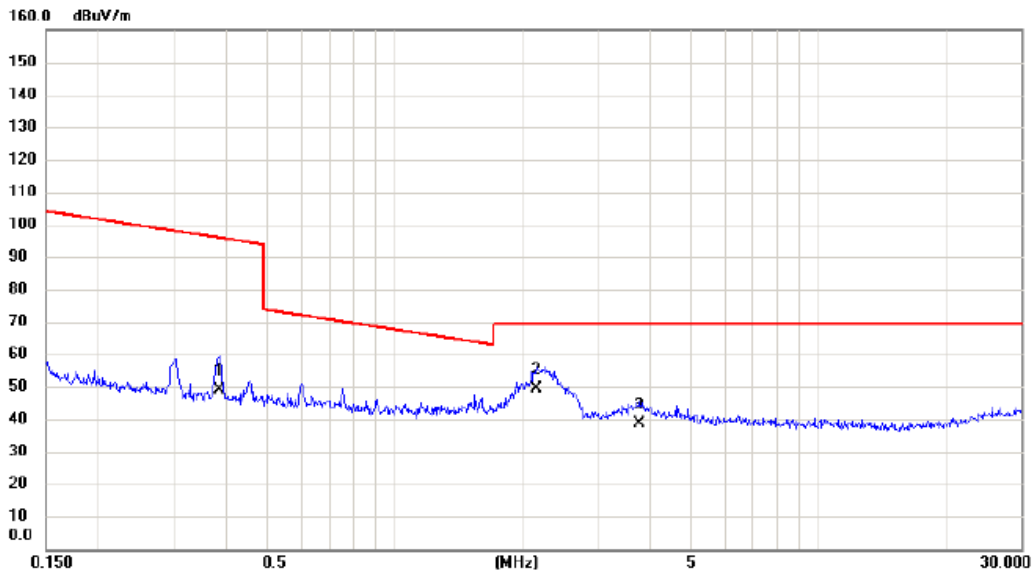

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3851	32.48	16.55	49.03	95.89	-46.86	AVG	
2	*	2.1552	33.81	15.46	49.27	69.54	-20.27	QP	
3		3.7793	23.45	15.02	38.47	69.54	-31.07	QP	

Test Mode: TX B MODE CHANNEL 01


Ant 90°

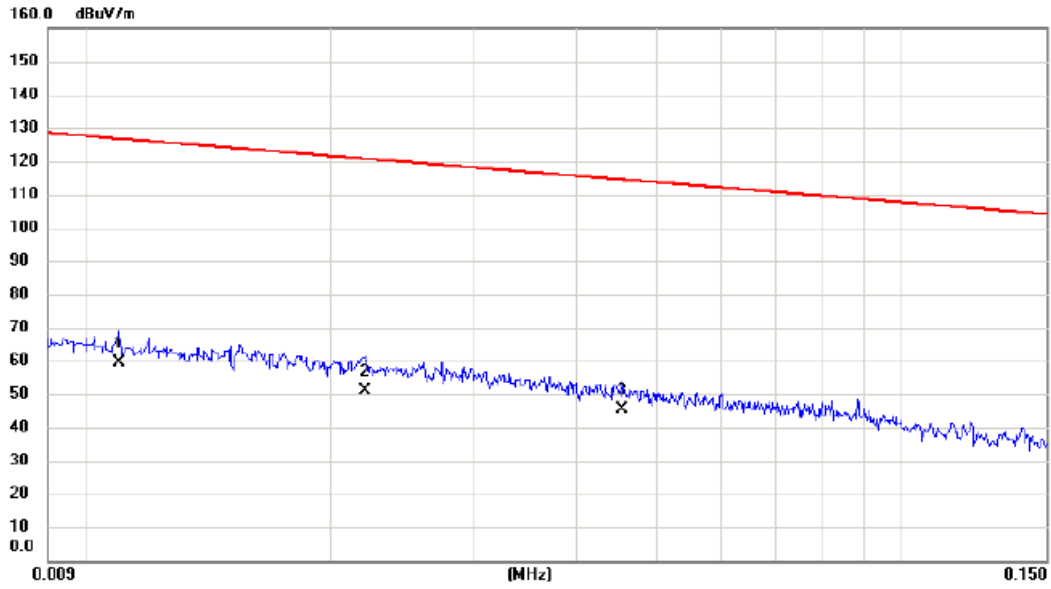

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0110	38.49	20.79	59.28	126.78	-67.50	AVG	
2		0.0220	31.57	19.56	51.13	120.76	-69.63	AVG	
3		0.0454	26.43	18.86	45.29	114.46	-69.17	AVG	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

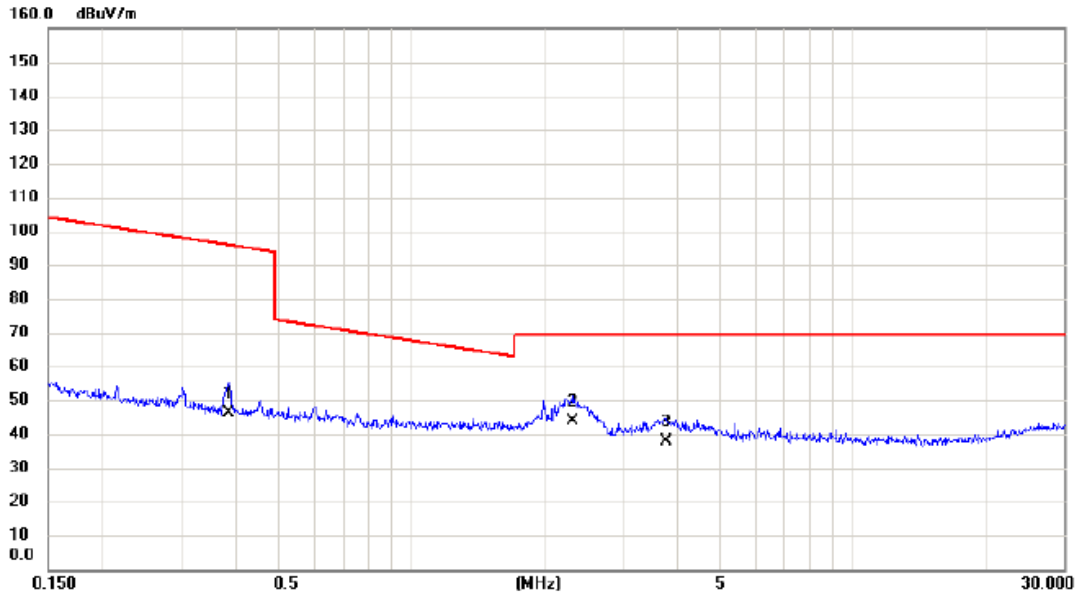

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.3852	29.48	16.55	46.03	95.89	-49.86	AVG	
2 *	2.3213	28.37	15.41	43.78	69.54	-25.76	QP	
3	3.7794	22.64	15.02	37.66	69.54	-31.88	QP	


ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

For Ant 1

Test Mode: TX B MODE CHANNEL 01

Vertical

80 dBuV/m

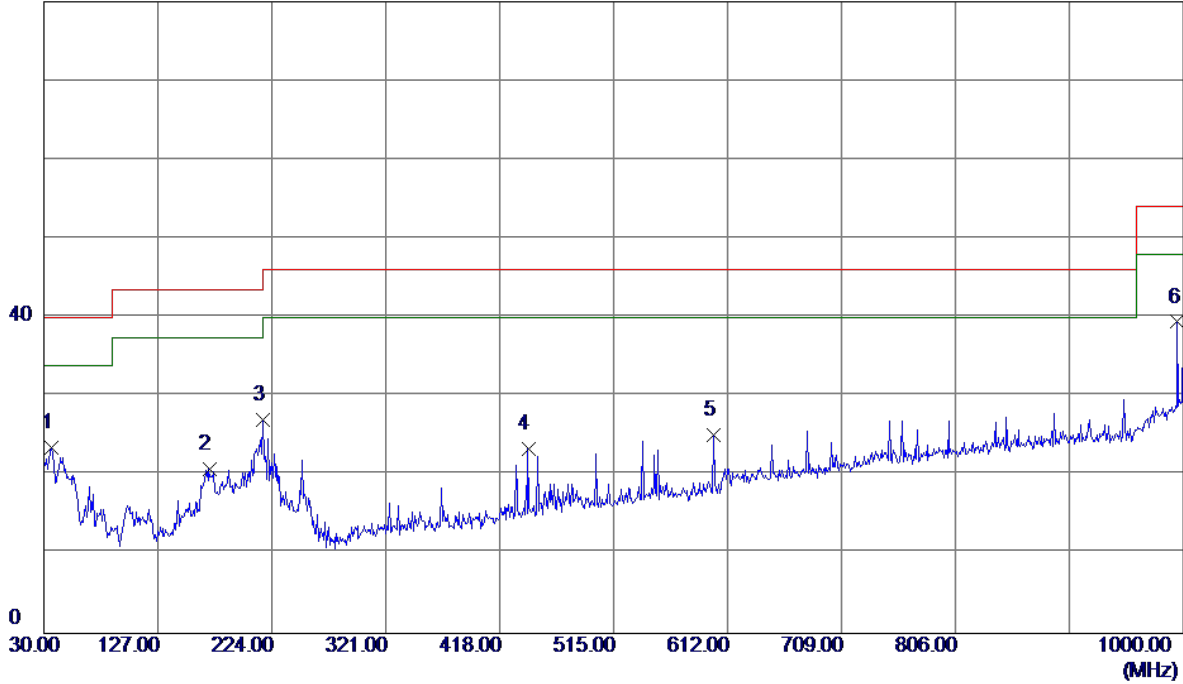


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	36.7900	38.45	-14.97	23.48	40.00	-16.52	Peak	
2	170.6500	34.48	-13.62	20.86	43.50	-22.64	Peak	
3	216.2400	42.54	-15.49	27.05	46.00	-18.95	Peak	
4	442.2500	36.22	-12.87	23.35	46.00	-22.65	Peak	
5	600.3600	34.97	-9.82	25.15	46.00	-20.85	Peak	
6 *	995.1500	41.75	-2.31	39.44	54.00	-14.56	Peak	

Test Mode: TX B MODE CHANNEL 01

Horizontal


80 dBuV/m

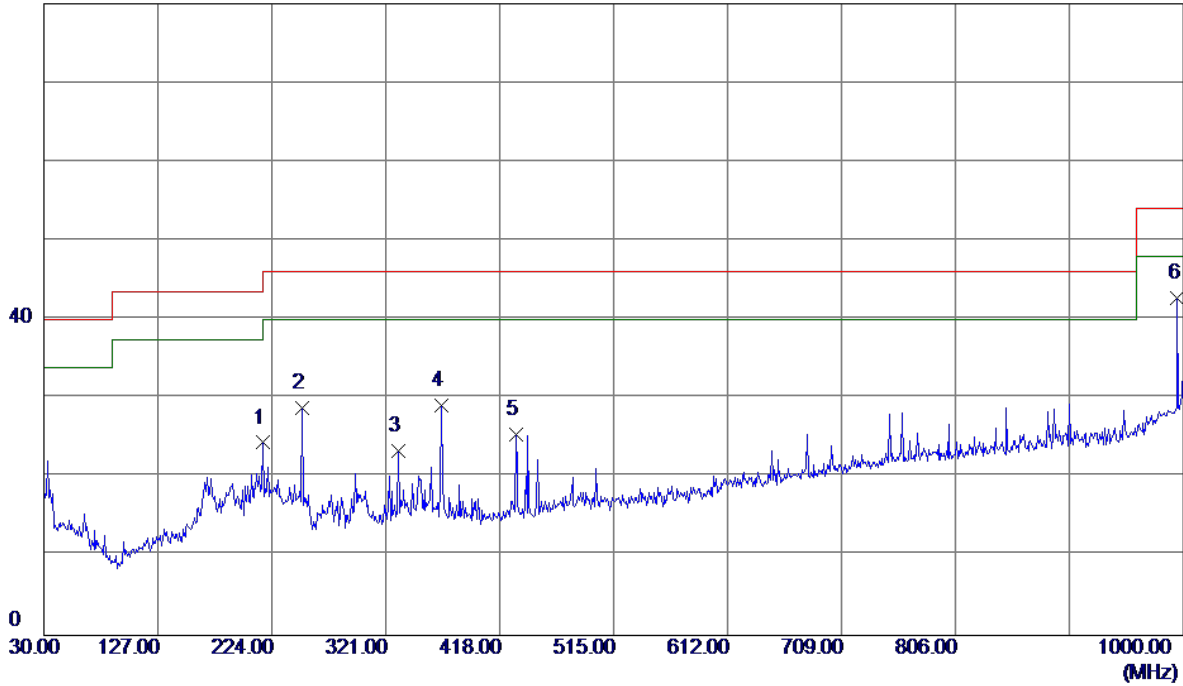

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	216.2400	39.89	-15.49	24.40	46.00	-21.60	Peak	
2	250.1900	45.50	-16.64	28.86	46.00	-17.14	Peak	
3	331.6700	37.81	-14.43	23.38	46.00	-22.62	Peak	
4	368.5300	43.20	-14.08	29.12	46.00	-16.88	Peak	
5	431.5800	38.52	-13.13	25.39	46.00	-20.61	Peak	
6 *	995.1500	45.09	-2.31	42.78	54.00	-11.22	Peak	

Test Mode: TX B MODE CHANNEL 06

Vertical

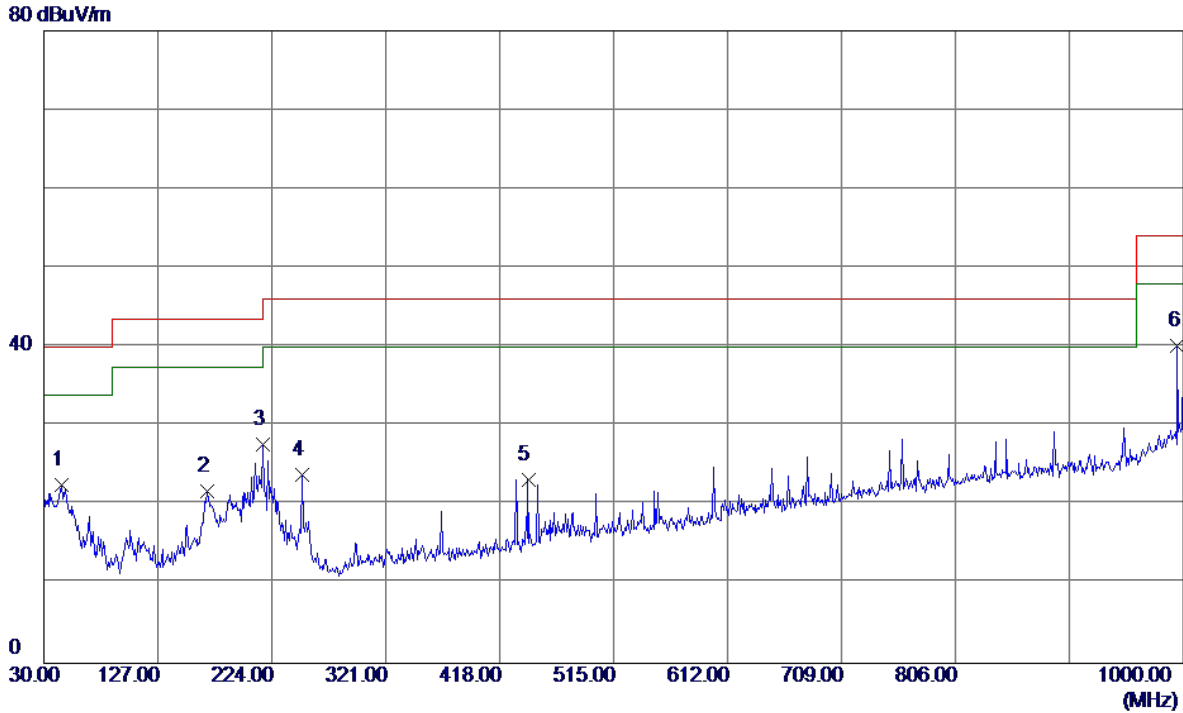


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	45.5200	36.23	-13.68	22.55	40.00	-17.45	Peak	
2	168.7100	35.43	-13.71	21.72	43.50	-21.78	Peak	
3	216.2400	43.23	-15.49	27.74	46.00	-18.26	Peak	
4	250.1900	40.43	-16.64	23.79	46.00	-22.21	Peak	
5	442.2500	36.09	-12.87	23.22	46.00	-22.78	Peak	
6 *	995.1500	42.54	-2.31	40.23	54.00	-13.77	Peak	

Test Mode: TX B MODE CHANNEL 06

Horizontal


80 dBuV/m

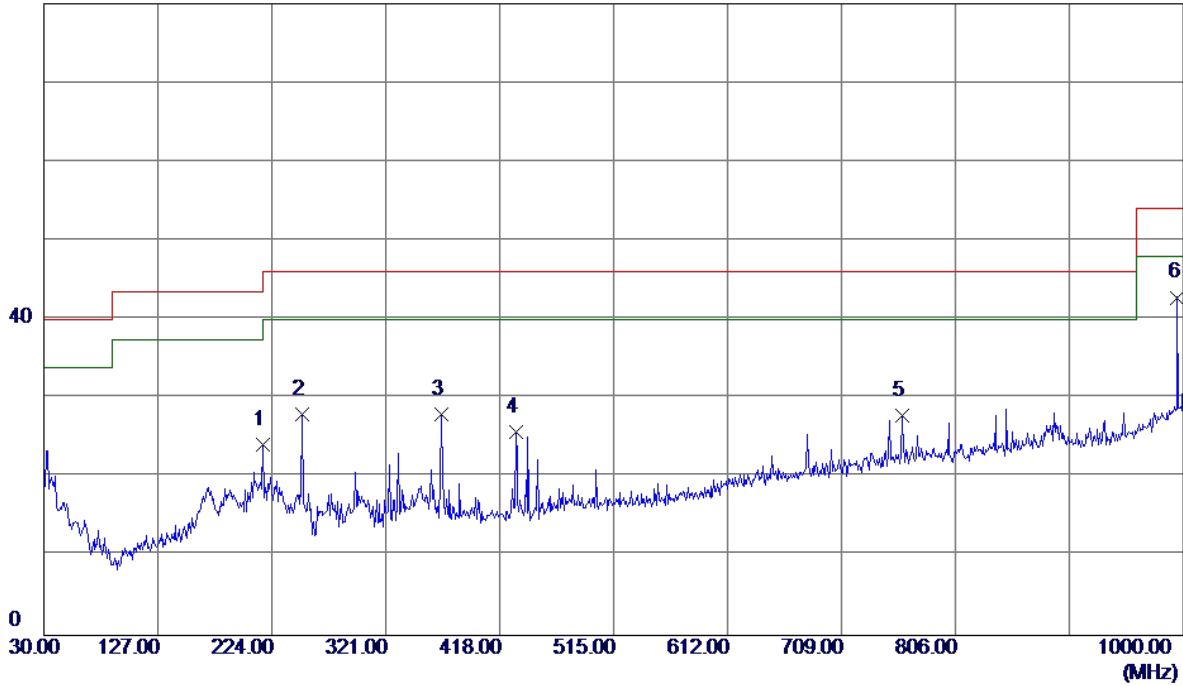

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	216.2400	39.58	-15.49	24.09	46.00	-21.91	Peak	
2	250.1900	44.60	-16.64	27.96	46.00	-18.04	Peak	
3	368.5300	42.06	-14.08	27.98	46.00	-18.02	Peak	
4	431.5800	38.83	-13.13	25.70	46.00	-20.30	Peak	
5	760.4099	34.16	-6.35	27.81	46.00	-18.19	Peak	
6 *	995.1500	45.11	-2.31	42.80	54.00	-11.20	Peak	

Test Mode: TX B MODE CHANNEL 11

Vertical

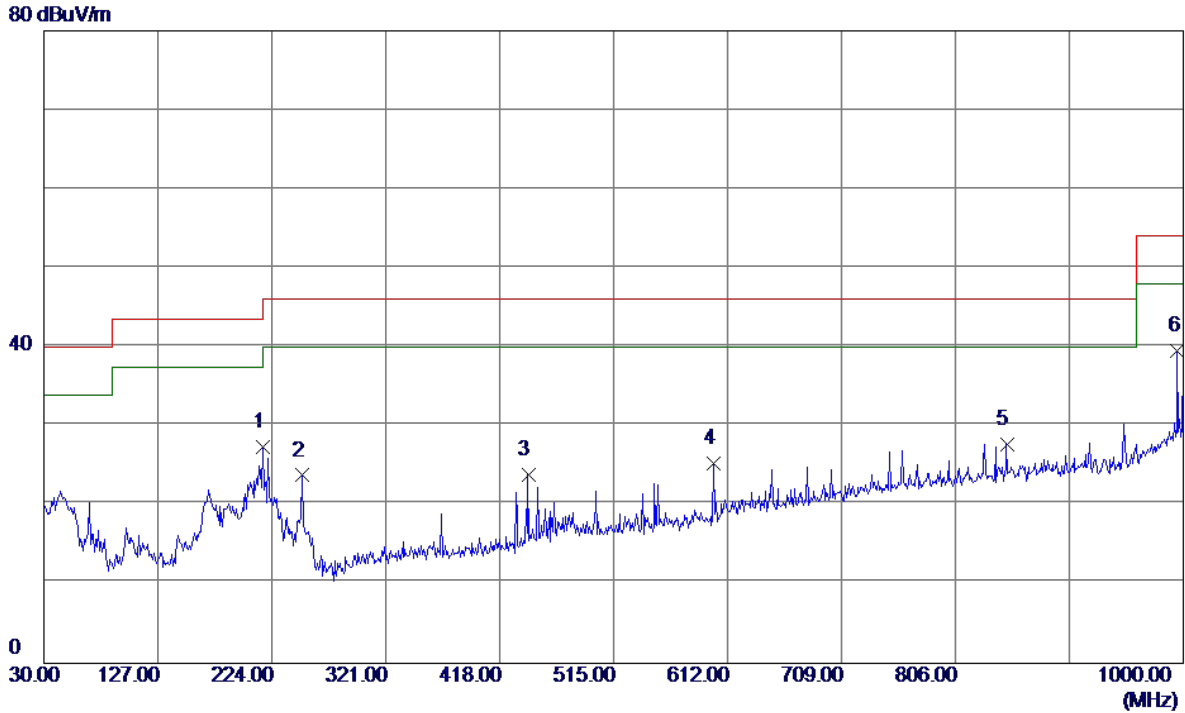


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	216.2400	42.91	-15.49	27.42	46.00	-18.58	Peak	
2	250.1900	40.40	-16.64	23.76	46.00	-22.24	Peak	
3	442.2500	36.67	-12.87	23.80	46.00	-22.20	Peak	
4	600.3600	35.10	-9.82	25.28	46.00	-20.72	Peak	
5	849.6500	32.22	-4.56	27.66	46.00	-18.34	Peak	
6 *	995.1500	41.81	-2.31	39.50	54.00	-14.50	Peak	

Test Mode: TX B MODE CHANNEL 11

Horizontal

80 dBuV/m

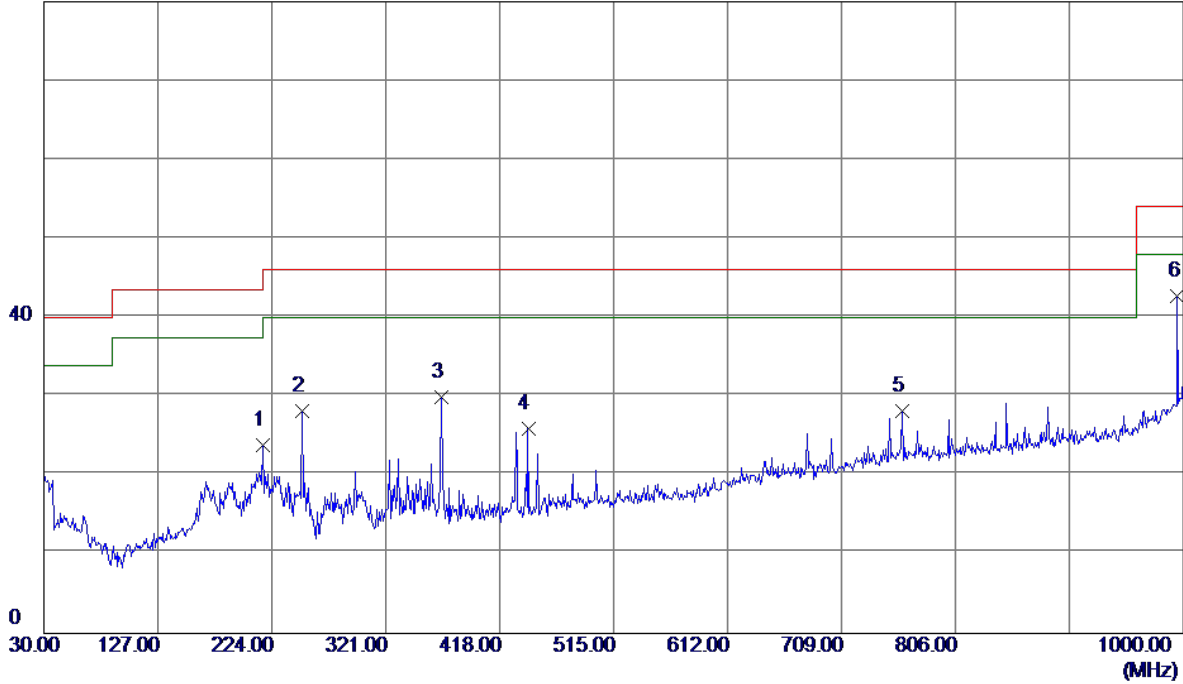


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	216.2400	39.39	-15.49	23.90	46.00	-22.10	Peak	
2	250.1900	44.83	-16.64	28.19	46.00	-17.81	Peak	
3	368.5300	44.01	-14.08	29.93	46.00	-16.07	Peak	
4	442.2500	38.86	-12.87	25.99	46.00	-20.01	Peak	
5	760.4099	34.49	-6.35	28.14	46.00	-17.86	Peak	
6 *	995.1500	45.08	-2.31	42.77	54.00	-11.23	Peak	

For Ant 2

Test Mode: TX B MODE CHANNEL 01

Vertical

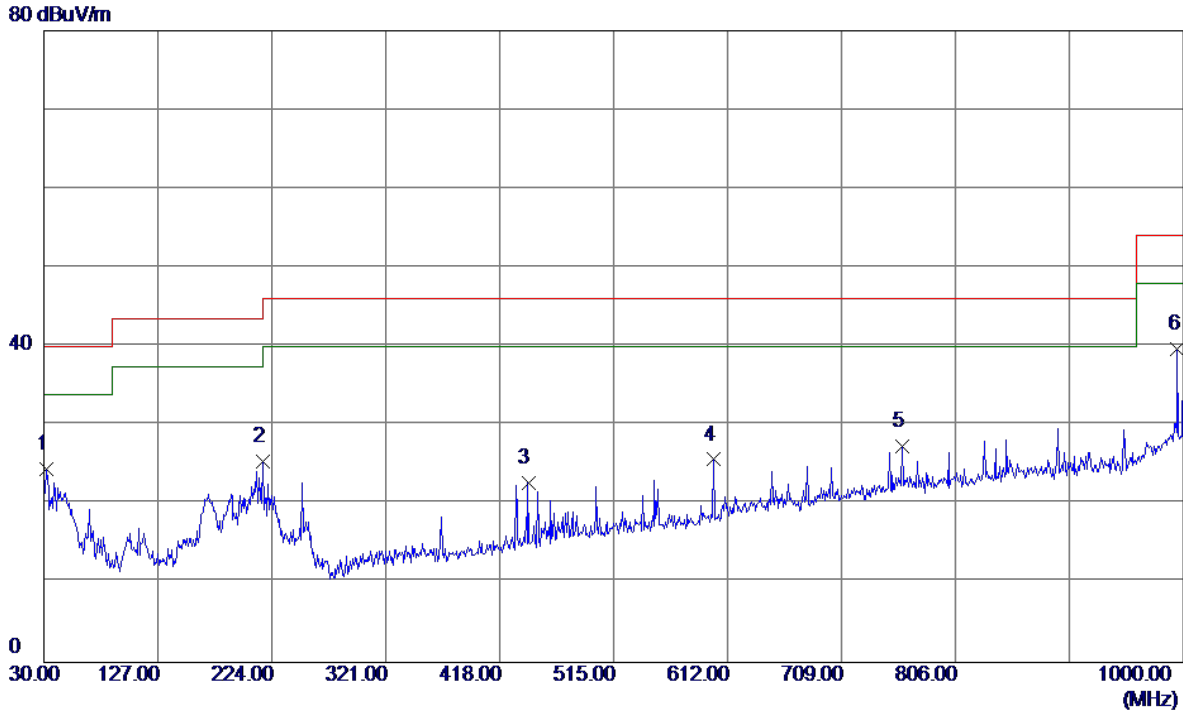


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.9400	40.03	-15.56	24.47	40.00	-15.53	Peak	
2	216.2400	40.94	-15.49	25.45	46.00	-20.55	Peak	
3	442.2500	35.53	-12.87	22.66	46.00	-23.34	Peak	
4	600.3600	35.50	-9.82	25.68	46.00	-20.32	Peak	
5	760.4099	33.64	-6.35	27.29	46.00	-18.71	Peak	
6 *	995.1500	41.94	-2.31	39.63	54.00	-14.37	Peak	

Test Mode: TX B MODE CHANNEL 01

Horizontal


80 dBuV/m

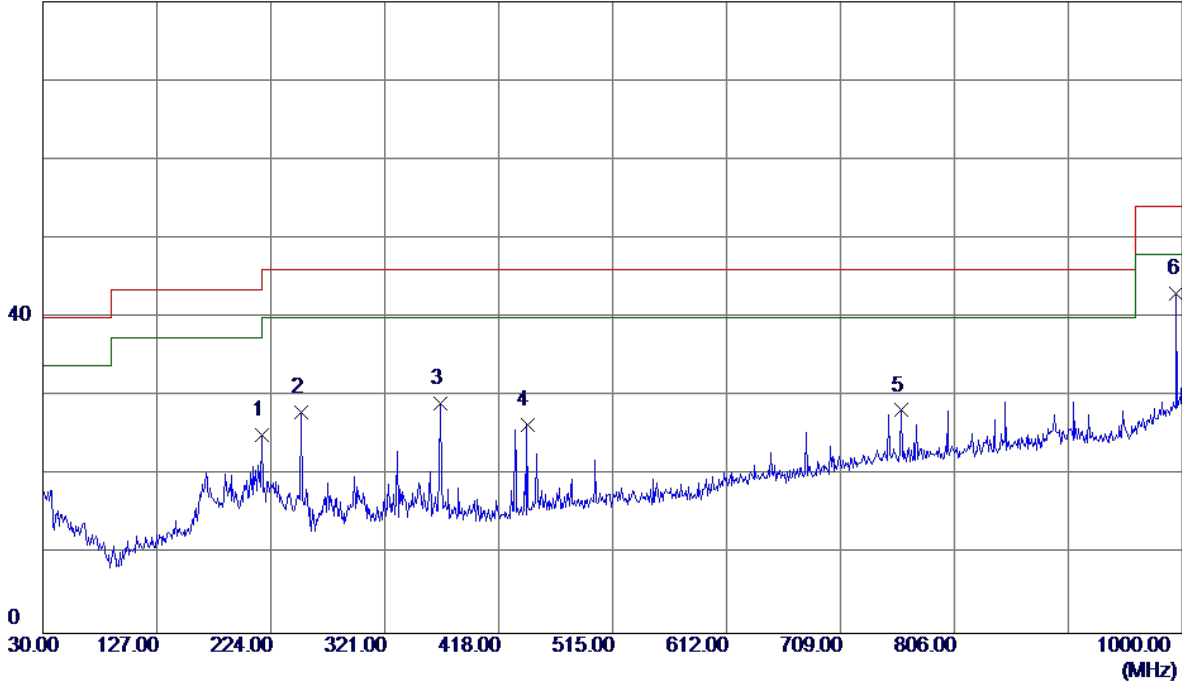

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	216.2400	40.55	-15.49	25.06	46.00	-20.94	Peak	
2	250.1900	44.63	-16.64	27.99	46.00	-18.01	Peak	
3	368.5300	43.18	-14.08	29.10	46.00	-16.90	Peak	
4	442.2500	39.22	-12.87	26.35	46.00	-19.65	Peak	
5	760.4099	34.59	-6.35	28.24	46.00	-17.76	Peak	
6 *	995.1500	45.31	-2.31	43.00	54.00	-11.00	Peak	

Test Mode: TX B MODE CHANNEL 06

Vertical

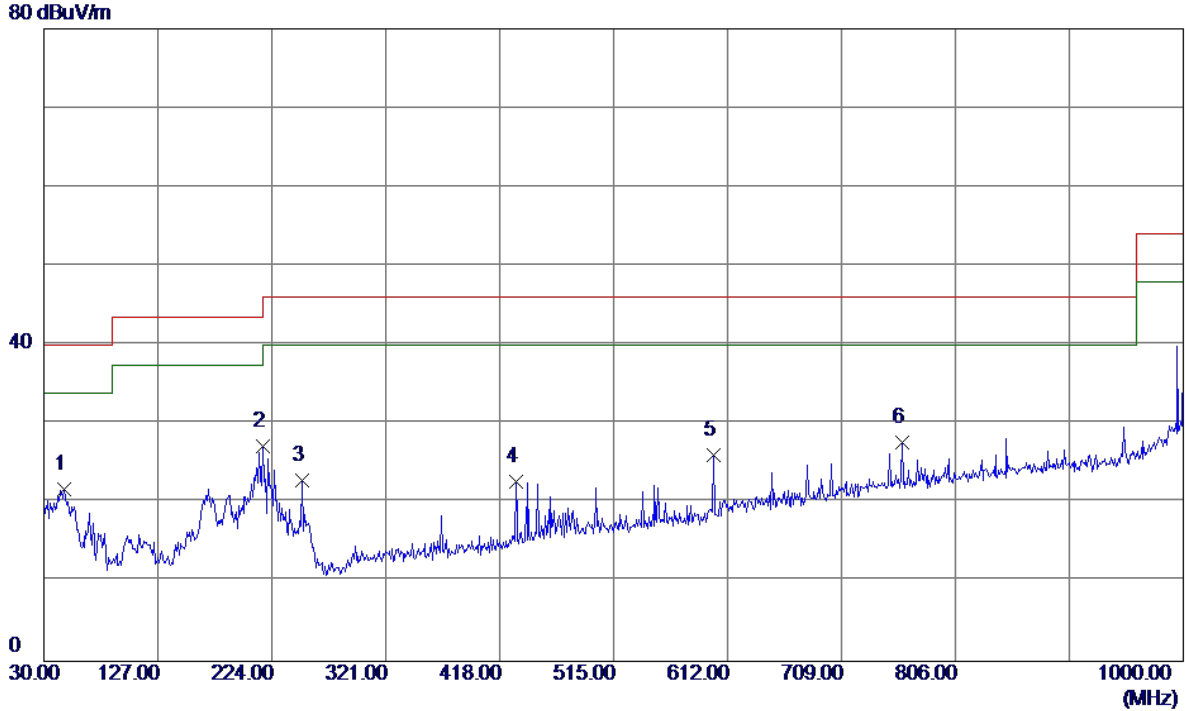


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	47.4600	35.55	-13.75	21.80	40.00	-18.20	Peak	
2	216.2400	42.70	-15.49	27.21	46.00	-18.79	Peak	
3	250.1900	39.53	-16.64	22.89	46.00	-23.11	Peak	
4	431.5800	35.79	-13.13	22.66	46.00	-23.34	Peak	
5	600.3600	35.92	-9.82	26.10	46.00	-19.90	Peak	
6	760.4099	34.07	-6.35	27.72	46.00	-18.28	Peak	

Test Mode: TX B MODE CHANNEL 06

Horizontal


80 dBuV/m

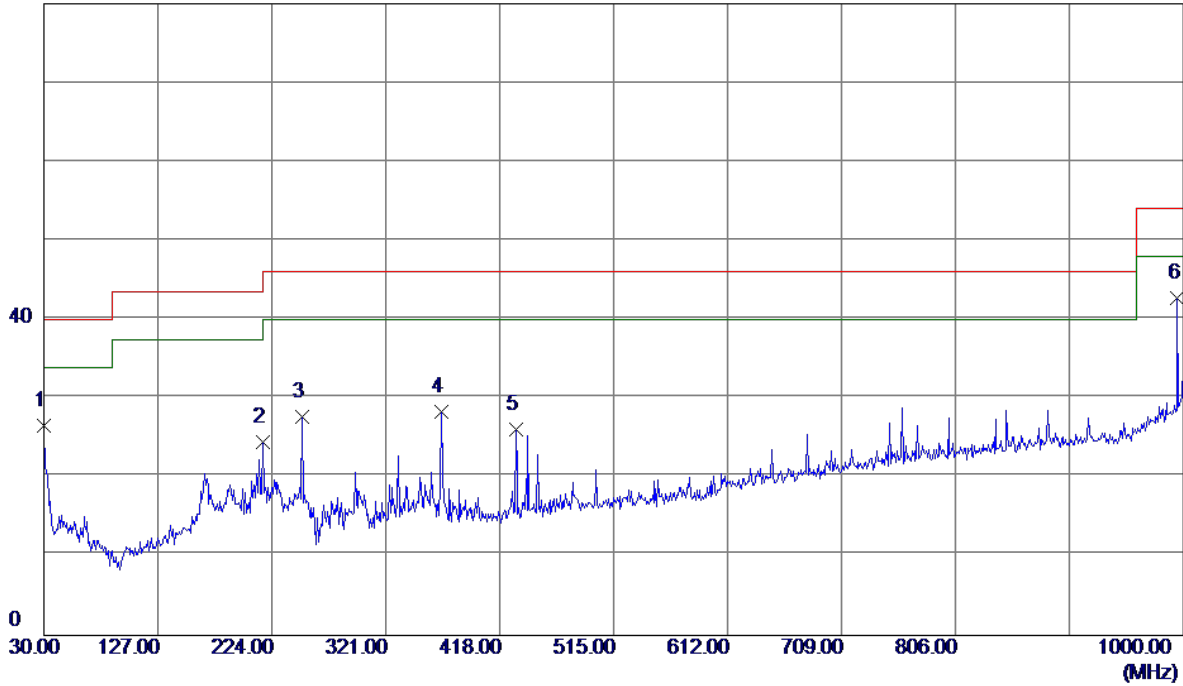

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	42.30	-15.76	26.54	40.00	-13.46	Peak	
2	216.2400	39.93	-15.49	24.44	46.00	-21.56	Peak	
3	250.1900	44.25	-16.64	27.61	46.00	-18.39	Peak	
4	368.5300	42.34	-14.08	28.26	46.00	-17.74	Peak	
5	431.5800	39.16	-13.13	26.03	46.00	-19.97	Peak	
6 *	995.1500	44.96	-2.31	42.65	54.00	-11.35	Peak	

Test Mode: TX B MODE CHANNEL 11


Vertical

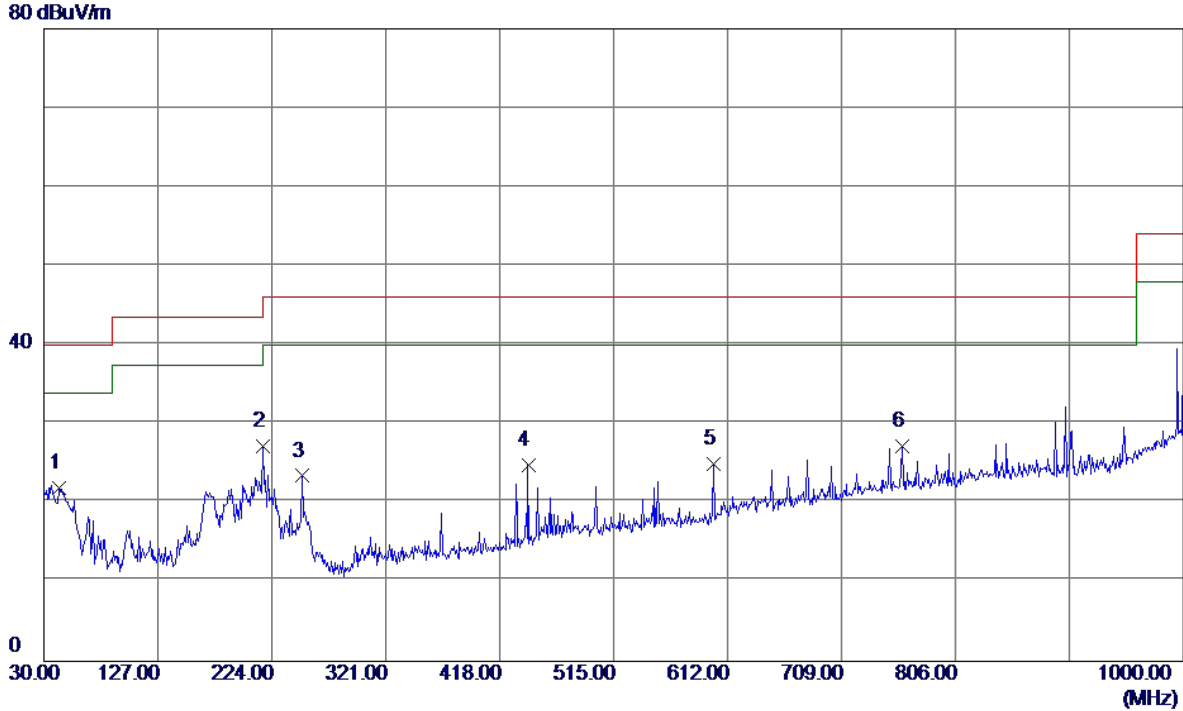

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	42.6100	36.17	-14.21	21.96	40.00	-18.04	Peak	
2	216.2400	42.62	-15.49	27.13	46.00	-18.87	Peak	
3	250.1900	40.08	-16.64	23.44	46.00	-22.56	Peak	
4	442.2500	37.70	-12.87	24.83	46.00	-21.17	Peak	
5	600.3600	34.77	-9.82	24.95	46.00	-21.05	Peak	
6	760.4099	33.55	-6.35	27.20	46.00	-18.80	Peak	

Test Mode: TX B MODE CHANNEL 11

Horizontal

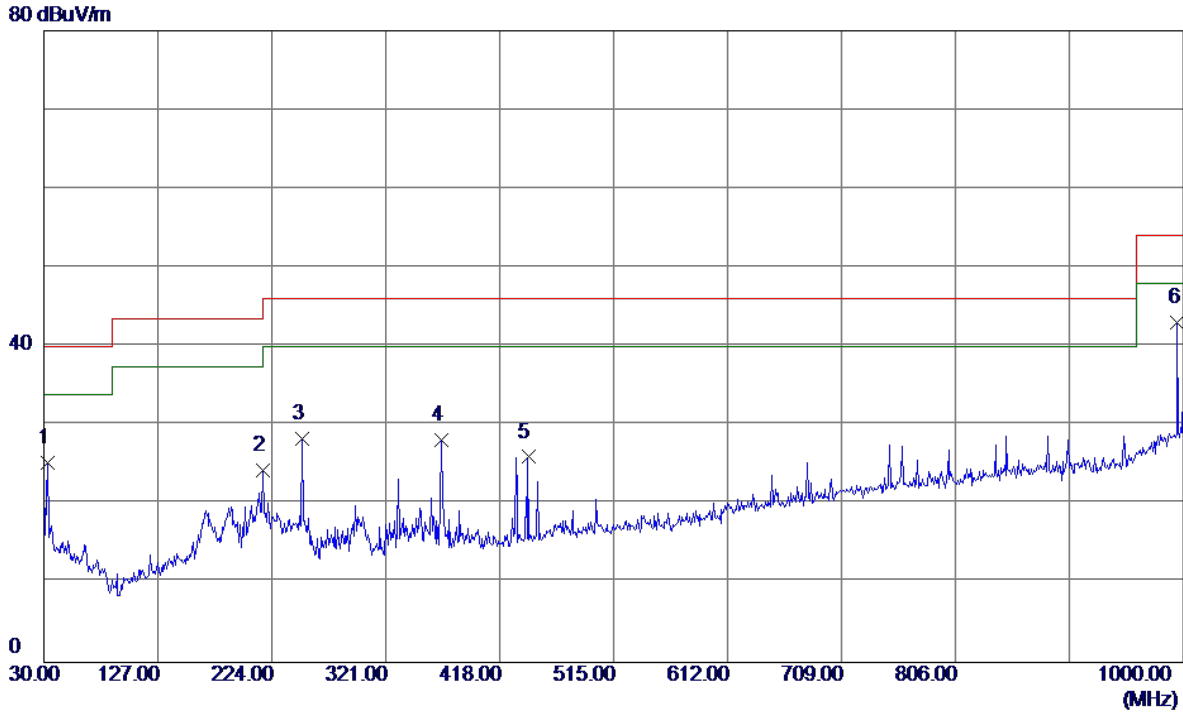

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	32.9100	40.68	-15.42	25.26	40.00	-14.74	Peak	
2	216.2400	39.76	-15.49	24.27	46.00	-21.73	Peak	
3	250.1900	44.99	-16.64	28.35	46.00	-17.65	Peak	
4	368.5300	42.21	-14.08	28.13	46.00	-17.87	Peak	
5	442.2500	38.87	-12.87	26.00	46.00	-20.00	Peak	
6 *	995.1500	45.30	-2.31	42.99	54.00	-11.01	Peak	


ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

For Ant 1

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical


115 dBuV/m

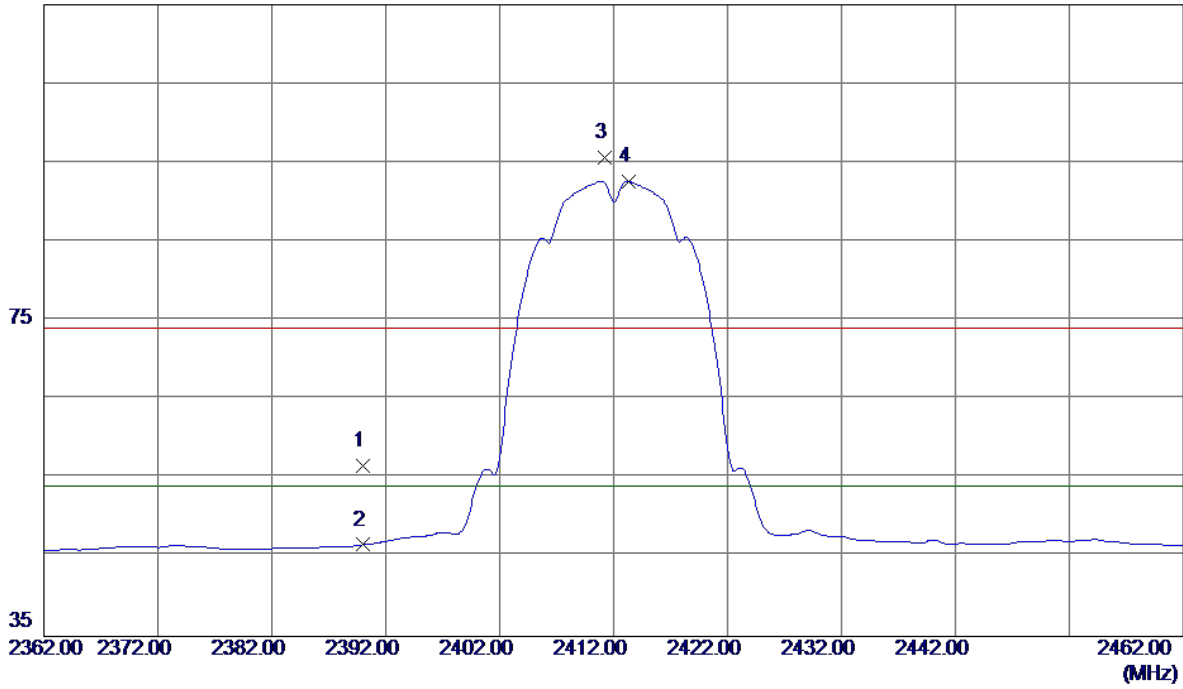

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.20	32.38	56.58	74.00	-17.42	Peak	
2	2390.0000	14.22	32.38	46.60	54.00	-7.40	AVG	
3	2411.2000	63.22	32.45	95.67	74.00	21.67	Peak	No Limit
4 *	2413.3000	60.19	32.46	92.65	54.00	38.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical

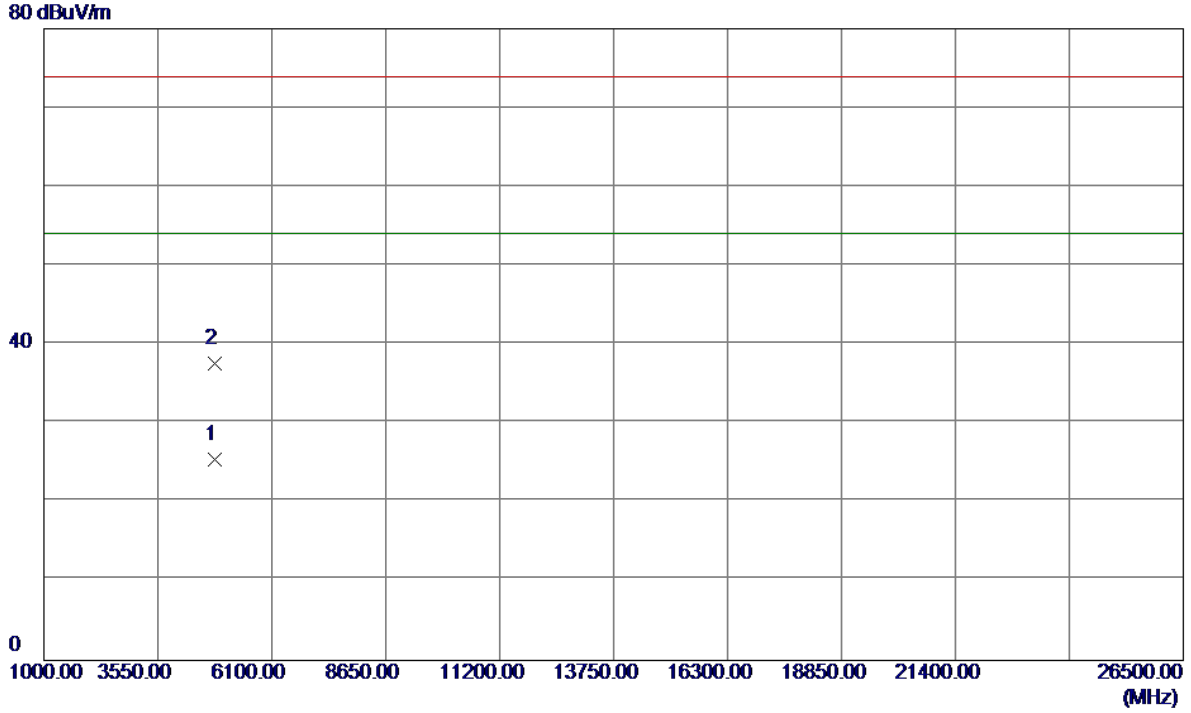


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.7639	20.01	5.47	25.48	54.00	-28.52	AVG	
2	4823.8300	32.08	5.47	37.55	74.00	-36.45	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal


115 dBuV/m

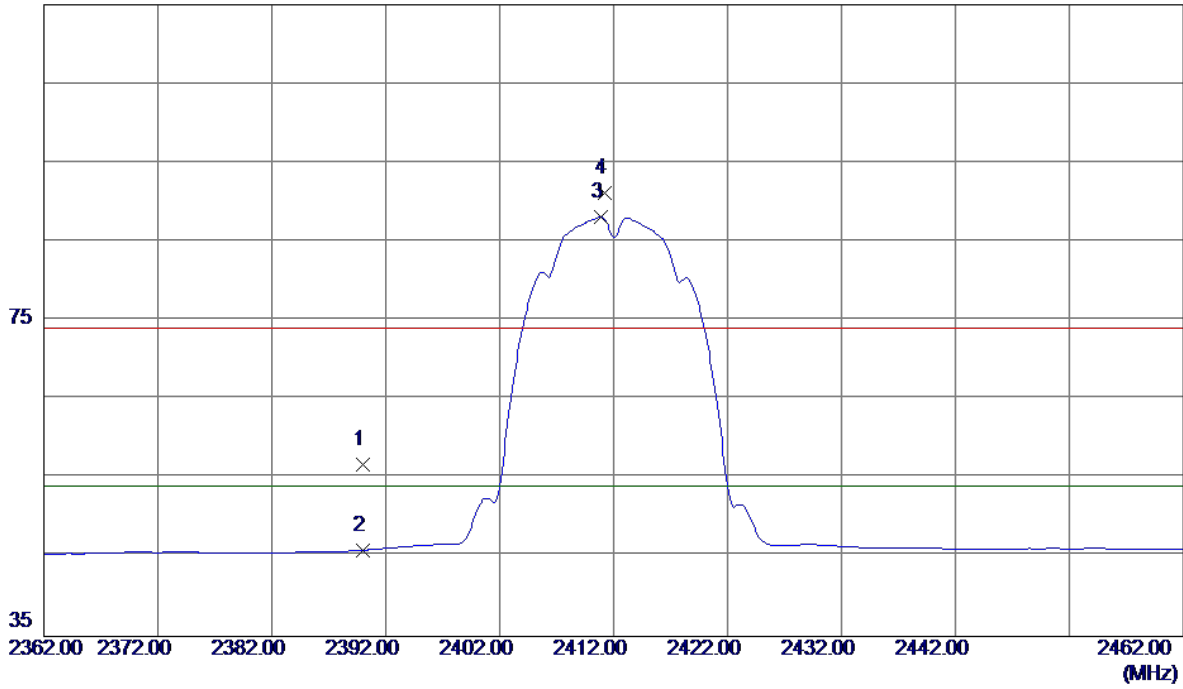

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.34	32.38	56.72	74.00	-17.28	Peak	
2	2390.0000	13.53	32.38	45.91	54.00	-8.09	AVG	
3 *	2410.9000	55.66	32.45	88.11	54.00	34.11	AVG	No Limit
4	2411.2000	58.67	32.45	91.12	74.00	17.12	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Horizontal

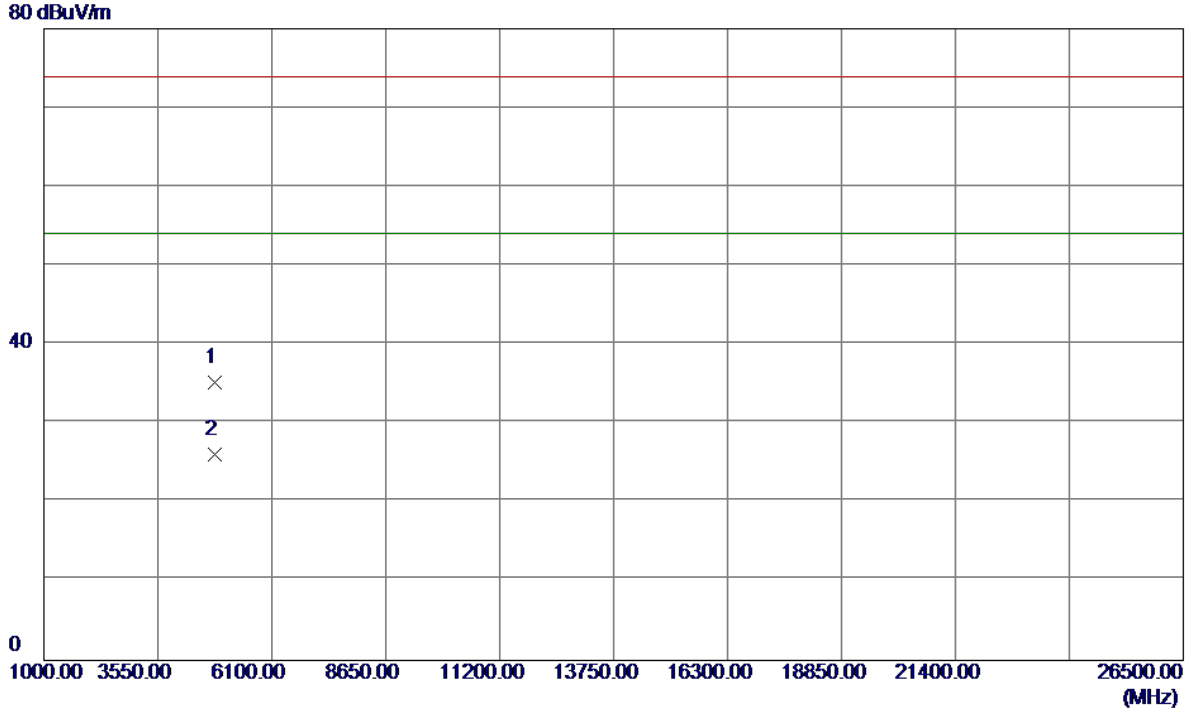

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9600	29.77	5.47	35.24	74.00	-38.76	Peak	
2 *	4824.6300	20.62	5.48	26.10	54.00	-27.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

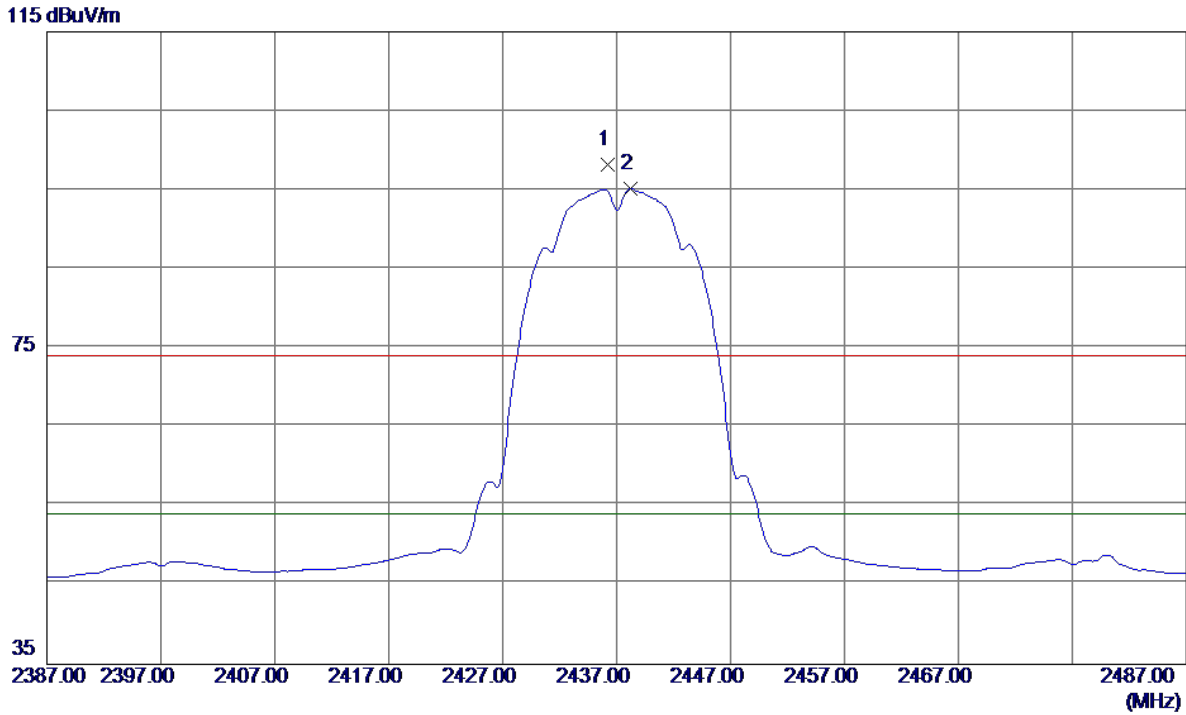

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.2000	65.62	32.54	98.16	74.00	24.16	Peak	No Limit
2 *	2438.2000	62.57	32.55	95.12	54.00	41.12	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

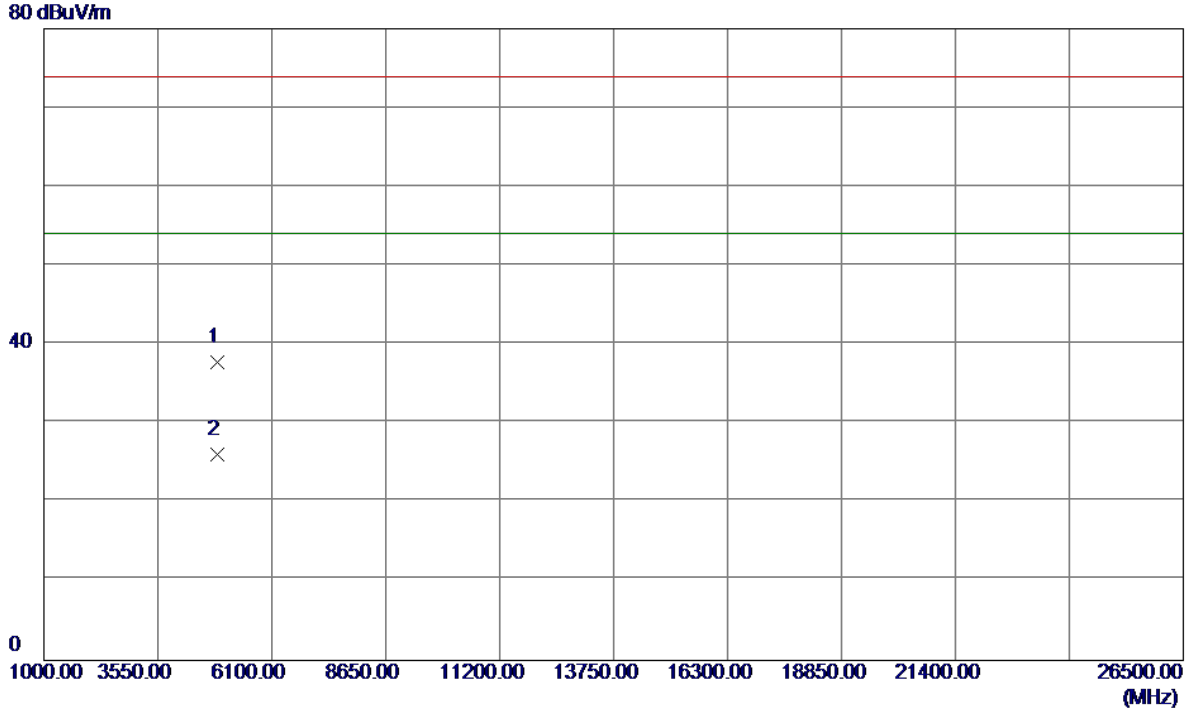

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.8580	32.13	5.61	37.74	74.00	-36.26	Peak	
2 *	4874.2460	20.54	5.61	26.15	54.00	-27.85	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

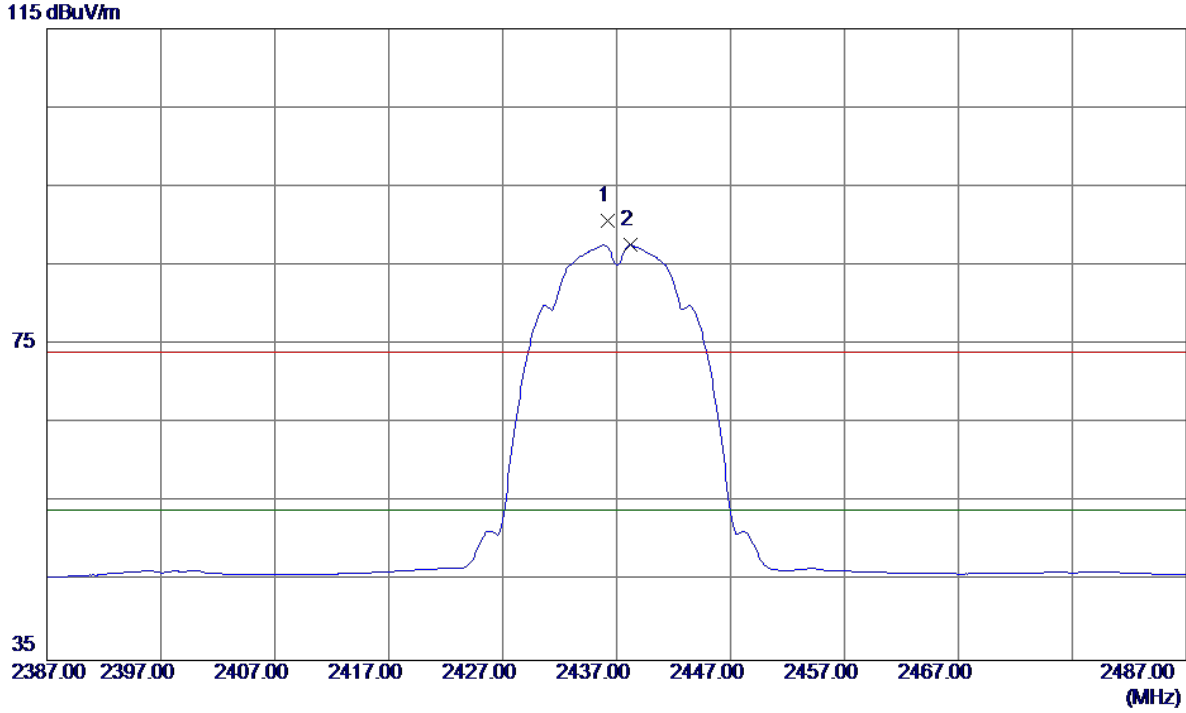

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.2000	58.15	32.54	90.69	74.00	16.69	Peak	No Limit
2 *	2438.2000	55.04	32.55	87.59	54.00	33.59	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal

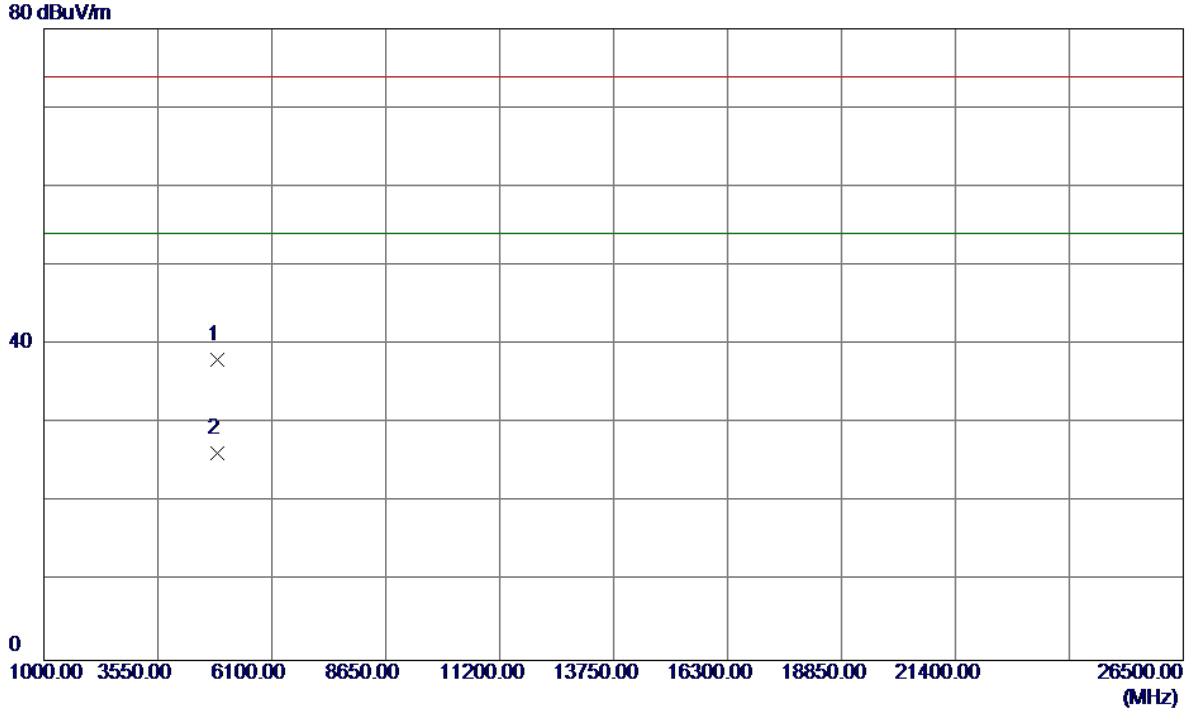


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0820	32.53	5.61	38.14	74.00	-35.86	Peak	
2 *	4874.8420	20.60	5.61	26.21	54.00	-27.79	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical


115 dBuV/m

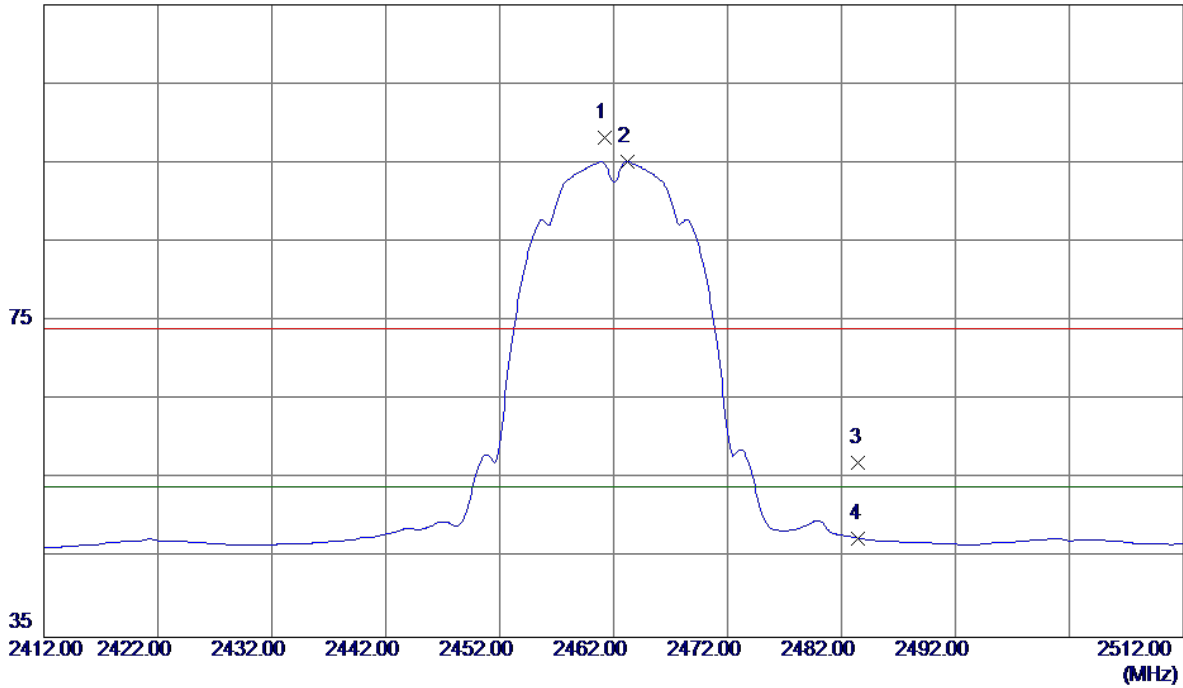

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.2000	65.60	32.63	98.23	74.00	24.23	Peak	No Limit
2 *	2463.2000	62.51	32.64	95.15	54.00	41.15	AVG	No Limit
3	2483.5000	24.37	32.71	57.08	74.00	-16.92	Peak	
4	2483.5000	14.81	32.71	47.52	54.00	-6.48	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical

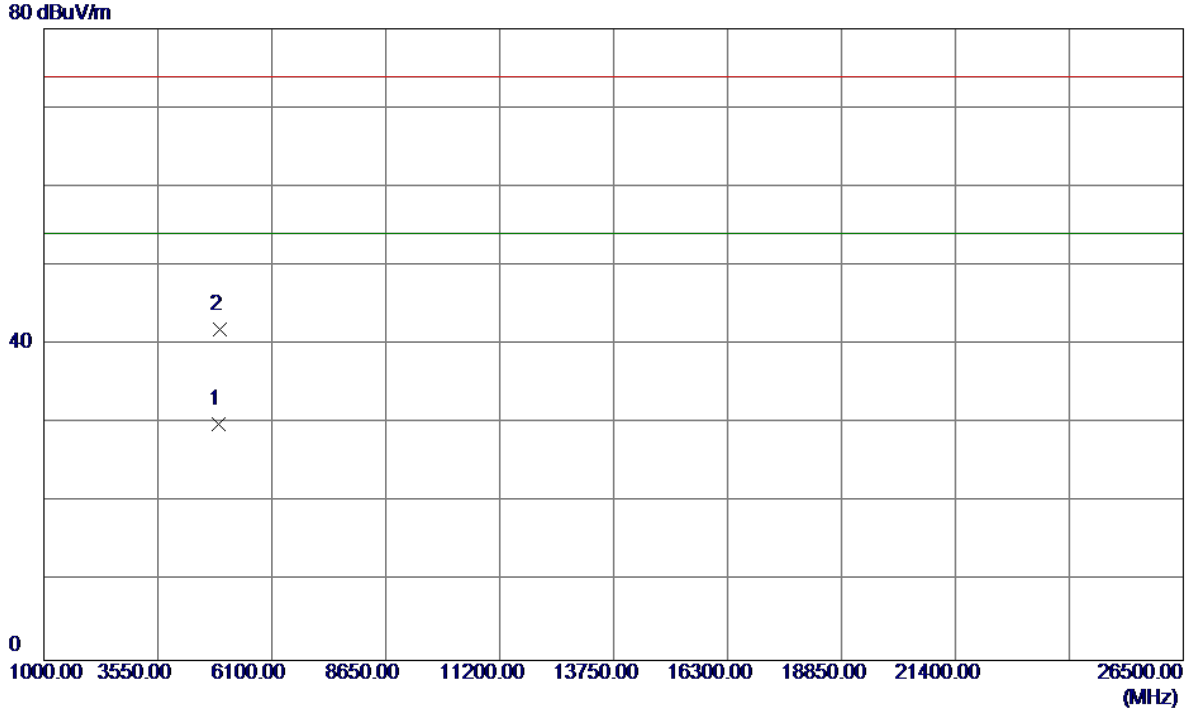


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0560	24.25	5.74	29.99	54.00	-24.01	AVG	
2	4924.8800	36.19	5.75	41.94	74.00	-32.06	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal


115 dBuV/m

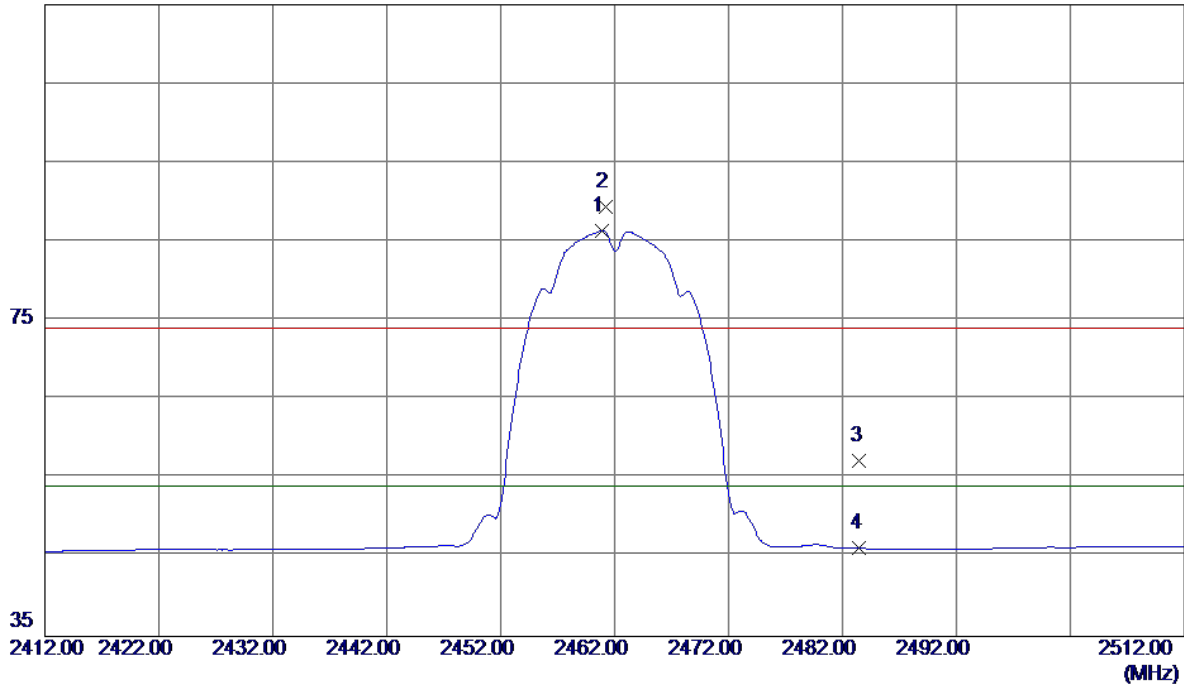

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.9000	53.76	32.63	86.39	54.00	32.39	AVG	No Limit
2	2461.2000	56.81	32.63	89.44	74.00	15.44	Peak	No Limit
3	2483.5000	24.60	32.71	57.31	74.00	-16.69	Peak	
4	2483.5000	13.43	32.71	46.14	54.00	-7.86	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal

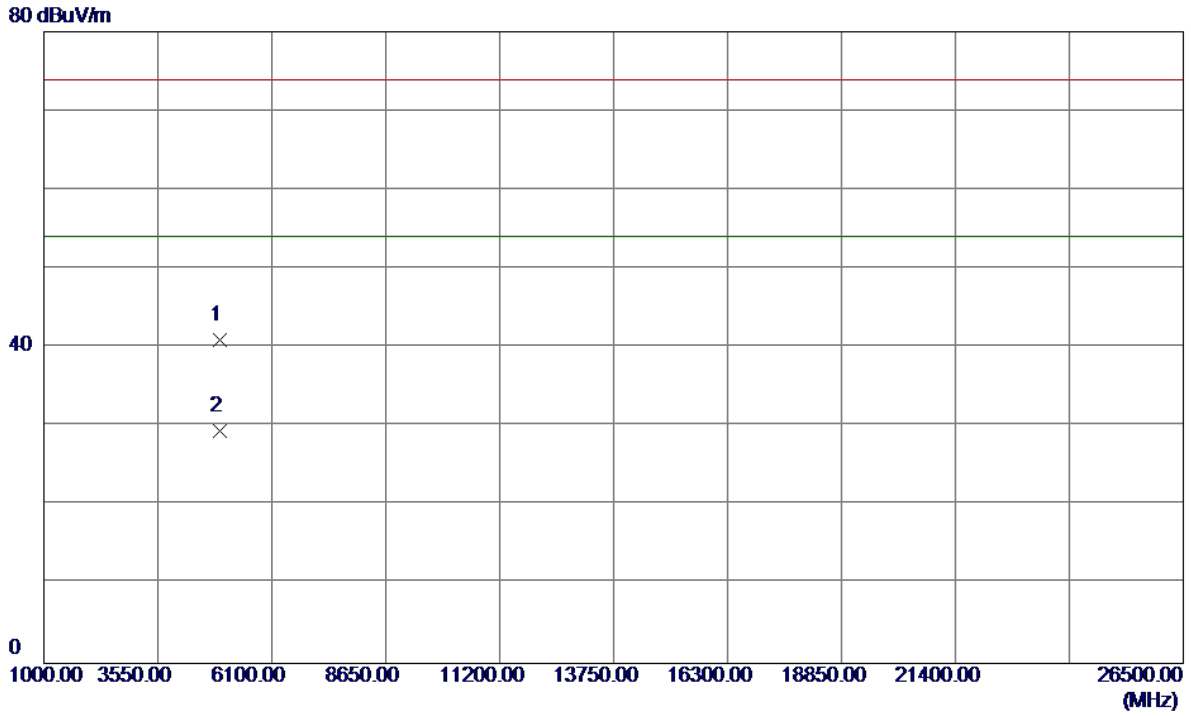


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.3720	35.24	5.75	40.99	74.00	-33.01	Peak	
2 *	4924.6920	23.67	5.75	29.42	54.00	-24.58	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical


115 dBuV/m

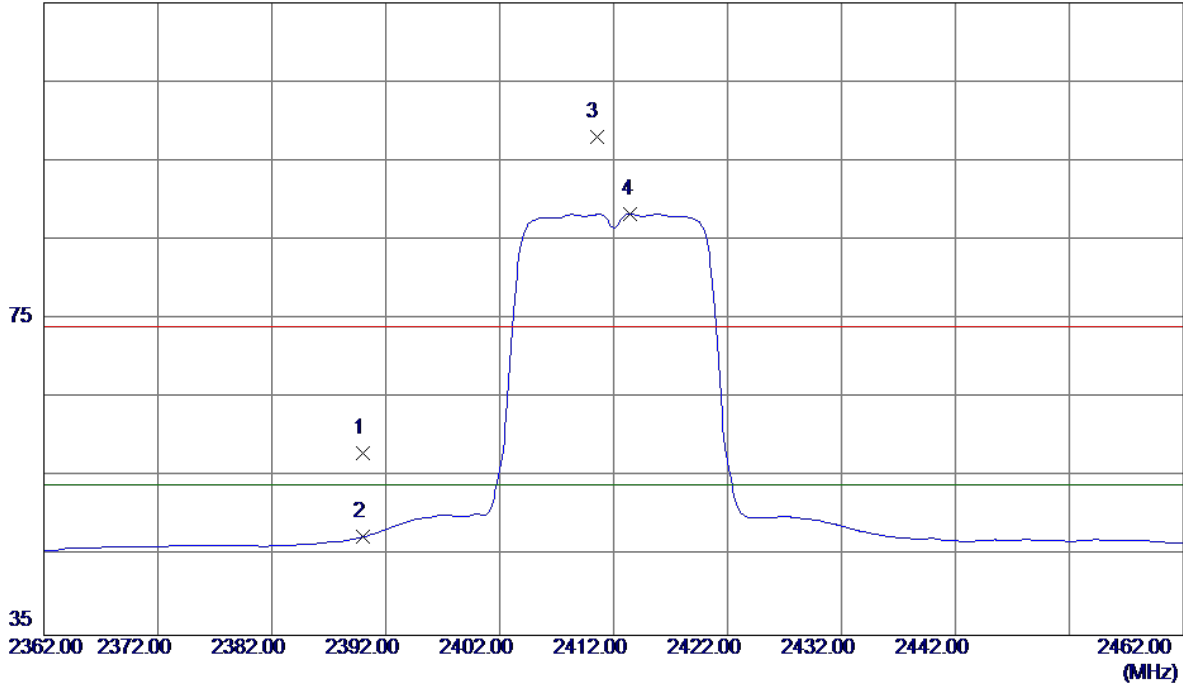

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.63	32.38	58.01	74.00	-15.99	Peak	
2	2390.0000	15.06	32.38	47.44	54.00	-6.56	AVG	
3	2410.5000	65.60	32.45	98.05	74.00	24.05	Peak	No Limit
4 *	2413.5000	55.86	32.46	88.32	54.00	34.32	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

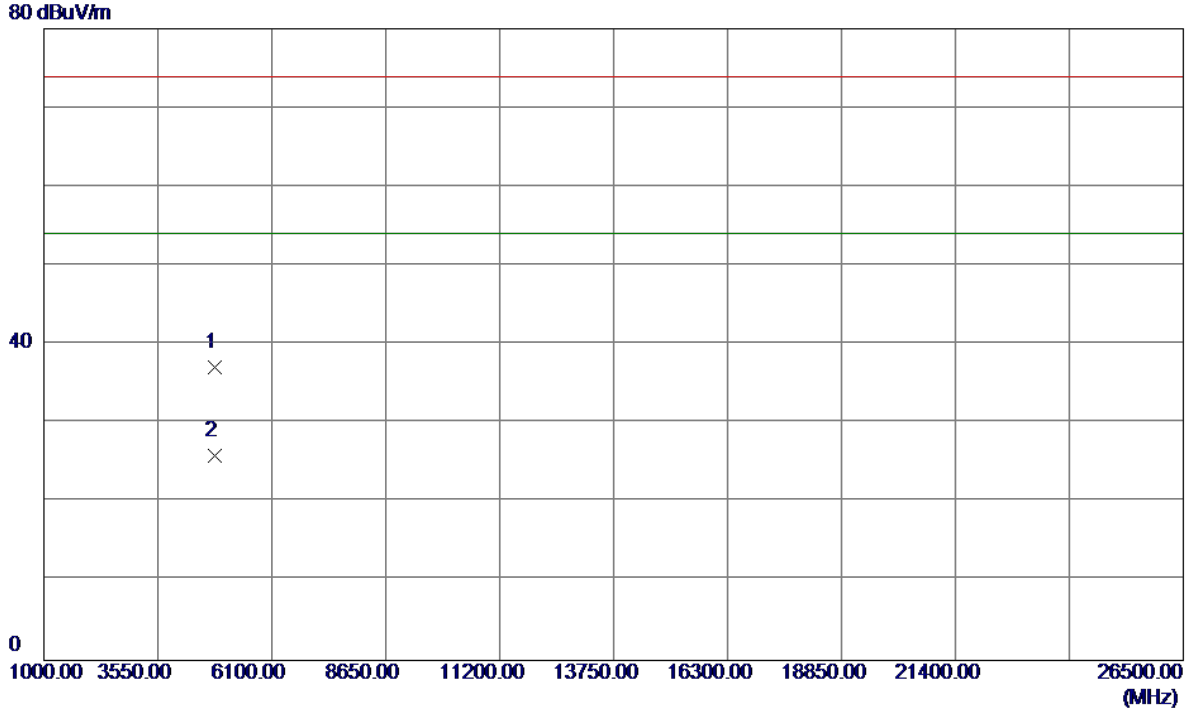


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9250	31.70	5.47	37.17	74.00	-36.83	Peak	
2 *	4824.6250	20.42	5.48	25.90	54.00	-28.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal


115 dBuV/m

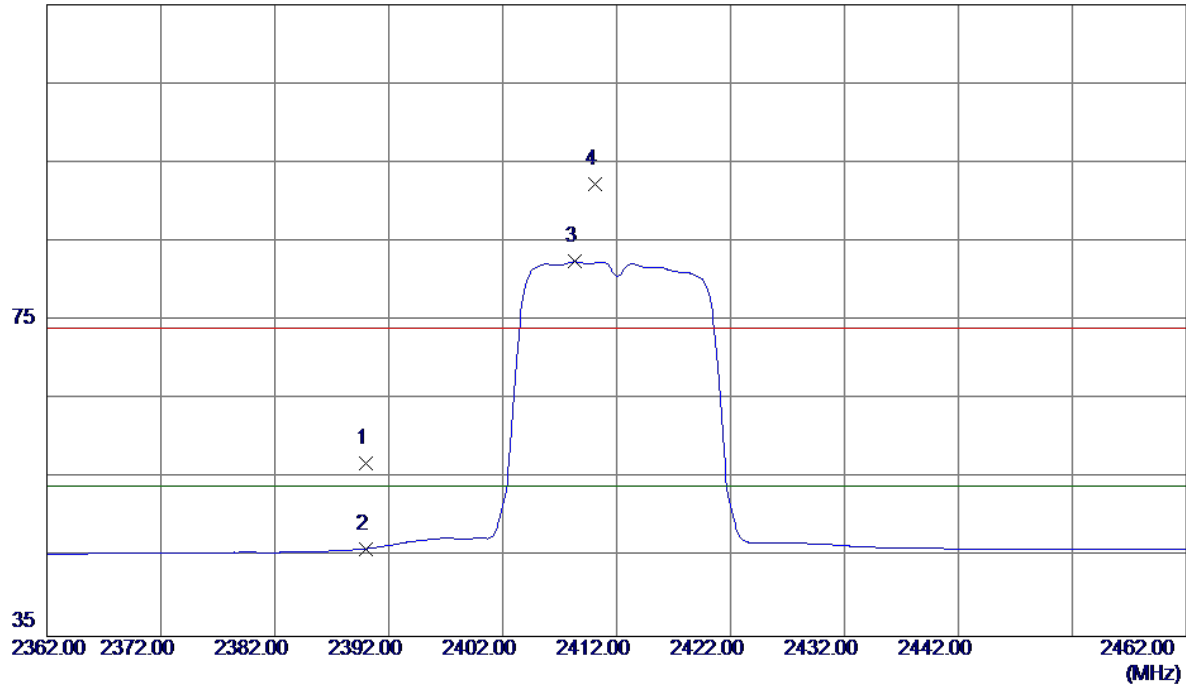

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.60	32.38	56.98	74.00	-17.02	Peak	
2	2390.0000	13.72	32.38	46.10	54.00	-7.90	AVG	
3 *	2408.3000	50.03	32.44	82.47	54.00	28.47	AVG	No Limit
4	2410.1000	59.78	32.45	92.23	74.00	18.23	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

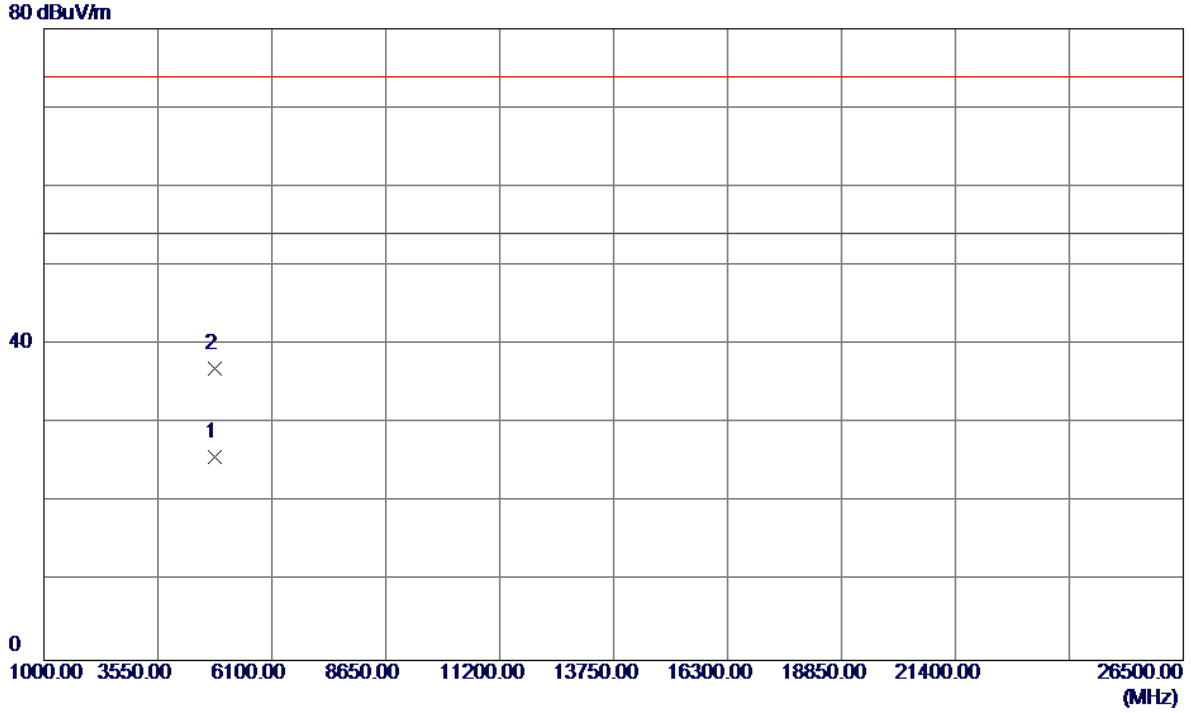


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.6600	20.30	5.47	25.77	54.00	-28.23	AVG	
2	4825.2050	31.41	5.48	36.89	74.00	-37.11	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical


115 dBuV/m

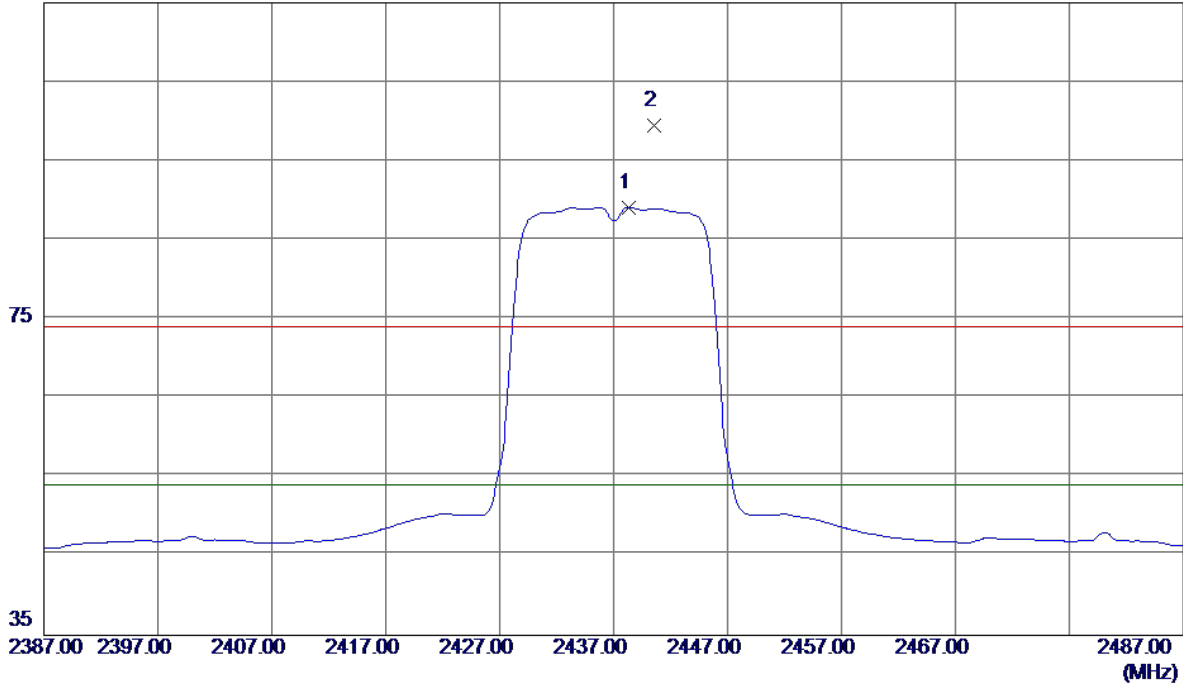

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.3000	56.60	32.55	89.15	54.00	35.15	AVG	No Limit
2	2440.6000	66.85	32.56	99.41	74.00	25.41	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical

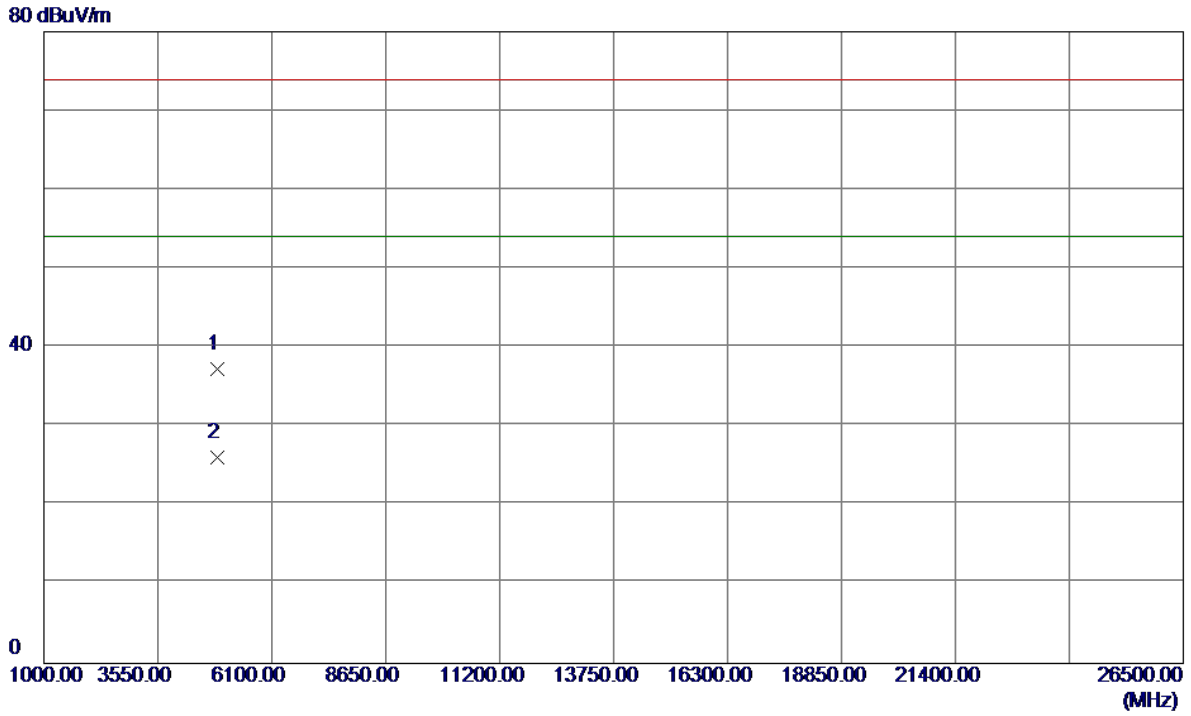


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4872.3750	31.67	5.61	37.28	74.00	-36.72	Peak	
2 *	4875.4800	20.50	5.61	26.11	54.00	-27.89	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal


115 dBuV/m

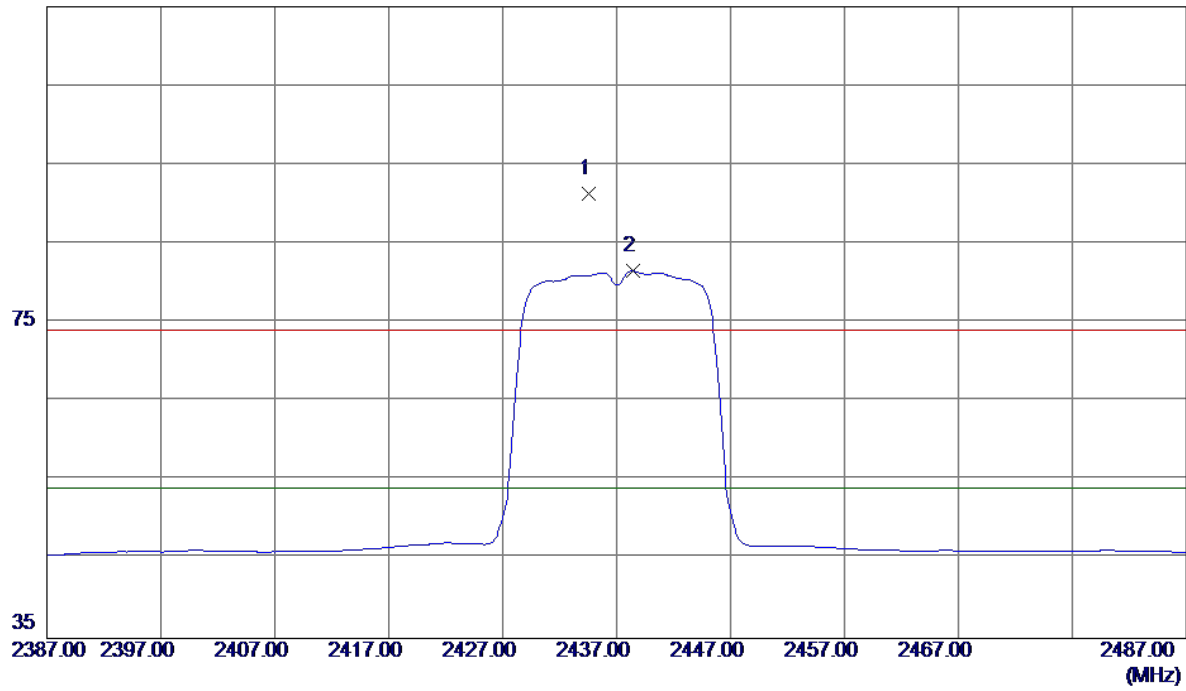

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.6000	58.79	32.54	91.33	74.00	17.33	Peak	No Limit
2 *	2438.4000	48.96	32.55	81.51	54.00	27.51	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

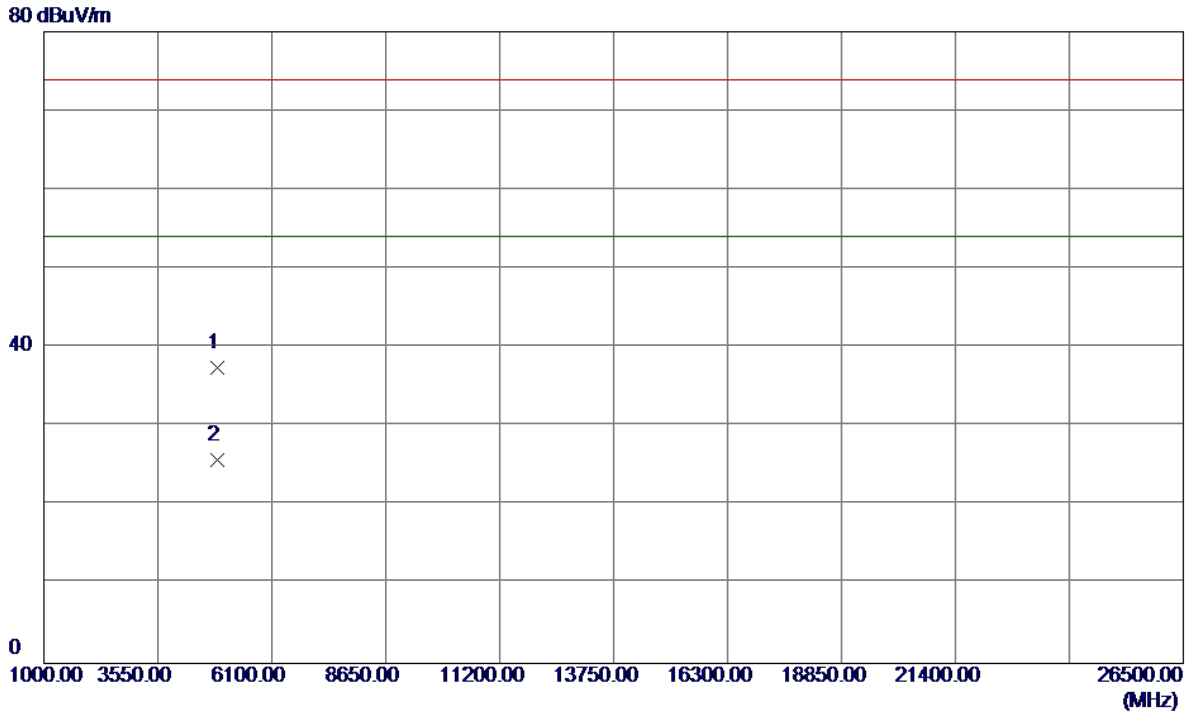

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4875.2450	31.80	5.61	37.41	74.00	-36.59	Peak	
2 *	4875.6450	20.13	5.61	25.74	54.00	-28.26	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

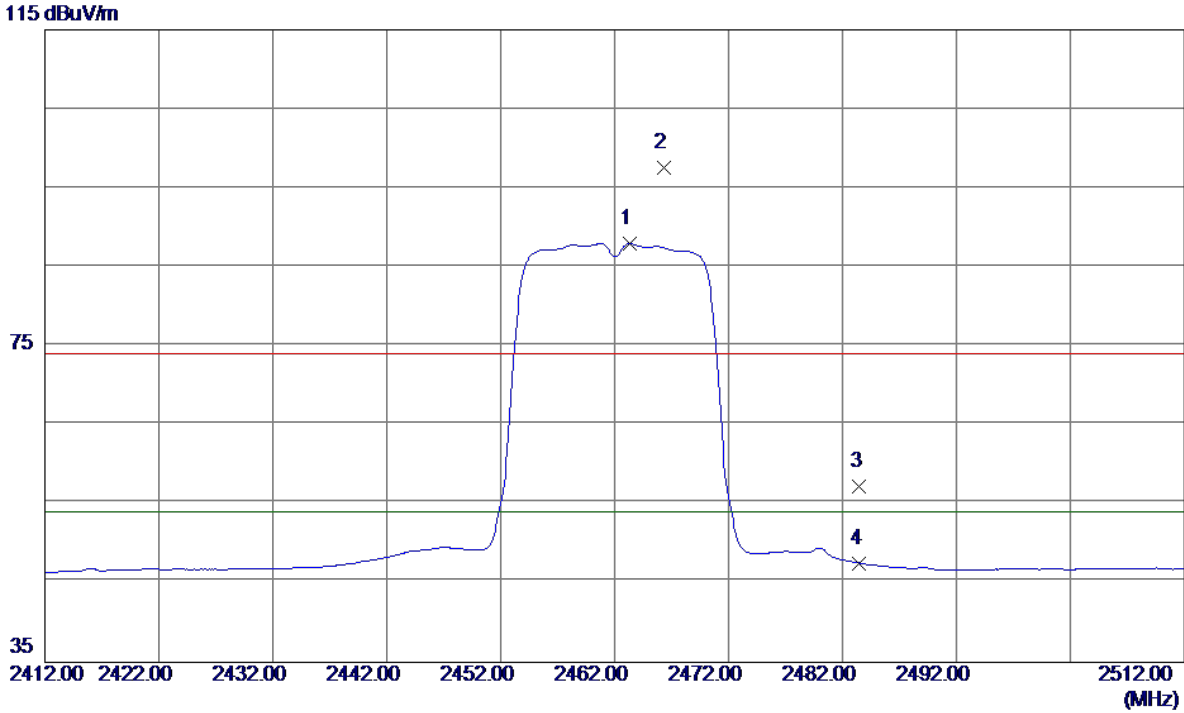

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.3000	55.31	32.64	87.95	54.00	33.95	AVG	No Limit
2	2466.3000	64.92	32.65	97.57	74.00	23.57	Peak	No Limit
3	2483.5000	24.55	32.71	57.26	74.00	-16.74	Peak	
4	2483.5000	14.84	32.71	47.55	54.00	-6.45	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical

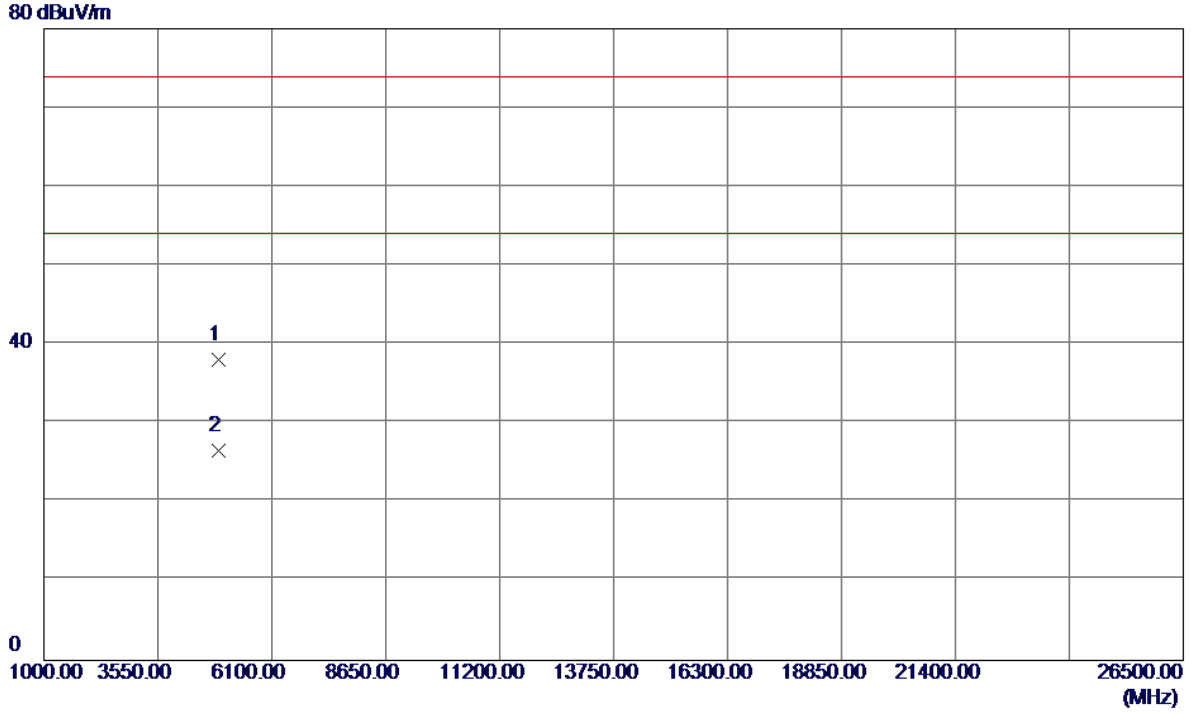


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4922.9400	32.36	5.74	38.10	74.00	-35.90	Peak	
2 *	4923.0400	20.86	5.74	26.60	54.00	-27.40	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal


115 dBuV/m

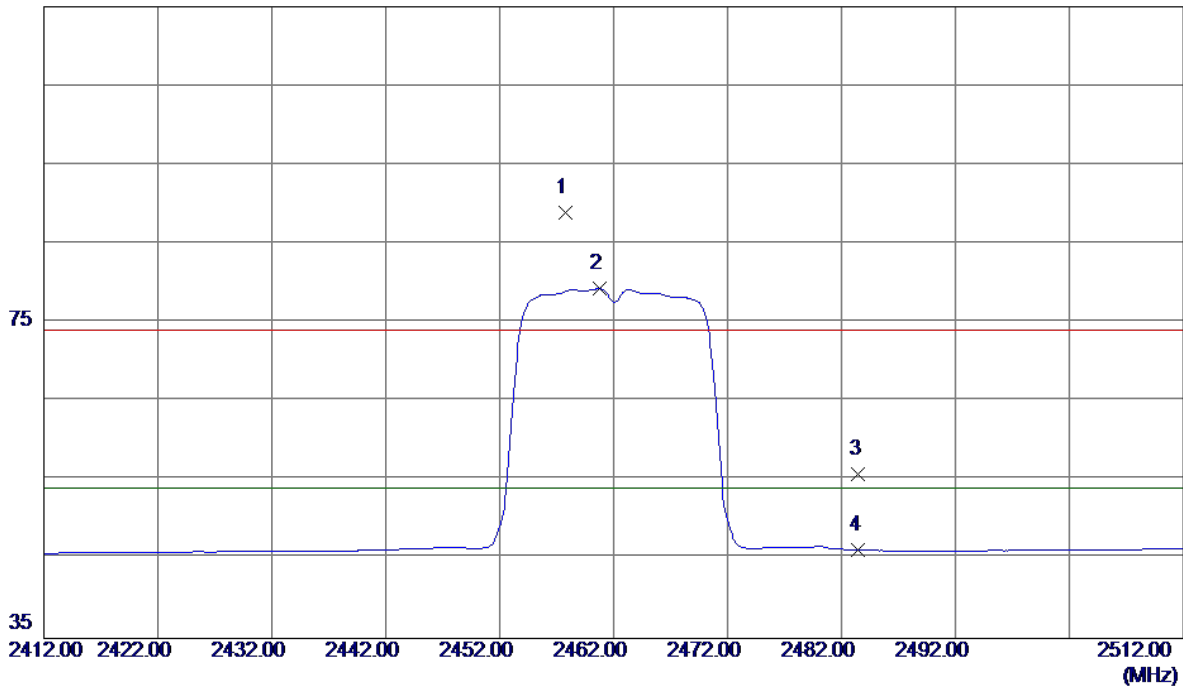

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2457.8000	56.35	32.62	88.97	74.00	14.97	Peak	No Limit
2 *	2460.8000	46.67	32.63	79.30	54.00	25.30	AVG	No Limit
3	2483.5000	23.08	32.71	55.79	74.00	-18.21	Peak	
4	2483.5000	13.49	32.71	46.20	54.00	-7.80	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal

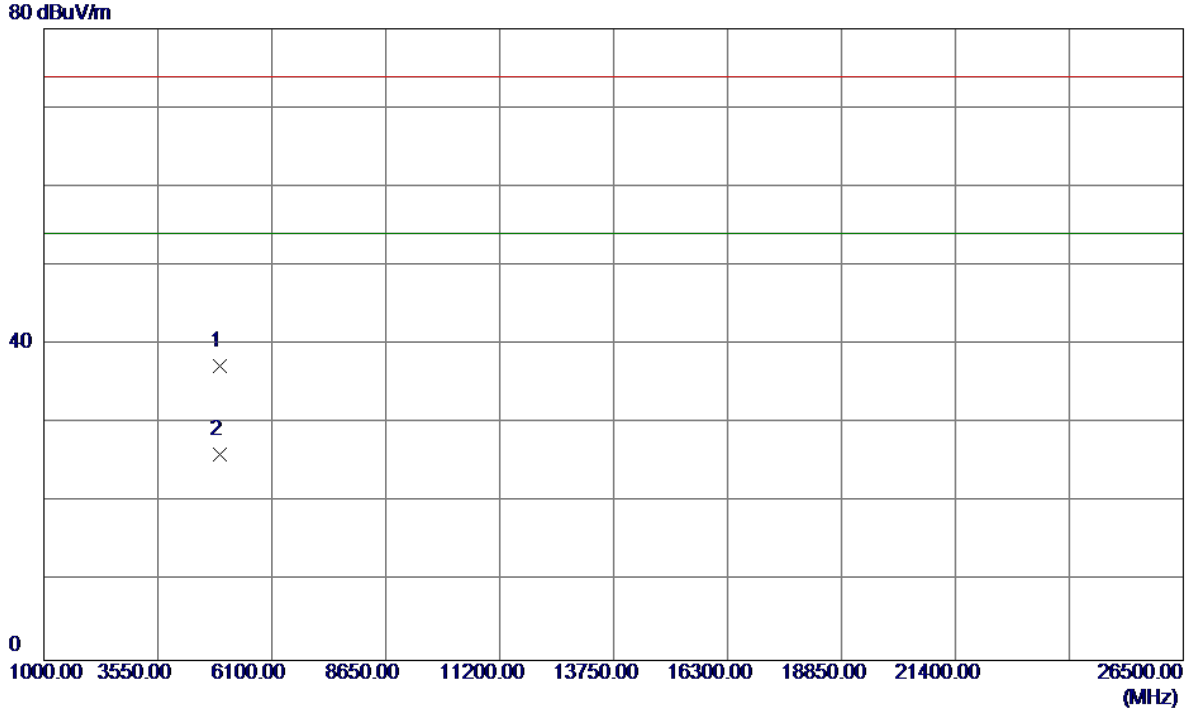


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.2799	31.56	5.75	37.31	74.00	-36.69	Peak	
2 *	4924.3500	20.26	5.75	26.01	54.00	-27.99	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical


115 dBuV/m

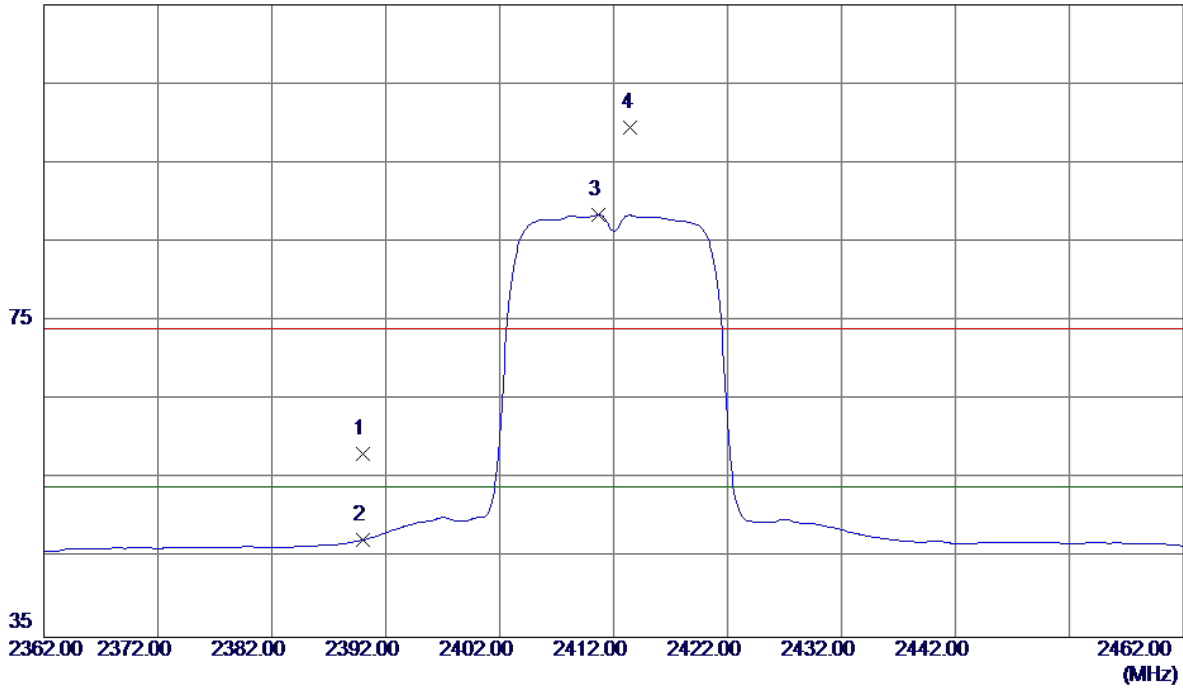

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.84	32.38	58.22	74.00	-15.78	Peak	
2	2390.0000	14.96	32.38	47.34	54.00	-6.66	AVG	
3 *	2410.7000	55.97	32.45	88.42	54.00	34.42	AVG	No Limit
4	2413.5000	66.95	32.46	99.41	74.00	25.41	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical

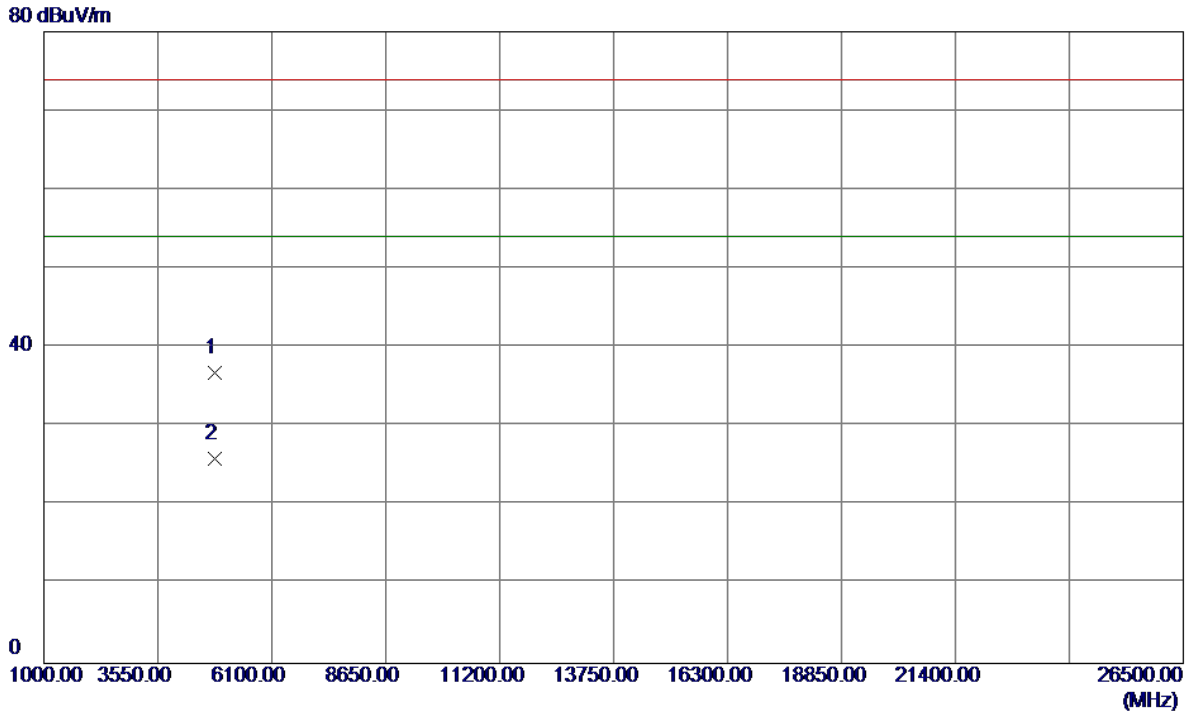


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.3300	31.39	5.48	36.87	74.00	-37.13	Peak	
2 *	4826.4750	20.47	5.48	25.95	54.00	-28.05	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal


115 dBuV/m

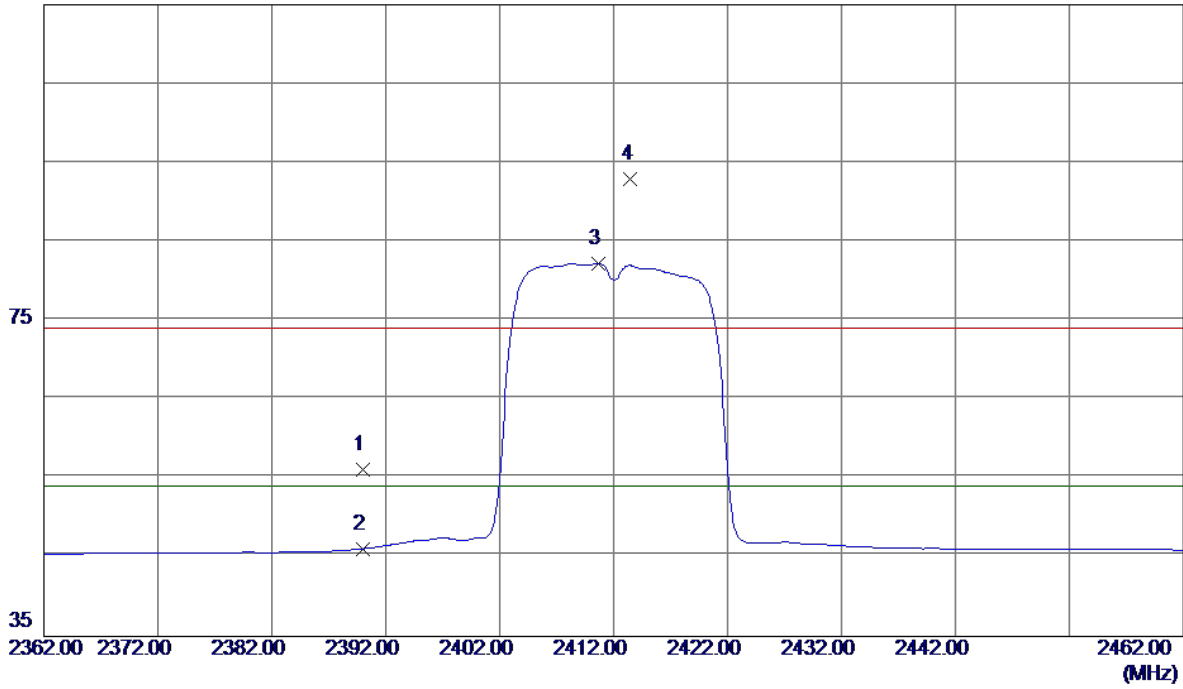

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.77	32.38	56.15	74.00	-17.85	Peak	
2	2390.0000	13.71	32.38	46.09	54.00	-7.91	AVG	
3 *	2410.7000	49.78	32.45	82.23	54.00	28.23	AVG	No Limit
4	2413.5000	60.41	32.46	92.87	74.00	18.87	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal

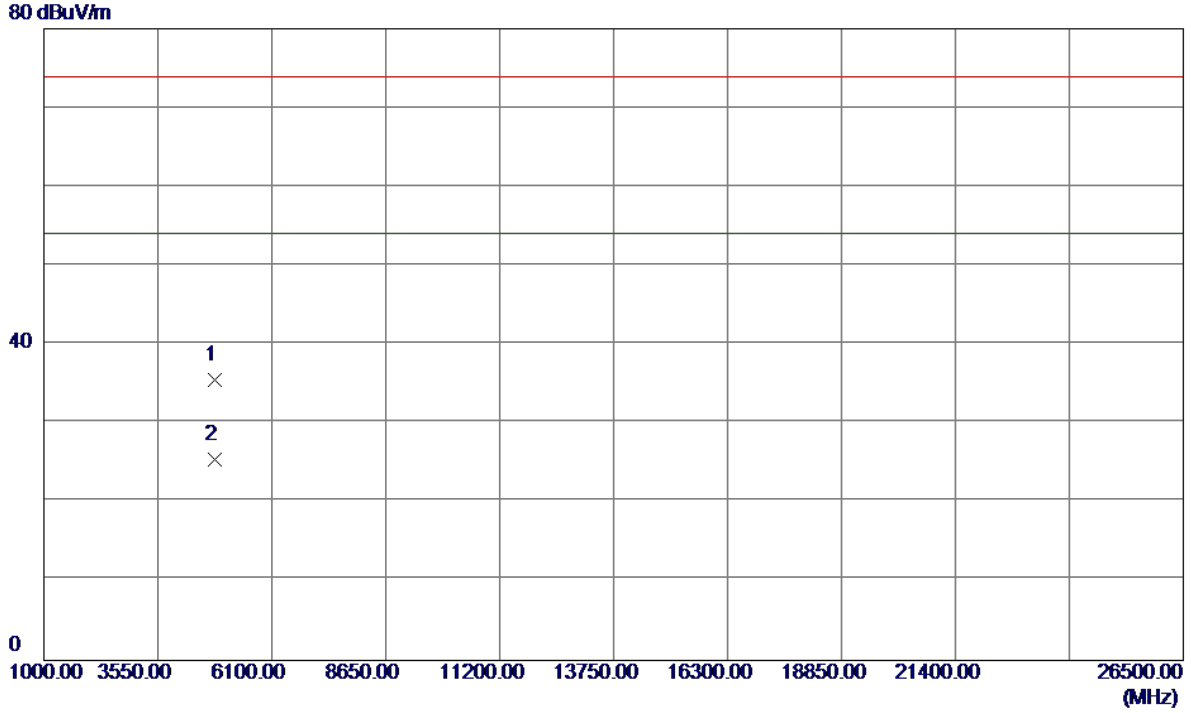


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.8950	30.06	5.47	35.53	74.00	-38.47	Peak	
2 *	4824.0800	20.04	5.47	25.51	54.00	-28.49	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical


115 dBuV/m

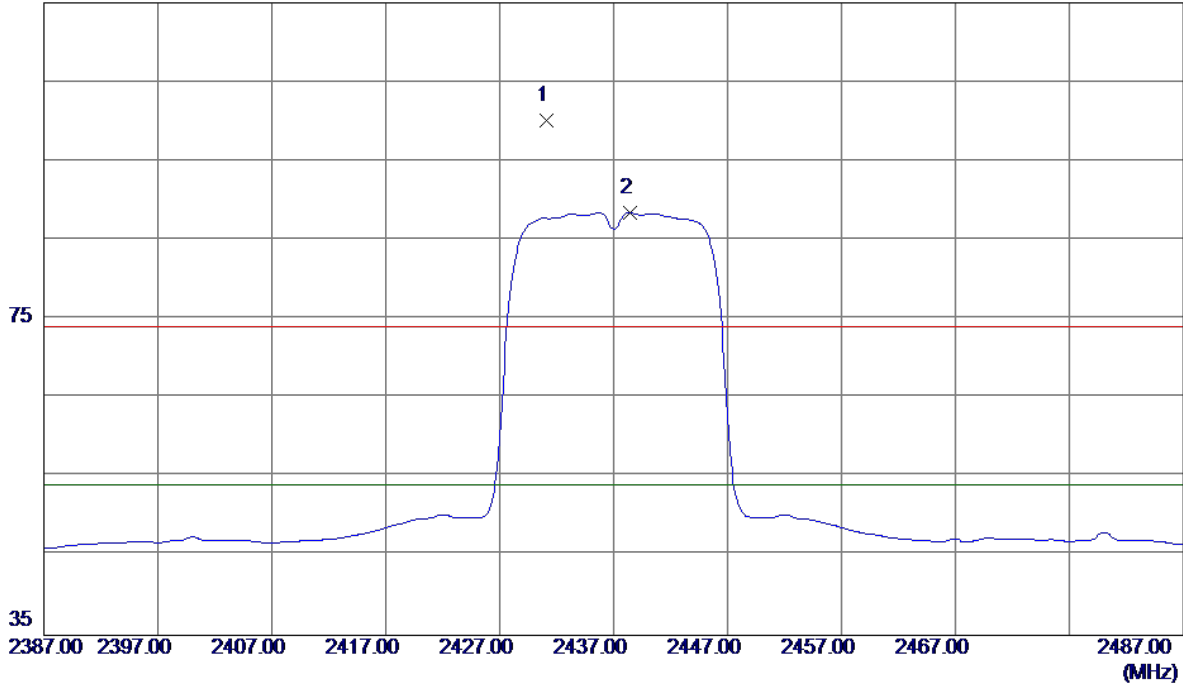

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2431.1000	67.63	32.52	100.15	74.00	26.15	Peak	No Limit
2 *	2438.4000	55.91	32.55	88.46	54.00	34.46	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical

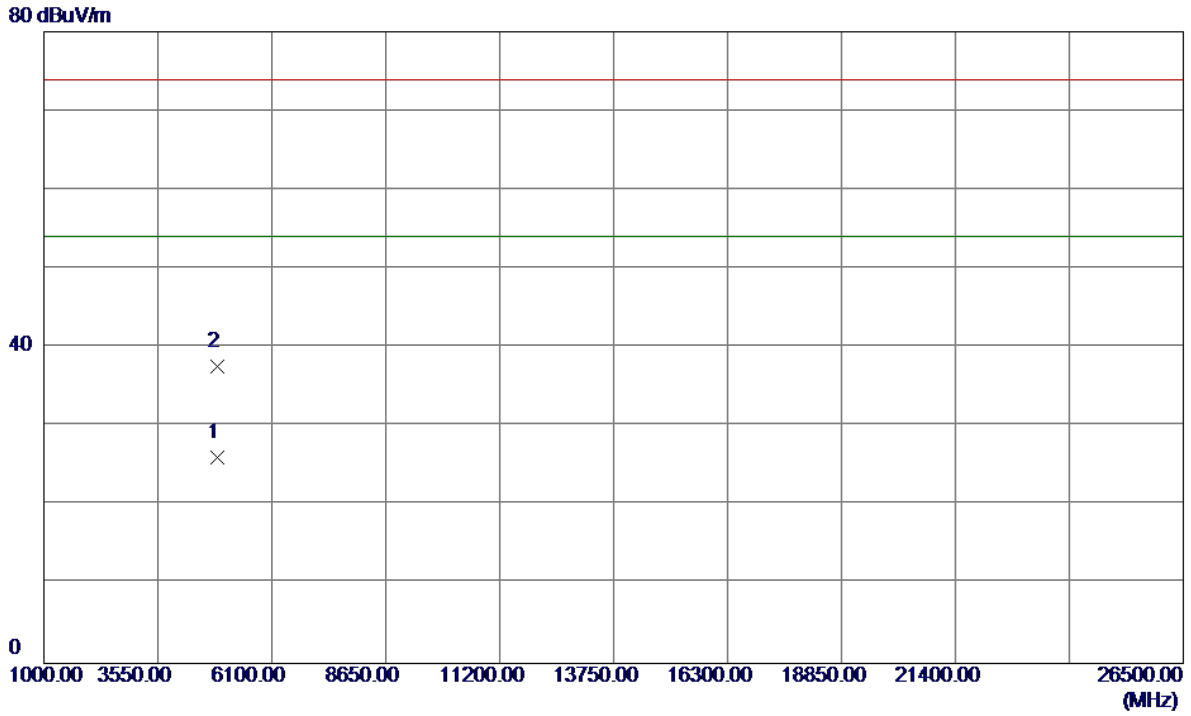


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4875.4900	20.45	5.61	26.06	54.00	-27.94	AVG	
2	4875.8150	31.95	5.61	37.56	74.00	-36.44	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal


115 dBuV/m

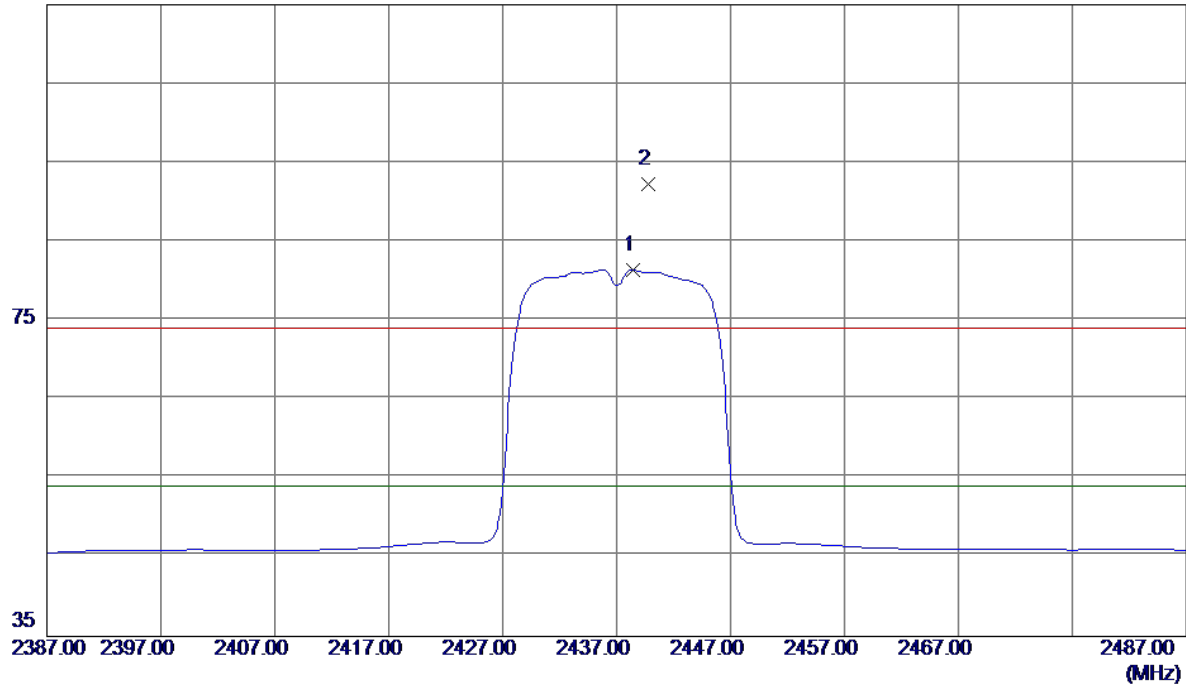

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.4000	48.90	32.55	81.45	54.00	27.45	AVG	No Limit
2	2439.8000	59.70	32.55	92.25	74.00	18.25	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal

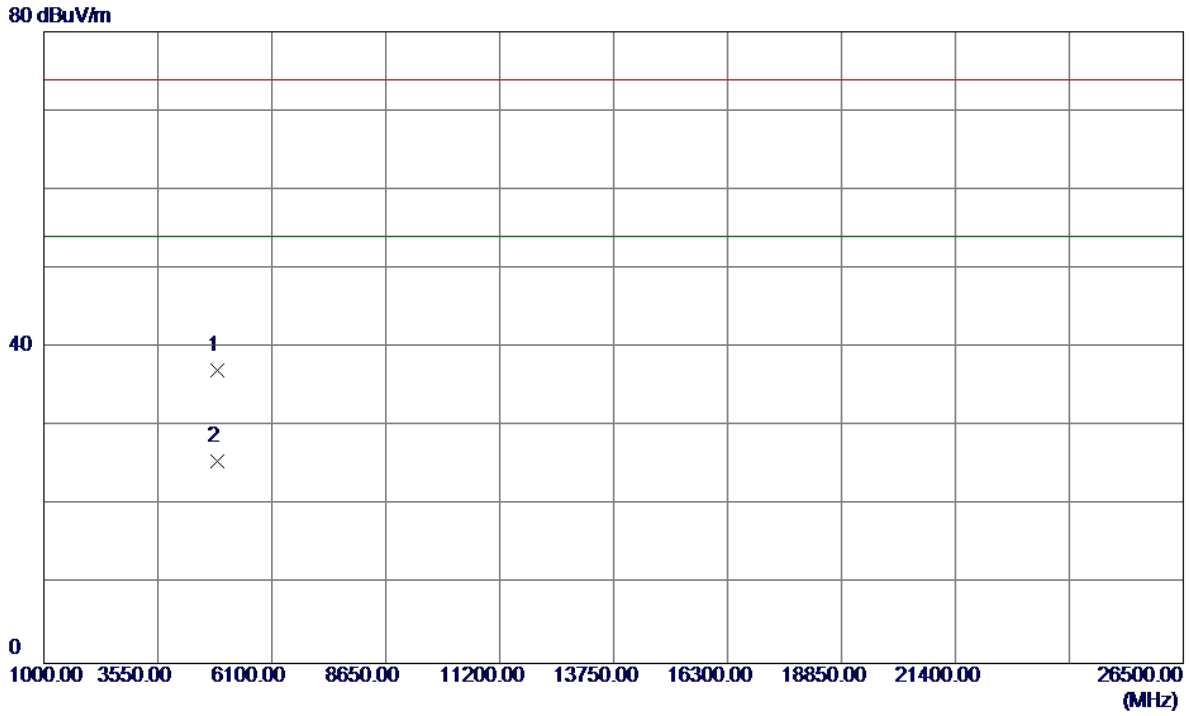


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.4200	31.54	5.61	37.15	74.00	-36.85	Peak	
2 *	4875.1700	20.00	5.61	25.61	54.00	-28.39	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical


115 dBuV/m

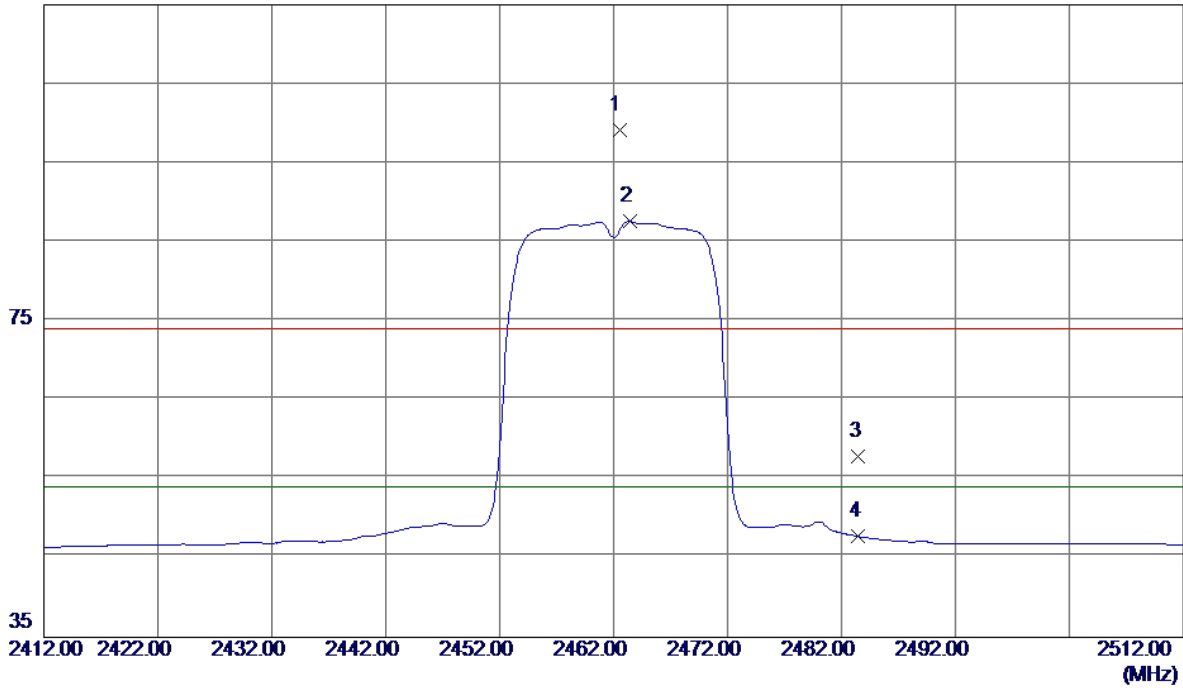

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.5000	66.55	32.64	99.19	74.00	25.19	Peak	No Limit
2 *	2463.4000	54.95	32.64	87.59	54.00	33.59	AVG	No Limit
3	2483.5000	25.23	32.71	57.94	74.00	-16.06	Peak	
4	2483.5000	15.05	32.71	47.76	54.00	-6.24	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

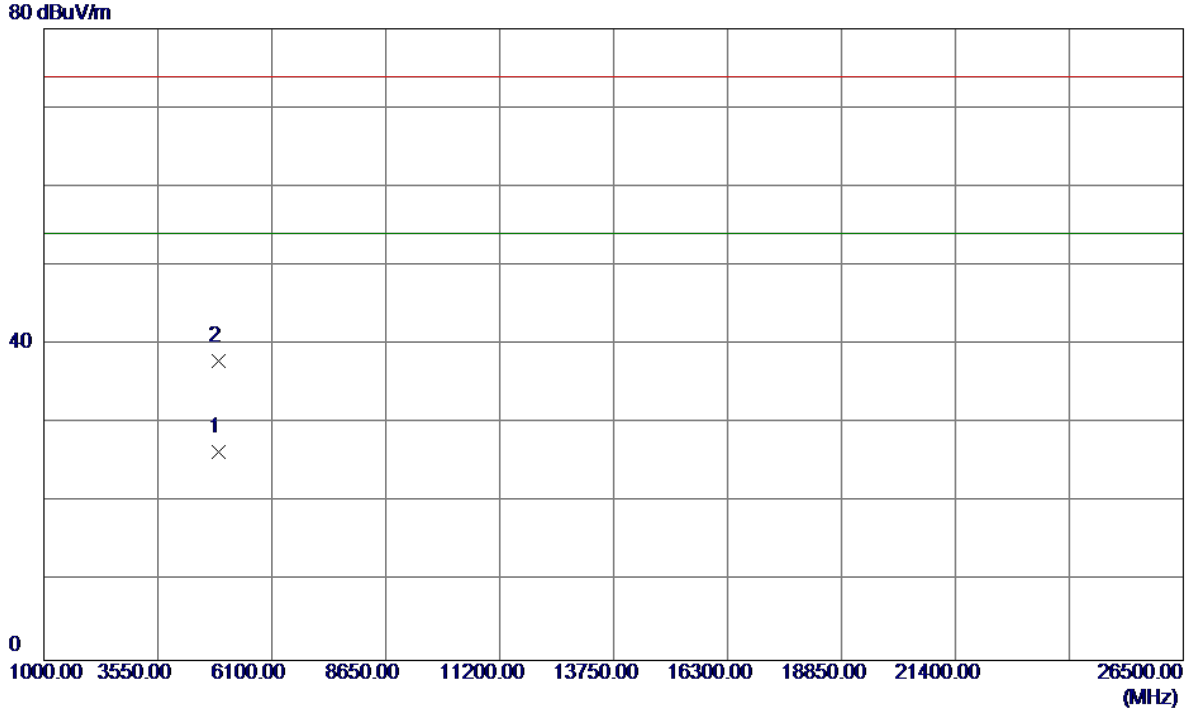

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.2450	20.73	5.74	26.47	54.00	-27.53	AVG	
2	4923.5850	32.18	5.74	37.92	74.00	-36.08	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Horizontal

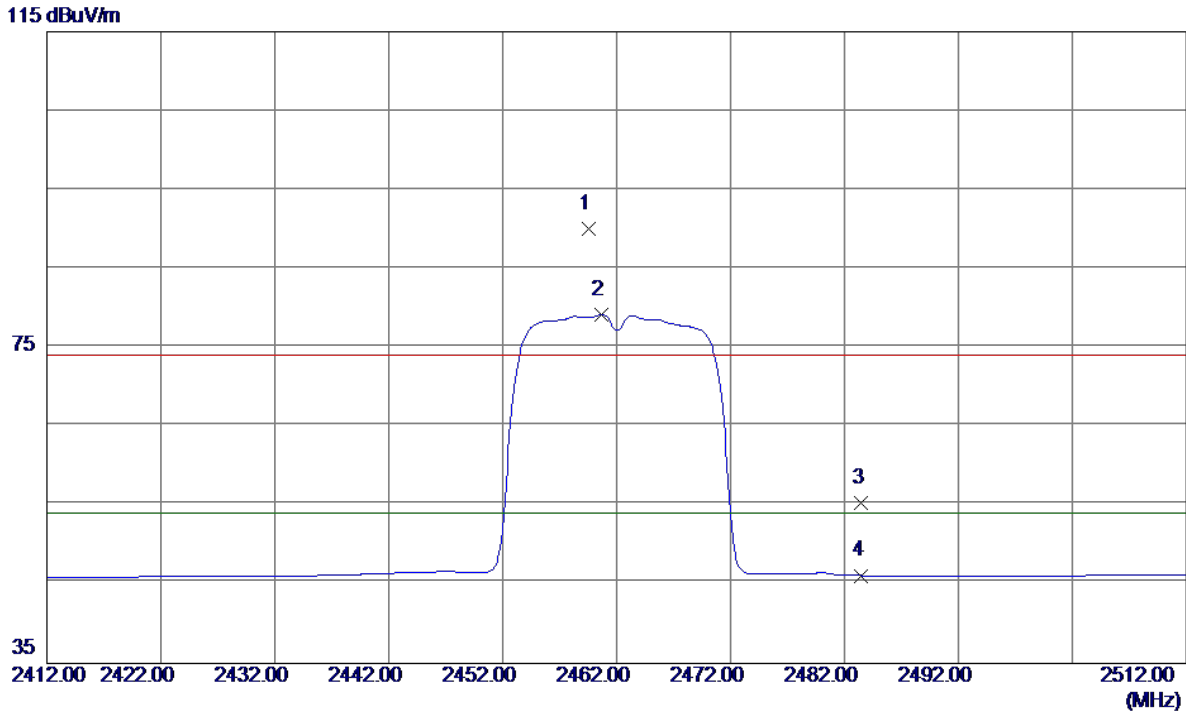

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.6000	57.43	32.63	90.06	74.00	16.06	Peak	No Limit
2 *	2460.7000	46.52	32.63	79.15	54.00	25.15	AVG	No Limit
3	2483.5000	22.68	32.71	55.39	74.00	-18.61	Peak	
4	2483.5000	13.41	32.71	46.12	54.00	-7.88	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

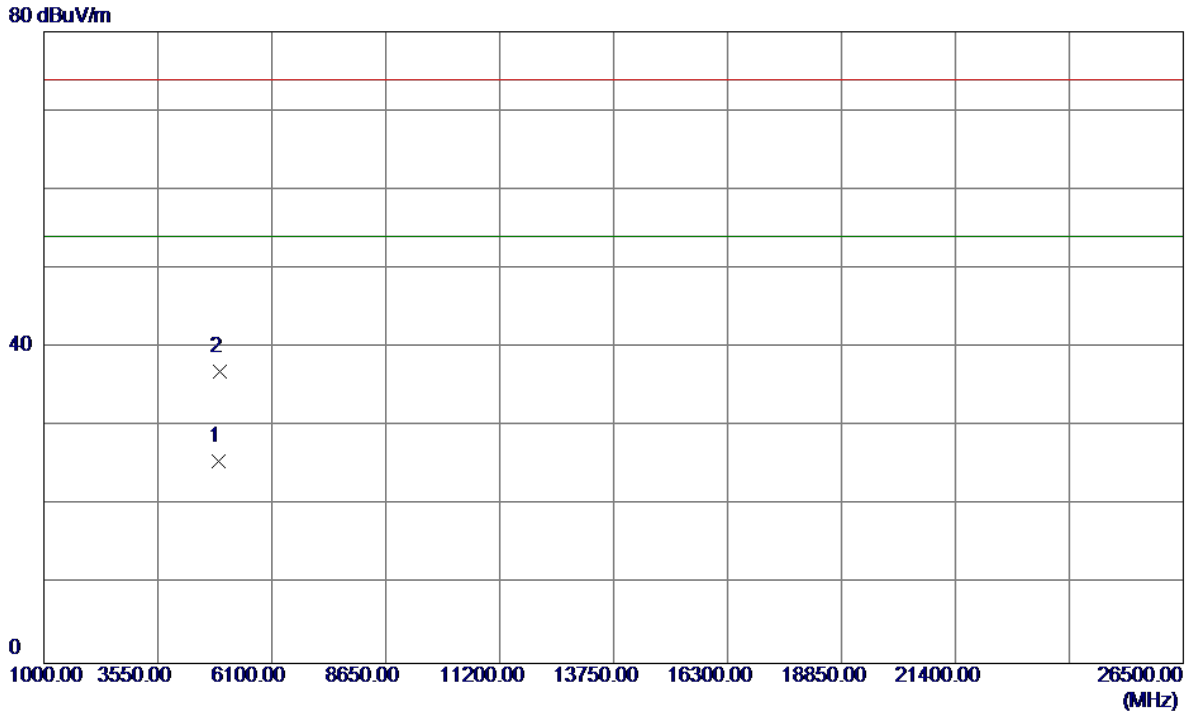


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9400	19.88	5.74	25.62	54.00	-28.38	AVG	
2	4924.6250	31.18	5.75	36.93	74.00	-37.07	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical


115 dBuV/m

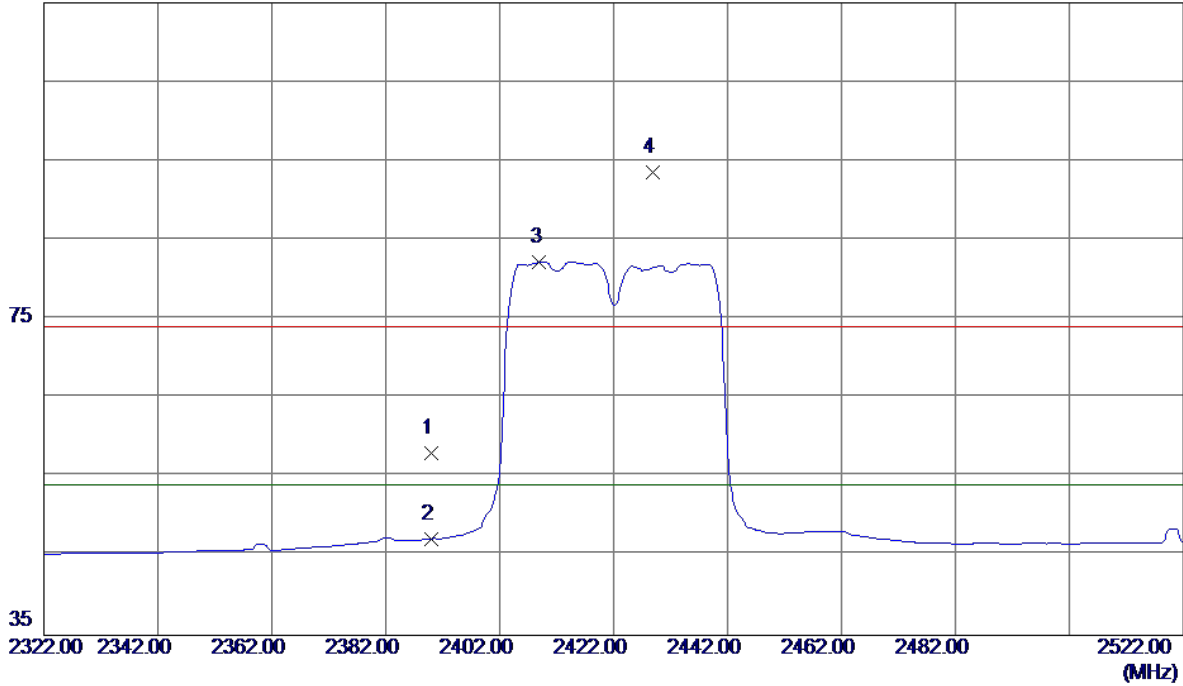

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.61	32.38	57.99	74.00	-16.01	Peak	
2	2390.0000	14.84	32.38	47.22	54.00	-6.78	AVG	
3 *	2409.0000	49.83	32.44	82.27	54.00	28.27	AVG	No Limit
4	2428.8000	60.99	32.52	93.51	74.00	19.51	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical

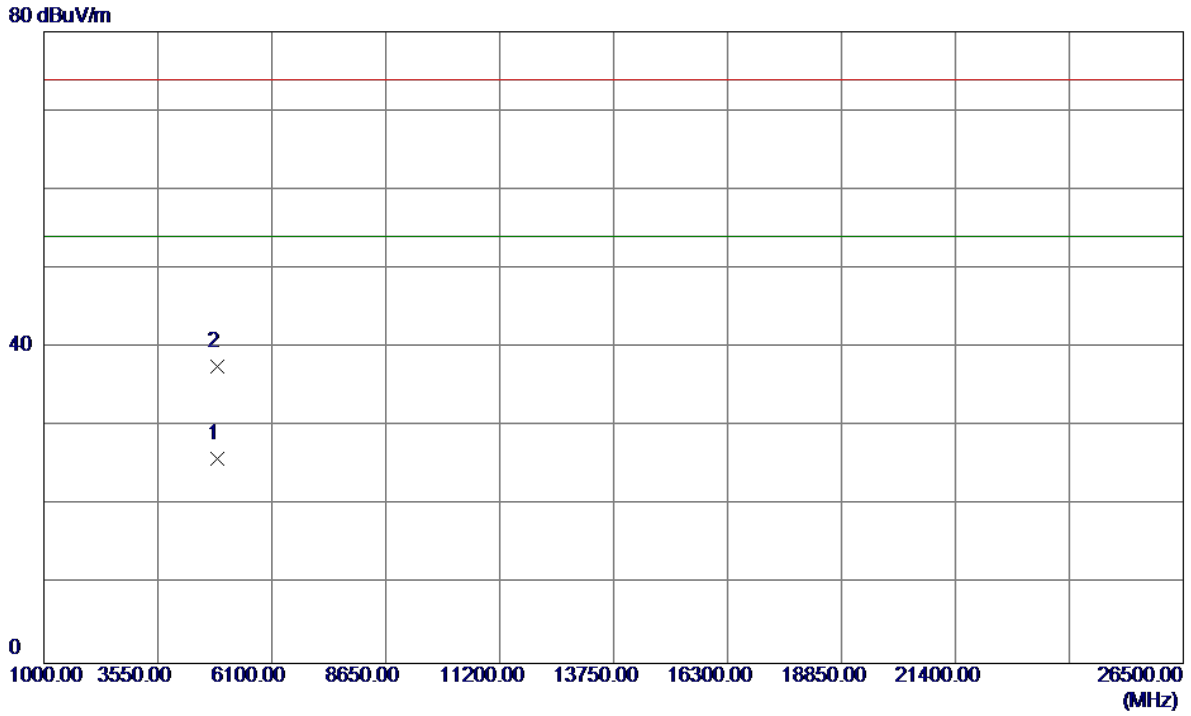


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4884.2550	20.29	5.64	25.93	54.00	-28.07	AVG	
2	4885.6600	31.93	5.64	37.57	74.00	-36.43	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal


115 dBuV/m

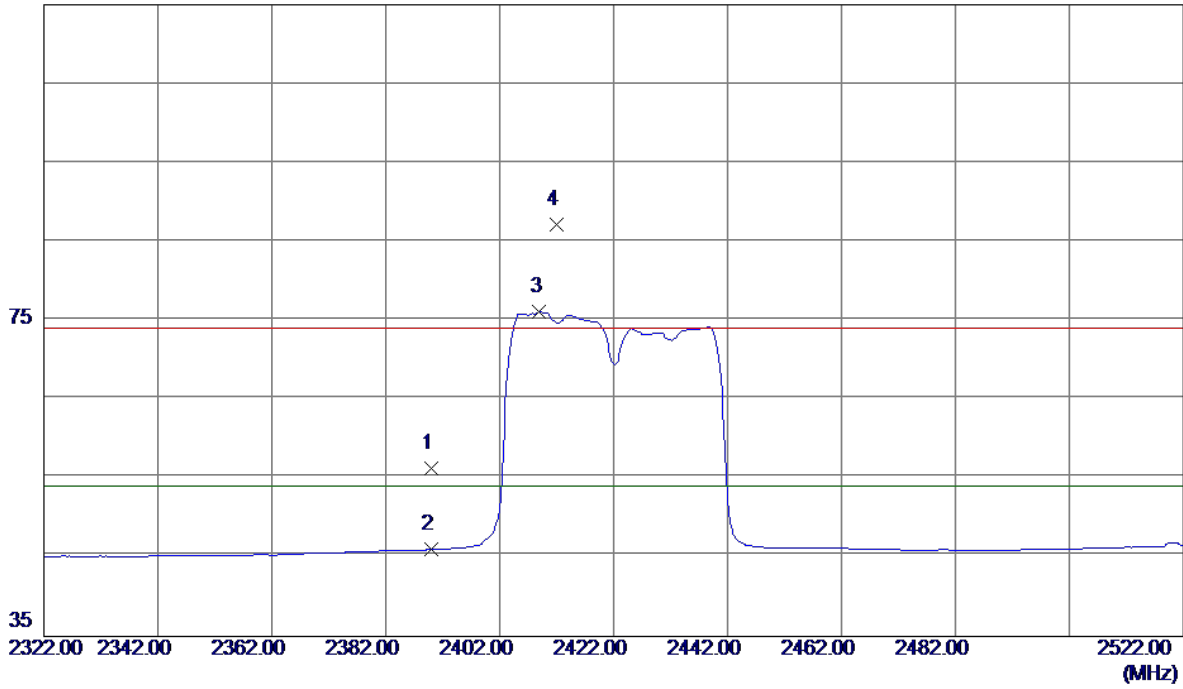

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.86	32.38	56.24	74.00	-17.76	Peak	
2	2390.0000	13.62	32.38	46.00	54.00	-8.00	AVG	
3 *	2409.0000	43.71	32.44	76.15	54.00	22.15	AVG	No Limit
4	2412.0000	54.76	32.45	87.21	74.00	13.21	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

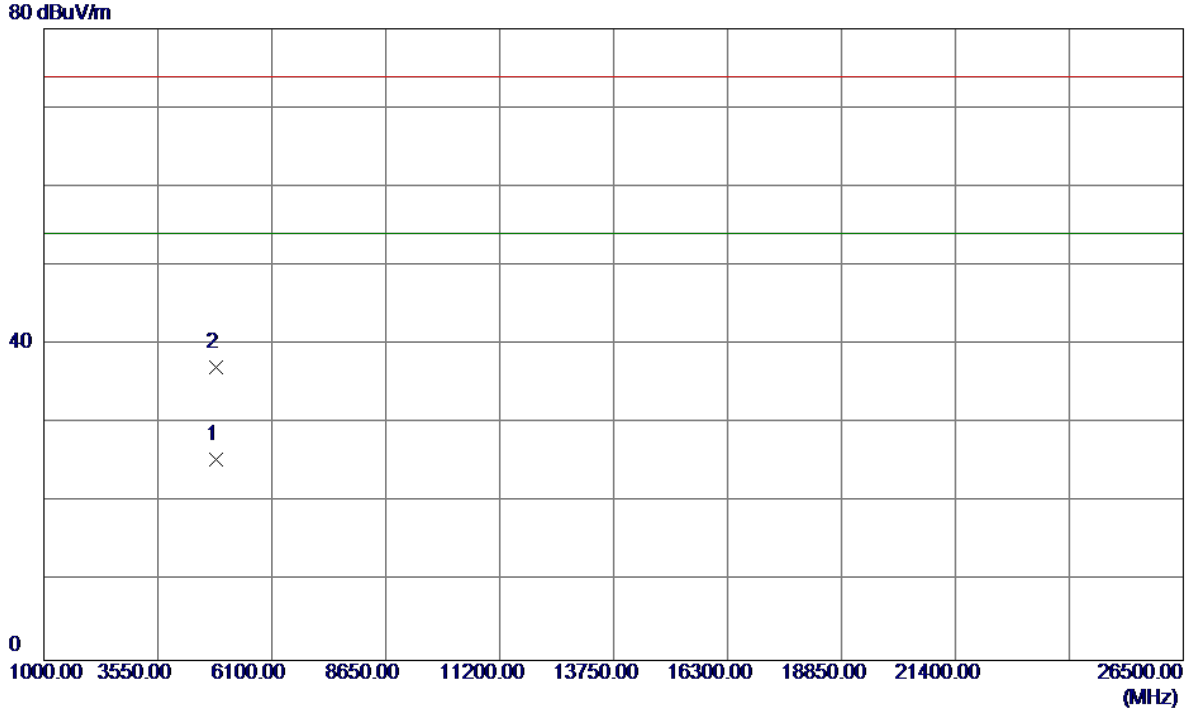


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4844.3400	19.84	5.53	25.37	54.00	-28.63	AVG	
2	4844.7420	31.52	5.53	37.05	74.00	-36.95	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical


115 dBuV/m

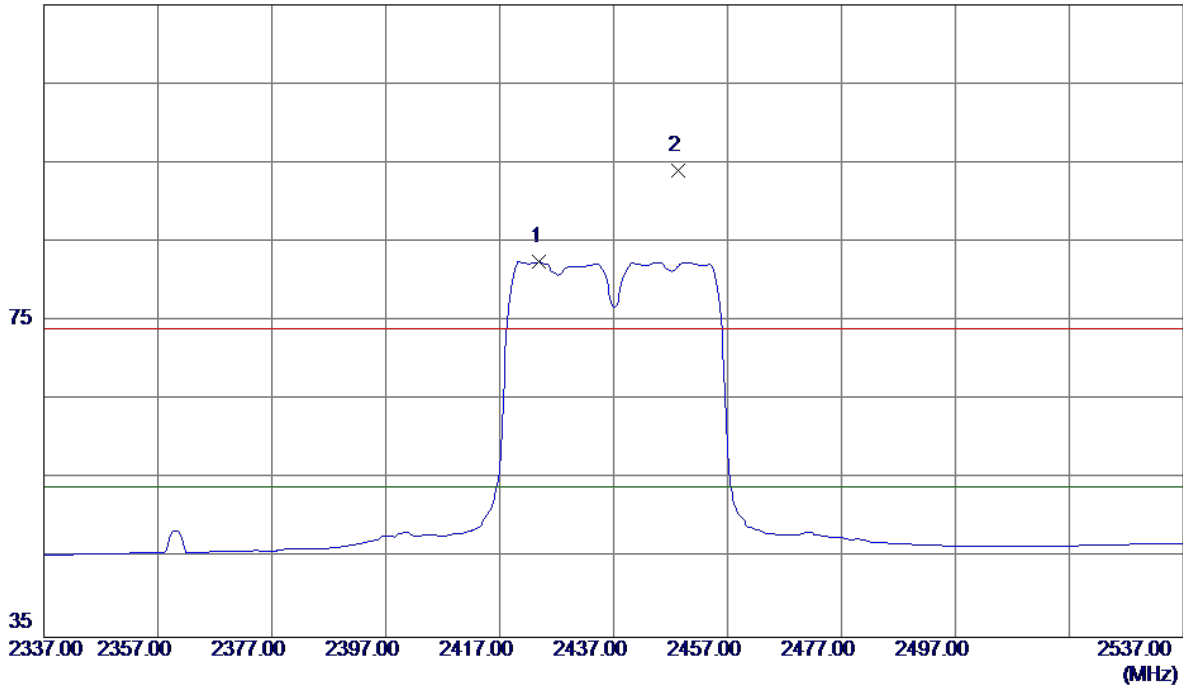

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2424.0000	50.00	32.50	82.50	54.00	28.50	AVG	No Limit
2	2448.4000	61.40	32.59	93.99	74.00	19.99	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical

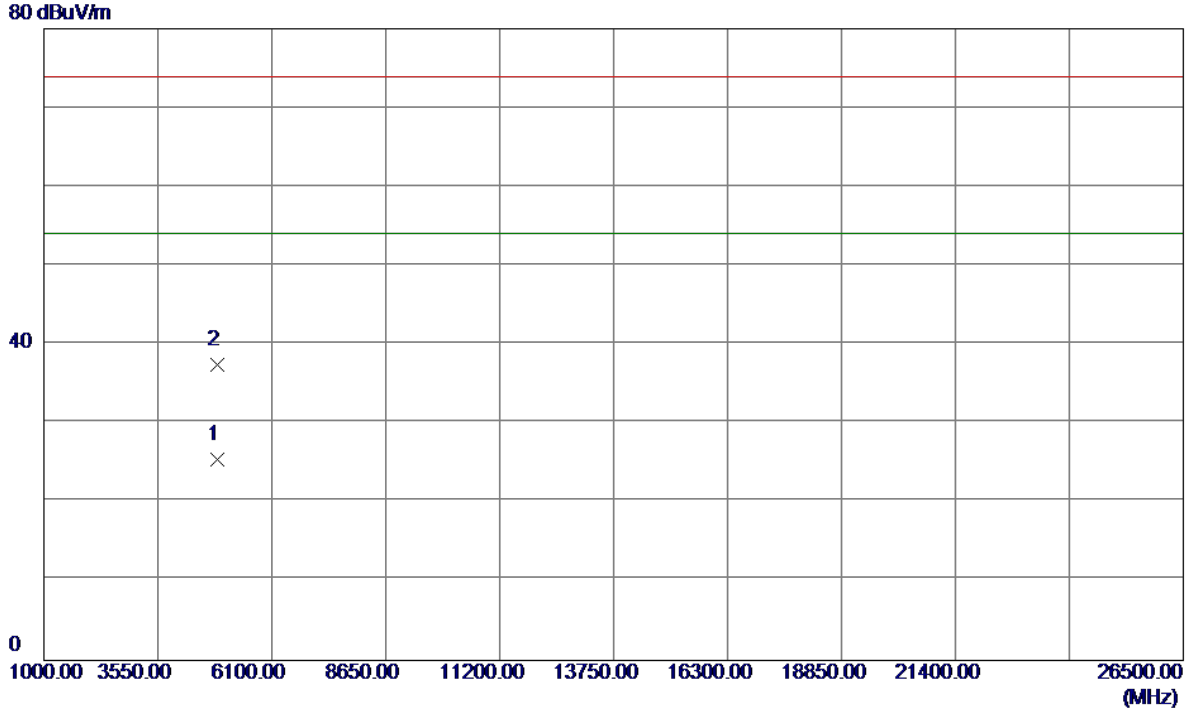


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.8500	19.80	5.61	25.41	54.00	-28.59	AVG	
2	4875.8150	31.85	5.61	37.46	74.00	-36.54	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal


115 dBuV/m

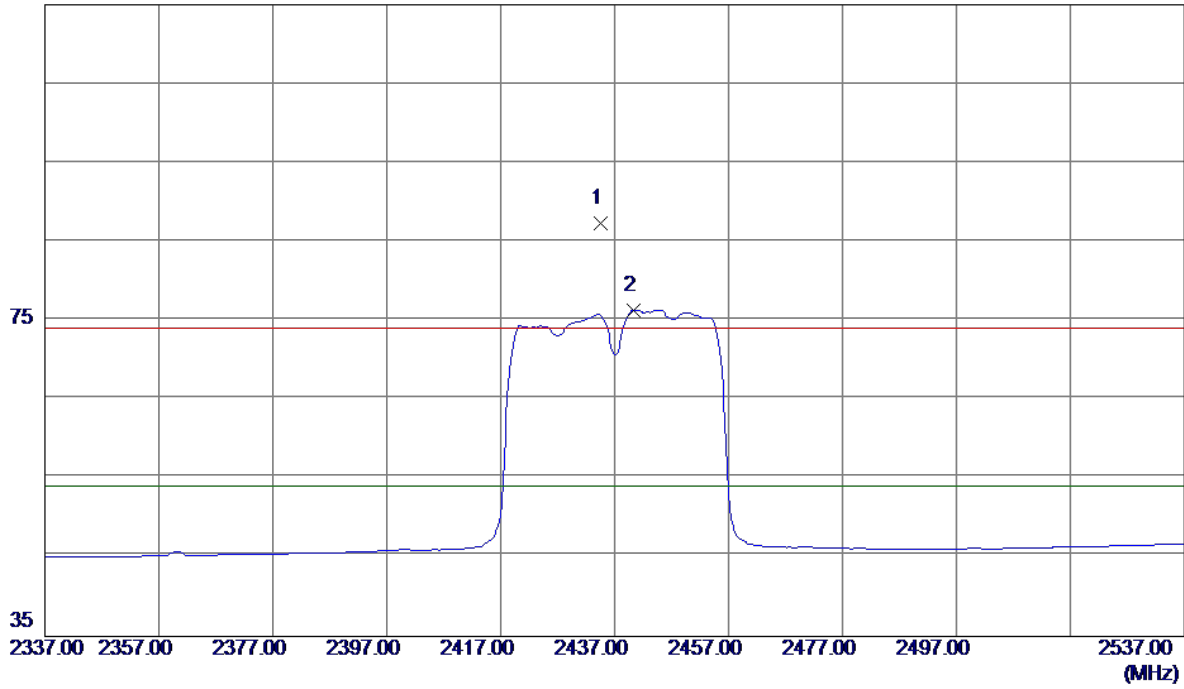

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.6000	54.76	32.54	87.30	74.00	13.30	Peak	No Limit
2 *	2440.4000	43.79	32.56	76.35	54.00	22.35	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

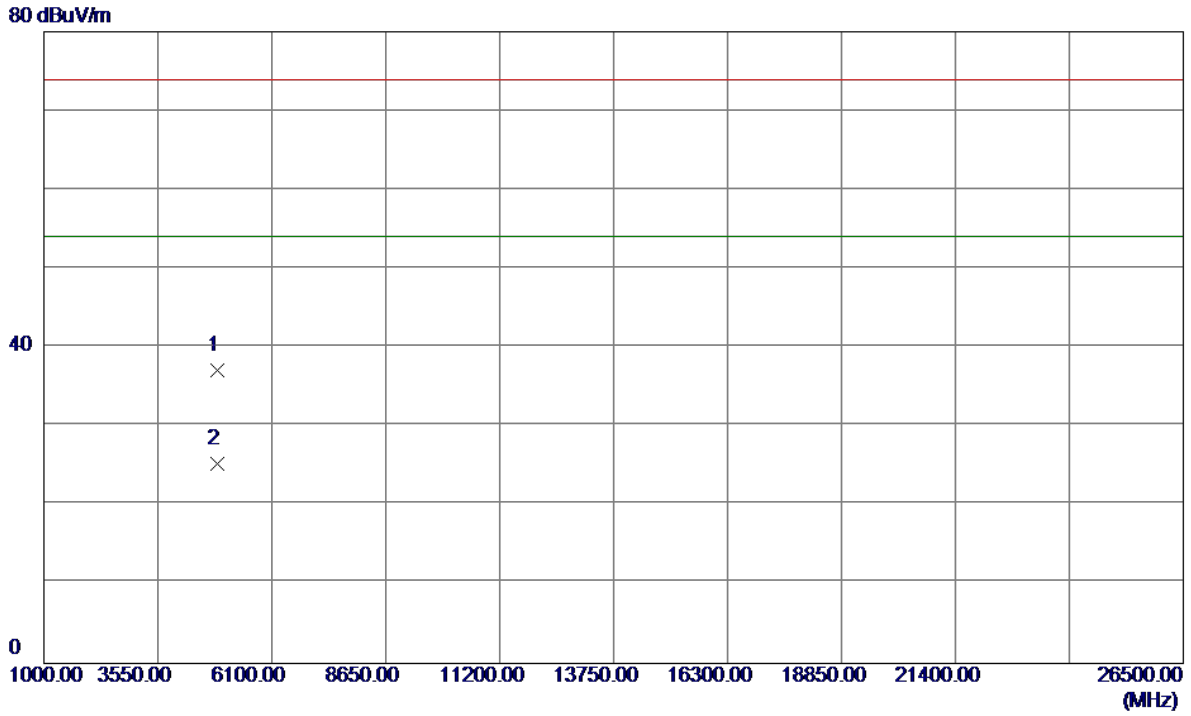


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0840	31.57	5.61	37.18	74.00	-36.82	Peak	
2 *	4874.5800	19.69	5.61	25.30	54.00	-28.70	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical


115 dBuV/m

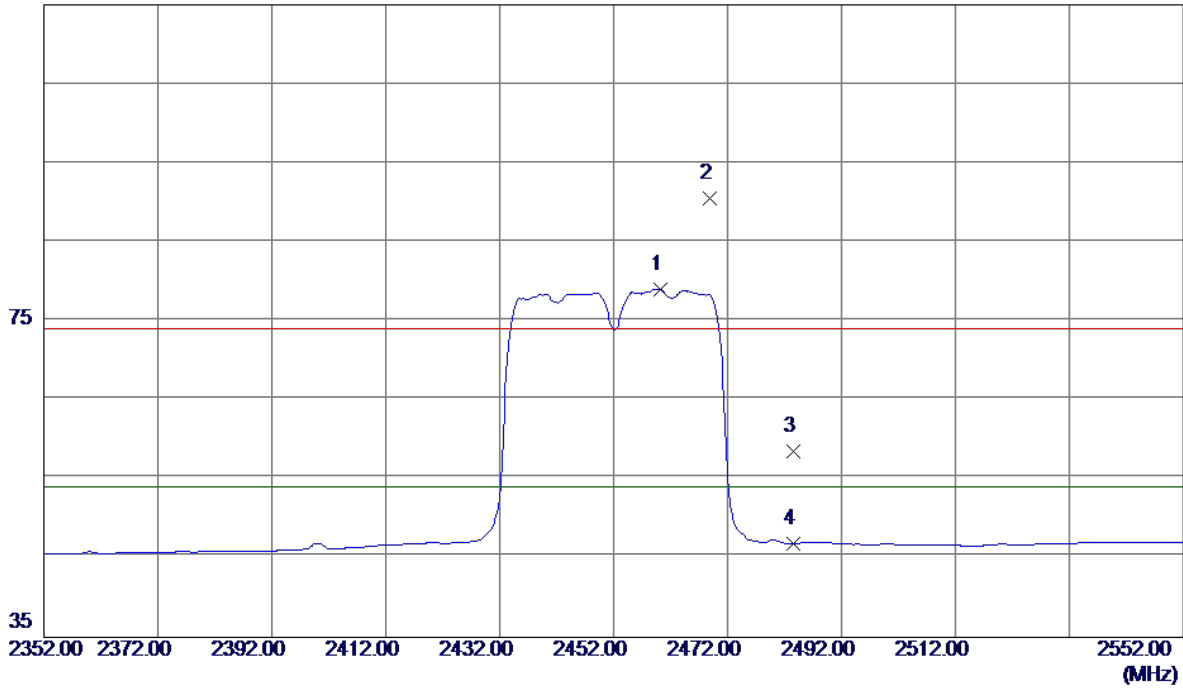

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.2000	46.40	32.63	79.03	54.00	25.03	AVG	No Limit
2	2468.8000	57.90	32.66	90.56	74.00	16.56	Peak	No Limit
3	2483.5000	25.84	32.71	58.55	74.00	-15.45	Peak	
4	2483.5000	14.19	32.71	46.90	54.00	-7.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

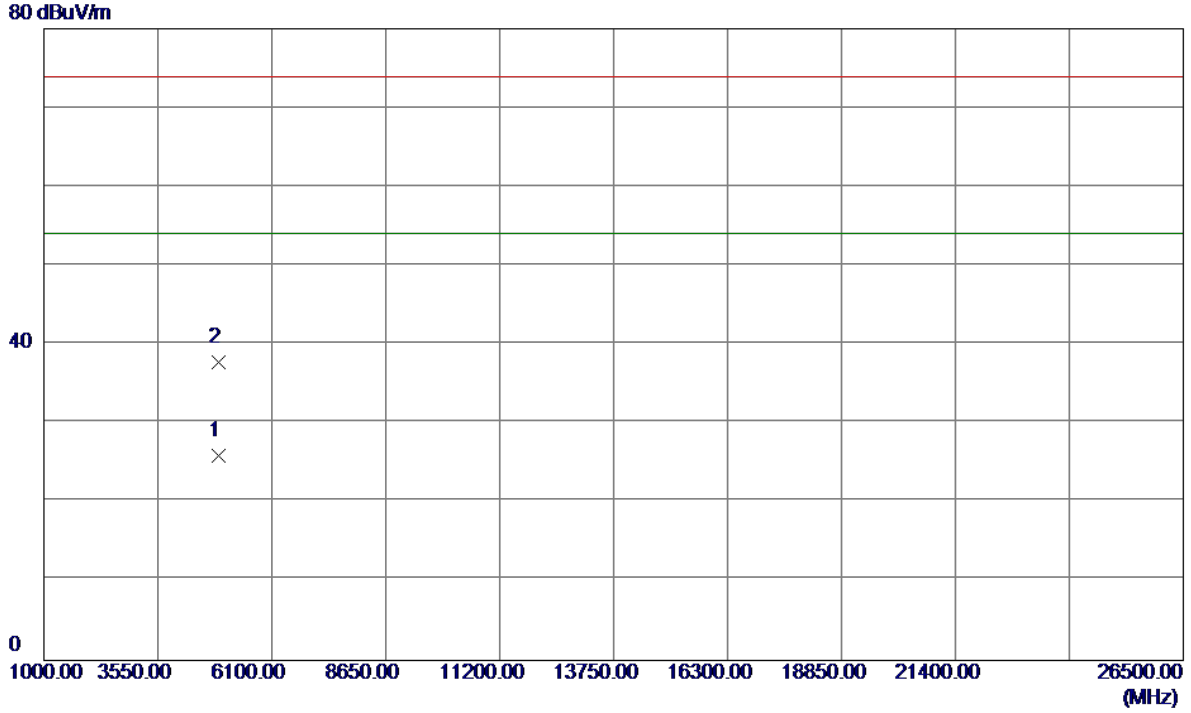


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4904.5800	20.23	5.69	25.92	54.00	-28.08	AVG	
2	4906.0250	32.10	5.70	37.80	74.00	-36.20	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal


115 dBuV/m

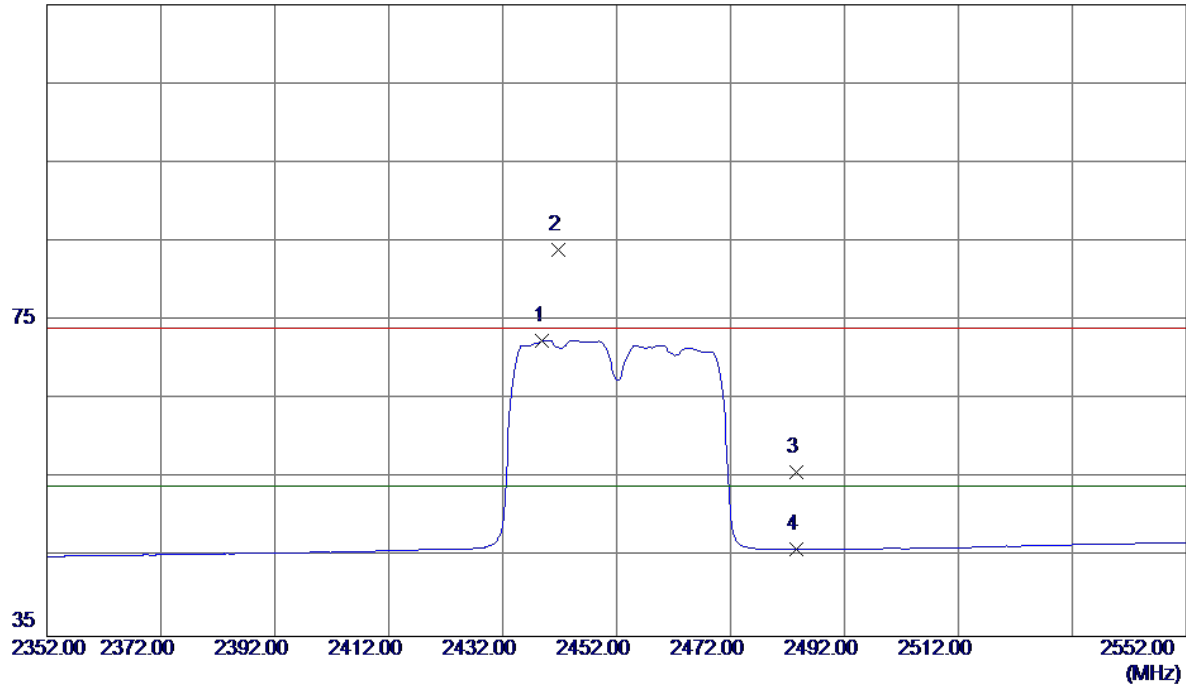

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2439.0000	39.97	32.55	72.52	54.00	18.52	AVG	No Limit
2	2441.8000	51.34	32.56	83.90	74.00	9.90	Peak	No Limit
3	2483.5000	23.15	32.71	55.86	74.00	-18.14	Peak	
4	2483.5000	13.34	32.71	46.05	54.00	-7.95	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

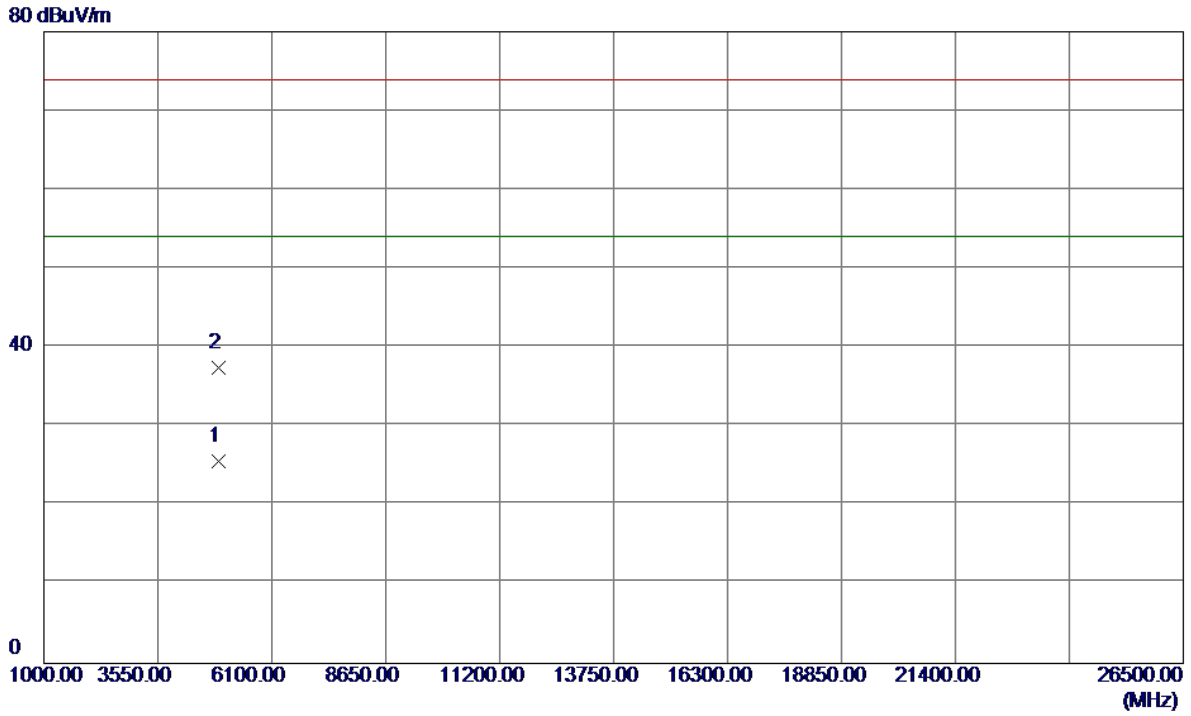


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.8240	19.86	5.69	25.55	54.00	-28.45	AVG	
2	4903.8880	31.73	5.69	37.42	74.00	-36.58	Peak	

For Ant 2

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical


115 dBuV/m

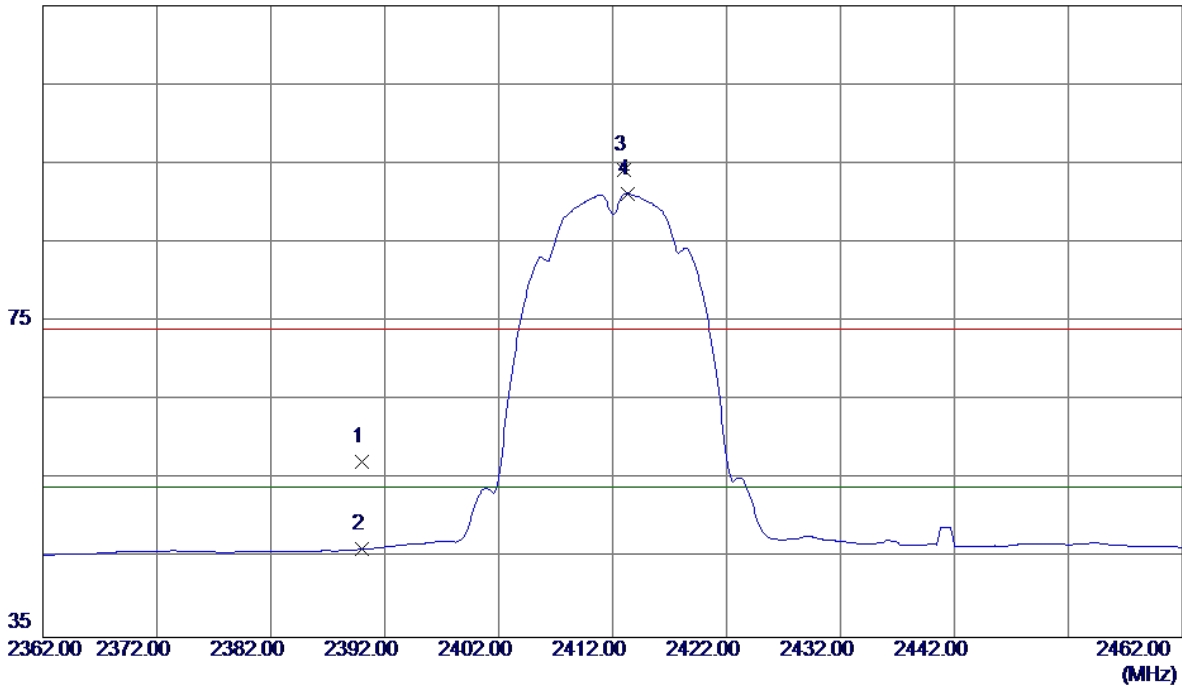

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.87	32.38	57.25	74.00	-16.75	Peak	
2	2390.0000	13.78	32.38	46.16	54.00	-7.84	AVG	
3	2413.0000	61.73	32.46	94.19	74.00	20.19	Peak	No Limit
4 *	2413.3000	58.78	32.46	91.24	54.00	37.24	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Vertical

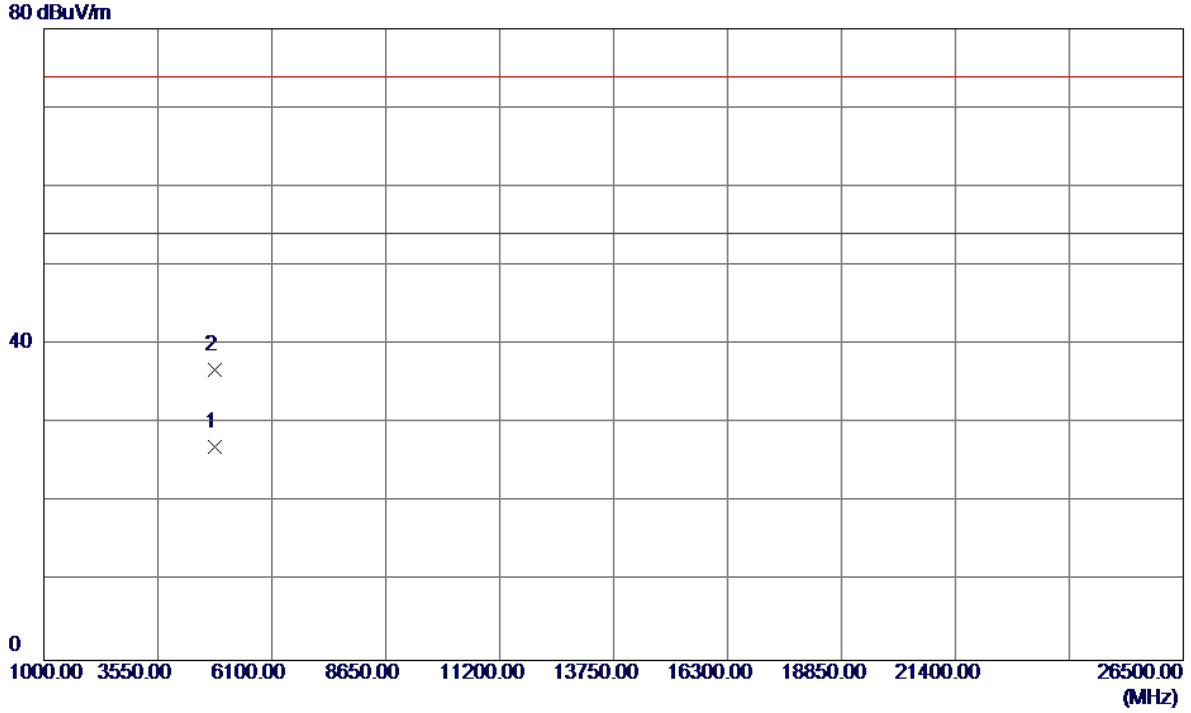


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0480	21.50	5.47	26.97	54.00	-27.03	AVG	
2	4824.4220	31.32	5.48	36.80	74.00	-37.20	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal


115 dBuV/m

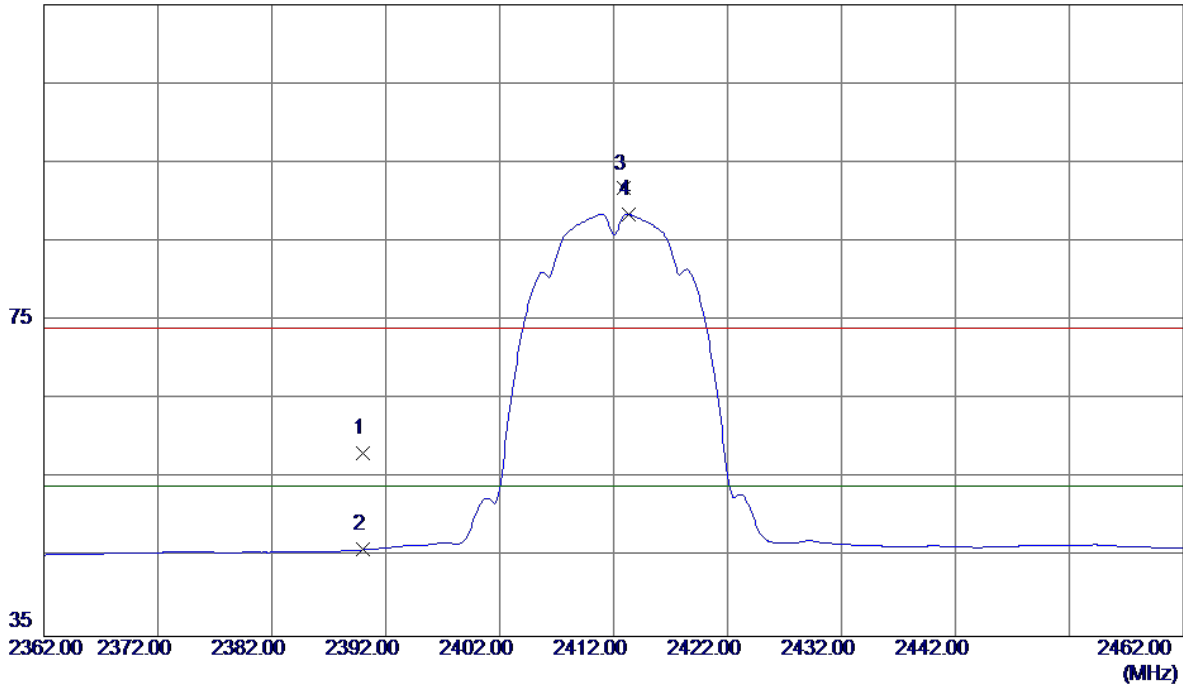

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.79	32.38	58.17	74.00	-15.83	Peak	
2	2390.0000	13.59	32.38	45.97	54.00	-8.03	AVG	
3	2412.9000	59.26	32.46	91.72	74.00	17.72	Peak	No Limit
4 *	2413.3000	56.02	32.46	88.48	54.00	34.48	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

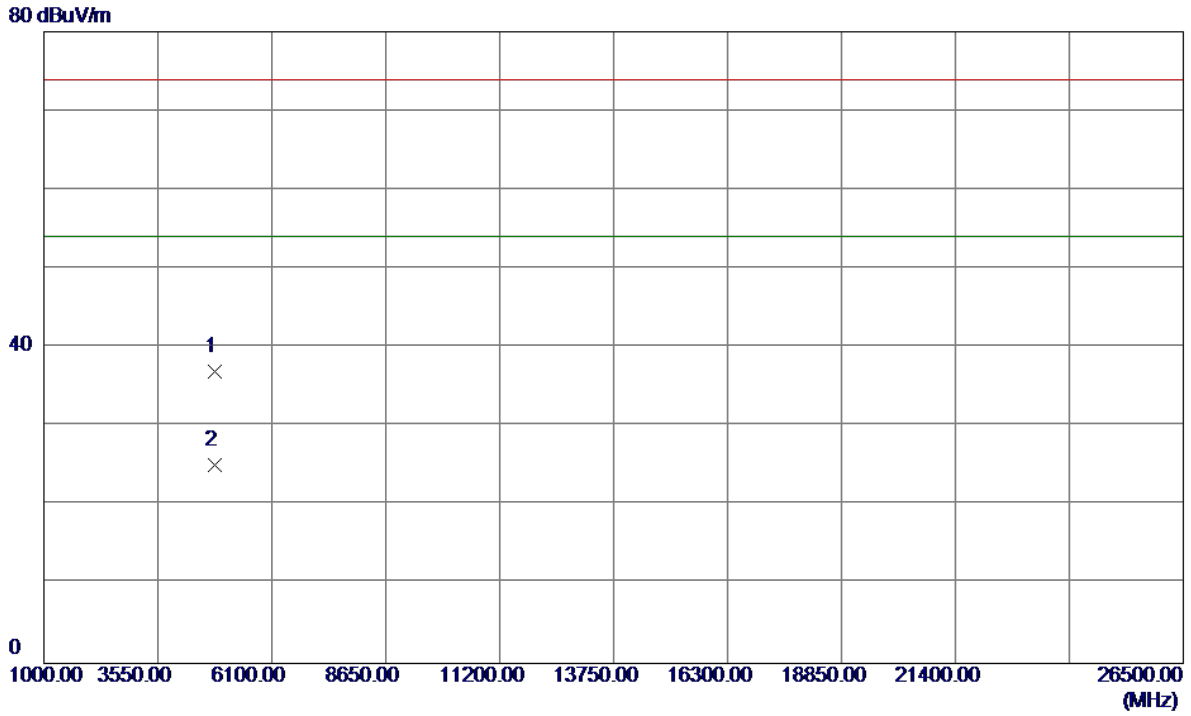


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.2820	31.44	5.47	36.91	74.00	-37.09	Peak	
2 *	4823.8640	19.66	5.47	25.13	54.00	-28.87	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Vertical


115 dBuV/m

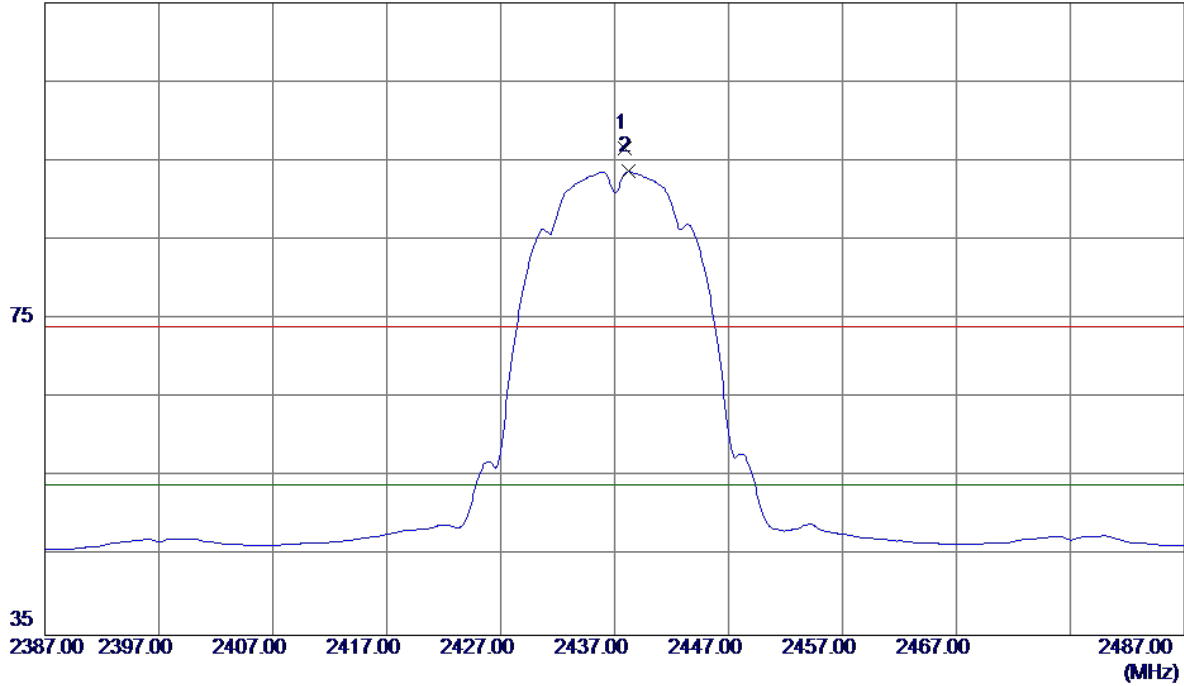

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2437.9000	64.12	32.55	96.67	74.00	22.67	Peak	No Limit
2 *	2438.2000	61.11	32.55	93.66	54.00	39.66	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

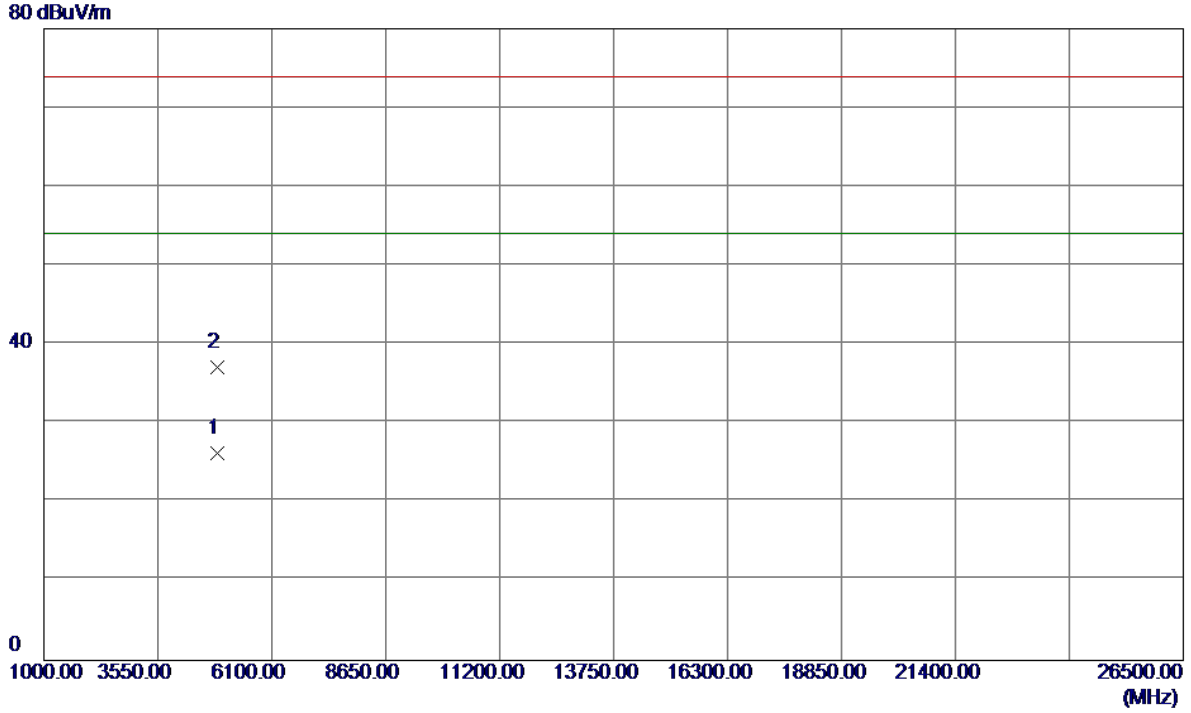

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9760	20.57	5.61	26.18	54.00	-27.82	AVG	
2	4874.1540	31.58	5.61	37.19	74.00	-36.81	Peak	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

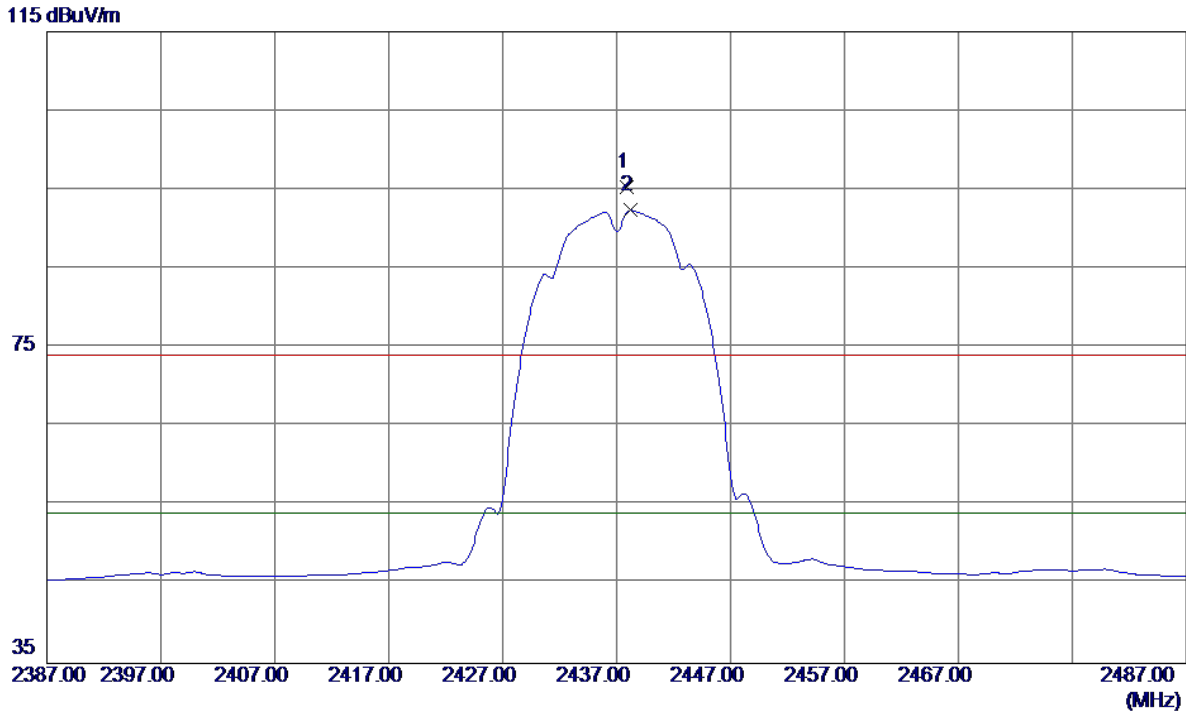

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2437.9000	62.80	32.55	95.35	74.00	21.35	Peak	No Limit
2 *	2438.2000	59.83	32.55	92.38	54.00	38.38	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal

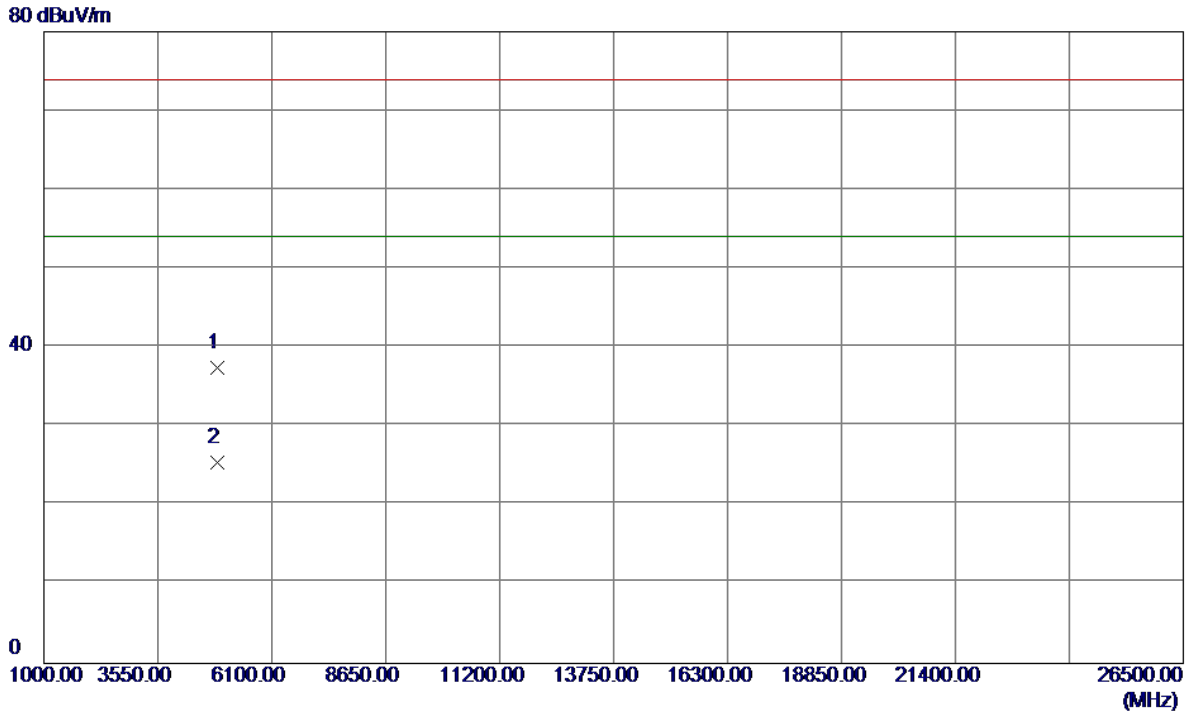


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.3040	31.87	5.61	37.48	74.00	-36.52	Peak	
2 *	4874.3660	19.88	5.61	25.49	54.00	-28.51	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Vertical


115 dBuV/m

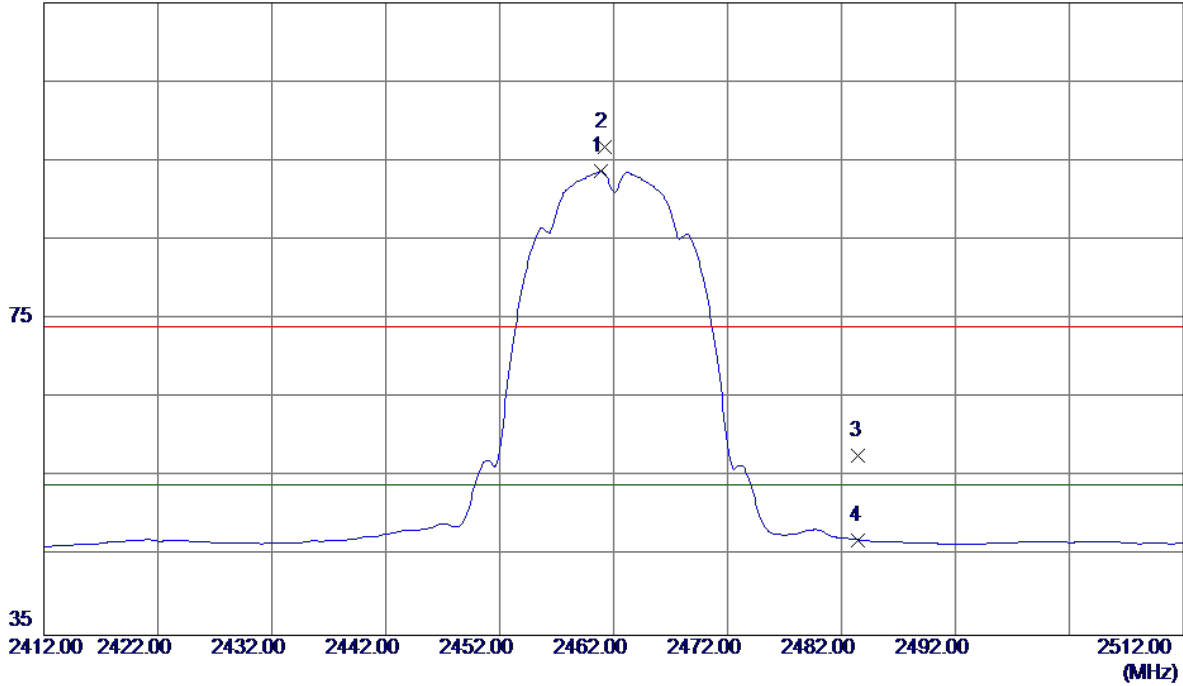

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.9000	61.04	32.63	93.67	54.00	39.67	AVG	No Limit
2	2461.2000	64.06	32.63	96.69	74.00	22.69	Peak	No Limit
3	2483.5000	25.05	32.71	57.76	74.00	-16.24	Peak	
4	2483.5000	14.36	32.71	47.07	54.00	-6.93	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical

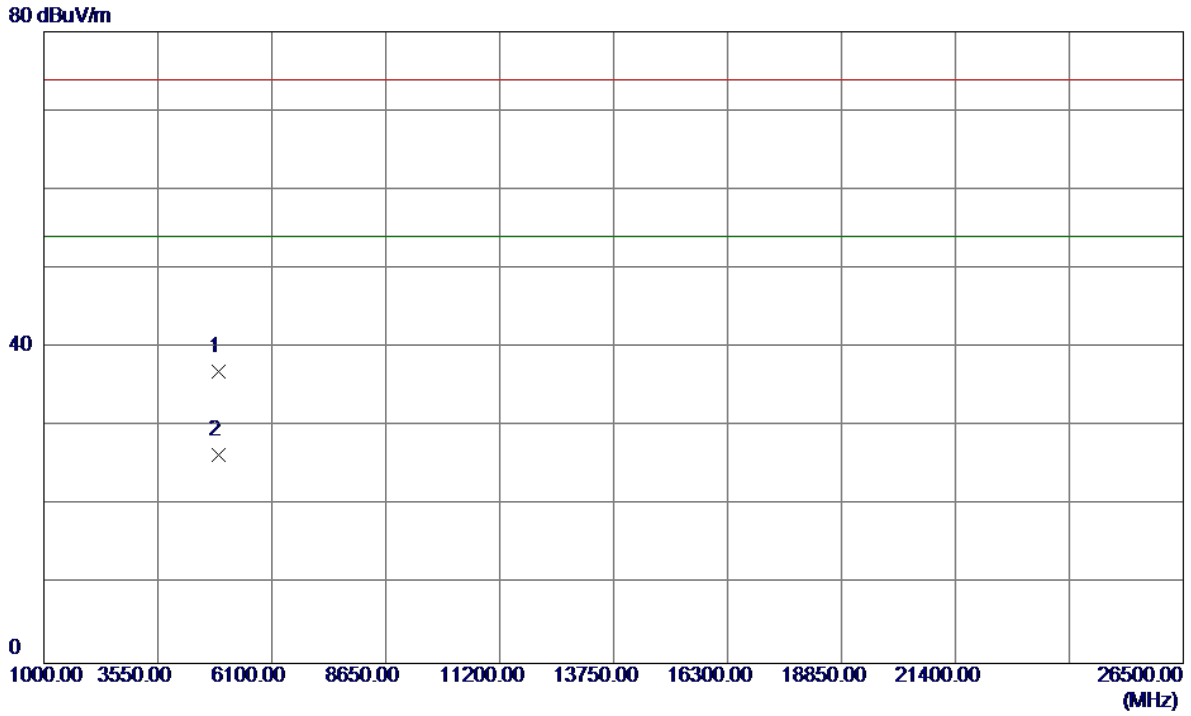

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.7879	31.26	5.74	37.00	74.00	-37.00	Peak	
2 *	4923.9180	20.60	5.74	26.34	54.00	-27.66	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

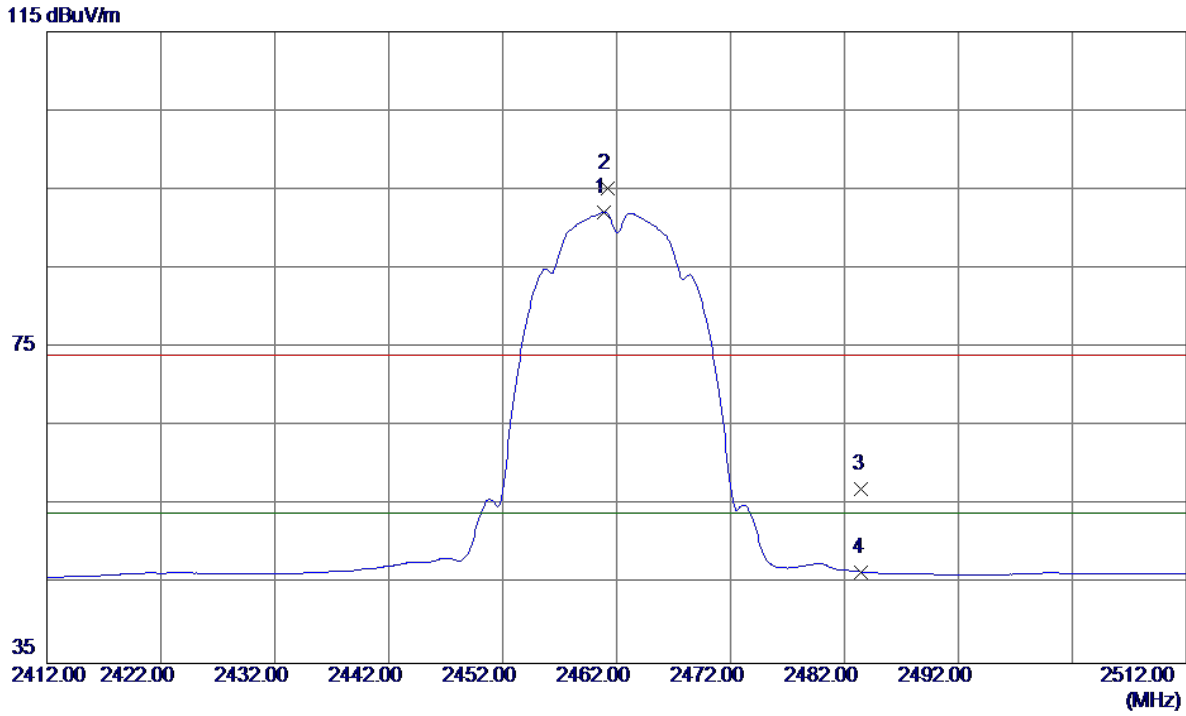

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.9000	59.50	32.63	92.13	54.00	38.13	AVG	No Limit
2	2461.2000	62.54	32.63	95.17	74.00	21.17	Peak	No Limit
3	2483.5000	24.44	32.71	57.15	74.00	-16.85	Peak	
4	2483.5000	13.87	32.71	46.58	54.00	-7.42	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

Horizontal

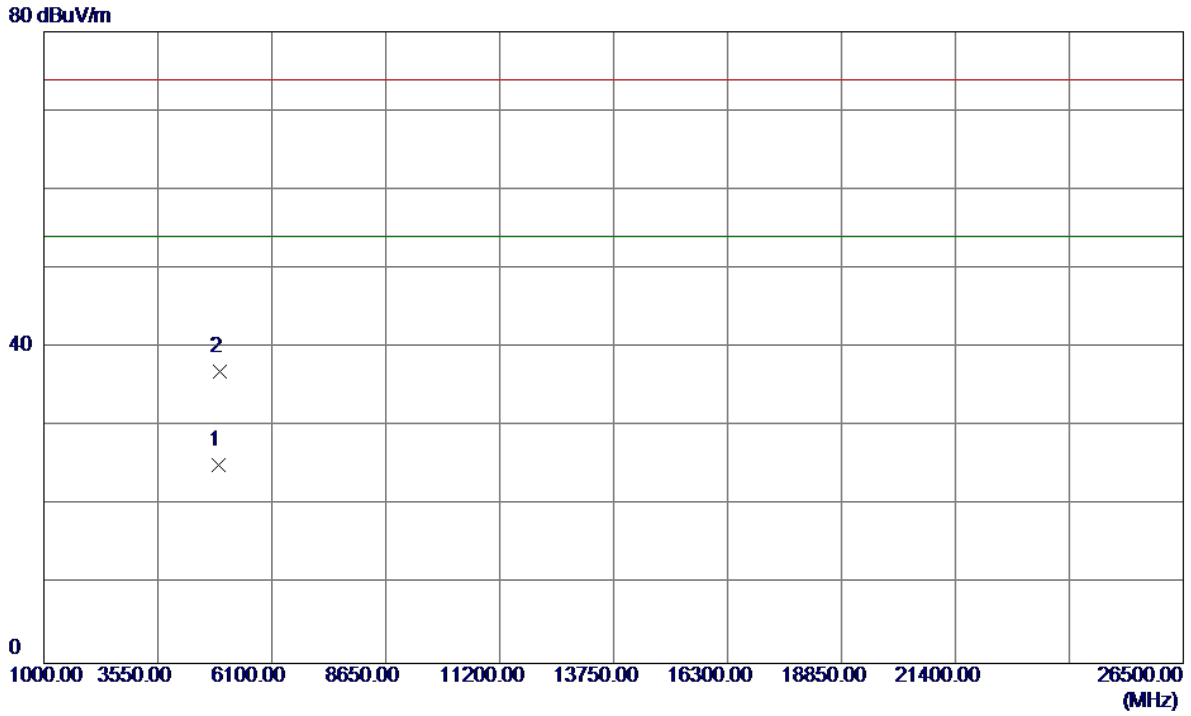


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9440	19.35	5.74	25.09	54.00	-28.91	AVG	
2	4924.4540	31.23	5.75	36.98	74.00	-37.02	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical


115 dBuV/m

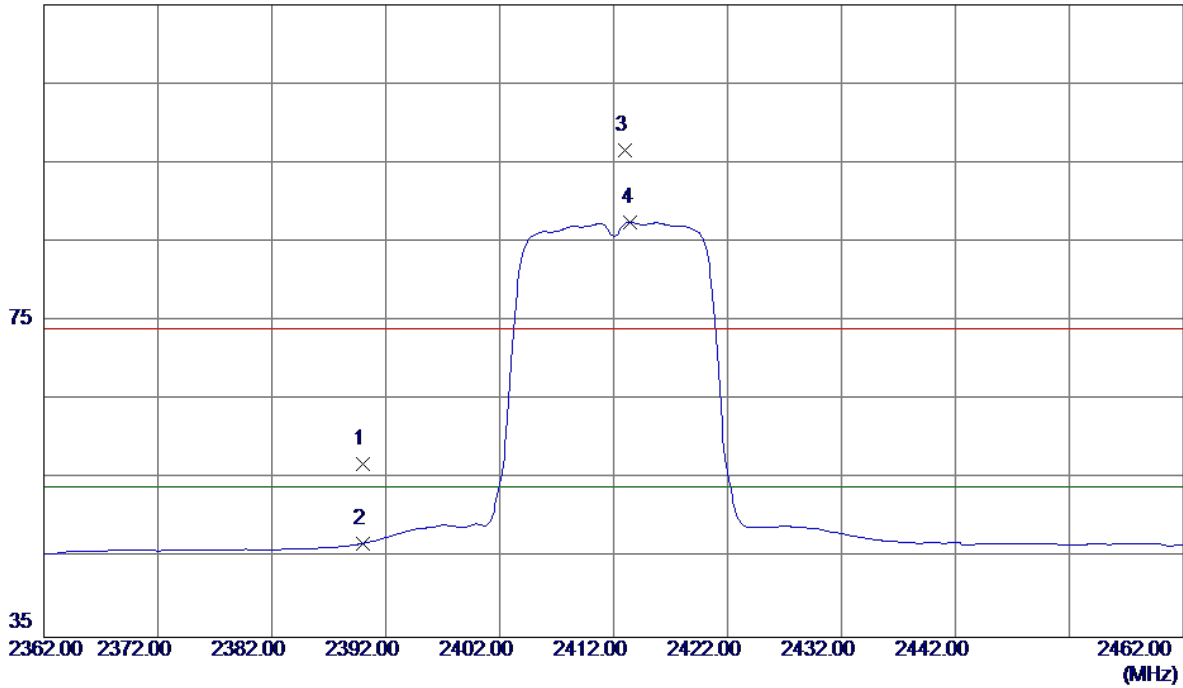

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.57	32.38	56.95	74.00	-17.05	Peak	
2	2390.0000	14.51	32.38	46.89	54.00	-7.11	AVG	
3	2413.0000	64.08	32.46	96.54	74.00	22.54	Peak	No Limit
4 *	2413.5000	55.07	32.46	87.53	54.00	33.53	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

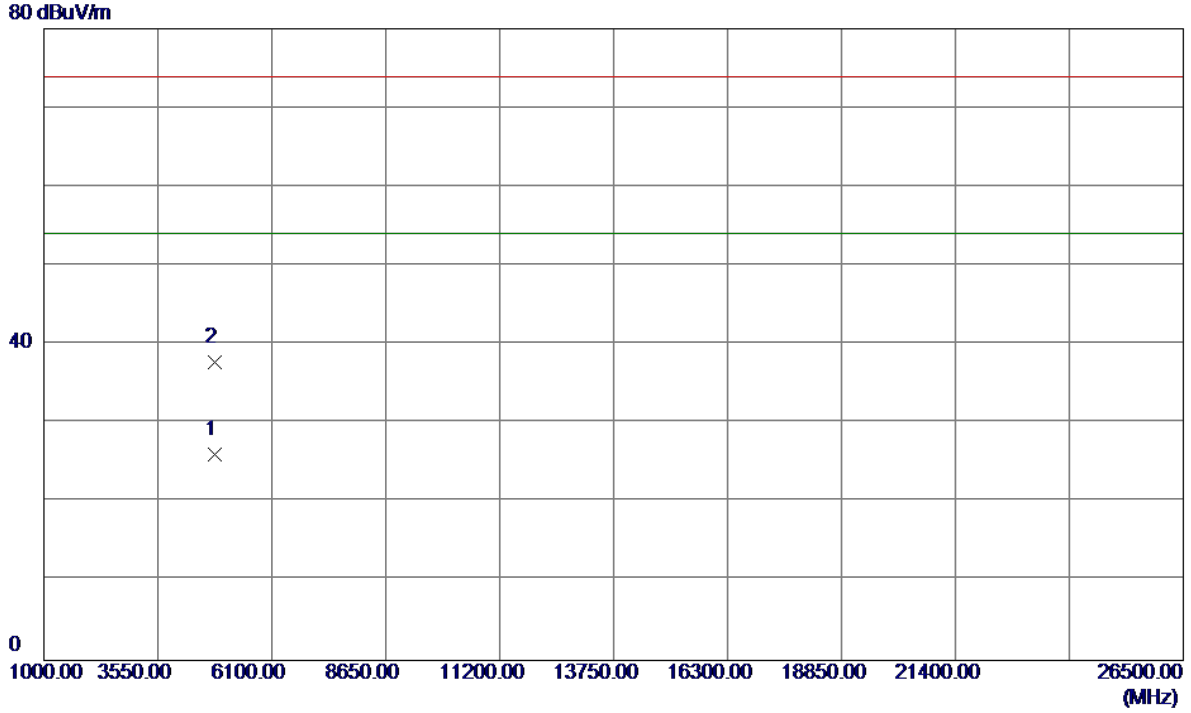


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9680	20.64	5.47	26.11	54.00	-27.89	AVG	
2	4824.4180	32.25	5.48	37.73	74.00	-36.27	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal


115 dBuV/m

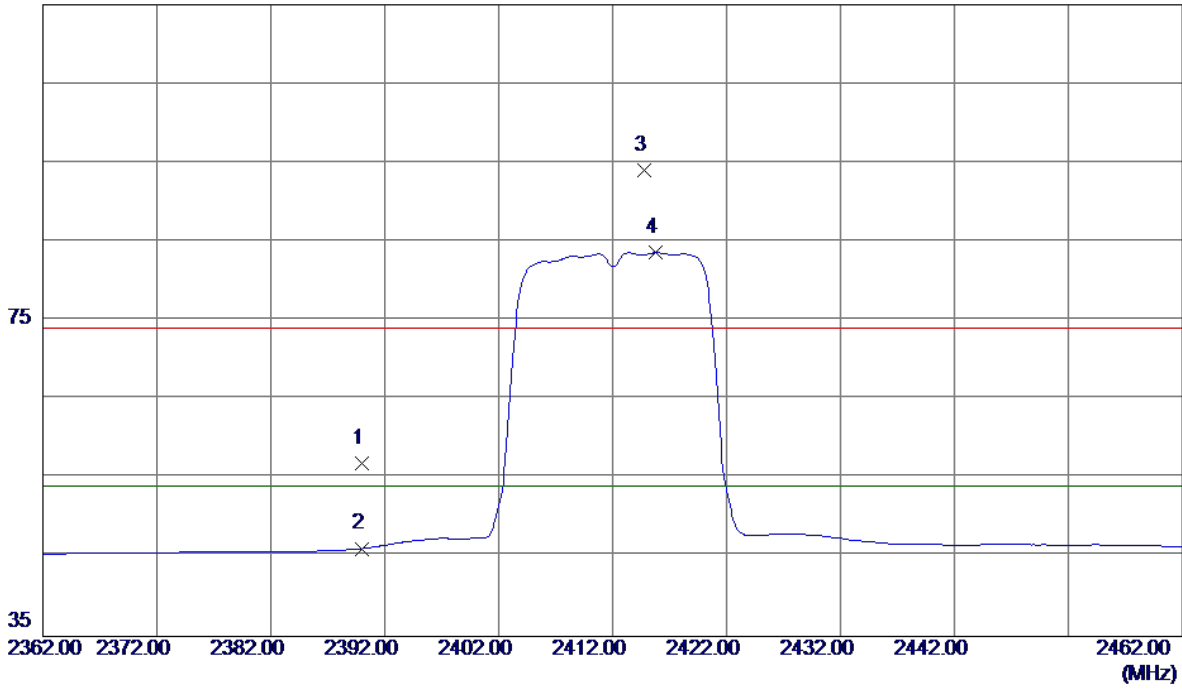

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.57	32.38	56.95	74.00	-17.05	Peak	
2	2390.0000	13.74	32.38	46.12	54.00	-7.88	AVG	
3	2414.8000	61.53	32.46	93.99	74.00	19.99	Peak	No Limit
4 *	2415.8000	51.14	32.47	83.61	54.00	29.61	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

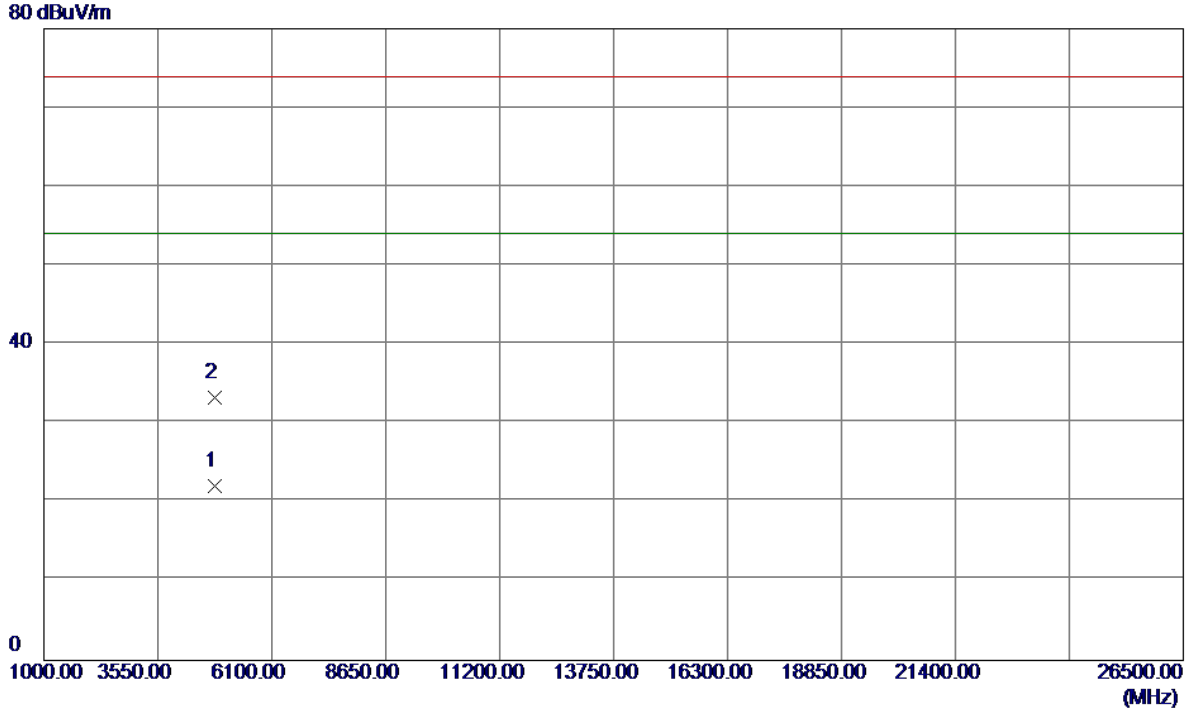


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0480	16.58	5.47	22.05	54.00	-31.95	AVG	
2	4824.7620	27.79	5.48	33.27	74.00	-40.73	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical


115 dBuV/m

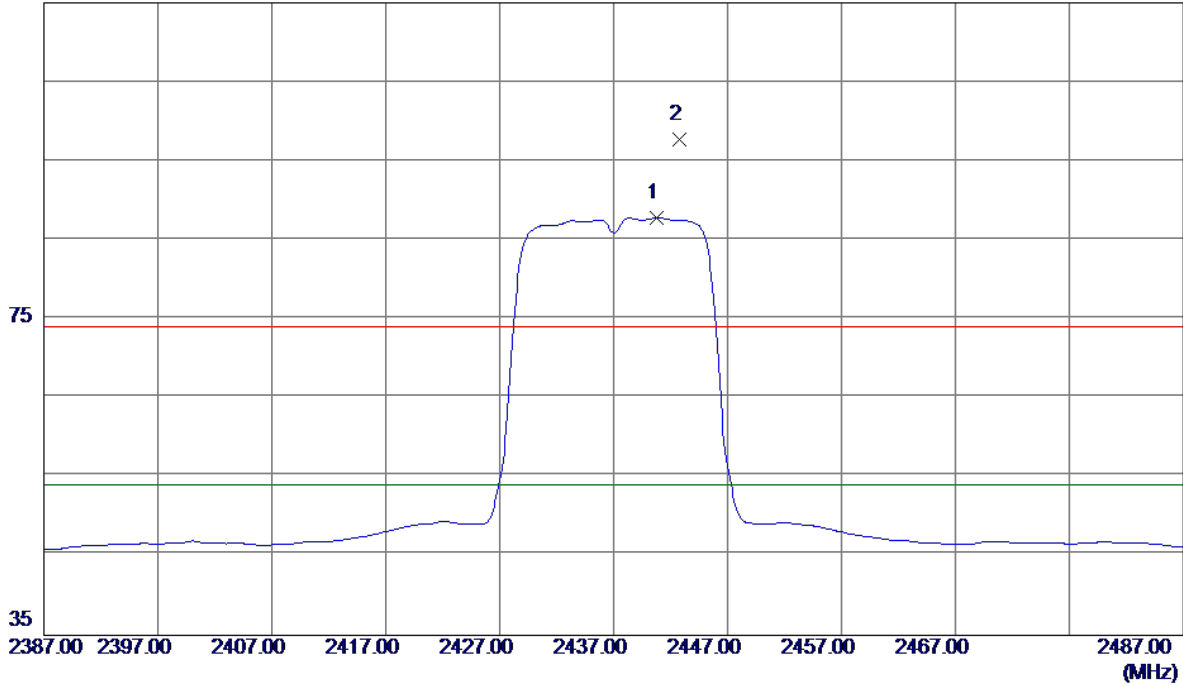

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2440.8000	55.26	32.56	87.82	54.00	33.82	AVG	No Limit
2	2442.8000	65.16	32.57	97.73	74.00	23.73	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical

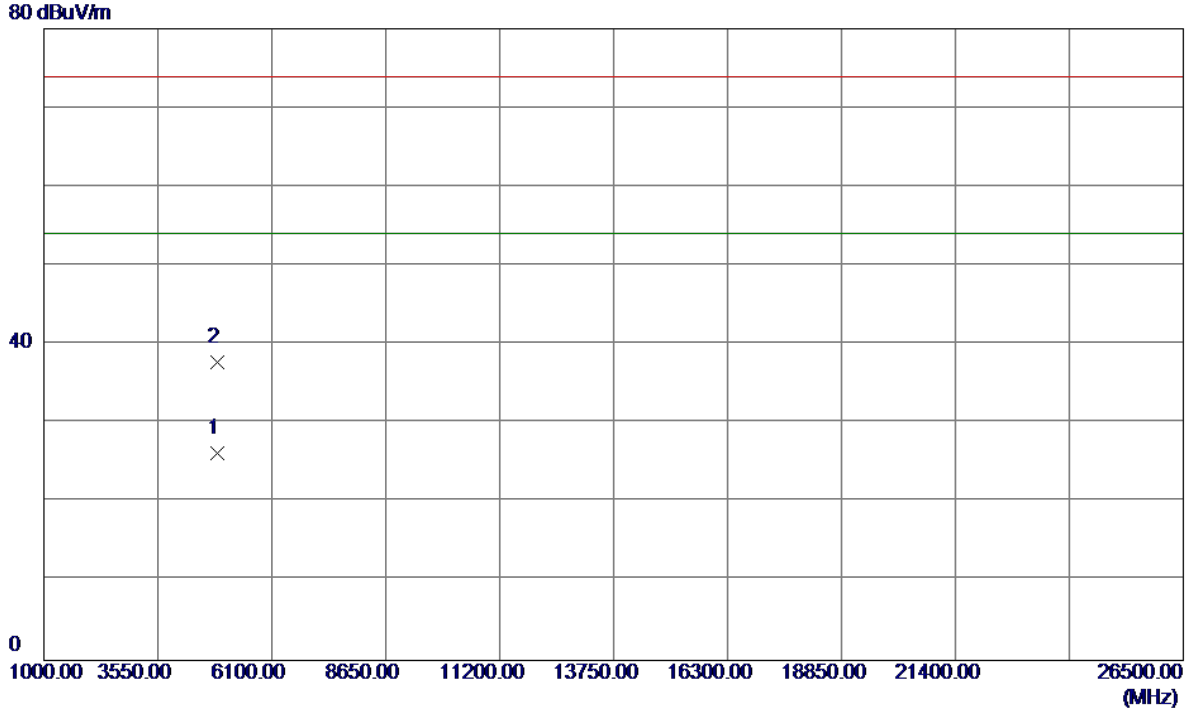


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.6080	20.57	5.61	26.18	54.00	-27.82	AVG	
2	4873.7719	32.17	5.61	37.78	74.00	-36.22	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal


115 dBuV/m

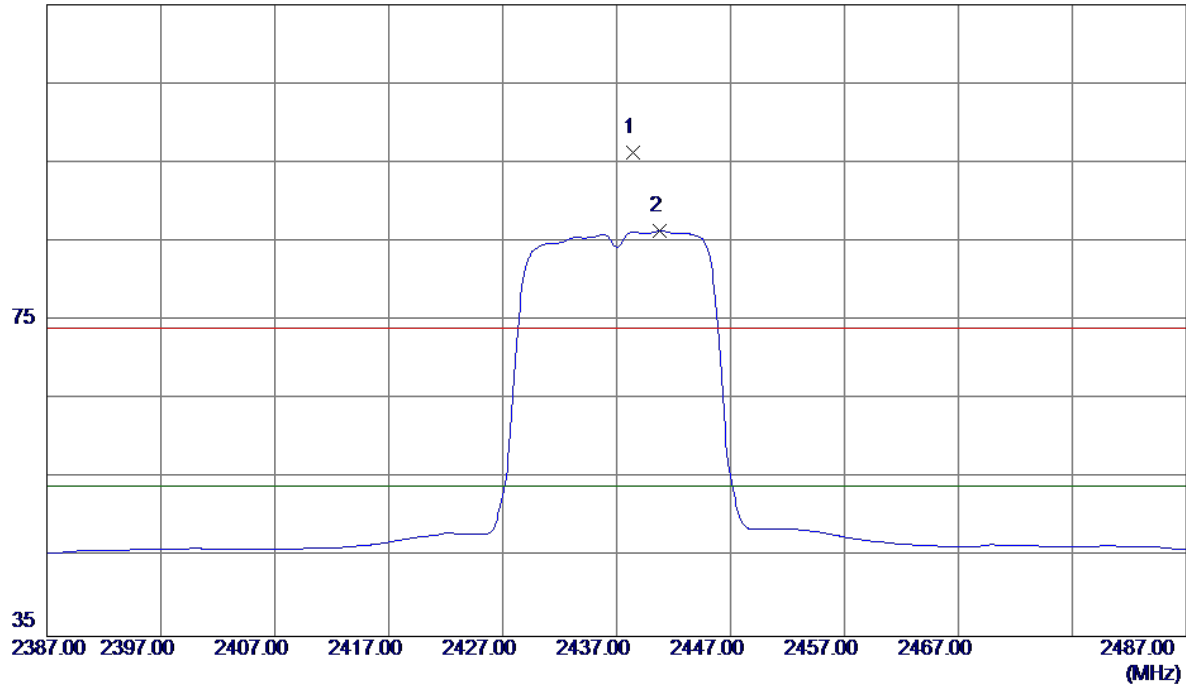

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.4000	63.77	32.55	96.32	74.00	22.32	Peak	No Limit
2 *	2440.8000	53.79	32.56	86.35	54.00	32.35	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

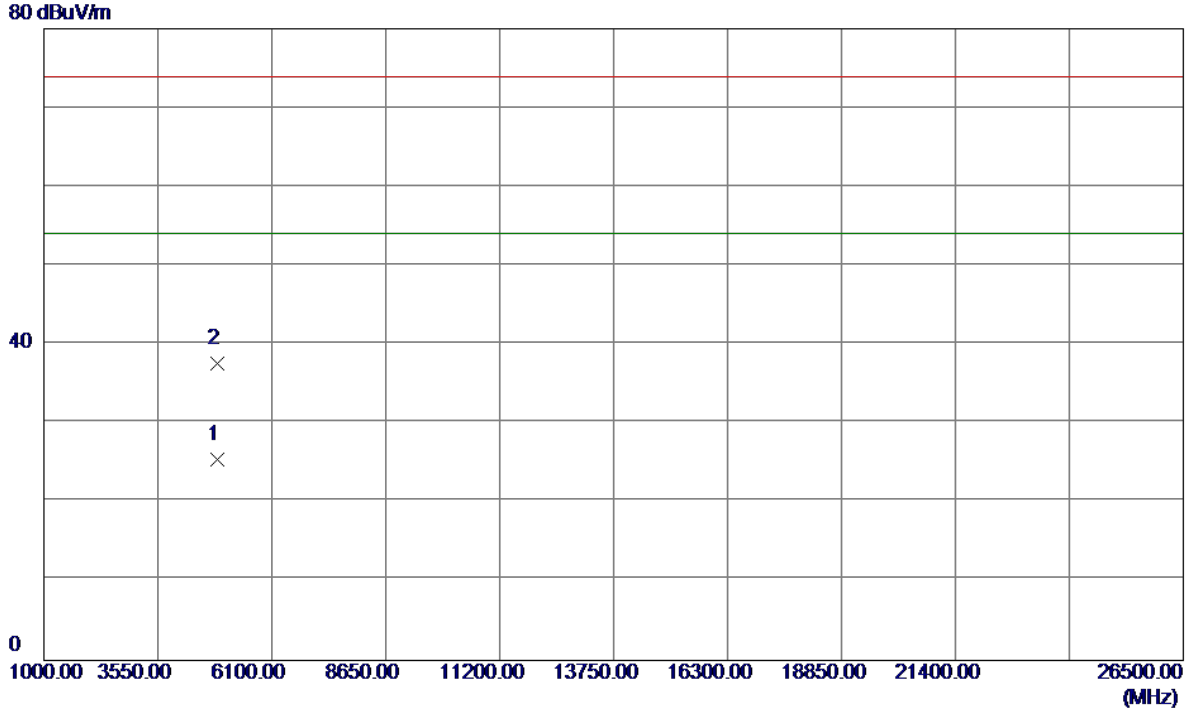


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9080	19.86	5.61	25.47	54.00	-28.53	AVG	
2	4873.9160	32.02	5.61	37.63	74.00	-36.37	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical


115 dBuV/m

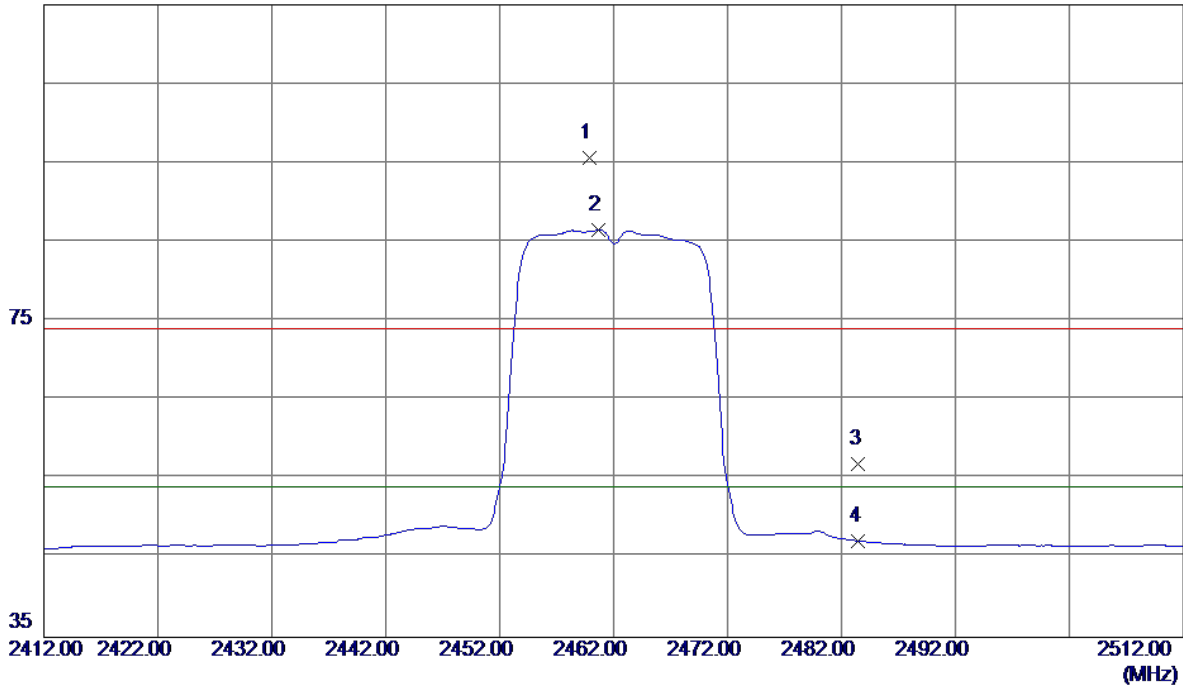

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.9000	63.01	32.63	95.64	74.00	21.64	Peak	No Limit
2 *	2460.7000	53.88	32.63	86.51	54.00	32.51	AVG	No Limit
3	2483.5000	24.22	32.71	56.93	74.00	-17.07	Peak	
4	2483.5000	14.47	32.71	47.18	54.00	-6.82	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical

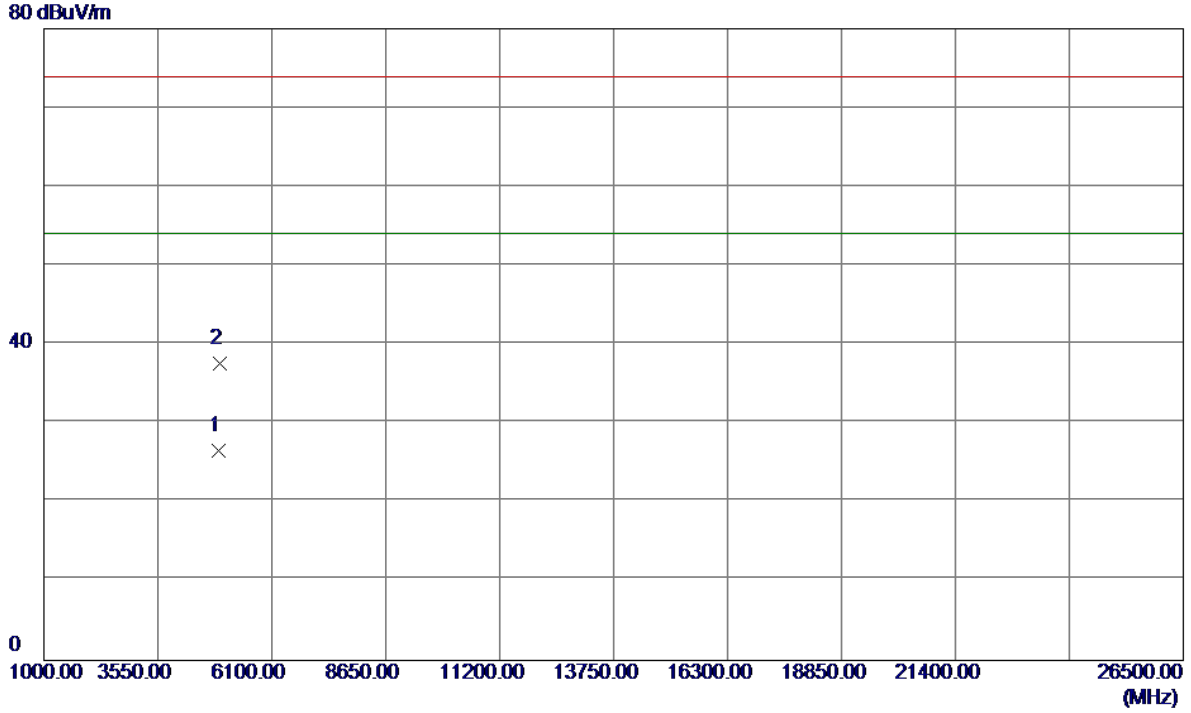


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0040	20.84	5.74	26.58	54.00	-27.42	AVG	
2	4924.5700	31.83	5.75	37.58	74.00	-36.42	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal


115 dBuV/m

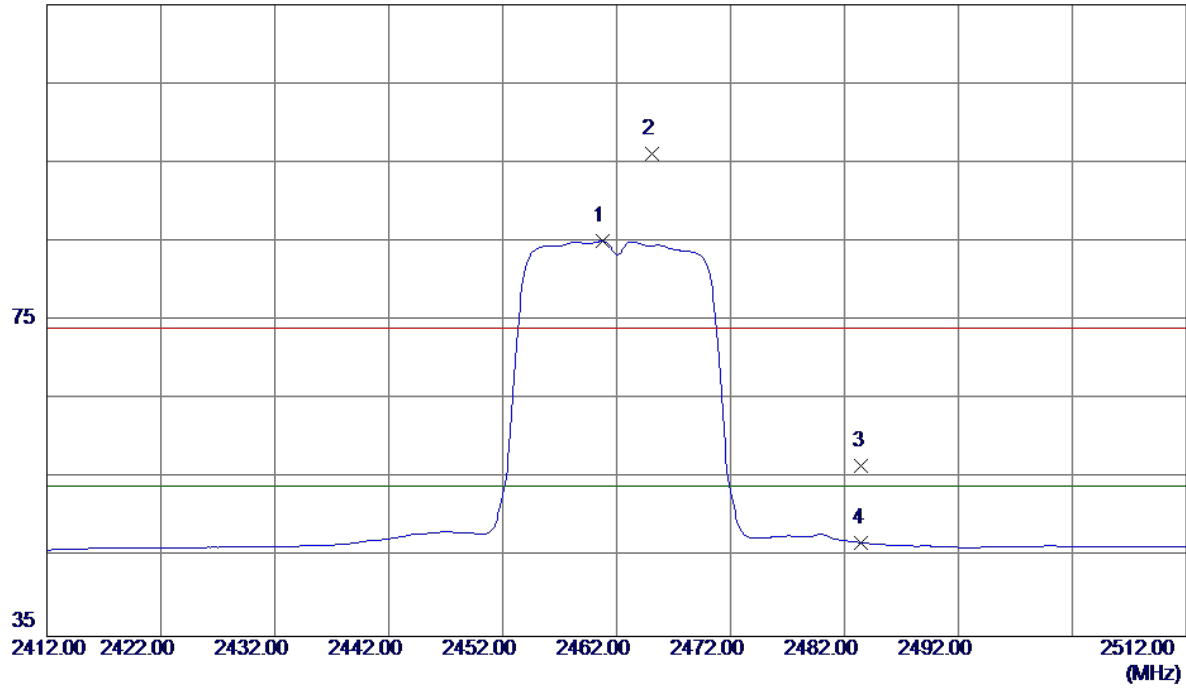

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.8000	52.42	32.63	85.05	54.00	31.05	AVG	No Limit
2	2465.1000	63.48	32.64	96.12	74.00	22.12	Peak	No Limit
3	2483.5000	23.93	32.71	56.64	74.00	-17.36	Peak	
4	2483.5000	14.17	32.71	46.88	54.00	-7.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal

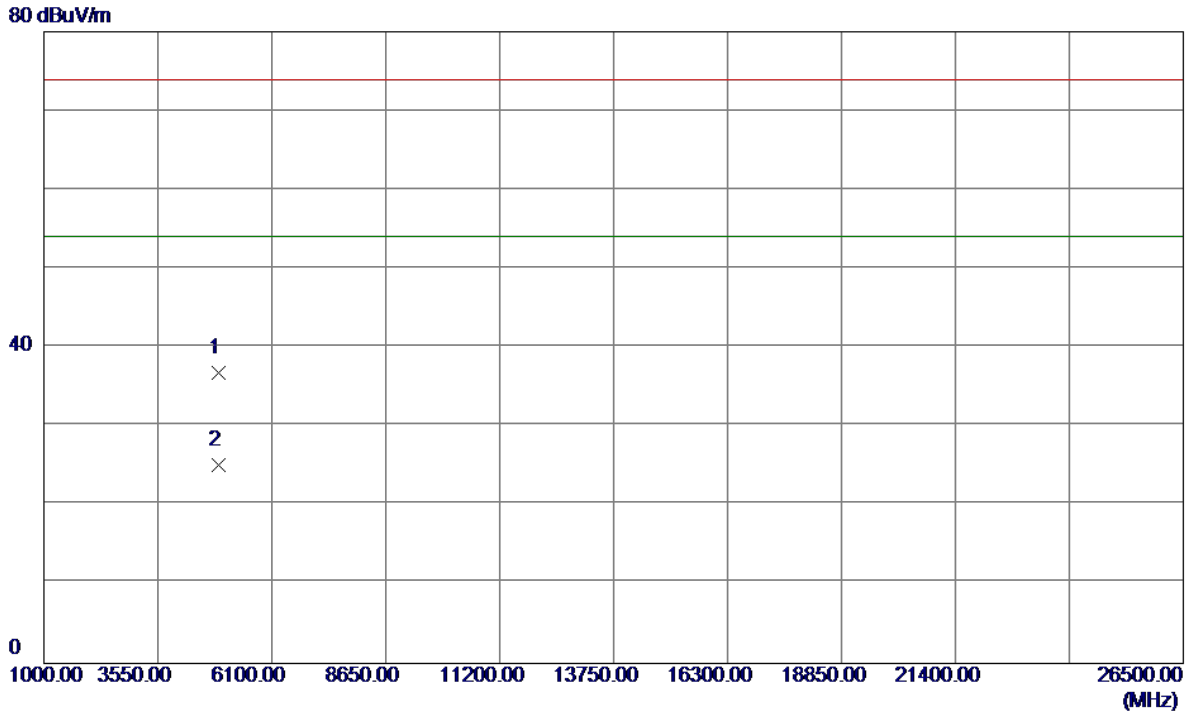


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.6340	31.11	5.74	36.85	74.00	-37.15	Peak	
2 *	4924.0660	19.45	5.74	25.19	54.00	-28.81	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical


115 dBuV/m

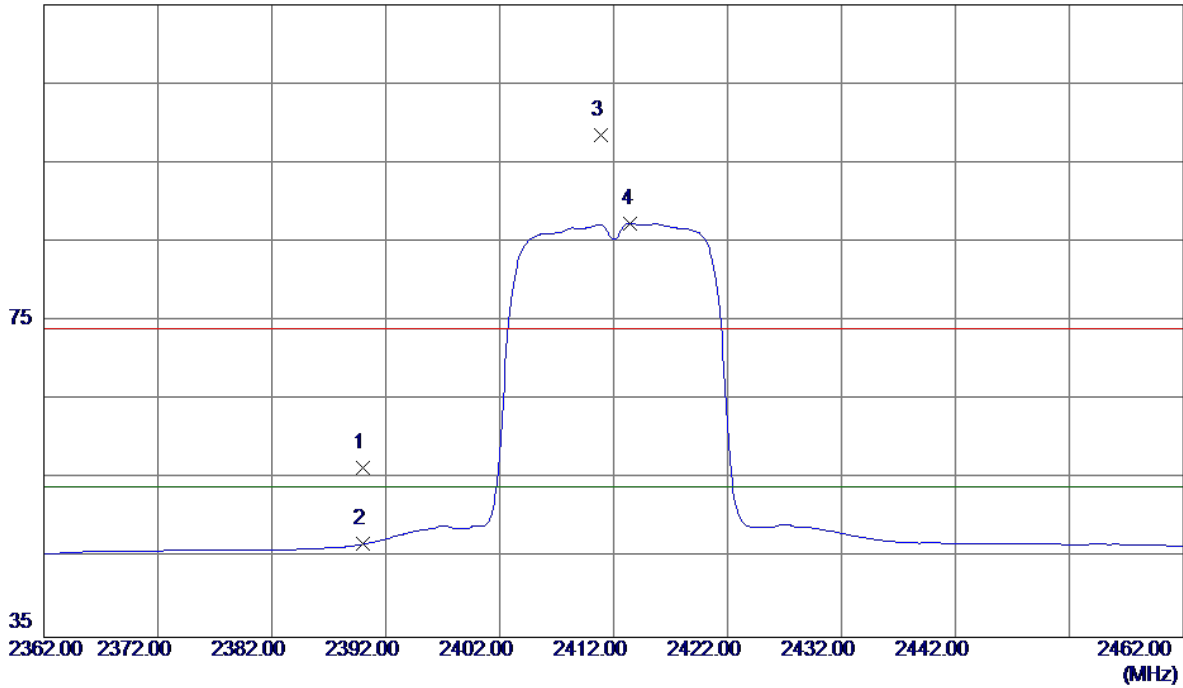

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.04	32.38	56.42	74.00	-17.58	Peak	
2	2390.0000	14.40	32.38	46.78	54.00	-7.22	AVG	
3	2410.9000	66.15	32.45	98.60	74.00	24.60	Peak	No Limit
4 *	2413.5000	54.93	32.46	87.39	54.00	33.39	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical

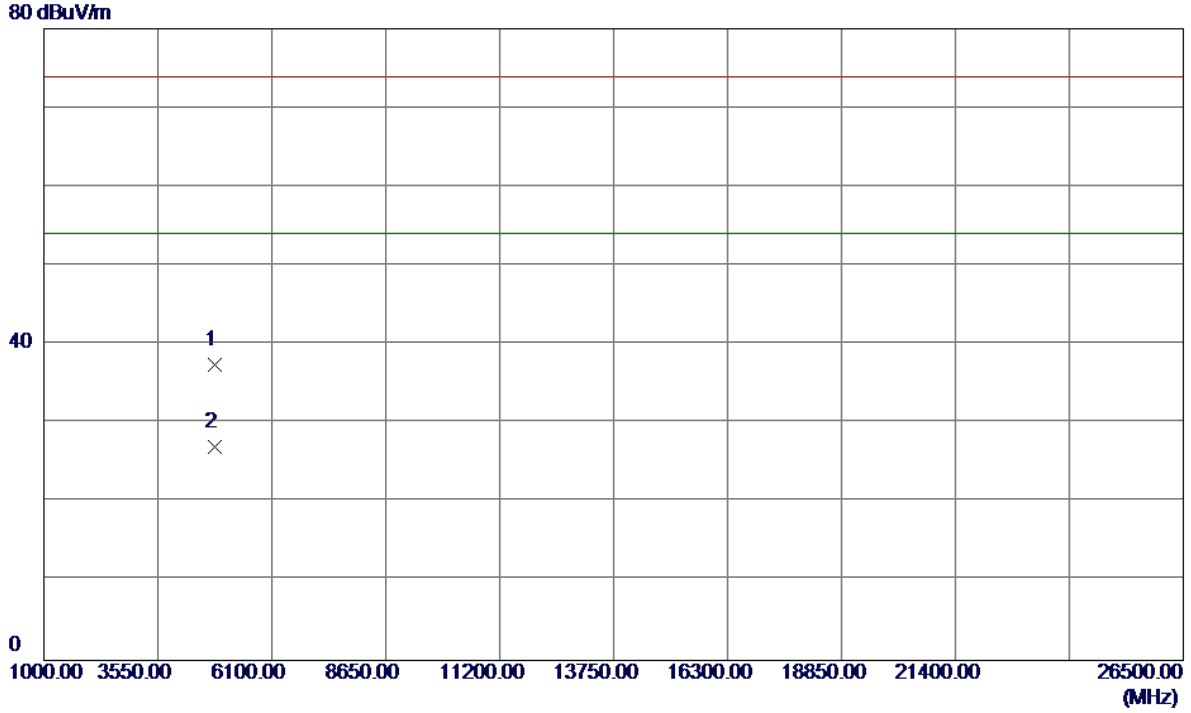


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9200	31.98	5.47	37.45	74.00	-36.55	Peak	
2 *	4824.4640	21.61	5.48	27.09	54.00	-26.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHZ

Horizontal


115 dBuV/m

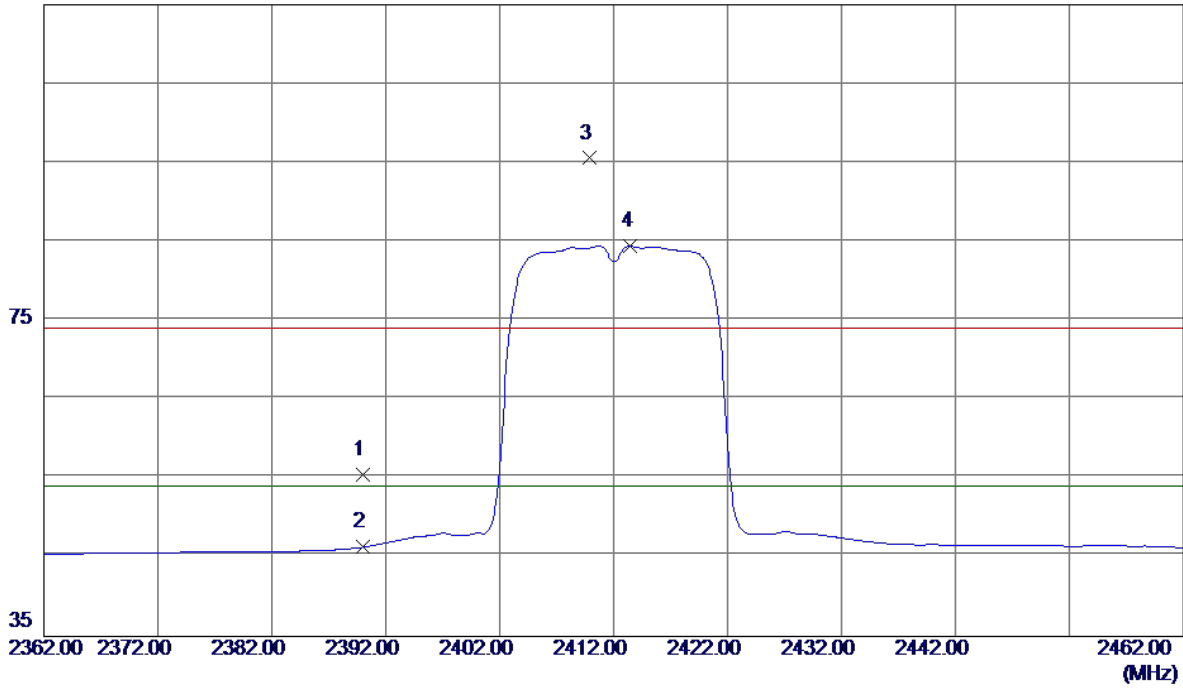

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.15	32.38	55.53	74.00	-18.47	Peak	
2	2390.0000	13.92	32.38	46.30	54.00	-7.70	AVG	
3	2409.9000	63.11	32.45	95.56	74.00	21.56	Peak	No Limit
4 *	2413.5000	52.01	32.46	84.47	54.00	30.47	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal

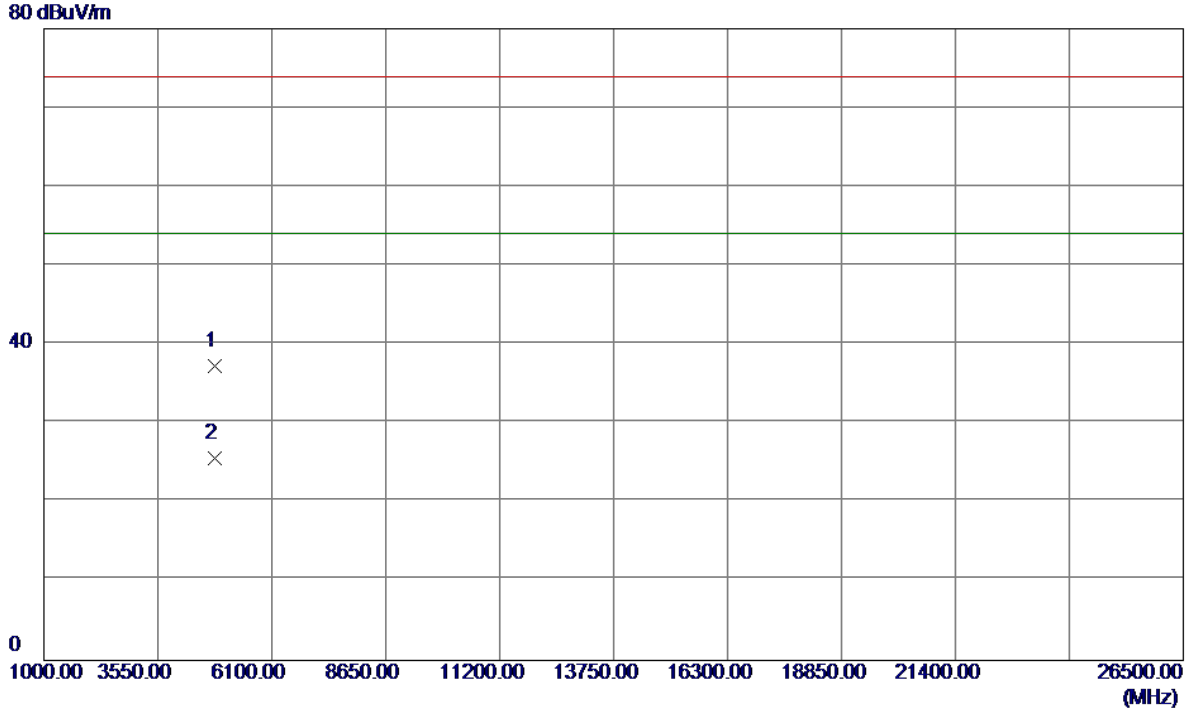


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.7140	31.78	5.47	37.25	74.00	-36.75	Peak	
2 *	4824.0360	20.09	5.47	25.56	54.00	-28.44	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical


115 dBuV/m

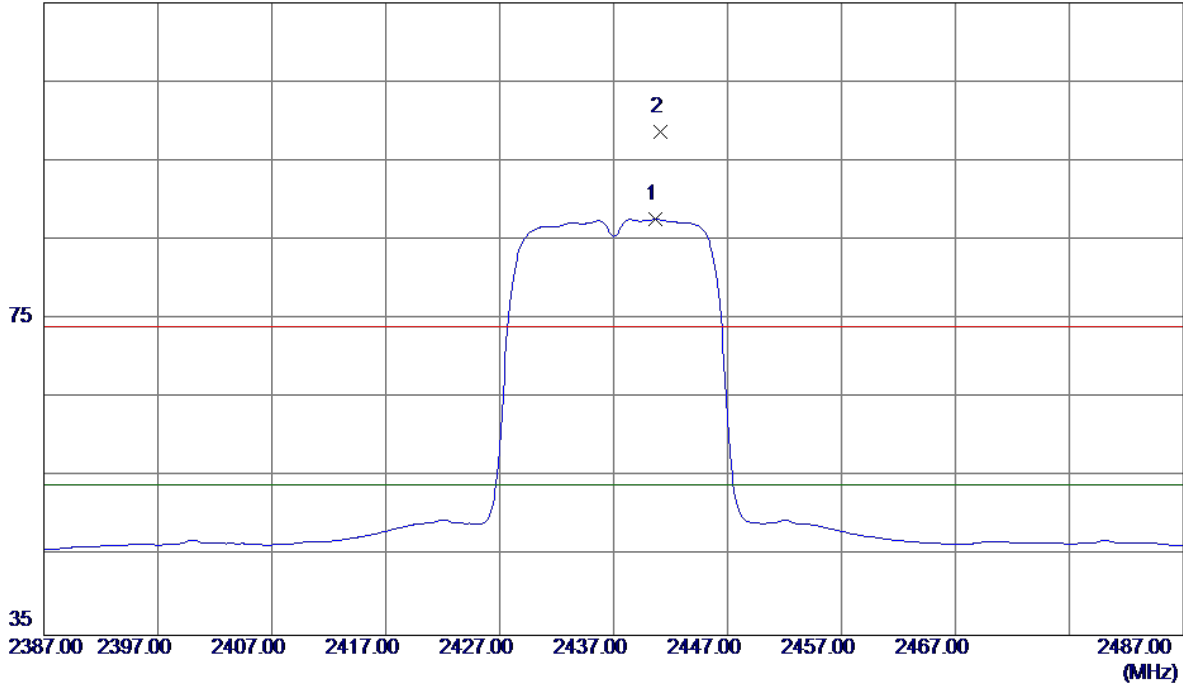

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2440.7000	55.06	32.56	87.62	54.00	33.62	AVG	No Limit
2	2441.1000	66.16	32.56	98.72	74.00	24.72	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

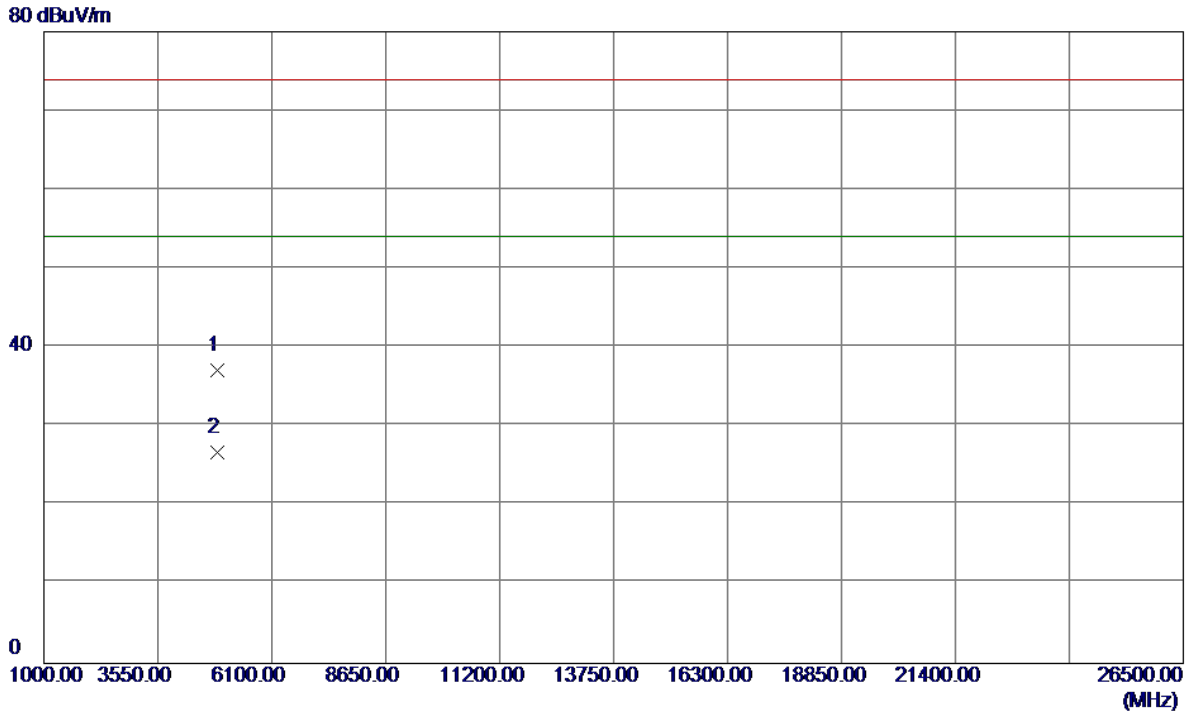

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.2120	31.55	5.61	37.16	74.00	-36.84	Peak	
2 *	4874.3560	21.05	5.61	26.66	54.00	-27.34	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

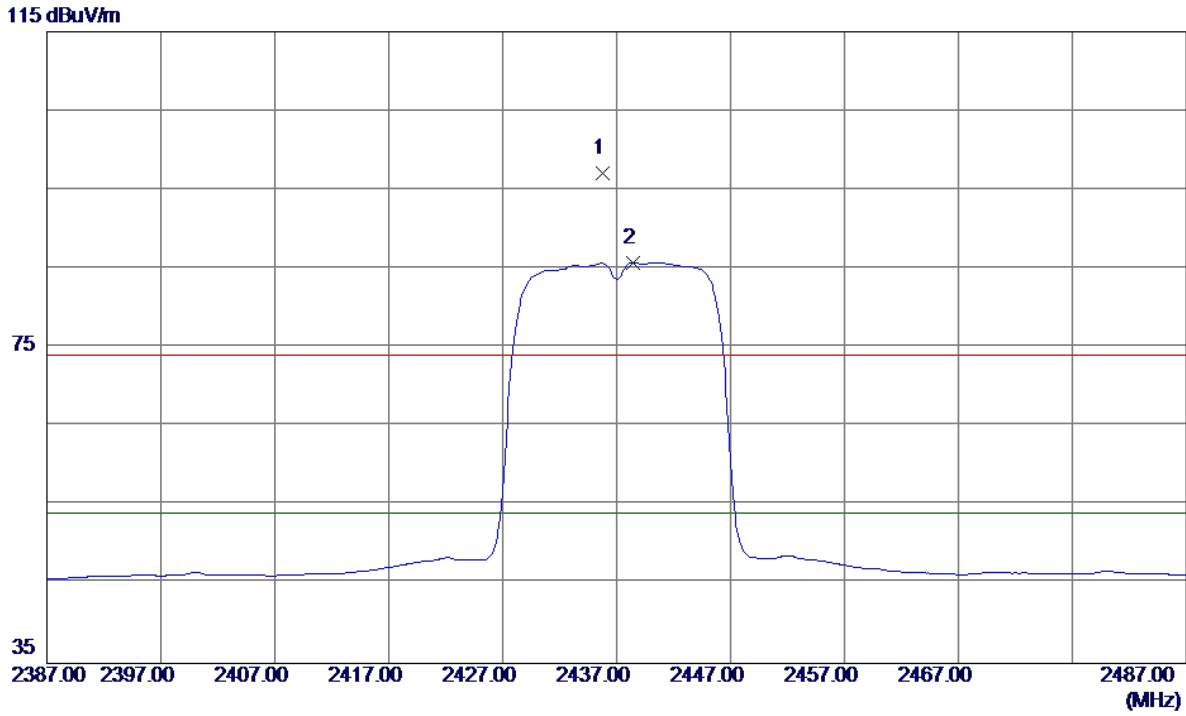

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.8000	64.54	32.54	97.08	74.00	23.08	Peak	No Limit
2 *	2438.4000	53.24	32.55	85.79	54.00	31.79	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal

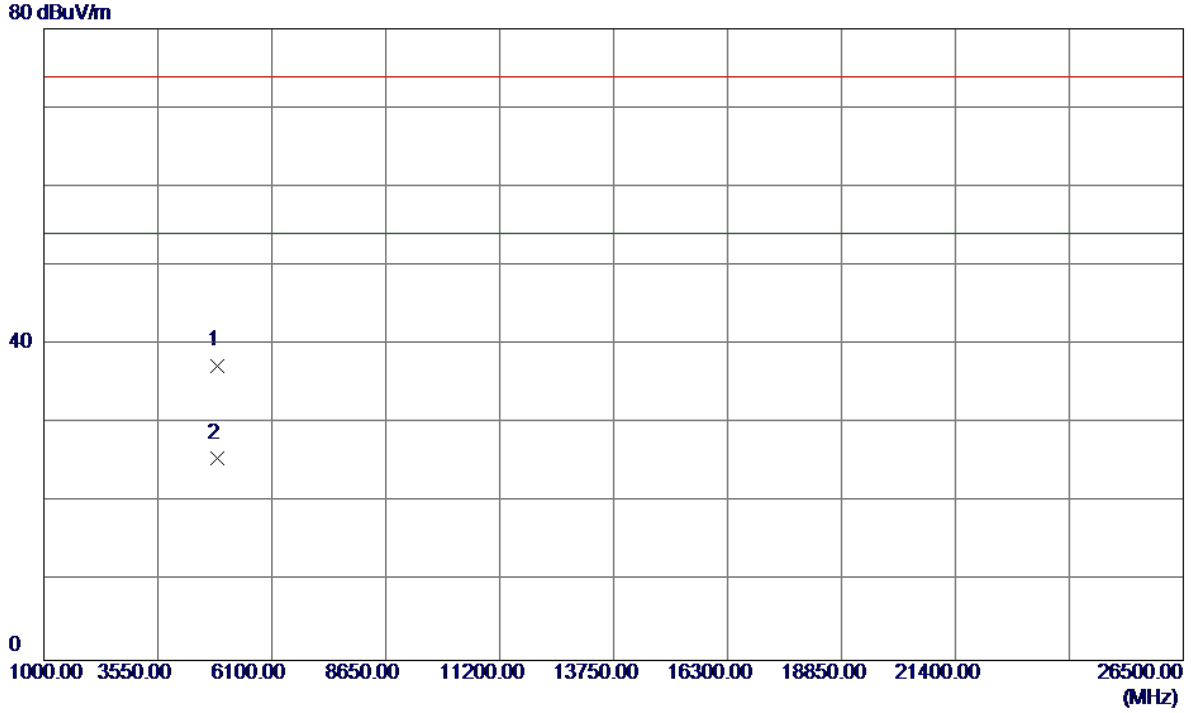


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.8580	31.75	5.61	37.36	74.00	-36.64	Peak	
2 *	4874.1040	20.01	5.61	25.62	54.00	-28.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical


115 dBuV/m

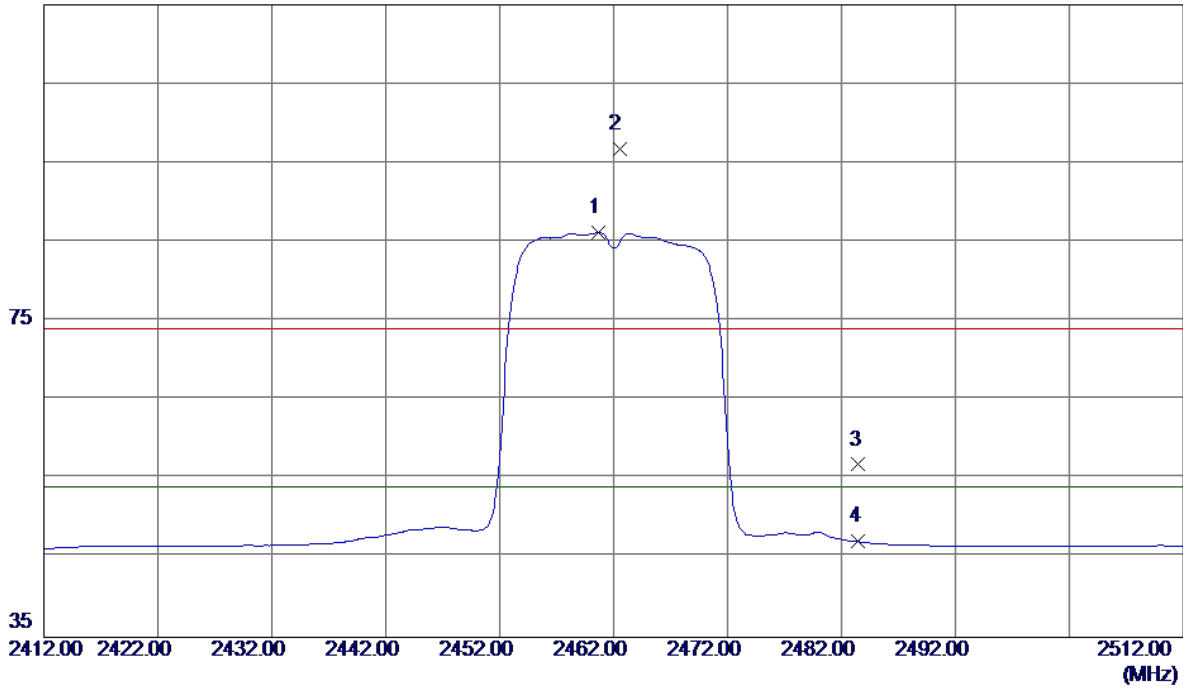

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.7000	53.58	32.63	86.21	54.00	32.21	AVG	No Limit
2	2462.5000	64.10	32.64	96.74	74.00	22.74	Peak	No Limit
3	2483.5000	24.13	32.71	56.84	74.00	-17.16	Peak	
4	2483.5000	14.38	32.71	47.09	54.00	-6.91	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical

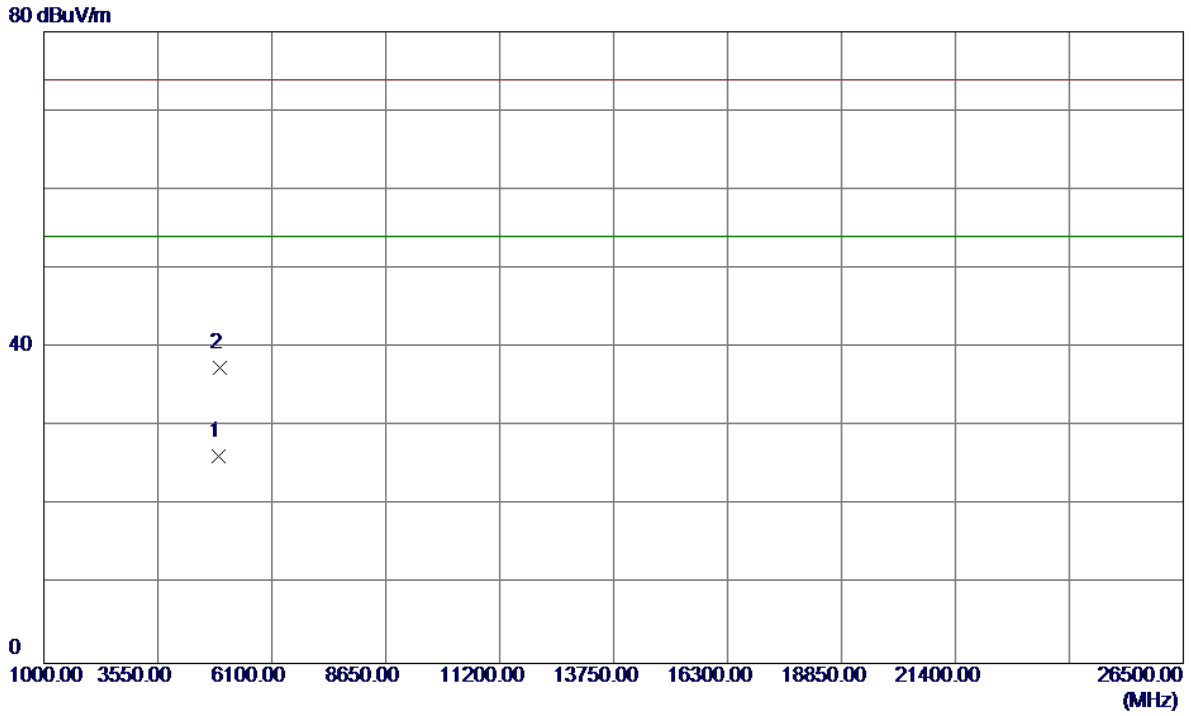


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.1000	20.49	5.75	26.24	54.00	-27.76	AVG	
2	4924.3820	31.76	5.75	37.51	74.00	-36.49	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal


115 dBuV/m

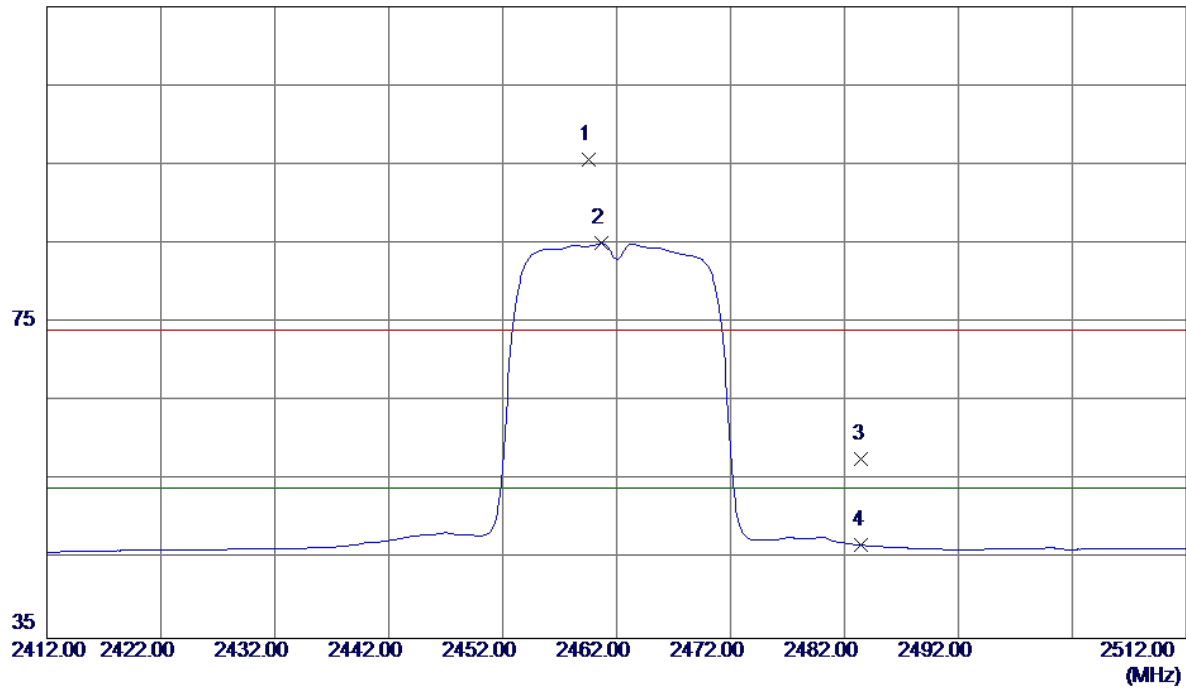

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.6000	63.03	32.63	95.66	74.00	21.66	Peak	No Limit
2 *	2460.7000	52.38	32.63	85.01	54.00	31.01	AVG	No Limit
3	2483.5000	25.02	32.71	57.73	74.00	-16.27	Peak	
4	2483.5000	14.11	32.71	46.82	54.00	-7.18	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

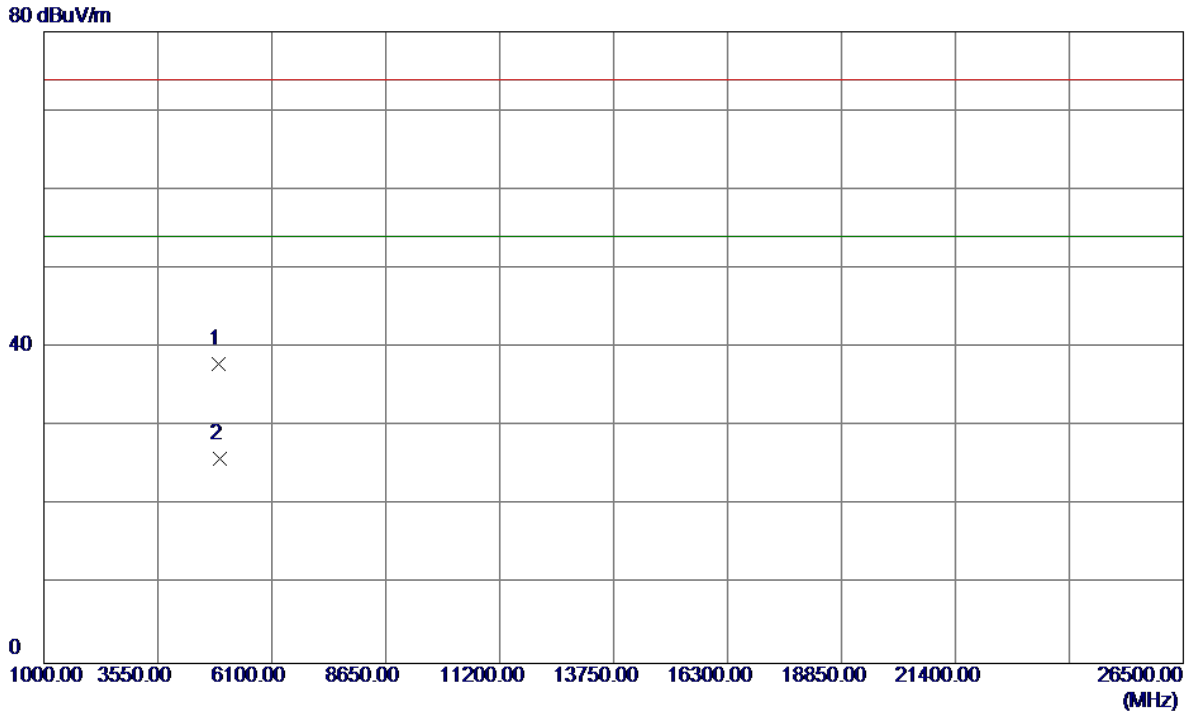


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8520	32.12	5.74	37.86	74.00	-36.14	Peak	
2 *	4924.3820	20.13	5.75	25.88	54.00	-28.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical


115 dBuV/m

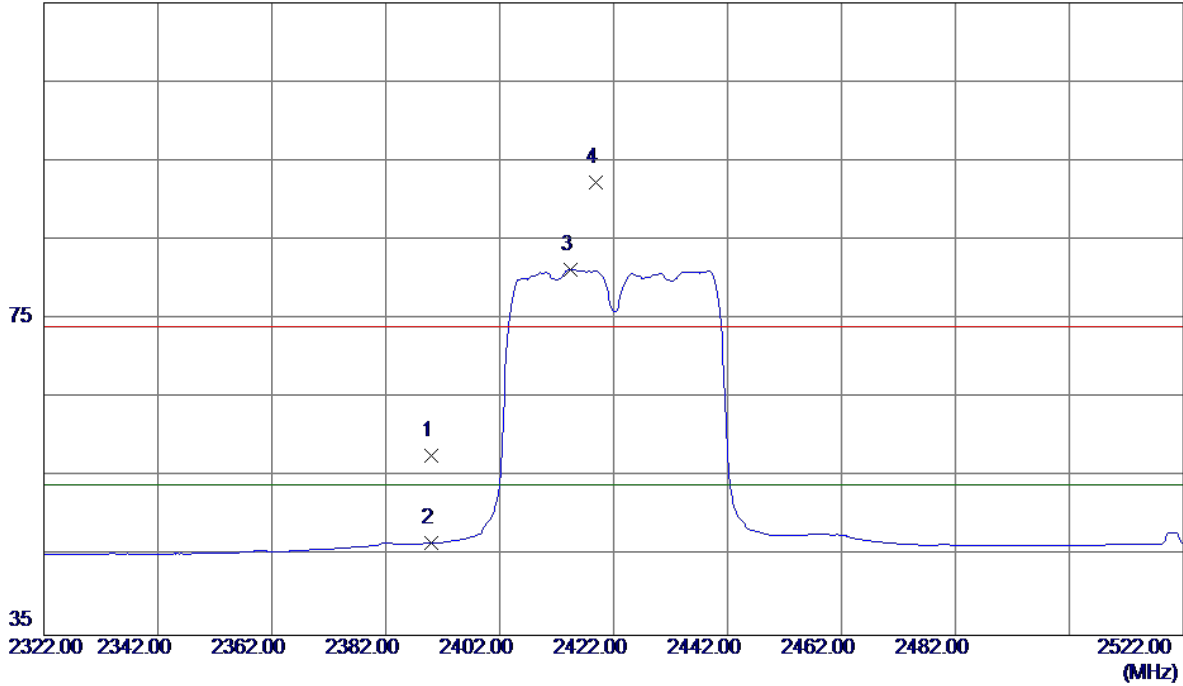

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.40	32.38	57.78	74.00	-16.22	Peak	
2	2390.0000	14.34	32.38	46.72	54.00	-7.28	AVG	
3 *	2414.4000	48.76	32.46	81.22	54.00	27.22	AVG	No Limit
4	2418.8000	59.78	32.48	92.26	74.00	18.26	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Vertical

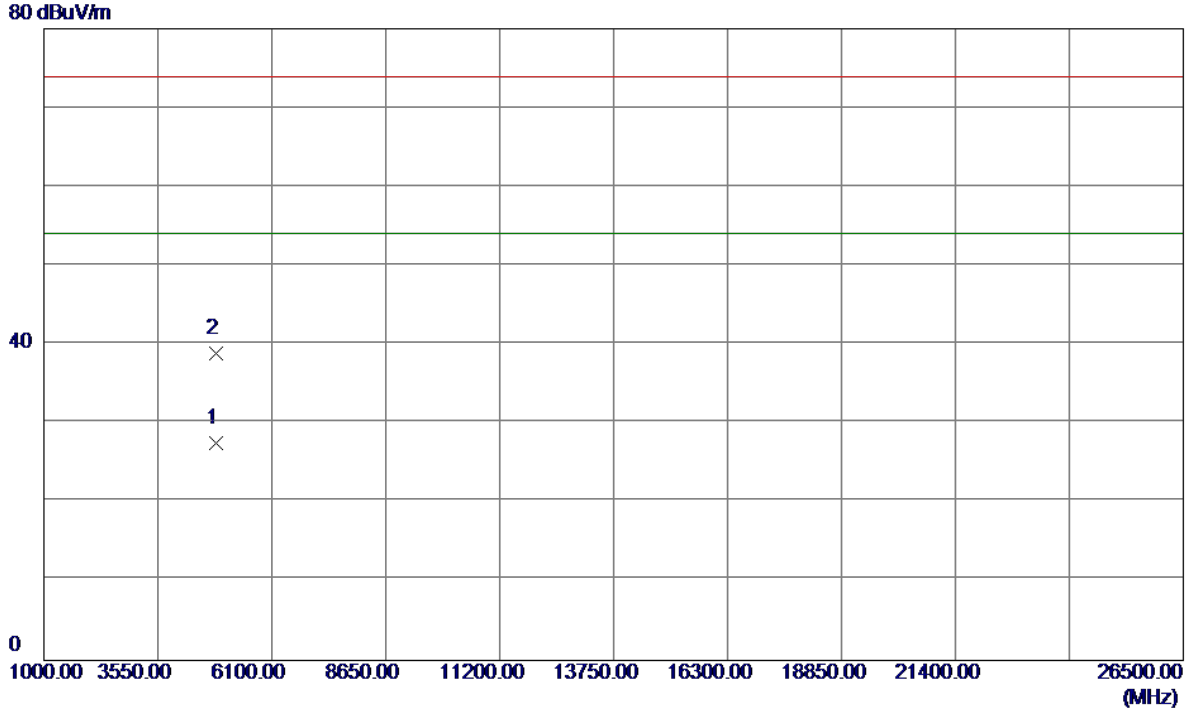


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4843.5240	22.00	5.53	27.53	54.00	-26.47	AVG	
2	4844.0040	33.33	5.53	38.86	74.00	-35.14	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal


115 dBuV/m

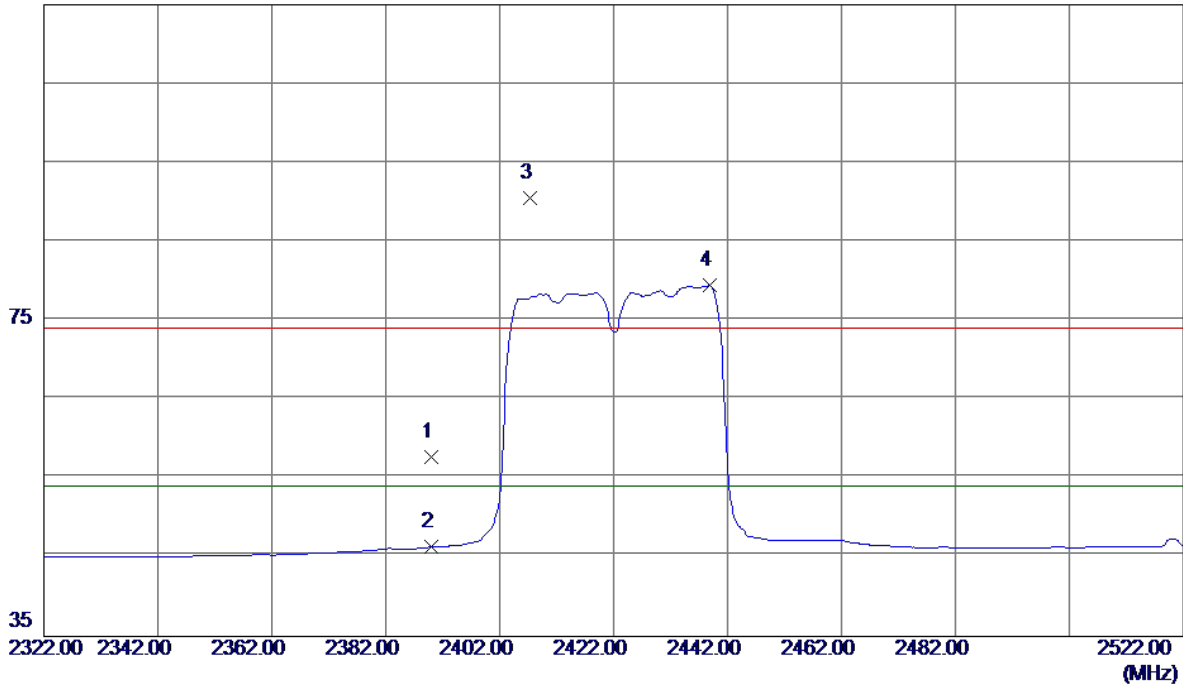

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	25.31	32.38	57.69	74.00	-16.31	Peak	
2	2390.0000	13.93	32.38	46.31	54.00	-7.69	AVG	
3	2407.4000	58.11	32.44	90.55	74.00	16.55	Peak	No Limit
4 *	2438.8000	46.88	32.55	79.43	54.00	25.43	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz

Horizontal

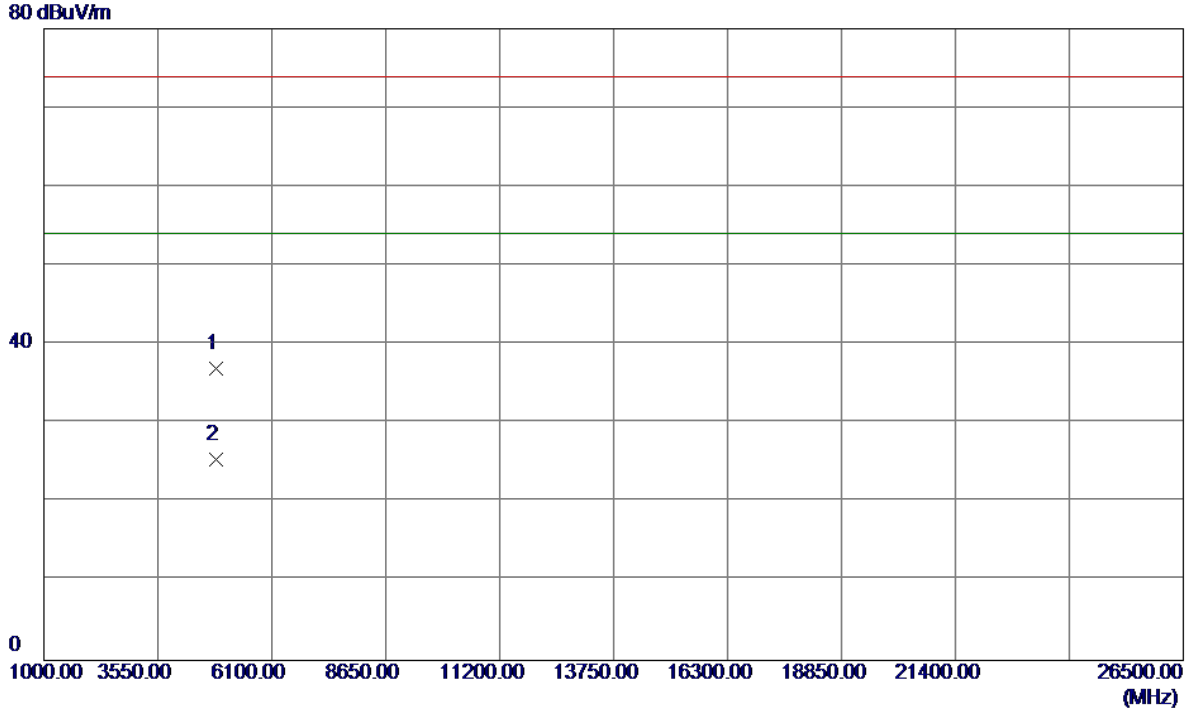


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4844.3860	31.36	5.53	36.89	74.00	-37.11	Peak	
2 *	4844.4080	19.88	5.53	25.41	54.00	-28.59	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Vertical


115 dBuV/m

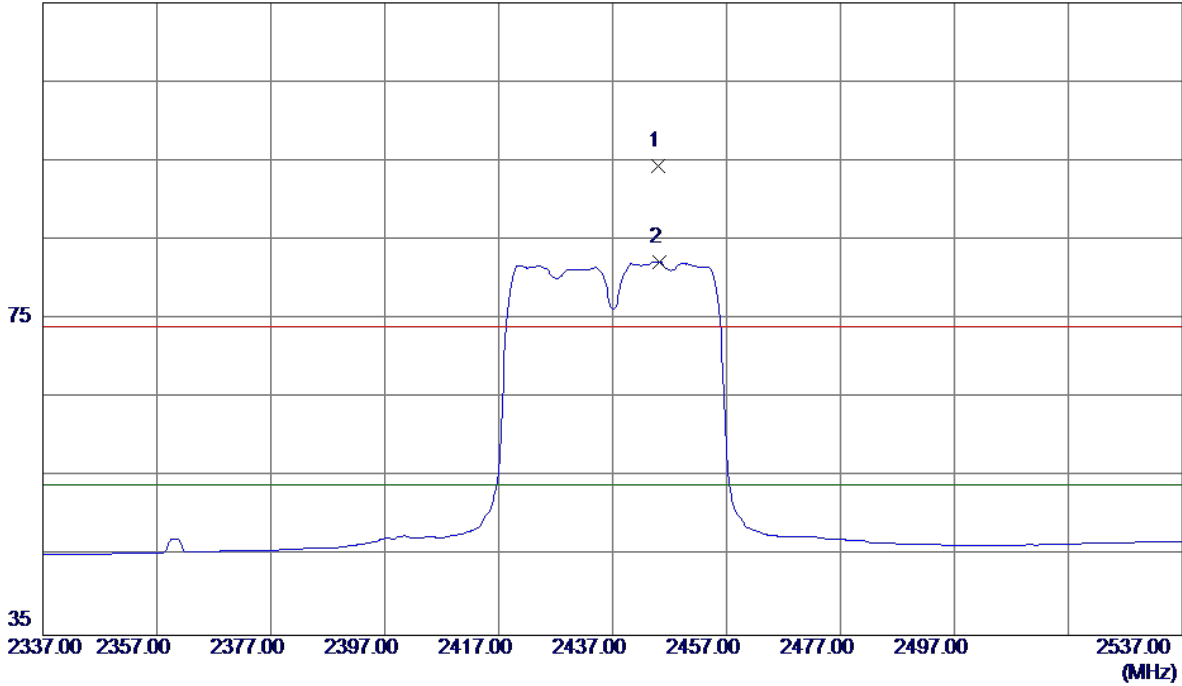

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2445.0000	61.80	32.57	94.37	74.00	20.37	Peak	No Limit
2 *	2445.2000	49.68	32.57	82.25	54.00	28.25	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical

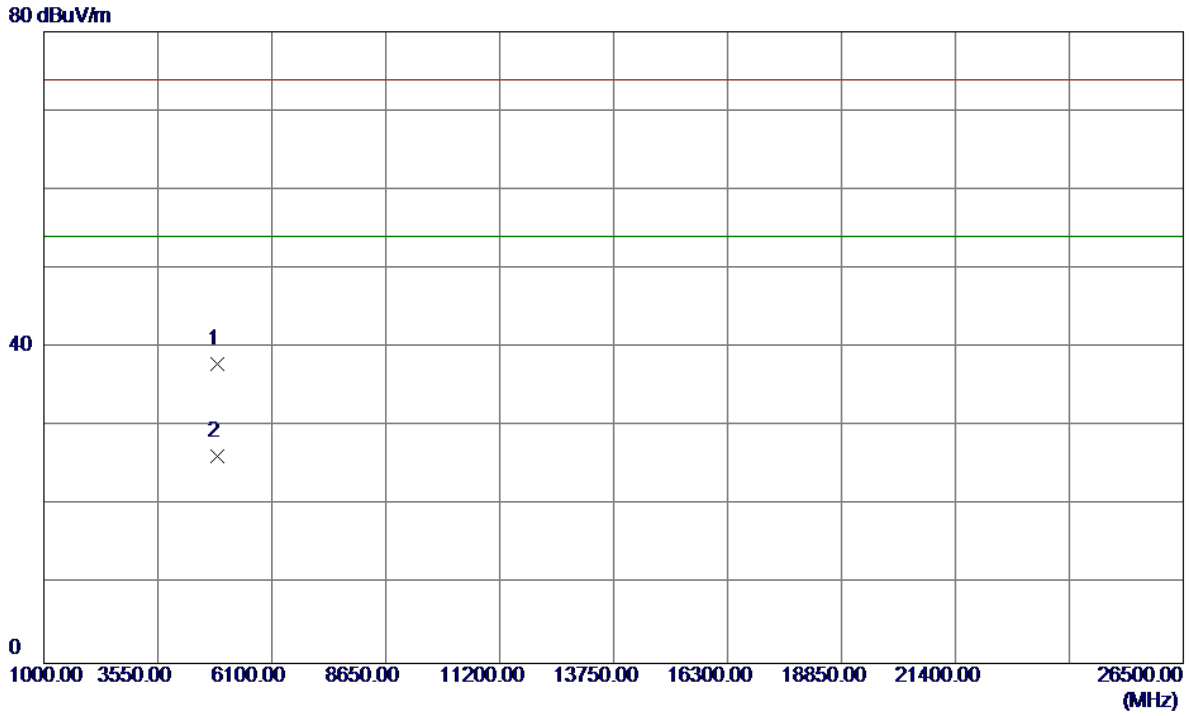

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.5840	32.31	5.61	37.92	74.00	-36.08	Peak	
2 *	4874.6600	20.56	5.61	26.17	54.00	-27.83	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

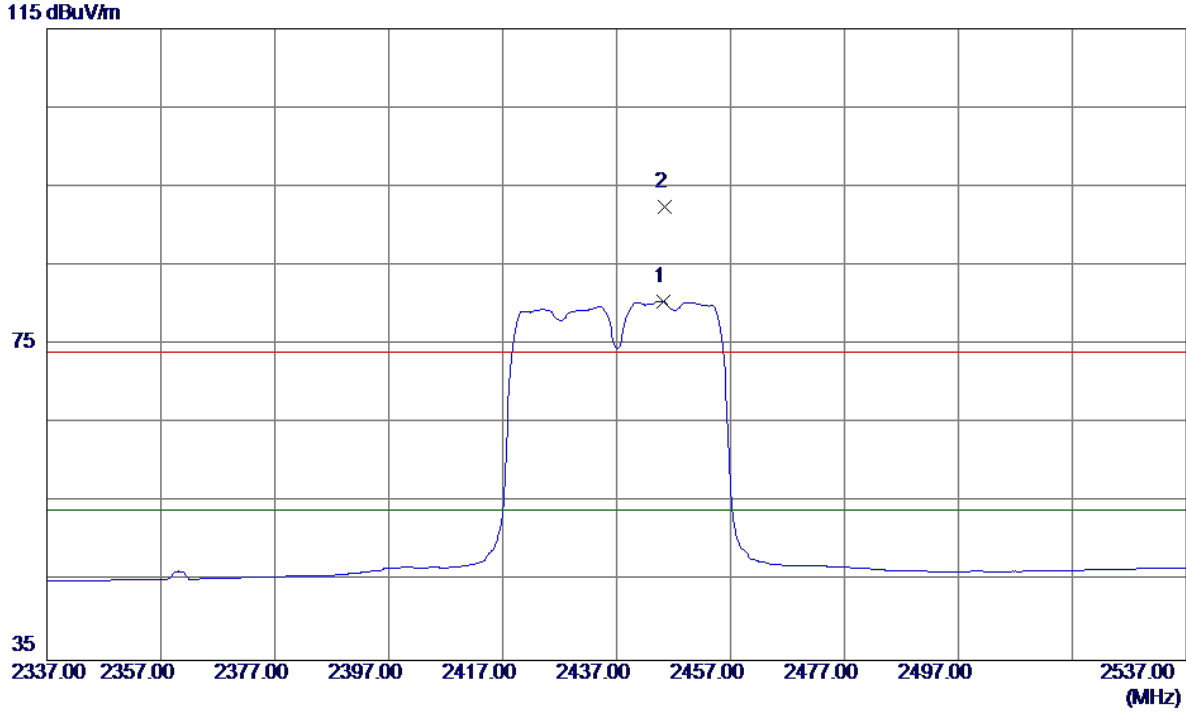

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2445.2000	47.86	32.57	80.43	54.00	26.43	AVG	No Limit
2	2445.4000	59.84	32.57	92.41	74.00	18.41	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz

Horizontal

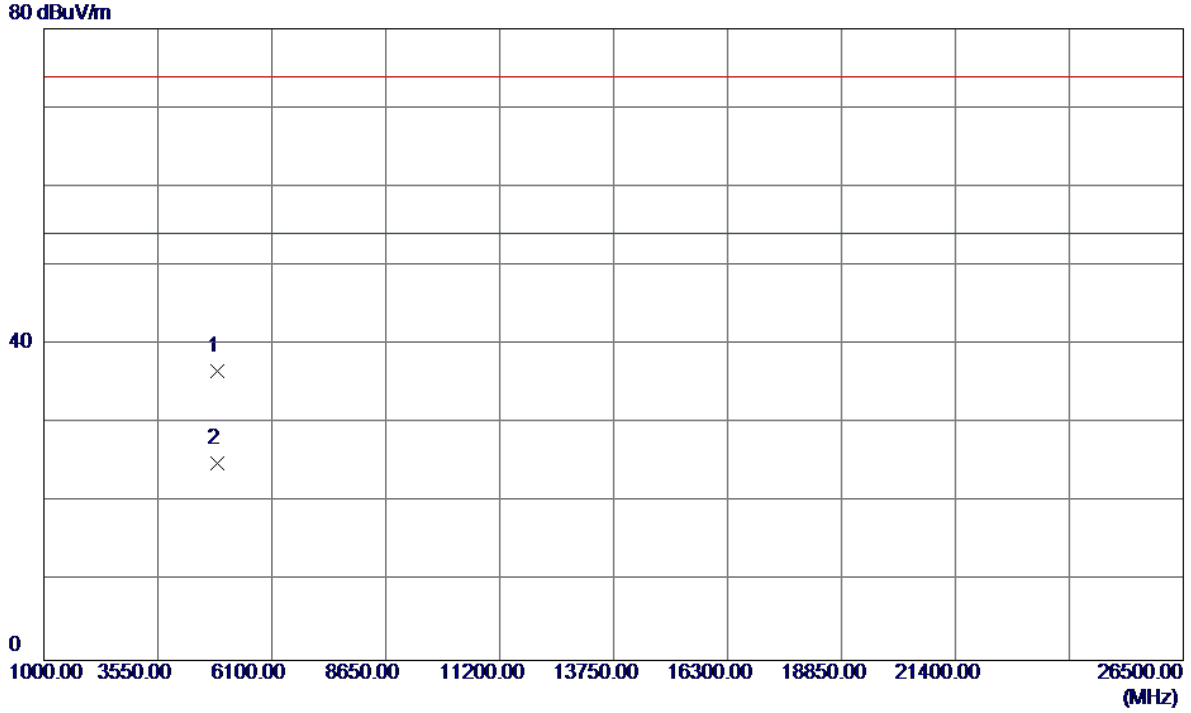


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.4760	31.06	5.61	36.67	74.00	-37.33	Peak	
2 *	4873.7879	19.35	5.61	24.96	54.00	-29.04	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical

115 dBuV/m

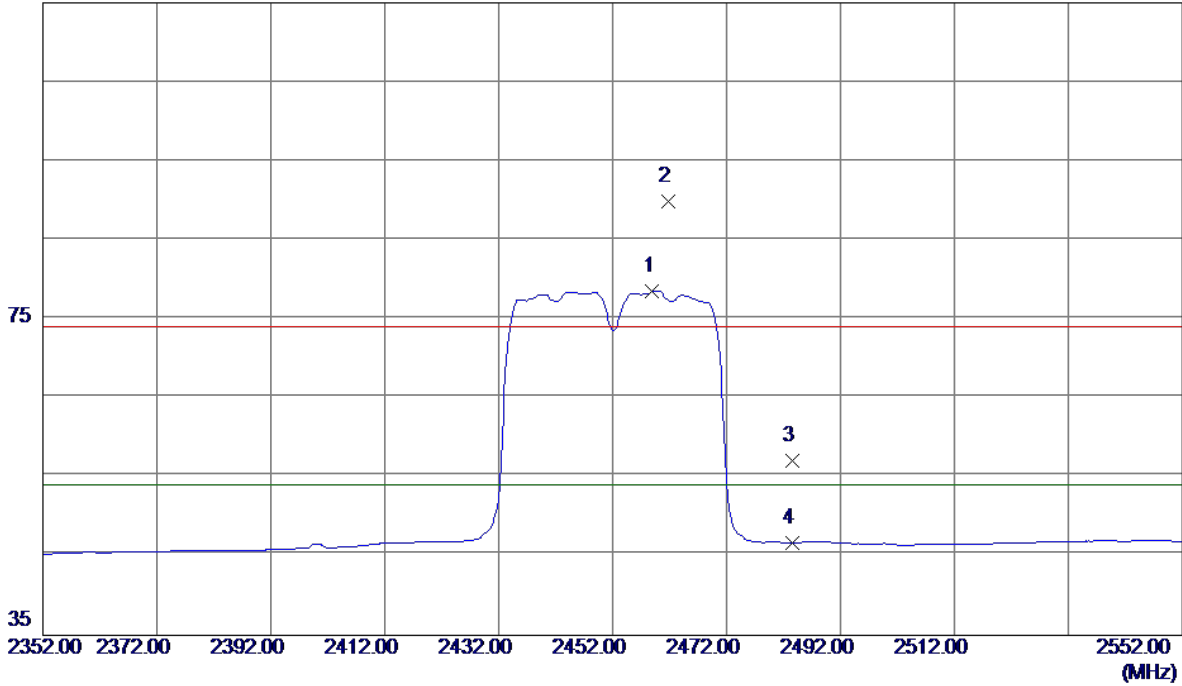

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2459.0000	45.92	32.62	78.54	54.00	24.54	AVG	No Limit
2	2461.8000	57.28	32.63	89.91	74.00	15.91	Peak	No Limit
3	2483.5000	24.33	32.71	57.04	74.00	-16.96	Peak	
4	2483.5000	14.01	32.71	46.72	54.00	-7.28	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Vertical




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4903.9840	32.16	5.69	37.85	74.00	-36.15	Peak	
2 *	4904.5480	20.50	5.69	26.19	54.00	-27.81	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal


115 dBuV/m

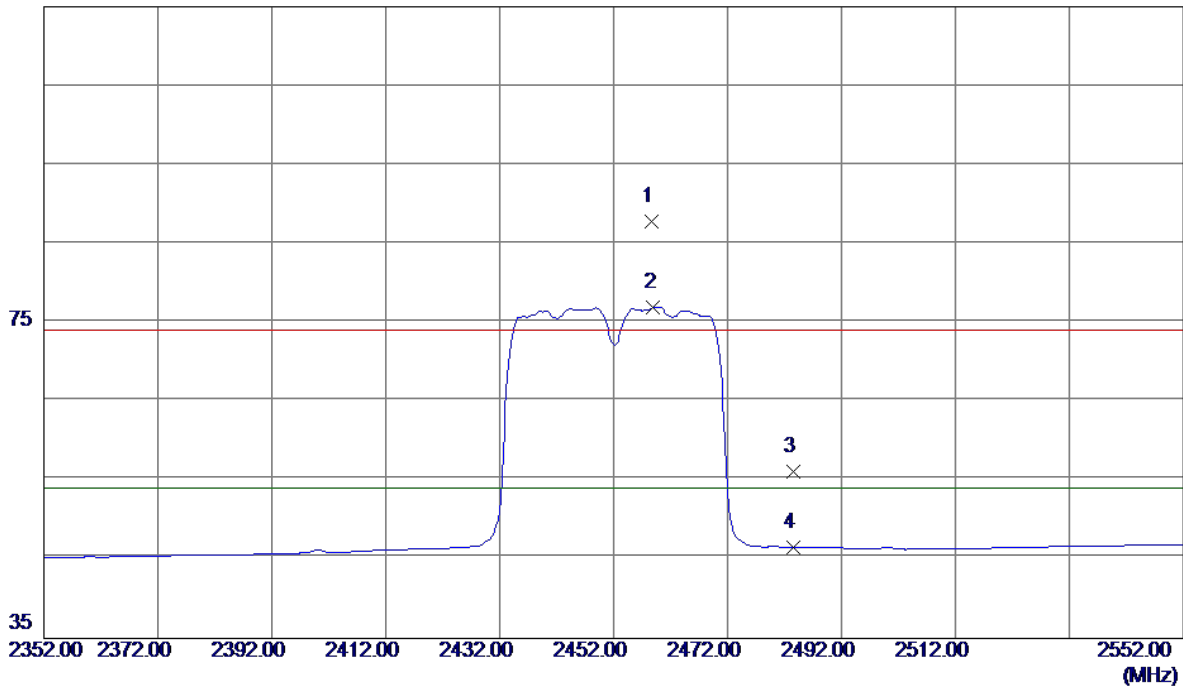

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2458.6000	55.25	32.62	87.87	74.00	13.87	Peak	No Limit
2 *	2459.0000	44.33	32.62	76.95	54.00	22.95	AVG	No Limit
3	2483.5000	23.42	32.71	56.13	74.00	-17.87	Peak	
4	2483.5000	13.82	32.71	46.53	54.00	-7.47	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz

Horizontal

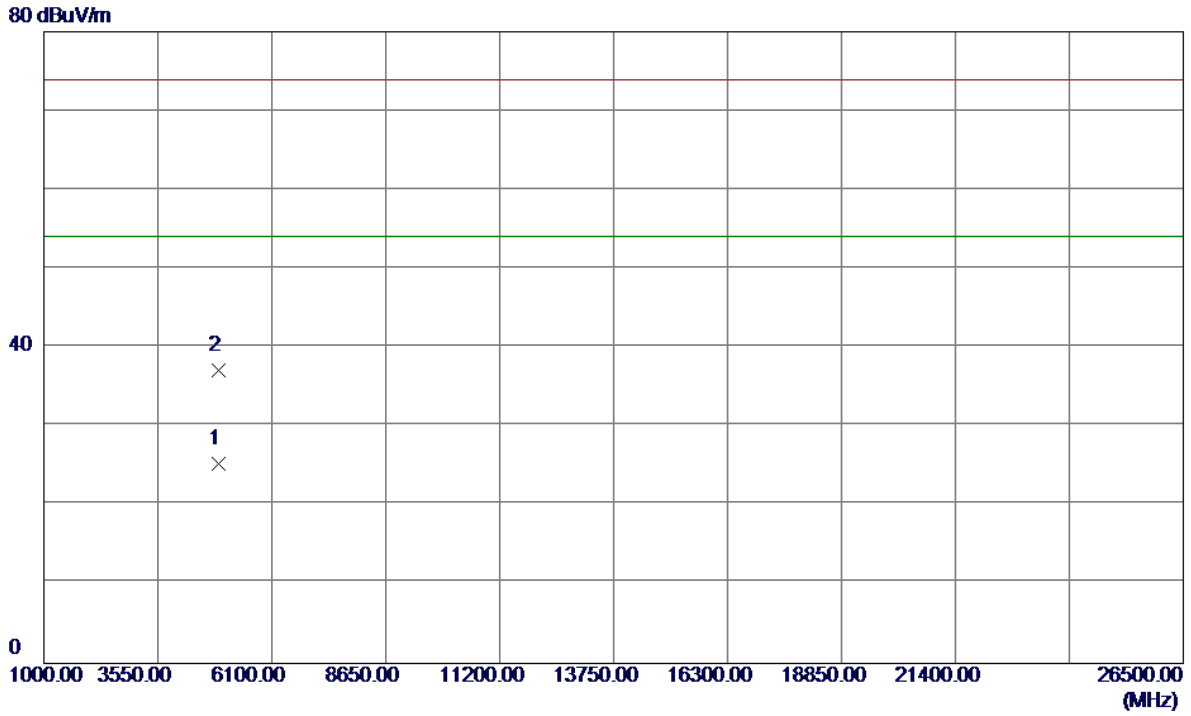

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.8860	19.54	5.69	25.23	54.00	-28.77	AVG	
2	4904.7320	31.48	5.69	37.17	74.00	-36.83	Peak	


ATTACHMENT E - BANDWIDTH

For Ant 1

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	11.1	15.08	500	Complies
2437	12.06	15.08	500	Complies
2462	10.14	15.04	500	Complies

TX CH01

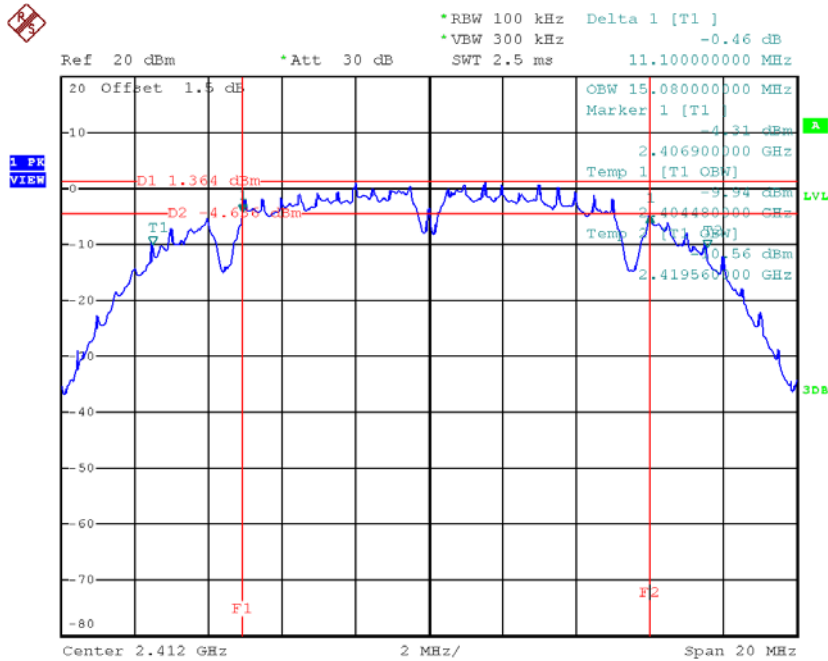


Date: 12.JUN.2017 19:09:16

TX CH06

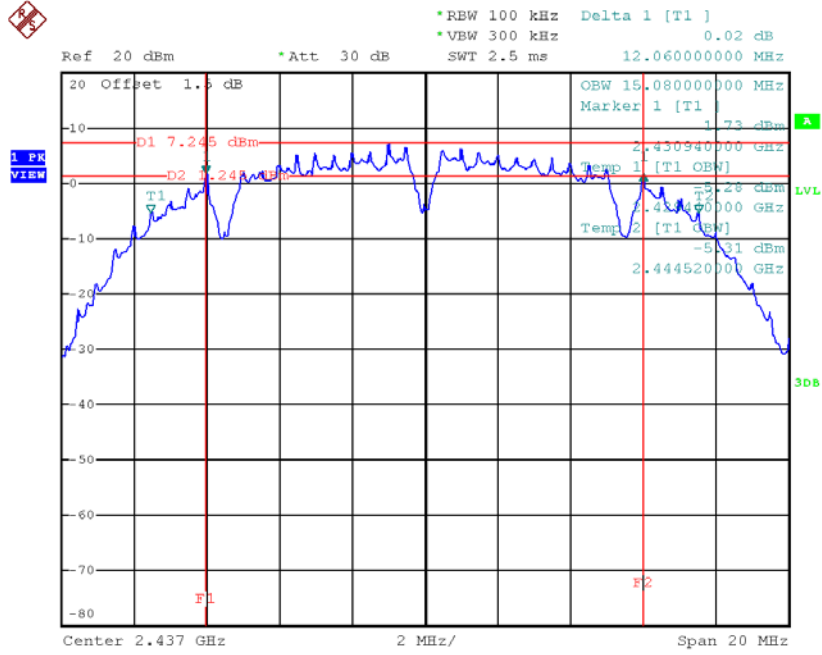

Date: 12.JUN.2017 19:11:17

TX CH11

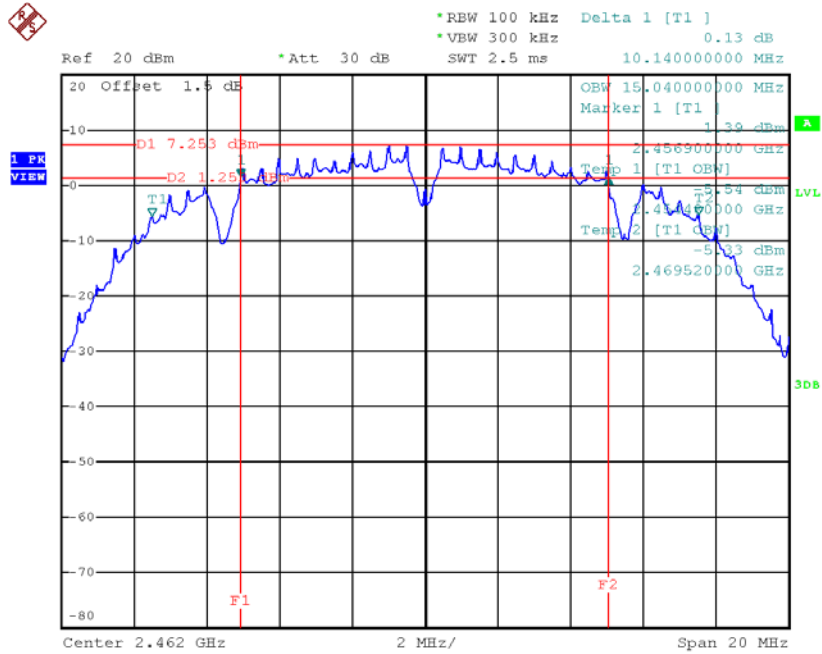


Date: 12.JUN.2017 19:12:44

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.34	16.44	500	Complies
2437	16.34	16.4	500	Complies
2462	16.1	16.4	500	Complies

TX CH01

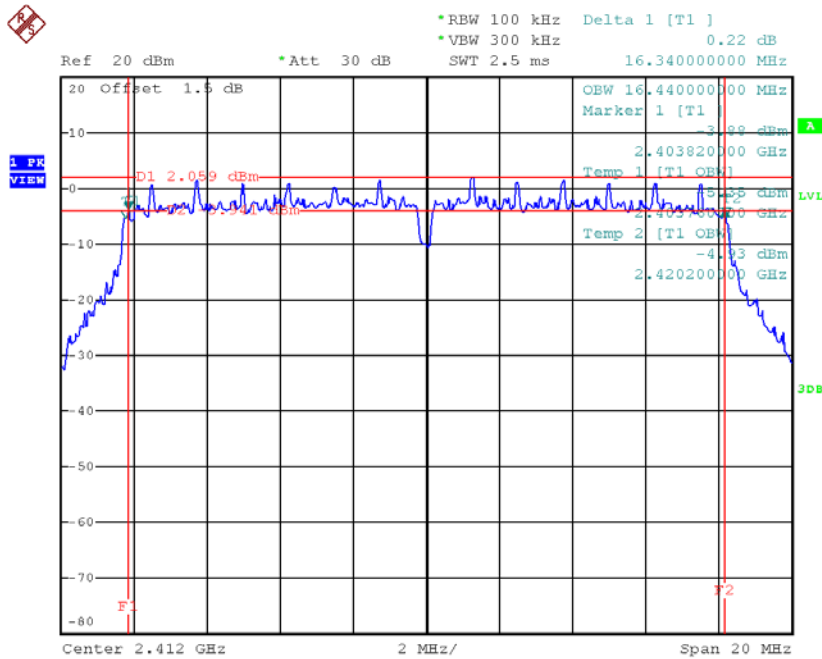


Date: 12.JUN.2017 19:13:54

TX CH06

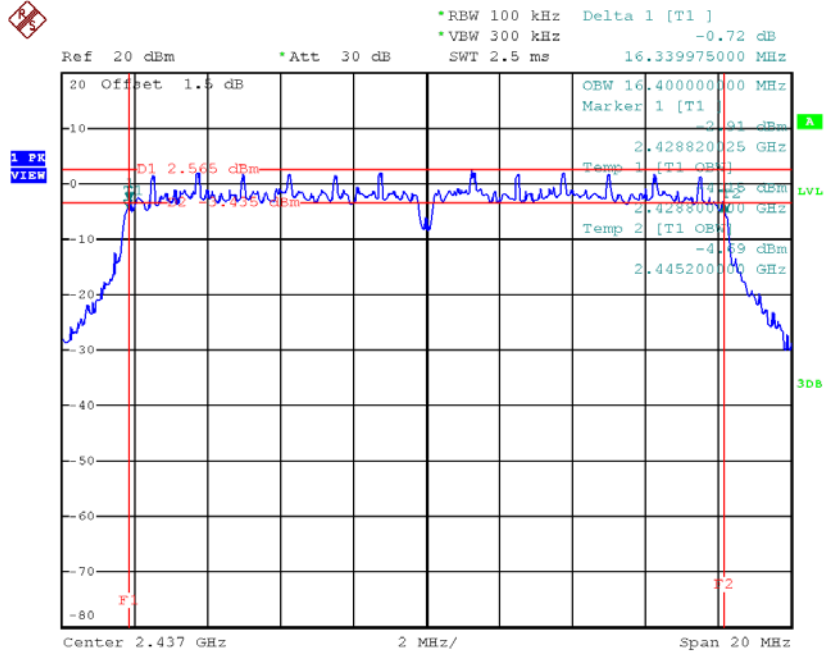

Date: 12.JUN.2017 19:14:55

TX CH11

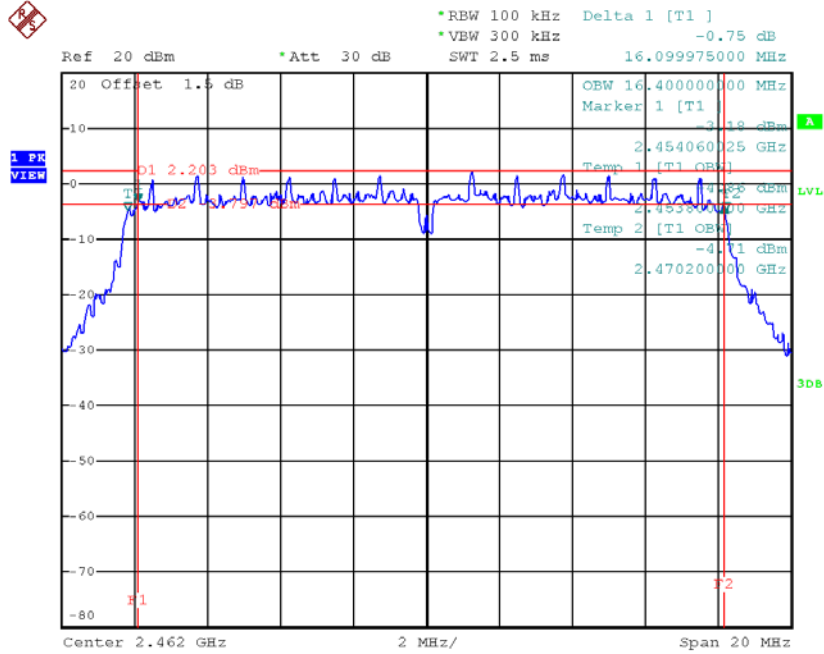


Date: 12.JUN.2017 19:16:28

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.59	17.52	500	Complies
2437	16.64	17.56	500	Complies
2462	16.87	17.52	500	Complies

TX CH01

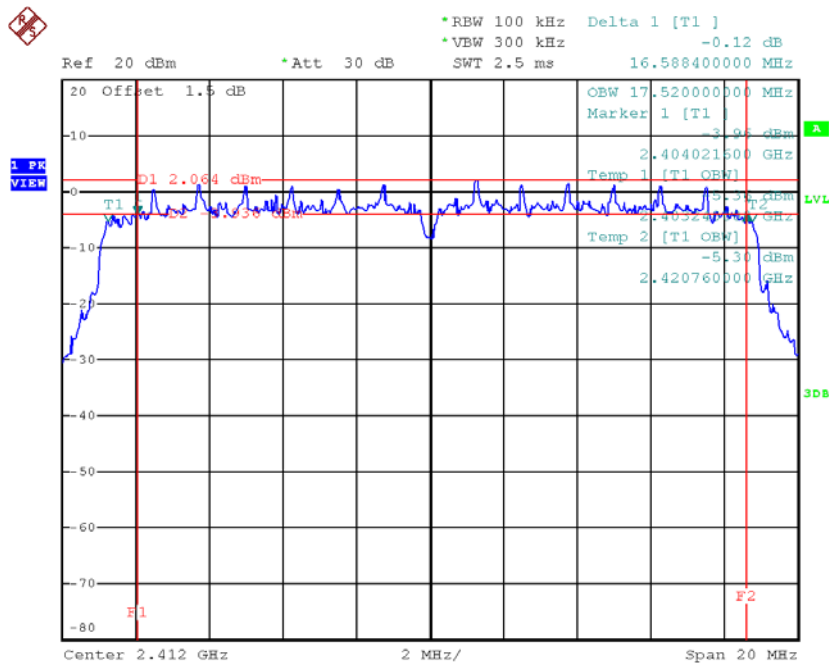


Date: 12.JUN.2017 19:17:44

TX CH06

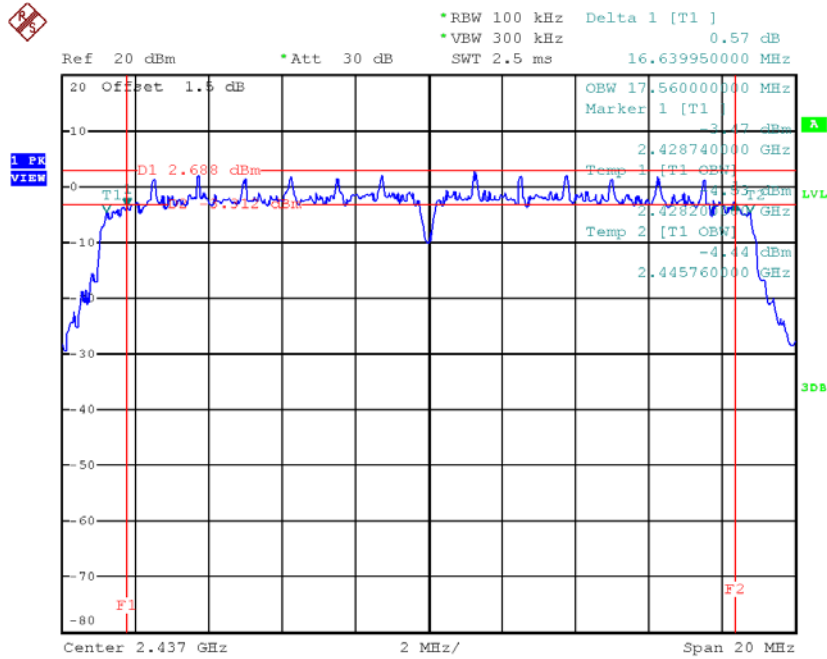

Date: 12.JUN.2017 19:19:21

TX CH11

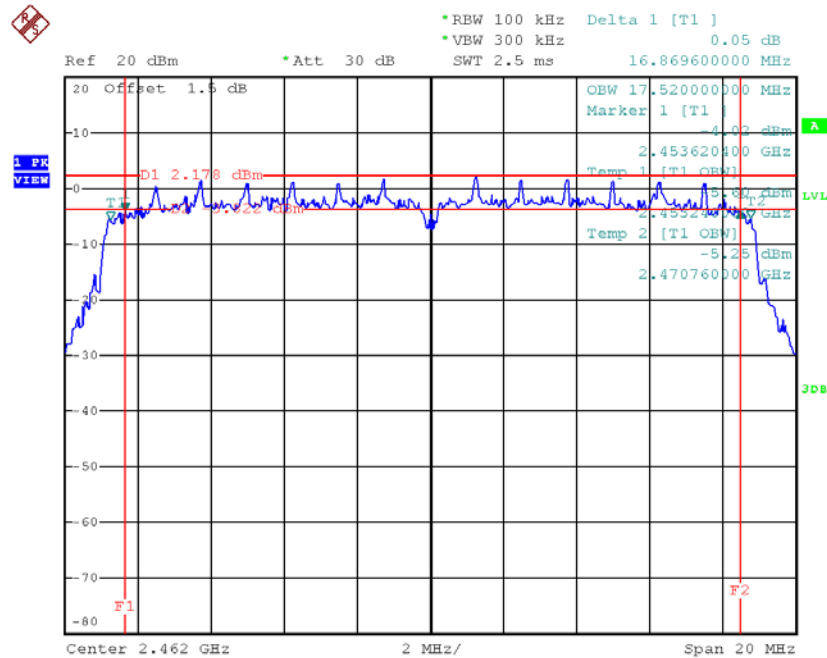


Date: 12.JUN.2017 19:20:29

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.48	36.24	500	Complies
2437	36.56	36.24	500	Complies
2452	36.56	36.24	500	Complies

TX CH03

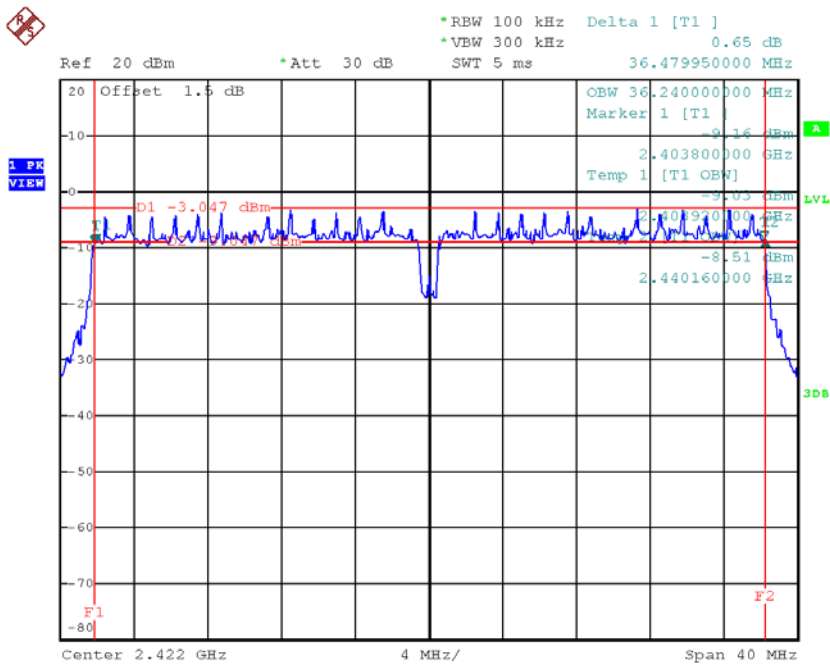


Date: 12.JUN.2017 19:21:54

TX CH06

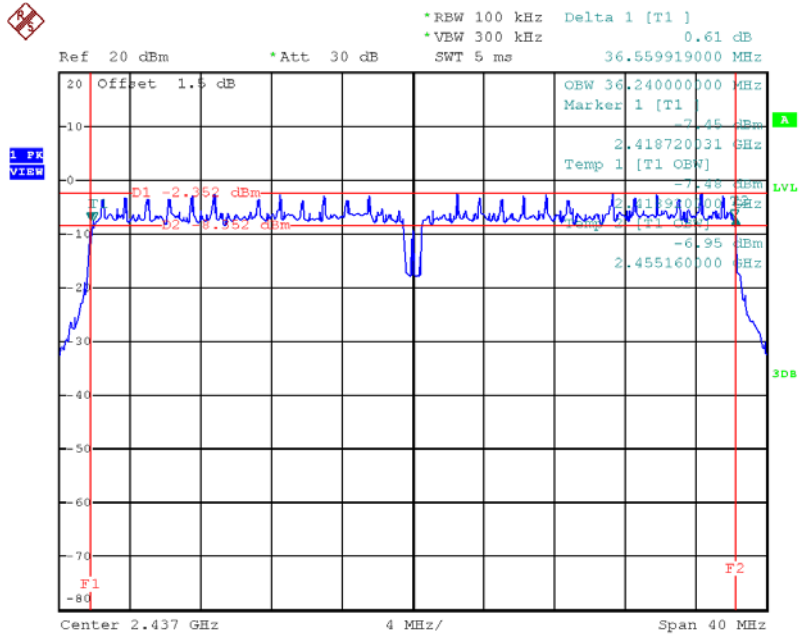

Date: 12.JUN.2017 19:23:33

TX CH09

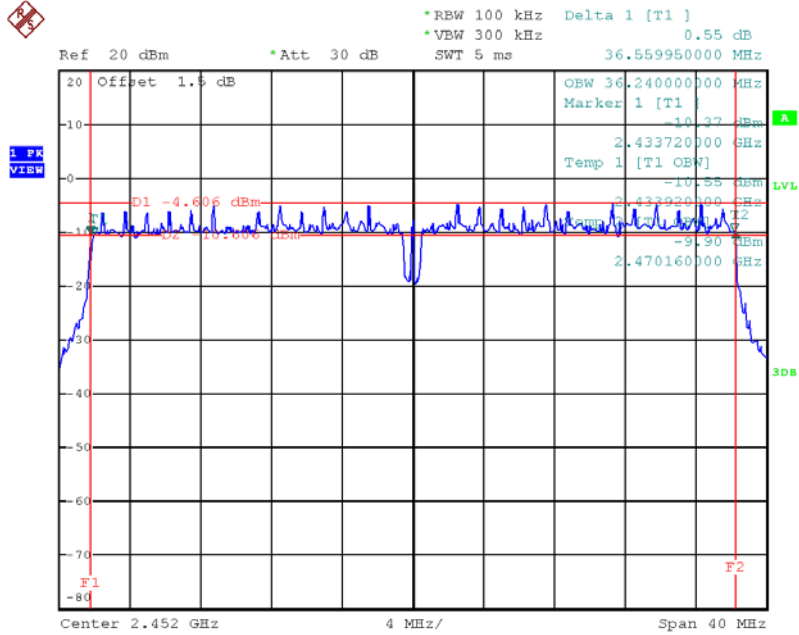


Date: 12.JUN.2017 19:24:46

For Ant 2

Test Mode : TX B Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.1	15.12	500	Complies
2437	12.06	15.08	500	Complies
2462	11.06	15.04	500	Complies

TX CH01

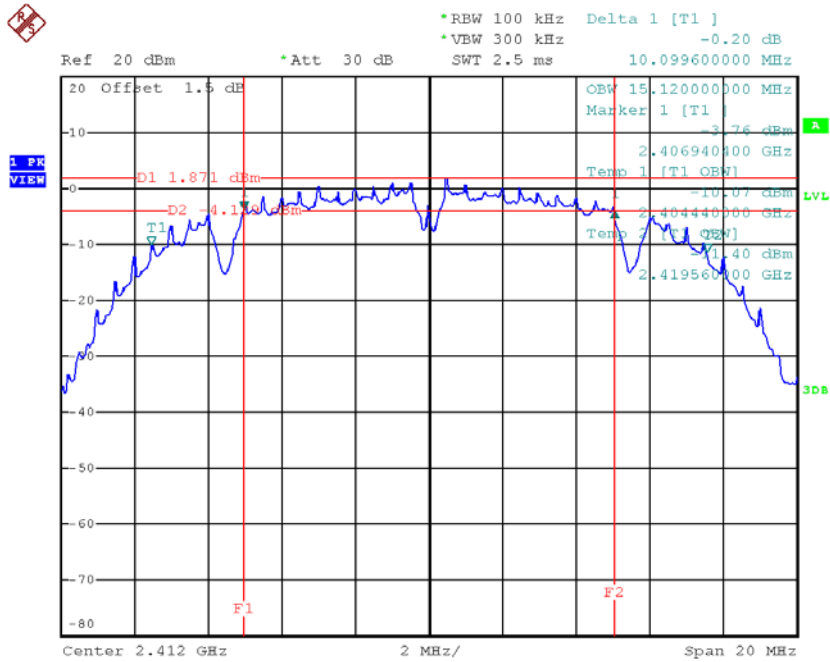


Date: 12.JUN.2017 19:27:07

TX CH06

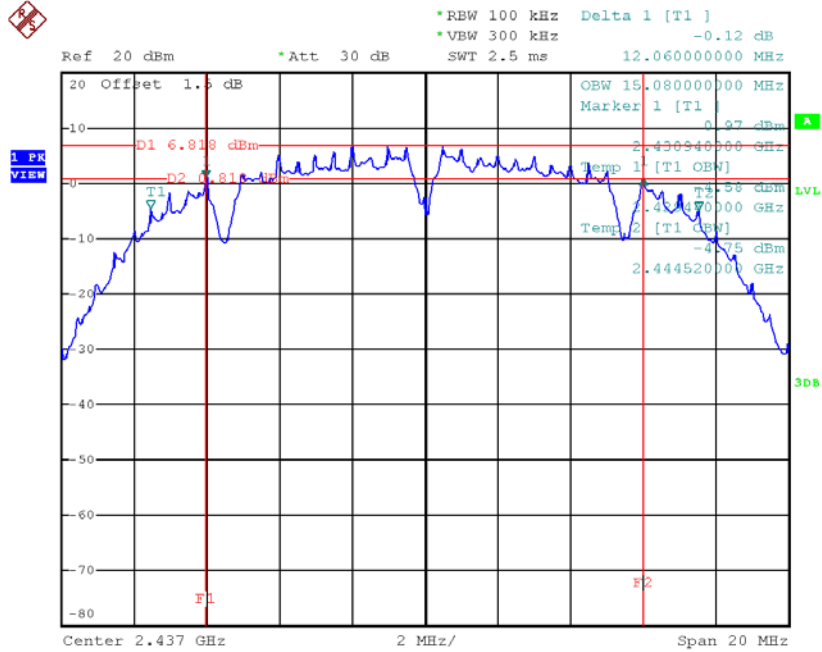

Date: 12.JUN.2017 19:28:30

TX CH11

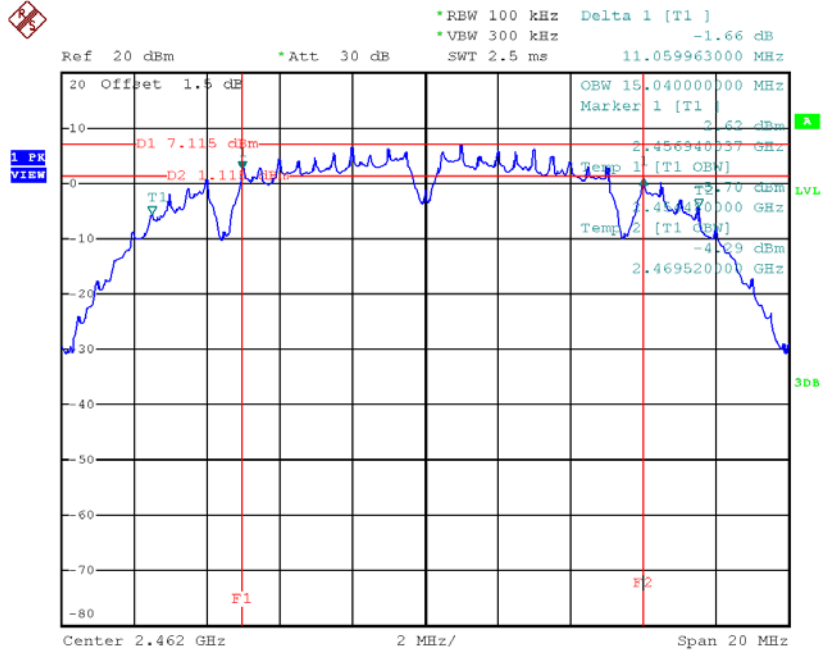


Date: 12.JUN.2017 19:30:37

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.32	16.4	500	Complies
2437	16.3	16.44	500	Complies
2462	16.34	16.4	500	Complies

TX CH01

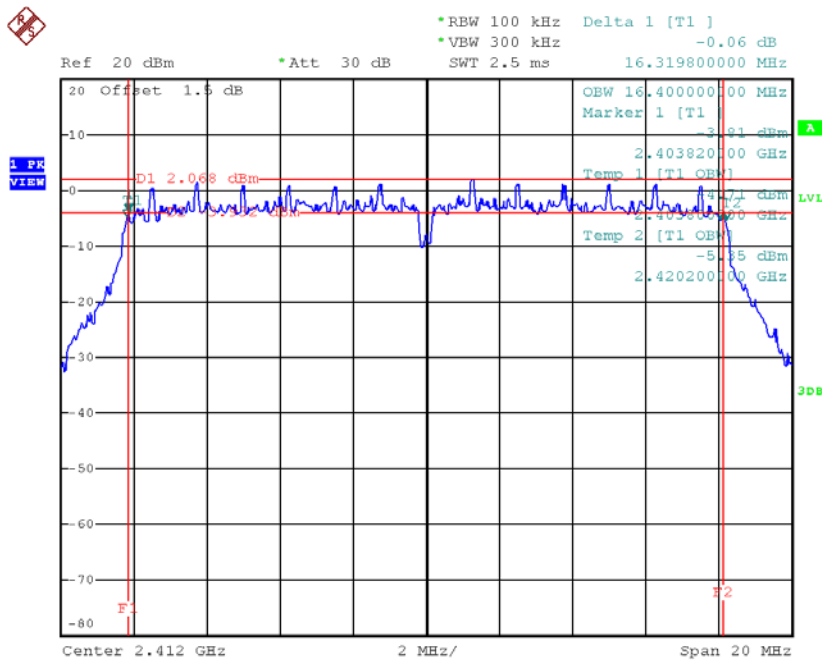


Date: 12.JUN.2017 19:31:54

TX CH06

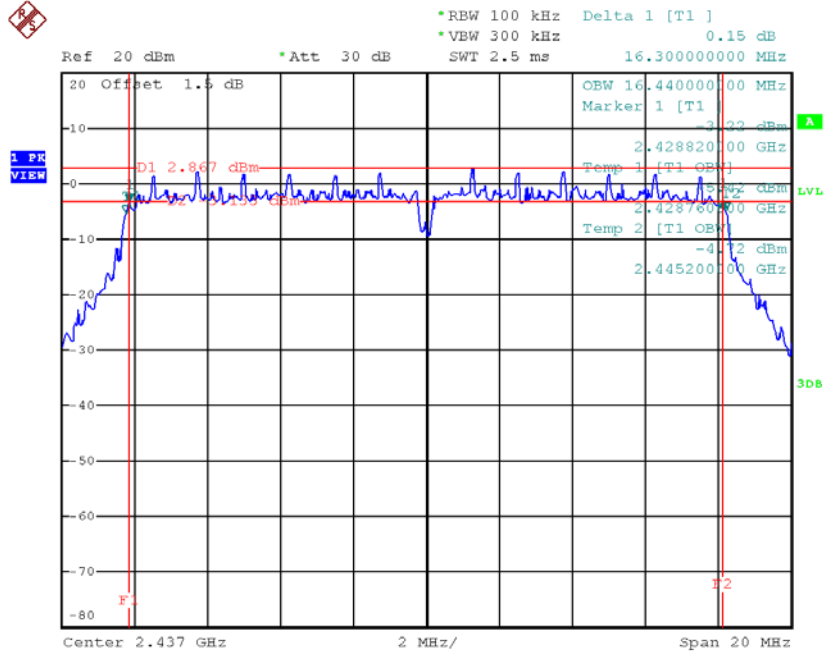

Date: 12.JUN.2017 19:33:36

TX CH11

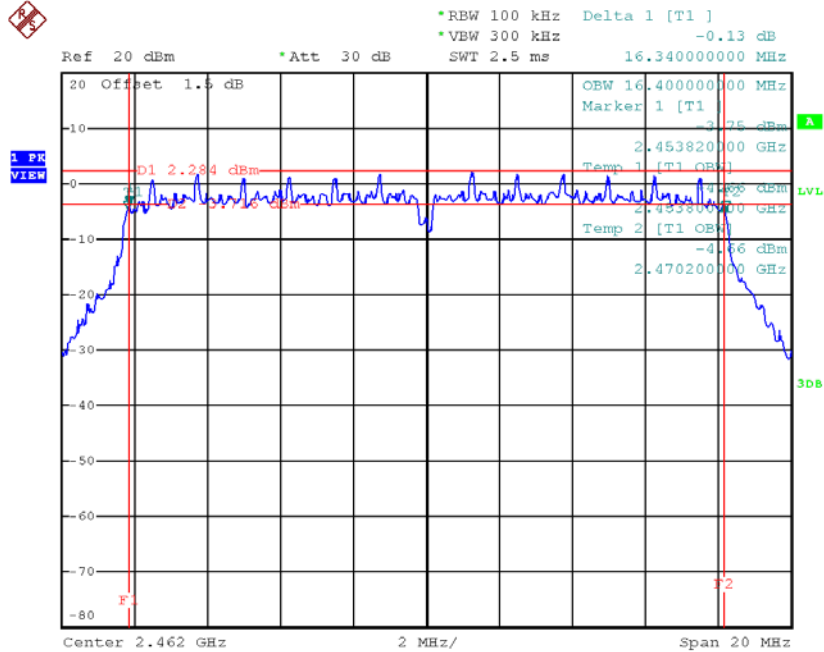


Date: 12.JUN.2017 19:34:38

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.78	17.52	500	Complies
2437	16.8	17.52	500	Complies
2462	17.18	17.56	500	Complies

TX CH01

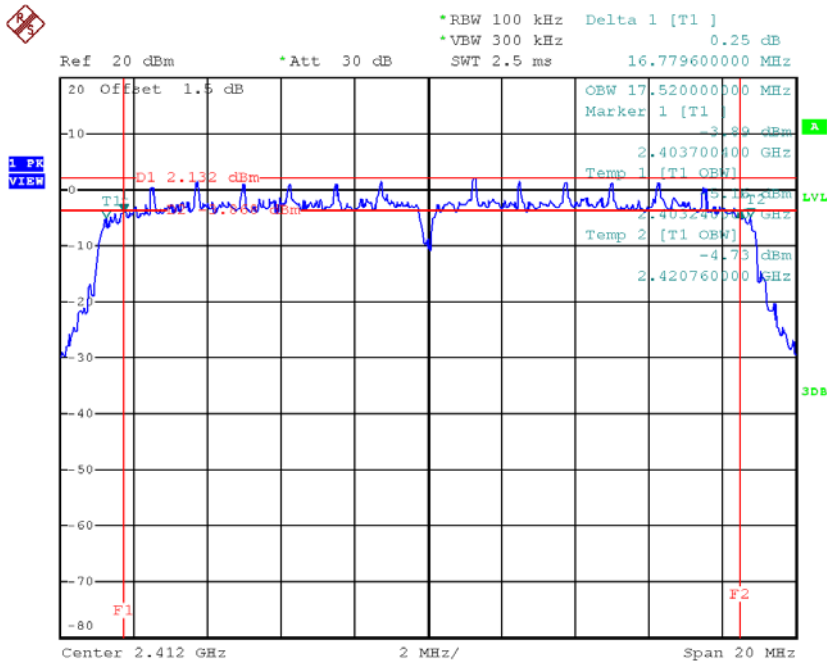


Date: 12.JUN.2017 19:35:42

TX CH06

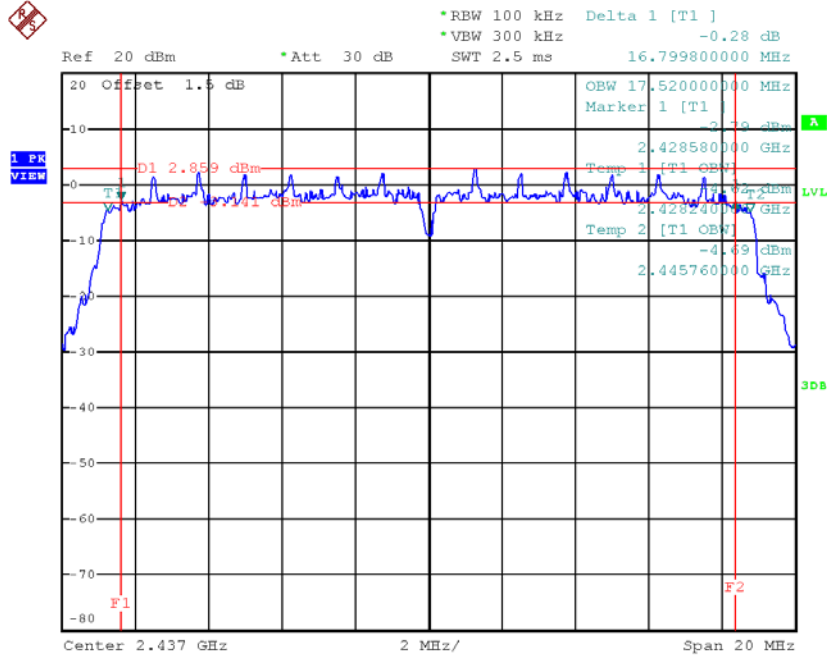

Date: 12.JUN.2017 19:36:50

TX CH11

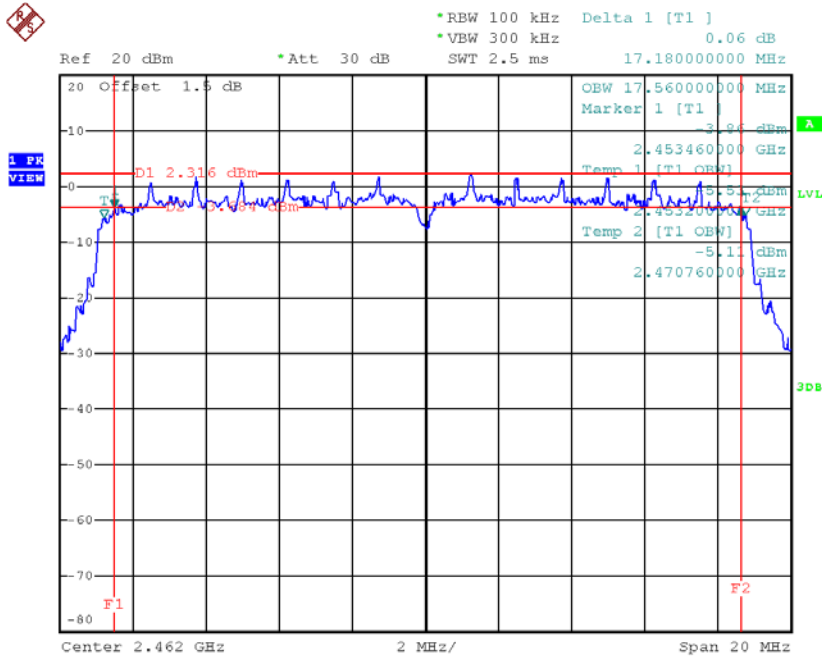


Date: 12.JUN.2017 19:37:49

Test Mode : TX N-40MHz Mode_CH03/06/09


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	36.52	36.24	500	Complies
2437	36.52	36.24	500	Complies
2452	36.56	36.08	500	Complies

TX CH03

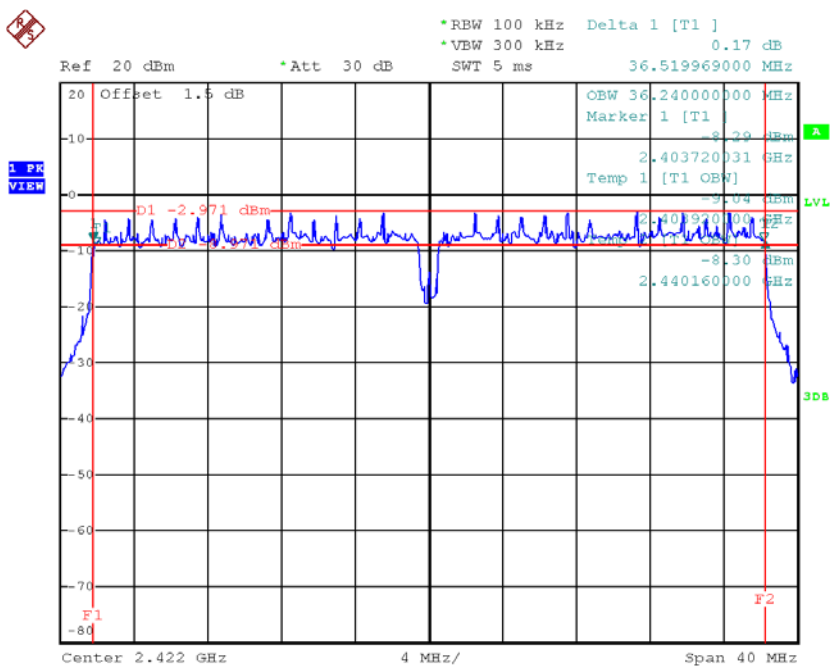


Date: 12.JUN.2017 19:38:51

TX CH06

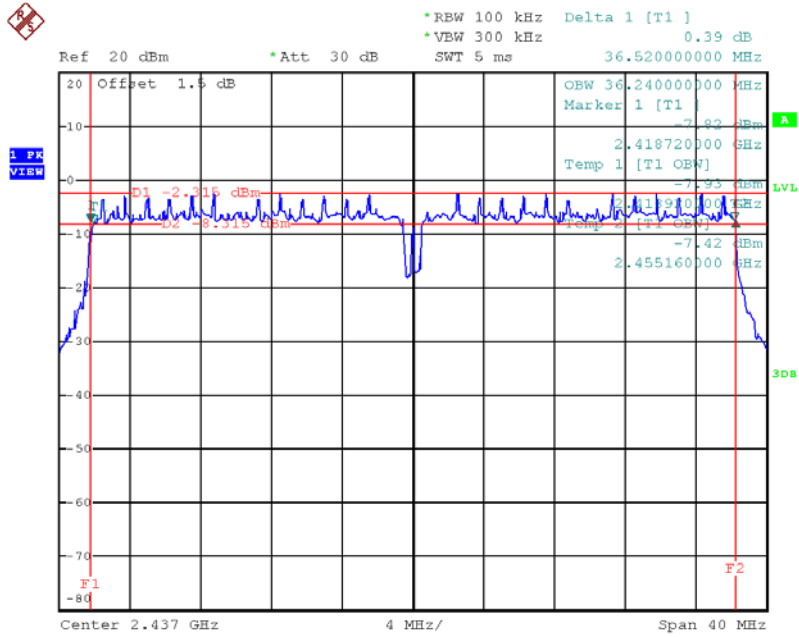

Date: 12.JUN.2017 19:40:01

TX CH09

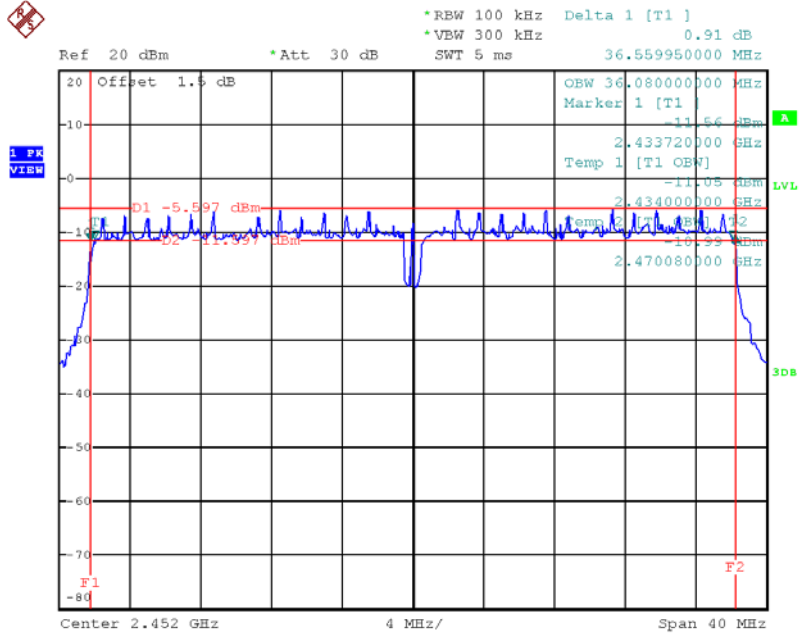

Date: 12.JUN.2017 19:40:59

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

For Ant 1

Test Mode :TX B Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.83	0.06	30.00	1.00	Complies
2437	18.91	0.08	30.00	1.00	Complies
2462	19.14	0.08	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.87	0.24	30.00	1.00	Complies
2437	23.61	0.23	30.00	1.00	Complies
2462	23.51	0.22	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.65	0.23	30.00	1.00	Complies
2437	23.74	0.24	30.00	1.00	Complies
2462	23.54	0.23	30.00	1.00	Complies

Test Mode :TX N40 Mode_CH03/06/09					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	21.94	0.16	30.00	1.00	Complies
2437	21.76	0.15	30.00	1.00	Complies
2452	22.31	0.17	30.00	1.00	Complies

For Ant 2

Test Mode :TX B Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	17.95	0.06	30.00	1.00	Complies
2437	19.01	0.08	30.00	1.00	Complies
2462	19.28	0.08	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.03	0.25	30.00	1.00	Complies
2437	23.63	0.23	30.00	1.00	Complies
2462	23.60	0.23	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.95	0.25	30.00	1.00	Complies
2437	23.69	0.23	30.00	1.00	Complies
2462	23.56	0.23	30.00	1.00	Complies


Test Mode :TX N40 Mode_CH03/06/09					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	21.79	0.15	30.00	1.00	Complies
2437	22.55	0.18	30.00	1.00	Complies
2452	22.48	0.18	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION

For Ant 1


Test Mode : TX B Mode

TX B mode CH01

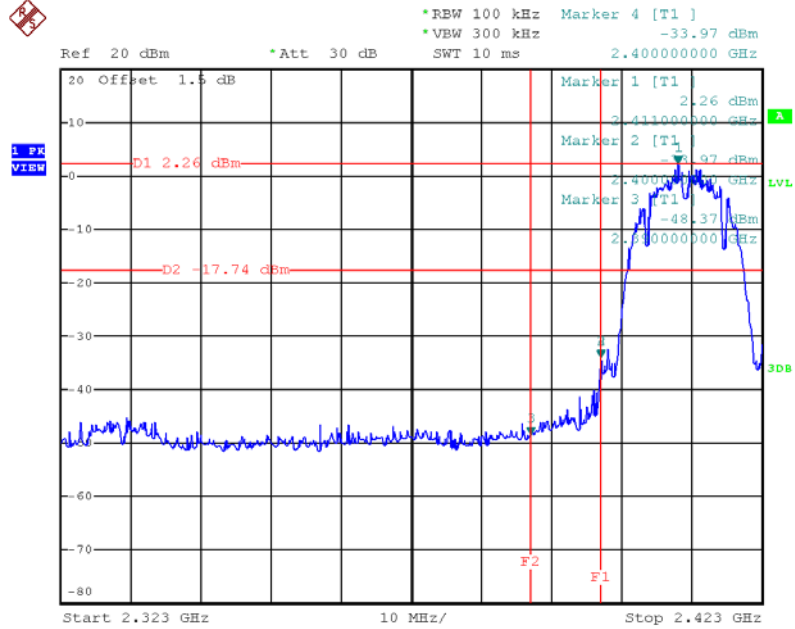


Date: 12.JUN.2017 19:09:50

TX B mode CH11

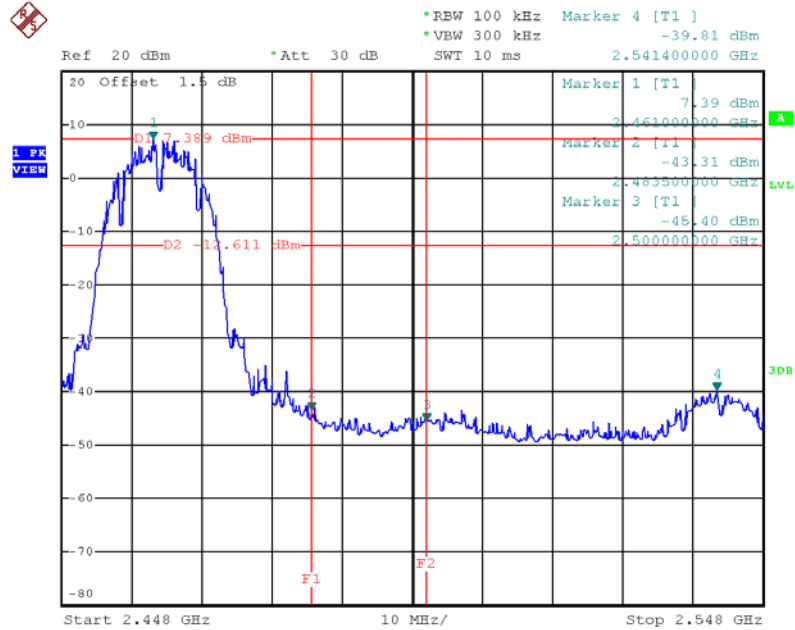


Date: 12.JUN.2017 19:13:18


TX B mode CH01 (10 Harmonic of the frequency)

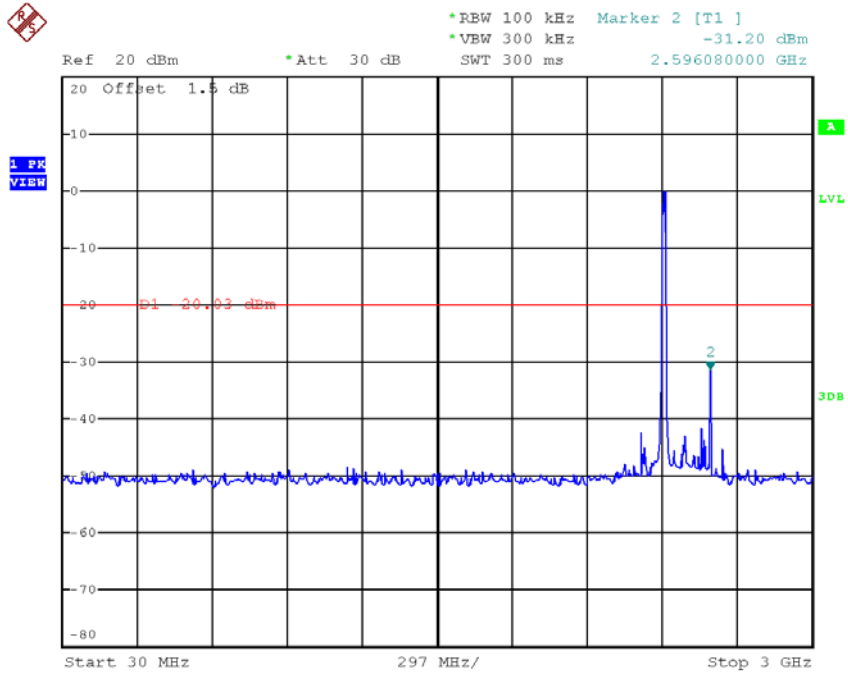

Date: 12.JUN.2017 19:09:29

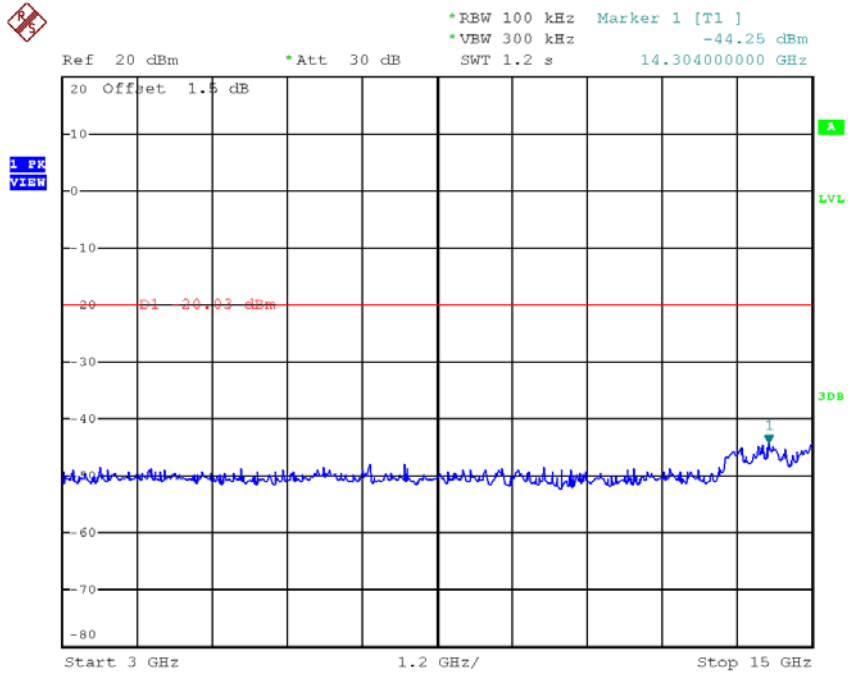


Date: 12.JUN.2017 19:09:36

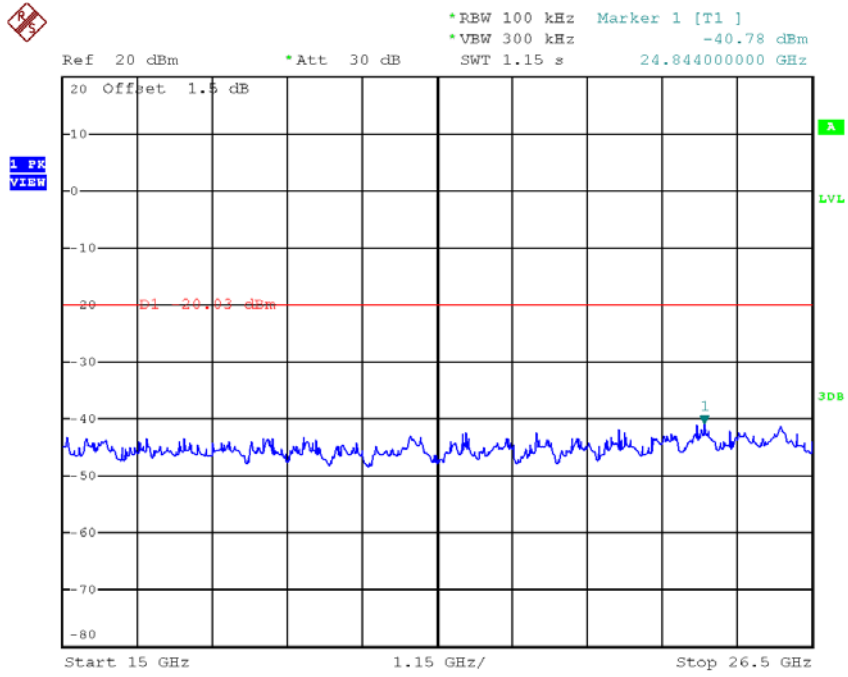


Date: 12.JUN.2017 19:09:43


TX B mode CH06 (10 Harmonic of the frequency)

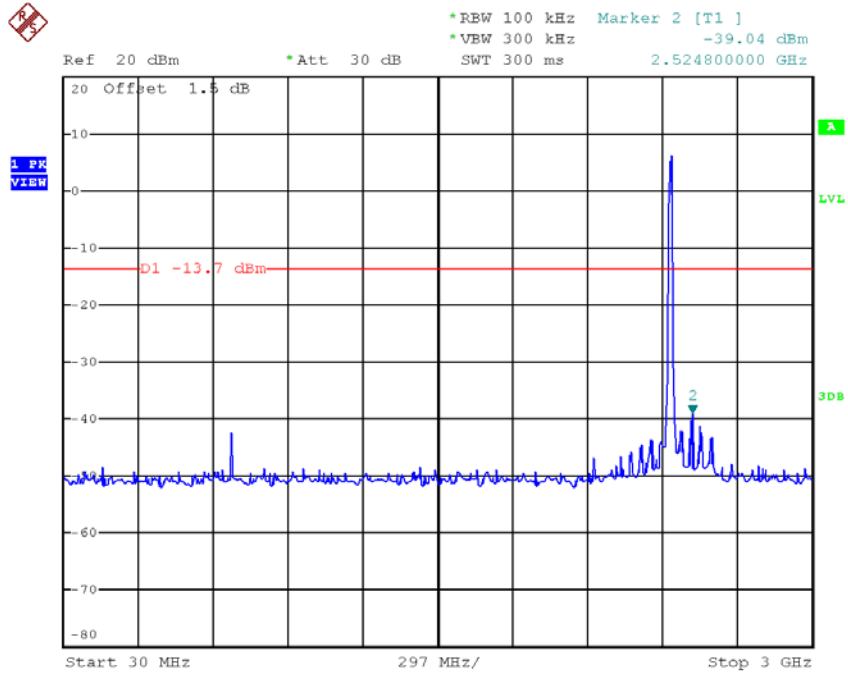

Date: 12.JUN.2017 19:11:31

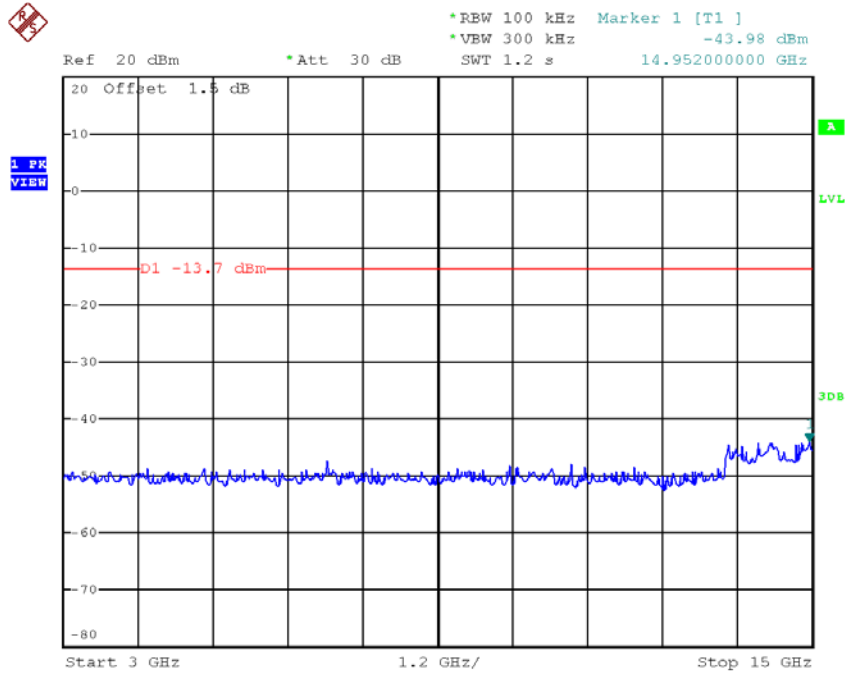


Date: 12.JUN.2017 19:11:38

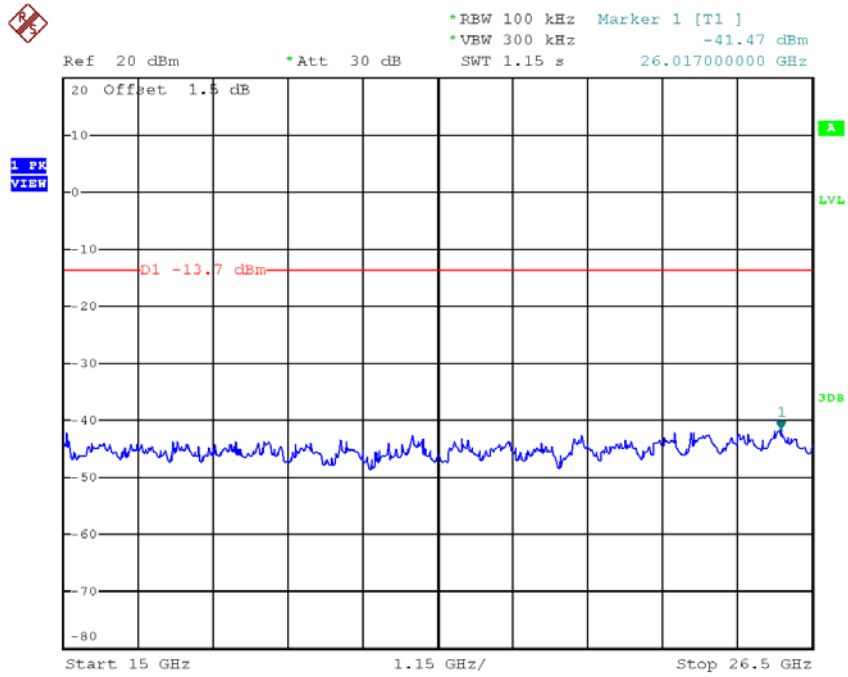


Date: 12.JUN.2017 19:11:45


TX B mode CH11 (10 Harmonic of the frequency)

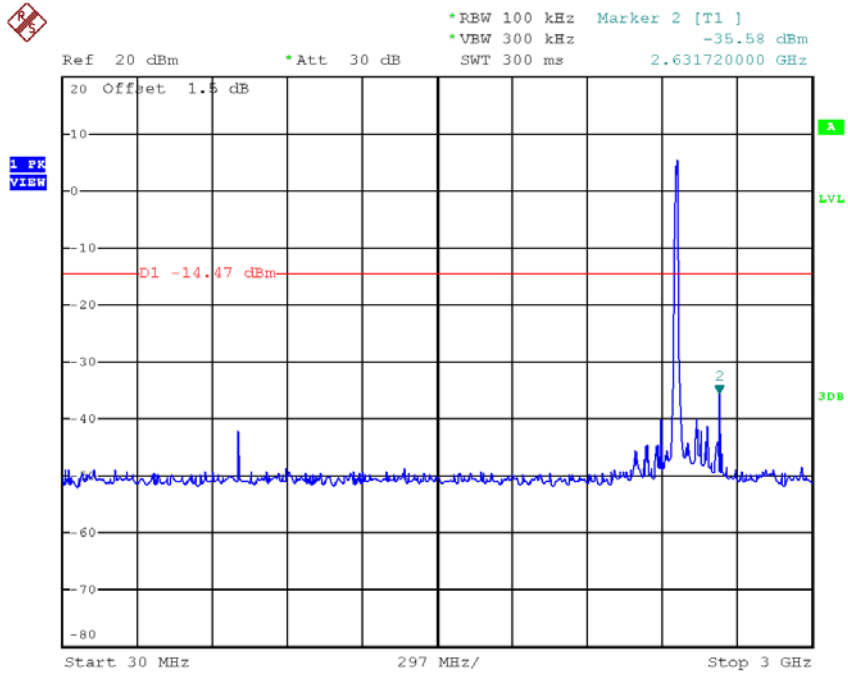

Date: 12.JUN.2017 19:12:57

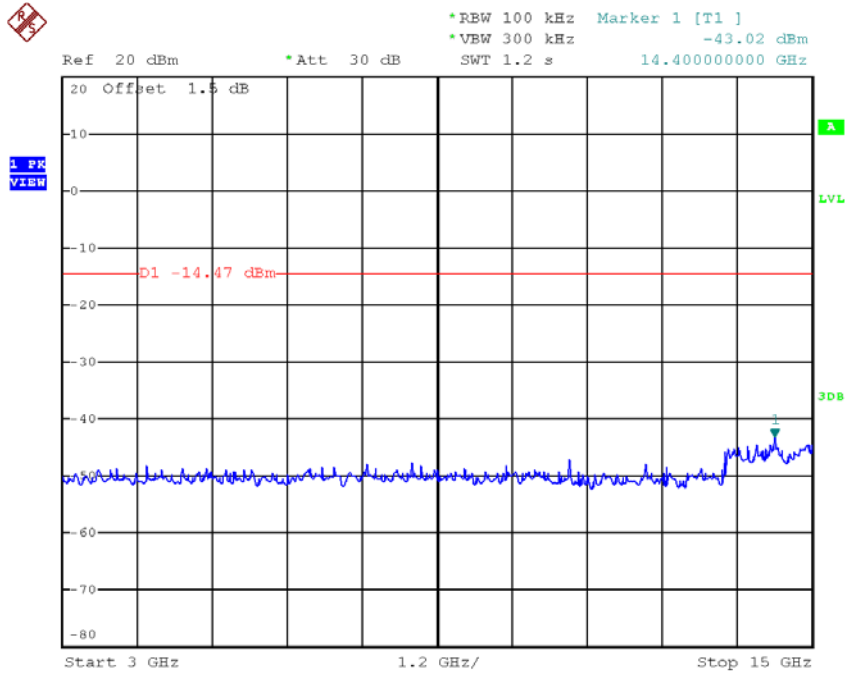


Date: 12.JUN.2017 19:13:04

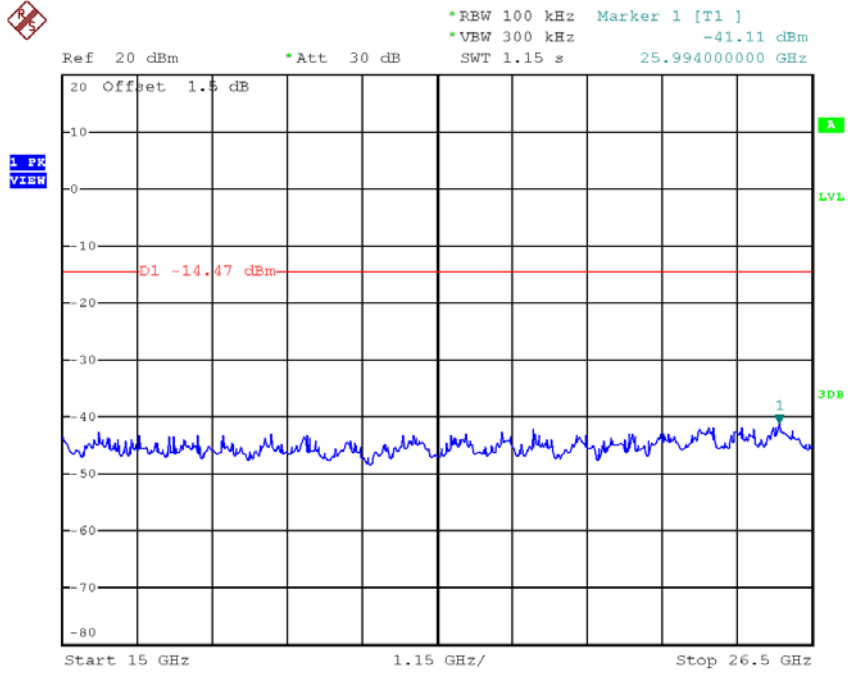

Date: 12.JUN.2017 19:13:11


Test Mode : TX G Mode

TX G mode CH01

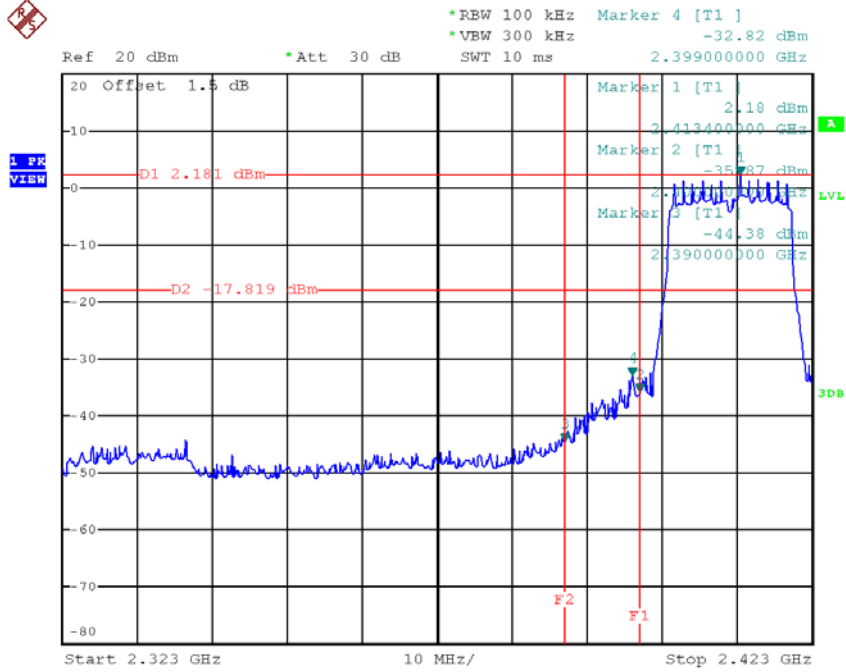

Date: 12.JUN.2017 19:14:28

TX G mode CH11

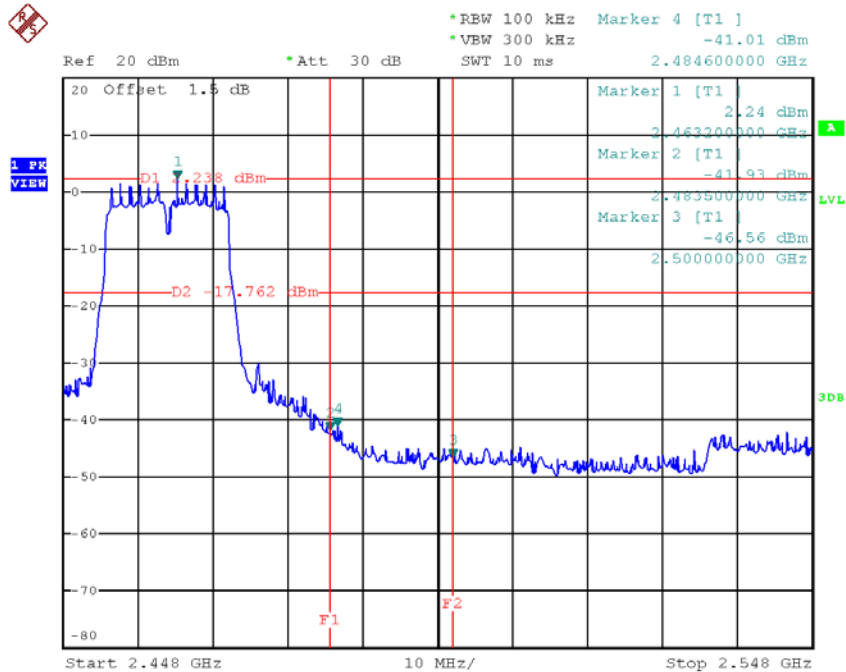

Date: 12.JUN.2017 19:17:02