



# FCC Test Report

**FCC ID** : ACQ-VIP6102W  
**Equipment** : IPTV WiFi Set Top Box  
**Brand Name** : ARRIS,Bell,Telus  
**Model Name** : VIP6102W  
**Applicant** : ARRIS  
101 Tournament Drive, Horsham PA 19044, USA  
**Manufacturer** : ARRIS  
101 Tournament Drive, Horsham PA 19044, USA  
**Standard** : 47 CFR FCC Part 15.247

The product was received on May 05, 2018, and testing was started from May 21, 2018 and completed on Jun. 07, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Allen Lin

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



# Table of Contents

**HISTORY OF THIS TEST REPORT .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Information.....5

1.2 Testing Applied Standards .....8

1.3 Testing Location Information .....8

1.4 Measurement Uncertainty .....8

**2 TEST CONFIGURATION OF EUT.....9**

2.1 Test Condition .....9

2.2 Test Channel Mode .....9

2.3 The Worst Case Measurement Configuration .....10

2.4 Accessories and Support Equipment .....11

2.5 Test Setup Diagram .....12

**3 TRANSMITTER TEST RESULT .....13**

3.1 AC Power-line Conducted Emissions .....13

3.2 DTS Bandwidth .....14

3.3 Maximum Conducted Output Power .....15

3.4 Power Spectral Density .....17

3.5 Emissions in Non-restricted Frequency Bands .....18

3.6 Emissions in Restricted Frequency Bands.....19

**4 TEST EQUIPMENT AND CALIBRATION DATA .....23**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX G. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**



### History of this test report

Report No.	Version	Description	Issued Date
FR852415AL	01	Initial issue of report	Jun. 20, 2018



### Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]:30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]:8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands: >30 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

Reviewed by: Sam Chen

Report Producer: Amber Chiu



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector
1	1	HONGBO	5G_ANT#1	Monopole	I-PEX
2	2	HONGBO	5G_ANT#2	Monopole	I-PEX
3	3	HONGBO	5G_ANT#3	Monopole	I-PEX
4	4	HONGBO	5G_ANT#4	Monopole	I-PEX
5	1	HONGBO	5G_ANT#5	Monopole	I-PEX

Ant. Port	Peak Gain (dBi)					BT
	5G				BT	
	B1	B2	B3	B4		
1	1	5.06	-	-	-	-
2	2	-	5.55	-	-	-
3	3	-	-	6.12	-	-
4	4	-	-	-	5.33	-
5	1	-	-	-	-	3.17

Ant.	Correlated Gain (dBi)			
	5G			
	4T1S			
	B1	B2	B3	B4
1	7.5	-	-	-
2	-	7.5	-	-
3	-	-	7.1	-
4	-	-	-	7.1

Note 1: The EUT has five antennas.

**For BT function:**

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 5 (port 1) was declared to be tested only by customer.

**For 5GHz function:**

For IEEE 802.11 a mode (1TX/1RX)

Support diversity function and pre-tested on each single chain, the worst case was Ant. 1(port 1) and it was record in this test report.

For IEEE 802.11 ac mode (4TX/4RX)

Ant. 1 (port 1) and Ant. 2 (port 2) and Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

Note 2:

- The Signals support CDD and correlated, and transmits simultaneously in multiple channels in single or multiple frequency bands.
- If all antennas have the same gain,  $G_{ANT}$ :  
Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS})$  dBi, where  $N_{SS}$  = the number of independent spatial streams of data and  $G_{ANT}$  is the antenna gain in dBi. (This formula can also be applied when antennas have different gains if the highest antenna gain is substituted for  $G_{ANT}$ .)
- For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;  
Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;  
Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

### 1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

### 1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.626	2.034	391.25u	3k

### 1.1.5 Table for Multiple Listing

The brand in the following table is all refer to the identical product.

EUT	Brand Name	Model Name	Description
Sku 1	ARRIS	VIP6102W	All the models are identical, the difference model for difference brand served as marketing strategy.
Sku 2	Telus		
Sku 3	Bell		

Note 1: Sku 1 and Sku 2 are share case. The worst case was Sku 3 and it was record in this test report.

## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 558074 D01 v04

## 1.3 Testing Location Information

Testing Location		
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456      FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.		
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065      FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.		

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Daniel	24.6°C / 53%	23/May/2018
RF Conducted	TH06-HY	Chen	24.6°C / 64%	07/Jun/2018
Radiated	03CH09-HY	Jerry	23.6°C / 54%	21/May/2018

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%





## 2 Test Configuration of EUT

### 2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

### 2.2 Test Channel Mode




Test Software	Dos
---------------	-----

Mode	PowerSetting
BT-LE(1Mbps)	-
2402MHz	10
2440MHz	10
2480MHz	10

## 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Operating Mode	CTX
1	Bluetooth +WLAN 5GHz
Refer to Sporton Test Report No.: FA852415 for Co-location RF Exposure Evaluation.	


## 2.4 Accessories and Support Equipment

Accessories				
AC Adapter 1 (US Plug)	Brand Name	ARRIS	Model Name	NBS18D120150VU
	Manufacturer	-	SN	-
	Power Rating	I/P: 100 - 240Vac, 0.6A, O/P: 12 Vdc, 1.5A		
	Power Cord	1.74 meter, Non-Shielded cable, w/o ferrite core		
AC Adapter 2 (US Plug)	Brand Name	APD	Model Name	WB-18Q12FU
	Manufacturer	-	SN	-
	Power Rating	I/P: 100 - 240Vac, 0.6A, O/P: 12Vdc, 1.5A		
	Power Cord	1.74 meter, Non-Shielded cable, w/o ferrite core		
AC Adapter 3 (US Plug)	Brand Name	LITEON	Model Name	PB-1180-01R1
	Manufacturer	-	SN	-
	Power Rating	I/P: 100 - 240Vac, 0.6A, O/P: 12Vdc, 1.5A		
	Power Cord	1.74 meter, Non-Shielded cable, w/o ferrite core		
HDMI Cable	Category	-	In/Out door	In door
	Cable	1.5 meter, Shielded cable, w/o ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment – RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DOC
2	Adapter for NB	DELL	HA65NM130	DOC

## 2.5 Test Setup Diagram

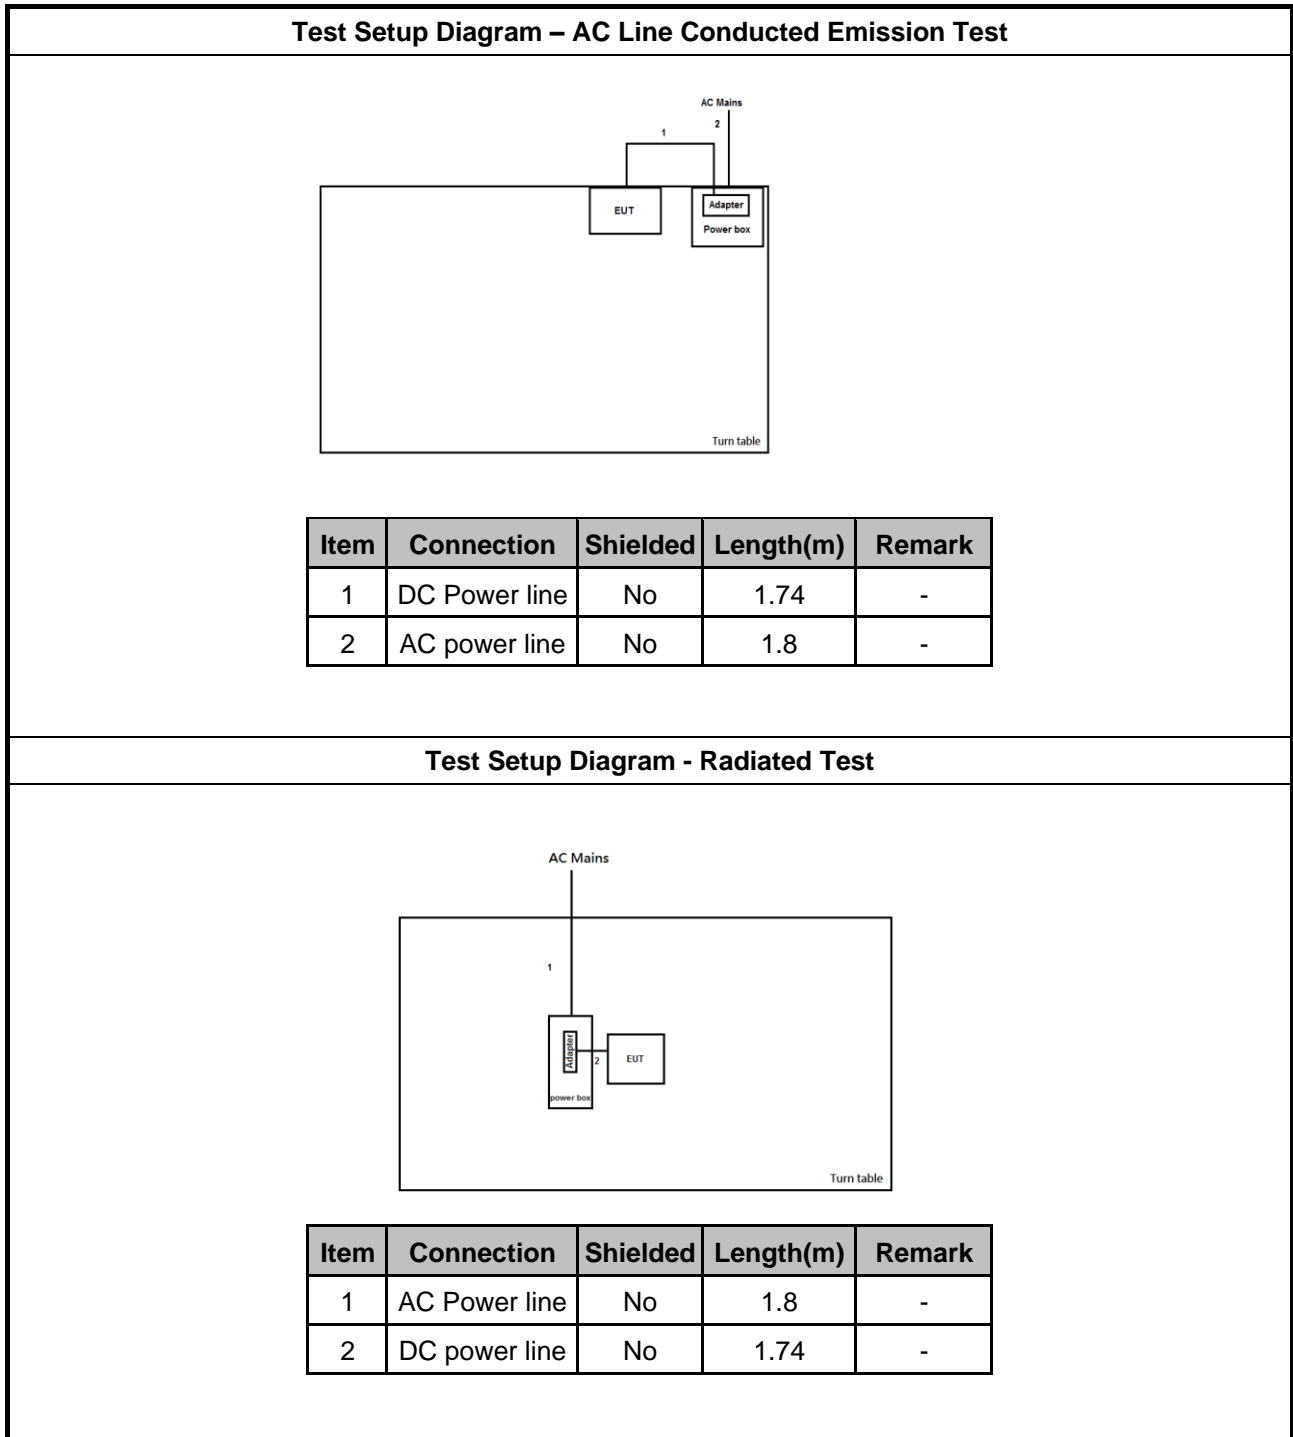

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.</li> </ul>

##### 3.1.4 Test Setup

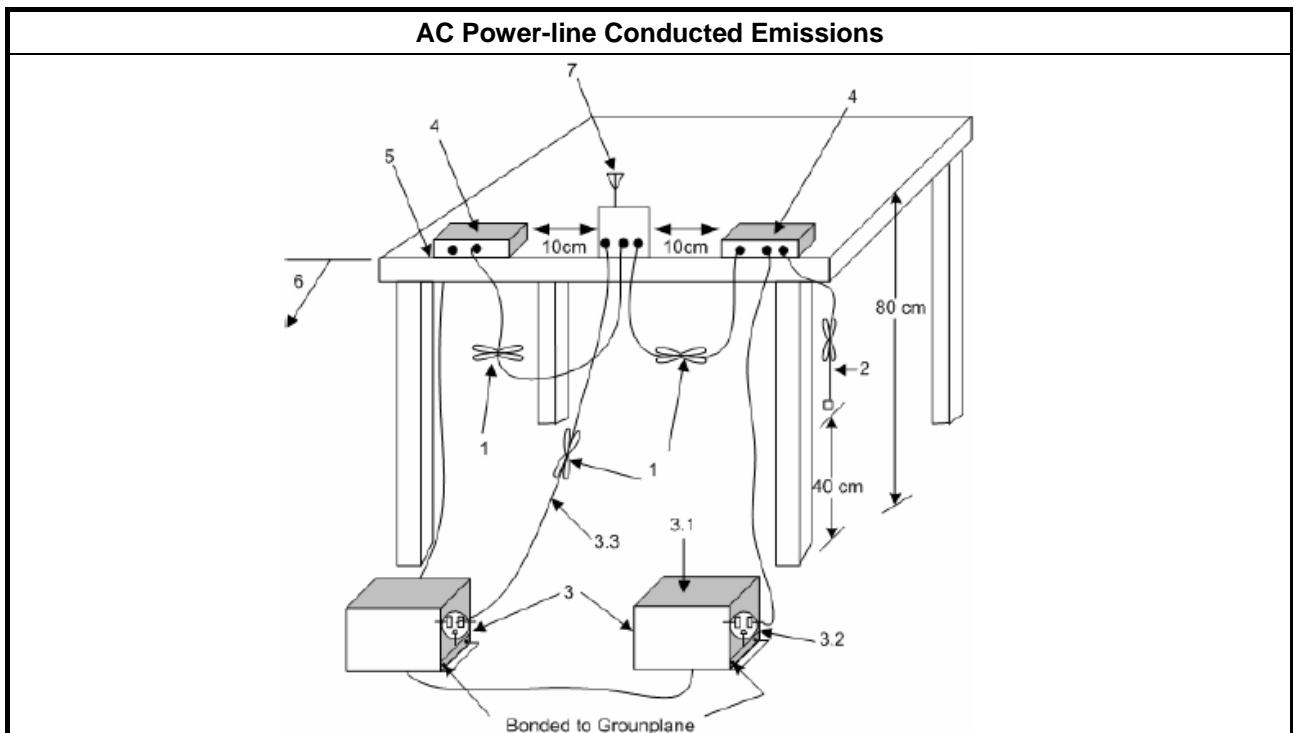

##### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

#### 3.2.4 Test Setup

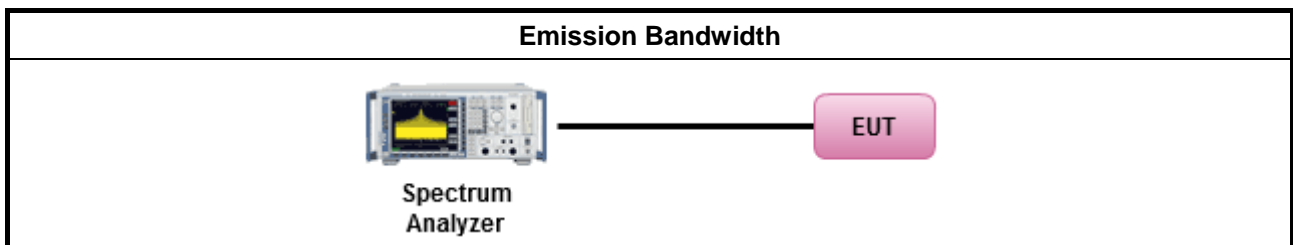

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): <math>P_{eirp} \leq 36</math> dBm (4 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS)</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])</math> dBm</li> </ul>
<p><math>P_{Out}</math> = maximum peak conducted output power or maximum conducted output power in dBm,  <math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.</p>	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as KDB 558074, clause 9.1.2 Option 2 (integrated band power method)
<input type="checkbox"/>	Refer as KDB 558074, clause 9.1.3 Option 3 (peak power meter for VBW ≥ DTS BW)
<ul style="list-style-type: none"> <li>▪ Maximum Average Conducted Output Power</li> </ul>	
Duty cycle ≥ 98%	
<input type="checkbox"/>	Refer as KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
Duty cycle < 98%	
<input type="checkbox"/>	Refer as KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 9.2.3.1 Method AVGPM (using an RF average power meter).
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

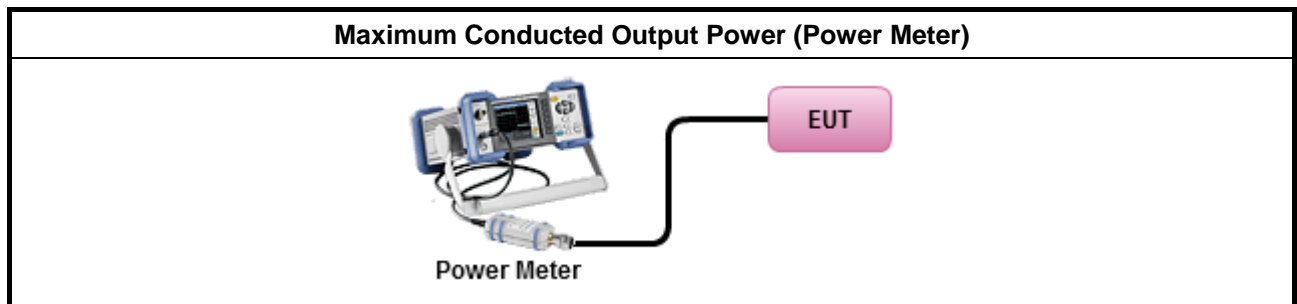

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak).
<ul style="list-style-type: none"> <li>For conducted measurement.             <ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:                 <ul style="list-style-type: none"> <li>Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</li> </ul> </li> </ul> </li> </ul>

#### 3.4.4 Test Setup

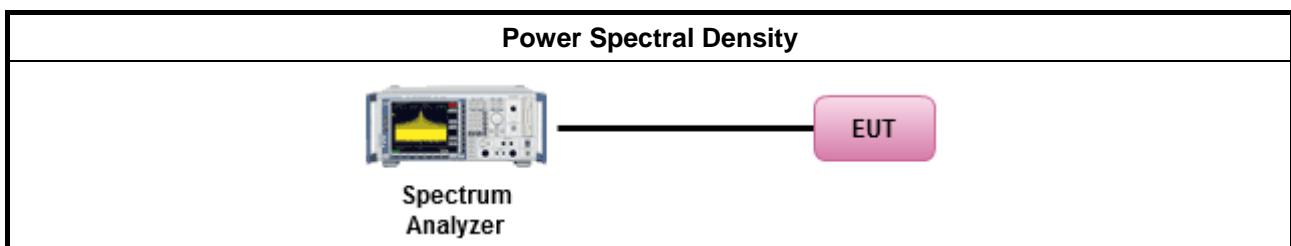

#### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 11 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

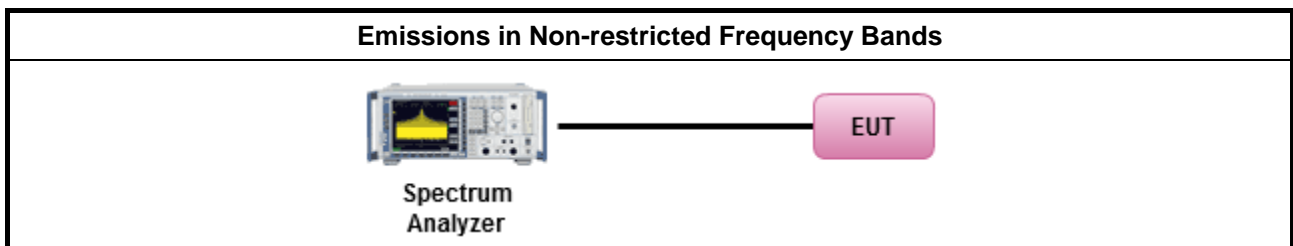

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 12 for unwanted emissions into restricted bands.</li> </ul>	
	<input checked="" type="checkbox"/> Refer as KDB 558074, clause 12.2.5.3 (ANSI C63.10, clause 4.1.4.2.3), Reduced VBW $\geq$ 1/T.
	<input checked="" type="checkbox"/> Refer as KDB 558074, clause 12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 13.2 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For conducted and cabinet radiation measurement, refer as KDB 558074, clause 12.2.2.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>	

### 3.6.4 Test Setup

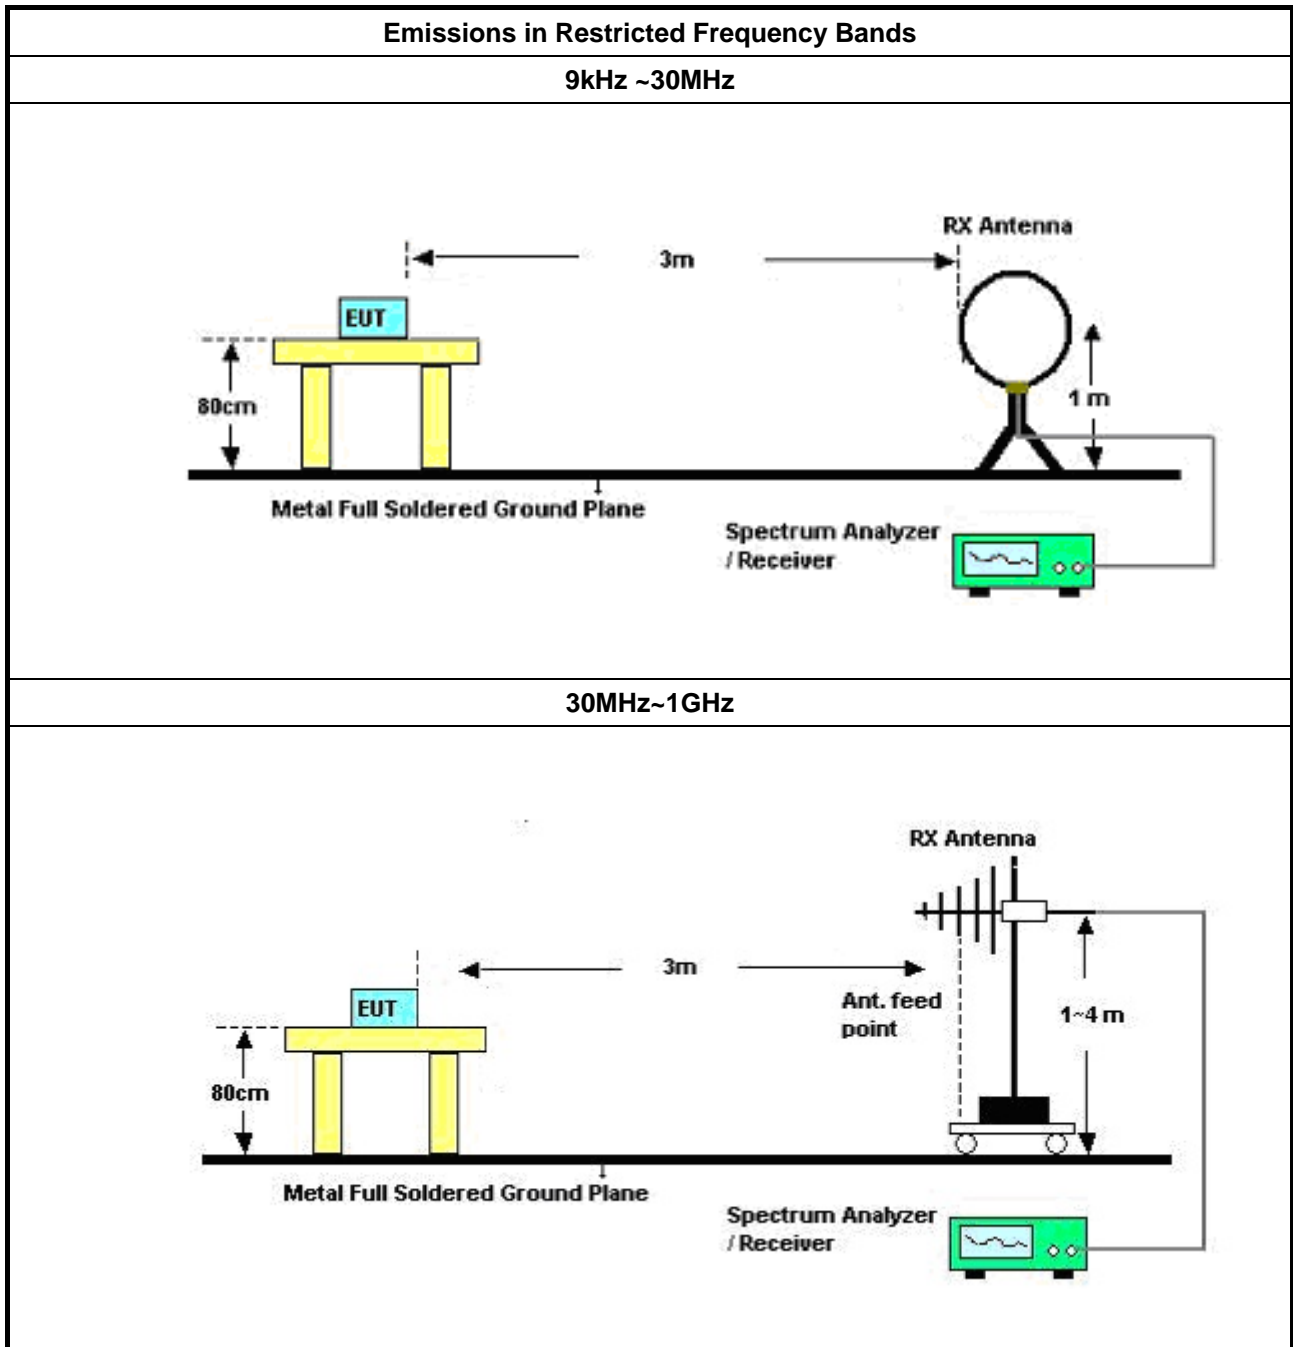

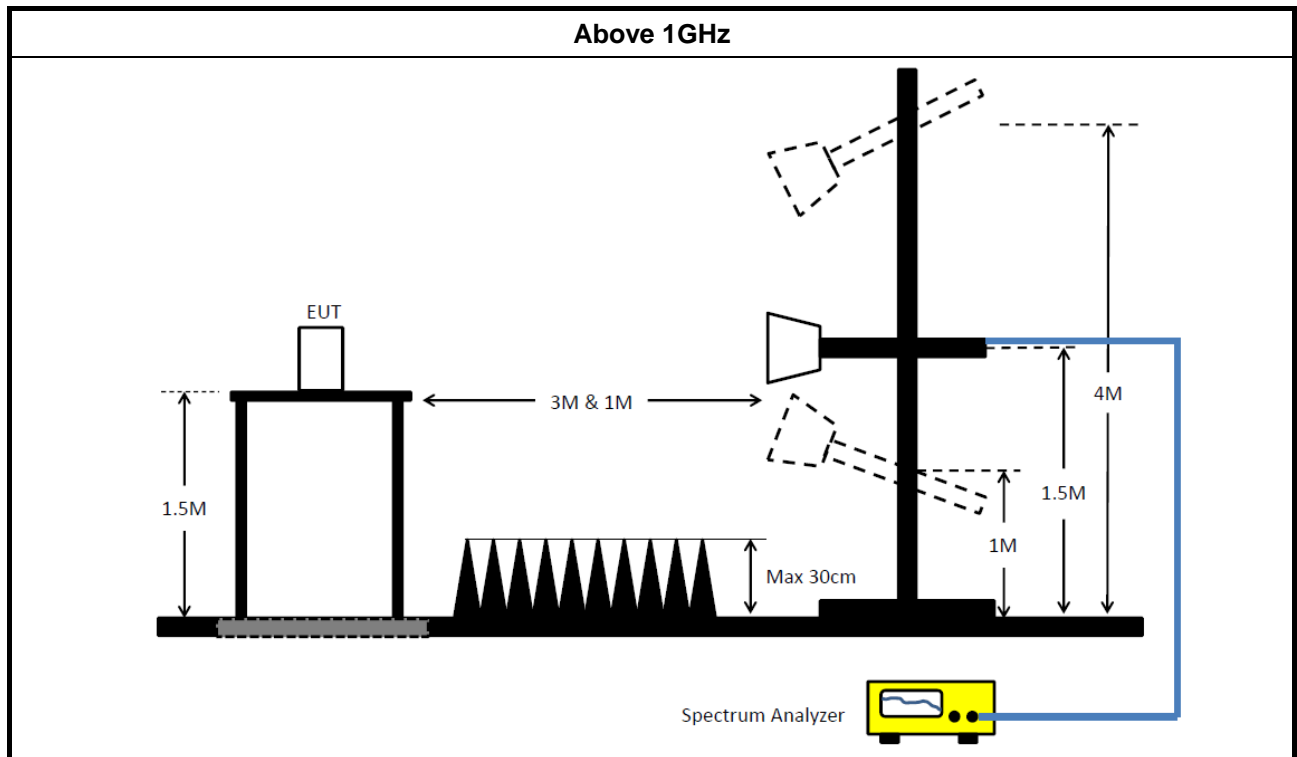

### 3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESCS30	838251/003	9KHz ~ 2.75GHz	13/Jun/2017	12/Jun/2018
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR : Non-Calibration Require

### Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	29/Dec/2017	28/Dec/2018
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	27/Jul/2017	26/Jul/2018
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	05/Feb/2018	04/Feb/2019
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	05/Feb/2018	04/Feb/2019
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10710/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10709/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_104	MY10713/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018



Instrument for Radiated Test


Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz	23/Apr/2018	22/Apr/2019
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz	20/Jun/2017	19/Jun/2018
Microwave Preamplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	28/Sep/2017	27/Sep/2018
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	29Jun/2017	28/Jun/2018
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	20/Jul/2017	19/Jul/2018
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D & MTJ6102-05	35418 / 3	30MHz~1GHz	09/Sep/2017	08/Sep/2018
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	28/Apr/2017	27/Apr/2018
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA9120D 1534	1GHz~18GHz	30/Apr/2018	29/Apr/2019
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170614	18GHz~40GHz	09/Feb/2018	08/Feb/2019
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	24/Aug/2017	23/Aug/2018
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	29/Mar/2018	28/Mar/2019
RF Cable-R03m	Jye Bao	RG142	CB031	9kHz ~ 1GHz	1/Feb/2018	31/Jan/2019
RF Cable-high	HUBER+SUHNER	SUCOFLEX104	SN 556626/4 + 556627	1GHz ~ 40GHz	14/Mar/2018	13/Mar/2019
RF Cable-high	SUHNER	SUCOFLEX104	MY34918/4	1GHz ~ 40GHz	02/Feb/2018	01/Feb/2019





AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter mode		

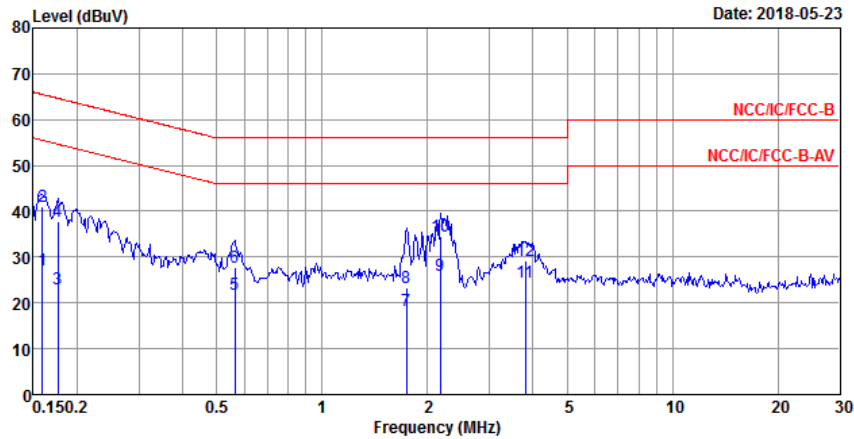

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	27.23	-28.29	55.52	17.57	9.63	0.03	Average
2	0.16	41.18	-24.34	65.52	31.52	9.63	0.03	QP
3	0.18	23.13	-31.55	54.68	13.49	9.62	0.02	Average
4	0.18	37.91	-26.77	64.68	28.27	9.62	0.02	QP
5	0.56	21.77	-24.23	46.00	12.10	9.61	0.06	Average
6	0.56	27.88	-28.12	56.00	18.21	9.61	0.06	QP
7	1.74	18.21	-27.79	46.00	8.58	9.63	0.00	Average
8	1.74	23.44	-32.56	56.00	13.81	9.63	0.00	QP
<b>9 MAX</b>	<b>2.18</b>	<b>25.98</b>	<b>-20.02</b>	<b>46.00</b>	<b>16.34</b>	<b>9.63</b>	<b>0.01</b>	<b>Average</b>
10	2.18	34.41	-21.59	56.00	24.77	9.63	0.01	QP
11	3.80	24.39	-21.61	46.00	14.67	9.64	0.08	Average
12	3.80	29.21	-26.79	56.00	19.49	9.64	0.08	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result																																																																																																																																										
Operating Mode	1	Power Phase	Line																																																																																																																																							
Operating Function	Adapter mode																																																																																																																																									
<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2018-05-23</div> </div>																																																																																																																																										
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>LISM</th> <th>Cable</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.15</td> <td>20.97</td> <td>-34.94</td> <td>55.91</td> <td>11.31</td> <td>9.62</td> <td>0.04</td> <td>Average</td> </tr> <tr> <td>2</td> <td>0.15</td> <td>34.80</td> <td>-31.11</td> <td>65.91</td> <td>25.14</td> <td>9.62</td> <td>0.04</td> <td>QP</td> </tr> <tr> <td>3</td> <td>0.16</td> <td>25.92</td> <td>-29.51</td> <td>55.43</td> <td>16.27</td> <td>9.62</td> <td>0.03</td> <td>Average</td> </tr> <tr> <td>4</td> <td>0.16</td> <td>40.34</td> <td>-25.09</td> <td>65.43</td> <td>30.69</td> <td>9.62</td> <td>0.03</td> <td>QP</td> </tr> <tr> <td>5</td> <td>0.18</td> <td>24.19</td> <td>-30.40</td> <td>54.59</td> <td>14.55</td> <td>9.62</td> <td>0.02</td> <td>Average</td> </tr> <tr> <td>6</td> <td>0.18</td> <td>38.29</td> <td>-26.30</td> <td>64.59</td> <td>28.65</td> <td>9.62</td> <td>0.02</td> <td>QP</td> </tr> <tr> <td>7</td> <td>1.73</td> <td>22.07</td> <td>-23.93</td> <td>46.00</td> <td>12.45</td> <td>9.62</td> <td>0.00</td> <td>Average</td> </tr> <tr> <td>8</td> <td>1.73</td> <td>28.53</td> <td>-27.47</td> <td>56.00</td> <td>18.91</td> <td>9.62</td> <td>0.00</td> <td>QP</td> </tr> <tr> <td>9 MAX</td> <td>2.18</td> <td>25.93</td> <td>-20.07</td> <td>46.00</td> <td>16.30</td> <td>9.62</td> <td>0.01</td> <td>Average</td> </tr> <tr> <td>10</td> <td>2.18</td> <td>33.86</td> <td>-22.14</td> <td>56.00</td> <td>24.23</td> <td>9.62</td> <td>0.01</td> <td>QP</td> </tr> <tr> <td>11</td> <td>3.76</td> <td>21.59</td> <td>-24.41</td> <td>46.00</td> <td>11.88</td> <td>9.63</td> <td>0.08</td> <td>Average</td> </tr> <tr> <td>12</td> <td>3.76</td> <td>25.19</td> <td>-30.81</td> <td>56.00</td> <td>15.48</td> <td>9.63</td> <td>0.08</td> <td>QP</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	Read	LISM	Cable	Remark		MHz	dBuV	Limit	Line	Level	Factor	Loss					dB	dBuV	dBuV	dB	dB		1	0.15	20.97	-34.94	55.91	11.31	9.62	0.04	Average	2	0.15	34.80	-31.11	65.91	25.14	9.62	0.04	QP	3	0.16	25.92	-29.51	55.43	16.27	9.62	0.03	Average	4	0.16	40.34	-25.09	65.43	30.69	9.62	0.03	QP	5	0.18	24.19	-30.40	54.59	14.55	9.62	0.02	Average	6	0.18	38.29	-26.30	64.59	28.65	9.62	0.02	QP	7	1.73	22.07	-23.93	46.00	12.45	9.62	0.00	Average	8	1.73	28.53	-27.47	56.00	18.91	9.62	0.00	QP	9 MAX	2.18	25.93	-20.07	46.00	16.30	9.62	0.01	Average	10	2.18	33.86	-22.14	56.00	24.23	9.62	0.01	QP	11	3.76	21.59	-24.41	46.00	11.88	9.63	0.08	Average	12	3.76	25.19	-30.81	56.00	15.48	9.63	0.08	QP
	Freq	Level	Over	Limit	Read	LISM	Cable	Remark																																																																																																																																		
	MHz	dBuV	Limit	Line	Level	Factor	Loss																																																																																																																																			
			dB	dBuV	dBuV	dB	dB																																																																																																																																			
1	0.15	20.97	-34.94	55.91	11.31	9.62	0.04	Average																																																																																																																																		
2	0.15	34.80	-31.11	65.91	25.14	9.62	0.04	QP																																																																																																																																		
3	0.16	25.92	-29.51	55.43	16.27	9.62	0.03	Average																																																																																																																																		
4	0.16	40.34	-25.09	65.43	30.69	9.62	0.03	QP																																																																																																																																		
5	0.18	24.19	-30.40	54.59	14.55	9.62	0.02	Average																																																																																																																																		
6	0.18	38.29	-26.30	64.59	28.65	9.62	0.02	QP																																																																																																																																		
7	1.73	22.07	-23.93	46.00	12.45	9.62	0.00	Average																																																																																																																																		
8	1.73	28.53	-27.47	56.00	18.91	9.62	0.00	QP																																																																																																																																		
9 MAX	2.18	25.93	-20.07	46.00	16.30	9.62	0.01	Average																																																																																																																																		
10	2.18	33.86	-22.14	56.00	24.23	9.62	0.01	QP																																																																																																																																		
11	3.76	21.59	-24.41	46.00	11.88	9.63	0.08	Average																																																																																																																																		
12	3.76	25.19	-30.81	56.00	15.48	9.63	0.08	QP																																																																																																																																		
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																										



**Summary**


Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	566.25k	1.052M	1M05F1D	546.25k	1.049M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz_TnomVnom	Pass	500k	546.25k	1.049M
2440MHz_TnomVnom	Pass	500k	550k	1.052M
2480MHz_TnomVnom	Pass	500k	566.25k	1.051M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

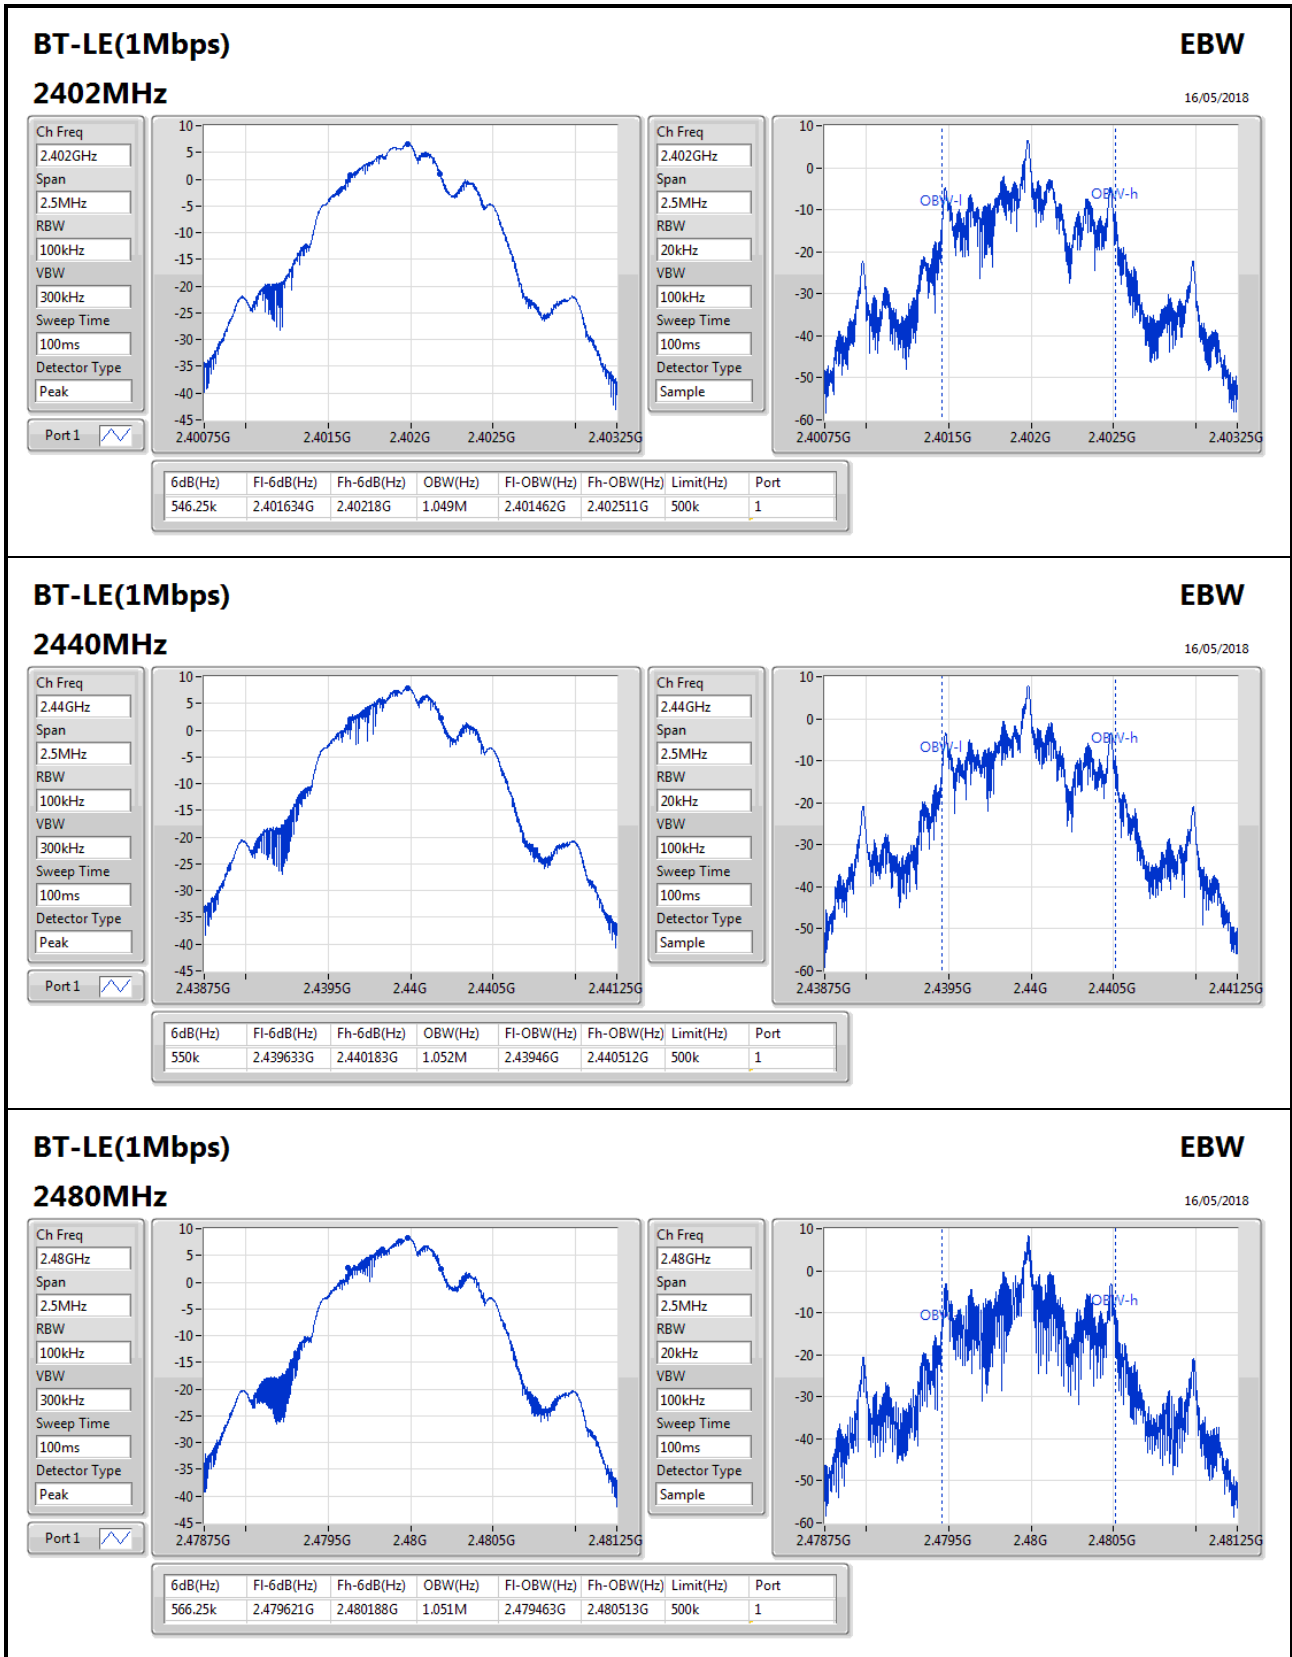



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.03	0.00635

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz_TnomVnom	Pass	3.17	6.30	30.00
2440MHz_TnomVnom	Pass	3.17	7.59	30.00
2480MHz_TnomVnom	Pass	3.17	8.03	30.00



Summary


Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	5.91

RBW=3kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz_TnomVnom	Pass	3.17	3.23	8.00
2440MHz_TnomVnom	Pass	3.17	5.91	8.00
2480MHz_TnomVnom	Pass	3.17	2.08	8.00

RBW=3kHz.

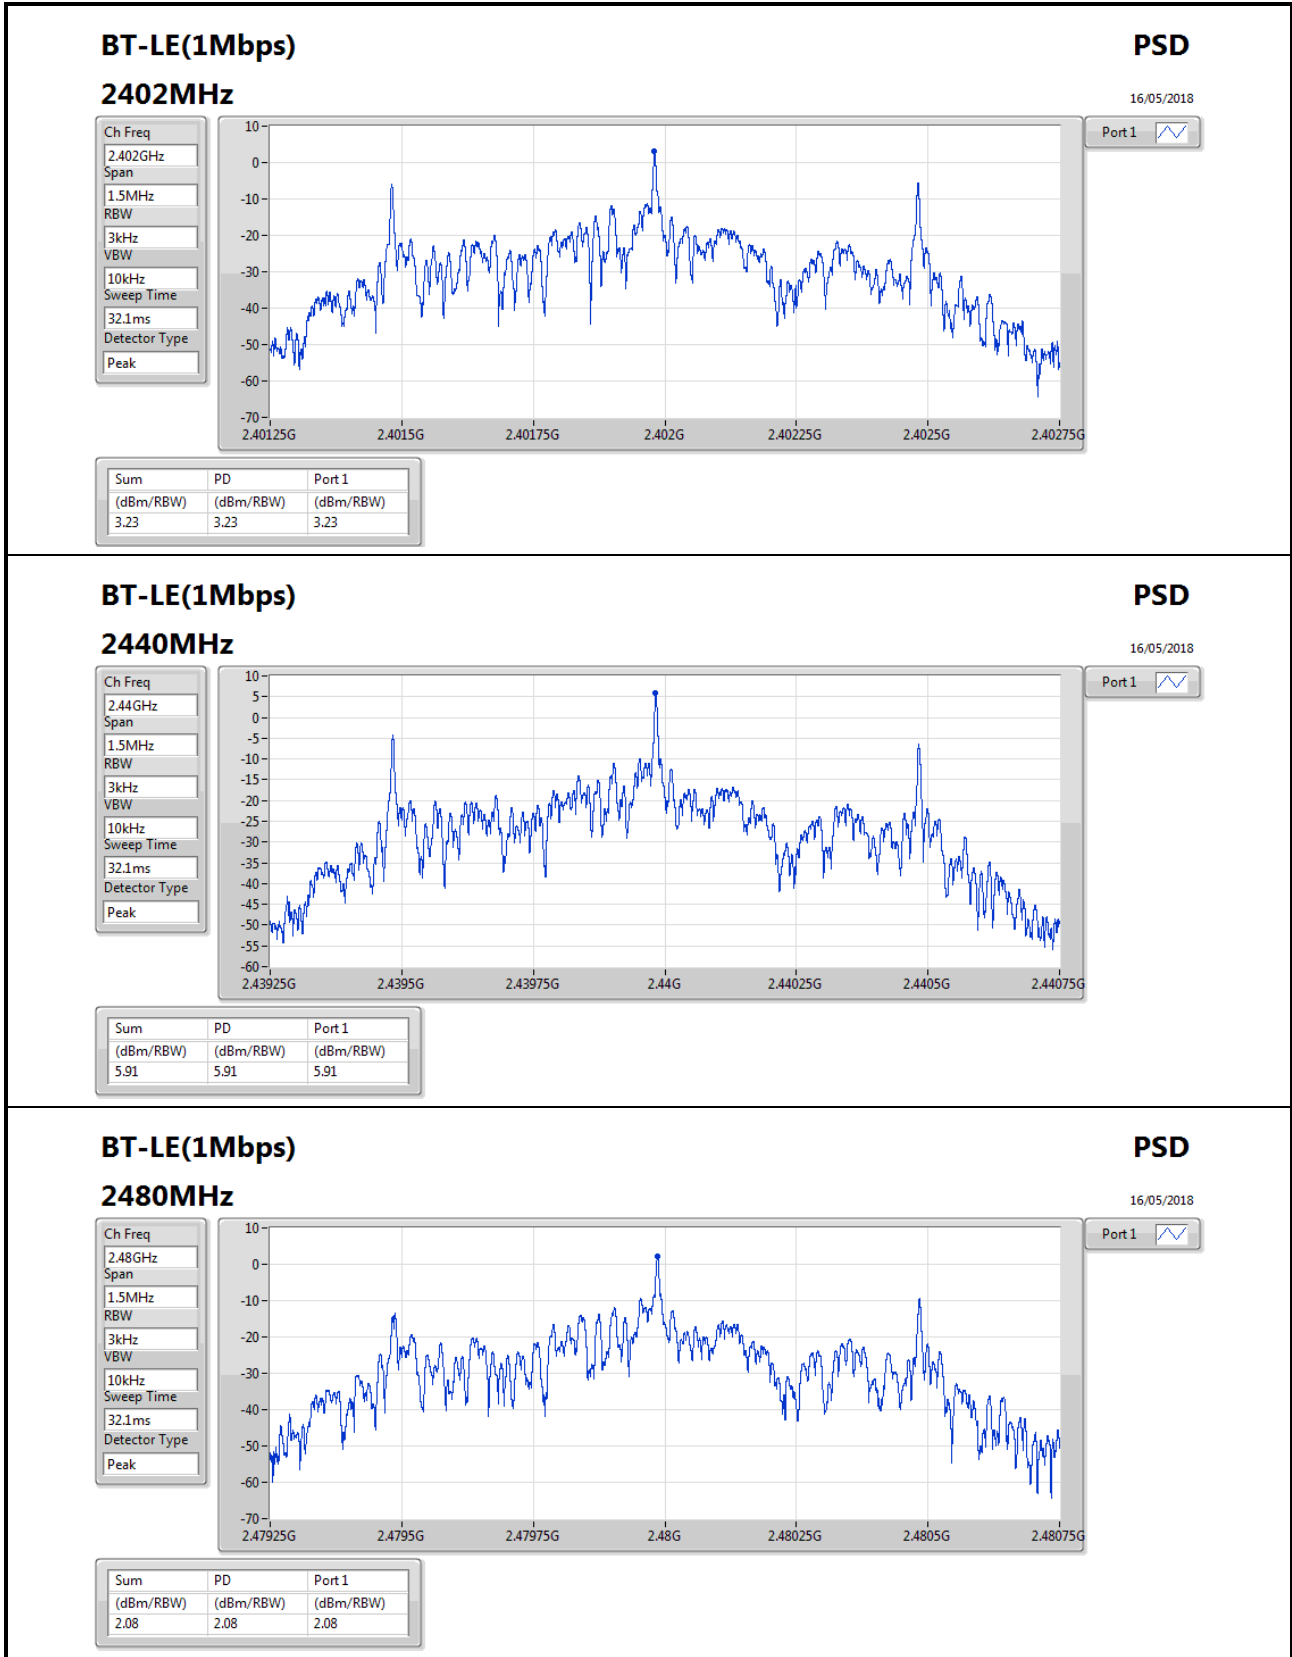

### BT-LE(1Mbps)

#### 2480MHz

### PSD

16/05/2018

Ch Freq  
2.48GHz

Span  
1.5MHz

RBW  
3kHz

VBW  
10kHz

Sweep Time  
32.1ms

Detector Type  
Peak



Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.08	2.08	2.08




**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.479993G	8.36	-21.64	2.396816G	-62.98	2.399996G	-51.29	2.484536G	-62.65	15.085177G	-55.87	1

**Result**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz_TnomVnom	Pass	2.479993G	8.36	-21.64	2.396816G	-62.98	2.399996G	-51.29	2.484536G	-62.65	15.085177G	-55.87	1
2440MHz_TnomVnom	Pass	2.479993G	8.36	-21.64	2.09608G	-63.85	2.399964G	-56.58	2.484828G	-63.09	15.062663G	-56.10	1
2480MHz_TnomVnom	Pass	2.479993G	8.36	-21.64	2.15528G	-64.54	2.399688G	-63.71	2.483804G	-58.09	2.519272G	-56.73	1



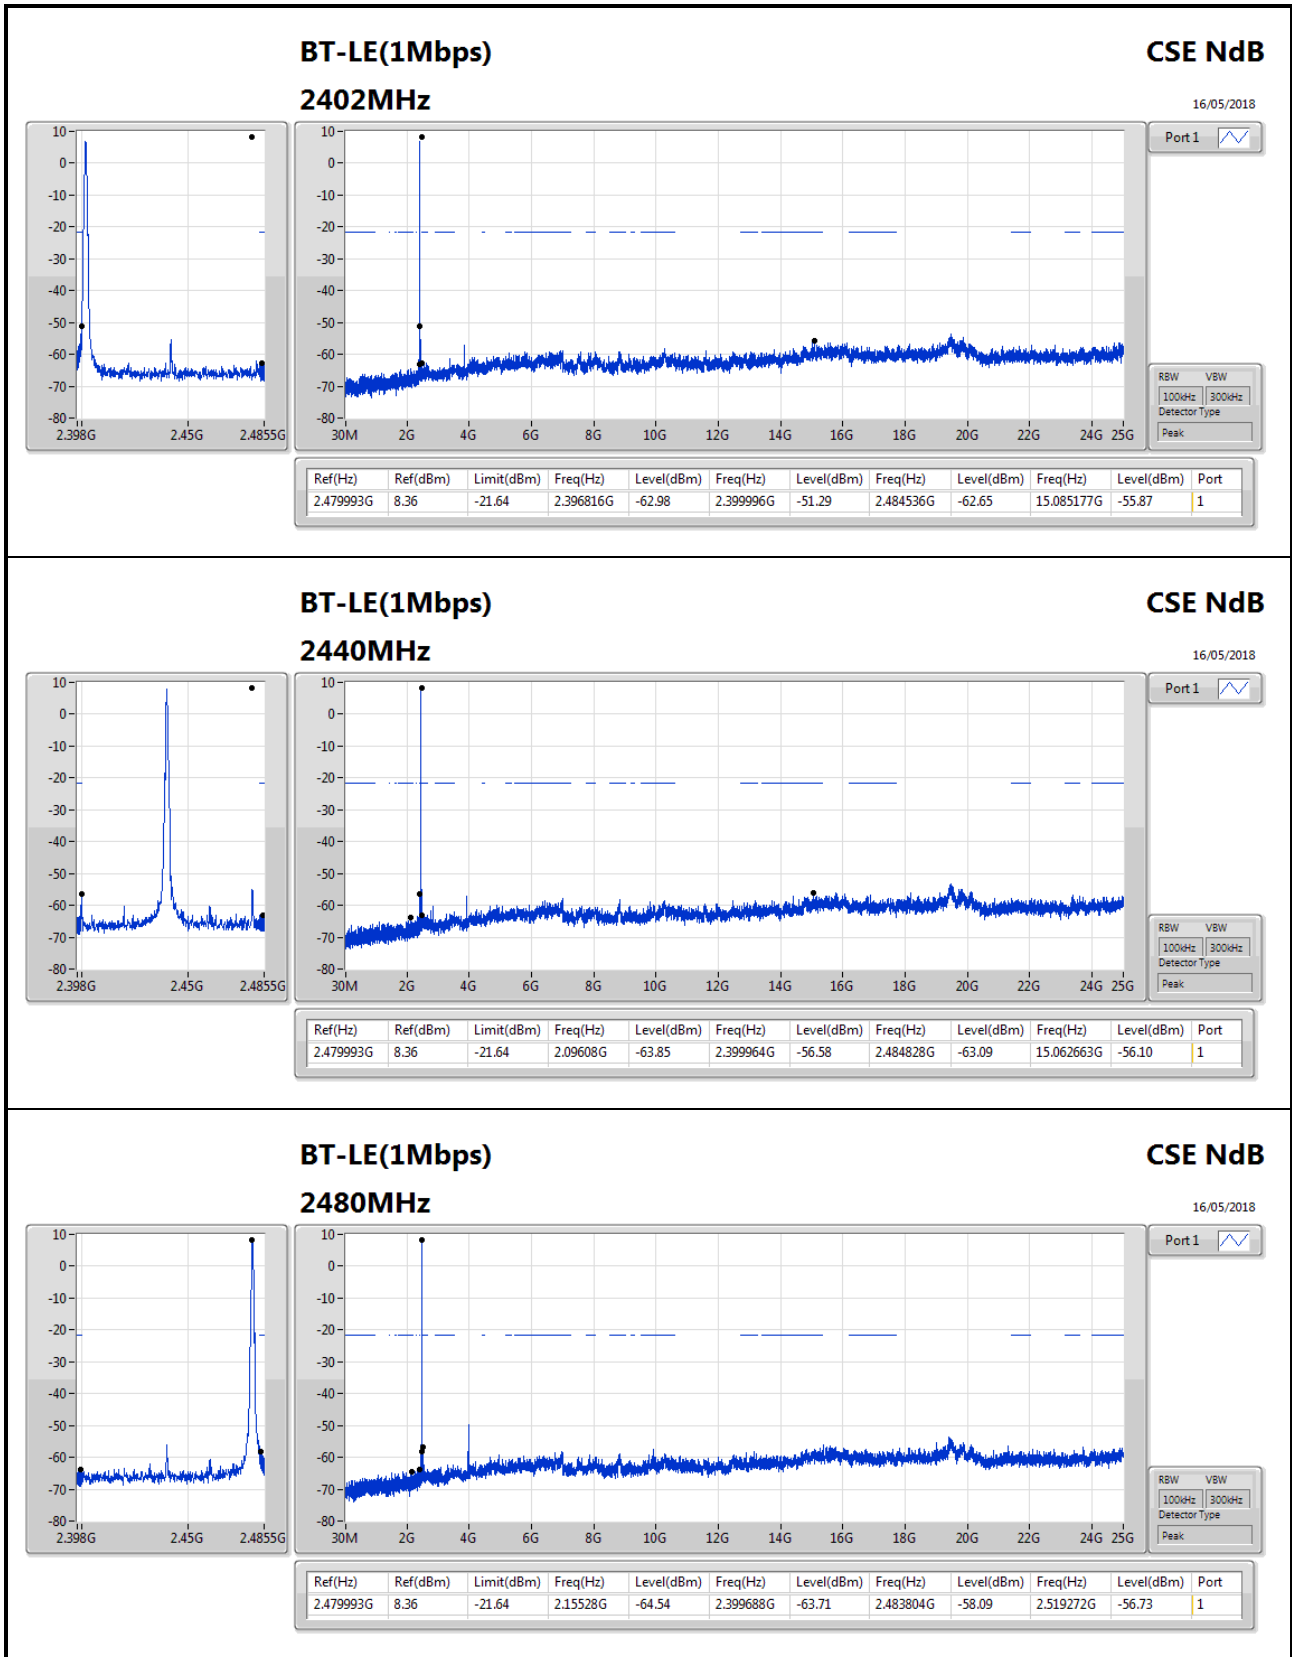

**BT-LE(1Mbps)**

**2480MHz**

**CSE NdB**

16/05/2018

Port1

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.479993G	8.36	-21.64	2.15528G	-64.54	2.399688G	-63.71	2.483804G	-58.09	2.519272G	-56.73	1



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	41.64M	35.14	40.00	-4.86	-19.22	3	Vertical	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	41.64M	35.14	40.00	-4.86	-19.22	3	Vertical	360	1.00	-
2440MHz	Pass	PK	95.96M	34.18	43.50	-9.32	-21.63	3	Vertical	360	1.00	-
2440MHz	Pass	PK	167.74M	32.44	43.50	-11.06	-20.54	3	Vertical	360	1.00	-
2440MHz	Pass	PK	375.32M	39.56	46.00	-6.44	-14.84	3	Vertical	360	1.00	-
2440MHz	Pass	PK	625.58M	38.50	46.00	-7.50	-10.19	3	Vertical	360	1.00	-
2440MHz	Pass	PK	747.8M	40.72	46.00	-5.28	-8.40	3	Vertical	360	1.00	-
2440MHz	Pass	PK	78.5M	23.77	40.00	-16.23	-24.16	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	140.58M	31.91	43.50	-11.59	-19.27	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	235.64M	31.57	46.00	-14.43	-19.14	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	375.32M	40.82	46.00	-5.18	-14.84	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	524.7M	34.57	46.00	-11.43	-12.11	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	749.74M	37.71	46.00	-8.29	-8.38	3	Horizontal	0	1.00	-

### BT-LE(1Mbps) 2440MHz\_Adapter mode


21/05/2018

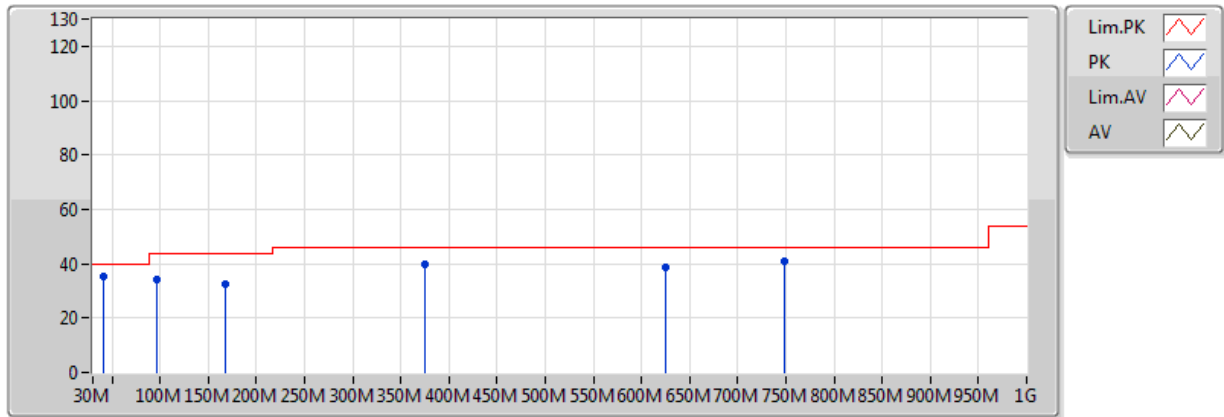





Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	41.64M	35.14	40.00	-4.86	-19.22	3	Vertical	360	1.00	-
PK	95.96M	34.18	43.50	-9.32	-21.63	3	Vertical	360	1.00	-
PK	167.74M	32.44	43.50	-11.06	-20.54	3	Vertical	360	1.00	-
PK	375.32M	39.56	46.00	-6.44	-14.84	3	Vertical	360	1.00	-
PK	625.58M	38.50	46.00	-7.50	-10.19	3	Vertical	360	1.00	-
PK	747.8M	40.72	46.00	-5.28	-8.40	3	Vertical	360	1.00	-

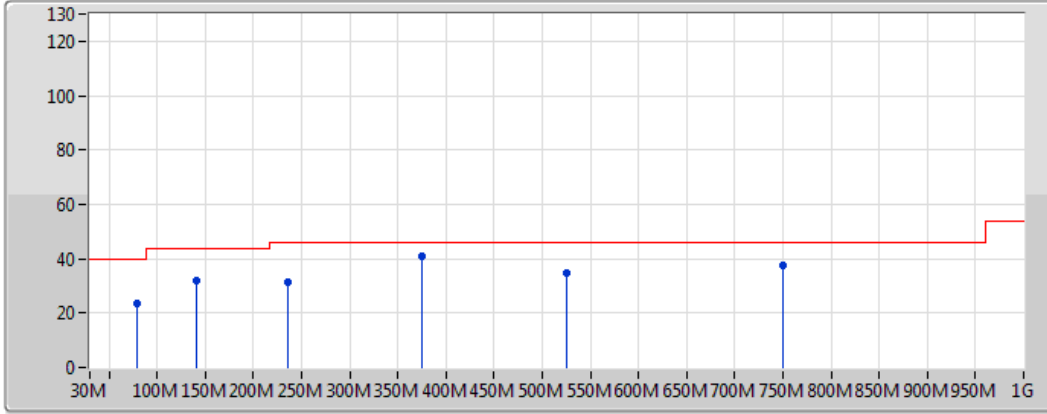**BT-LE(1Mbps)**  
**2440MHz\_Adapter mode**

21/05/2018



Legend:

- Lim.PK 
- PK 
- Lim.AV 
- AV 

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	78.5M	23.77	40.00	-16.23	-24.16	3	Horizontal	0	1.00	-
PK	140.58M	31.91	43.50	-11.59	-19.27	3	Horizontal	0	1.00	-
PK	235.64M	31.57	46.00	-14.43	-19.14	3	Horizontal	0	1.00	-
PK	375.32M	40.82	46.00	-5.18	-14.84	3	Horizontal	0	1.00	-
PK	524.7M	34.57	46.00	-11.43	-12.11	3	Horizontal	0	1.00	-
PK	749.74M	37.71	46.00	-8.29	-8.38	3	Horizontal	0	1.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.495G	47.97	54.00	-6.03	31.25	3	Vertical	265	3.09	-



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.375G	47.20	54.00	-6.80	30.86	3	Vertical	142	3.09	-
2402MHz	Pass	AV	2.402G	93.59	Inf	-Inf	30.95	3	Vertical	142	3.09	-
2402MHz	Pass	PK	2.3822G	57.58	74.00	-16.42	30.89	3	Vertical	142	3.09	-
2402MHz	Pass	PK	2.4022G	94.14	Inf	-Inf	30.95	3	Vertical	142	3.09	-
2402MHz	Pass	AV	2.3718G	47.22	54.00	-6.78	30.86	3	Horizontal	133	1.17	-
2402MHz	Pass	AV	2.402G	105.24	Inf	-Inf	30.95	3	Horizontal	133	1.17	-
2402MHz	Pass	PK	2.3816G	57.58	74.00	-16.42	30.89	3	Horizontal	133	1.17	-
2402MHz	Pass	PK	2.4018G	105.77	Inf	-Inf	30.95	3	Horizontal	133	1.17	-
2402MHz	Pass	AV	3.843136G	38.40	54.00	-15.60	-0.82	3	Vertical	70	2.91	-
2402MHz	Pass	AV	4.804032G	32.67	54.00	-21.33	1.90	3	Vertical	294	1.58	-
2402MHz	Pass	PK	3.843184G	48.46	74.00	-25.54	-0.82	3	Vertical	70	2.91	-
2402MHz	Pass	PK	4.803816G	44.62	74.00	-29.38	1.90	3	Vertical	294	1.58	-
2402MHz	Pass	AV	3.84318G	45.86	54.00	-8.14	-0.82	3	Horizontal	143	1.50	-
2402MHz	Pass	AV	4.8015G	32.09	54.00	-21.91	1.89	3	Horizontal	49	1.06	-
2402MHz	Pass	PK	3.84318G	53.77	74.00	-20.23	-0.82	3	Horizontal	143	1.50	-
2402MHz	Pass	PK	4.8015G	41.71	74.00	-32.29	1.89	3	Horizontal	49	1.06	-
2440MHz	Pass	AV	2.352G	47.22	54.00	-6.78	30.79	3	Vertical	227	3.09	-
2440MHz	Pass	AV	2.44G	99.47	Inf	-Inf	31.07	3	Vertical	227	3.09	-
2440MHz	Pass	AV	2.499998G	47.72	54.00	-6.28	31.26	3	Vertical	227	3.09	-
2440MHz	Pass	PK	2.3604G	57.44	74.00	-16.56	30.82	3	Vertical	227	3.09	-
2440MHz	Pass	PK	2.44G	100.01	Inf	-Inf	31.07	3	Vertical	227	3.09	-
2440MHz	Pass	PK	2.498G	57.96	74.00	-16.04	31.26	3	Vertical	227	3.09	-
2440MHz	Pass	AV	2.3556G	47.22	54.00	-6.78	30.80	3	Horizontal	234	1.50	-
2440MHz	Pass	AV	2.44G	104.79	Inf	-Inf	31.07	3	Horizontal	234	1.50	-
2440MHz	Pass	AV	2.49G	47.70	54.00	-6.30	31.23	3	Horizontal	234	1.50	-
2440MHz	Pass	PK	2.3464G	57.54	74.00	-16.46	30.78	3	Horizontal	234	1.50	-
2440MHz	Pass	PK	2.44G	105.68	Inf	-Inf	31.07	3	Horizontal	234	1.50	-
2440MHz	Pass	PK	2.4852G	57.77	74.00	-16.23	31.22	3	Horizontal	234	1.50	-
2440MHz	Pass	AV	3.90395G	38.78	54.00	-15.22	-0.66	3	Vertical	62	2.62	-
2440MHz	Pass	AV	4.880028G	32.83	54.00	-21.17	2.07	3	Vertical	87	2.25	-
2440MHz	Pass	PK	3.903894G	49.31	74.00	-24.69	-0.66	3	Vertical	62	2.62	-
2440MHz	Pass	PK	4.879916G	44.99	74.00	-29.01	2.07	3	Vertical	87	2.25	-
2440MHz	Pass	AV	3.903994G	46.25	54.00	-7.75	-0.66	3	Horizontal	143	1.50	-
2440MHz	Pass	AV	4.880132G	32.83	54.00	-21.17	2.07	3	Horizontal	130	2.37	-
2440MHz	Pass	PK	3.903994G	55.00	74.00	-19.00	-0.66	3	Horizontal	143	1.50	-
2440MHz	Pass	PK	4.880132G	42.33	74.00	-31.67	2.07	3	Horizontal	130	2.37	-
2480MHz	Pass	AV	2.48G	95.93	Inf	-Inf	31.20	3	Vertical	265	3.09	-
2480MHz	Pass	AV	2.495G	47.97	54.00	-6.03	31.25	3	Vertical	265	3.09	-
2480MHz	Pass	PK	2.4798G	96.50	Inf	-Inf	31.20	3	Vertical	265	3.09	-
2480MHz	Pass	PK	2.4848G	58.38	74.00	-15.62	31.22	3	Vertical	265	3.09	-
2480MHz	Pass	AV	2.48G	105.79	Inf	-Inf	31.20	3	Horizontal	134	1.34	-
2480MHz	Pass	AV	2.4998G	47.72	54.00	-6.28	31.26	3	Horizontal	134	1.34	-
2480MHz	Pass	PK	2.4798G	106.36	Inf	-Inf	31.20	3	Horizontal	134	1.34	-
2480MHz	Pass	PK	2.4852G	58.46	74.00	-15.54	31.22	3	Horizontal	134	1.34	-
2480MHz	Pass	AV	3.967968G	41.69	54.00	-12.31	-0.51	3	Vertical	156	2.55	-
2480MHz	Pass	AV	4.959553G	32.98	54.00	-21.02	2.27	3	Vertical	40	2.12	-
2480MHz	Pass	PK	3.967773G	51.62	74.00	-22.38	-0.51	3	Vertical	156	2.55	-



## RSE TX above 1GHz Result

## Appendix F.2


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2480MHz	Pass	PK	4.959489G	45.68	74.00	-28.32	2.27	3	Vertical	40	2.12	-
2480MHz	Pass	AV	3.967962G	46.63	54.00	-7.37	-0.51	3	Horizontal	145	1.45	-
2480MHz	Pass	AV	4.879932G	33.42	54.00	-20.58	2.07	3	Horizontal	158	1.89	-
2480MHz	Pass	PK	3.967986G	55.79	74.00	-18.21	-0.51	3	Horizontal	145	1.45	-
2480MHz	Pass	PK	4.880966G	45.80	74.00	-28.20	2.07	3	Horizontal	158	1.89	-



### BT-LE(1Mbps)

### 2402MHz\_TX

18/05/2018

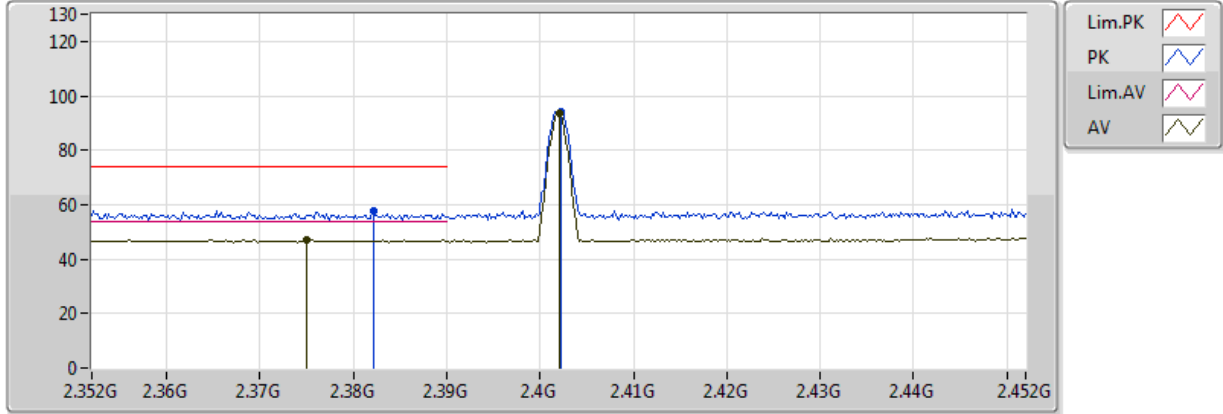


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.375G	47.20	54.00	-6.80	30.86	3	Vertical	142	3.09	-
AV	2.402G	93.59	Inf	-Inf	30.95	3	Vertical	142	3.09	-
PK	2.3822G	57.58	74.00	-16.42	30.89	3	Vertical	142	3.09	-
PK	2.4022G	94.14	Inf	-Inf	30.95	3	Vertical	142	3.09	-

**BT-LE(1Mbps)**

**2402MHz\_TX**

18/05/2018

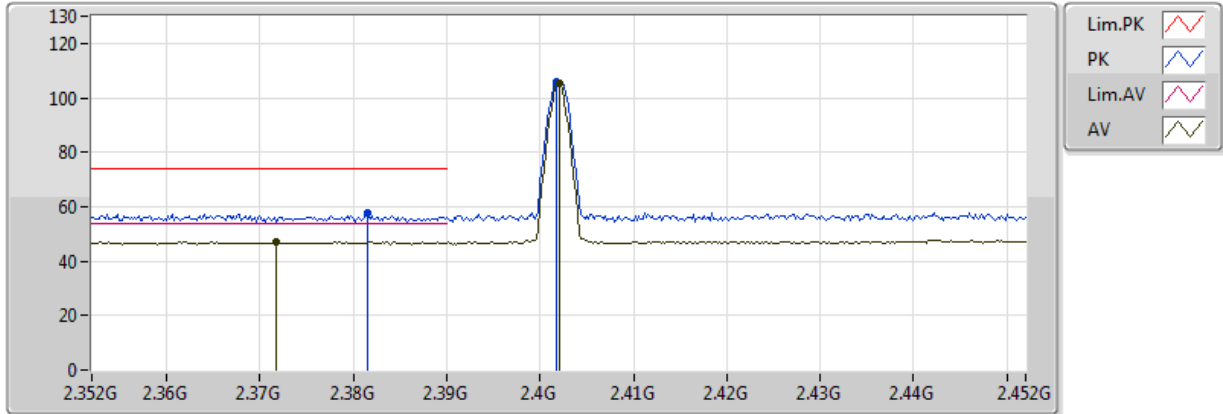


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.3718G	47.22	54.00	-6.78	30.86	3	Horizontal	133	1.17	-
AV	2.402G	105.24	Inf	-Inf	30.95	3	Horizontal	133	1.17	-
PK	2.3816G	57.58	74.00	-16.42	30.89	3	Horizontal	133	1.17	-
PK	2.4018G	105.77	Inf	-Inf	30.95	3	Horizontal	133	1.17	-

### BT-LE(1Mbps)

### 2402MHz\_TX

18/05/2018

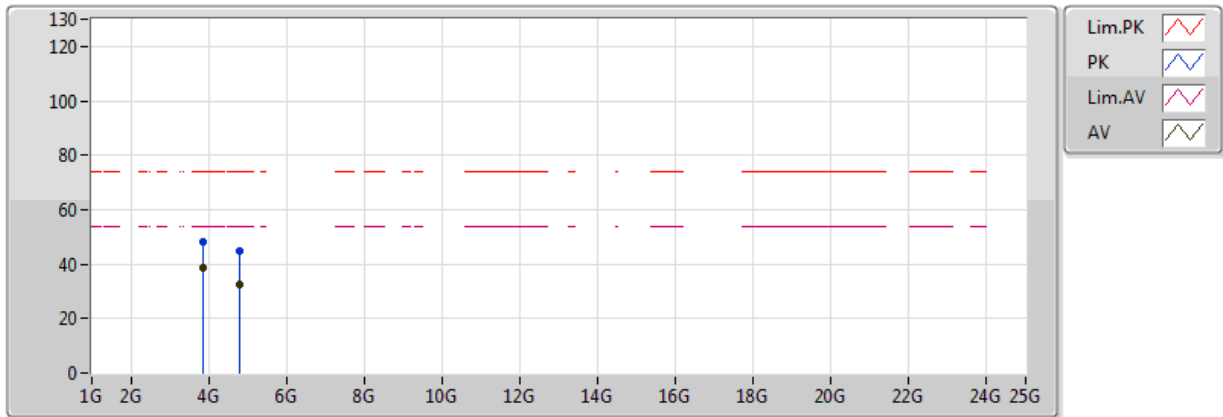


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	3.843136G	38.40	54.00	-15.60	-0.82	3	Vertical	70	2.91	-
AV	4.804032G	32.67	54.00	-21.33	1.90	3	Vertical	294	1.58	-
PK	3.843184G	48.46	74.00	-25.54	-0.82	3	Vertical	70	2.91	-
PK	4.803816G	44.62	74.00	-29.38	1.90	3	Vertical	294	1.58	-

### BT-LE(1Mbps)

### 2402MHz\_TX

18/05/2018

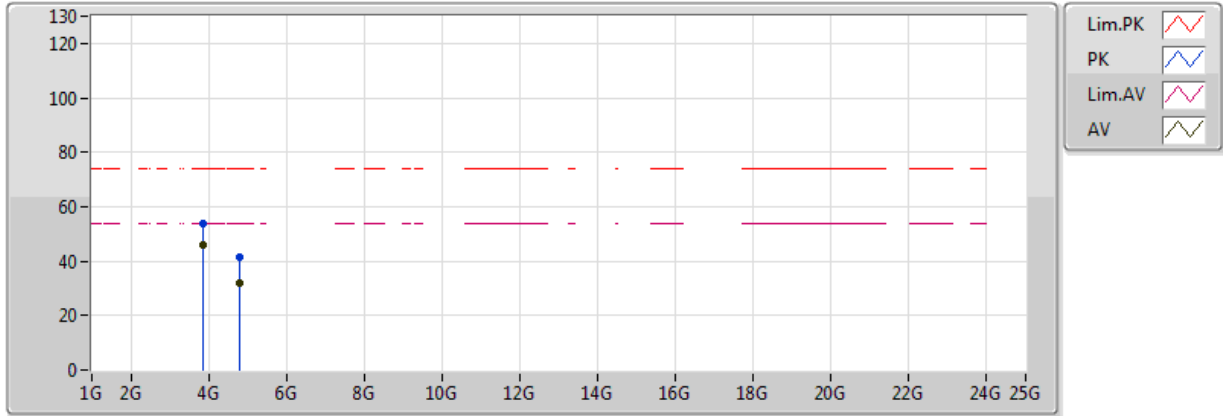


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	3.84318G	45.86	54.00	-8.14	-0.82	3	Horizontal	143	1.50	-
AV	4.8015G	32.09	54.00	-21.91	1.89	3	Horizontal	49	1.06	-
PK	3.84318G	53.77	74.00	-20.23	-0.82	3	Horizontal	143	1.50	-
PK	4.8015G	41.71	74.00	-32.29	1.89	3	Horizontal	49	1.06	-

### BT-LE(1Mbps)

### 2440MHz\_TX

18/05/2018

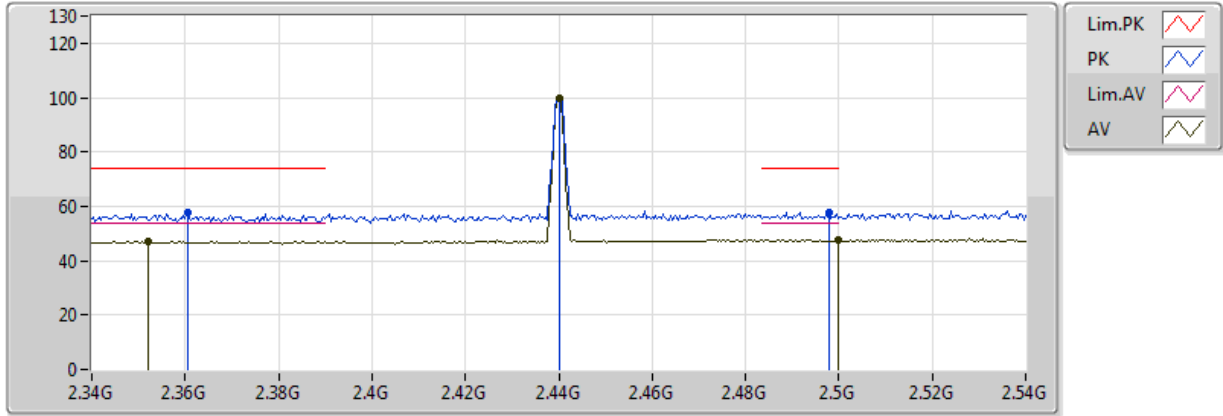


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.352G	47.22	54.00	-6.78	30.79	3	Vertical	227	3.09	-
AV	2.44G	99.47	Inf	-Inf	31.07	3	Vertical	227	3.09	-
AV	2.499998G	47.72	54.00	-6.28	31.26	3	Vertical	227	3.09	-
PK	2.3604G	57.44	74.00	-16.56	30.82	3	Vertical	227	3.09	-
PK	2.44G	100.01	Inf	-Inf	31.07	3	Vertical	227	3.09	-
PK	2.498G	57.96	74.00	-16.04	31.26	3	Vertical	227	3.09	-

### BT-LE(1Mbps)

### 2440MHz\_TX

18/05/2018

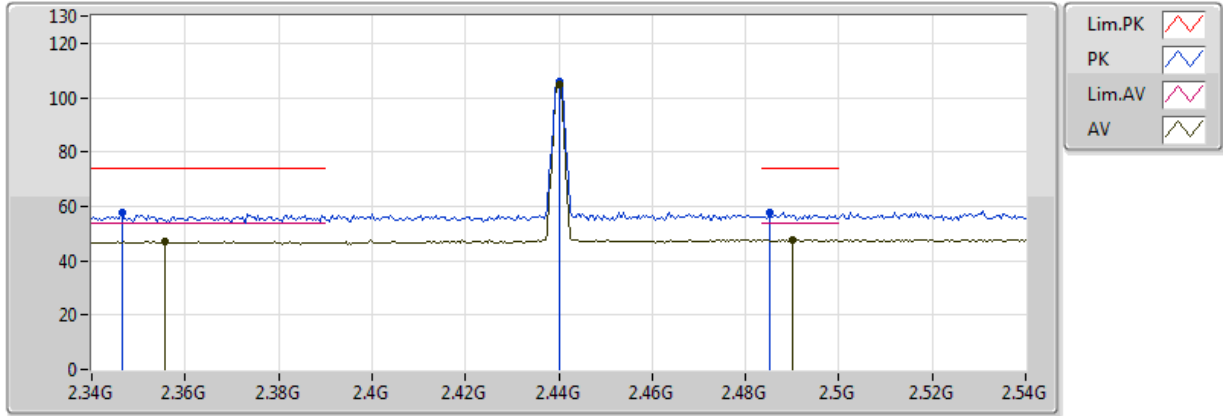


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.3556G	47.22	54.00	-6.78	30.80	3	Horizontal	234	1.50	-
AV	2.44G	104.79	Inf	-Inf	31.07	3	Horizontal	234	1.50	-
AV	2.49G	47.70	54.00	-6.30	31.23	3	Horizontal	234	1.50	-
PK	2.3464G	57.54	74.00	-16.46	30.78	3	Horizontal	234	1.50	-
PK	2.44G	105.68	Inf	-Inf	31.07	3	Horizontal	234	1.50	-
PK	2.4852G	57.77	74.00	-16.23	31.22	3	Horizontal	234	1.50	-

### BT-LE(1Mbps)

### 2440MHz\_TX

18/05/2018

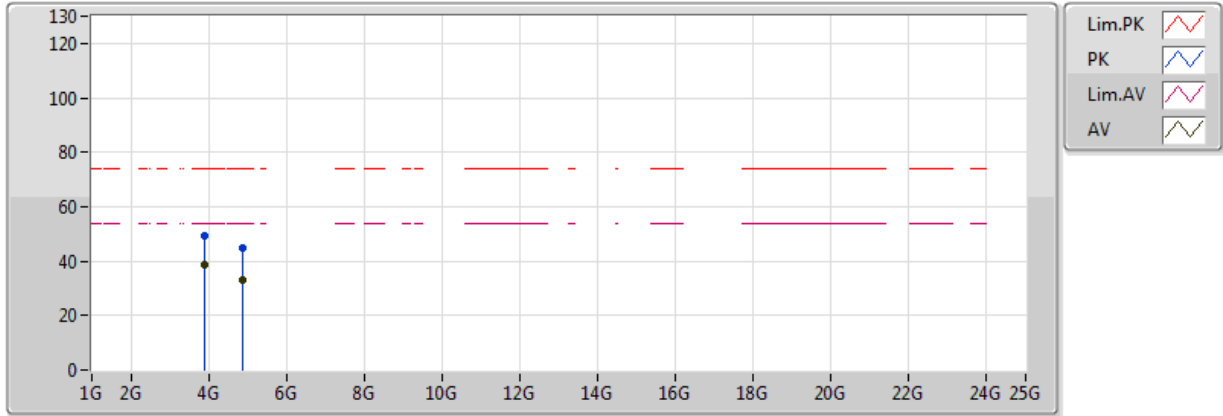


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	3.90395G	38.78	54.00	-15.22	-0.66	3	Vertical	62	2.62	-
AV	4.880028G	32.83	54.00	-21.17	2.07	3	Vertical	87	2.25	-
PK	3.903894G	49.31	74.00	-24.69	-0.66	3	Vertical	62	2.62	-
PK	4.879916G	44.99	74.00	-29.01	2.07	3	Vertical	87	2.25	-

### BT-LE(1Mbps)

### 2440MHz\_TX

18/05/2018

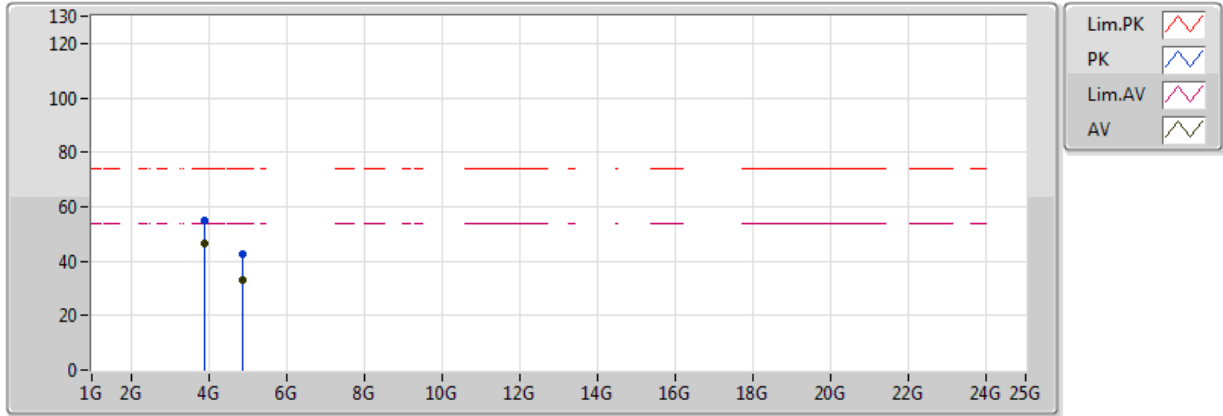


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	3.903994G	46.25	54.00	-7.75	-0.66	3	Horizontal	143	1.50	-
AV	4.880132G	32.83	54.00	-21.17	2.07	3	Horizontal	130	2.37	-
PK	3.903994G	55.00	74.00	-19.00	-0.66	3	Horizontal	143	1.50	-
PK	4.880132G	42.33	74.00	-31.67	2.07	3	Horizontal	130	2.37	-



### BT-LE(1Mbps)

### 2480MHz\_TX

18/05/2018

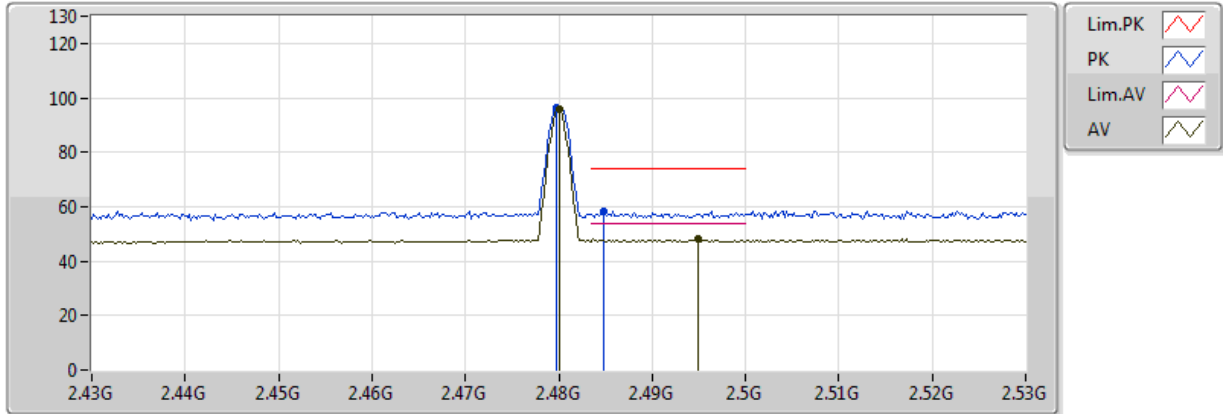


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.48G	95.93	Inf	-Inf	31.20	3	Vertical	265	3.09	-
AV	2.495G	47.97	54.00	-6.03	31.25	3	Vertical	265	3.09	-
PK	2.4798G	96.50	Inf	-Inf	31.20	3	Vertical	265	3.09	-
PK	2.4848G	58.38	74.00	-15.62	31.22	3	Vertical	265	3.09	-

### BT-LE(1Mbps)

### 2480MHz\_TX

18/05/2018


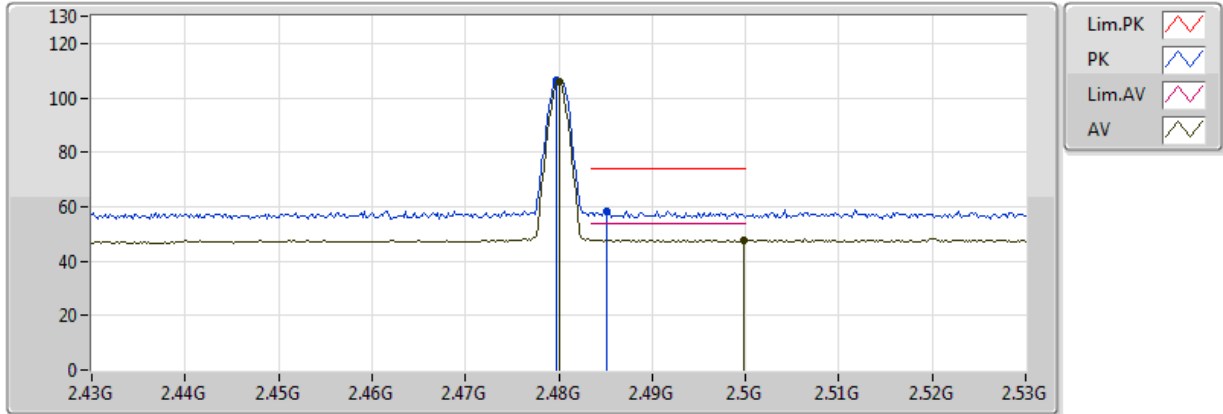


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.48G	105.79	Inf	-Inf	31.20	3	Horizontal	134	1.34	-
AV	2.4998G	47.72	54.00	-6.28	31.26	3	Horizontal	134	1.34	-
PK	2.4798G	106.36	Inf	-Inf	31.20	3	Horizontal	134	1.34	-
PK	2.4852G	58.46	74.00	-15.54	31.22	3	Horizontal	134	1.34	-

### BT-LE(1Mbps)

### 2480MHz\_TX

18/05/2018


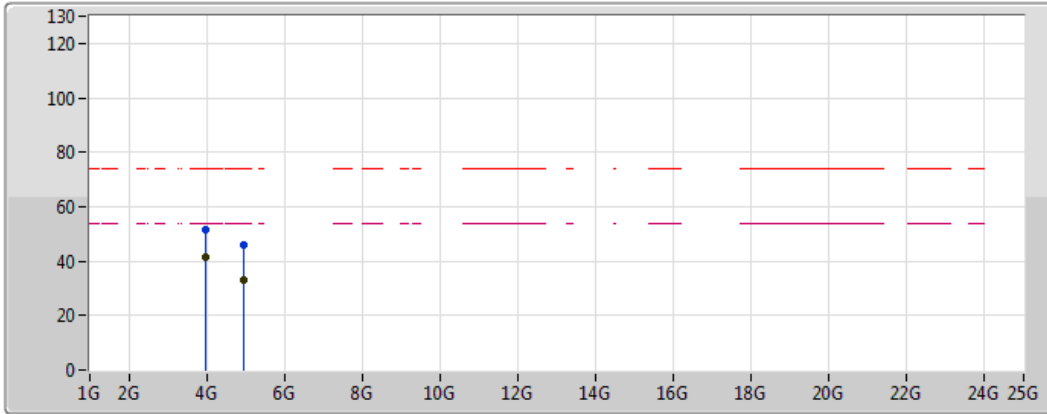


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	3.967968G	41.69	54.00	-12.31	-0.51	3	Vertical	156	2.55	-
AV	4.959553G	32.98	54.00	-21.02	2.27	3	Vertical	40	2.12	-
PK	3.967773G	51.62	74.00	-22.38	-0.51	3	Vertical	156	2.55	-
PK	4.959489G	45.68	74.00	-28.32	2.27	3	Vertical	40	2.12	-

### BT-LE(1Mbps)

### 2480MHz\_TX

18/05/2018

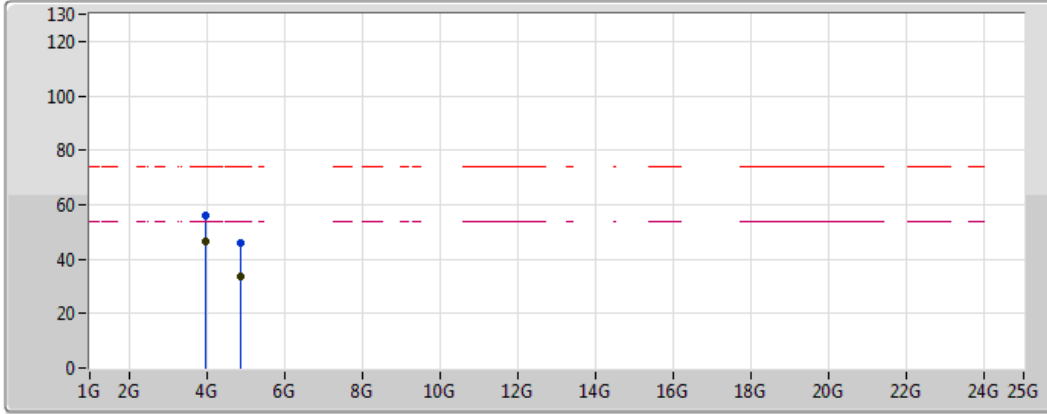

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	3.967962G	46.63	54.00	-7.37	-0.51	3	Horizontal	145	1.45	-
AV	4.879932G	33.42	54.00	-20.58	2.07	3	Horizontal	158	1.89	-
PK	3.967986G	55.79	74.00	-18.21	-0.51	3	Horizontal	145	1.45	-
PK	4.880966G	45.80	74.00	-28.20	2.07	3	Horizontal	158	1.89	-