


FCC Test Report

FCC ID : ACQ-VIP7802
Equipment : WiFi Set Top Box
Model No. : VIP7802
Brand Name : ARRIS
Applicant : ARRIS Group, Inc.
Address : 101 Tournament Drive, Horsham,
Pennsylvania, United States 19044
Standard : 47 CFR FCC Part 15.247
Received Date : Feb. 03, 2021
Tested Date : Feb. 19 ~ Mar. 29, 2021


We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:

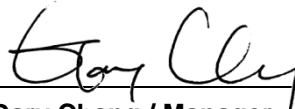

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION.....	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth.....	14
3.3	RF Output Power.....	22
3.4	Power Spectral Density	25
3.5	Emissions in Restricted Frequency Bands.....	33
3.6	Emissions in non-restricted Frequency Bands.....	49
4	TEST LABORATORY INFORMATION	56

Release Record

Report No.	Version	Description	Issued Date
FR120304AE	Rev. 01	Initial issue	May 04, 2021

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.581MHz 32.38 (Margin -13.62dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 75.82MHz 35.13 (Margin -4.87dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 5.71	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.0	2402-2480	0-39 [40]	125 kbps
				500 kbps
				1 Mbps
2400-2483.5	V5.0	2402-2480	0-39 [40]	2 Mbps

Note: Bluetooth LE (Low energy) uses GFSK modulation.

1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	PIFA	N/A	1.5	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from adapter
--------------------------	-------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Adapter	Brand: NeBit Model: NBS12F050200VU Power Rating: I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 5Vdc, 2A Power Line: 0.75m non-shielded without core
2	Remote control	Brand: Bell Model: 2855-001
3	HDMI	1.83m shielded without core
4	SD card	Brand: SanDisk Model: SDSDQEC-008G Capacity: 8GB

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	Tera term, Version: V4.66	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
GFSK-125kbps	83.52%	0.78
GFSK-500kbps	57.41%	2.41
GFSK-1Mbps	65.28%	1.85
GFSK-2Mbps	32.87%	4.83

1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
GFSK/125kbps	default	default	default
GFSK/500kbps	default	default	default
GFSK/1Mbps	default	default	default
GFSK/2Mbps	default	default	default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	RJ45	ICC	RJ45-10m	---	---
3	TV	CHIMEI	TL-24LF500D	---	---
4	Fixture	ARRIS	240684-125 REV:1	---	Provided by applicant.
5	RS232	---	---	---	Provided by applicant.
6	USB cable	---	---	---	Provided by applicant.
7	Notebook	DELL	Latitude E5470	DoC	---

Note: The fixture (No.4), RS232 (No.5), USB cable (No.6) and notebook (No.7) are disconnected from EUT and removed from test table when EUT is set to transmit continuously.

1.3 Test Setup Chart

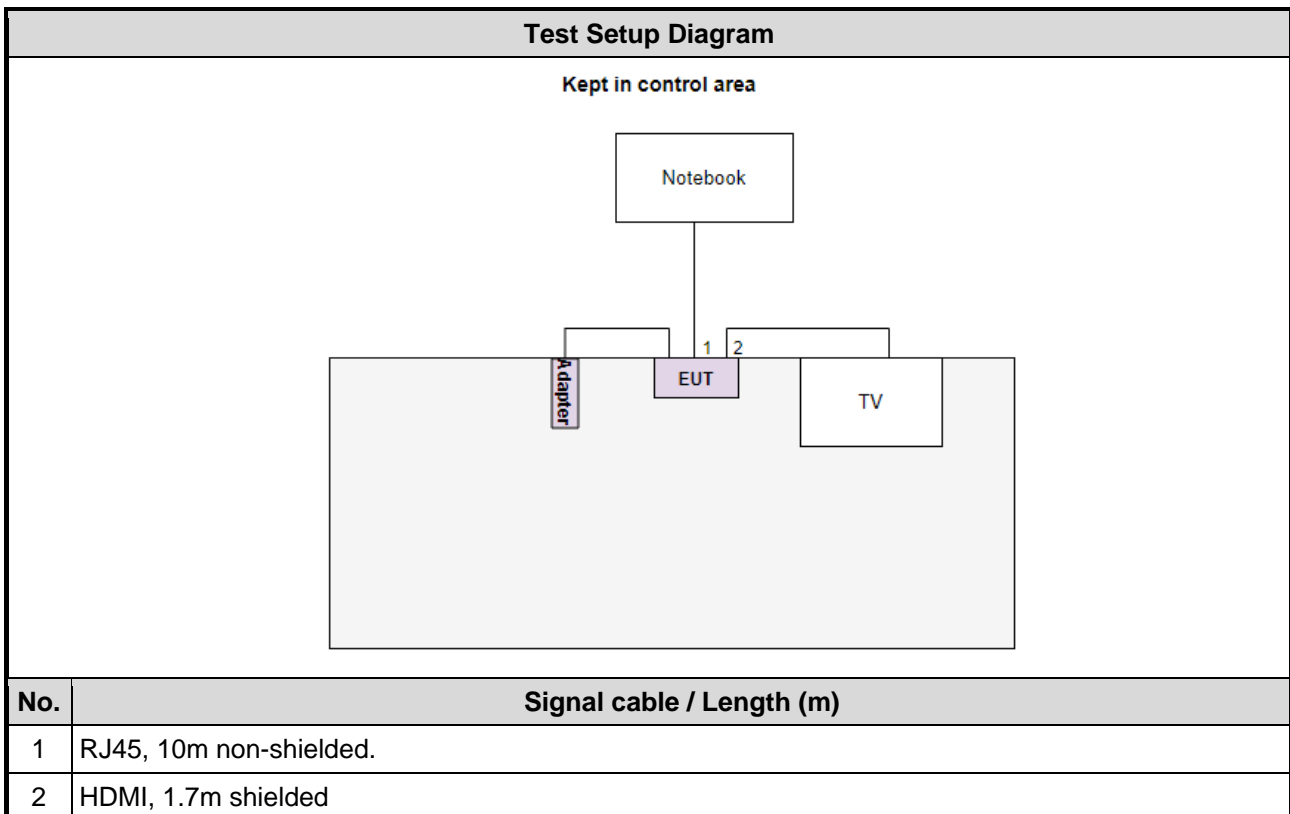

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Mar. 08, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	100003	Dec. 15, 2020	Dec. 14, 2021
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 29, 2020	Dec. 28, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021
50 ohm terminal (Support Unit)	NA	50	04	Jun. 05, 2020	Jun. 04, 2021
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Test Date	Feb. 19, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 29, 2020	Apr. 28, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 22, 2020	Dec. 21, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Preamplifier	EMC	EMC02325	980187	Aug. 05, 2020	Aug. 04, 2021
Preamplifier	Agilent	83017A	MY39501309	Sep. 02, 2020	Sep. 01, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 26, 2020	Sep. 25, 2021
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 26, 2020	Sep. 25, 2021
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 26, 2020	Sep. 25, 2021
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 26, 2020	Sep. 25, 2021
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 26, 2020	Sep. 25, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Test Date	Mar. 29, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Power Sensor	Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
Measurement Software	-	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.96 dB
Radiated emission > 1 GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.
Test Site	03CH03-WS
Address of Test Site	No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions \leq 1GHz	BT LE	2402	2Mbps	---
Maximum Output Power 6dB bandwidth Power spectral density	BT LE BT LE BT LE BT LE	2402, 2440, 2480 2402, 2440, 2480 2402, 2440, 2480 2402, 2440, 2480	125kbps 500kbps 1Mbps 2Mbps	---
Radiated Emissions > 1GHz	BT LE BT LE	2402, 2440, 2480 2402, 2440, 2480	1Mbps 2Mbps	---

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

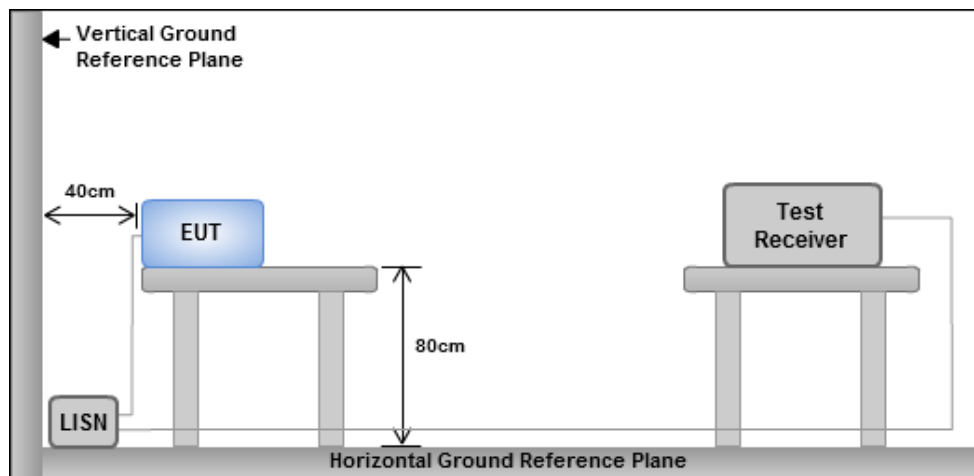

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

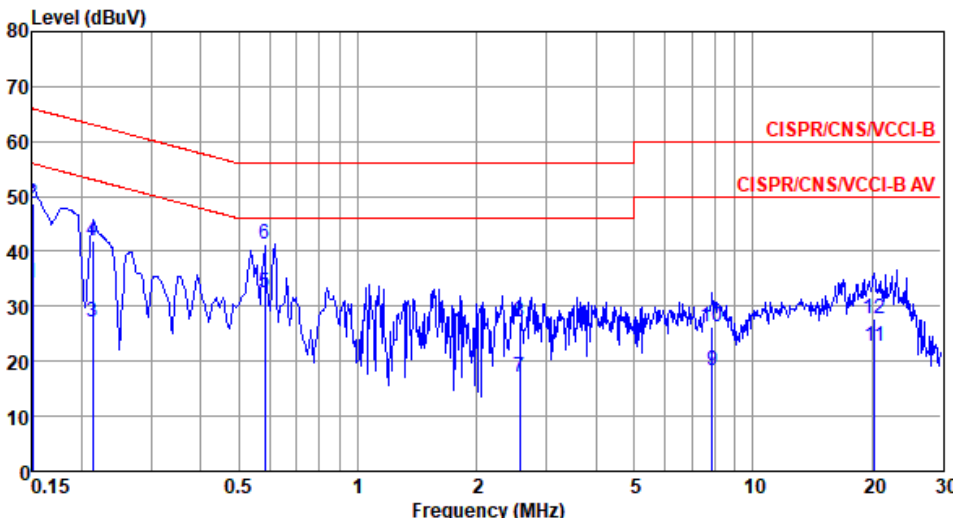Modulation Mode	BT LE-2Mbps	Test Freq. (MHz)	2402																																																																																																																					
Power Phase	Line																																																																																																																							
<p>Test by : Alex Tsai Temperature: 23°C Humidity: 63%</p>																																																																																																																								
																																																																																																																								
<table border="1"> <thead> <tr> <th></th> <th>Freq MHz</th> <th>Level dBuV</th> <th>Limit Line dBuV</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Cable loss dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.150</td> <td>34.22</td> <td>56.00</td> <td>-21.78</td> <td>24.36</td> <td>9.81</td> <td>0.05</td> <td>Average</td> </tr> <tr> <td>2</td> <td>0.150</td> <td>48.79</td> <td>66.00</td> <td>-17.21</td> <td>38.93</td> <td>9.81</td> <td>0.05</td> <td>QP</td> </tr> <tr> <td>3</td> <td>0.213</td> <td>27.05</td> <td>53.10</td> <td>-26.05</td> <td>17.17</td> <td>9.82</td> <td>0.06</td> <td>Average</td> </tr> <tr> <td>4</td> <td>0.213</td> <td>41.84</td> <td>63.10</td> <td>-21.26</td> <td>31.96</td> <td>9.82</td> <td>0.06</td> <td>QP</td> </tr> <tr> <td>5*</td> <td>0.581</td> <td>32.38</td> <td>46.00</td> <td>-13.62</td> <td>22.36</td> <td>9.92</td> <td>0.10</td> <td>Average</td> </tr> <tr> <td>6</td> <td>0.581</td> <td>41.39</td> <td>56.00</td> <td>-14.61</td> <td>31.37</td> <td>9.92</td> <td>0.10</td> <td>QP</td> </tr> <tr> <td>7</td> <td>2.567</td> <td>17.16</td> <td>46.00</td> <td>-28.84</td> <td>6.95</td> <td>9.99</td> <td>0.22</td> <td>Average</td> </tr> <tr> <td>8</td> <td>2.567</td> <td>27.18</td> <td>56.00</td> <td>-28.82</td> <td>16.97</td> <td>9.99</td> <td>0.22</td> <td>QP</td> </tr> <tr> <td>9</td> <td>7.893</td> <td>18.22</td> <td>50.00</td> <td>-31.78</td> <td>7.78</td> <td>10.07</td> <td>0.37</td> <td>Average</td> </tr> <tr> <td>10</td> <td>7.893</td> <td>26.33</td> <td>60.00</td> <td>-33.67</td> <td>15.89</td> <td>10.07</td> <td>0.37</td> <td>QP</td> </tr> <tr> <td>11</td> <td>20.270</td> <td>22.65</td> <td>50.00</td> <td>-27.35</td> <td>11.68</td> <td>10.30</td> <td>0.67</td> <td>Average</td> </tr> <tr> <td>12</td> <td>20.270</td> <td>27.74</td> <td>60.00</td> <td>-32.26</td> <td>16.77</td> <td>10.30</td> <td>0.67</td> <td>QP</td> </tr> </tbody> </table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark	1	0.150	34.22	56.00	-21.78	24.36	9.81	0.05	Average	2	0.150	48.79	66.00	-17.21	38.93	9.81	0.05	QP	3	0.213	27.05	53.10	-26.05	17.17	9.82	0.06	Average	4	0.213	41.84	63.10	-21.26	31.96	9.82	0.06	QP	5*	0.581	32.38	46.00	-13.62	22.36	9.92	0.10	Average	6	0.581	41.39	56.00	-14.61	31.37	9.92	0.10	QP	7	2.567	17.16	46.00	-28.84	6.95	9.99	0.22	Average	8	2.567	27.18	56.00	-28.82	16.97	9.99	0.22	QP	9	7.893	18.22	50.00	-31.78	7.78	10.07	0.37	Average	10	7.893	26.33	60.00	-33.67	15.89	10.07	0.37	QP	11	20.270	22.65	50.00	-27.35	11.68	10.30	0.67	Average	12	20.270	27.74	60.00	-32.26	16.77	10.30	0.67	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark																																																																																																																
1	0.150	34.22	56.00	-21.78	24.36	9.81	0.05	Average																																																																																																																
2	0.150	48.79	66.00	-17.21	38.93	9.81	0.05	QP																																																																																																																
3	0.213	27.05	53.10	-26.05	17.17	9.82	0.06	Average																																																																																																																
4	0.213	41.84	63.10	-21.26	31.96	9.82	0.06	QP																																																																																																																
5*	0.581	32.38	46.00	-13.62	22.36	9.92	0.10	Average																																																																																																																
6	0.581	41.39	56.00	-14.61	31.37	9.92	0.10	QP																																																																																																																
7	2.567	17.16	46.00	-28.84	6.95	9.99	0.22	Average																																																																																																																
8	2.567	27.18	56.00	-28.82	16.97	9.99	0.22	QP																																																																																																																
9	7.893	18.22	50.00	-31.78	7.78	10.07	0.37	Average																																																																																																																
10	7.893	26.33	60.00	-33.67	15.89	10.07	0.37	QP																																																																																																																
11	20.270	22.65	50.00	-27.35	11.68	10.30	0.67	Average																																																																																																																
12	20.270	27.74	60.00	-32.26	16.77	10.30	0.67	QP																																																																																																																
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																								

Modulation Mode	BT LE-2Mbps	Test Freq. (MHz)	2402
Power Phase	Neutral		

Test by : Alex Tsai Temperature: 23°C Humidity: 63%

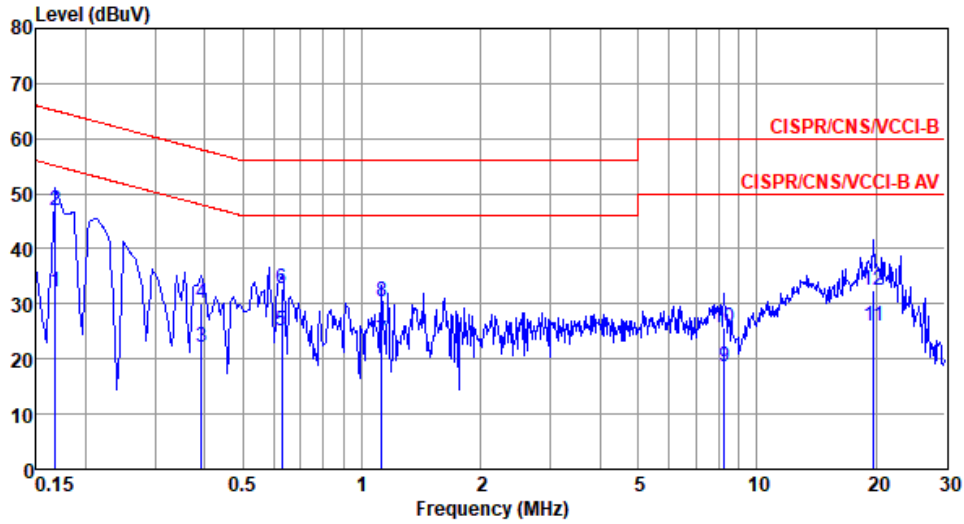

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark
1	0.168	32.16	55.08	-22.92	22.32	9.79	0.05	Average
2*	0.168	46.85	65.08	-18.23	37.01	9.79	0.05	QP
3	0.393	22.21	47.99	-25.78	12.30	9.83	0.08	Average
4	0.393	30.21	57.99	-27.78	20.30	9.83	0.08	QP
5	0.627	25.17	46.00	-20.83	15.23	9.84	0.10	Average
6	0.627	32.91	56.00	-23.09	22.97	9.84	0.10	QP
7	1.123	23.29	46.00	-22.71	13.30	9.86	0.13	Average
8	1.123	30.41	56.00	-25.59	20.42	9.86	0.13	QP
9	8.279	18.47	50.00	-31.53	8.06	10.03	0.38	Average
10	8.279	25.58	60.00	-34.42	15.17	10.03	0.38	QP
11	19.740	25.98	50.00	-24.02	15.00	10.31	0.67	Average
12	19.740	32.57	60.00	-27.43	21.59	10.31	0.67	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	25°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(125kbps)	699.275k	1.064M	1M06F1D	692.029k	1.06M
BT-LE(500kbps)	659.42k	1.035M	1M04F1D	659.42k	1.027M
BT-LE(1Mbps)	706.522k	1.042M	1M04F1D	702.899k	1.038M
BT-LE(2Mbps)	1.246M	2.041M	2M04F1D	1.232M	2.041M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	500k	699.275k	1.06M
2440MHz	Pass	500k	695.652k	1.064M
2480MHz	Pass	500k	692.029k	1.06M
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	500k	659.42k	1.027M
2440MHz	Pass	500k	659.42k	1.031M
2480MHz	Pass	500k	659.42k	1.035M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	702.899k	1.038M
2440MHz	Pass	500k	706.522k	1.038M
2480MHz	Pass	500k	706.522k	1.042M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.232M	2.041M
2440MHz	Pass	500k	1.246M	2.041M
2480MHz	Pass	500k	1.239M	2.041M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-LE(125kbps)

EBW-DTS


2402MHz

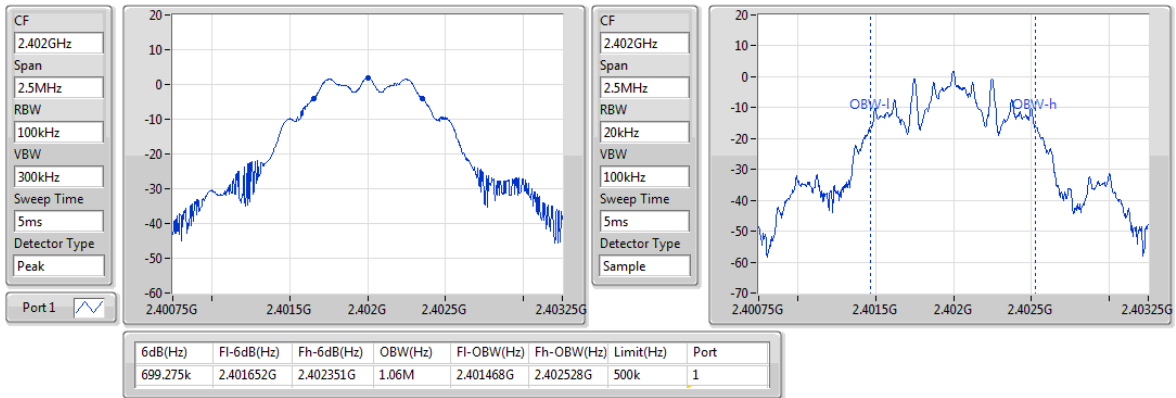

BT-LE(125kbps)

EBW-DTS


2440MHz

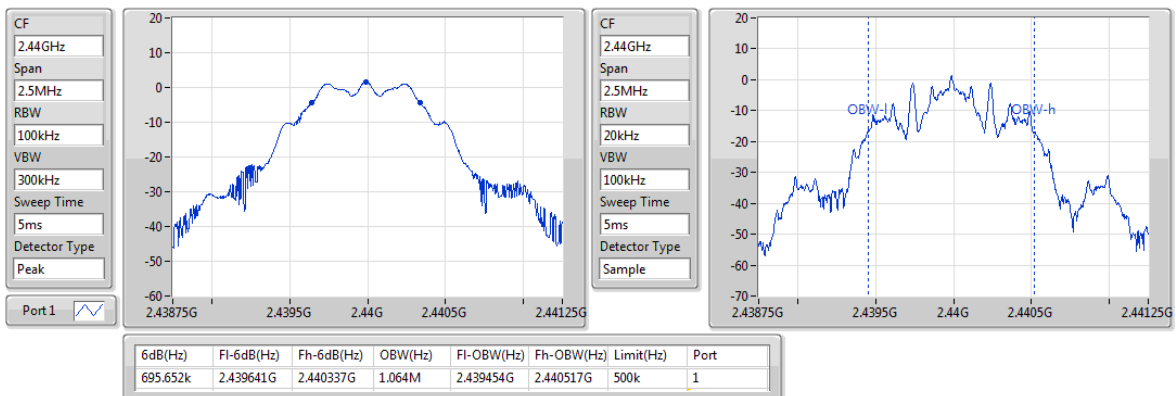

BT-LE(125kbps)

EBW-DTS


2480MHz

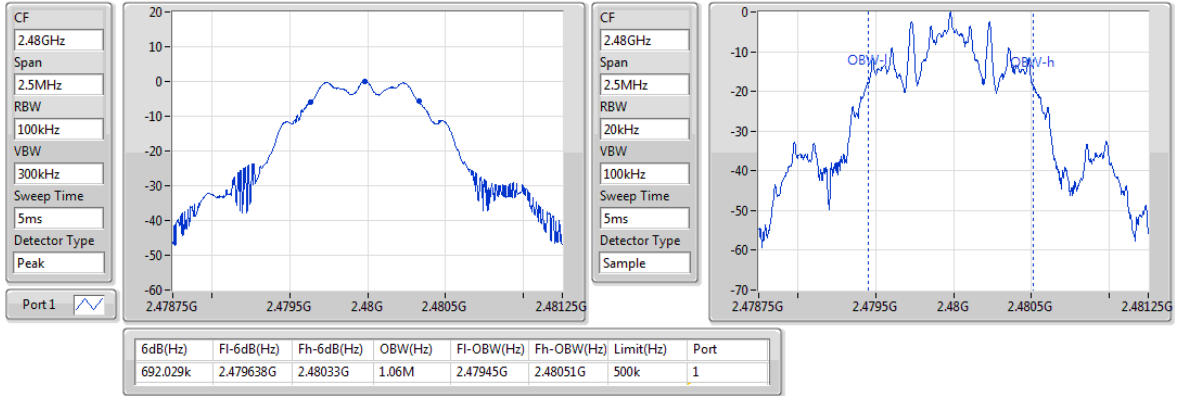

BT-LE(500kbps)

EBW-DTS


2402MHz

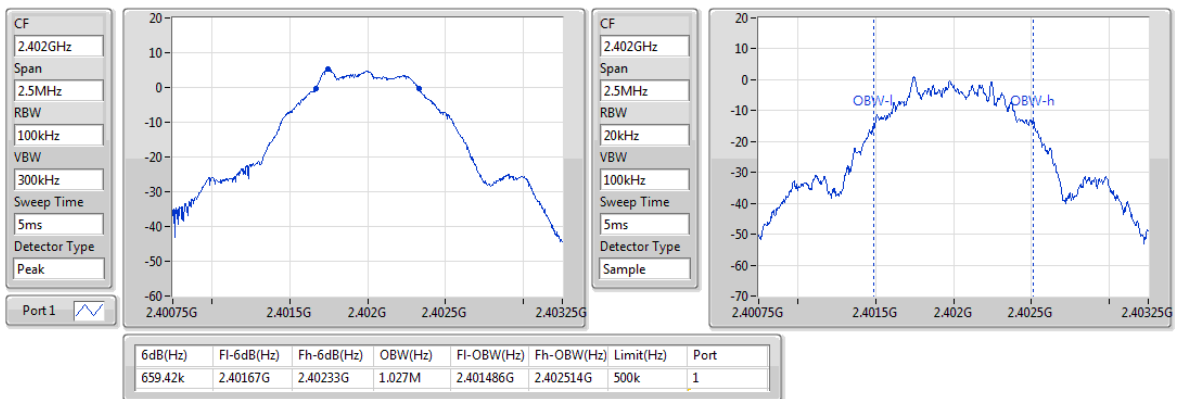

BT-LE(500kbps)

EBW-DTS


2440MHz

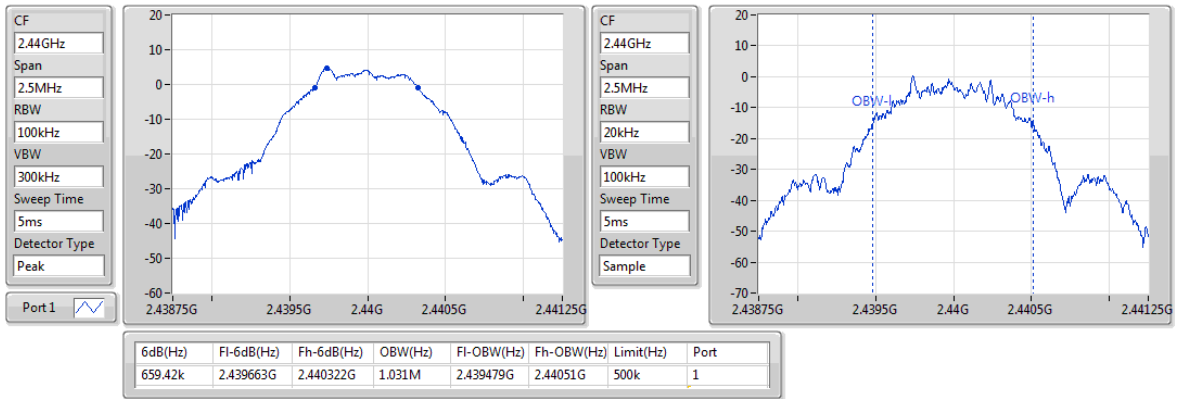

BT-LE(500kbps)

EBW-DTS


2480MHz

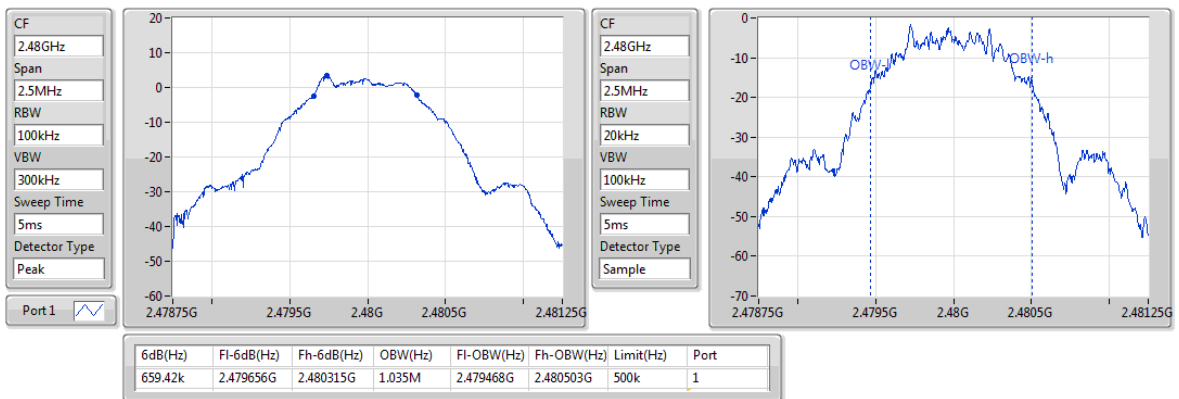

BT-LE(1Mbps)

EBW-DTS


2402MHz

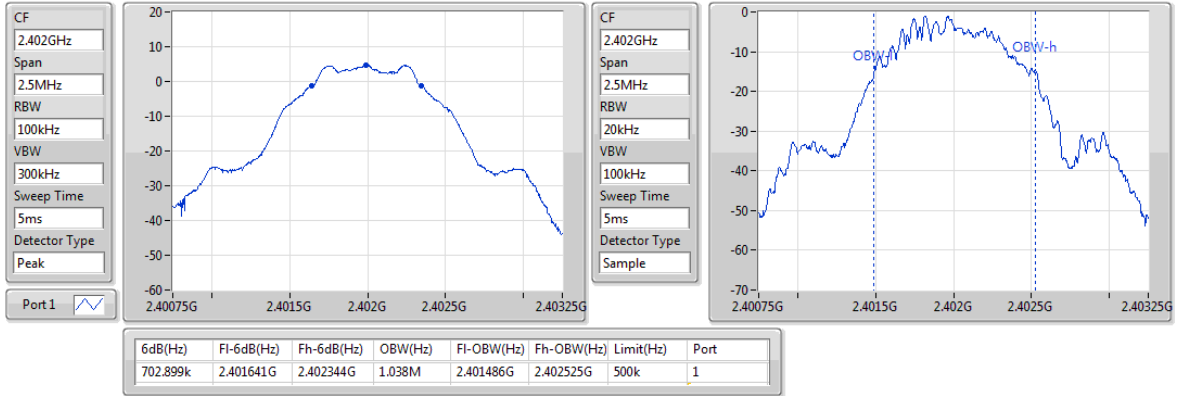

BT-LE(1Mbps)

EBW-DTS


2440MHz

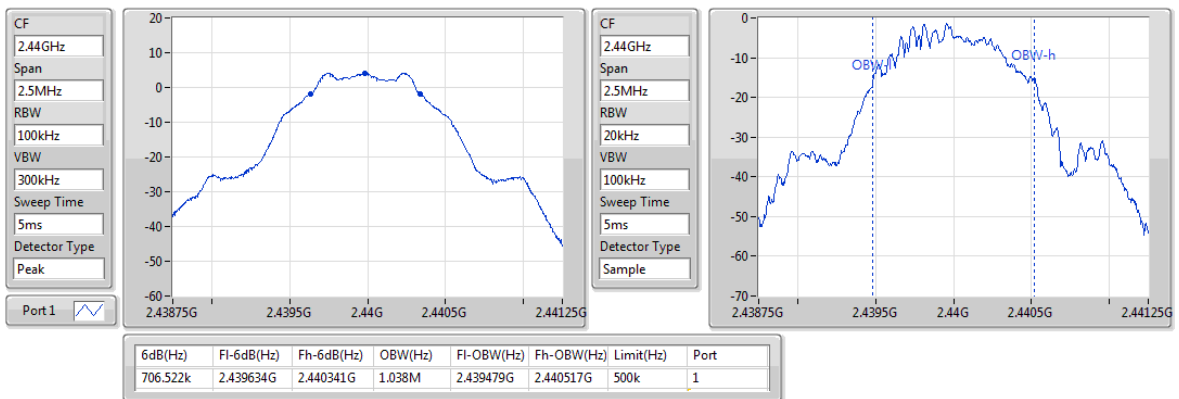

BT-LE(1Mbps)

EBW-DTS


2480MHz

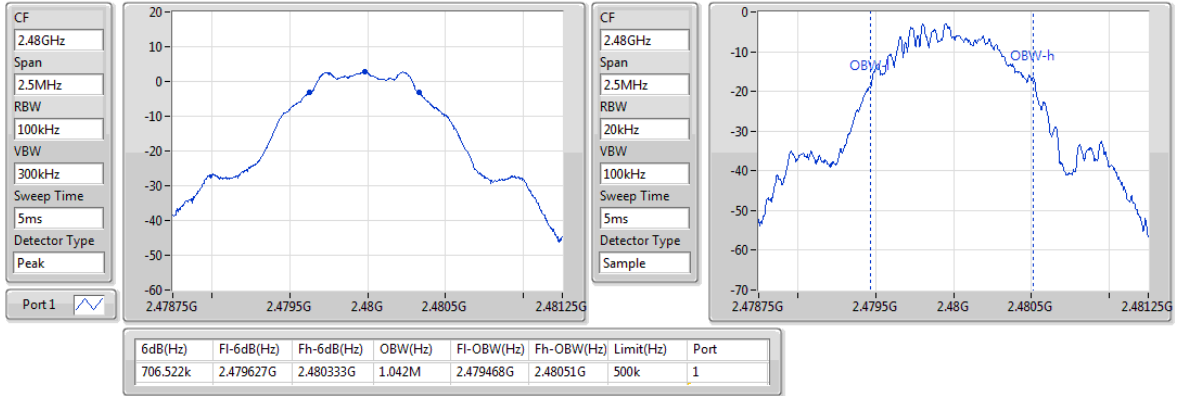

BT-LE(2Mbps)

EBW-DTS


2402MHz

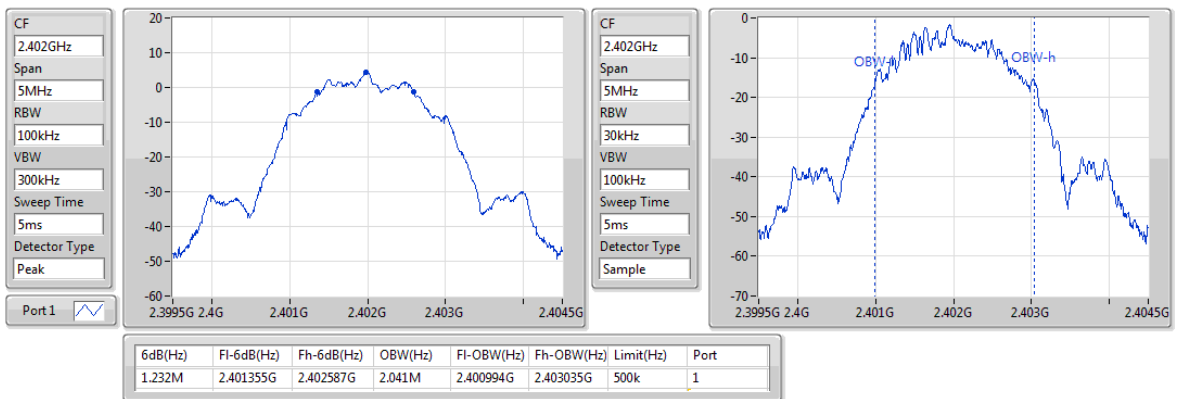

BT-LE(2Mbps)

EBW-DTS


2440MHz

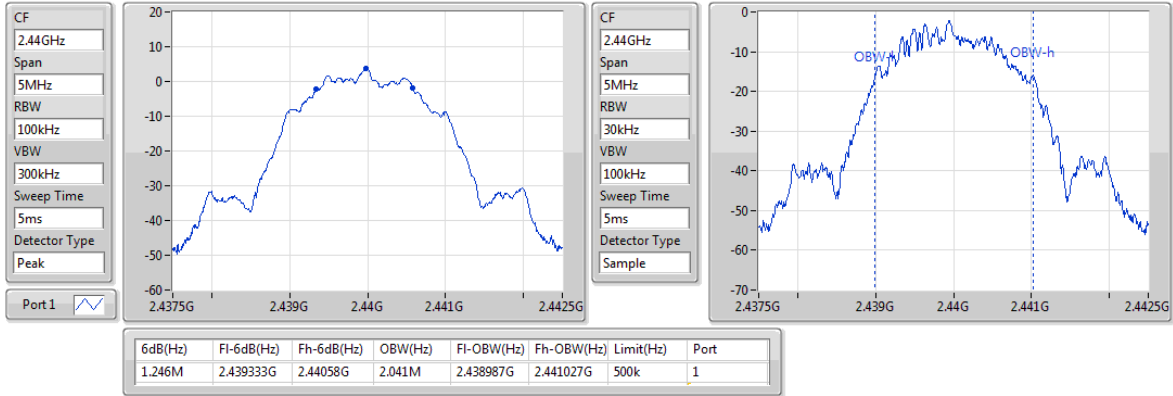

BT-LE(2Mbps)

EBW-DTS

2480MHz

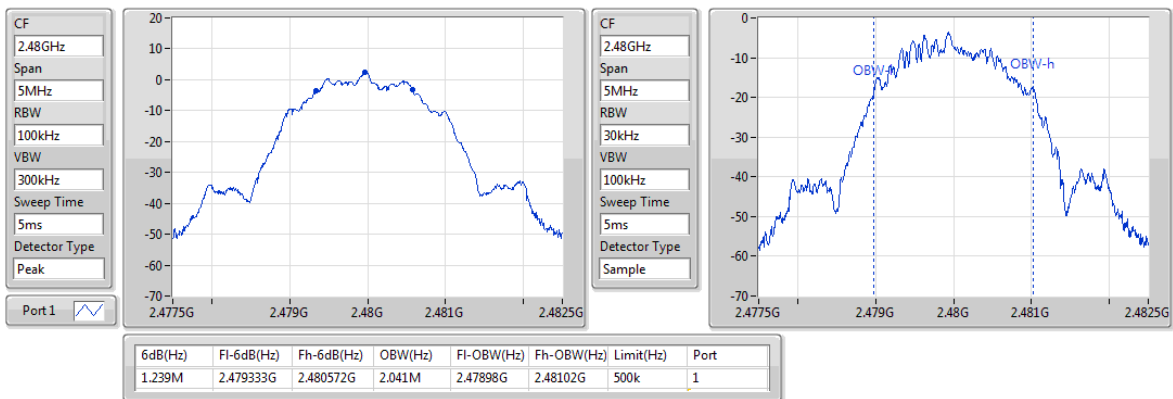

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Ambient Condition	25°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	5.55	0.00359
BT-LE(500kbps)	5.52	0.00356
BT-LE(1Mbps)	5.61	0.00364
BT-LE(2Mbps)	5.71	0.00372

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	1.50	5.55	30.00
2440MHz	Pass	1.50	4.99	30.00
2480MHz	Pass	1.50	3.62	30.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	1.50	5.52	30.00
2440MHz	Pass	1.50	4.93	30.00
2480MHz	Pass	1.50	3.57	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.50	5.61	30.00
2440MHz	Pass	1.50	5.02	30.00
2480MHz	Pass	1.50	3.72	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	1.50	5.71	30.00
2440MHz	Pass	1.50	5.16	30.00
2480MHz	Pass	1.50	3.87	30.00

Port X = Port X output power

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	5.35	0.00343
BT-LE(500kbps)	5.37	0.00344
BT-LE(1Mbps)	5.43	0.00349
BT-LE(2Mbps)	5.32	0.00340

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	1.50	5.35	-
2440MHz	Pass	1.50	4.80	-
2480MHz	Pass	1.50	3.40	-
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	1.50	5.37	-
2440MHz	Pass	1.50	4.79	-
2480MHz	Pass	1.50	3.36	-
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.50	5.43	-
2440MHz	Pass	1.50	4.85	-
2480MHz	Pass	1.50	3.52	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	1.50	5.32	-
2440MHz	Pass	1.50	4.81	-
2480MHz	Pass	1.50	3.42	-

Note: Average power is for reference only.

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Ambient Condition	25°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(125kbps)	-0.85
BT-LE(500kbps)	-0.87
BT-LE(1Mbps)	-9.99
BT-LE(2Mbps)	-12.26

RBW = 3kHz;

Result


Mode	Result	Antenna Gain (dBi)	PD (dBm/3kHz)	PD Limit (dBm/3kHz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	1.50	-0.85	8.00
2440MHz	Pass	1.50	-1.37	8.00
2480MHz	Pass	1.50	-2.78	8.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	1.50	-0.87	8.00
2440MHz	Pass	1.50	-1.59	8.00
2480MHz	Pass	1.50	-3.01	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.50	-9.99	8.00
2440MHz	Pass	1.50	-10.48	8.00
2480MHz	Pass	1.50	-11.95	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	1.50	-12.26	8.00
2440MHz	Pass	1.50	-12.85	8.00
2480MHz	Pass	1.50	-14.30	8.00

PD = Maximum power density; Port X = Port X Power Density;

BT-LE(125kbps)

PSD

2402MHz

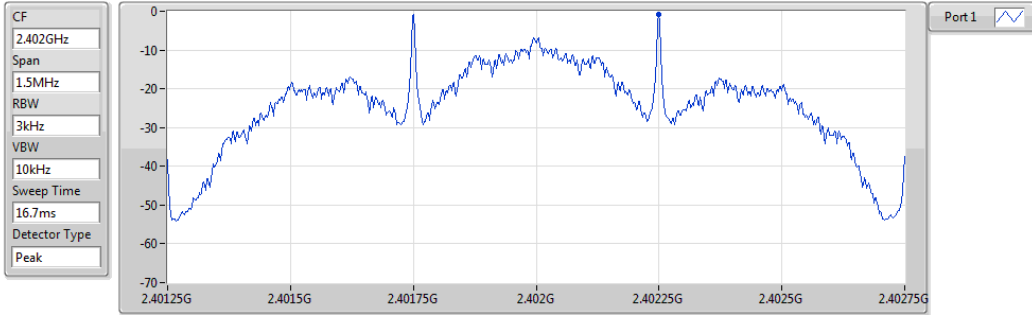


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.85	-0.85	-0.85

BT-LE(125kbps)

PSD

2440MHz

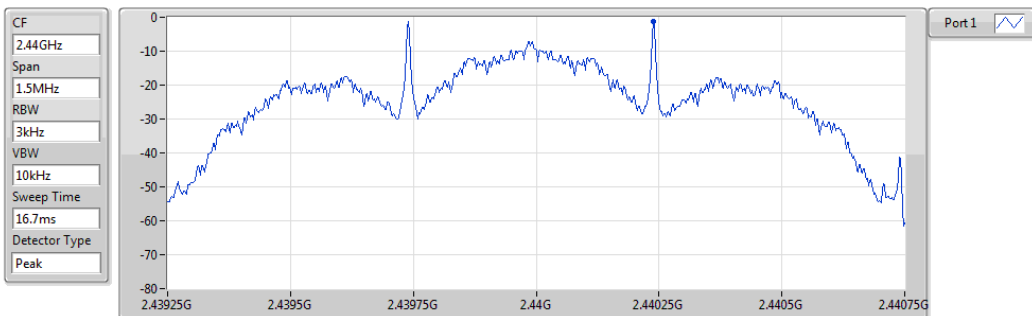


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.37	-1.37	-1.37

BT-LE(125kbps)

PSD

2480MHz

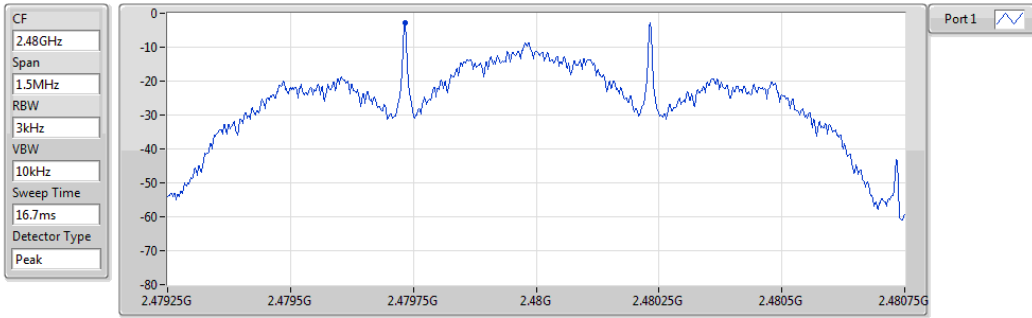


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.78	-2.78	-2.78

BT-LE(500kbps)

PSD

2402MHz

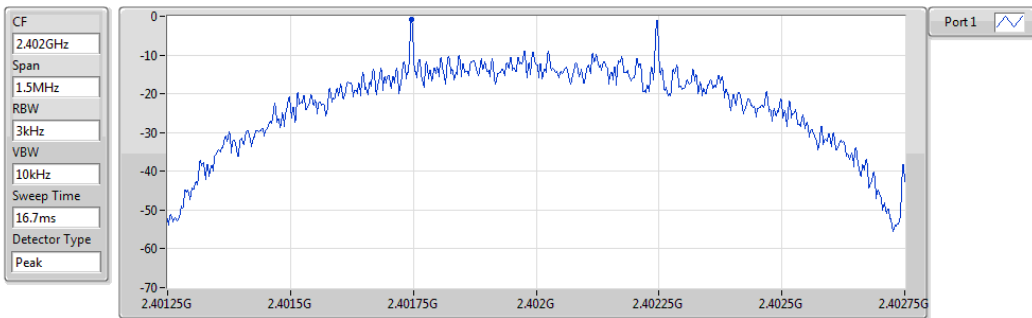


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.87	-0.87	-0.87

BT-LE(500kbps)

PSD

2440MHz

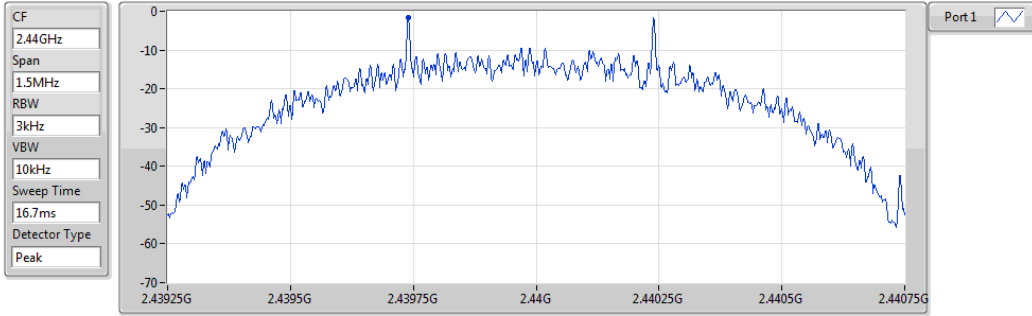


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.59	-1.59	-1.59

BT-LE(500kbps)

PSD

2480MHz

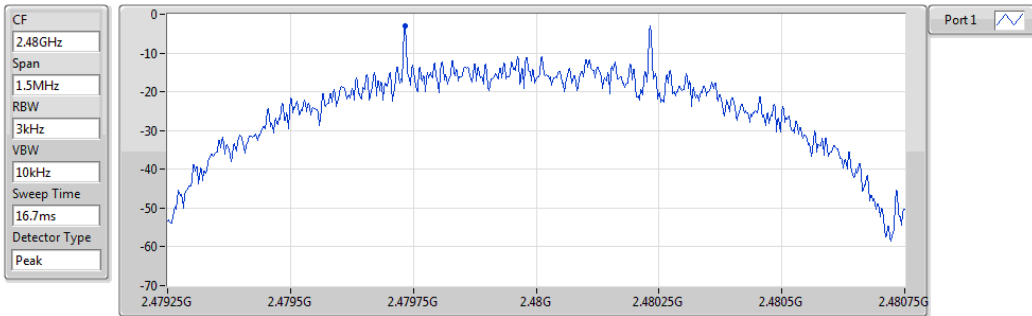


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.01	-3.01	-3.01

BT-LE(1Mbps)

PSD

2402MHz

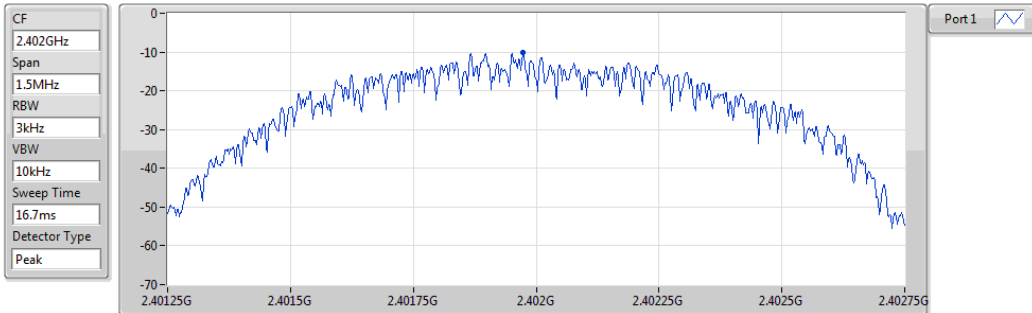


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.99	-9.99	-9.99

BT-LE(1Mbps)

PSD

2440MHz

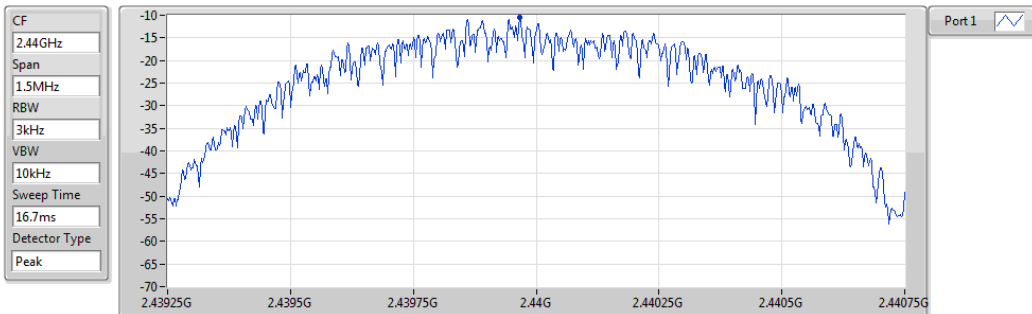


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.48	-10.48	-10.48

BT-LE(1Mbps)

PSD

2480MHz

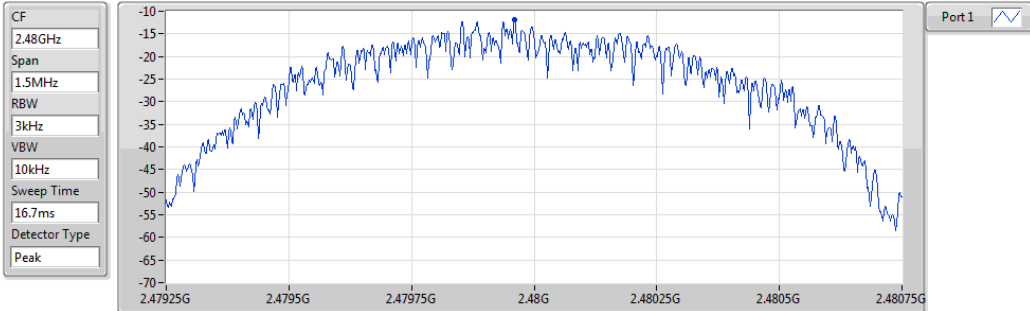


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-11.95	-11.95	-11.95

BT-LE(2Mbps)

PSD

2402MHz

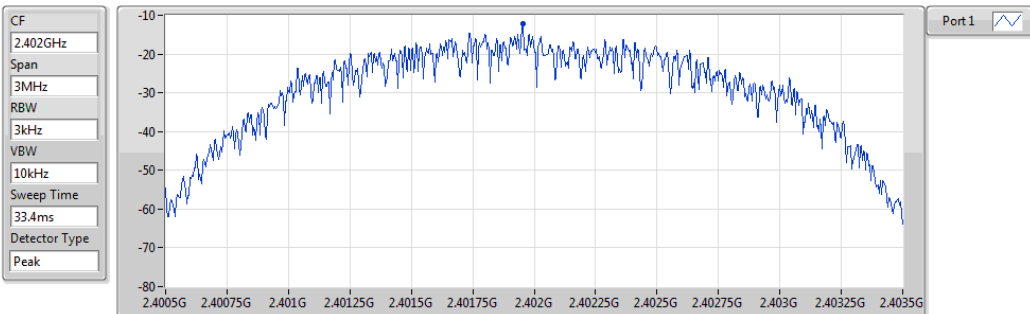


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.26	-12.26	-12.26

BT-LE(2Mbps)

PSD

2440MHz

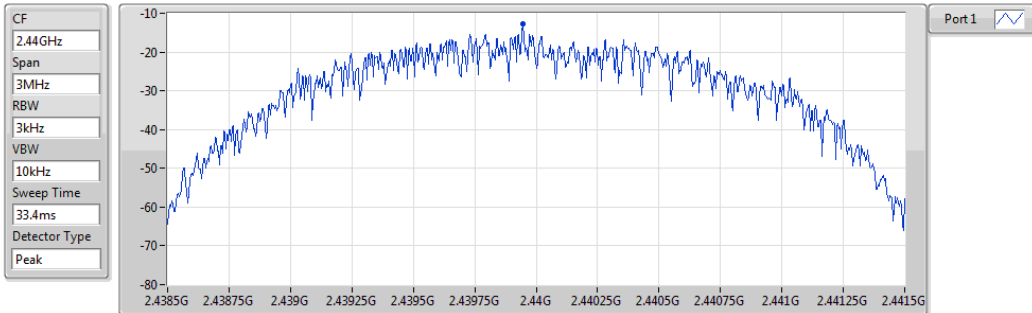


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.85	-12.85	-12.85

BT-LE(2Mbps)

PSD

2480MHz

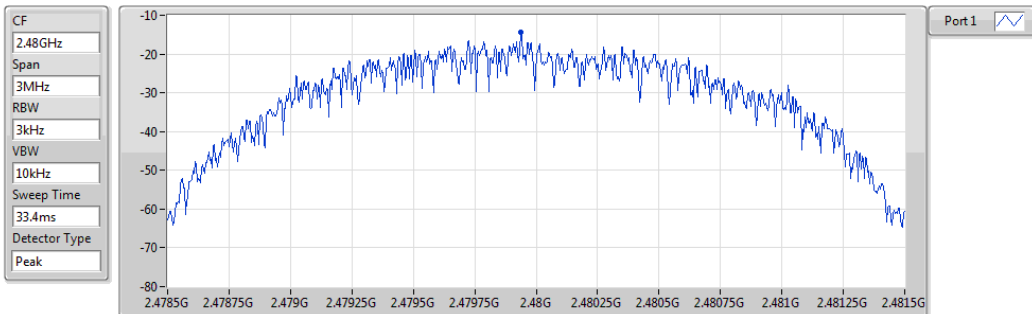

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.30	-14.30	-14.30

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup


Radiated Emissions below 1 GHz

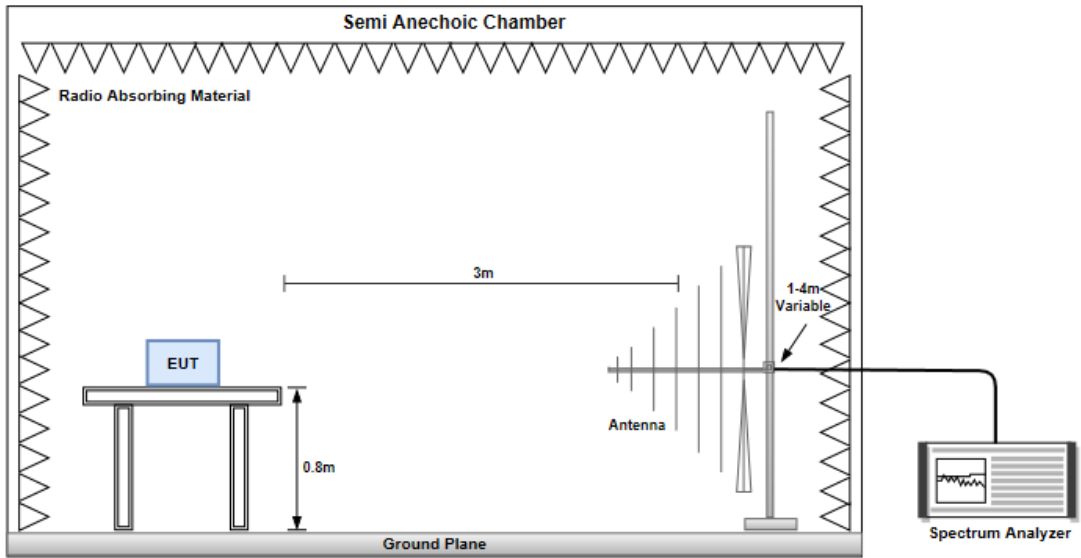

Radiated Emissions above 1 GHz

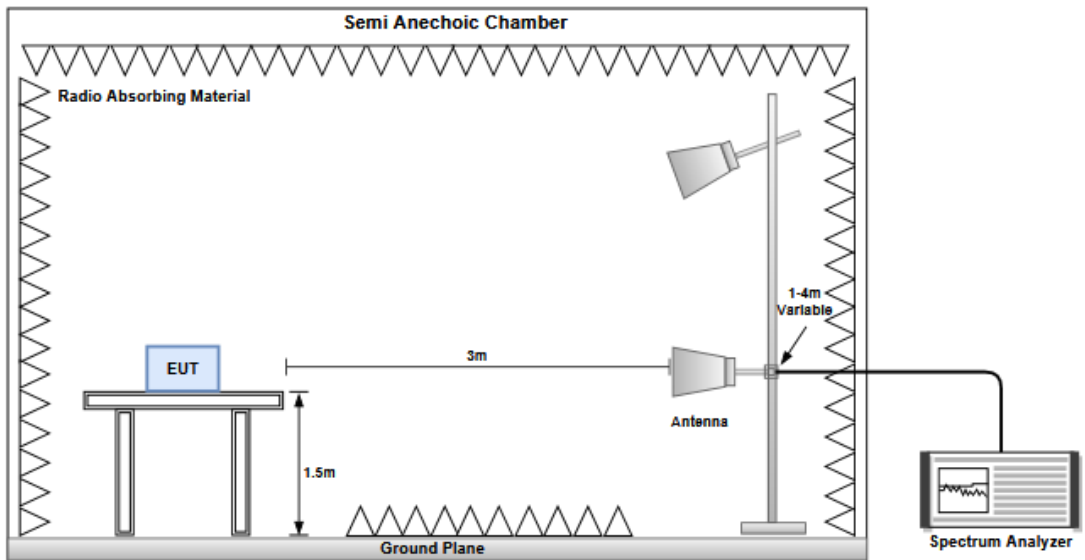


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

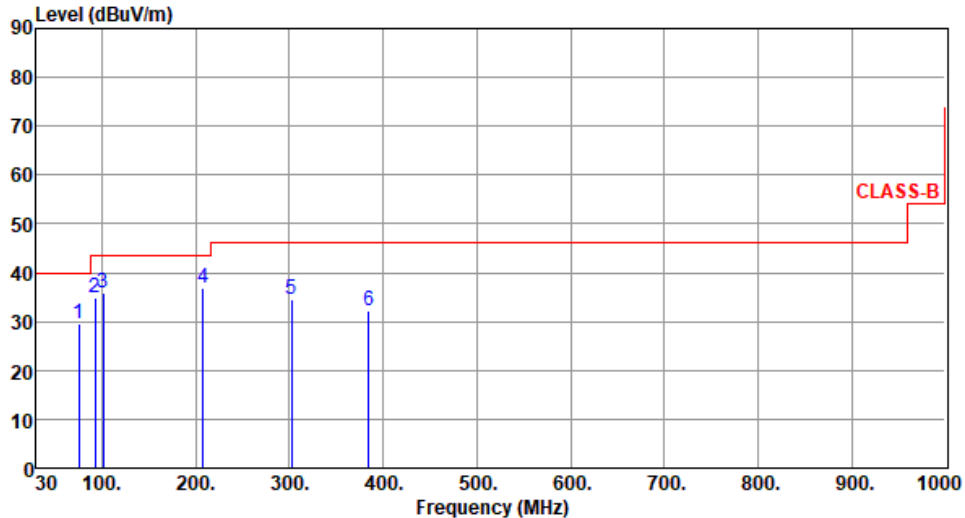Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402																																																																
Polarization	Horizontal																																																																		
Test By : Roger Lu Temperature(°C):23 Humidity(%):65																																																																			
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the CLASS-B limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 45 dBuV/m from 100 MHz to 1000 MHz. Six blue vertical lines indicate emission peaks at frequencies 1, 2, 3, 4, 5, and 6, with their respective levels and margins shown in the table below.</p>																																																																			
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>29.58</td> <td>40.00</td> <td>-10.42</td> <td>41.72</td> <td>-12.14</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>34.82</td> <td>43.50</td> <td>-8.68</td> <td>49.59</td> <td>-14.77</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>36.03</td> <td>43.50</td> <td>-7.47</td> <td>49.42</td> <td>-13.39</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>36.98</td> <td>43.50</td> <td>-6.52</td> <td>49.18</td> <td>-12.20</td> <td>QP</td> <td>124</td> <td>247</td> </tr> <tr> <td>5</td> <td>34.54</td> <td>46.00</td> <td>-11.46</td> <td>43.10</td> <td>-8.56</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>32.17</td> <td>46.00</td> <td>-13.83</td> <td>38.33</td> <td>-6.16</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	29.58	40.00	-10.42	41.72	-12.14	Peak	---	---	2	34.82	43.50	-8.68	49.59	-14.77	Peak	---	---	3	36.03	43.50	-7.47	49.42	-13.39	Peak	---	---	4	36.98	43.50	-6.52	49.18	-12.20	QP	124	247	5	34.54	46.00	-11.46	43.10	-8.56	Peak	---	---	6	32.17	46.00	-13.83	38.33	-6.16	Peak	---	---			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																											
1	29.58	40.00	-10.42	41.72	-12.14	Peak	---	---																																																											
2	34.82	43.50	-8.68	49.59	-14.77	Peak	---	---																																																											
3	36.03	43.50	-7.47	49.42	-13.39	Peak	---	---																																																											
4	36.98	43.50	-6.52	49.18	-12.20	QP	124	247																																																											
5	34.54	46.00	-11.46	43.10	-8.56	Peak	---	---																																																											
6	32.17	46.00	-13.83	38.33	-6.16	Peak	---	---																																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

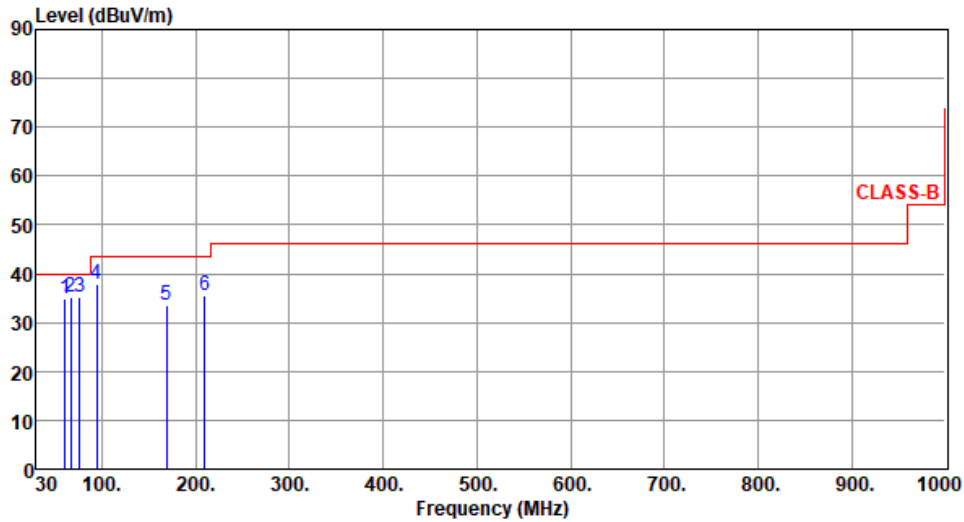

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	60.29	34.84	40.00	-5.16	44.12	-9.28	Peak	---	---
2	66.95	35.12	40.00	-4.88	45.49	-10.37	Peak	---	---
3	75.82	35.13	40.00	-4.87	47.44	-12.31	Peak	---	---
4	94.26	37.94	43.50	-5.56	52.56	-14.62	Peak	---	---
5	168.94	33.52	43.50	-9.98	42.71	-9.19	Peak	---	---
6	209.45	35.62	43.50	-7.88	47.81	-12.19	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

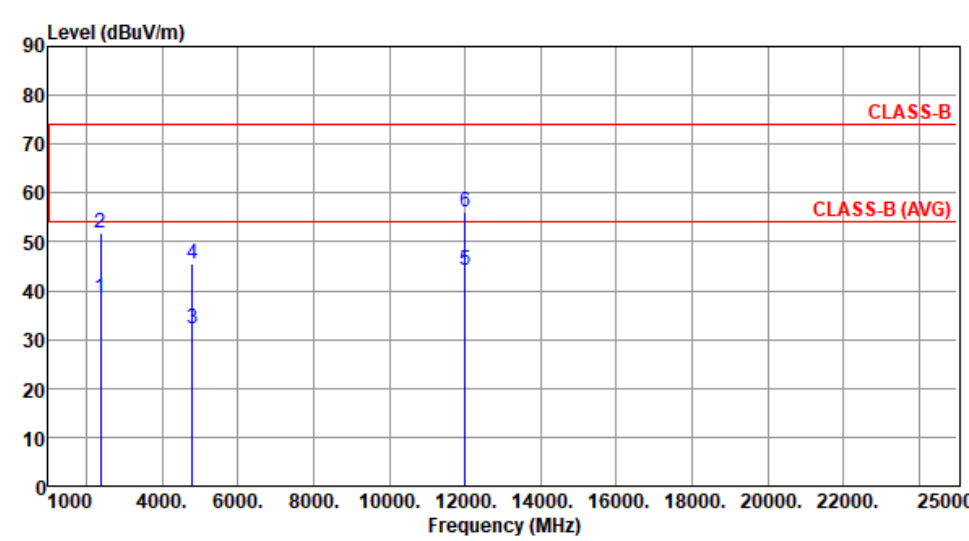Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By : Roger Lu Temperature(°C):23 Humidity(%):65									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	38.44	54.00	-15.56	40.10	-1.66	Average	100	21
2	2390.00	51.82	74.00	-22.18	53.48	-1.66	Peak	100	21
3	4804.00	32.11	54.00	-21.89	27.11	5.00	Average	105	41
4	4804.00	45.36	74.00	-28.64	40.36	5.00	Peak	105	41
5	12010.00	44.28	54.00	-9.72	29.60	14.68	Average	100	21
6	12010.00	56.09	74.00	-17.91	41.41	14.68	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

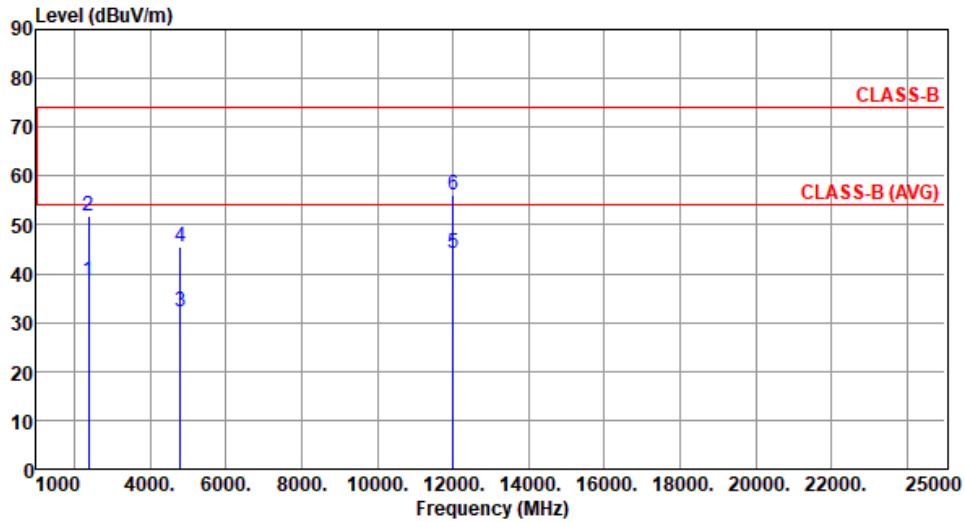

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.48	54.00	-15.52	40.14	-1.66	Average	100	219
2	2390.00	51.91	74.00	-22.09	53.57	-1.66	Peak	100	219
3	4804.00	32.20	54.00	-21.80	27.20	5.00	Average	100	50
4	4804.00	45.46	74.00	-28.54	40.46	5.00	Peak	100	50
5	12010.00	44.32	54.00	-9.68	29.64	14.68	Average	100	40
6	12010.00	56.16	74.00	-17.84	41.48	14.68	Peak	100	40


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

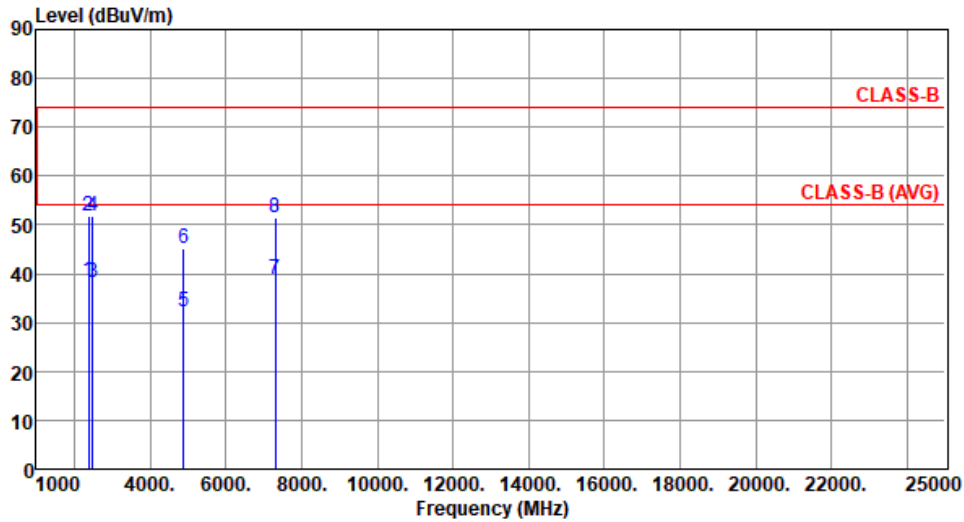

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.59	54.00	-15.41	40.25	-1.66	Average	100	228
2	2390.00	51.92	74.00	-22.08	53.58	-1.66	Peak	100	228
3	2483.50	38.25	54.00	-15.75	40.11	-1.86	Average	100	228
4	2483.50	51.75	74.00	-22.25	53.61	-1.86	Peak	100	228
5	4880.00	32.19	54.00	-21.81	27.12	5.07	Average	100	30
6	4880.00	45.27	74.00	-28.73	40.20	5.07	Peak	100	30
7	7320.00	38.87	54.00	-15.13	28.47	10.40	Average	100	70
8	7320.00	51.61	74.00	-22.39	41.21	10.40	Peak	100	70


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

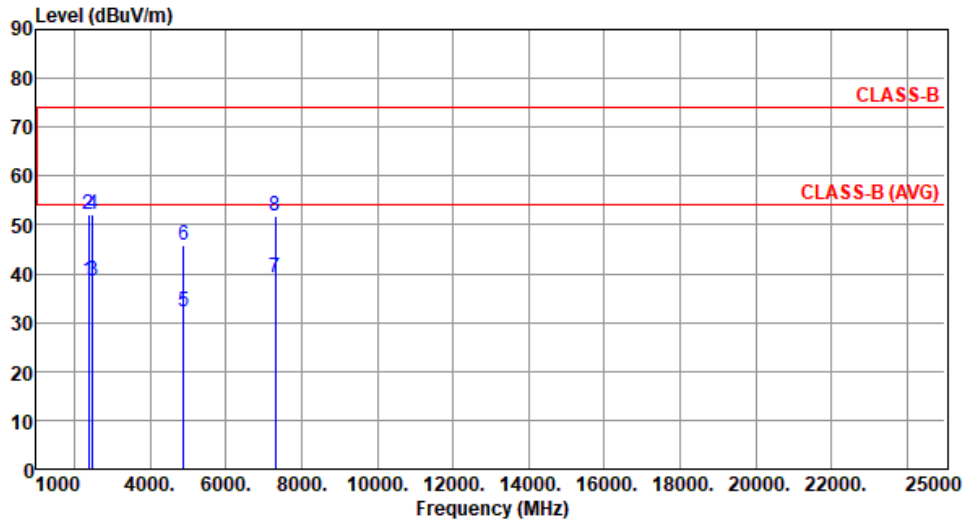

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.68	54.00	-15.32	40.34	-1.66	Average	100	217
2	2390.00	52.02	74.00	-21.98	53.68	-1.66	Peak	100	217
3	2483.50	38.40	54.00	-15.60	40.26	-1.86	Average	100	217
4	2483.50	52.02	74.00	-21.98	53.88	-1.86	Peak	100	217
5	4880.00	32.34	54.00	-21.66	27.27	5.07	Average	100	40
6	4880.00	45.67	74.00	-28.33	40.60	5.07	Peak	100	40
7	7320.00	39.04	54.00	-14.96	28.64	10.40	Average	100	50
8	7320.00	51.65	74.00	-22.35	41.25	10.40	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

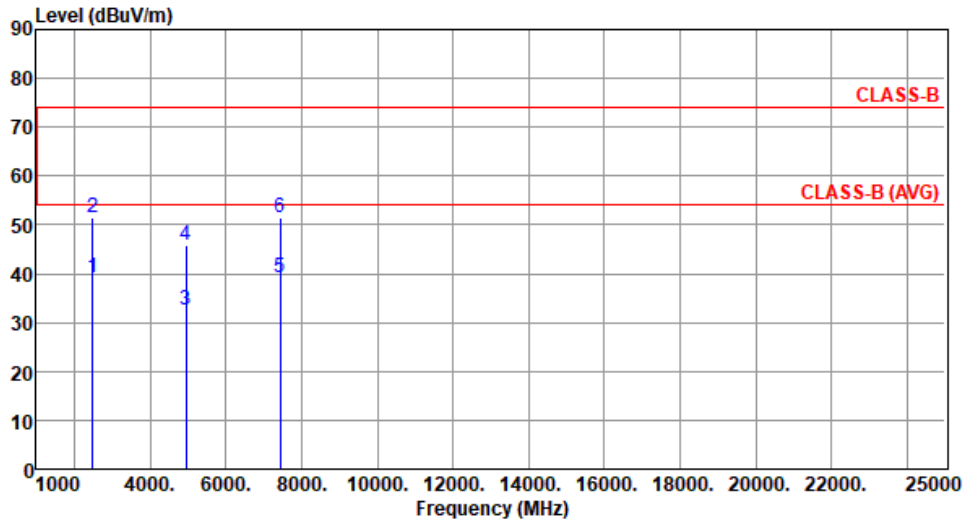

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.14	54.00	-14.86	41.00	-1.86	Average	101	226
2	2483.50	51.55	74.00	-22.45	53.41	-1.86	Peak	101	226
3	4960.00	32.68	54.00	-21.32	27.38	5.30	Average	100	31
4	4960.00	45.72	74.00	-28.28	40.42	5.30	Peak	100	31
5	7440.00	39.29	54.00	-14.71	29.14	10.15	Average	100	44
6	7440.00	51.36	74.00	-22.64	41.21	10.15	Peak	100	44


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

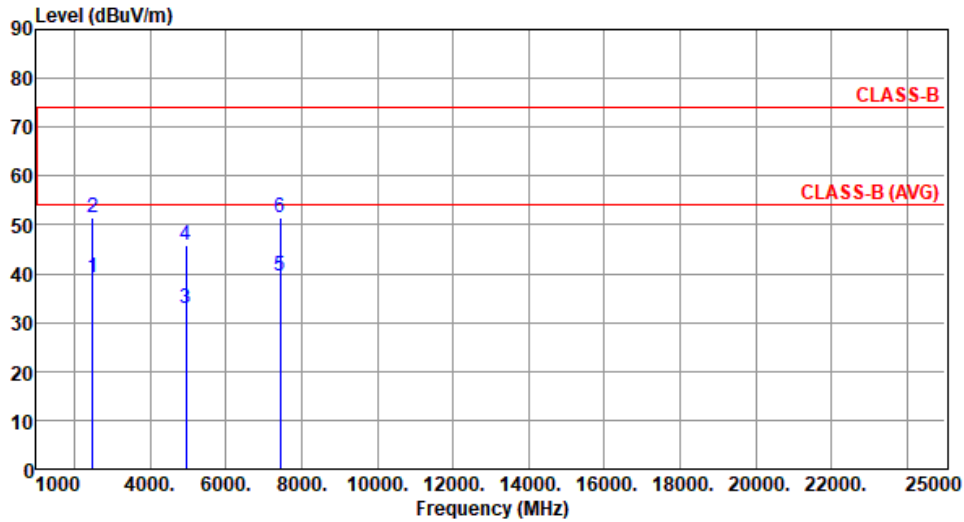

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.29	54.00	-14.71	41.15	-1.86	Average	105	216
2	2483.50	51.62	74.00	-22.38	53.48	-1.86	Peak	105	216
3	4960.00	32.77	54.00	-21.23	27.47	5.30	Average	100	20
4	4960.00	45.87	74.00	-28.13	40.57	5.30	Peak	100	20
5	7440.00	39.40	54.00	-14.60	29.25	10.15	Average	100	40
6	7440.00	51.41	74.00	-22.59	41.26	10.15	Peak	100	40


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

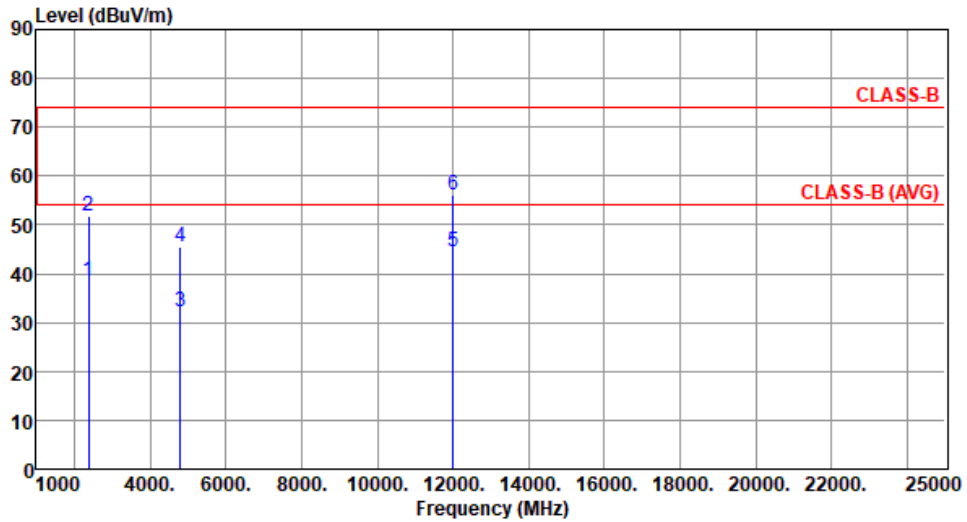

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.61	54.00	-15.39	40.27	-1.66	Average	100	34
2	2390.00	51.95	74.00	-22.05	53.61	-1.66	Peak	100	34
3	4804.00	32.35	54.00	-21.65	27.35	5.00	Average	103	26
4	4804.00	45.51	74.00	-28.49	40.51	5.00	Peak	103	26
5	12010.00	44.39	54.00	-9.61	29.71	14.68	Average	100	33
6	12010.00	56.22	74.00	-17.78	41.54	14.68	Peak	100	33


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

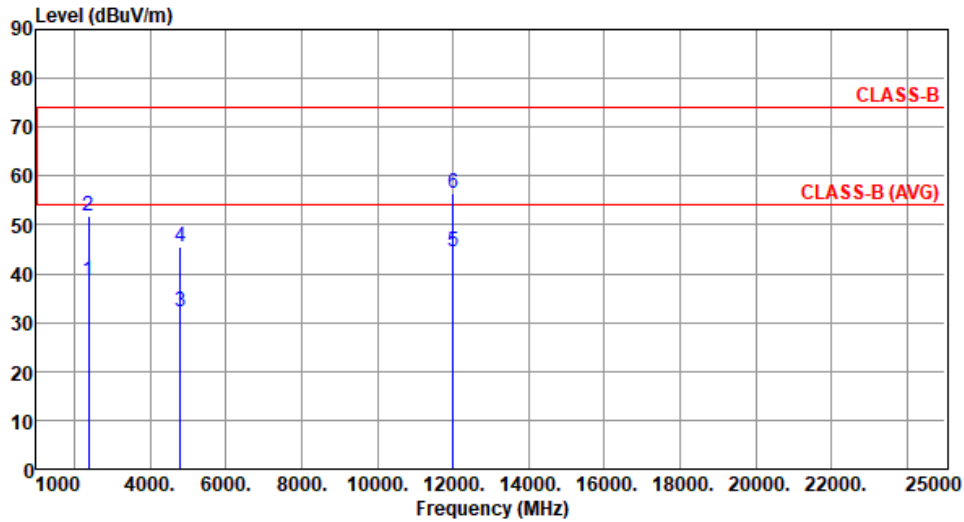

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.59	54.00	-15.41	40.25	-1.66	Average	100	218
2	2390.00	51.94	74.00	-22.06	53.60	-1.66	Peak	100	218
3	4804.00	32.35	54.00	-21.65	27.35	5.00	Average	100	48
4	4804.00	45.58	74.00	-28.42	40.58	5.00	Peak	100	48
5	12010.00	44.42	54.00	-9.58	29.74	14.68	Average	100	31
6	12010.00	56.31	74.00	-17.69	41.63	14.68	Peak	100	31


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

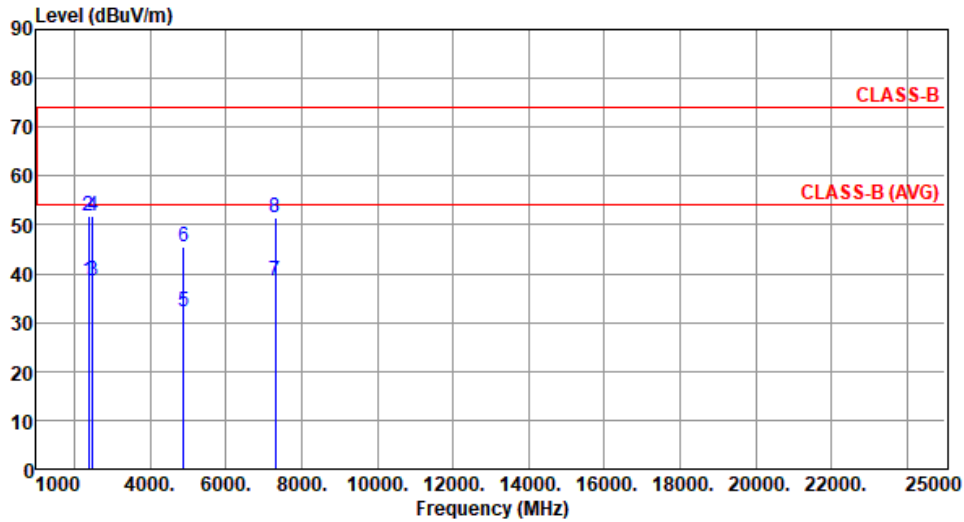

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.65	54.00	-15.35	40.31	-1.66	Average	105	231
2	2390.00	51.88	74.00	-22.12	53.54	-1.66	Peak	105	231
3	2483.50	38.41	54.00	-15.59	40.27	-1.86	Average	105	231
4	2483.50	51.89	74.00	-22.11	53.75	-1.86	Peak	105	231
5	4880.00	32.34	54.00	-21.66	27.27	5.07	Average	100	36
6	4880.00	45.41	74.00	-28.59	40.34	5.07	Peak	100	36
7	7320.00	38.65	54.00	-15.35	28.25	10.40	Average	100	22
8	7320.00	51.48	74.00	-22.52	41.08	10.40	Peak	100	22


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

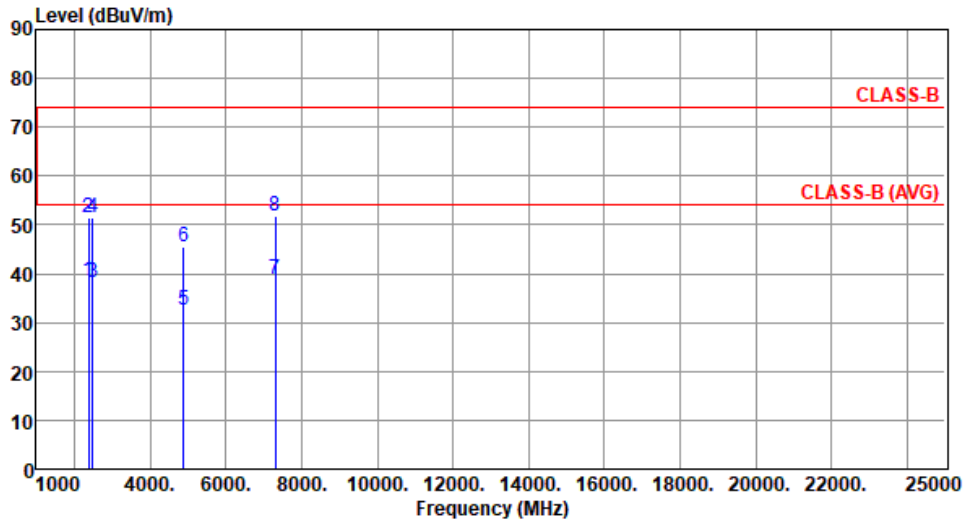

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.59	54.00	-15.41	40.25	-1.66	Average	102	216
2	2390.00	51.48	74.00	-22.52	53.14	-1.66	Peak	102	216
3	2483.50	38.36	54.00	-15.64	40.22	-1.86	Average	102	216
4	2483.50	51.43	74.00	-22.57	53.29	-1.86	Peak	102	216
5	4880.00	32.57	54.00	-21.43	27.50	5.07	Average	100	30
6	4880.00	45.42	74.00	-28.58	40.35	5.07	Peak	100	30
7	7320.00	38.88	54.00	-15.12	28.48	10.40	Average	100	70
8	7320.00	51.74	74.00	-22.26	41.34	10.40	Peak	100	70


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

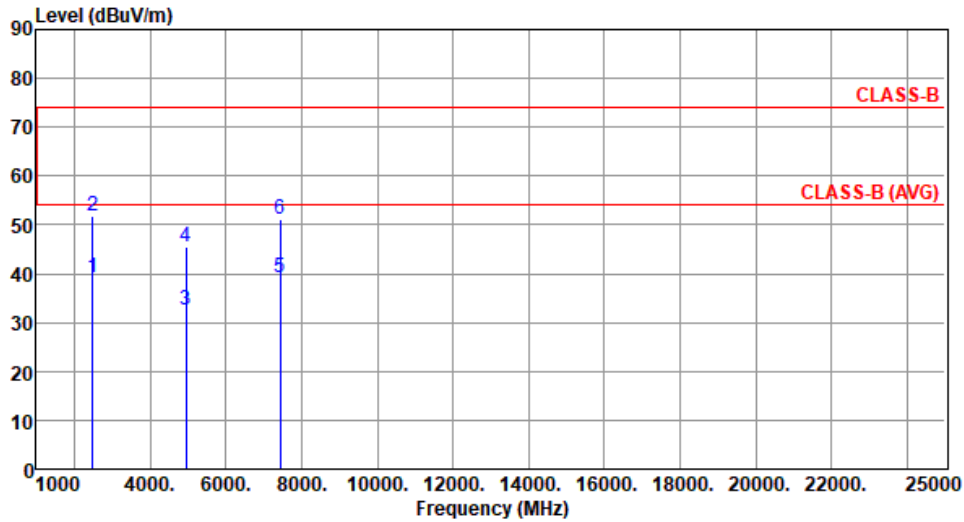

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.29	54.00	-14.71	41.15	-1.86	Average	102	229
2	2483.50	51.68	74.00	-22.32	53.54	-1.86	Peak	102	229
3	4960.00	32.54	54.00	-21.46	27.24	5.30	Average	100	55
4	4960.00	45.63	74.00	-28.37	40.33	5.30	Peak	100	55
5	7440.00	39.16	54.00	-14.84	29.01	10.15	Average	100	36
6	7440.00	51.25	74.00	-22.75	41.10	10.15	Peak	100	36


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):65

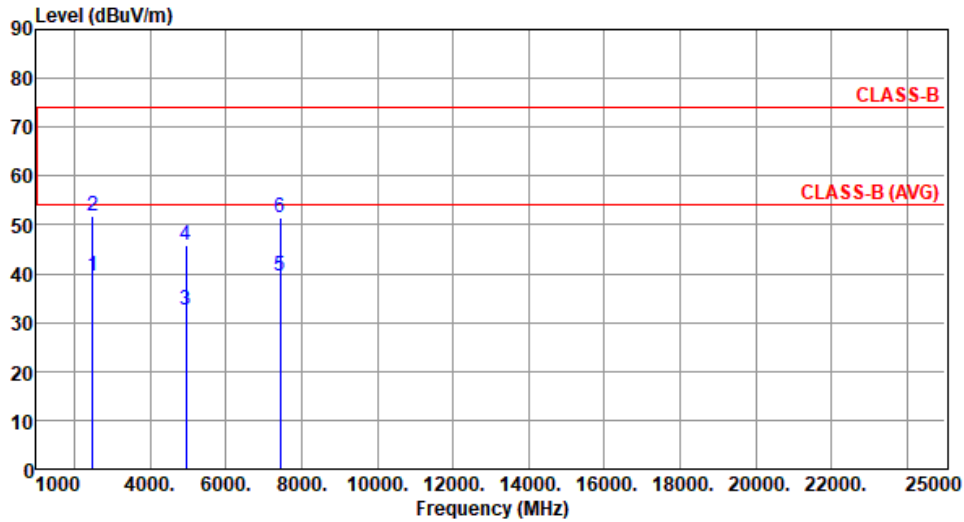

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.48	54.00	-14.52	41.34	-1.86	Average	100	218
2	2483.50	51.83	74.00	-22.17	53.69	-1.86	Peak	100	218
3	4960.00	32.71	54.00	-21.29	27.41	5.30	Average	100	31
4	4960.00	45.82	74.00	-28.18	40.52	5.30	Peak	100	31
5	7440.00	39.51	54.00	-14.49	29.36	10.15	Average	100	22
6	7440.00	51.56	74.00	-22.44	41.41	10.15	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement



1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup

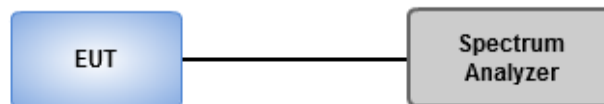

3.6.4 Test Result of Emissions in non-restricted Frequency Bands


Ambient Condition	25°C / 66%	Tested By	Aska Huang
-------------------	------------	-----------	------------

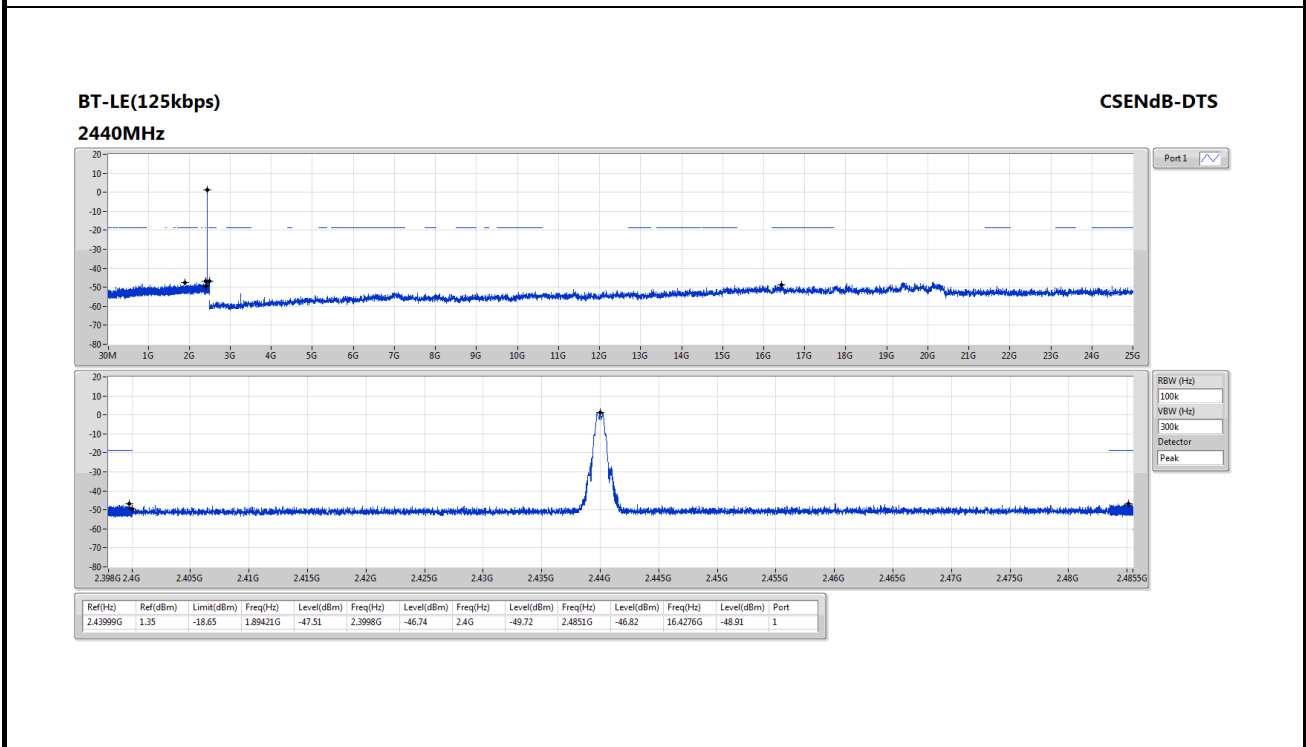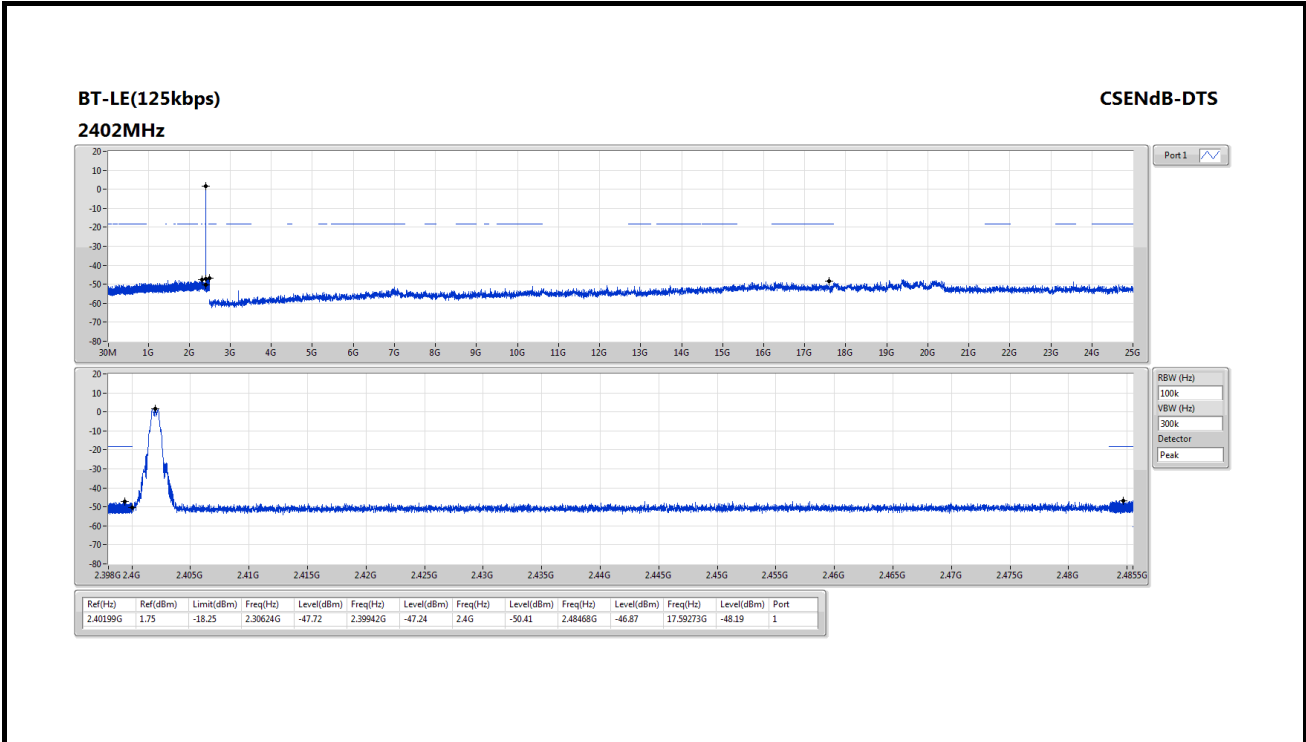

BT-LE(125kbps)

CSEndB-DTS


2480MHz

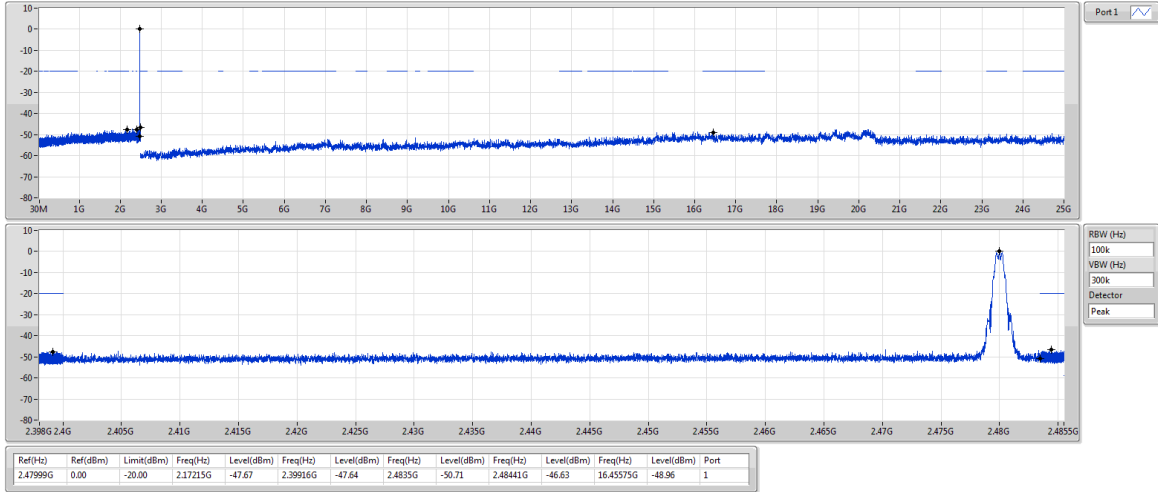

BT-LE(500kbps)

CSEndB-DTS


2402MHz

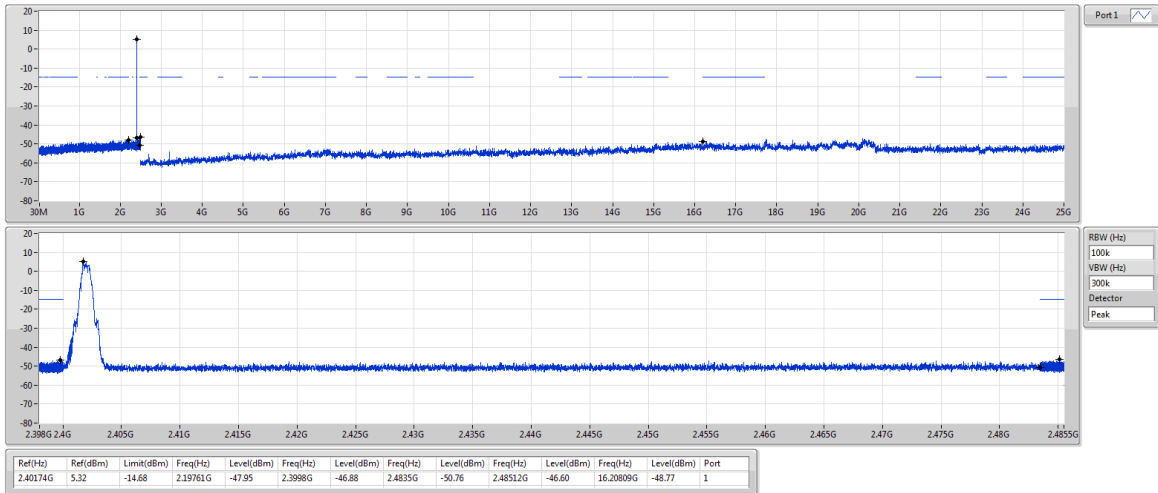

BT-LE(500kbps)

CSEndB-DTS


2440MHz

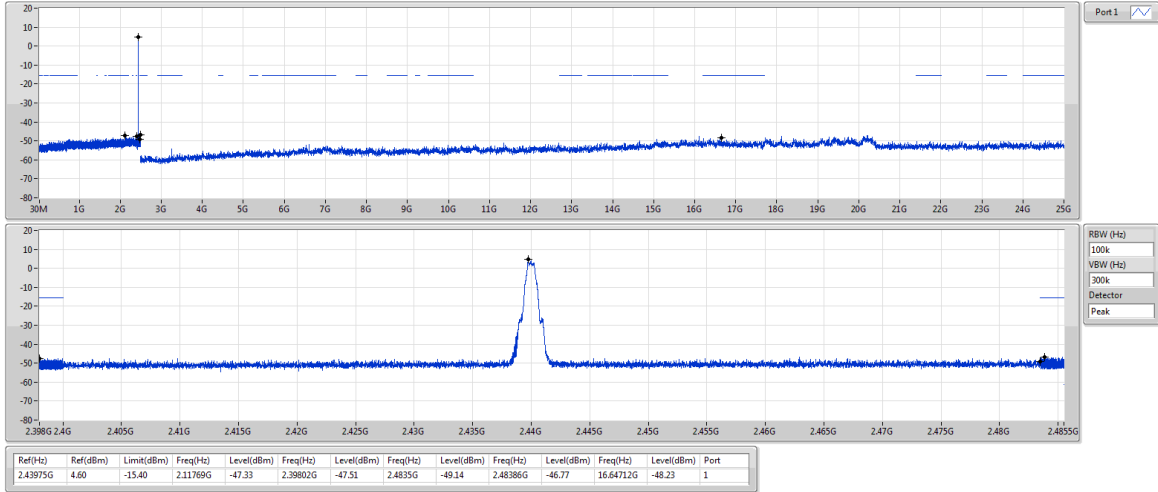

BT-LE(500kbps)

CSEndB-DTS


2480MHz

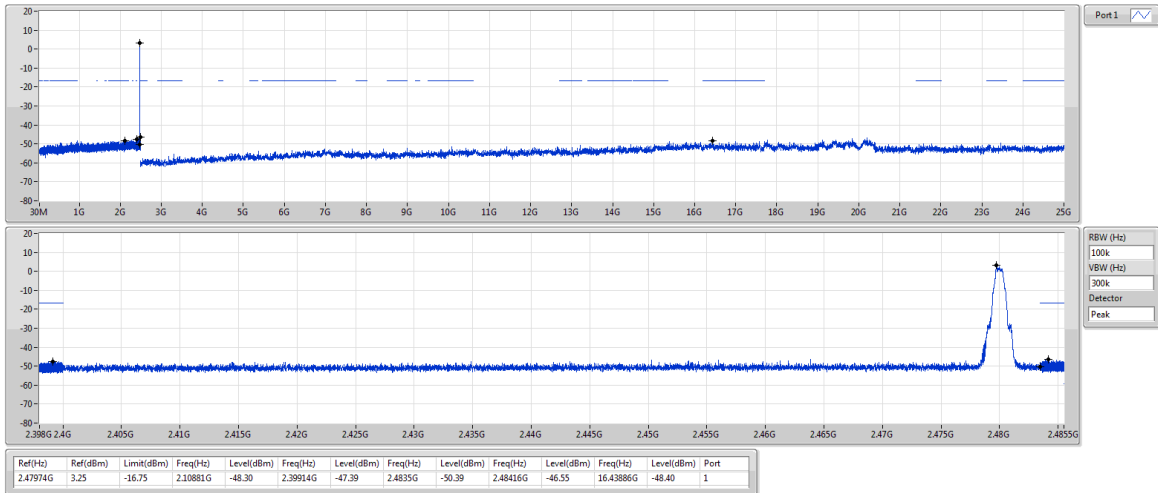

BT-LE(1Mbps)

CSEndB-DTS


2402MHz

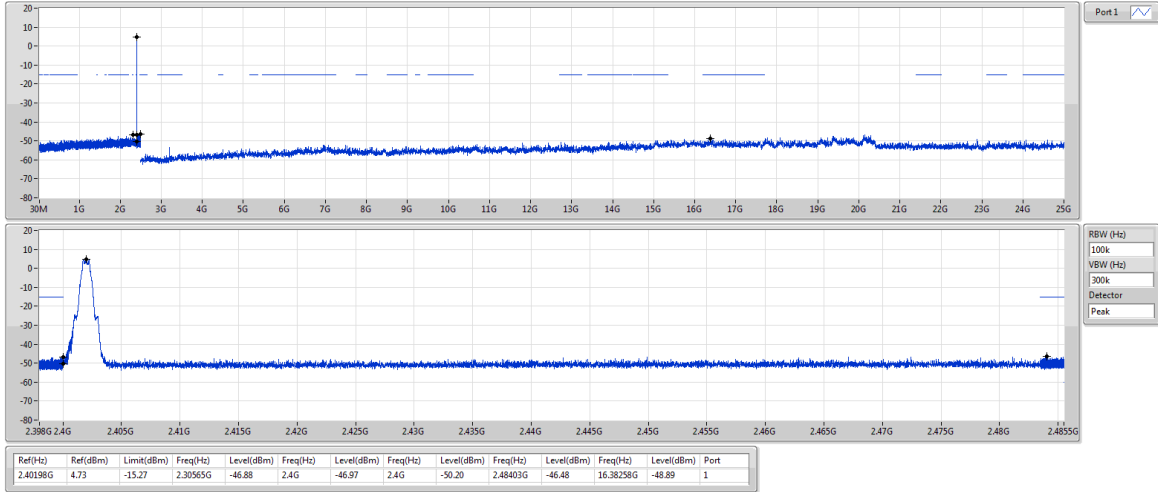

BT-LE(1Mbps)

CSEndB-DTS


2440MHz

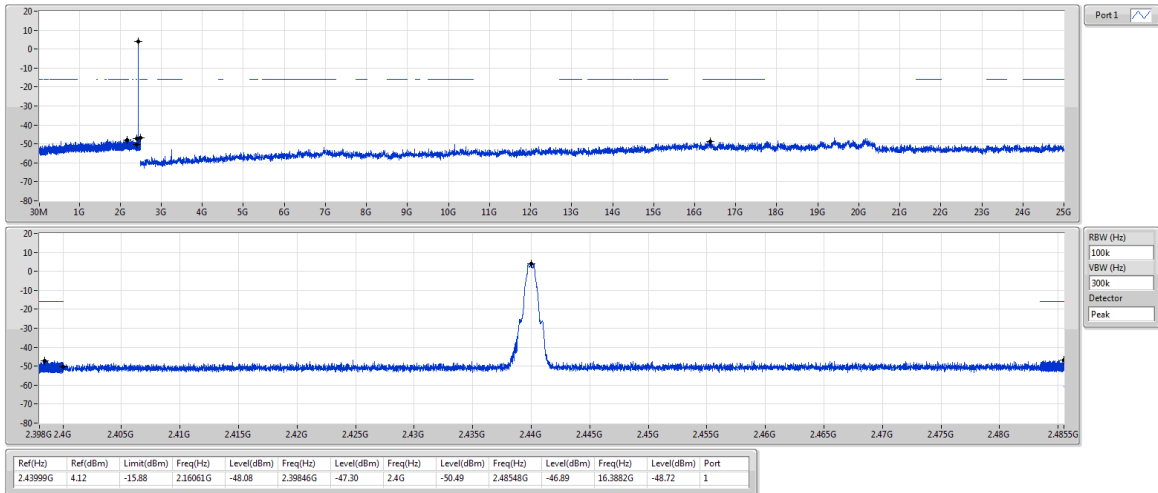

BT-LE(1Mbps)

CSEndB-DTS


2480MHz

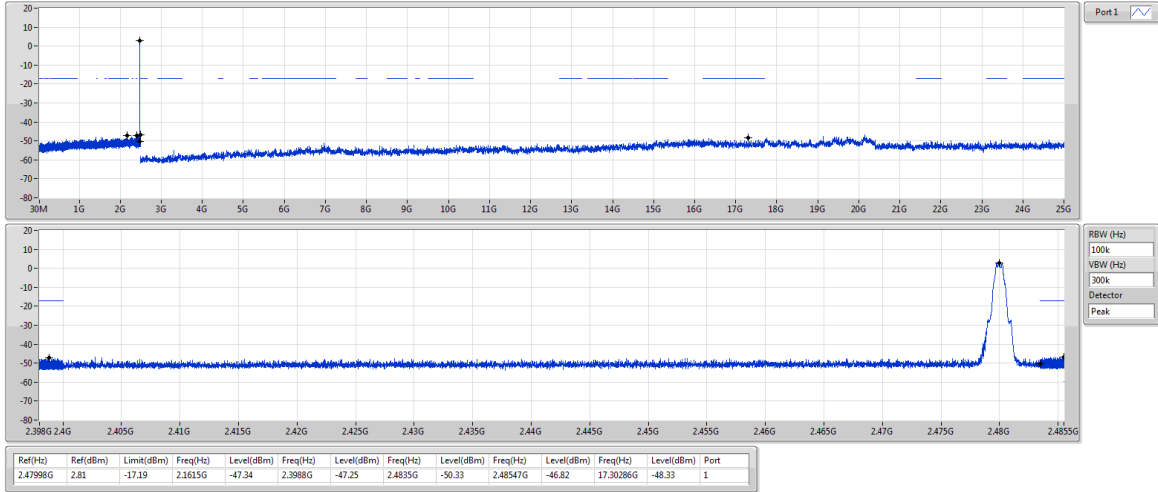

BT-LE(2Mbps)

CSEndB-DTS


2402MHz

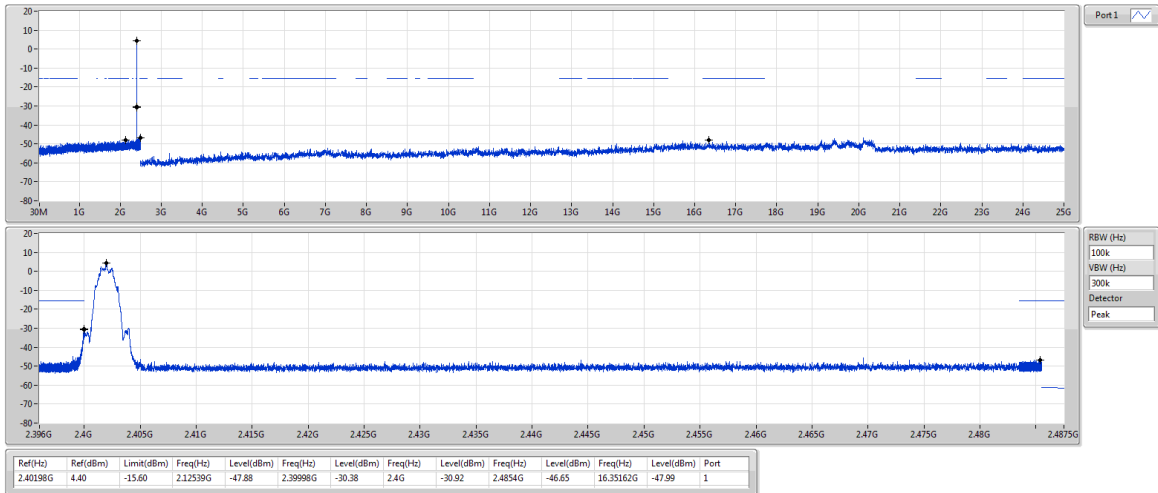

BT-LE(2Mbps)

CSEndB-DTS


2440MHz

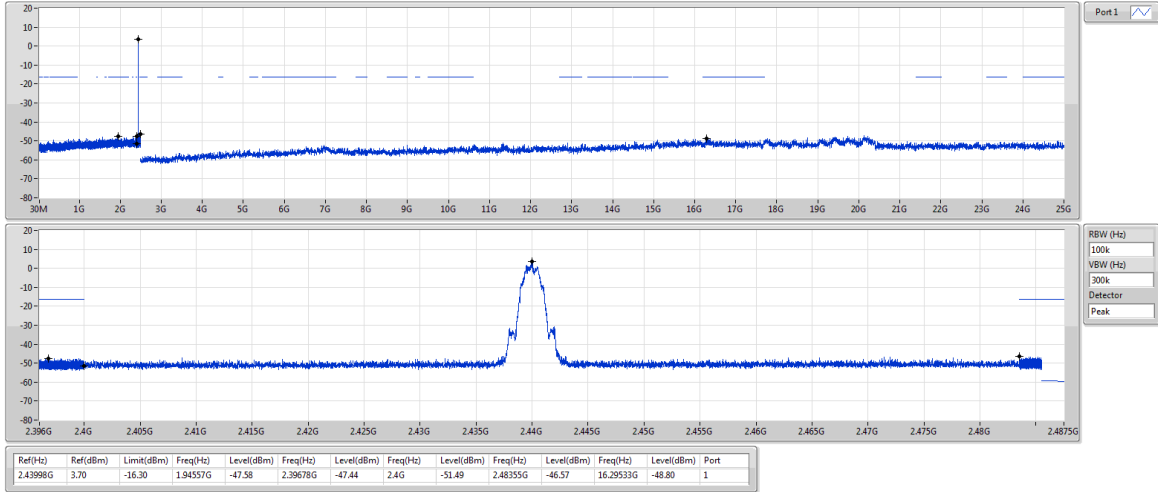

BT-LE(2Mbps)

CSEndB-DTS

2480MHz

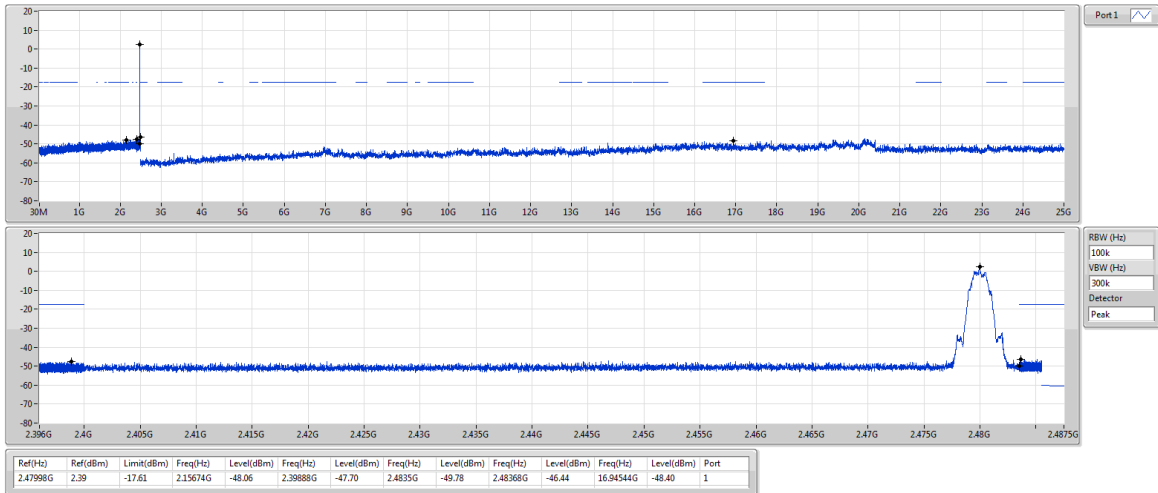

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==