

RADIO TEST REPORT

(for Bluetooth Low Energy)

Project No. : JB-Z1367
Client : Sony Corporation
Client's Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product Name : Sensor data receiver
Model No. : QM-PR1
FCC ID : AK8QM-PR1
Test Standard : 47 CFR Part 15 Subpart C
Sample Receipt Date : October 1, 2024
Test Date : October 1, 2024 to October 4, 2024
Report Date : October 11, 2024
Test Result : Complied

Notice:

- * These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- * This report shall not be reproduced except in full, without written approval of the laboratory.
- * This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S.
- * Hereby certify that no party is subject to a denial of federal benefits pursuant to section 5301 of the Anti-Drug Abuse Act.
- * All test results are traceable to the national and /or international standards.
- * The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory.

Reported by:

K. OHYAMA

Koji Ohyama
Technical Manager
EMC/RF Test Laboratory, Main Lab.
Design Technology Division

Approved Signatory:

Koji Hayama

Koji Hayama
Technical Manager
EMC/RF Test Laboratory, Main Lab.
Design Technology Division



TESTING CERT #3203.01

Format No.:NV1-1-01 Version 5.0

TABLE OF CONTENTS

1. General Information	3
1.1. Description of Equipment Under Test (EUT).....	3
1.2. Summary of Test Result.....	4
1.3. Tested Methodology	4
1.4. Measurement Procedures	5
1.5. Test Location.....	7
1.6. Uncertainty	7
2. Test Specification.....	8
2.1. Validation	8
2.2. Operating Condition.....	8
2.3. Special Accessories	8
2.4. EUT Modifications	8
2.5. Configuration of EUT System.....	9
2.6. Typical setup arrangement	12
3. Test Data.....	13
3.1. AC Power-line Conducted Emissions	13
3.2. 6 dB Bandwidth.....	14
3.3. Maximum Peak Conducted Output Power.....	15
3.4. Power Spectral Density	16
3.5. Radiated Spurious Emissions.....	17
3.6. Conducted Spurious Emissions for Band Edge.....	24
4. Method of Calculation.....	25
4.1. AC Power-line Conducted Emissions	25
4.2. Maximum Peak Conducted Output Power.....	25
4.3. Power Spectral Density	25
4.4. Radiated Spurious Emissions.....	26
4.5. Conducted Spurious Emissions for Band Edge.....	26
5. List of Test Equipment	27
5.1. AC Power-line Conducted Emissions	27
5.2. Antenna-port Conducted Measurements.....	27
5.3. Radiated Spurious Emissions.....	27
6. Photographs of test setup	28
6.1. AC Power-line Conducted Emissions Photo(s)	28
6.2. Antenna-port Conducted Measurements Photo(s)	28
6.3. Radiated Spurious Emissions Photo(s).....	29

Note

- ☒ -indicates that the listed condition, standard or equipment is applicable for this report.
☐ -indicates that the listed condition, standard or equipment is not applicable for this report.

Revision History

Revision	Date	Overview	Page
JB-Z1367 (Original)	October 11, 2024	-	-

Disclaimer

This report includes the information provided by the customer as below;

- Cover page : Client and product related information
- Clause 1.1 : Description of Equipment Under Test (EUT)
- Clause 2 : Operating mode / conditions

* The laboratory is not responsible for any test results affected by the above information.

1. General Information

1.1. Description of Equipment Under Test (EUT)

General Specification

Test Sample Condition	: ☒ Prototype	☐ Pre-production	☐ Mass-production
Product Name	: Sensor data receiver		
Trade Name	: SONY		
Model No.	: QM-PR1		
Serial No.	: 9000168, 9000169		
Power Rating of the EUT	: DC 5.0 V (The EUT is supplied with the power from the USB port)		

Radio Specification

Function of the Equipment	: Transceiver
Operating Frequency	: 2402 - 2480 MHz
Modulation Type	: GFSK
Channel Spacing	: 2 MHz
Channel Bandwidth	: 1 MHz / 2 MHz
Number of channels	: 40
Antenna Type	: Inverted L Antenna
Antenna Connector Type	: None
Antenna Gain	: +1.10 dBi
Operating Temperature	: 0 to +40.0 deg.C

1.2. Summary of Test Result

Test Item	Test Method	Worst Margin	Results	Note
AC Power-line Conducted Emissions	Conducted	15.9 dB (AV) 0.949 MHz N	Complied	-
6 dB Bandwidth	Conducted	Refer to the test data	Complied	-
Maximum Peak Conducted Output Power	Conducted	21.03 dB	Complied	-
Power Spectral Density	Conducted	15.64 dB	Complied	-
Radiated Spurious Emissions	Radiated	3.5 dB (AV) 2483.500 MHz Horizontal	Complied	-
Conducted Spurious Emissions for Band Edge	Conducted	27.66 dB 2400.00 MHz	Complied	*1

Note

*1: Conducted Spurious Emissions measurement was tested for the only frequencies in the non-restricted carrier band edges, since the spurious emissions in other non-restricted band were complied with Radiated Spurious Emissions measurement.s

Other requirements

Part 15.31(e) Supply voltage requirement

: Complied (The EUT is supplied with the power from the USB port.)

Part 15.203 / 212 Antenna requirement

: Complied (The EUT has an internal antenna which cannot be replaced by users.)

1.3. Tested Methodology

Test Standard : 47 CFR Part15 Subpart C

Test Method : ANSI C63.10 - 2013

KDB 558074 D01 15.247 Meas Guidance v05r02

Test Condition

AC Power-line Conducted Emissions

Dimensions of the EUT table : 0.8 m height, 2 m width and 1 m depth.

Radiated Spurious Emissions

Test Distance : ☒ 3 m ☐ 10 m (9 kHz to 30 MHz)
☒ 3 m ☐ 10 m (30 MHz to 1000 MHz)
☒ 3 m (1 GHz to 26.5 GHz)

Dimensions of the EUT table : 0.8 m (below 1 GHz) or 1.5 m (above 1 GHz) height, 2.0 m width and 1 m depth.

Dimensions of validated test volume : 2.5 m diameter, 3.5 m top height, 0 m bottom height.

1.4. Measurement Procedures

We performed the measurements in accordance with NV3-06, available upon the request.

- ☒ No deviation
☐ Deviation from the above procedure

The summary of the above procedure is mentioned below

AC Power-line Conducted Emissions

1. The non-conductive table (EUT table) made of (☒ FRP, ☐ wood, ☐ other non-conductive material) was placed 0.4 m from its rear to the vertical reference ground plane.
2. The EUT was placed on the center of tabletop and its rear was flush with the rear of the table, connected through a LISN to the input power mains.
3. The LISN was placed in 80 cm from the nearest part of the EUT chassis.
4. The excess length of the AC cable between the EUT and the LISN receptacle, or an adaptor or extension cable connected to and measured with LISN, was folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
5. The connection of the all other equipment to the second LISN was performed. The second LISN was terminated with a 50-ohm terminator.
6. Interconnecting cables that hang closer than 40 cm to the horizontal reference ground plane was folded back and forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between the horizontal reference ground plane and the tabletop.
7. Find the worst mode and arrangement of the EUT according to the follows;
 - Connecting all peripherals and change the position of peripherals and cables.
 - Changing the all test operation modes of the EUT.
 - On every condition, exploring the highest emissions with the spectrum analyzer.
(150 kHz to 30 MHz, peak detector, RBW: 10 kHz)
8. On the worst condition of the EUT found in above, choose the six highest emissions on the spectrum data.
The final measurements carried out on these emissions with EMI test receiver.
(quasi-peak and average detector, RBW: 9 kHz)

Antenna-port Conducted Measurements

1. Antenna-port of the EUT was connected to the power sensor (Maximum Peak Conducted Output Power) or the spectrum analyzer (other test items).
2. For each EUT operation mode, the Antenna-port Conducted Measurements were measured with the power sensor or the spectrum analyzer.

Test Item	Detector	RBW
Antenna-port Conducted Measurements		
6 dB Bandwidth	Peak	100 kHz
Maximum Peak Conducted Output Power	Average	-
Power Spectral Density	Peak	3 kHz
Conducted Spurious Emissions for Band Edge	Peak	100 kHz

Radiated Spurious Emissions

- The non-conductive table (EUT table) made of (☐ FRP, ☒ Styrene Foam, ☐ other non-conductive material) was placed in the center of the turntable.
- The EUT was placed on the center of the tabletop.
- The test antenna was placed away from the EUT at test distance.
- The limits were compensated the distance factor with follows:

$$9 \text{ kHz to } 490 \text{ kHz [Limit at 3 m]} = [\text{Limit at 300 m}] + 40\log(300[\text{m}] / 3[\text{m}])$$

$$490 \text{ kHz to } 30 \text{ MHz [Limit at 3 m]} = [\text{Limit at 30 m}] + 40\log(30[\text{m}] / 3[\text{m}])$$
- Find the worst arrangement of the EUT according to follows;
 - Rotating the turntable and/ or scanning the antenna.
 - On every condition, exploring the highest emissions with the spectrum analyzer.
(9 kHz to 26.5 GHz, peak detector)
- On the worst arrangement of the EUT found in above, choose the six highest harmonics or spurious emissions on the spectrum data. (*excluding carrier band edges)
 The final measurements of all test operating modes carried out on these emissions as follows:

The test antenna and the turntable were performed with follows:

	9 kHz to 30 MHz	30 MHz to 1000 MHz	1 GHz to 26.5 GHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna	Horn Antenna
Antenna scanning range	1 m, Vertical, 360 degrees	1 m to 4 m, Horizontal and Vertical	1 m to 4 m *, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees	360 degrees

*: When the measurement frequencies above 1 GHz, final measurements are performed keeping the antenna in the "cone of radiation" from EUT area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

Instruments settings were carried out with follows:

	9 kHz to 90 kHz 110 kHz to 490 kHz	90 kHz to 110 kHz 490 kHz to 30 MHz	30 MHz to 1000 MHz	1 GHz to 26.5 GHz
Detector	Peak / Average	Quasi-peak	Quasi-peak	Peak / Average
RBW	200 Hz (6 dB) or 9 kHz (6 dB) *1	200 Hz (6 dB) or 9 kHz (6 dB) *1	120 kHz (6 dB)	1 MHz (6 dB)
VBW	N/A	N/A	N/A	3 MHz (for peak) 0.5, 1 or 10 kHz (for average) *2
Instrument	EMI test receiver	EMI test receiver	EMI test receiver	Spectrum analyzer

*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

*2: VBW setting (for average) was higher than 1/T, and up to 10 kHz. (T is the minimum transmission duration)

- If the final measurement result exceeded the limit in non-restricted band (excluding carrier band edges), the measurement is carried out additionally with follows:

Measurement points

- Fundamental Frequency
- Frequency that exceeded the limit in non-restricted band (excluding carrier band edges)

	9 kHz to 150 kHz	150 kHz to 30 MHz	30 MHz to 26.5 GHz
Detector	Peak	Peak	Peak
RBW	300 Hz (6 dB) *	10 kHz (6 dB) *	100 kHz (6 dB)
Instrument	Spectrum analyzer	Spectrum analyzer	Spectrum analyzer

*: Correction factor of RBW was compensated to a measurement result by the following formula.

$$\text{C.F. of RBW [dB]} = 10 \cdot \log(100 \text{ kHz} / \text{used RBW})$$

8. If the final average measurement result exceeded the limit in the authorized band edge, the integration method is carried out with follows;

	2.4835 GHz to 2.4855 GHz
Detector	Peak
RBW	100 kHz (6 dB)
Instrument	Spectrum analyzer
Function	Channel Power (integration BW : 1 MHz)

9. Although these tests for below 30 MHz were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

Further these test for above 1 GHz were performed test site complied with CISPR 16-1-4.

In the case of EUT size smaller than the validated test volume, the antenna position is adjusted such that the distance between the EUT and the antenna reference point is identical to the 3 m used for the S-VSWR validation measurements. These method based on clause 7.3.1 of CISPR16-1-4 Edition 4, therefore correcting distance factor is not applied.

1.5. Test Location

Test Facility Name : Sony Global Manufacturing & Operations Corporation
EMC/RF Test Laboratory, Main Lab.
Address : 8-4 Shiomi Kisarazu-shi Chiba-ken, 292-0834, Japan
Phone : +81 438 37 2750

A2LA Certificate No. : 3203.01
Expiration : October 31, 2025

AC Power-line Conducted Emissions

Shielded Room

☒ 4th Site ☐ EMC Site

Antenna-port Conducted Measurements

Shielded Room

☒ 4th Site SR1

Radiated Spurious Emissions

Semi-Anechoic chamber

☒ 4th Site ☐ EMC Site

1.6. Uncertainty

Test Item	Frequency	4th Site SR1
Maximum Conducted Output Power	1 GHz to 6 GHz	± 0.8 dB
Power Spectral Density Conducted Spurious Emissions	below 6 GHz	± 1.0 dB

Test Item	Frequency	Distance	4th Site	EMC Site
AC Power-line Conducted Emissions	150 kHz to 30 MHz	-	± 3.4 dB	± 3.4 dB
Radiated Emissions	9 kHz to 30 MHz	3 m	± 3.9 dB	± 3.1 dB
	30 MHz to 1000 MHz	3 m	± 5.0 dB	± 5.3 dB
	1 GHz to 18 GHz	3 m	± 5.0 dB	± 5.4 dB
	18 GHz to 26.5 GHz	3 m	± 4.7 dB	± 5.0 dB

2. Test Specification

2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).
The tests were conducted with the worst-case modes as follows.

2.2. Operating Condition

The tests have been carried out the following conditions.

[Transmitting mode]

Test Items	Test Channels	Data Rate
AC Power-line Conducted Emissions *1	2404 MHz	2 Mbps
Radiated Spurious Emissions (below 1 GHz) *1	2404 MHz	2 Mbps
6 dB Bandwidth, Maximum Peak Conducted Output Power, Power Spectral Density, Radiated Spurious Emissions (above 1 GHz)	2402 MHz *2 2404 MHz *3 2440 MHz 2478 MHz *3 2480 MHz *2	1 Mbps 2 Mbps
Conducted Spurious Emissions for Band Edge	2402 MHz *2 2404 MHz *3	1 Mbps 2 Mbps

Note

*1: The test was performed with the representative mode that had been found as the worst emissions while exploratory testing.

*2: It applies only to 1 Mbps.

*3: It applies only to 2 Mbps.

The Software for Operating Mode

Software Name : Qmpr1Console
Software Version : 240913

2.3. Special Accessories

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
-	-	-	-	-

2.4. EUT Modifications

- ☒ No equipment modification to achieve compliance to the standard levels was done during the tests.
☐ Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

 Typed/ Print Name :
 Responsible Party :
 Position :
 Date :

2.5. Configuration of EUT System

AC Power-line Conducted Emissions


[EUT and Associated Equipment (AE)]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A	EUT	Sensor data receiver	SONY	QM-PR1	9000168
B	AE	Personal Computer	VAIO Corporation	VJS131C11N	4120398
C	AE	AC Adapter	VAIO Corporation	VJ8AC10V9	149233921 0059586

[Type of Cable]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
1	USB Cable	Sony	Yes	No	1.5	Yes
2	DC Cable	VAIO Corporation	No	No	1.7	Yes
3	AC Cable	VAIO Corporation	No	No	1.5	Yes

[Connecting Diagram]

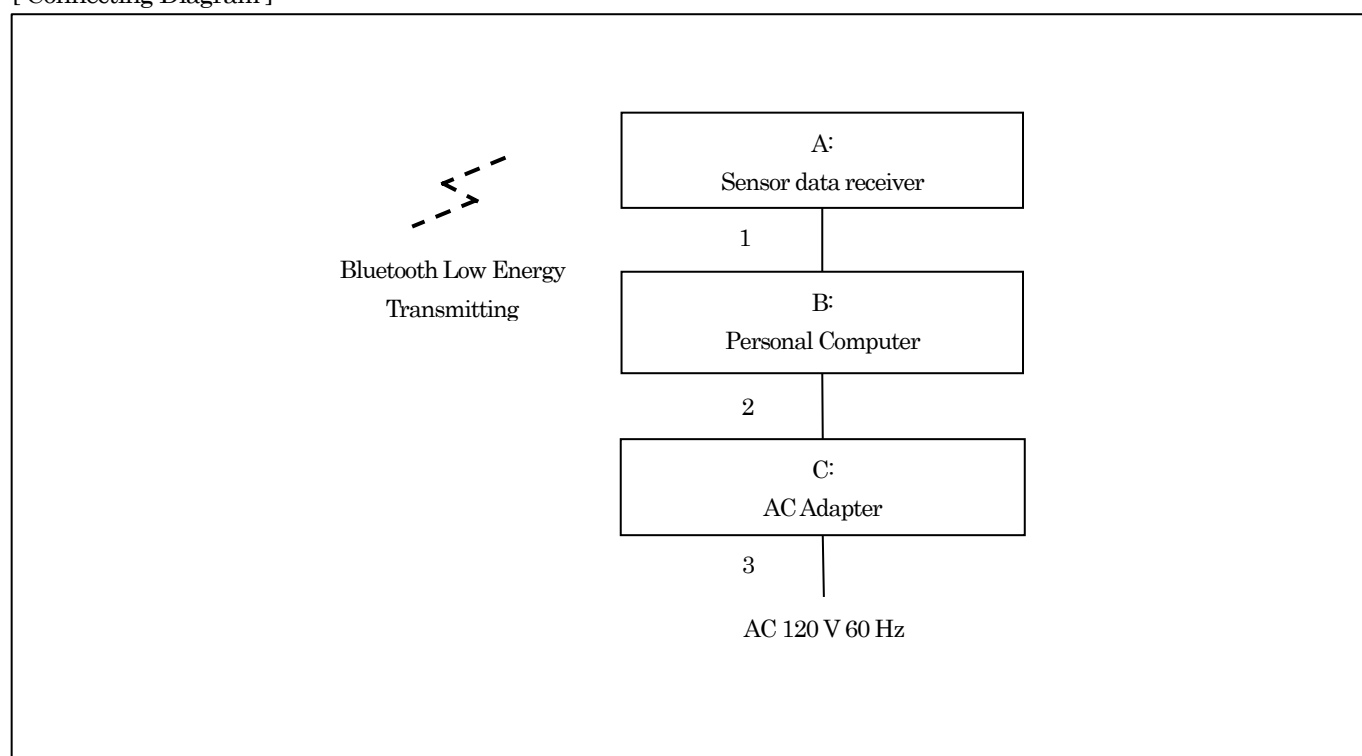

Antenna-port Conducted Measurements


[EUT and Associated Equipment (AE)]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A	EUT	Sensor data receiver	SONY	QM-PR1	9000169
B	AE	Personal Computer	VAIO Corporation	VJS131C11N	4120398
C	AE	AC Adapter	VAIO Corporation	VJ8AC10V9	149233921 0059586

[Type of Cable]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
1	USB Cable	Sony	Yes	No	1.5	No
2	DC Cable	VAIO Corporation	No	No	1.7	No
3	AC Cable	VAIO Corporation	No	No	1.5	No

[Connecting Diagram]

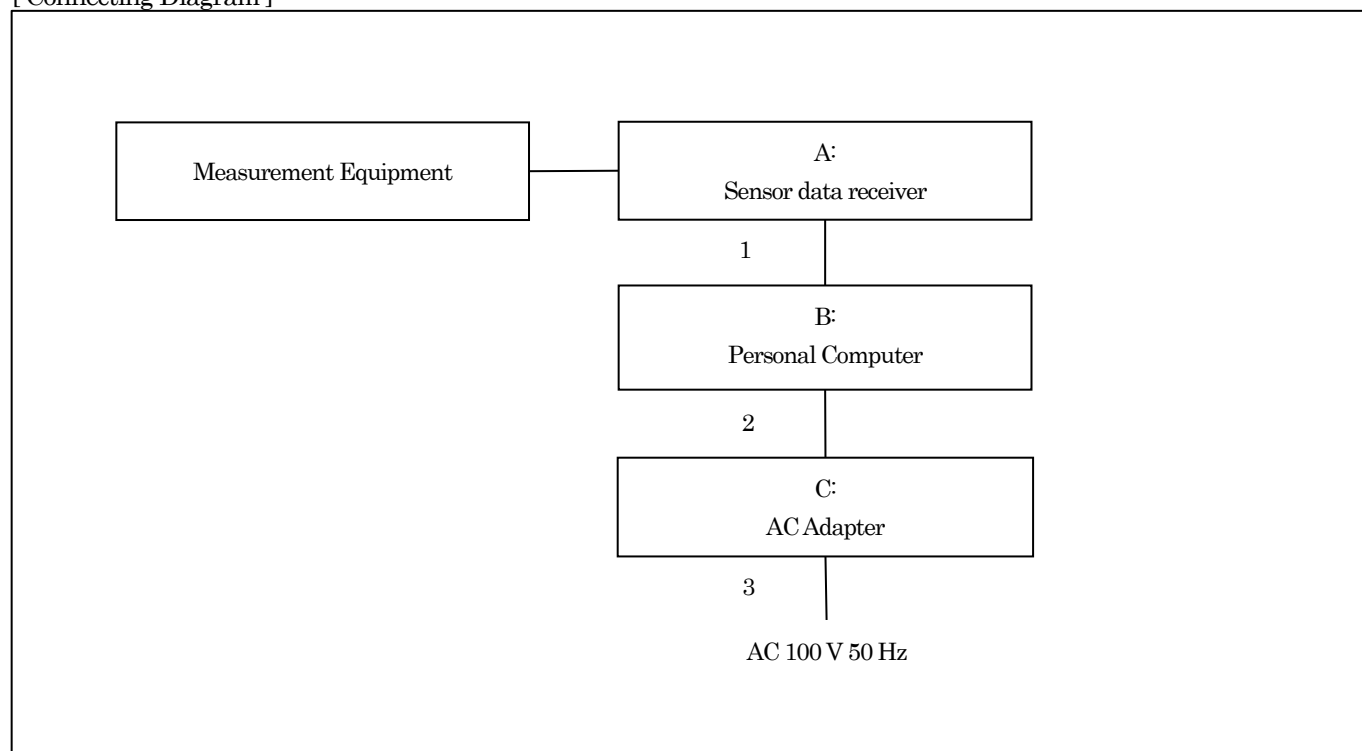

Radiated Spurious Emissions


[EUT and Associated Equipment (AE)]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A	EUT	Sensor data receiver	SONY	QM-PR1	9000168
B	AE	Personal Computer	VAIO Corporation	VJS131C11N	4120398
C	AE	AC Adapter	VAIO Corporation	VJ8AC10V9	149233921 0059586

[Type of Cable]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
1	USB Cable	Sony	Yes	No	1.5	No
2	DC Cable	VAIO Corporation	No	No	1.7	No
3	AC Cable	VAIO Corporation	No	No	1.5	No


[Connecting Diagram]

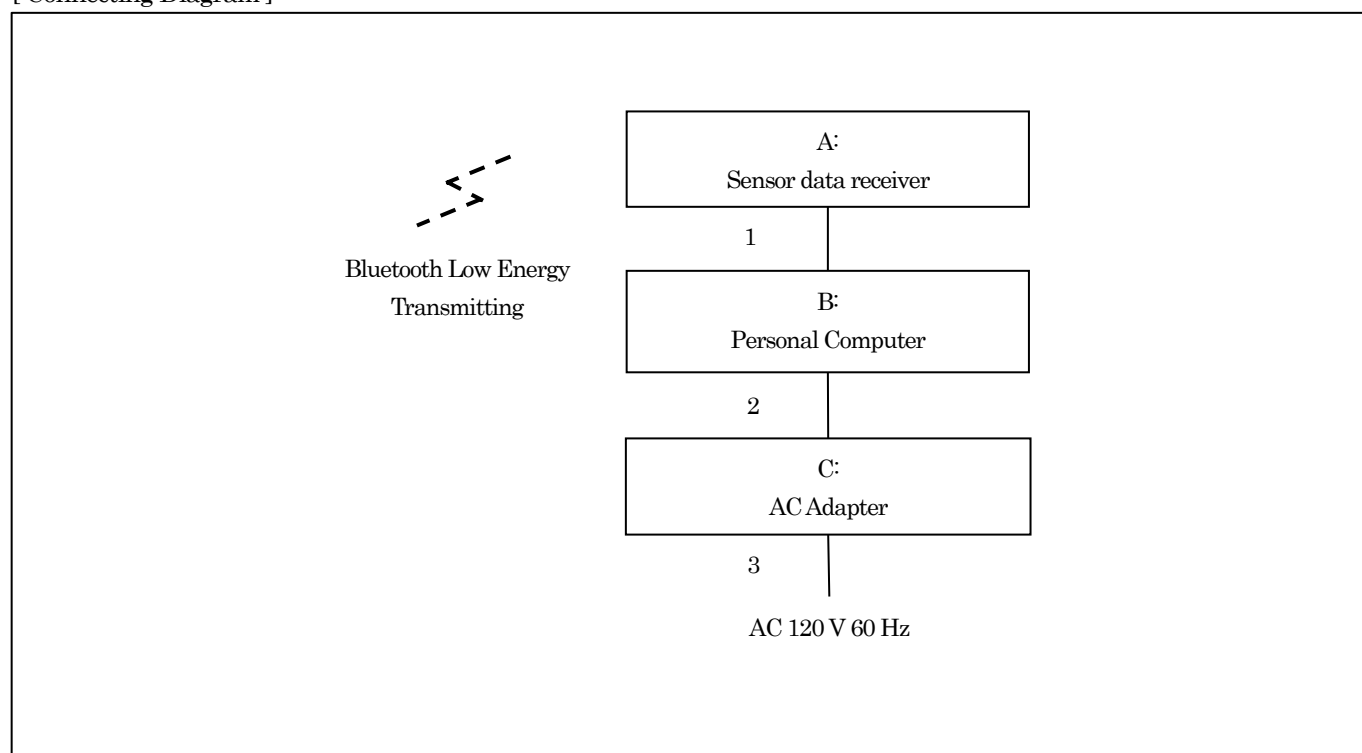


2.6. Typical setup arrangement

Radiated spurious emissions


< 9 kHz - 30 MHz >

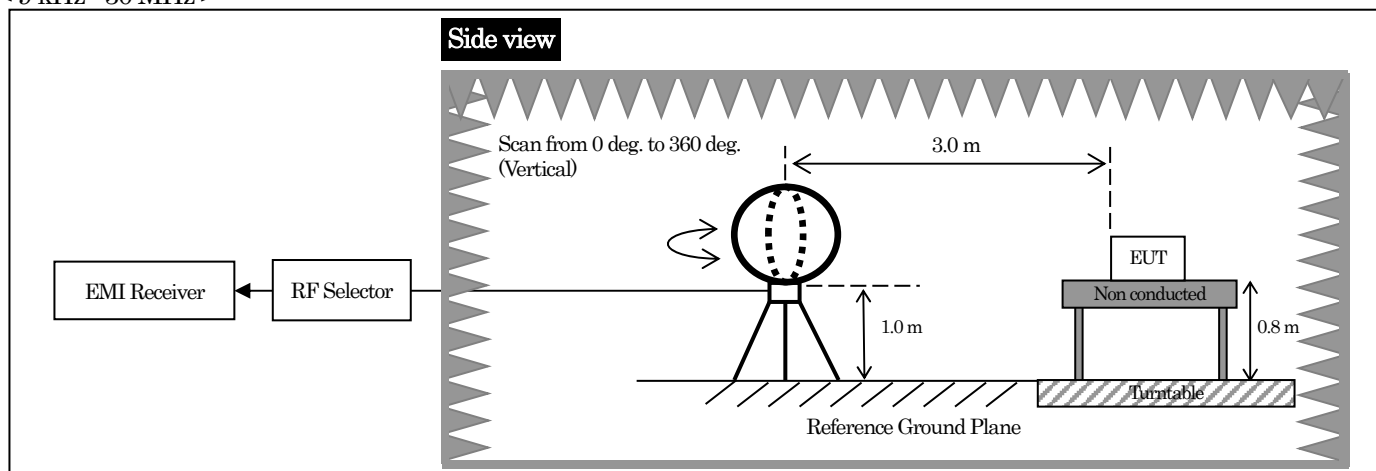

< 30 MHz - 1000 MHz >

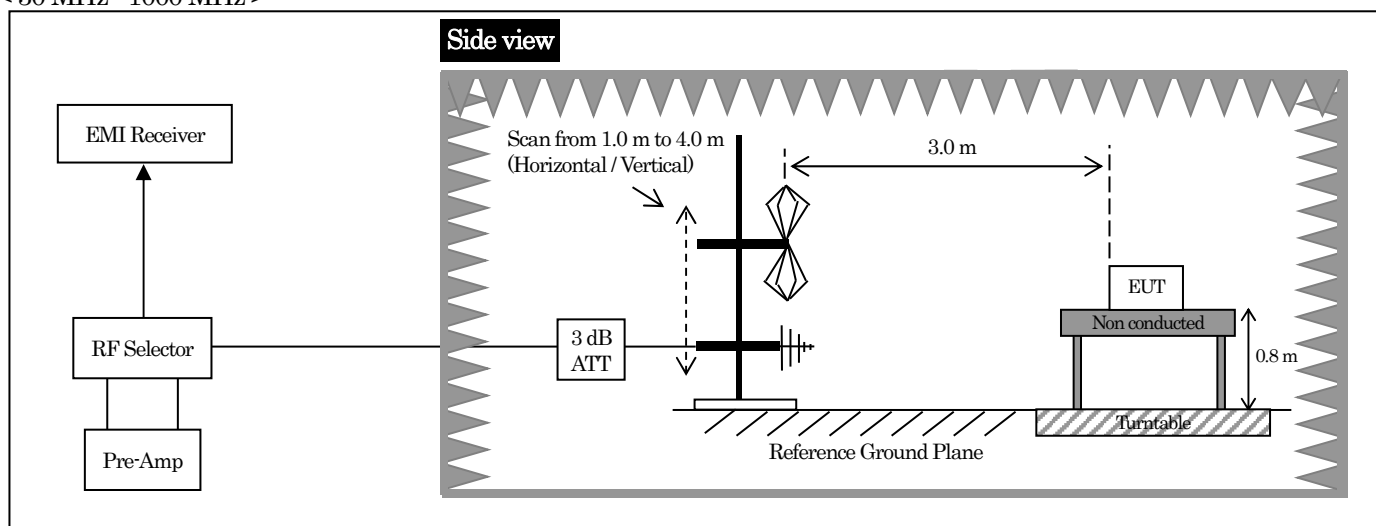

< 1 GHz - 26.5 GHz >

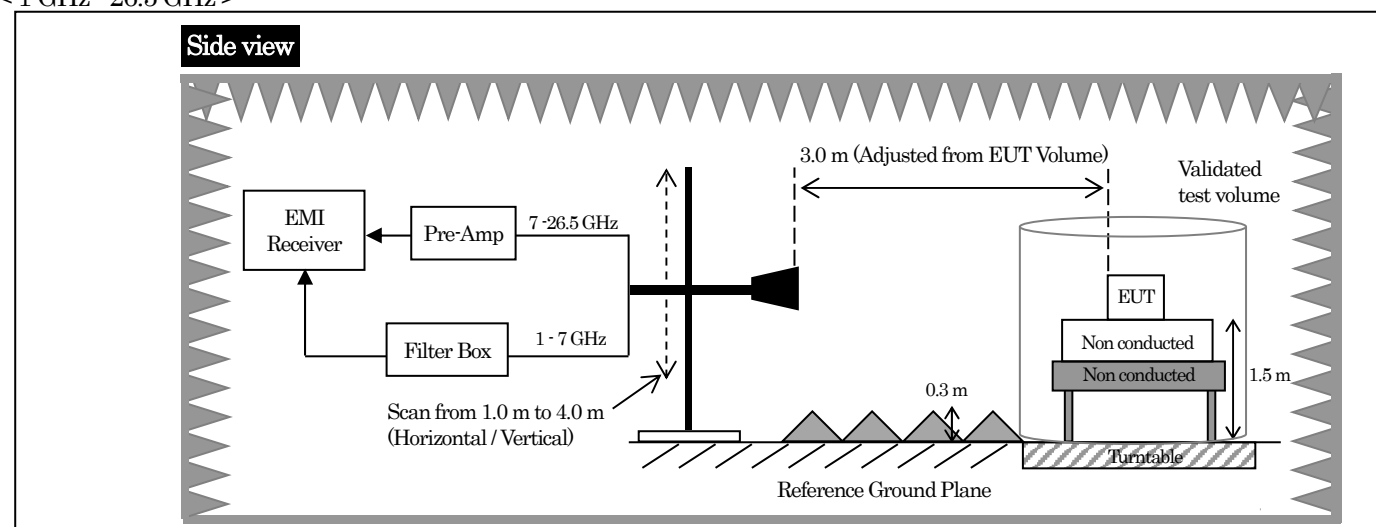


3. Test Data

3.1. AC Power-line Conducted Emissions

Date of measurement	Ambient temperature	Relative humidity	Measured by
October 1, 2024	24.0 deg.C	42.0 %	Tomohiro Abe

[2 Mbps / 2404 MHz]

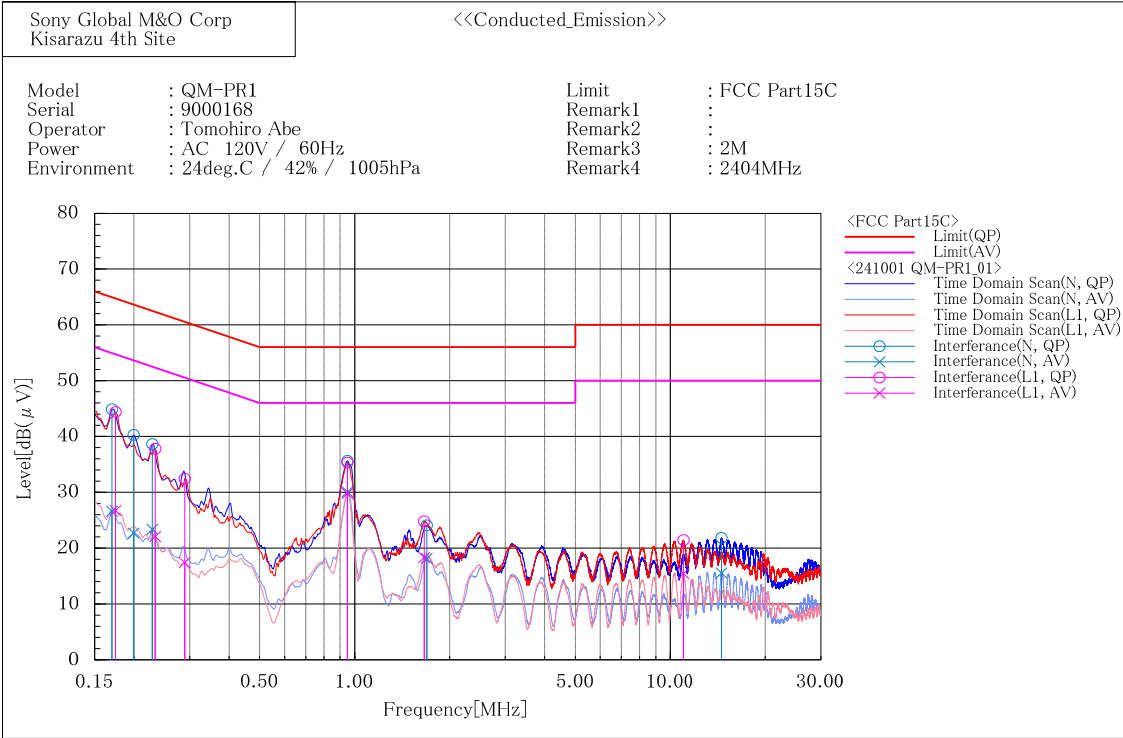

Final Result


--- N ---										
No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.170	35.2	16.9	9.7	44.9	26.6	64.9	54.9	20.0	28.3
2	0.200	30.6	13.0	9.7	40.3	22.7	63.6	53.6	23.3	30.9
3	0.229	28.9	13.7	9.7	38.6	23.4	62.5	52.5	23.9	29.1
4	0.949	25.9	20.4	9.7	35.6	30.1	56.0	46.0	20.4	15.9
5	1.691	14.3	8.3	9.8	24.1	18.1	56.0	46.0	31.9	27.9
6	14.528	11.5	5.2	10.3	21.8	15.5	60.0	50.0	38.2	34.5
--- L1 ---										
No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.175	34.7	17.0	9.7	44.4	26.7	64.7	54.7	20.3	28.0
2	0.233	28.1	12.4	9.7	37.8	22.1	62.3	52.3	24.5	30.2
3	0.290	22.7	7.7	9.7	32.4	17.4	60.5	50.5	28.1	33.1
4	0.949	25.6	20.1	9.7	35.3	29.8	56.0	46.0	20.7	16.2
5	1.660	15.0	8.5	9.8	24.8	18.3	56.0	46.0	31.2	27.7
6	11.006	11.2	5.2	10.2	21.4	15.4	60.0	50.0	38.6	34.6

3.2. 6 dB Bandwidth


Date of measurement	Ambient temperature	Relative humidity	Measured by
October 1, 2024	23.2 deg.C	55.0 %	Mikiko Kouga

Mode	Rate [Mbps]	Channel [MHz]	Result [MHz]	Limit [MHz]
BLE	1	2402	0.687	≥ 0.5
		2440	0.678	≥ 0.5
		2480	0.673	≥ 0.5
	2	2404	1.153	≥ 0.5
		2440	1.158	≥ 0.5
		2478	1.162	≥ 0.5


[1 Mbps / 2402 MHz]

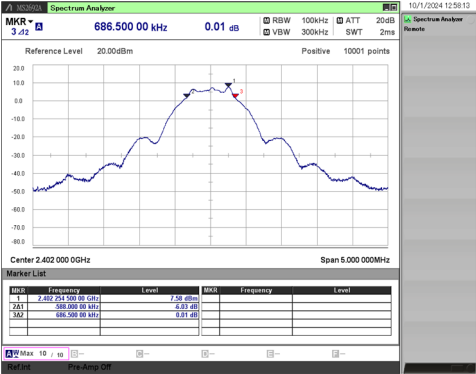


[1 Mbps / 2440 MHz]

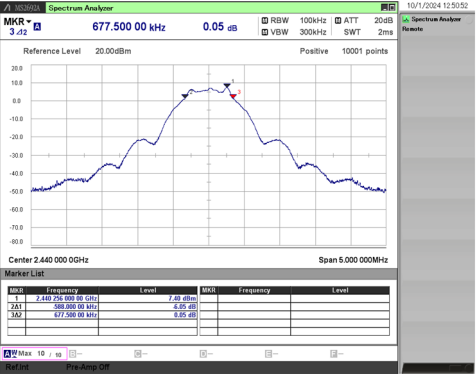


[1 Mbps / 2480 MHz]

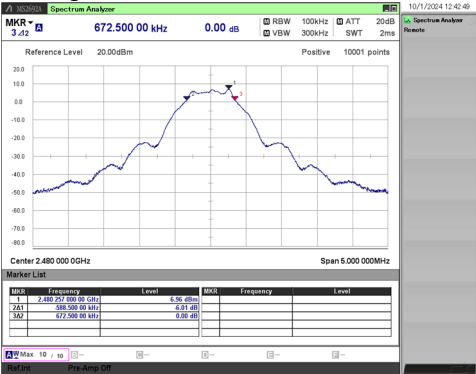


[2 Mbps / 2404 MHz]

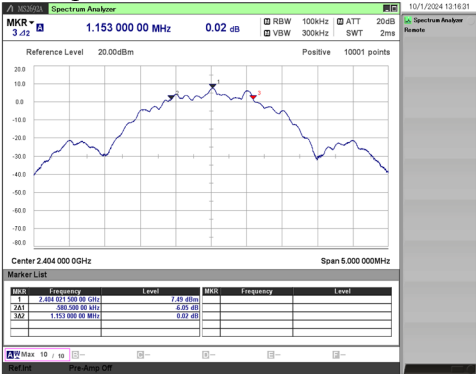

[2 Mbps / 2440 MHz]

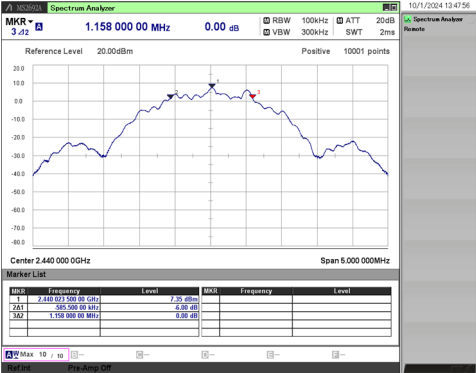

[2 Mbps / 2478 MHz]

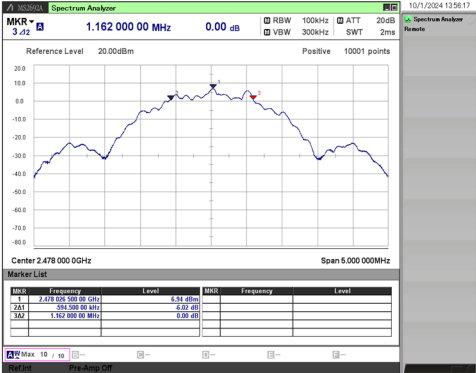

3.3. Maximum Peak Conducted Output Power

Date of measurement	Ambient temperature	Relative humidity	Measured by
October 1, 2024	23.2 deg.C	55.0 %	Mikiko Kouga

Maximum Peak Conducted Output Power


Mode	Rate [Mbps]	Ch. [MHz]	Reading(PK) [dBm]	C.F. [dB]	Conducted Output Power				
					Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Limit [W]	Margin [dB]
BLE	1	2402	7.90	1.06	8.96	0.00787	≤ 30.0	≤ 1.00	21.04
		2440	7.75	1.07	8.82	0.00762	≤ 30.0	≤ 1.00	21.18
		2480	7.19	1.08	8.27	0.00671	≤ 30.0	≤ 1.00	21.73
	2	2404	7.90	1.07	8.97	0.00789	≤ 30.0	≤ 1.00	21.03
		2440	7.75	1.07	8.82	0.00762	≤ 30.0	≤ 1.00	21.18
		2478	7.23	1.08	8.31	0.00678	≤ 30.0	≤ 1.00	21.69

3.4. Power Spectral Density


Date of measurement	Ambient temperature	Relative humidity	Measured by
October 1, 2024	23.2 deg.C	55.0 %	Mikiko Kouga

Mode	Rate [Mbps]	Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Limit [dBm]	Margin [dB]
BLE	1	2402	-8.70	1.06	-7.64	≤ 8.0	15.64
		2440	-8.94	1.07	-7.87	≤ 8.0	15.87
		2480	-9.43	1.08	-8.35	≤ 8.0	16.35
	2	2404	-10.80	1.07	-9.73	≤ 8.0	17.73
		2440	-10.88	1.07	-9.81	≤ 8.0	17.81
		2478	-11.18	1.08	-10.10	≤ 8.0	18.10


[1 Mbps / 2402 MHz]

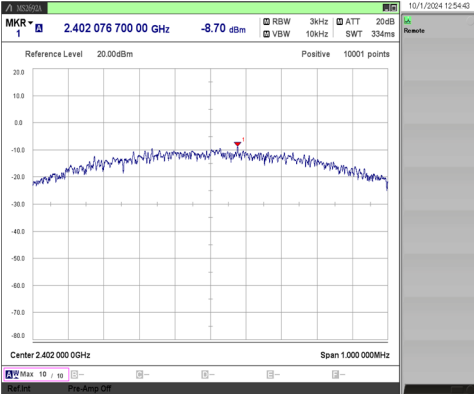


[1 Mbps / 2440 MHz]

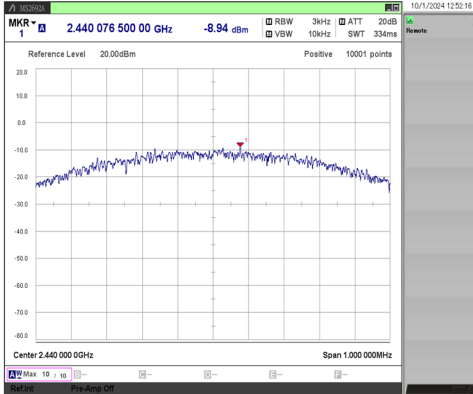


[1 Mbps / 2480 MHz]

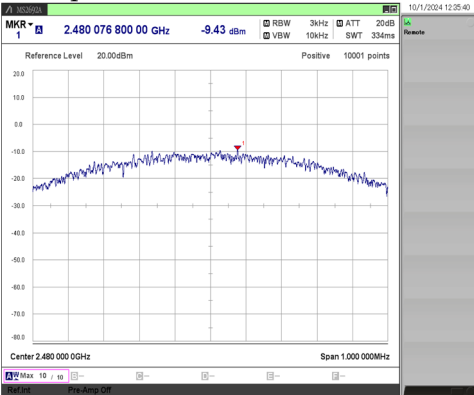


[2 Mbps / 2404 MHz]

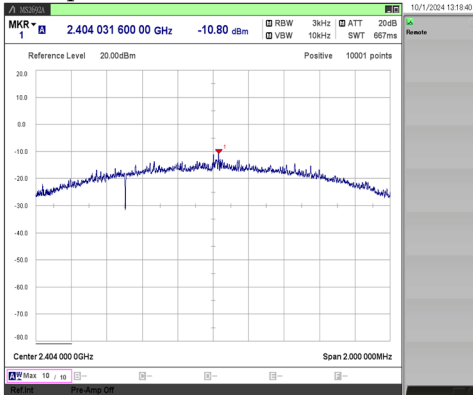

[2 Mbps / 2440 MHz]

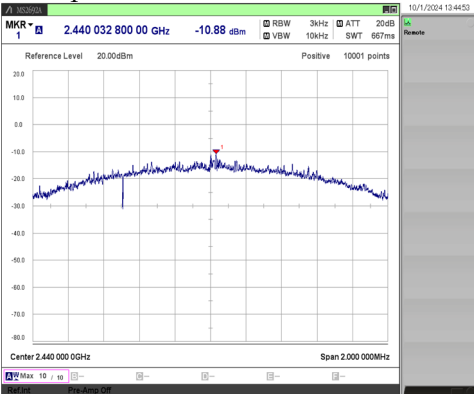

[2 Mbps / 2478 MHz]

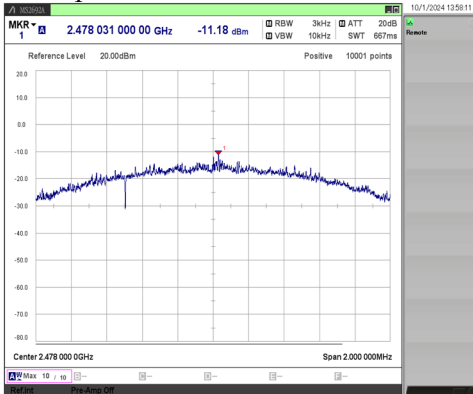



3.5. Radiated Spurious Emissions

Measurement band	Date of measurement	Ambient temperature	Relative humidity	Measured by
9 kHz to 1000 MHz	October 4, 2024	22.0 deg.C	70.0 %	Tomohiro Abe
1 GHz to 7 GHz	October 2, 2024	22.0 deg.C	71.0 %	Tomohiro Abe
	October 4, 2024	22.0 deg.C	70.0 %	Tomohiro Abe
7 GHz to 18 GHz	October 3, 2024	24.0 deg.C	69.0 %	Mikiko Kouga
18 GHz to 26.5 GHz	October 3, 2024	24.0 deg.C	69.0 %	Mikiko Kouga

9 kHz to 1000 MHz

[2 Mbps / 2404 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dBμV]	C.F. [dB/m]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position
32.683	QP	H	25.4	-10.7	14.7	≤ 40.0	25.3	153.0	250.9	X
925.799	QP	H	24.7	-0.8	23.9	≤ 46.0	22.1	395.5	300.1	X
955.930	QP	H	24.7	-0.2	24.5	≤ 46.0	21.5	208.9	2.8	X
1.634	QP	V	7.8	19.6	27.4	≤ 63.4	36.0	150.0	205.6	X
30.634	QP	V	25.7	-10.0	15.7	≤ 40.0	24.3	382.9	341.3	X
935.993	QP	V	30.0	-0.8	29.2	≤ 46.0	16.8	100.0	214.8	X
957.841	QP	V	24.6	-0.2	24.4	≤ 46.0	21.6	174.0	314.3	X

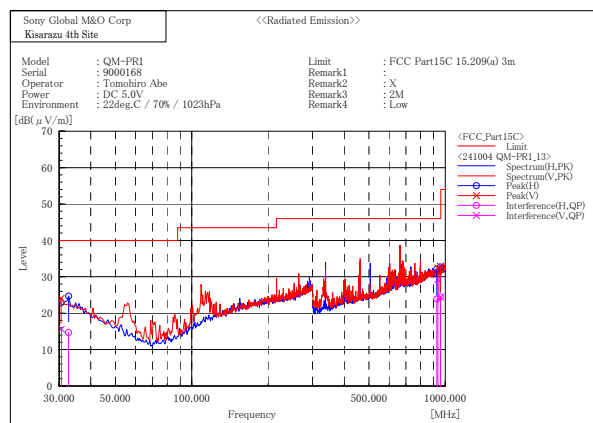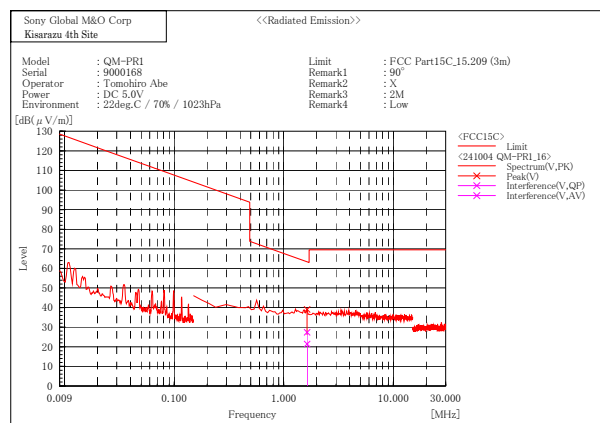

1 GHz to 26.5 GHz

* Although "Height" in radiated emissions data, which shows the height of the boom of the antenna mast, might exceed 400.0 cm. because of the antenna tilt positioner attached to the edge of the boom for the bore-sighting measurement, the height of the reference point of the antenna does not exceed 400.0 cm.

[1 Mbps / 2402 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB μ V]	C.F. [dB/m]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2390.000	AV	H	45.6	-6.4	39.2	≤ 54.0	14.8	150.5	194.4	X	10.0
2390.000	PK	H	55.0	-6.4	48.6	≤ 74.0	25.4	144.0	196.7	X	-
4803.573	AV	H	43.7	-2.1	41.6	≤ 54.0	12.4	149.9	194.2	X	10.0
4804.528	PK	H	49.3	-2.1	47.2	≤ 74.0	26.8	152.8	194.3	X	-
9606.840	PK	H	52.4	-7.3	45.1	≤ 74.0	28.9	219.0	319.0	Y	-
9606.972	AV	H	46.4	-7.3	39.1	≤ 54.0	14.9	209.0	306.0	Y	10.0
14413.301	AV	H	48.5	-5.3	43.2	≤ 54.0	10.8	199.0	44.0	Y	10.0
14413.360	PK	H	54.5	-5.3	49.2	≤ 74.0	24.8	198.0	42.0	Y	-
19216.000	AV	H	43.8	-0.2	43.6	≤ 54.0	10.4	258.0	32.0	Y	10.0
19216.000	PK	H	51.0	-0.2	50.8	≤ 74.0	23.2	282.0	32.0	Y	-
2390.000	AV	V	45.2	-6.4	38.8	≤ 54.0	15.2	324.8	173.1	X	10.0
2390.000	PK	V	56.3	-6.4	49.9	≤ 74.0	24.1	316.5	179.3	X	-
4803.559	AV	V	42.8	-2.1	40.7	≤ 54.0	13.3	419.0	130.2	X	10.0
4804.410	PK	V	48.6	-2.1	46.5	≤ 74.0	27.5	422.0	134.9	X	-
9607.000	AV	V	45.1	-7.3	37.8	≤ 54.0	16.2	100.0	258.0	Y	10.0
9609.016	PK	V	51.8	-7.3	44.5	≤ 74.0	29.5	100.0	256.0	Y	-
21618.000	AV	V	39.2	-1.0	38.2	≤ 54.0	15.8	200.0	28.0	Y	10.0
21618.000	PK	V	48.8	-1.0	47.8	≤ 74.0	26.2	202.0	29.0	Y	-

[1 Mbps / 2440 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB μ V]	C.F. [dB/m]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
4879.570	AV	H	42.3	-2.0	40.3	≤ 54.0	13.7	100.0	187.3	X	10.0
4879.953	PK	H	48.2	-2.0	46.2	≤ 74.0	27.8	100.0	188.9	X	-
7319.232	AV	H	46.2	-9.1	37.1	≤ 54.0	16.9	248.0	89.0	Y	10.0
7320.742	PK	H	53.1	-9.1	44.0	≤ 74.0	30.0	245.0	91.0	Y	-
9760.777	PK	H	51.4	-6.8	44.6	≤ 74.0	29.4	218.0	319.0	Y	-
9760.916	AV	H	44.8	-6.8	38.0	≤ 54.0	16.0	219.0	318.0	Y	10.0
14641.321	PK	H	53.6	-5.2	48.4	≤ 74.0	25.6	206.0	36.0	Y	-
14641.492	AV	H	47.8	-5.2	42.6	≤ 54.0	11.4	205.0	36.0	Y	10.0
19520.000	AV	H	42.4	-0.2	42.2	≤ 54.0	11.8	189.0	159.0	Y	10.0
19520.000	PK	H	50.8	-0.2	50.6	≤ 74.0	23.4	188.0	156.0	Y	-
4879.627	AV	V	42.0	-2.0	40.0	≤ 54.0	14.0	431.0	140.1	X	10.0
4880.511	PK	V	48.4	-2.0	46.4	≤ 74.0	27.6	431.0	144.7	X	-
9759.107	PK	V	50.8	-6.8	44.0	≤ 74.0	30.0	118.0	252.0	Y	-
9760.966	AV	V	44.2	-6.8	37.4	≤ 54.0	16.6	111.0	254.0	Y	10.0
24400.000	AV	V	39.9	-1.9	38.0	≤ 54.0	16.0	289.0	268.0	Y	10.0
24400.000	PK	V	50.0	-1.9	48.1	≤ 74.0	25.9	288.0	265.0	Y	-

[1 Mbps / 2480 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB μ V]	C.F. [dB/m]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2483.500	AV	H	51.8	-6.0	45.8	≤ 54.0	8.2	304.0	234.6	X	0.5
2483.500	PK	H	64.6	-6.0	58.6	≤ 74.0	15.4	305.6	238.8	X	-
4959.386	PK	H	47.5	-1.7	45.8	≤ 74.0	28.2	147.7	190.2	X	-
4959.500	AV	H	41.2	-1.7	39.5	≤ 54.0	14.5	146.0	188.6	X	10.0
9919.093	PK	H	50.6	-6.6	44.0	≤ 74.0	30.0	211.0	314.0	Y	-
9920.923	AV	H	44.5	-6.6	37.9	≤ 54.0	16.1	209.0	314.0	Y	10.0
14878.377	PK	H	54.4	-5.2	49.2	≤ 74.0	24.8	210.0	31.0	Y	-
14881.490	AV	H	48.0	-5.2	42.8	≤ 54.0	11.2	210.0	32.0	Y	10.0
19840.000	AV	H	44.0	-0.2	43.8	≤ 54.0	10.2	266.0	36.0	Y	10.0
19840.000	PK	H	51.0	-0.2	50.8	≤ 74.0	23.2	265.0	36.0	Y	-
2483.500	AV	V	51.1	-6.0	45.1	≤ 54.0	8.9	431.0	310.3	X	10.0
2483.500	PK	V	60.7	-6.0	54.7	≤ 74.0	19.3	431.0	312.9	X	-
4959.585	AV	V	41.7	-1.7	40.0	≤ 54.0	14.0	414.0	137.5	X	10.0
4960.364	PK	V	47.1	-1.6	45.5	≤ 74.0	28.5	418.0	150.7	X	-
14877.444	PK	V	52.1	-5.2	46.9	≤ 74.0	27.1	404.0	338.0	Y	-
14878.588	AV	V	44.8	-5.2	39.6	≤ 54.0	14.4	394.0	338.0	Y	10.0
24800.000	AV	V	39.5	-1.9	37.6	≤ 54.0	16.4	158.0	141.0	Y	10.0
24800.000	PK	V	49.4	-1.9	47.5	≤ 74.0	26.5	159.0	142.0	Y	-

[2 Mbps / 2404 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB μ V]	C.F. [dB/m]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2390.000	AV	H	48.5	-6.4	42.1	≤ 54.0	11.9	150.1	115.0	X	10.0
2390.000	PK	H	59.1	-6.4	52.7	≤ 74.0	21.3	153.1	118.3	X	-
4807.084	AV	H	42.2	-2.1	40.1	≤ 54.0	13.9	123.6	193.3	X	10.0
4809.050	PK	H	48.8	-2.1	46.7	≤ 74.0	27.3	128.6	188.9	X	-
7213.178	AV	H	44.2	-9.0	35.2	≤ 54.0	18.8	249.0	88.0	Y	10.0
7213.374	PK	H	51.6	-9.0	42.6	≤ 74.0	31.4	250.0	89.1	Y	-
9618.018	AV	H	44.8	-7.2	37.6	≤ 54.0	16.4	228.0	308.0	Y	10.0
9618.088	PK	H	51.8	-7.2	44.6	≤ 74.0	29.4	229.0	306.1	Y	-
14420.948	AV	H	47.8	-5.3	42.5	≤ 54.0	11.5	206.0	29.1	Y	10.0
14421.219	PK	H	53.9	-5.3	48.6	≤ 74.0	25.4	204.0	28.1	Y	-
19232.000	AV	H	42.4	-0.2	42.2	≤ 54.0	11.8	240.0	170.0	Y	10.0
19232.000	PK	H	50.8	-0.2	50.6	≤ 74.0	23.4	259.0	171.0	Y	-
2390.000	AV	V	49.8	-6.4	43.4	≤ 54.0	10.6	321.7	173.3	X	10.0
2390.000	PK	V	61.3	-6.4	54.9	≤ 74.0	19.1	323.5	170.7	X	-
4806.969	AV	V	41.0	-2.1	38.9	≤ 54.0	15.1	421.0	112.4	X	10.0
4808.848	PK	V	47.9	-2.1	45.8	≤ 74.0	28.2	427.1	113.8	X	-
9617.954	AV	V	44.1	-7.2	36.9	≤ 54.0	17.1	110.0	256.1	Y	10.0
9617.979	PK	V	51.2	-7.2	44.0	≤ 74.0	30.0	106.0	256.1	Y	-
14420.966	AV	V	41.4	-5.3	36.1	≤ 54.0	17.9	106.0	56.1	Y	10.0
14426.768	PK	V	49.9	-5.3	44.6	≤ 74.0	29.4	196.0	26.1	Y	-
24040.000	AV	V	39.1	-1.9	37.2	≤ 54.0	16.8	298.0	161.0	Y	10.0
24040.000	PK	V	49.1	-1.9	47.2	≤ 74.0	26.8	299.0	158.0	Y	-

[2 Mbps / 2440 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB μ V]	C.F. [dB/m]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
4878.773	PK	H	47.3	-2.0	45.3	≤ 74.0	28.7	413.8	193.3	X	-
4878.967	AV	H	40.6	-2.0	38.6	≤ 54.0	15.4	409.0	200.8	X	10.0
7321.247	PK	H	52.9	-9.1	43.8	≤ 74.0	30.2	184.0	88.0	Y	-
7321.355	AV	H	44.5	-9.1	35.4	≤ 54.0	18.6	185.0	88.0	Y	10.0
9757.835	PK	H	50.9	-6.8	44.1	≤ 74.0	29.9	224.0	304.0	Y	-
9761.968	AV	H	43.4	-6.8	36.6	≤ 54.0	17.4	220.0	306.0	Y	10.0
14637.082	AV	H	46.0	-5.2	40.8	≤ 54.0	13.2	214.0	36.0	Y	10.0
14642.983	PK	H	53.4	-5.2	48.2	≤ 74.0	25.8	214.0	29.0	Y	-
19520.000	AV	H	41.6	-0.2	41.4	≤ 54.0	12.6	254.0	166.0	Y	10.0
19520.000	PK	H	49.4	-0.2	49.2	≤ 74.0	24.8	248.0	169.0	Y	-
4879.123	PK	V	48.0	-2.0	46.0	≤ 74.0	28.0	431.0	142.1	X	-
4879.142	AV	V	41.5	-2.0	39.5	≤ 54.0	14.5	431.0	138.4	X	10.0
9758.081	PK	V	50.0	-6.8	43.2	≤ 74.0	30.8	390.0	174.0	Y	-
9761.677	AV	V	41.6	-6.8	34.8	≤ 54.0	19.2	389.0	172.0	Y	10.0
14636.850	PK	V	51.2	-5.2	46.0	≤ 74.0	28.0	378.0	358.0	Y	-
14636.923	AV	V	43.2	-5.2	38.0	≤ 54.0	16.0	378.0	345.0	Y	10.0
24400.000	AV	V	39.9	-1.9	38.0	≤ 54.0	16.0	298.0	298.0	Y	10.0
24400.000	PK	V	49.9	-1.9	48.0	≤ 74.0	26.0	294.0	299.0	Y	-


[2 Mbps / 2478 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB μ V]	C.F. [dB/m]	Result [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2483.500	AV	H	56.5	-6.0	50.5	≤ 54.0	3.5	377.1	237.4	X	1.0
2483.500	PK	H	66.9	-6.0	60.9	≤ 74.0	13.1	380.1	243.7	X	-
4954.951	AV	H	39.9	-1.7	38.2	≤ 54.0	15.8	423.5	190.0	X	10.0
4955.022	PK	H	47.7	-1.7	46.0	≤ 74.0	28.0	399.3	191.8	X	-
9909.906	PK	H	50.8	-6.6	44.2	≤ 74.0	29.8	229.0	316.1	Y	-
9910.058	AV	H	43.1	-6.6	36.5	≤ 54.0	17.5	224.0	320.2	Y	10.0
14867.964	AV	H	46.2	-5.2	41.0	≤ 54.0	13.0	218.0	32.1	Y	10.0
14871.022	PK	H	53.8	-5.2	48.6	≤ 74.0	25.4	222.0	29.1	Y	-
19824.000	AV	H	41.6	-0.2	41.4	≤ 54.0	12.6	256.0	29.0	Y	10.0
19824.000	PK	H	50.0	-0.2	49.8	≤ 74.0	24.2	261.0	32.0	Y	-
2483.500	AV	V	54.6	-6.0	48.6	≤ 54.0	5.4	431.0	321.0	X	1.0
2483.500	PK	V	65.0	-6.0	59.0	≤ 74.0	15.0	431.0	322.5	X	-
4956.901	AV	V	36.3	-1.7	34.6	≤ 54.0	19.4	431.0	355.6	X	10.0
4957.375	PK	V	45.1	-1.7	43.4	≤ 74.0	30.6	431.0	1.5	X	-
9909.992	AV	V	41.5	-6.6	34.9	≤ 54.0	19.1	414.0	15.1	Y	10.0
9914.154	PK	V	49.5	-6.6	42.9	≤ 74.0	31.1	414.0	4.1	Y	-
24780.000	AV	V	39.9	-1.9	38.0	≤ 54.0	16.0	268.0	12.0	Y	10.0
24780.000	PK	V	50.0	-1.9	48.1	≤ 74.0	25.9	270.0	10.0	Y	-


Plot data for 2.4 GHz Restricted-Band Edge

These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390 MHz and above 2483.5 MHz)
The result of the final radiated spurious emissions measurement refers in previous pages.


[1 Mbps / 2402 MHz]

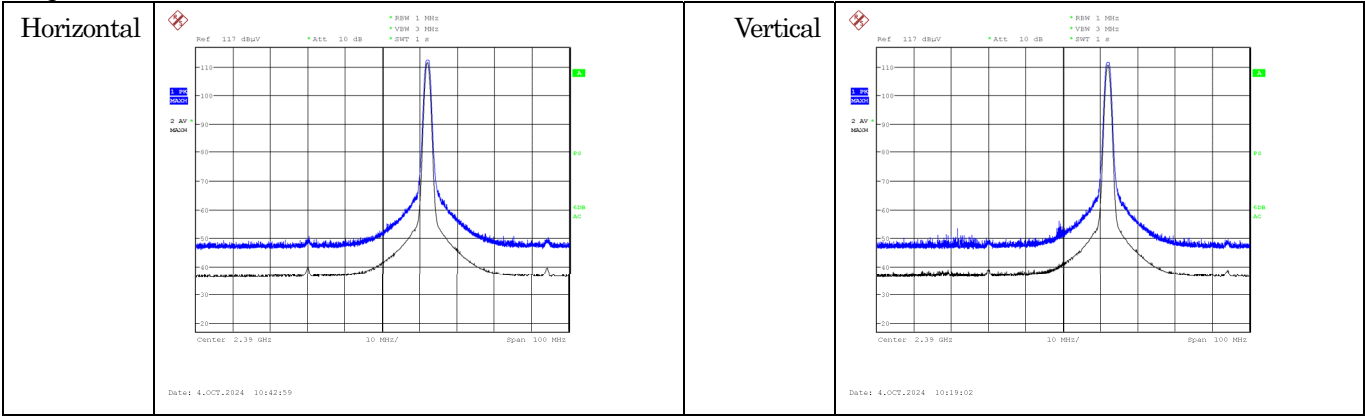


[1 Mbps / 2480 MHz]

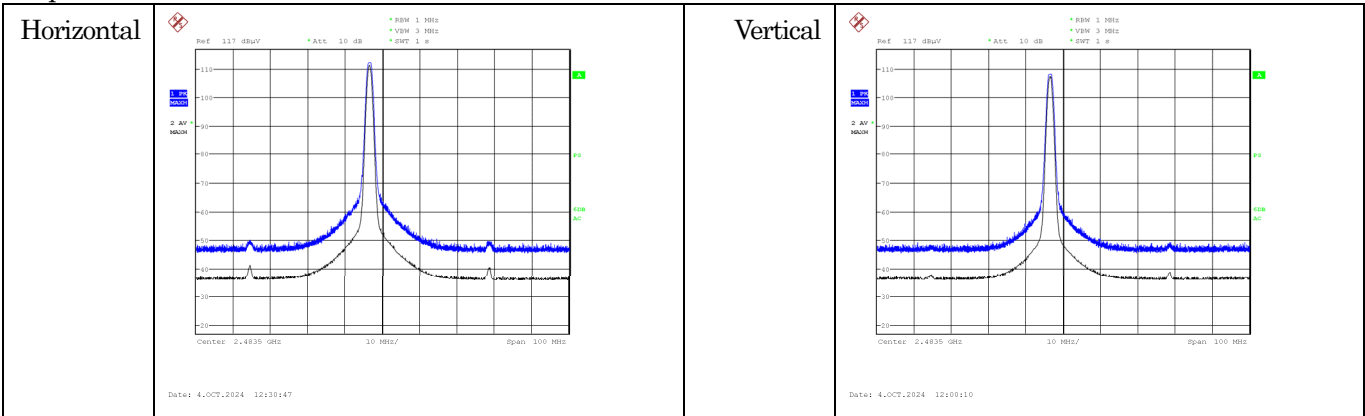







[2 Mbps / 2404 MHz]

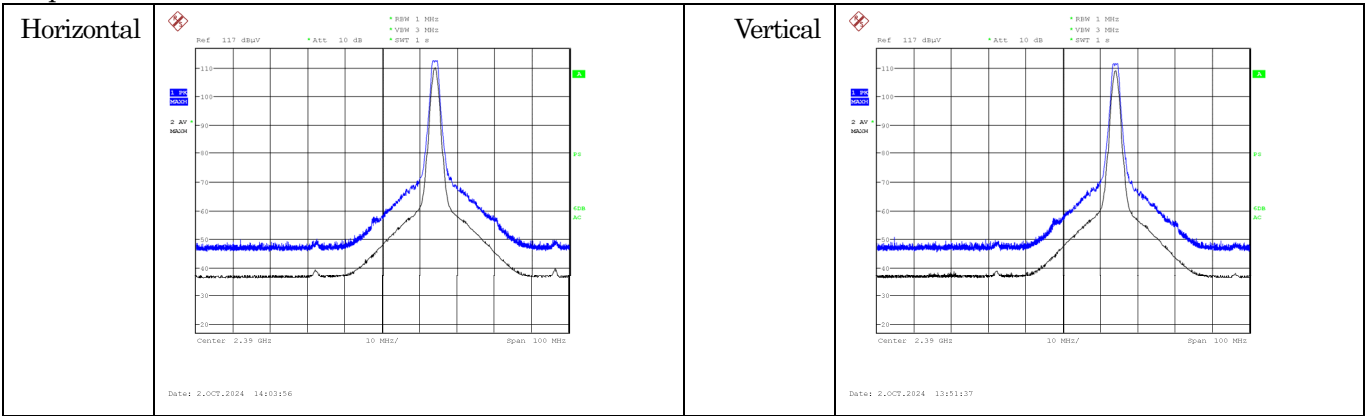

[2 Mbps / 2478 MHz]

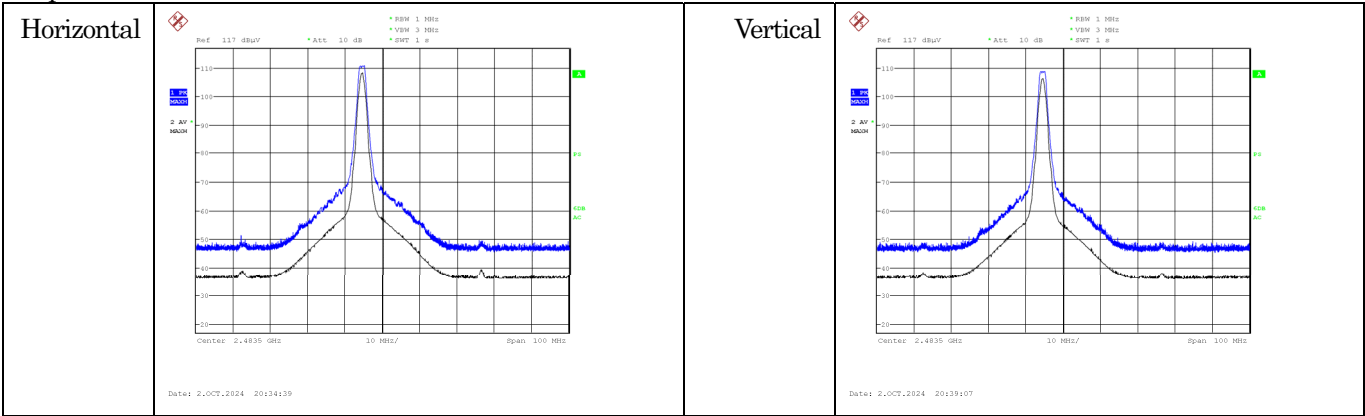

Plot data for above 1 GHz in worst mode

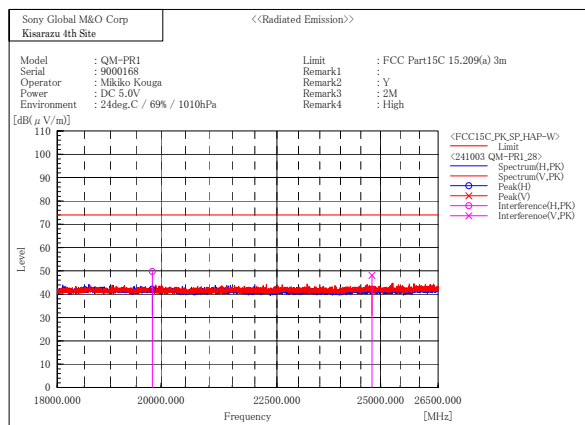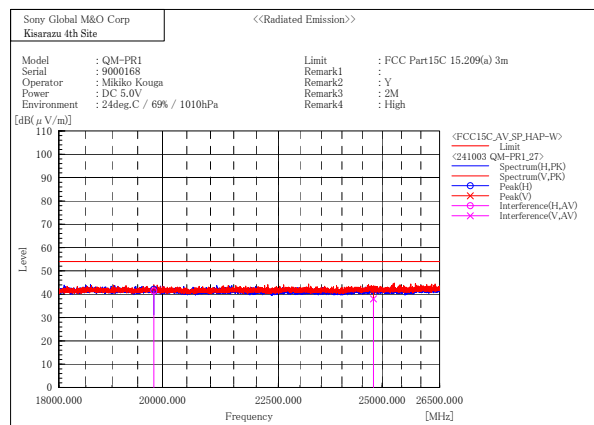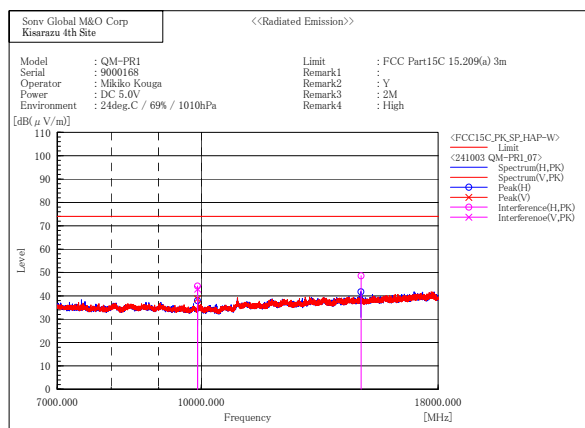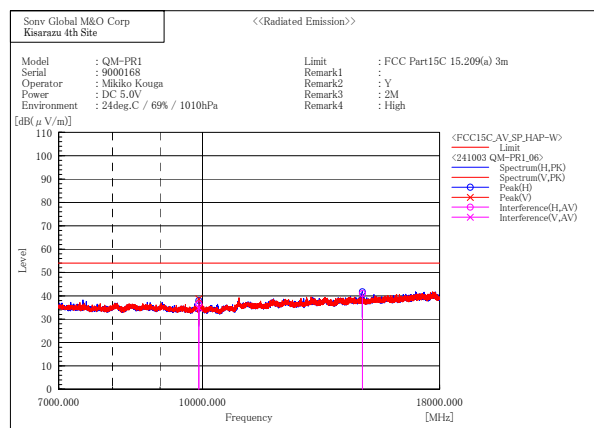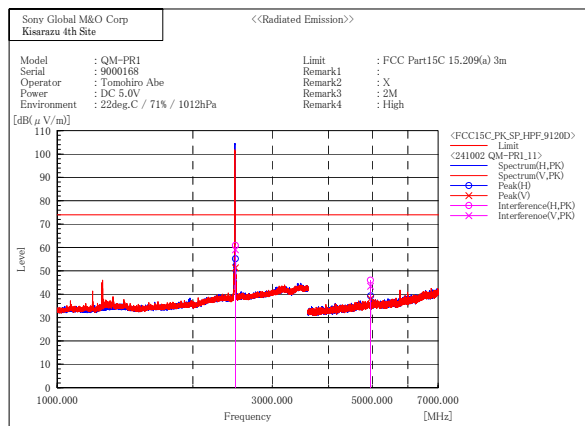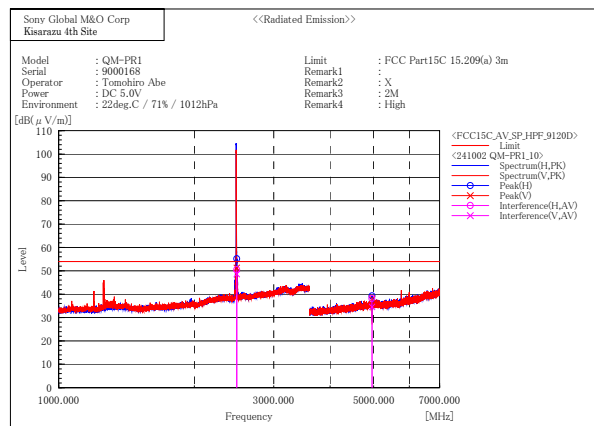


3.6. Conducted Spurious Emissions for Band Edge


Date of measurement	Ambient temperature	Relative humidity	Measured by
October 1, 2024	23.2 deg.C	55.0 %	Mikiko Kouga

Mode	Rate [Mbps]	Channel [MHz]	Frequency [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
BLE	1	2402	2402.25	7.60	1.06	8.66	-	-
			2400.00	-40.06	1.06	-39.00	≤ -11.34	27.66
	2	2404	2404.02	7.51	1.07	8.58	-	-
			2399.56	-41.34	1.06	-40.28	≤ -11.42	28.86

[1 Mbps / 2402 MHz]

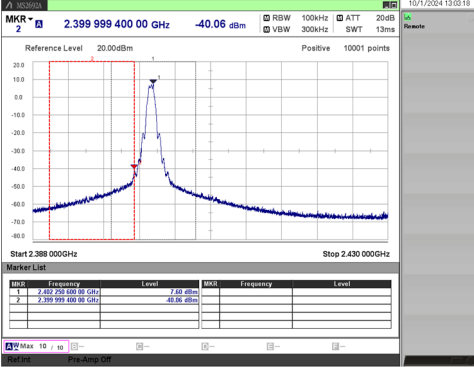

[2 Mbps / 2404 MHz]

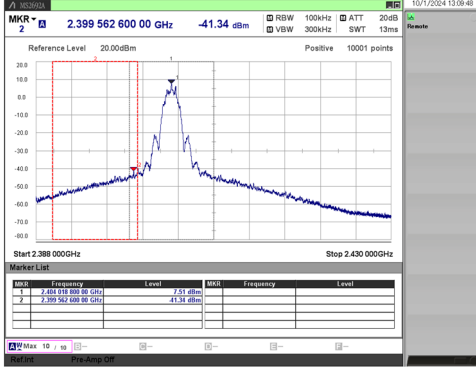

4. Method of Calculation

4.1. AC Power-line Conducted Emissions

Method of calculation : Software
Software Name : ES10/ CE
Software Version : 2024.07.000

Test Result [dB μ V] = Meter Reading [dB μ V] + C.F. [dB]

Note (a) Meter Reading : Reading of the EMI test receiver.
(b) C.F. : System Loss + Correction Factor of LISN

4.2. Maximum Peak Conducted Output Power

Method of calculation : Software
Software Name : SW-0316
Software Version : Ver.3

Conducted Output Power Result (PK) [dBm] = Meter Reading [dBm] + C.F. [dB]

Note (a) Meter Reading : Reading of the power meter
(b) C.F. : System Cable Loss + EUT Cable Loss

4.3. Power Spectral Density

Method of calculation : Software
Software Name : SW-0316
Software Version : Ver.3

Test Result [dBm] = Meter Reading [dBm] + C.F. [dB]

Note (a) Meter Reading : Reading of the spectrum analyzer
(b) C.F. : System Cable Loss + EUT Cable Loss

4.4. Radiated Spurious Emissions

Method of calculation : Software
Software Name : V-Scan
Software Version : Ver.4.0.30

Test Result [dB μ V/ m] = Meter Reading [dB μ V] + C.F. [dB/ m]

Note (a) Meter Reading : Reading of the EMI test receiver or the spectrum analyzer.
(b) C.F. : ☒ Antenna Factor (including Balun Loss) + System GainLoss
: ☐ Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)

4.5. Conducted Spurious Emissions for Band Edge

Method of calculation : Software
Software Name : SW-0316
Software Version : Ver.3

Test Result [dBm] = Meter Reading [dBm] + C.F. [dB]

Note (a) Meter Reading : Reading of the spectrum analyzer.
(b) C.F. : System Cable Loss + EUT Cable Loss

5. List of Test Equipment

All test results are traceable to the national and/or international standards.

5.1. AC Power-line Conducted Emissions

Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
M5342	EMI Receiver	ESW8	101137	Rohde & Schwarz	12 months	24.05.24
CS0058	Fourth Site CE Cable SYSTEM 2	-	-	-	12 months	24.05.12
M0606	LISN/AMN	ENV216	101306	Rohde & Schwarz	12 months	24.05.12
M5062	Scientific Ambient Monitor	0560 6220	39515563/802	testo	12 months	23.10.10
M3528	Temperature Meter	608-H2	30038344	testo	24 months	23.08.03

5.2. Antenna-port Conducted Measurements

Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
W0006	Power Meter	N1911A	MY50000295	Agilent Technologies	12 months	23.11.02
W0007	Power Sensor	N1922A	MY50180022	Agilent Technologies	12 months	23.11.02
W0100	Signal Analyzer	MS2692A	6201338954	Anritsu	12 months	23.11.02
WC0003	50 ohm Coaxial Cable (1 m)	SUCOFLEX102	34127/2	HUBER + SUHNER	12 months	23.11.02
M0719	Thermo Meter	TH-321	140053	AS ONE	12 months	24.05.10

5.3. Radiated Spurious Emissions

Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
M0504	EMI Receiver	ESU40	100086	Rohde & Schwarz	12 months	23.12.02
A0073	Loop Antenna	HFH2-Z2	100171	Rohde & Schwarz	12 months	23.12.01
A0043	Biconical Antenna	BBA9106	VHA91032598	Schwarzbeck	12 months	23.12.01
A0046	Logperiodic Antenna	UHALP9108A1	0830	Schwarzbeck	12 months	23.12.01
A0056	Horn Antenna	BBHA9120D	670	Schwarzbeck	12 months	24.03.03
A0057	Horn Antenna Pre-Amplifier Assembly	HAP06-18W	00000037	Toyo Corporation	12 months	24.03.03
A0058	Horn Antenna Pre-Amplifier Assembly	HAP18-26W	00000016	Toyo Corporation	12 months	24.02.13
CS0039	Fourth Site RE Cable SYSTEM 3	-	-	-	12 months	24.05.12
CS0054	Fourth Site EMF Cable SYSTEM	-	-	-	12 months	24.05.12
M1055	GHz Filter Box	WSF-109	17111786	Wakoh	12 months	24.03.03
M0510	RF Selector	NS4900	0802-226	Toyo Corporation	-	-
M0620	RF Pre-Amp	8447D	2944A10720	Agilent Technologies	-	-
M0706	3 dB Attenuator	8491A 3 dB	MY52460858	Agilent Technologies	12 months	24.05.12
M1048	Scientific Ambient Monitor	0560 6220	39512479/703	testo	12 months	24.09.09
M5062	Scientific Ambient Monitor	0560 6220	39515563/802	testo	12 months	23.10.10
M5314	Temperature Meter	608-H2	83148485	testo	24 months	23.09.04

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.