


7.4. Test Results.

EUT: Active Subwoofer			
M/N: YY2089C2			
Test date: 2024-09-02		Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Winter		Test site: RF site	Temperature: 23.1±0.6°C
Test Mode	Channel Separation(MHz)	Limit(MHz)	Conclusion
GFSK	1	0.636	PASS
8-DPSK	1	0.845	PASS

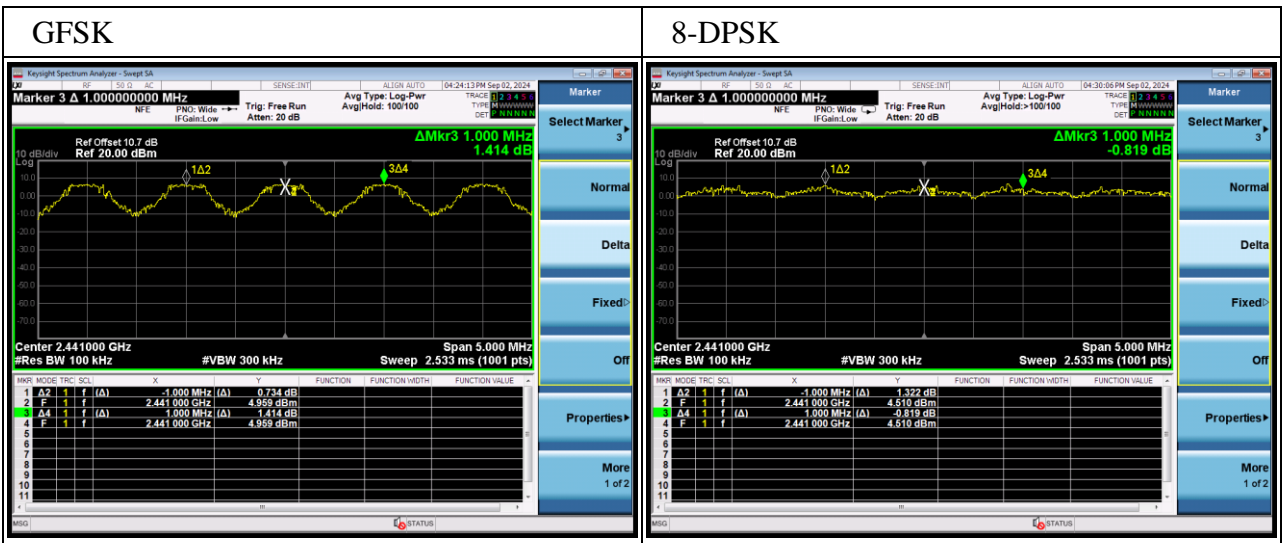

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-JJ -2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

8.3. Test Procedure


Use the test method described in ANSI C63.10 clause 7.8.3:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
 2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz,
Start frequency: 2390MHz
Stop frequency: 2483.5MHz
- And waiting for the hopping trace until stability, count out the number of the hopping.

8.4. Test Results

EUT: Active Subwoofer		
M/N: YY2089C2		
Test date: 2024-09-02	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Winter	Test site: RF site	Temperature: 23.1±0.6°C

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	≥15	PASS
8-DPSK	79	≥15	PASS

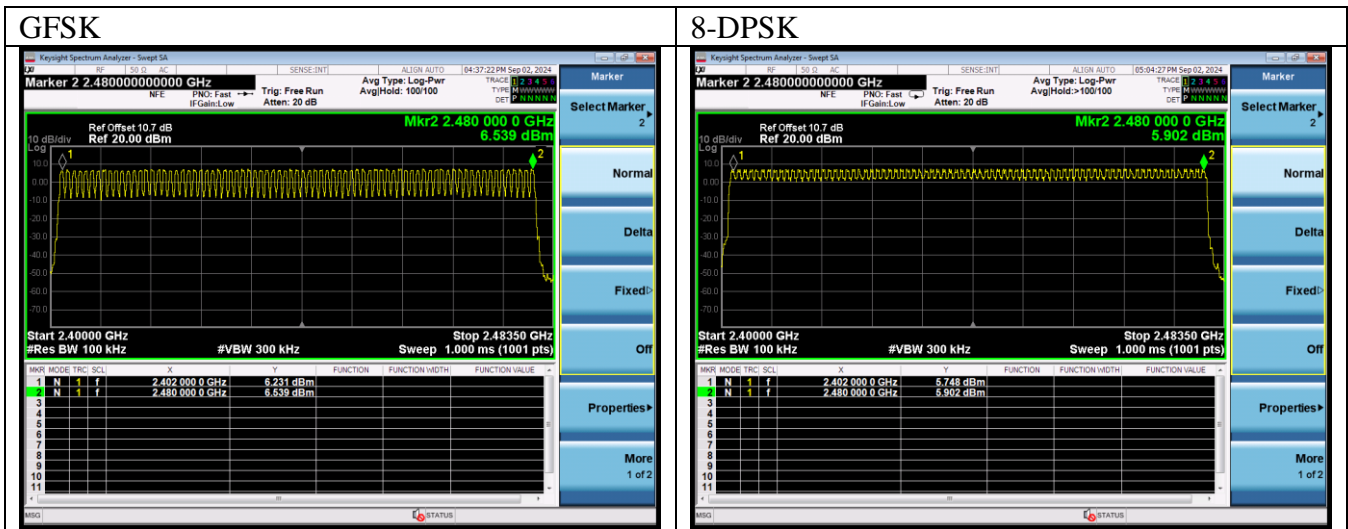

9. DWELL TIME TEST

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-J J-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.4:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:
RBW: 100kHz / VBW: 300kHz
Sweep Mode: Single
Detect mode: Positive peak
Trace mode: Auto
Span: 0Hz
Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time
Dwell time=Hopping number per second*0.4*channel number*Pulse bandwidth per hopping.

9.4. Test Results


EUT: Active Subwoofer		
M/N: YY2089C2		
Test date: 2024-10-15	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Winter	Test site: RF site	Temperature: 23.1±0.6°C

Mode		dwel time	Limit	Conclusion
GFSK	DH1	51 hops/5s*0.4s*79chanel* 0.421 ms =135.697ms	≤400ms	PASS
	DH3	25 hops/5s*0.4s*79chanel* 1.680 ms =265.440ms	≤400ms	PASS
	DH5	17 hops/5s*0.4s*79chanel* 2.930 ms =314.799ms	≤400ms	PASS
8-DPSK	3-DH1	51 hops/5s*0.4s*79chanel* 0.423 ms =136.341ms	≤400ms	PASS
	3-DH3	26 hops/5s*0.4s*79chanel* 1.689 ms =277.536ms	≤400ms	PASS
	3-DH5	17 hops/5s*0.4s*79chanel* 2.935 ms =315.336ms	≤400ms	PASS



Note: All the lower levels were signaled from receiver and should not be considered in here.

GFSK


DH 1

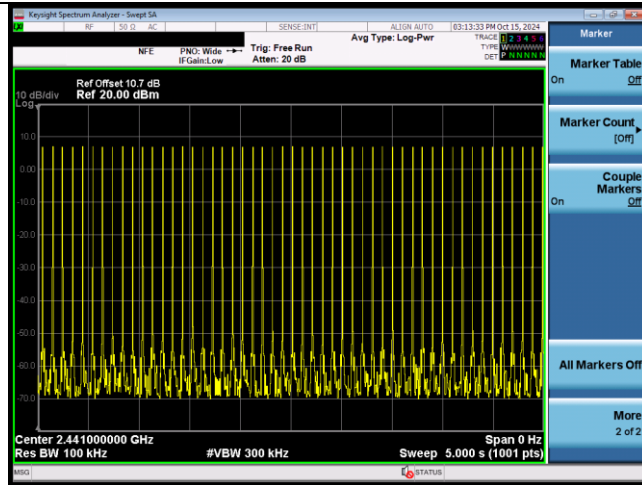

DH 3

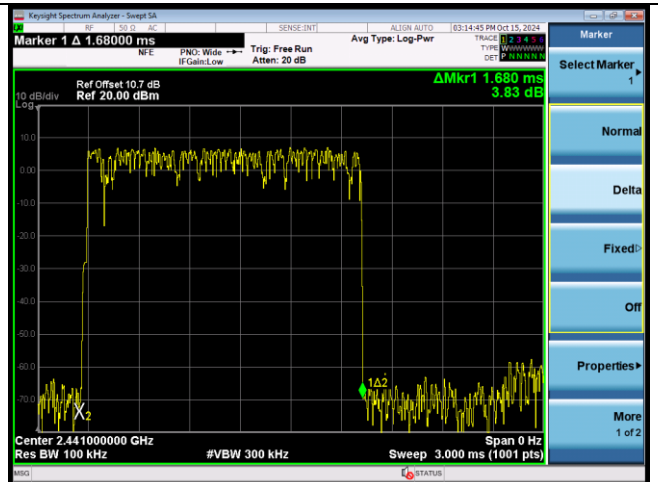
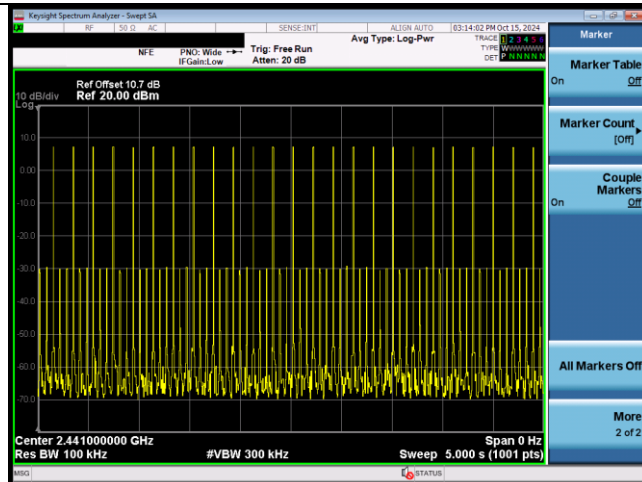


DH 5

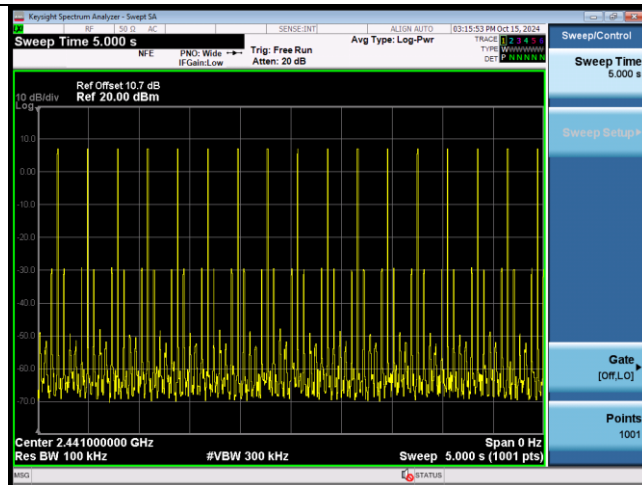


8-DPSK



3DH 1

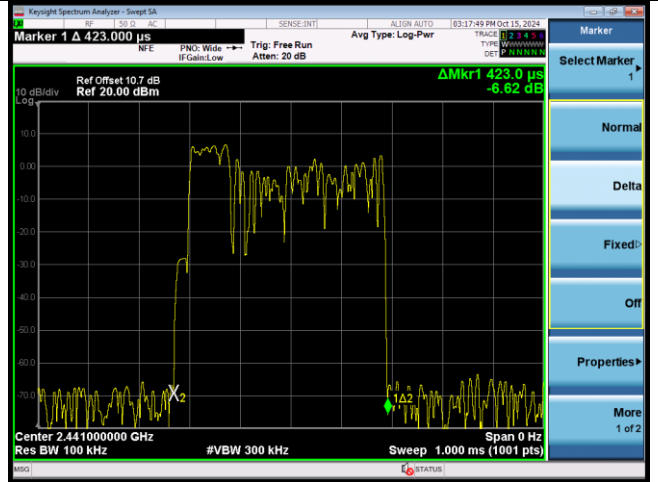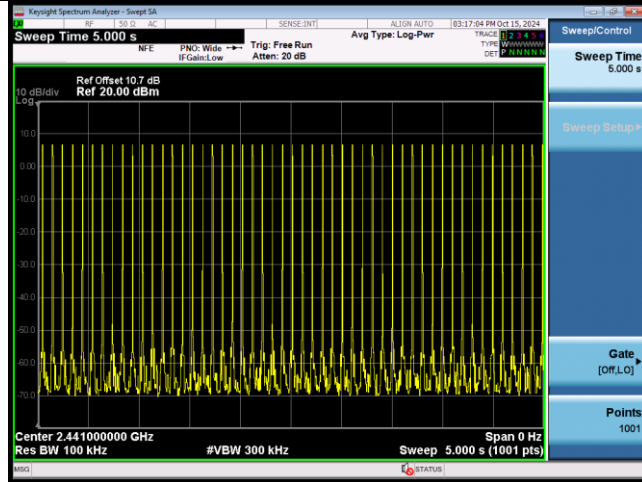

3DH 3

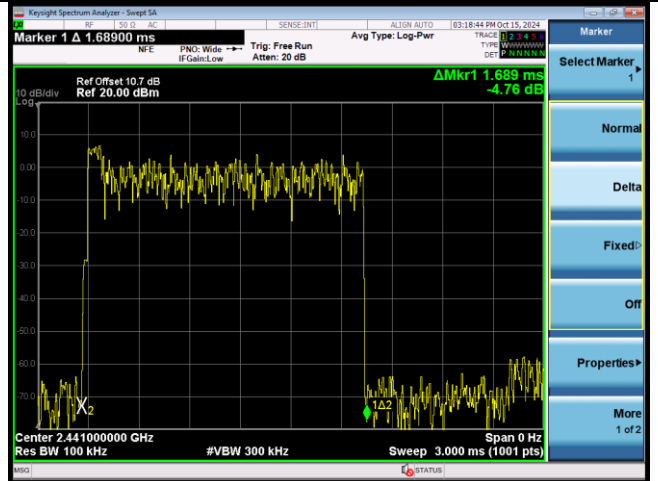

3DH 5

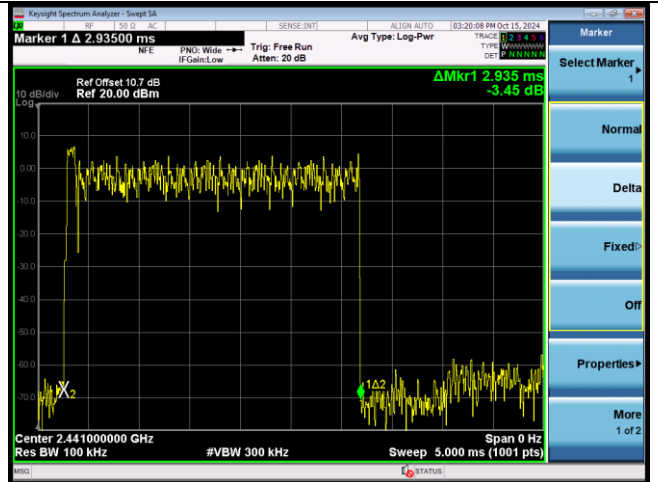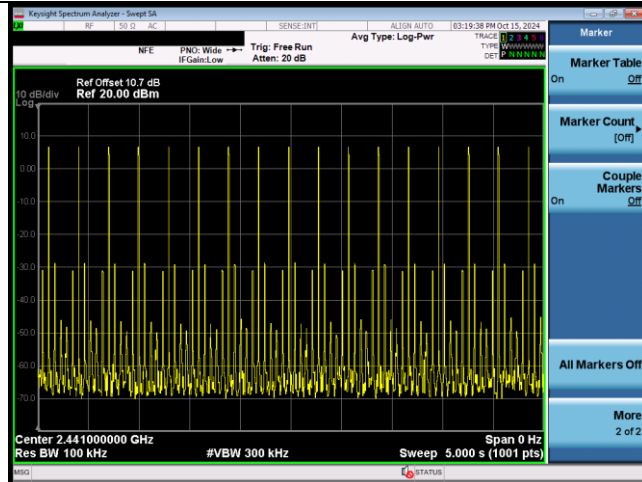

10. MAXIMUM PEAK OUTPUT POWER TEST

10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/ N-JJ-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year
4.	USB Wideband Power Sensor	Agilent	U2021XA	MY54180007	Mar.16,24	1 Year

10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

10.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.9.1:
Connected the EUT's Antenna port to PXA signal analyzer;
For Peak output power: Connected the EUT's Antenna port to PXA signal analyzer.
For Average power: Connected the EUT's Antenna port to power meter.

10.4.Test Results

EUT: Active Subwoofer		
M/N: YY2089C2		
Test date: 2024-08-29~10-15	Pressure: 102.4±1.0 kpa	Humidity: 54.7±3.0%
Tested by: Winter	Test site: RF site	Temperature:23.6±0.6 °C


Test Mode	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	Average Power (dBm) (Without Duty cycle Factor)	Duty cycle Factor (dBm)	Average Power (dBm) (with Duty cycle Factor)	Limit (dBm)
GFSK	2402	8	7.217	6.347	1.1	7.447	21
	2441	8	7.105	6.263	1.1	7.363	
	2480	8	7.159	6.367	1.1	7.467	
8-DPSK	2402	8	8.137	5.032	1.09	6.122	21
	2441	8	8.177	5.116	1.09	6.206	
	2480	8	8.257	5.016	1.09	6.106	

Conclusion: Pass

Remark: Duty cycle Factor=10*log(1/duty cycle)


GFSK

2402MHz

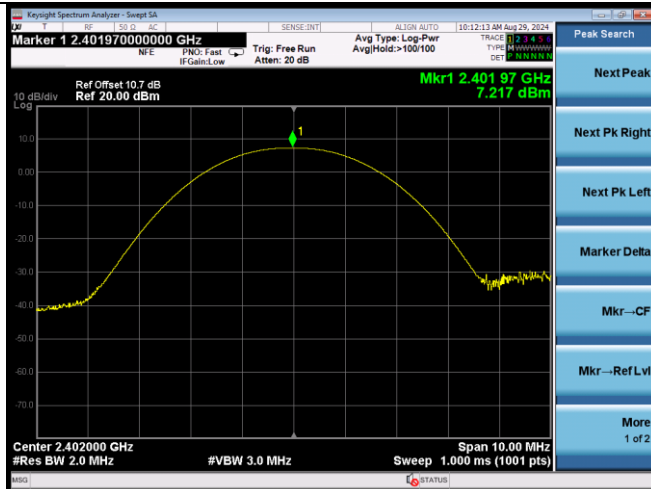


8-DPSK


2402MHz

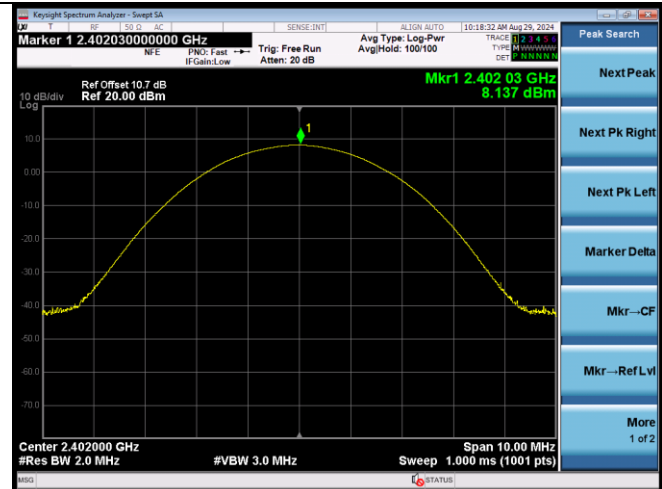


2441MHz

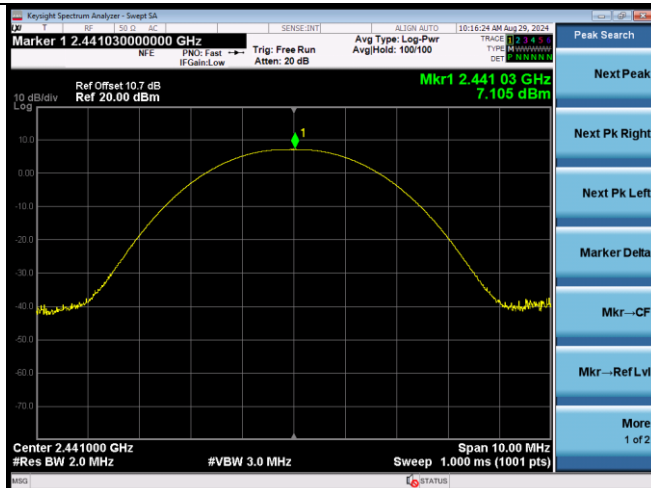


2441MHz

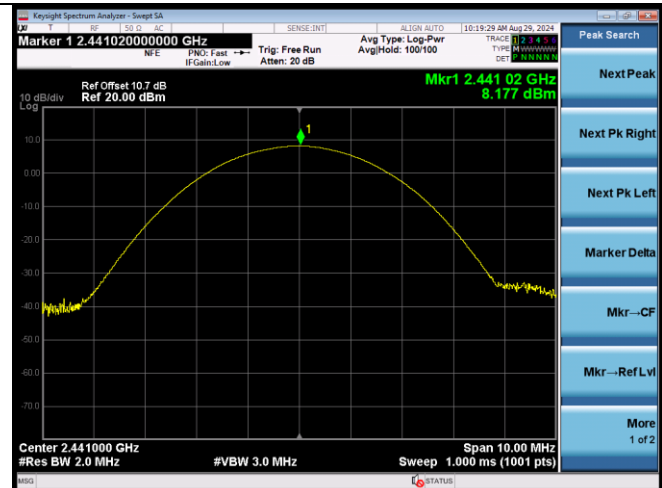


2480MHz

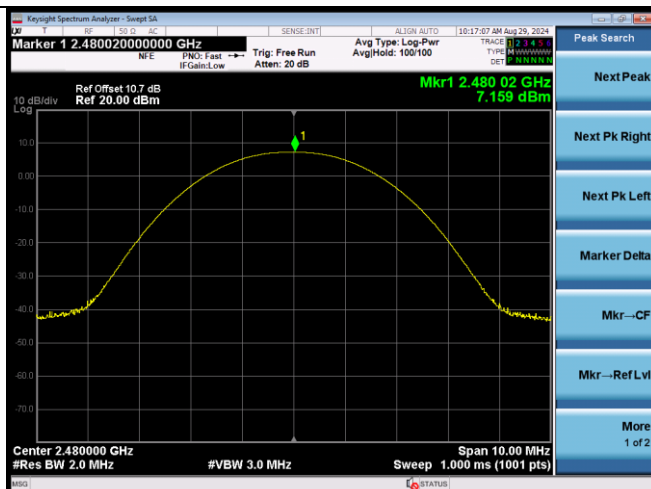

2480MHz

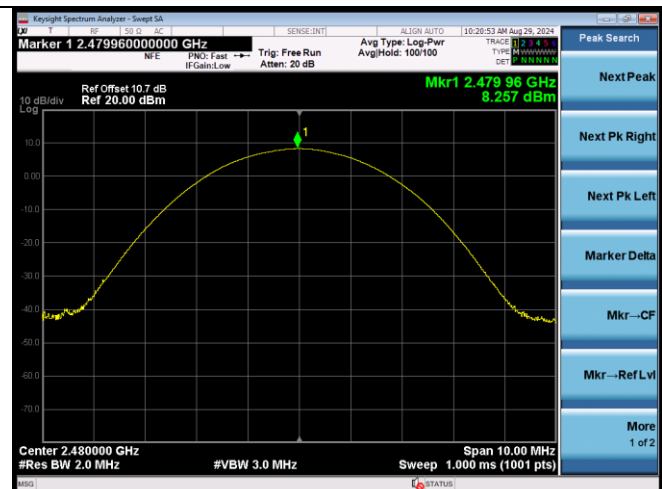

Duty cycle :

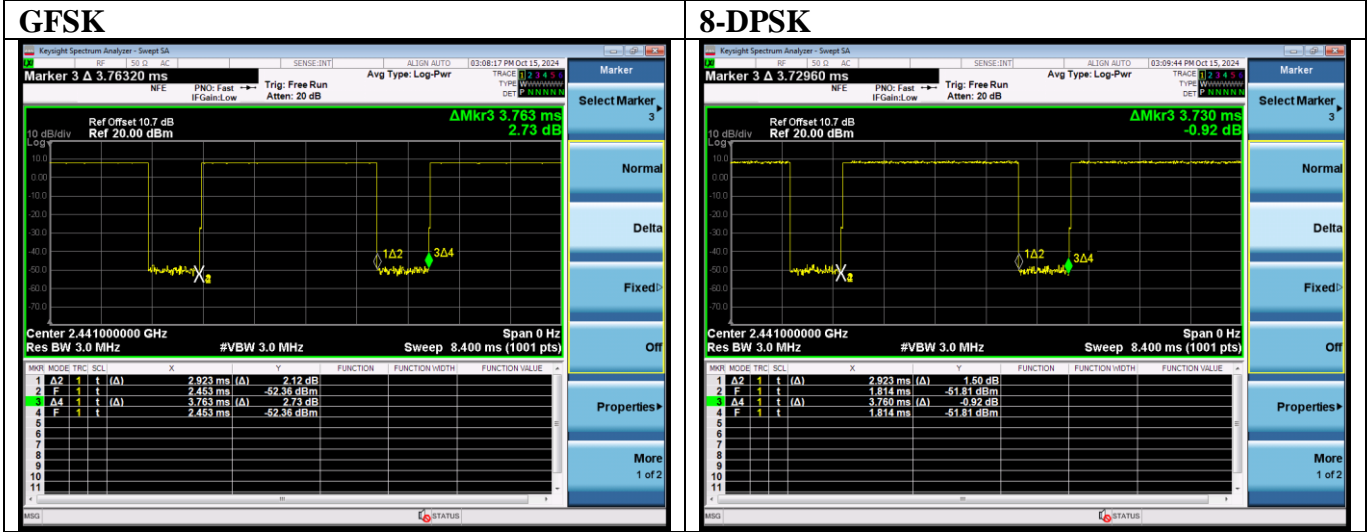

11. BAND EDGE COMPLIANCE TEST

11.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,23	1 Year
4.	Amplifier	HP	8447D	2944A11159	Mar.17,24	1 Year
5.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	EMCO	3115	9510-4580	Jan.08,22	3 Year

Note: N/A means Not applicable.

11.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

11.3. Test Produce

Use the test method described in ANSI C63.10 clause 7.8.6:

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205

For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.


4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

11.4. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.


Test Mode	ANT. PLO.	Frequency (MHz)	Peak(dBuv/m)		Margin	Duty cycle factor (dB)	AV(dBuv/m)		Margin	Conclusion
			Emission Level	Limit			Emission Level	Limit		
GFSK	V	2390	45.79	74	28.210	-16.713	29.077	54	24.923	Pass
GFSK	H	2390	44.81	74	29.190	-16.713	28.097	54	25.903	Pass
GFSK	H	2483.5	47.44	74	26.560	-16.713	30.727	54	23.273	Pass
GFSK	H	2500	44.37	74	29.630	-16.713	27.657	54	26.343	Pass
GFSK	V	2483.5	46.78	74	27.220	-16.713	30.067	54	23.933	Pass
GFSK	V	2500	43.76	74	30.240	-16.713	27.047	54	26.953	Pass
8-DPSK	H	2390	45.48	74	28.520	-16.713	28.767	54	25.233	Pass
8-DPSK	V	2390	44.88	74	29.120	-16.713	28.167	54	25.833	Pass
8-DPSK	V	2483.5	47.19	74	26.810	-16.713	30.477	54	23.523	Pass
8-DPSK	V	2500	46.24	74	27.760	-16.713	29.527	54	24.473	Pass
8-DPSK	H	2483.5	46.06	74	27.940	-16.713	29.347	54	24.653	Pass
8-DPSK	H	2500	47.77	74	26.230	-16.713	31.057	54	22.943	Pass

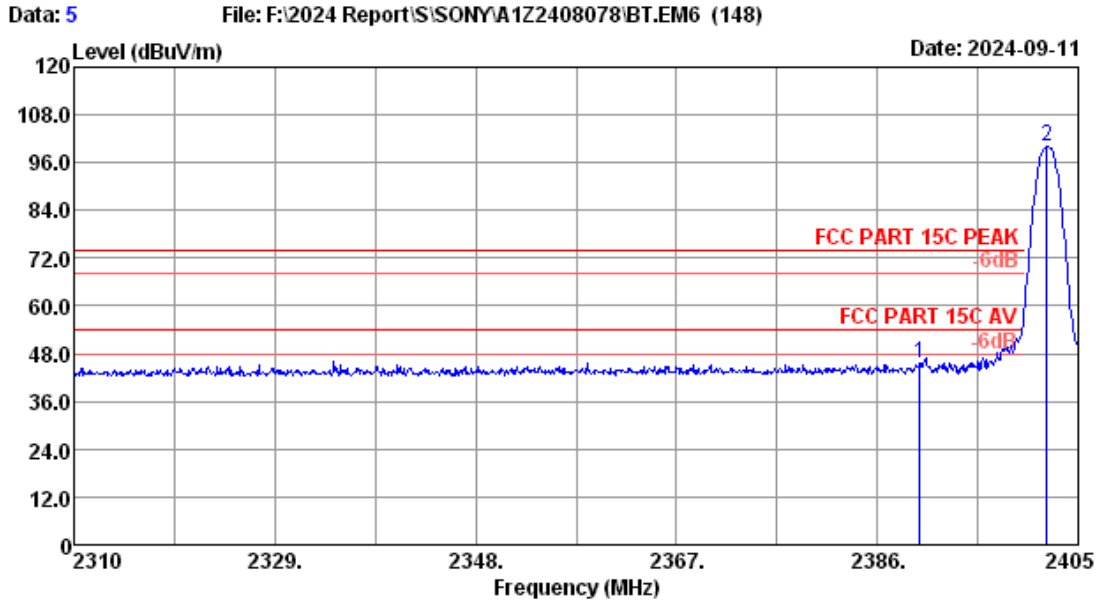

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : WINTER
 Test Mode : BT3.0 GFSK 2402 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	44.09	31.70	45.79	74.00	28.21	Peak
2	2402.06	28.11	5.32	98.16	31.70	99.89	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

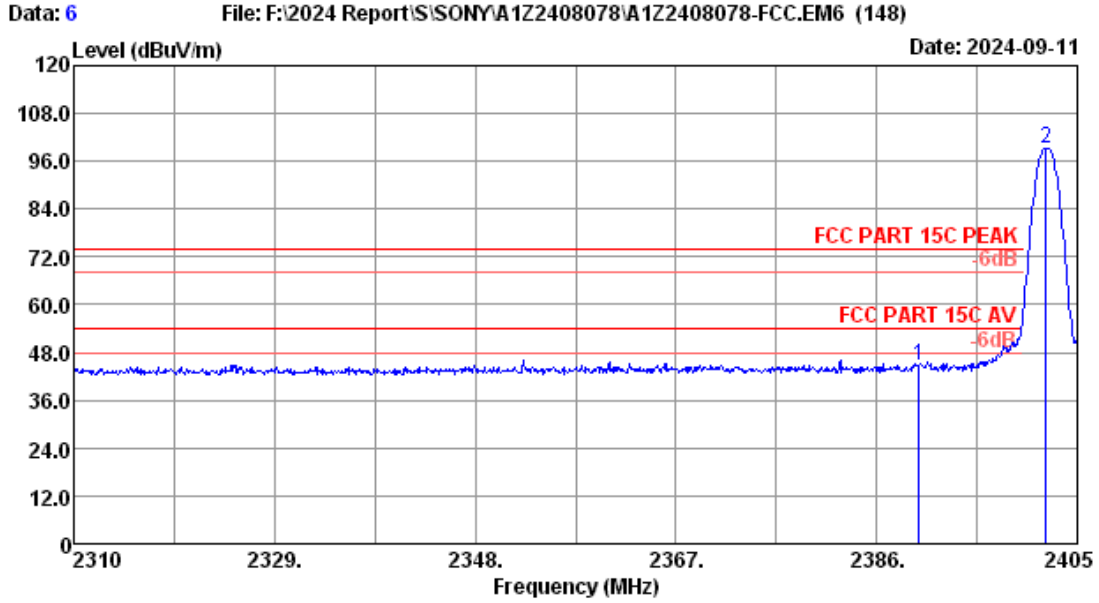

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2*C/52.5% Engineer : WINTER
 Test Mode : BT3.0 GFSK 2402 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	43.11	31.70	44.81	74.00	29.19	Peak
2	2402.06	28.11	5.32	97.50	31.70	99.23	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

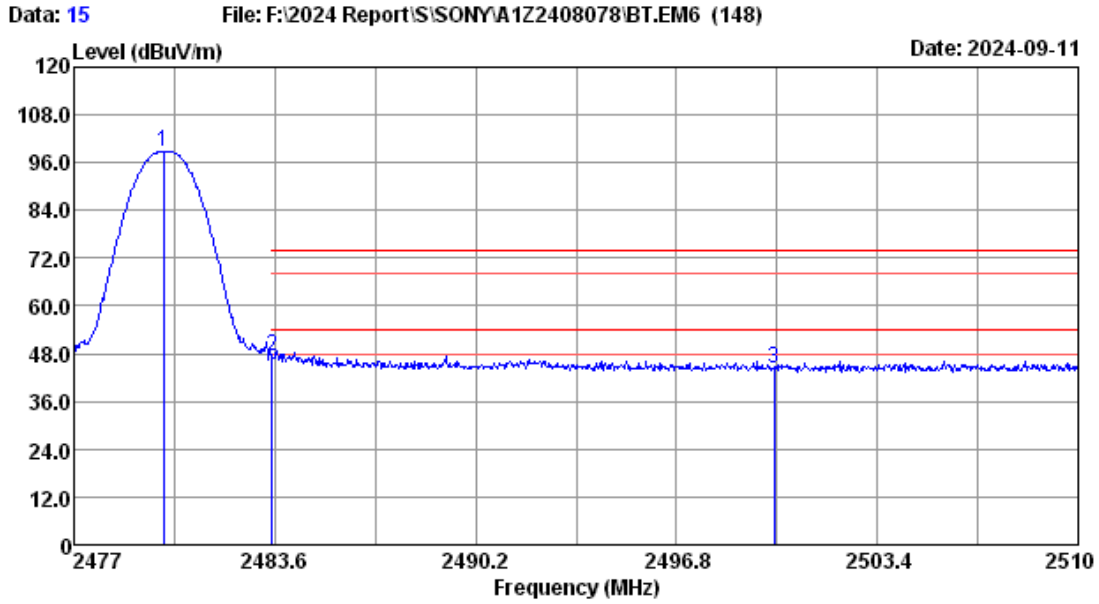

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : WINTER
 Test Mode : BT3.0 GFSK 2480 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.94	28.30	5.41	96.68	31.66	98.73	-----	-----	Peak
2	2483.50	28.30	5.41	45.39	31.66	47.44	74.00	26.56	Peak
3	2500.00	28.30	5.44	42.28	31.65	44.37	74.00	29.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

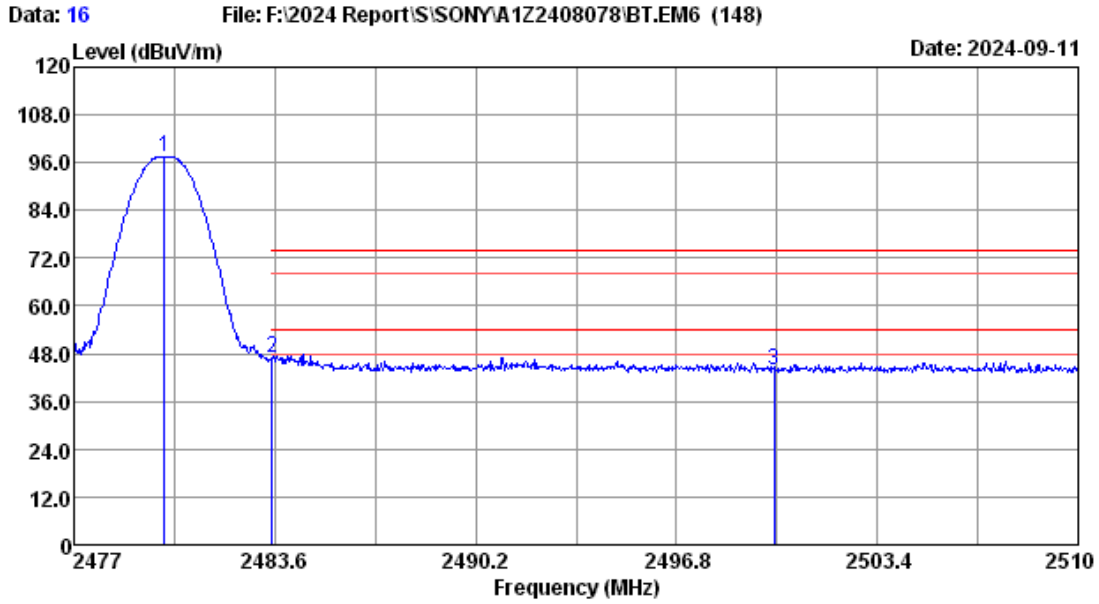

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : WINTER
 Test Mode : BT3.0 GFSK 2480 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.97	28.30	5.41	95.52	31.66	97.57	-----	-----	Peak
2	2483.50	28.30	5.41	44.73	31.66	46.78	74.00	27.22	Peak
3	2500.00	28.30	5.44	41.67	31.65	43.76	74.00	30.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

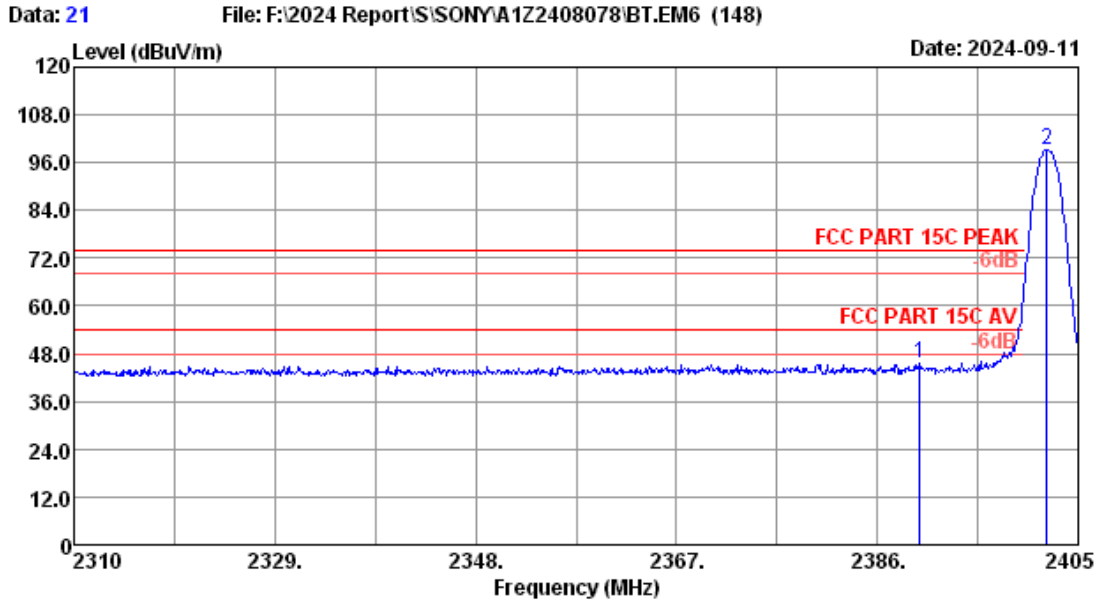

Site no.	: 3m Chamber	Data no.	: 21
Dis. / Ant.	: 3m 2022 3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: WINTER
Env. / Ins.	: 23.2°C/52.5%		
Test Mode	: BT3.0 8DPSK 2402 TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	43.78	31.70	45.48	74.00	28.52	Peak
2	2402.06	28.11	5.32	97.63	31.70	99.36	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

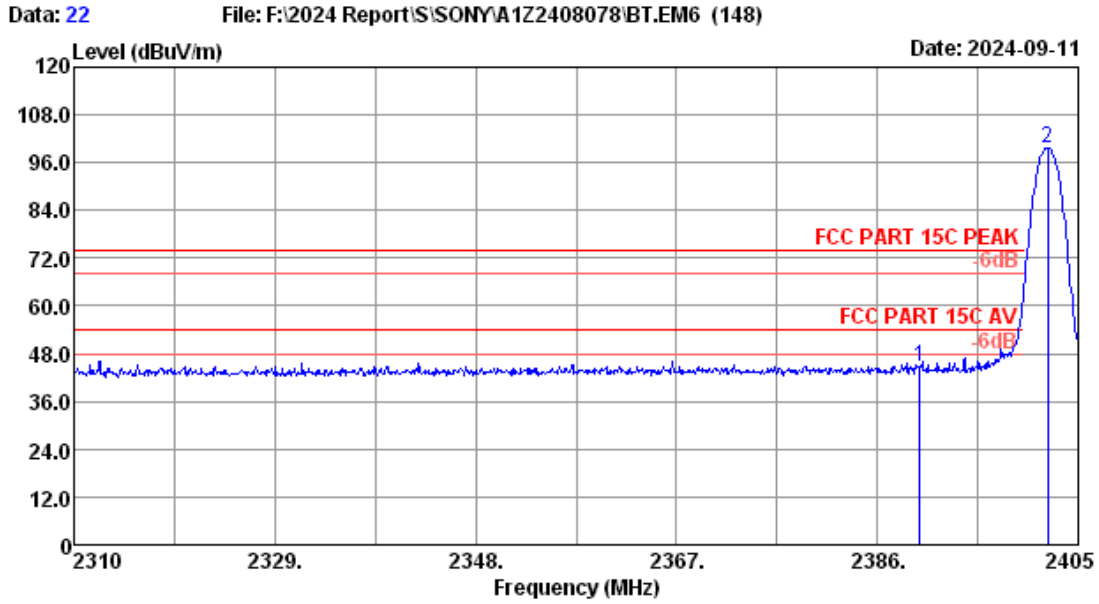

Site no.	: 3m Chamber	Data no.	: 22
Dis. / Ant.	: 3m 2022 3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.2°C/52.5%	Engineer	: WINTER
Test Mode	: BT3.0 8DPSK 2402 TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	43.18	31.70	44.88	74.00	29.12	Peak
2	2402.15	28.11	5.32	97.98	31.70	99.71	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

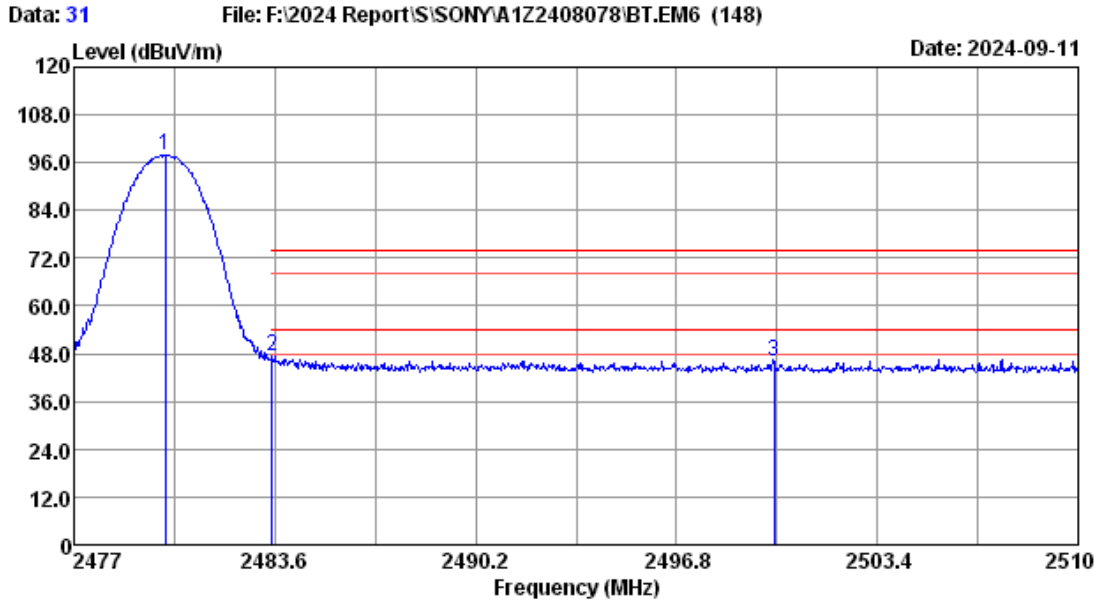

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : WINTER
 Test Mode : BT3.0 8DPSK 2480 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.30	5.41	95.94	31.66	97.99	-----	-----	Peak
2	2483.50	28.30	5.41	45.14	31.66	47.19	74.00	26.81	Peak
3	2500.00	28.30	5.44	44.15	31.65	46.24	74.00	27.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

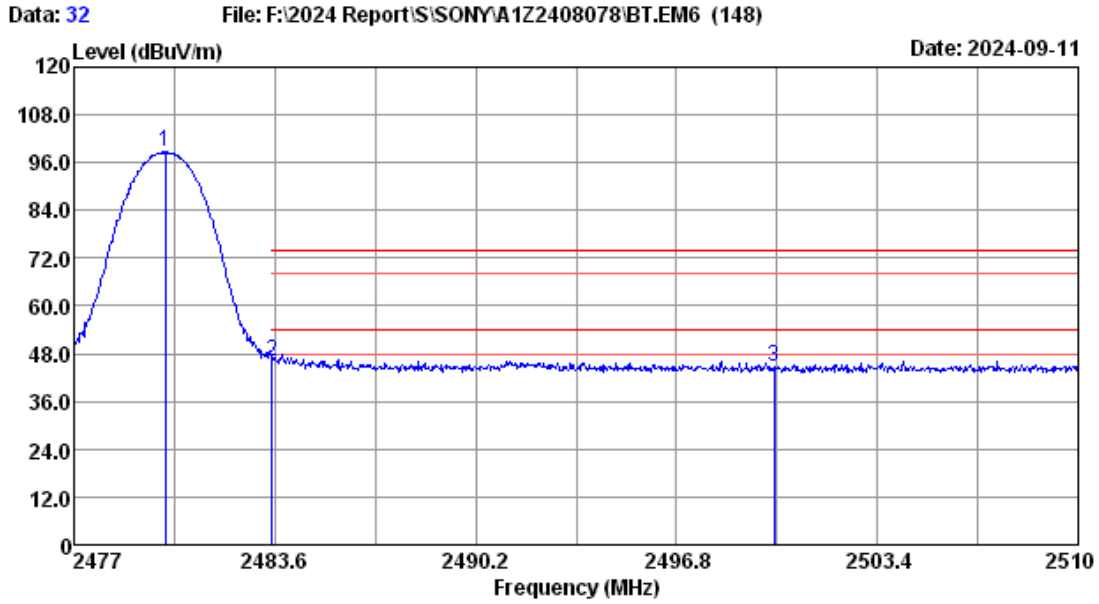

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.2°C/52.5% Engineer : WINTER
 Test Mode : BT3.0 8DPSK 2480 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.30	5.41	96.69	31.66	98.74	-----	-----	Peak
2	2483.50	28.30	5.41	43.98	31.66	46.03	74.00	27.97	Peak
3	2500.00	28.30	5.44	42.68	31.65	44.77	74.00	29.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

12. ANTENNA REQUIREMENT

12.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Antenna Connected Construction

The antennas used for this product are PCB Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.1dBi.

13.DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END**