

# SAR Test Report

## Test Report No. 15260493S-A-R1

Customer	Sony Group Corporation
Description of EUT	Wireless Noise Canceling Stereo Headset
Model Number of EUT	YY2975
FCC ID	AK8YY2975
Test Regulation	FCC 47CFR 2.1093
Test Result	Complied
Issue Date	June 11, 2024
Remarks	-

Representative Test Engineer

Approved By



Hiroshi Naka  
Engineer



Toyokazu Imamura  
Engineer



CERTIFICATE 1266.03

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.  
 There is no testing item of "Non-accreditation".

Report Cover Page -Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0 (SAR Revision- v23.7sar240510)

**UL Japan, Inc. Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN / Telephone: +81 463 50 6400

# ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the applicant for this report is identified in Section 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

# REVISION HISTORY

## Original Test Report No.: 15260493S-A

This report is a revised version of 15260493S-A. 15260493S-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised	Contents																																																																																																																																																																																																																																																																																																																				
- (Original)	15260493S-A	May 21, 2024	-	-																																																																																																																																																																																																																																																																																																																				
-R1	15260493S-A-R1	June 11, 2024		<p>(P8)(4.1) "Bandwidth" was changed to "Channel width" in the table.</p> <p>(P9)(5.1) Error corrected. Corrected the title of the last plot from BT LE (1 Mbps) to BT LE (2 Mbps).</p> <p>(P9)(5.1) The duty cycle plots were enlarged to make the text easier to read.</p> <p>(p11)(7.1) Corrected a numerical error in the SAR results table.</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <tr> <td>Left-Front</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.852</td> <td>*sgn</td> <td>N/A(a)</td> <td>1.349</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P11</td> </tr> <tr> <td>Left-Front</td> <td>0</td> <td>BR (DH5)</td> <td>2441</td> <td>39</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.22</td> <td>1.20</td> <td>0.776</td> <td>*sgn</td> <td>N/A(a)</td> <td>1.201</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P11</td> </tr> <tr> <td>Left-Front</td> <td>0</td> <td>BR (DH5)</td> <td>2480</td> <td>79</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.31</td> <td>1.17</td> <td>0.615</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.928</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P11</td> </tr> <tr> <td>Left-Left</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.152</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.237</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P2</td> </tr> <tr> <td>Left-Right</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.108</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.169</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P3</td> </tr> <tr> <td>Left-Top</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.048</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.019</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P4</td> </tr> <tr> <td>Left-Bottom</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.226</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.363</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P5</td> </tr> <tr> <td>Left-Back</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.023</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.011</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P6</td> </tr> </table> <p>(was)</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <tr> <td>Left-Front</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.864</td> <td>*sgn</td> <td>N/A(a)</td> <td>1.349</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P11</td> </tr> <tr> <td>Left-Front</td> <td>0</td> <td>BR (DH5)</td> <td>2441</td> <td>39</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.22</td> <td>1.20</td> <td>0.776</td> <td>*sgn</td> <td>N/A(a)</td> <td>1.201</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P11</td> </tr> <tr> <td>Left-Front</td> <td>0</td> <td>BR (DH5)</td> <td>2480</td> <td>79</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.31</td> <td>1.17</td> <td>0.615</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.928</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P11</td> </tr> <tr> <td>Left-Left</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.152</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.237</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P2</td> </tr> <tr> <td>Left-Right</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.108</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.169</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P3</td> </tr> <tr> <td>Left-Top</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.048</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.075</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P4</td> </tr> <tr> <td>Left-Bottom</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.226</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.363</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P5</td> </tr> <tr> <td>Left-Back</td> <td>0</td> <td>BR (DH5)</td> <td>2402</td> <td>0</td> <td>77.3</td> <td>1.29</td> <td>15</td> <td>14.17</td> <td>1.21</td> <td>0.023</td> <td>*sgn</td> <td>N/A(a)</td> <td>0.036</td> <td>1g</td> <td>1.6</td> <td>1</td> <td>P6</td> </tr> </table> <p>(new)</p> <p>(p12)(7.4) Corrected errors in the table.</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <tr> <td>Right-Front</td> <td>BR</td> <td>2402</td> <td>SAR<sub>1g</sub></td> <td>W<sub>avg</sub></td> <td>0.837<sup>±0.1</sup> (Reported: 1.382)</td> <td>0.814<sup>±0.1</sup> (Reported: 1.344)</td> <td>2.8%<sup>±0.3</sup></td> <td>2 (P1)<sup>±0.3</sup></td> <td>6 (P15)<sup>±0.3</sup></td> </tr> </table> <p>(was)</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <tr> <td>Right-Front</td> <td>BR</td> <td>2402</td> <td>SAR<sub>1g</sub></td> <td>W<sub>avg</sub></td> <td>0.837<sup>±0.1</sup> (Reported: 1.382)</td> <td>0.814<sup>±0.1</sup> (Reported: 1.344)</td> <td>2.8%<sup>±0.3</sup></td> <td>2 (P7)<sup>±0.3</sup></td> <td>6 (P16)<sup>±0.3</sup></td> </tr> </table> <p>(new)</p> <p>(p14)(Appendix 1-2) The serial number of the EUT in the table has been corrected from "121078" to "1201078".</p> <p>(p16)(Appendix 1-3) Corrected the title of the table from (L unit) to (R unit). Photo number of Front setup photo was changed from "P1" to "P7".</p>	Left-Front	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.852	*sgn	N/A(a)	1.349	1g	1.6	1	P11	Left-Front	0	BR (DH5)	2441	39	77.3	1.29	15	14.22	1.20	0.776	*sgn	N/A(a)	1.201	1g	1.6	1	P11	Left-Front	0	BR (DH5)	2480	79	77.3	1.29	15	14.31	1.17	0.615	*sgn	N/A(a)	0.928	1g	1.6	1	P11	Left-Left	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.152	*sgn	N/A(a)	0.237	1g	1.6	1	P2	Left-Right	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.108	*sgn	N/A(a)	0.169	1g	1.6	1	P3	Left-Top	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.048	*sgn	N/A(a)	0.019	1g	1.6	1	P4	Left-Bottom	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.226	*sgn	N/A(a)	0.363	1g	1.6	1	P5	Left-Back	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.023	*sgn	N/A(a)	0.011	1g	1.6	1	P6	Left-Front	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.864	*sgn	N/A(a)	1.349	1g	1.6	1	P11	Left-Front	0	BR (DH5)	2441	39	77.3	1.29	15	14.22	1.20	0.776	*sgn	N/A(a)	1.201	1g	1.6	1	P11	Left-Front	0	BR (DH5)	2480	79	77.3	1.29	15	14.31	1.17	0.615	*sgn	N/A(a)	0.928	1g	1.6	1	P11	Left-Left	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.152	*sgn	N/A(a)	0.237	1g	1.6	1	P2	Left-Right	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.108	*sgn	N/A(a)	0.169	1g	1.6	1	P3	Left-Top	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.048	*sgn	N/A(a)	0.075	1g	1.6	1	P4	Left-Bottom	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.226	*sgn	N/A(a)	0.363	1g	1.6	1	P5	Left-Back	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.023	*sgn	N/A(a)	0.036	1g	1.6	1	P6	Right-Front	BR	2402	SAR <sub>1g</sub>	W <sub>avg</sub>	0.837 <sup>±0.1</sup> (Reported: 1.382)	0.814 <sup>±0.1</sup> (Reported: 1.344)	2.8% <sup>±0.3</sup>	2 (P1) <sup>±0.3</sup>	6 (P15) <sup>±0.3</sup>	Right-Front	BR	2402	SAR <sub>1g</sub>	W <sub>avg</sub>	0.837 <sup>±0.1</sup> (Reported: 1.382)	0.814 <sup>±0.1</sup> (Reported: 1.344)	2.8% <sup>±0.3</sup>	2 (P7) <sup>±0.3</sup>	6 (P16) <sup>±0.3</sup>
Left-Front	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.852	*sgn	N/A(a)	1.349	1g	1.6	1	P11																																																																																																																																																																																																																																																																																																							
Left-Front	0	BR (DH5)	2441	39	77.3	1.29	15	14.22	1.20	0.776	*sgn	N/A(a)	1.201	1g	1.6	1	P11																																																																																																																																																																																																																																																																																																							
Left-Front	0	BR (DH5)	2480	79	77.3	1.29	15	14.31	1.17	0.615	*sgn	N/A(a)	0.928	1g	1.6	1	P11																																																																																																																																																																																																																																																																																																							
Left-Left	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.152	*sgn	N/A(a)	0.237	1g	1.6	1	P2																																																																																																																																																																																																																																																																																																							
Left-Right	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.108	*sgn	N/A(a)	0.169	1g	1.6	1	P3																																																																																																																																																																																																																																																																																																							
Left-Top	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.048	*sgn	N/A(a)	0.019	1g	1.6	1	P4																																																																																																																																																																																																																																																																																																							
Left-Bottom	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.226	*sgn	N/A(a)	0.363	1g	1.6	1	P5																																																																																																																																																																																																																																																																																																							
Left-Back	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.023	*sgn	N/A(a)	0.011	1g	1.6	1	P6																																																																																																																																																																																																																																																																																																							
Left-Front	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.864	*sgn	N/A(a)	1.349	1g	1.6	1	P11																																																																																																																																																																																																																																																																																																							
Left-Front	0	BR (DH5)	2441	39	77.3	1.29	15	14.22	1.20	0.776	*sgn	N/A(a)	1.201	1g	1.6	1	P11																																																																																																																																																																																																																																																																																																							
Left-Front	0	BR (DH5)	2480	79	77.3	1.29	15	14.31	1.17	0.615	*sgn	N/A(a)	0.928	1g	1.6	1	P11																																																																																																																																																																																																																																																																																																							
Left-Left	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.152	*sgn	N/A(a)	0.237	1g	1.6	1	P2																																																																																																																																																																																																																																																																																																							
Left-Right	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.108	*sgn	N/A(a)	0.169	1g	1.6	1	P3																																																																																																																																																																																																																																																																																																							
Left-Top	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.048	*sgn	N/A(a)	0.075	1g	1.6	1	P4																																																																																																																																																																																																																																																																																																							
Left-Bottom	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.226	*sgn	N/A(a)	0.363	1g	1.6	1	P5																																																																																																																																																																																																																																																																																																							
Left-Back	0	BR (DH5)	2402	0	77.3	1.29	15	14.17	1.21	0.023	*sgn	N/A(a)	0.036	1g	1.6	1	P6																																																																																																																																																																																																																																																																																																							
Right-Front	BR	2402	SAR <sub>1g</sub>	W <sub>avg</sub>	0.837 <sup>±0.1</sup> (Reported: 1.382)	0.814 <sup>±0.1</sup> (Reported: 1.344)	2.8% <sup>±0.3</sup>	2 (P1) <sup>±0.3</sup>	6 (P15) <sup>±0.3</sup>																																																																																																																																																																																																																																																																																																															
Right-Front	BR	2402	SAR <sub>1g</sub>	W <sub>avg</sub>	0.837 <sup>±0.1</sup> (Reported: 1.382)	0.814 <sup>±0.1</sup> (Reported: 1.344)	2.8% <sup>±0.3</sup>	2 (P7) <sup>±0.3</sup>	6 (P16) <sup>±0.3</sup>																																																																																																																																																																																																																																																																																																															

**Reference : Abbreviations (Including words undescribed in this report)** (R15v240501S07v240507)

A2LA	The American Association for Laboratory Accreditation	JAB	Japan Accreditation Board
AC	Alternating Current	LAN	Local Area Network
AFH	Adaptive Frequency Hopping	LIMS	Laboratory Information Management System
AM	Amplitude Modulation	MCS	Modulation and Coding Scheme
Amp, AMP	Amplifier	MIMO	Multiple Input Multiple Output (Radio)
ANSI	American National Standards Institute	MPE	Maximum Permissible Exposure
Ant, ANT	Antenna	MRA	Mutual Recognition Arrangement
AP	Access Point	MU-MIMO	Multi-User Multiple Input Multiple Output (Radio)
APD	Absorbed Power Density	N/A	Not Applicable, Not Applied
ASK	Amplitude Shift Keying	NII	National Information Infrastructure (Radio)
Atten., ATT	Attenuator	NIST	National Institute of Standards and Technology
AV	Average	NR	New Radio
BPSK	Binary Phase-Shift Keying	NS	Nerve Stimulation
BR	Bluetooth Basic Rate	NSA	Normalized Site Attenuation
BT	Bluetooth	NVLAP	National Voluntary Laboratory Accreditation Program
BT LE	Bluetooth Low Energy	OBW	Occupied Band Width
BW	BandWidth	OFDM	Orthogonal Frequency Division Multiplexing
Cal Int	Calibration Interval	PD	Power Density
CCK	Complementary Code Keying	P/M	Power meter
CDD	Cyclic Delay Diversity	PCB	Printed Circuit Board
CFR	Code of Federal Regulations	PER	Packet Error Rate
Ch., CH	Channel	PHY	Physical Layer
CISPR	Comite International Special des Perturbations Radioelectriques	PK	Peak
CW	Continuous Wave	PN	Pseudo random Noise
DBPSK	Differential BPSK	PRBS	Pseudo-Random Bit Sequence
DC	Direct Current	PSD	Power Spectral Density
D-factor	Distance factor	QAM	Quadrature Amplitude Modulation
DFS	Dynamic Frequency Selection	QP	Quasi-Peak
DQPSK	Differential QPSK	QPSK	Quadrature Phase Shift Keying
DSSS	Direct Sequence Spread Spectrum	RBW	Resolution Band Width
DUT	Device Under Test	RDS	Radio Data System
EDR	Enhanced Data Rate	RE	Radio Equipment
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	RF	Radio Frequency
EMC	ElectroMagnetic Compatibility	RMS	Root Mean Square
EMI	ElectroMagnetic Interference	RSS	Radio Standards Specifications
EN	European Norm	RU	Resource Unit
ERP, e.r.p.	Effective Radiated Power	Rx	Receiving
ETSI	European Telecommunications Standards Institute	SA, S/A	Spectrum Analyzer
EU	European Union	SAR	Specific Absorption Rate
EUT	Equipment Under Test	SDM	Space Division Multiplexing
Fac.	Factor	SISO	Single Input Single Output (Radio)
FCC	Federal Communications Commission	SG	Signal Generator
FHSS	Frequency Hopping Spread Spectrum	SPLSR	SAR to Peak Location Separation Ratio
FM	Frequency Modulation	SVSWR	Site-Voltage Standing Wave Ratio
Freq.	Frequency	TER	Total Exposure Ratio
FSK	Frequency Shift Keying	TSL	Tissue Simulation Liquid
GFSK	Gaussian Frequency-Shift Keying	T/R	Test Receiver
GNSS	Global Navigation Satellite System	Tx	Transmitting
GPS	Global Positioning System	U-NII	Unlicensed National Information Infrastructure (Radio)
HE	High Efficiency (e.g. IEEE 802.11ax20HE)	URS	Unintentional Radiator(s)
HT	High Throughput (e.g. IEEE 802.11n20HT)	VBW	Video BandWidth
Hori.	Horizontal	Vert.	Vertical
ICES	Interference-Causing Equipment Standard	VHT	Very High Throughput (e.g. IEEE 802.11ac20VHT)
IEC	International Electrotechnical Commission	WLAN	Wireless LAN
IEEE	Institute of Electrical and Electronics Engineers	Wi-Fi, WiFi	Wireless LAN, trademarked by Wi-Fi Alliance
IF	Intermediate Frequency	WPT	Wireless Power Transmit
ILAC	International Laboratory Accreditation Conference		
IPD	Incident Power Density		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		

---

<b>CONTENTS</b>	<b>PAGE</b>
<b>ANNOUNCEMENT</b> .....	<b>2</b>
<b>REVISION HISTORY</b> .....	<b>2</b>
<b>Reference : Abbreviations (Including words undescribed in this report)</b> .....	<b>3</b>
<b>CONTENTS</b> .....	<b>4</b>
<b>SECTION 1: Customer information</b> .....	<b>5</b>
<b>SECTION 2: Equipment under test (EUT)</b> .....	<b>5</b>
2.1 Identification of EUT .....	5
2.2 Product Description .....	5
<b>SECTION 3: Maximum SAR value, test specification and procedures</b> .....	<b>6</b>
3.1 Summary of Maximum SAR Value .....	6
3.2 RF Exposure limit .....	6
3.3 Test specification .....	6
3.4 Addition, deviation and exclusion to the test procedure .....	6
3.5 Test location .....	6
3.6 SAR measurement procedure.....	7
<b>SECTION 4: Operation of EUT during testing</b> .....	<b>8</b>
4.1 Operation modes for testing .....	8
4.2 RF exposure conditions (Test exemption).....	8
<b>SECTION 5: Confirmation before testing</b> .....	<b>9</b>
5.1 Test reference power measurement.....	9
<b>SECTION 6: Tissue simulating liquid</b> .....	<b>10</b>
6.1 Liquid measurement.....	10
6.2 Target of tissue simulating liquid .....	10
6.3 Simulated tissue composition.....	10
<b>SECTION 7: Measurement results</b> .....	<b>11</b>
7.1 Measurement results.....	11
7.2 Simultaneous transmission evaluation.....	11
7.3 SAR Measurement Variability (Repeated measurement requirement).....	12
7.4 Device holder perturbation verification .....	12
7.5 Requirements on the Uncertainty Evaluation.....	12
<b>Contents of appendixes</b>	
<b>APPENDIX 1: Photographs of test setup</b> .....	<b>13</b>
Appendix 1-1 Photograph of EUT and antenna position .....	13
Appendix 1-2 EUT and support equipment .....	14
Appendix 1-3 Photograph of test setup (SAR).....	15
<b>APPENDIX 2: Measurement data</b> .....	<b>18</b>
Appendix 2-1 Plot(s) of Worst Reported Value .....	18
Appendix 2-2 SAR Plot for SAR Measurement Variability (Repeated measurement requirement) .....	19
Appendix 2-3 SAR Plot for Device holder perturbation verification .....	20
<b>APPENDIX 3: Test instruments</b> .....	<b>21</b>
Appendix 3-1 Equipment used.....	21
Appendix 3-2 Measurement System.....	22
Appendix 3-2-1 SAR Measurement System .....	22
Appendix 3-2-2 SAR system check results.....	25
Appendix 3-2-3 SAR system check measurement data .....	25
Appendix 3-3 Measurement Uncertainty .....	26
Appendix 3-4 Calibration certificates .....	27

## SECTION 1: Customer information

Company Name	Sony Group Corporation
Address	1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan
Contact Person	Kouhei Nagamine

The information provided from the customer is as follows;

- Customer name, Company name, Type of Equipment, Model No., FCC ID on the cover and other relevant pages.
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT)
- SECTION 4: Operation of EUT during testing
- Appendix 1: The part of Antenna location information, Description of EUT and Support Equipment

## SECTION 2: Equipment under test (EUT)

### 2.1 Identification of EUT

Type	Wireless Noise Canceling Stereo Headset
Model Number	YY2975
Serial Number	1201078
Rating	DC 3.85 V (Re-chargeable Li-ion battery)
Condition of sample	Engineering prototype (Not for sale: The sample is equivalent to mass-produced items.)
Receipt Date of sample	April 17, 2024 (for power measurement) (*. No modification by the Lab.) May 9, 2024 (for SAR test) (*. No modification by the Lab.)
Test Date (SAR)	May 13, 2024

### 2.2 Product Description

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

#### General

Feature of EUT	Model: YY2975 (referred to as the EUT in this report) is a Wireless Noise Canceling Stereo Headset.
SAR Category Identified	Portable device (*. Since EUT may contact to a localized human body during wireless operation, the partial-body SAR (1g) shall be observed.)
SAR Accessory	Supporter made of silicone (*. During SAR test, it was removed.)

#### Radio specification

Equipment type	Transceiver	
Frequency of operation	Bluetooth: 2402 MHz ~ 2480 MHz	
Supported modulations	Bluetooth: BR/EDR/BT LE (FHSS, GFSK (*. EDR: GFSK+ $\pi/4$ -DQPSK, GFSK+ 8DPSK))	
Typical and maximum transmit power	*. The specification of typical and maximum transmit power (which may occur) refer to remarks in below "Table of Typical power and Maximum tune-up tolerance limit power". The measured output power (conducted) as SAR reference power refers to section 5 in this report.	
Antenna	L-ch (L unit side)	R-ch (R unit side)
Antenna model	101770211	101770111
Antenna quantity	1 pc	1 pc
Antenna type / connector type	Monopole antenna / On board contact	Monopole antenna / On board contact
Antenna gain (max. gain)*a)	-4.4 dBi	-4.4 dBi

#### \*. Table of Typical power and Maximum power (= Maximum tune-up tolerance limit power)

Band	Channel	Frequency [MHz]	Mode	BW [MHz]	Data Rate	Typical [dBm]	Maximum power
Bluetooth	0~79	2402~2480	BR	1	1 Mbps (DH5)	Not applicable	15 dBm
	0~79	2402~2480	EDR	1	2 Mbps (2DH5)	Not applicable	0 ch: 11.5 dBm other ch: 12.5 dBm
	0~79	2402~2480	EDR	1	3 Mbps (3DH5)	Not applicable	0 ch: 11.5 dBm other ch: 12.5 dBm
	0~39	2402~2480	BT LE	2	1 Mbps (PHY1)	Not applicable	12 dBm
	0~39	2402~2480	BT LE	2	2 Mbps (PHY2)	Not applicable	12 dBm

\*. Maximum tune-up tolerance limit is conducted burst average power and is defined by a customer as Duty cycle 100% (continuous transmitting).

\*. The higher maximum output power is marked with yellow marker (xx dBm).

## SECTION 3: Maximum SAR value, test specification and procedures

### 3.1 Summary of Maximum SAR Value

Mode / Band	Highest Reported SAR [W/kg]								
	Partial-body (*1) (Flat phantom, Separation 0 mm)			Head (*1) (SAM phantom)			Limbs (Flat phantom)		
	SAR type	L-ch (L unit)	R-ch (R unit)	SAR type	L-ch (L unit)	R-ch (R unit)	SAR type	L-ch (L unit)	R-ch (R unit)
Bluetooth	1g	1.35	1.38	1g	N/A	N/A	1g	N/A	N/A
Simultaneous Transmission	1g	N/A	N/A	1g	N/A	N/A	1g	N/A	N/A
Limit applied	Partial body y: 1.6 W/kg (SAR1g) for general population/uncontrolled exposure is specified in FCC 47 CFR 2.1093.								
Test Procedure	Refer to Section 3.2 in this report. In addition; UL Japan's SAR measurement work procedures No. ULID-003599 (13-EM-W0430). UL Japan's SAR measurement equipment calibration and inspection work procedures No. ULID-003598 (13-EM-W0429).								

\*1. Since the device is inserted inside the ear, the ear (head) SAR1g was evaluated under touch conditions on a flat phantom without using the SAM's 4 mm ear spacer. The evaluated SAR1g was reported as Partial body SAR1g.

### Conclusion

The SAR test values found for each device (L unit / R unit) is below the maximum limit of 1.6 W/kg.

### 3.2 RF Exposure limit

SAR Exposure Limit (100 kHz ~ 6 GHz)		
	General Population / Uncontrolled Exposure (*1)	Occupational / Controlled Exposure (*2)
Spatial Peak SAR (*3) (Whole Body)	0.08 W/kg	0.4 W/kg
Spatial Peak SAR (*4) (Partial-Body, Head or Body)	1.6 W/kg	8 W/kg
Spatial Peak SAR (*5) (Hands / Feet / Ankle / Wrist)	4 W/kg	20 W/kg

\*. For the purpose of this Regulation, FCC has adopted the SAR and RF exposure limits established in FCC 47 CFR 1.1310: Radiofrequency radiation exposure limits.

\*1. General Population / Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

\*2. Occupational / Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

\*3. The Spatial Average value of the SAR averaged over the whole body.

\*4. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*5. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

The limit applied to this device which tested in this report is;

Limit of Spatial Peak SAR (Partial-Body)	1.6 W/kg	General population / uncontrolled exposure
--	----------	--

### 3.3 Test specification

Standard	Description	Version
47 CFR 2.1093	(Limit) Radiofrequency radiation exposure evaluation: portable devices	-
ANSI/IEEE C95.1	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz	1992
IEEE Std. 1528	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.	2013
KDB 248227 D01	SAR Guidance for IEEE 802.11 (Wi-Fi) transmitters v02r02	v02r02
KDB 447498 D04	Interim General RF Exposure Guidance v01	v01
KDB 447498 D03	OET Bulletin 65, Supplement C Cross-Reference v01	v01
KDB 865664 D01	SAR measurement 100 MHz to 6 GHz v01r04	v01r04
KDB 865664 D02	RF exposure compliance reporting and documentation considerations v01r02	v01r02

\*. The measurement uncertainty budget is suggested by IEC/IEEE 62209-1528:2020 and determined by SPEAG, DASY8 Manual for Module SAR. Refer to Appendix 3-3 for more details.

In addition to the above, the following information was used:

TCB workshop, 2016-10	RF Exposure Procedure, DUT Holder Perturbations; When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.
TCB workshop, 2018-04	Expedited Area Scans. (including mother scans)
TCB workshop, 2019-04	RF Exposure Procedure, 802.11ax SAR Testing
TCB workshop, 2019-10	RF Exposure Procedure, Tissue Simulating Liquids (TSL) -FCC has permitted the use of single head tissue simulating liquid specified in IEC 62209 for all SAR tests. -If FCC parameters are used, 5% tolerance. If IEC parameters, 10%.

### 3.4 Addition, deviation and exclusion to the test procedure

No addition, exclusion nor deviation has been made from the test procedure.

### 3.5 Test Location

#### UL Japan, Inc., Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number: +81 463 50 6400

\*. A2LA Certificate Number: 1266.03 (FCC Test Firm Registration Number: 626366, ISED Lab Company Number: 2973D / CAB identifier: JP0001)

Place	Width × Depth × Height (m)	Size of reference ground plane (m) / horizontal conducting plane
No.7 Shielded room	2.76 × 3.76 × 2.4	2.76 × 3.76

### 3.6 SAR measurement procedure

#### 3.6.1 SAR Definition

SAR is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). The equation description is shown in right.	$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho \cdot dV} \right)$
SAR measurement can be related to the electrical field in the tissue by the equation in right. SAR is expressed in units of Watts per kilogram (W/kg). Where: σ = conductivity of the tissue (S/m), ρ = mass density of the tissue (kg/m <sup>3</sup> ), E = RMS electric field strength in tissue (V/m)	$SAR = \frac{\sigma  E ^2}{\rho}$

#### 3.6.2 Full SAR measurement procedure

The SAR measurement procedures are as follows: (1) The EUT is installed engineering testing software that provides continuous transmitting signal; (2) Measure output power through RF cable and power meter; (3) Set scan area, grid size and other setting on the DASY software; (4) Find out the largest SAR result on these testing positions of each band; (5) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg.

- \* According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:  
Step 1) Power measurement -> SAR; Step 2) Power reference measurement -> Step 3) Area scan -> Step 4) Zoom scan -> Step 5) Power drift measurement

##### Step 1: Confirmation before SAR testing

Before SAR test, the RF wiring for the sample had been switched to the antenna conducted power measurement line from the antenna line and the average power was measured. This SAR reference power measurement was proceeded with the lowest data rate (which may have the higher time-based average power typically) on each operation mode and on the lower, middle (or near middle), upper and specified channels. The power measurement result is shown in Section 5.

- \* The EUT transmission power used SAR test was verified that it was not more than 2 dB lower than the maximum tune-up tolerance limit. (KDB447498 D01 (v06))

##### Step 2: Power reference measurement

Measured psSAR value at a peak location of Fast Area Scan was used as a reference value for assessing the power drop.

##### Step 3: Area Scan

(Scan parameters: KDB 865664 D01, IEC/IEEE 62209-1528 (> 6GHz))

Area Scans are used to determine the peak location of the measured field before doing a finer measurement around the hotspot. Peak location can be found accurately even on coarse grids using the advanced interpolation routines implemented in DASY8. Area Scans measure a two dimensional volume covering the full device under test area. DASY8 uses Fast Averaged SAR algorithm to compute the 1 g and 10 g of simulated tissue from the Area Scan. DASY8 can either manually or automatically generates Area Scan grid settings based on device dimensions. In automatically case, the scan extent is defined by the device dimensions plus additional 15mm on each side. In manually, the scan covered the entire dimension of the antenna of EUT.

##### Step 4: Zoom Scan and post-processing

(Scan parameters: KDB 865664 D01, IEC/IEEE 62209-1528 (> 6GHz))

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

- \* A minimum volume of 30 mm (x) × 30 mm (y) × 30 mm (z) was assessed by "Ratio step" method (\*1), for 2.4 GHz band. (Step XY: 5 mm)
- \* A minimum volume of 24 mm (x) × 24 mm (y) × 24 mm (z) was assessed by "Ratio step" method (\*1), for 5 GHz band. (Step XY: 4 mm).
- \* A minimum volume of 24 mm (x) × 24 mm (y) × 24 mm (z) was assessed by "Ratio step" method (\*1), for 6 GHz band. (Step XY: 3.4 mm).

When the SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are proceeded for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR. If the zoom scan measured as defined above complies with both of the following criteria. or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed.

- \* The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions and recorded.
- \* The ratio of the SAR at the second measured point to the SAR at the closest measured point at the x-y location of the measured maximum SAR value shall be at least 30 % and recorded.

##### Step 5: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same project. The Power Drift Measurement gives the SAR difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. It was checked that the power drift was within ± 5% (0.21 dB) in single SAR project run. The verification of power drift during the SAR test shown in SAR plot data of APPENDIX 2.

- \* The most of SAR tests were conservatively performed with test separation distance 0 mm. The phantom bottom thickness is approx. 2mm. Therefore, the distance between the SAR probe tip to the surface of test device which is touched the bottom surface of the phantom is approx. 2.4 mm. Typical distance from probe tip to probe's dipole centers is 1mm.
- \*1. "Ratio step" method parameters used; the first measurement point: "1.4 mm" from the phantom surface, the initial z grid separation: "1.5 mm", subsequent graded grid ratio: "1.5" for 2.4 GHz band and the initial z grid separation: "1.4 mm", subsequent graded grid ratio: "1.4" for above 5 GHz. These parameters comply with the requirement of KDB 865664 D01 and recommended by Schmid & Partner Engineering AG (DASY8 manual).

		f ≤ 3 GHz	3 GHz < f ≤ 10 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm ± 1 mm	1/2 × δ × ln(2) mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		5 ° ± 1 ° (flat phantom only) 30 ° ± 1 ° (other phantom)	5 ° ± 1 ° (flat phantom only) 30 ° ± 1 ° (other phantom)
Maximum area scan spatial resolution: Δx <sub>Area</sub> , Δy <sub>Area</sub>		≤ 2 GHz : ≤ 15 mm, 2-3 GHz : ≤ 12 mm	3-4 GHz : ≤ 12 mm, 4-6 GHz : ≤ 10 mm > 6 GHz : ≤ 60/f mm, or half of the corresponding zoom scan length, whichever is smaller.
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx <sub>Area</sub> , Δy <sub>Area</sub>		≤ 2 GHz : ≤ 8 mm, 2-3 GHz : ≤ 5 mm (*1)	3-4 GHz : ≤ 5 mm (*1), 4-6 GHz : ≤ 4 mm (*1) > 6 GHz : ≤ 24/f mm
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz <sub>zoom</sub> (n)	≤ 5 mm	3-4 GHz : ≤ 4 mm, 4-5 GHz : ≤ 3 mm, 5-6 GHz : ≤ 2 mm > 6 GHz : ≤ 10/(f-1) mm
	graded grid Δz <sub>zoom</sub> (1): between 1st two points closest to phantom surface Δz <sub>zoom</sub> (n>1): between subsequent points	≤ 4 mm	3-4 GHz : ≤ 3 mm, 4-5 GHz : ≤ 2.5 mm, 5-6 GHz : ≤ 2 mm > 6 GHz : ≤ 12/f mm
Minimum zoom scan volume x, y, z		≥ 30 mm	3-4 GHz : ≥ 28 mm, 4-5 GHz : ≥ 25 mm, 5-6 GHz : ≥ 22 mm > 6 GHz : ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEC/IEEE Std 1528-2013 (≤ 6 GHz) and IEC/IEEE 62209-1528 (≤ 10 GHz) for details. *1. When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. (KDB 865664 D01) *. The scan parameters of > 6GHz is defined IEC/IEEE 62209-1528.			



## SECTION 4: Operation of EUT during testing

### 4.1 Operating modes for testing

The EUT has BR, EDR and BT LE and continuous transmitting modes. The frequency and the modulation used in the SAR testing are shown as a following.

Operation mode	BR			EDR			BT LE					
band	2.4 GHz band											
Tx band [MHz]	2402-2480											
Channel width [MHz]	1			1			2					
Maximum power [dBm]	15			12.5 (Och: 11.5)			12					
Data Rate [Mbps]	1			2			3					
Frequency tested [MHz]	2402, 2441, 2480			2441 (*, lower power than BR)			2441 (*, lower power than BR)			2402 (*, lower power than BR)		

\*. The higher maximum output power is marked with yellow marker (xx).

Controlled software	Test name	Software name	Version	Date	Storage location / Remarks
	Power measurement	Earbuds BT Test 1.05	1.05	2024-04-17	*. Memory of platform (firmware)
	SAR test	Earbuds BT Test 1.05	1.05	2024-05-09	*. Memory of platform (firmware)

### \*. SAR test reduction considerations

(KDB 447498 D04(v01), General RF Exposure Guidance) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1g or 10g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg for 1g, or 2.0 W/kg for 10g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg for 1g, or 1.5 W/kg for 10g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg for 1g, or 1.0 W/kg for 10g respectively, when the transmission band is ≥ 200 MHz

The SAR has been measured with highest transmission duty factor supported by the test mode tool for WLAN and/or Bluetooth. When the transmission duty factor could not be 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance. When SAR is not measured at the maximum power level allowed for production unit, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance.

### 4.2 RF exposure conditions (Test exemption)

Antenna separation distances in each test setup plan are shown as follows.

Setup	Explanation of EUT setup (*. Refer to Appendix 1 for test setup photographs.)	D [mm] (L-ch)	D [mm] (R-ch)
Front	The front surface of EUT was touched to the Flat phantom.	0.7	0.7
Left	The left surface of EUT was touched to the Flat phantom.	4.0	5.7
Right	The right surface of EUT was touched to the Flat phantom.	5.7	4.0
Top	The top surface of EUT was touched to the Flat phantom.	6.8	6.8
Bottom	The bottom surface of EUT was touched to the Flat phantom.	9.2	9.2
Back	The back surface of EUT was touched to the Flat phantom.	21.7	21.7

\*. D: Antenna separation distance. It is the distance from the antenna inside EUT to the outer surface of EUT which user may touch.

Details of antenna separation distance is shown in Annex 1-1

### SAR test exemption consideration by KDB 447498 D04 (v01)

Judge of SAR test exemption ("Test" or "Exempt") (upper row) / SAR based Threshold power (lower row)

Tx mode	Higher frequency [MHz]	Max. conducted output power [dBm]	Max. conducted output power [mW]	Antenna		Antenna separation distance (*1)																
				Gain [dBi]	ERP [dBm]	≤5 mm	≤5 mm	6 mm	7 mm	9 mm	22 mm	≤5 mm	≤5 mm	6 mm	7 mm	9 mm	22 mm					
						Front (L-ch) SAR1g	Left (L-ch) SAR1g	Right (L-ch) SAR1g	Top (L-ch) SAR1g	Bottom (L-ch) SAR1g	Back (L-ch) SAR1g	Front (R-ch) SAR1g	Right (R-ch) SAR1g	Left (R-ch) SAR1g	Top (R-ch) SAR1g	Bottom (R-ch) SAR1g	Back (R-ch) SAR1g					
BR	2480	15	32	-4.4	8.45	7	Test	Test	Test	Test	Test	Test	Exempt	Test	Test	Test	Test	Test	Test	Test	Test	Exempt
EDR	2480	12.5	18	-4.4	5.95	4	Test	Test	Test	Test	Test	Test	Exempt	Test	Test	Test	Test	Test	Test	Test	Test	Exempt
BT LE	2480	12	16	-4.4	5.45	4	Test	Test	Test	Test	Test	Test	Exempt	Test	Test	Test	Test	Test	Test	Test	Test	Exempt

\*. Power and distance are rounded to the nearest integer numbers "mW" and "mm" before calculation.

\*. (Calculating formula) ERP (dBm) = (max. conducted output power, dBm) + (antenna gain, dBi) - 2.15

### <Conclusion for consideration for SAR test reduction>

- The all SAR tests were conservatively performed with test separation distance 0 mm.
- All surface (6 face) of EUT's setup are applied the SAR test because the EUT is small device.

SAR-based thresholds (P<sub>th</sub> (mW)) shown below table of "Example Power Thresholds [mW]" are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged effective radiated power (ERP), whichever is greater. The SAR-based exemption is calculated by Formula (B.2) in below, applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P<sub>th</sub> (mW).

When 10-g extremity SAR applies, SAR test exemption may be considered by applying a factor of 2.5 to the SAR-based exemption thresholds.

\*. This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive).

Table: Example Power Thresholds [mW] for SAR(1g) (Shaded values are standard values. Table B.2 of KDB 447498 D04 (v01))																														
Frequency [MHz]	Distance [mm]																													
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	35	40	45	50
1900	3	5	6	8	10	12	14	17	20	23	26	29	32	36	40	44	48	52	56	61	66	71	76	81	86	92	122	157	195	236
2450	3	4	5	7	8	10	12	15	17	19	22	25	28	31	35	38	42	46	50	54	59	63	68	73	78	83	111	143	179	219
2462	3	4	5	7	8	10	12	14	17	19	22	25	28	31	35	38	42	46	50	54	58	63	68	73	78	83	111	143	179	219
2480	3	4	5	7	8	10	12	14	17	19	22	25	28	31	35	38	42	46	50	54	58	63	67	72	77	82	111	143	179	218
3600	2	3	4	5	6	8	10	11	13	16	18	20	23	26	29	32	35	38	42	45	49	53	57	62	66	71	96	125	158	195

TABLE B.1—THRESHOLDS FOR SINGLE RF SOURCES  
SUBJECT TO ROUTINE ENVIRONMENTAL EVALUATION

RF Source Frequency	Minimum Distance	Threshold ERP
f <sub>1</sub> [MHz]	f <sub>2</sub> [MHz]	W
0.3	-	1.34
1.34	1.59	35.6
1.59	3.0	1.920 R <sup>2</sup>
3.0	3.0	3.450 R <sup>2</sup> /f
3.0	1.500	1.59
3.0	3.0	1.59
3.0	1.500	0.0128 R <sup>2</sup> /f
1.500	100,000	31.8
3.0	3.0	0.5
3.0	3.0	19.2R <sup>2</sup>

Subscripts L and H are low and high; λ is wavelength.  
From §1.1307(b)(3)(GG)(C), modified by adding Minimum Distance columns.  
R is in meter, f is in MHz  
Threshold ERP [W] = 19.2 × R<sup>2</sup> (–formula (A.1))  
(Distance: over 40 cm)

Calculating formula:

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (B.1)$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^2 & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (B.2) \quad x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and ERP<sub>20cm</sub> is per Formula (B.1).



## SECTION 5: Confirmation before testing

### 5.1 Test reference power measurement

Mode	Frequency		Data rate	Power spec. on each antenna		Duty cycle			L unit					R unit						
				Typical [dBm]	Max. [dBm]	duty cycle [%]	duty factor [dB]	scaled factor [-]	Set pwr. [-]	Burst Ave. [dBm]	Δ Max. [dB]	Tune-up factor [-]	Time Ave. [dBm]	Adjusted power setting? (*1)	Set pwr. [-]	Burst Ave. [dBm]	Δ Max. [dB]	Tune-up factor [-]	Time Ave. [dBm]	Adjusted power setting? (*1)
	[MHz]	CH	[Mbps]																	
BR (DH5)	2402	0	1	-	15	77.3	1.12	1.29	55	14.17	0.83	1.21	13.05	No	55	13.92	1.08	1.28	12.80	No
	2441	39	1	-	15	77.3	1.12	1.29	55	14.22	0.78	1.2	13.10	No	55	13.92	1.08	1.28	12.80	No
	2480	78	2	-	15	77.3	1.12	1.29	55	14.31	0.69	1.17	13.19	No	55	14.06	0.94	1.24	12.94	No
EDR (2DH5)	2402	0	2	-	11.5	77.3	1.12	1.29	55	10.80	0.70	1.17	9.68	No	55	10.48	1.02	1.26	9.36	No
	2441	39	2	-	12.5	77.3	1.12	1.29	57	11.76	0.74	1.19	10.64	No	57	11.38	1.12	1.29	10.26	No
	2480	78	2	-	12.5	77.3	1.12	1.29	57	11.87	0.63	1.16	10.75	No	57	11.53	0.97	1.25	10.41	No
EDR (3DH5)	2402	0	3	-	11.5	77.4	1.11	1.29	55	10.82	0.68	1.17	9.71	No	55	10.48	1.02	1.26	9.37	No
	2441	39	3	-	12.5	77.4	1.11	1.29	57	11.77	0.73	1.18	10.66	No	57	11.38	1.12	1.29	10.27	No
	2480	78	3	-	12.5	77.4	1.11	1.29	57	11.85	0.65	1.16	10.74	No	57	11.53	0.97	1.25	10.42	No
BT LE (PHY1)	2402	0	1	-	12	85.6	0.68	1.17	49	11.45	0.55	1.14	10.77	No	49	11.05	0.95	1.24	10.37	No
	2440	19	1	-	12	85.6	0.68	1.17	49	11.50	0.50	1.12	10.82	No	49	11.09	0.91	1.23	10.41	No
	2480	39	1	-	12	85.6	0.68	1.17	49	11.62	0.38	1.09	10.94	No	49	11.24	0.76	1.19	10.56	No
BT LE (PHY2)	2402	0	2	-	12	57.5	2.40	1.74	49	11.40	0.60	1.15	9.00	No	49	11.02	0.98	1.25	8.62	No
	2440	19	2	-	12	57.5	2.40	1.74	49	11.48	0.52	1.13	9.08	No	49	11.06	0.94	1.24	8.66	No
	2480	39	2	-	12	57.5	2.40	1.74	49	11.59	0.41	1.1	9.19	No	49	11.22	0.78	1.2	8.82	No

\*: [ ]: SAR test was applied.

\*1. "Yes": The power setting was adjusted so that measured average power was not more than 2 dB lower than the maximum tune-up tolerance limit.

\*: CH: Channel; Power spec.: Power specification; Max.: Maximum; Set pwr.: Setting power by tested software; Burst Ave.: Measured burst average power; Time Ave.: Measured time-based average power.

\*: Calculating formula: Time average power (dBm) = (P/M Reading, dBm)+(Cable loss, dB)+(Attenuator, dB)

Burst power (dBm) = (P/M Reading, dBm)+(Cable loss, dB)+(Attenuator, dB)+(duty factor, dB)

Duty cycle: (duty cycle, %) = (Tx on time) / (1 cycle time) × 100, Duty factor (dBm) = 10 × log(100/(duty cycle, %))


Duty cycle scaled factor: Duty cycle correction factor for obtained SAR value, Duty scaled factor [-] = 100(%) / (duty cycle, %)

ΔMax. (Deviation from max.power, dB) = (Max.tune-up limit power (average, dBm)) - (Burst power measured (average, dBm))

Tune-up factor: Power tune-up factor for obtained SAR value, Tune-up factor [-] = 10 ^ ("Deviation from max., dB" / 10)

\*: Date measured: 2024-04-22 / Measured by: A. Oda/ Place: Preparation room of No. 7 shield room. (23 deg.C/ 45 %RH)

\*: Chart of the duty cycle in follows. Duty cycle was measured on the L and R sides and found to be equivalent, so the L side was used as representative.

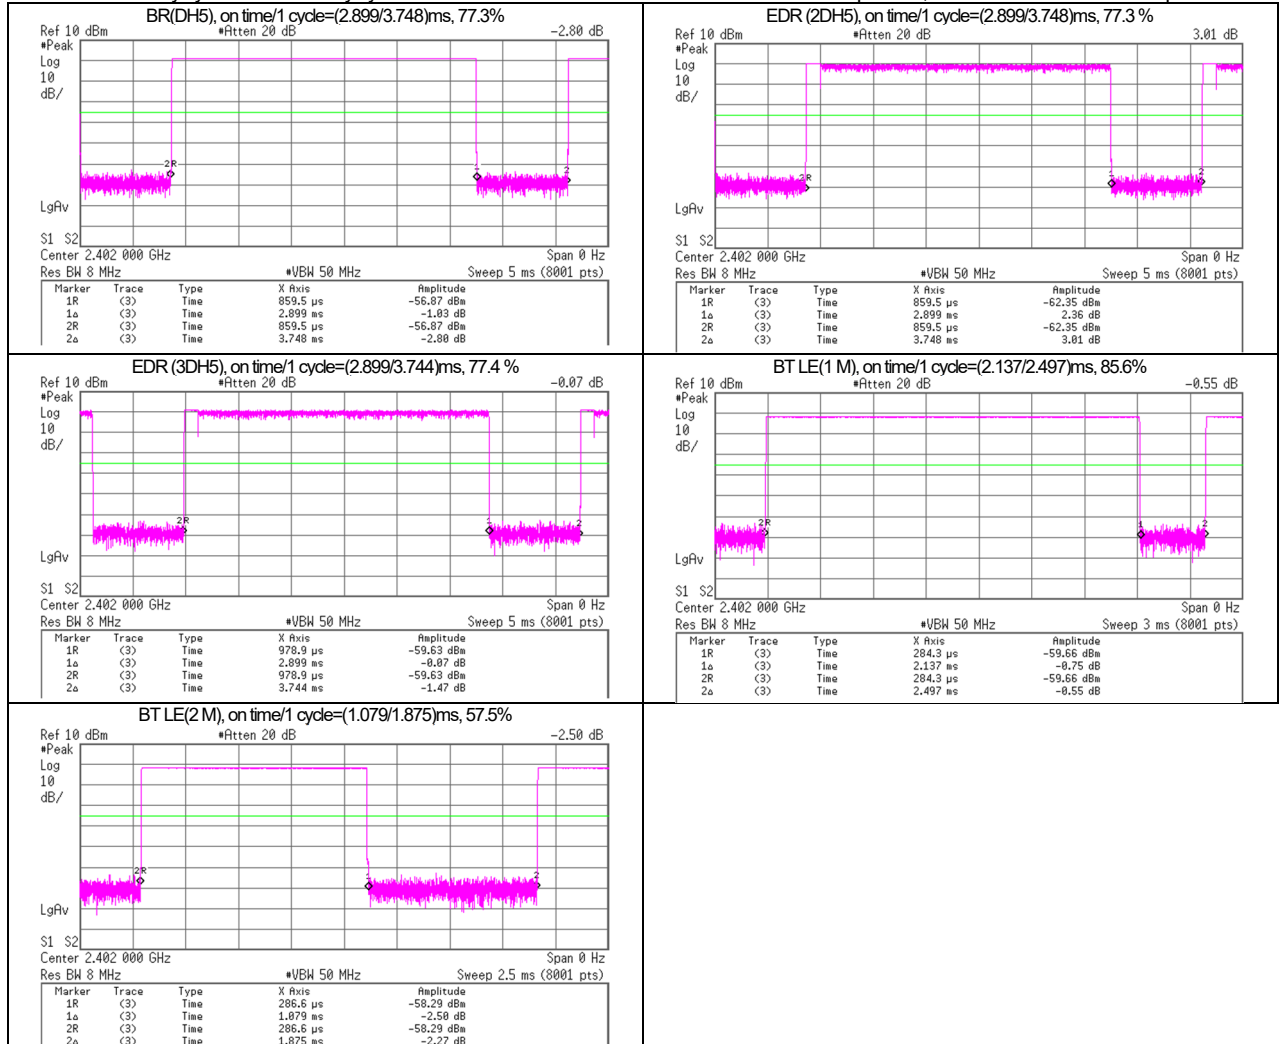

## SECTION 6: Tissue simulating liquid

### 6.1 Liquid measurement

Frequency [MHz]	Liquid type	Liquid parameters												ΔSAR Coefficients (*a)			Date measured	
		Liquid Temp [deg.C]	Liquid depth of phantom [mm]	Permittivity (εr) [-]					Conductivity [S/m]					Interpolated? □: No ☑: Yes	ΔSAR			ΔSAR correct Required?
				Target value	Measured			Δend, >48hrs. (*1)	Target value	Measured			Δend, >48hrs. (*1)		1g [%]	10g [%]		
2450 (*2)	Head	22.5	150	39.2	38.94	-0.7	±5	begin	1.8	1.835	1.9	±5	begin	□	1.1	0.6	no	2024-05-13, before SAR test.
2402	Head	22.5	150	39.29	39.05	-0.6	±5	begin	1.757	1.798	2.3	±5	begin	□	1.3	0.7	no	
2440	Head	22.5	150	39.22	38.95	-0.7	±5	begin	1.791	1.829	2.1	±5	begin	□	1.2	0.7	no	
2441	Head	22.5	150	39.22	38.95	-0.7	±5	begin	1.792	1.829	2.1	±5	begin	□	1.2	0.7	no	
2480	Head	22.5	150	39.16	38.88	-0.7	±5	begin	1.833	1.856	1.3	±5	begin	□	0.8	0.4	no	

\*1. "begin": SAR test has ended within 24 hours from the liquid parameter measurement, "< 48 hrs.": Since SAR test has ended within 48 hours (2 days) from the liquid parameter measurement and a change in the liquid temperature was within 1 degree, liquid parameters measured on next day were used on next day continuously, "value (%)": Since the SAR test series took longer than 48 hours, the liquid parameters were measured on every 48 hours period and on the date which was end of test series. Since the difference of liquid parameters between the beginning and next measurement was smaller than 5%, the liquid parameters measured in beginning were used until end of each test series.

Calculating formula: "Δend(>48 hrs.) (%)" = ((dielectric properties, end of test series) / (dielectric properties, beginning of test series) - 1) × 100

\*2. These frequencies were for system check.

\*. The dielectric parameters were checked prior to assessment using the DAK-3.5 dielectric probe kit.

\*. The target values refers to clause 6.2 of this report.

\*a. The coefficients in below are parameters defined in IEEE Std.1528-2013.

(Calculating formula, 4 MHz~6 GHz):  $\Delta SAR(1g) = C_{\epsilon r} \times \Delta \epsilon r + C_{\sigma} \times \Delta \sigma$ ,  $C_{\epsilon r} = 7.854E-4 \times f^3 + 9.402E-3 \times f^2 - 2.742E-2 \times f + 0.2026$  /  $C_{\sigma} = 9.804E-3 \times f^3 - 8.661E-2 \times f^2 + 2.981E-2 \times f + 0.7829$

$\Delta SAR(10g) = C_{\epsilon r} \times \Delta \epsilon r + C_{\sigma} \times \Delta \sigma$ ,  $C_{\epsilon r} = 3.456 \times 10^{-3} \times f^3 - 3.531 \times 10^{-2} \times f^2 + 7.675 \times 10^{-2} \times f + 0.1860$  /  $C_{\sigma} = 4.479 \times 10^{-3} \times f^3 - 1.586 \times 10^{-2} \times f^2 - 0.1972 \times f + 0.7717$

Since the calculated ΔSAR values of the tested liquid had shown positive correction, the measured SAR was not converted by ΔSAR correction conservatively.

(Calculating formula):  $\Delta SAR \text{ corrected SAR (W/kg)} = (\text{Measured SAR (W/kg)}) \times (100 - (\Delta SAR(\%))) / 100$

### 6.2 Target of tissue simulating liquid

Nominal dielectric values of the tissue simulating liquids in the phantom are listed in the following table. (Appendix A, KDB 865664 v01r04)

Target Frequency (MHz)	Head		Body		Target Frequency (MHz)	Head		Body	
	εr	σ(S/m)	εr	σ(S/m)		εr	σ(S/m)	εr	σ(S/m)
1800~2000	40.0	1.40	53.3	1.52	3000	38.5	2.40	52.0	2.73
2450	39.2	1.80	52.7	1.95	5800	35.3	5.27	48.2	6.00

\*. For other frequencies, the target nominal dielectric values shall be obtained by linear interpolation between the higher and lower tabulated figures. Above 5800MHz were obtained using linear extrapolation.

### 6.3 Simulated tissue composition

Liquid type	Head	Control No.	SSLHV6-01	Model No. / Product No.	HBBL600-10000V6 / SL AAH U16 BC
Ingredient: Mixture [%]	Water: >77, Ethanediol: <5.2, Sodium petroleum sulfonate: <2.9, Hexylene Glycol: <2.9, alkoxylated alcohol (>C16): <2.0				
Tolerance specification	± 10%				
Temperature gradients [% / deg.C]	permittivity: -0.19 / conductivity: -0.57 (at 2.6 GHz), permittivity: +0.31 / conductivity: -1.43 (at 5.5 GHz) (*)				
Manufacture	Schmid & Partner Engineering AG		Note: *. speag_920-SLAxy-E_1.12.15CL (Maintenance of tissue simulating liquid)		

## SECTION 7: Measurement results

### 7.1 Measurement results

Test setup			Mode and Frequency			Duty cycle			Power correction			SAR results [W/kg] (Max. value of multi-peak)					SAR plot # in Appx. 2	Setup photo # in Appx. 1-3	Memo
EUT.	Test position	Gap (mm)	Mode (D/R)	[MHz]	CH	Duty [%]	Duty scaled factor	Max. tune-up limit (dBm)	Measured conducted (dBm)	Power scaled (tune-up) factor	Measured SAR	ΔSAR [%]	ΔSAR corrected	Reported SAR (*b)	SAR type	Limit			
Left	Front	0	BR (DH5)*	2402*	0	77.3	1.29	15	14.17	1.21	0.864	+sign	N/A(*a)	<b>1.349</b>	1g	1.6	1	P1	
Left	Front	0	BR (DH5)*	2441	39	77.3	1.29	15	14.22	1.20	0.776	+sign	N/A(*a)	<b>1.201</b>	1g	1.6	-	P1	
Left	Front	0	BR (DH5)*	2480	79	77.3	1.29	15	14.31	1.17	0.615	+sign	N/A(*a)	<b>0.928</b>	1g	1.6	-	P1	
Left	Left	0	BR (DH5)*	2402	0	77.3	1.29	15	14.17	1.21	0.152	+sign	N/A(*a)	<b>0.237</b>	1g	1.6	-	P2	
Left	Right	0	BR (DH5)*	2402*	0	77.3	1.29	15	14.17	1.21	0.108	+sign	N/A(*a)	<b>0.169</b>	1g	1.6	-	P3	
Left	Top	0	BR (DH5)*	2402*	0	77.3	1.29	15	14.17	1.21	0.048	+sign	N/A(*a)	<b>0.075</b>	1g	1.6	-	P4	
Left	Bottom	0	BR (DH5)*	2402*	0	77.3	1.29	15	14.17	1.21	0.226	+sign	N/A(*a)	<b>0.353</b>	1g	1.6	-	P5	
Left	Back	0	BR (DH5)*	2402*	0	77.3	1.29	15	14.17	1.21	0.023	+sign	N/A(*a)	<b>0.036</b>	1g	1.6	-	P6	
Left	Front	0	EDR (2DH5)	2402	0	77.3	1.29	11.5	10.80	1.17	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	EDR (2DH5)	2441	39	77.3	1.29	12.5	11.76	1.19	0.495	+sign	N/A(*a)	<b>0.760</b>	1g	1.6	-	P1	* lower power
Left	Front	0	EDR (2DH5)	2480	79	77.3	1.29	12.5	11.87	1.16	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	EDR (3DH5)	2402	0	77.4	1.29	11.5	10.82	1.17	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	EDR (3DH5)	2441	39	77.4	1.29	12.5	11.77	1.18	0.455	+sign	N/A(*a)	<b>0.693</b>	1g	1.6	-	P1	* lower power
Left	Front	0	EDR (3DH5)	2480	79	77.4	1.29	12.5	11.85	1.16	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	BT LE (1Mbps)	2402	0	85.6	1.17	12	11.45	1.14	0.519	+sign	N/A(*a)	<b>0.692</b>	1g	1.6	-	P1	* lower power
Left	Front	0	BT LE (1Mbps)	2440	17	85.6	1.17	12	11.50	1.12	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	BT LE (1Mbps)	2480	39	85.6	1.17	12	11.62	1.09	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	BT LE (2Mbps)	2402	0	57.5	1.74	12	11.40	1.15	0.339	+sign	N/A(*a)	<b>0.678</b>	1g	1.6	-	P1	* lower power
Left	Front	0	BT LE (2Mbps)	2440	17	57.5	1.74	12	11.48	1.13	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Left	Front	0	BT LE (2Mbps)	2480	39	57.5	1.74	12	11.59	1.10	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	BR (DH5)*	2402*	0	77.3	1.29	15	13.92	1.28	0.837	+sign	N/A(*a)	<b>1.382</b>	1g	1.6	2	P7	
Right	Front	0	BR (DH5)*	2441	39	77.3	1.29	15	13.92	1.28	0.787	+sign	N/A(*a)	<b>1.299</b>	1g	1.6	-	P7	
Right	Front	0	BR (DH5)*	2480	79	77.3	1.29	15	14.06	1.24	0.770	+sign	N/A(*a)	<b>1.232</b>	1g	1.6	-	P7	
Right	Right	0	BR (DH5)*	2402	0	77.3	1.29	15	13.92	1.28	0.233	+sign	N/A(*a)	<b>0.385</b>	1g	1.6	-	P8	
Right	Left	0	BR (DH5)*	2402*	0	77.3	1.29	15	13.92	1.28	0.069	+sign	N/A(*a)	<b>0.114</b>	1g	1.6	-	P9	
Right	Top	0	BR (DH5)*	2402*	0	77.3	1.29	15	13.92	1.28	0.035	+sign	N/A(*a)	<b>0.058</b>	1g	1.6	-	P10	
Right	Bottom	0	BR (DH5)*	2402*	0	77.3	1.29	15	13.92	1.28	0.159	+sign	N/A(*a)	<b>0.263</b>	1g	1.6	-	P11	
Right	Back	0	BR (DH5)*	2402*	0	77.3	1.29	15	13.92	1.28	0.017	+sign	N/A(*a)	<b>0.028</b>	1g	1.6	-	P12	
Right	Front	0	EDR (2DH5)	2402	0	77.3	1.29	11.5	10.48	1.26	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	EDR (2DH5)	2441	39	77.3	1.29	12.5	11.38	1.29	0.439	+sign	N/A(*a)	<b>0.731</b>	1g	1.6	-	P7	* lower power
Right	Front	0	EDR (2DH5)	2480	79	77.3	1.29	12.5	11.53	1.25	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	EDR (3DH5)	2402	0	77.4	1.29	11.5	10.48	1.26	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	EDR (3DH5)	2441	39	77.4	1.29	12.5	11.38	1.29	0.438	+sign	N/A(*a)	<b>0.729</b>	1g	1.6	-	P7	* lower power
Right	Front	0	EDR (3DH5)	2480	79	77.4	1.29	12.5	11.53	1.25	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	BT LE (1Mbps)	2402	0	85.6	1.17	12	11.05	1.24	0.465	+sign	N/A(*a)	<b>0.675</b>	1g	1.6	-	P7	* lower power
Right	Front	0	BT LE (1Mbps)	2440	17	85.6	1.17	12	11.09	1.23	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	BT LE (1Mbps)	2480	39	85.6	1.17	12	11.24	1.19	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	BT LE (2Mbps)	2402	0	57.5	1.74	12	11.02	1.25	0.304	+sign	N/A(*a)	<b>0.661</b>	1g	1.6	-	P7	* lower power
Right	Front	0	BT LE (2Mbps)	2440	17	57.5	1.74	12	11.06	1.24	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power
Right	Front	0	BT LE (2Mbps)	2480	39	57.5	1.74	12	11.22	1.2	N/A	+sign	N/A(*a)	<b>N/A</b>	1g	1.6	-	-	* lower power

- \* The highest Reported (scaled) SAR is marked with yellow marker (x.xxx), respectively.
- \* Appx. Appendix, Max.: maximum. Gap: It is the separation distance between the EUT surface and the bottom outer surface of phantom.
- \* Before SAR test, the battery of EUT was full charged.
- \* During SAR test, the radiated power is always monitored by Spectrum Analyzer and/or MAIA.
- \*1. Since ch 0 of BR mode had the worst SAR, ch 0 was made the initial channel for other setups.

- \*a. Since the calculated ΔSAR values of the tested liquid had shown positive correction, the measured SAR was not converted by ΔSAR correction. Calculating formula:  $\Delta\text{SAR corrected SAR (W/kg)} = (\text{Measured SAR (W/kg)}) \times (100 - (\Delta\text{SAR}(\%))) / 100$
- \*b. Calculating formula:  $\text{Reported (Scaled) SAR (W/kg)} = (\text{Measured SAR (W/kg)}) \times (\text{Duty scaled factor}) \times (\text{Power scaled factor})$  where, Duty scaled factor [-] = 100% / (measured duty cycle, %), Power scaled factor [-] =  $10^{((\text{Max.tune-up limit power, dBm}) - (\text{Measured conducted power, dBm})) / 10}$
- \* Calibration frequency of the SAR measurement probe (and used conversion factors for each frequency.)  
The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Liquid	SAR test frequency	Probe calibration frequency	Validity	Conversion factor (X,Y,Z)	Uncertainty
Head	(2402, 2440, 2441, 2480) MHz	2450 MHz	within ± 50 MHz of calibration frequency	6.83, 7.07, 6.68	± 12.0 %

### 7.2 Simultaneous transmission evaluation

**Result:** Simultaneous transmission did not exist on each product (L unit / R unit).

- \* Since the EUT has single operation mode (BT), single source and single antenna, simultaneous transmission is not existed.

### 7.3 SAR Measurement Variability (Repeated measurement requirement)

**Result: Pass** ("Largest to Smallest SAR Ratio" is smaller than KDB 865664 D01 requirement.)

In accordance with published RF Exposure KDB 865664 D01: SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR(1g) is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

EUT setup		Band [GHz]	Mode	Frequency [MHz]	SAR Measurement Variability Result										SAR plot # in Appendix 2 (Setup photo# in Appendix 1-3)				
EUT	Position				Type	Unit	Original		1 <sup>st</sup> Repeated			2 <sup>nd</sup> Repeated				Original	1 <sup>st</sup> Repeated	2 <sup>nd</sup> Repeated	
							Highest	Judge	Measured	Judge	Ratio	Judge	Measured	Judge	Ratio				Judge
Left	Front	2.4	BR	2402	SAR1g	W/kg	<b>0.864</b>	$\geq 0.8$	<b>0.797</b>	< 1.45	1.084 (**1)	< 1.2	<b>N/A</b>	-	-	-	1 (P1)	3 (P13)	-
Right	Front	2.4	BR	2402	SAR1g	W/kg	<b>0.837</b>	$\geq 0.8$	<b>0.830</b>	< 1.45	1.008 (**1)	< 1.2	<b>N/A</b>	-	-	-	2 (P7)	4 (P14)	-

\*. Calculating formula: "Ratio": Largest to Smallest SAR Ratio (%) = (Largest SAR (W/kg)) / Smallest SAR (W/kg)

\*1 It was smaller than 5.0 % of uncertainty of the "Dxyz: Test Sample positioning."

### 7.4 Device Holder (D/H) perturbation verification (SAR)

**Result: Pass** (The influence of a device holder is small enough.)

When the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification (by Urethane form alone) is required by using the highest SAR configuration among all applicable frequency bands.

- \*. During SAR measurement the EUT was not placed on the device holder directly. The EUT was mounted in the device holder using Urethane form (low-permittivity and low-loss foam) to avoid changes of EUT performance by the holder material (Refer to Appendix 1-3, photographs of test setup). However, the "Device Holder (D/H) perturbation" was confirmed by the setup for which device holder was not used in highest SAR configuration.

EUT setup		Mode	Freq. [MHz]	Measured SAR [W/kg]			D/H perturbation SAR Ratio	SAR plot # in Appendix 2 (Setup photo# in Appendix 1-3)		Remarks	
EUT	Position			Type	Unit	D/H Exist		D/H None	D/H Exist		D/H None
Left	Front	BR	2402	SAR1g	W/kg	<b>0.864</b> (Reported: 1.349)	<b>0.840</b> (Reported: 1.311)	<b>2.9 %</b>	1 (P1)	5 (P15)	*. It was smaller than 3.6 % of uncertainty of the "H: Device holder uncertainty", so influence of a device holder was judged to be no problem.
Right	Front	BR	2402	SAR1g	W/kg	<b>0.837</b> (Reported: 1.382)	<b>0.814</b> (Reported: 1.344)	<b>2.8 %</b>	2 (P7)	6 (P16)	*. It was smaller than 3.6 % of uncertainty of the "H: Device holder uncertainty", so influence of a device holder was judged to be no problem.

\*. Calculating formula: D/H perturbation SAR Ratio (%) = (((Measured SAR-exist (W/kg)) - (Measured SAR-none (W/kg)) / (Measured SAR-none (W/kg))) \* 100

### 7.5 Requirements on the Uncertainty Evaluation

Decision Rule

- Uncertainty is not included.  
 Uncertainty is included.

\*. The highest measured SAR(1g) is less than 1.5 W/kg and the highest measured SAR(10g) is less than 3.75 W/kg. Therefore, per KDB Publication 865664 DO1, the extended measurement uncertainty analysis described in IEEE 1528-2013 and IEC/IEEE 62209-1528 is not required.

## APPENDIX 2: Measurement data

### Appendix 2-1: Plot(s) of Worst Reported Value

#### Plot 1: SAR(1g) Left unit; Front & touch (d=0mm), BR (DH5), 2402 MHz


EUT: Wireless Noise Canceling Stereo Headset; Model: YY2975; Serial: 1201078

Mode: BR(DH5) (UID: 0 (CW)) ; Frequency: 2402 MHz ; Test Distance: 0.00 mm

TSL parameters used: Head(v6) ; f= 2402 MHz; Conductivity: 1.798 S/m; Permittivity: 39.05

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated: 2024-01-09) / - Phantom: ELI V8.0 (20deg probe tilt) ; Serial: 2161 ; Phantom section: Flat  
- Probe: EX3DV4 - SN3907(Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup Items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	60.0x60.0	30.0x 30.0 x30.0	psSAR 1g [W/kg]	0.762	<b>0.864</b>
Grid Steps [mm]	10.0x10.0	3.0x 3.0 x1.5	psSAR 10g [W/kg]	0.247	<b>0.207</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	-0.01	0.01
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	Y	Y	TSL Correction	No correction	No correction
Surface Detection	VMS + 6p	VMS + 6p	M2/M1 [%]	N/A	35.9
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	3.3

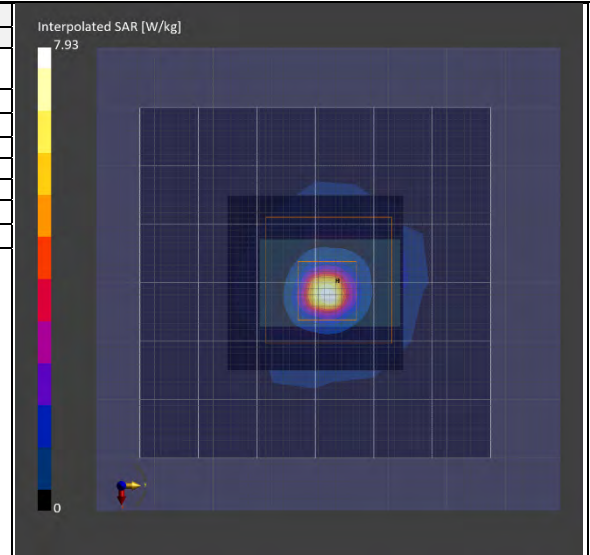

Remarks: \* Date tested: 2024-05-13; Tested by: Hiroshi Naka; Tested place: No.7 shielded room; Ambient: 23 deg.C. / 82 %RH; Liquid depth: 150 mm;  
\* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C., in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
\* Project file name-Measurement Group: 240509\_15260493\_YY2975.d8sar-5/9-1,L,dh5,2402,front

#### Plot 2: SAR(1g) Right unit; Front & touch (d=0mm), BR (DH5), 2402 MHz


EUT: Wireless Noise Canceling Stereo Headset; Model: YY2975; Serial: 1201078

Mode: BR(DH5) (UID: 0 (CW)) ; Frequency: 2402 MHz ; Test Distance: 0.00 mm

TSL parameters used: Head(v6) ; f= 2402 MHz; Conductivity: 1.798 S/m; Permittivity: 39.05

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated: 2024-01-09) / - Phantom: ELI V8.0 (20deg probe tilt) ; Serial: 2161 ; Phantom section: Flat  
- Probe: EX3DV4 - SN3907(Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup Items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	40.0x40.0	30.0x 30.0 x30.0	psSAR 1g [W/kg]	0.673	<b>0.837</b>
Grid Steps [mm]	10.0x10.0	3.0x 3.0 x1.5	psSAR 10g [W/kg]	0.234	<b>0.207</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	-0.01	-0.01
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	Y	Y	TSL Correction	No correction	No correction
Surface Detection	VMS + 6p	VMS + 6p	M2/M1 [%]	N/A	41.6
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	3.5

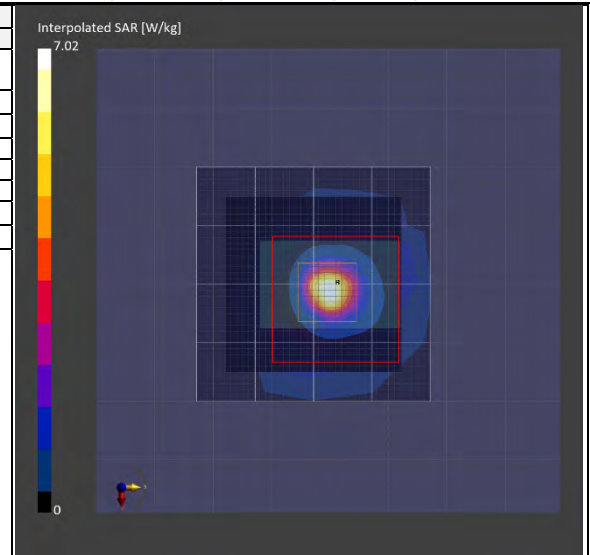

Remarks: \* Date tested: 2024-05-13; Tested by: Hiroshi Naka; Tested place: No.7 shielded room; Ambient: 23 deg.C. / 82 %RH; Liquid depth: 150 mm;  
\* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C., in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
\* Project file name-Measurement Group: 240509\_15260493\_YY2975.d8sar-5/9-3,R,dh5,2402,front



**Appendix 2-2: SAR Plot for SAR Measurement Variability (Repeated measurement requirement)**

**Plot 3: (Repeat) SAR1g Left unit; Front & touch (d=0mm), BR (DH5), 2402 MHz**


EUT: Wireless Noise Canceling Stereo Headset; Model: YY2975; Serial: 1201078

Mode: BR(DH5) (UID: 0 (CW)); Frequency: 2402 MHz; Test Distance: 0.00 mm

TSL parameters used: Head(v6); f= 2402 MHz; Conductivity: 1.798 S/m; Permittivity: 39.05

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated: 2024-01-09) / - Phantom: ELI V8.0 (20deg probe tilt); Serial: 2161; Phantom section: Flat  
- Probe: EX3DV4 - SN3907(Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup Items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	40.0x40.0	30.0x 30.0 x30.0	psSAR 1g [W/kg]	0.760	<b>0.797</b>
Grid Steps [mm]	10.0x10.0	3.0x 3.0 x1.5	psSAR 10g [W/kg]	0.236	<b>0.189</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	0.02	0.02
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	Y	Y	TSL Correction	No correction	No correction
Surface Detection	All points	All points	M2/M1 [%]	N/A	37.7
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	3.1

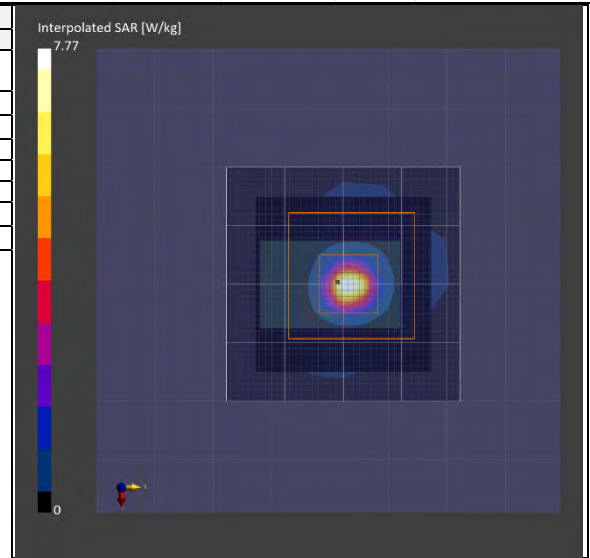

Remarks: \* Date tested: 2024-05-13; Tested by: Hiroshi Naka; Tested place: No.7 shielded room; Ambient: 24 deg.C. / 78 %RH; Liquid depth: 150 mm;  
\* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C. in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
\* Project file name-Measurement Group: 240509\_15260493\_YY2975.d8sar-5/13-1,L,dh5,2402,front,2nd

**Plot 4: (Repeat) SAR1g Right unit; Front & touch (d=0mm), BR (DH5), 2402 MHz**


EUT: Wireless Noise Canceling Stereo Headset; Model: YY2975; Serial: 1201078

Mode: BR(DH5) (UID: 0 (CW)); Frequency: 2402 MHz; Test Distance: 0.00 mm

TSL parameters used: Head(v6); f= 2402 MHz; Conductivity: 1.798 S/m; Permittivity: 39.05

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated: 2024-01-09) / - Phantom: ELI V8.0 (20deg probe tilt); Serial: 2161; Phantom section: Flat  
- Probe: EX3DV4 - SN3907(Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup Items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	40.0x40.0	30.0x 30.0 x30.0	psSAR 1g [W/kg]	0.710	<b>0.830</b>
Grid Steps [mm]	10.0x10.0	3.0x 3.0 x1.5	psSAR 10g [W/kg]	0.240	<b>0.205</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	0.00	-0.00
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	Y	Y	TSL Correction	No correction	No correction
Surface Detection	VMS + 6p	VMS + 6p	M2/M1 [%]	N/A	40.1
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	3.8

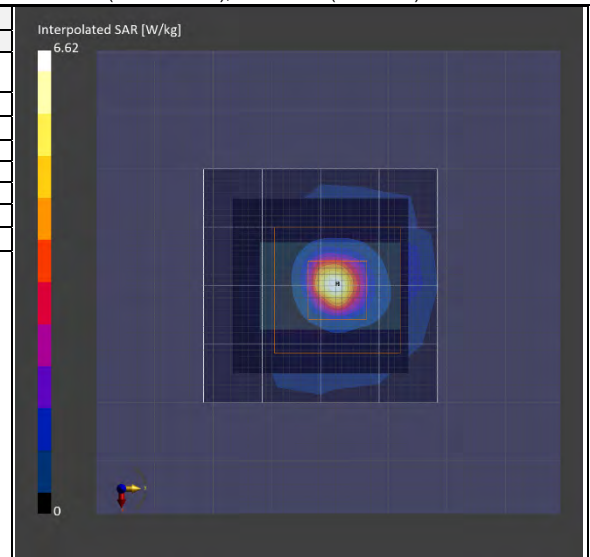

Remarks: \* Date tested: 2024-05-13; Tested by: Hiroshi Naka; Tested place: No.7 shielded room; Ambient: 24 deg.C. / 78 %RH; Liquid depth: 150 mm;  
\* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C. in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
\* Project file name-Measurement Group: 240509\_15260493\_YY2975.d8sar-5/13-2,R,dh5,2402,front,2nd

**Appendix 2-3: SAR Plot for Device holder (D/H) perturbation verification**

**Plot 5: (No D/H) SAR1g) Left unit; Front & touch (d=0mm), BR (DH5), 2402 MHz**


EUT: Wireless Noise Canceling Stereo Headset; Model: YY2975; Serial: 1201078

Mode: BR(DH5) (UID: 0 (CW)); Frequency: 2402 MHz; Test Distance: 0.00 mm

TSL parameters used: Head(v6); f= 2402 MHz; Conductivity: 1.798 S/m; Permittivity: 39.05

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated: 2024-01-09) / - Phantom: ELI V8.0 (20deg probe tilt); Serial: 2161; Phantom section: Flat  
- Probe: EX3DV4 - SN3907 (Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	40.0x40.0	30.0x 30.0 x30.0	psSAR 1g [W/kg]	0.723	<b>0.840</b>
Grid Steps [mm]	10.0x10.0	3.0x 3.0 x1.5	psSAR 10g [W/kg]	0.235	<b>0.200</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	-0.01	0.03
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	Y	Y	TSL Correction	No correction	No correction
Surface Detection	VMS + 6p	VMS + 6p	M2/M1 [%]	N/A	40.2
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	3.6

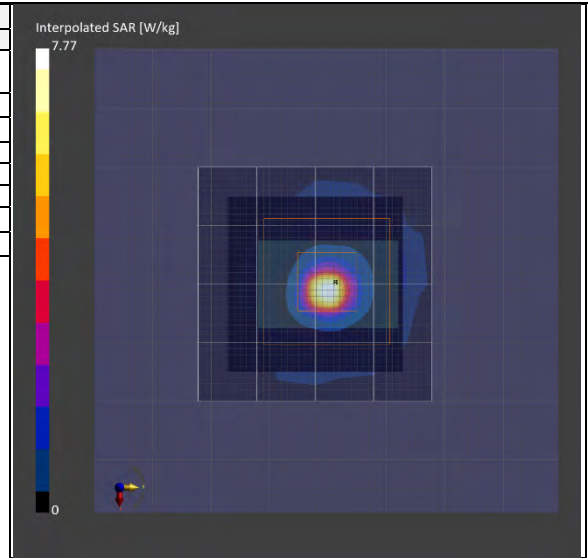

Remarks: \* Date tested: 2024-05-13; Tested by: Hiroshi Naka; Tested place: No.7 shielded room; Ambient: 23 deg.C. / 64 %RH; Liquid depth: 150 mm;  
\* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C., in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
\* Project file name-Measurement Group: 240509-\_15260493\_YY2975.d8sar- 5/13-21\_L,dh5,2402,front,noDH

**Plot 6: (No D/H) SAR1g) Right unit; Front & touch (d=0mm), BR (DH5), 2402 MHz**


EUT: Wireless Noise Canceling Stereo Headset; Model: YY2975; Serial: 1201078

Mode: BR(DH5) (UID: 0 (CW)); Frequency: 2402 MHz; Test Distance: 0.00 mm

TSL parameters used: Head(v6); f= 2402 MHz; Conductivity: 1.798 S/m; Permittivity: 39.05

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated: 2024-01-09) / - Phantom: ELI V8.0 (20deg probe tilt); Serial: 2161; Phantom section: Flat  
- Probe: EX3DV4 - SN3907 (Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	40.0x40.0	30.0x 30.0 x30.0	psSAR 1g [W/kg]	0.779	<b>0.814</b>
Grid Steps [mm]	10.0x10.0	3.0x 3.0 x1.5	psSAR 10g [W/kg]	0.240	<b>0.193</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	0.03	0.05
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	N/A	N/A	TSL Correction	No correction	No correction
Surface Detection	VMS + 6p	VMS + 6p	M2/M1 [%]	N/A	37.6
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	3.1

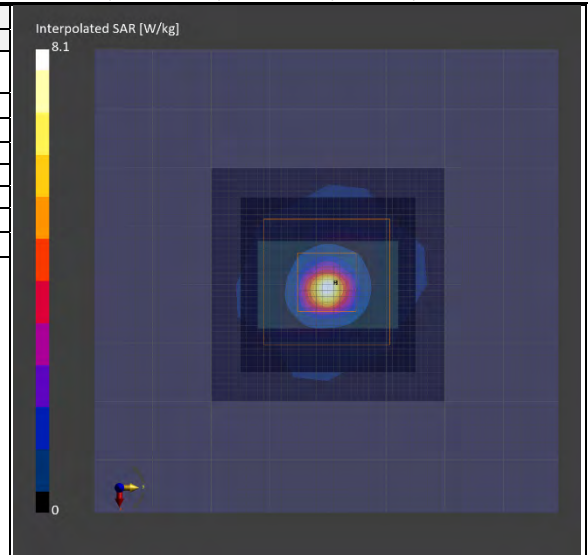

Remarks: \* Date tested: 2024-05-13; Tested by: Hiroshi Naka; Tested place: No.7 shielded room; Ambient: (22~24) deg.C. / (60~75) %RH; Liquid depth: 150 mm;  
\* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C., in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
\* Project file name-Measurement Group: 240509-\_15260493\_YY2975.d8sar- 5/13-22\_R,dh5,2402,front,noDH



## APPENDIX 3: Test instruments

### Appendix 3-1: Equipment used

Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Interval (Month)
AT	191844	Thermo-Hygrometer	CUSTOM, Inc	CTH-201	-	2023/08/03	12
AT	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2023/09/28	12
AT	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2023/09/28	12
AT	236500	Attenuator	To-Conne Co., Ltd.	SA-PJ-10	-	2023/12/04	12
AT	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2024/03/25	12
AT	145175	Coaxial Cable	Suhner	SUCOFLEX 102	31600/2	2023/12/08	12

\* AT was measured 2024-04-22. (Refer to Section 5 in this report.)

Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Interval (Month)
SAR	224031	DASY8 Module SAR/APD soft	Schmid & Partner Engineering AG	ver.16.2.4.2524	9-2506F07D	-	-
SAR	144886	Dielectric assessment kit soft	Schmid & Partner Engineering AG	DAK ver.3.0.6.14	9-0EE103A4	-	-
SAR	224020	DASY8 PC	Hewlett Packard	HP Z4 G4 Workstation	CZC1198G21	-	-
SAR	225155	Mounting Platform	Schmid & Partner Engineering AG	MP8E-TX2-60L Basic	-	-	-
SAR	224032	6-axis Robot	Schmid & Partner Engineering AG	TX2-60L spe	F/22/0033789/A/001	2023/08/29	12
SAR	224023	Robot Controller	Schmid & Partner Engineering AG	CS9spe-TX2-60	F/22/0033789/C/001	-	-
SAR	224025	Measurement Server	Schmid & Partner Engineering AG	DASY8 Measurement Server	10042	2024/02/01	12
SAR	224026	Electro-Optical Converter	Schmid & Partner Engineering AG	EOC8-60	1027	-	-
SAR	224027	Light Beam Unit	Schmid & Partner Engineering AG	LIGHTBEAM-85	2069	-	-
SAR	227155	SP2 Manual Control Pendant	Schmid & Partner Engineering AG	D21144507 C	22066839	-	-
SAR	144944	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE4	626	2024/01/09	12
SAR	146235	Dosimetric E-Field Probe	Schmid & Partner Engineering AG	EX3DV4	3907	2024/01/15	12
SAR	224034	Flat Phantom	Schmid & Partner Engineering AG	ELJ V8.0	2161	2023/08/21	12
SAR	145596	Device holder	Schmid & Partner Engineering AG	Mounting device for transmitter	-	2023/08/29	12
SAR	224028	Modulation & Audio Interference Analyzer	Schmid & Partner Engineering AG	MAIA	1582	-	-
SAR	145090	Dipole Antenna	Schmid & Partner Engineering AG	D2450V2	822	2024/01/05	12
SAR	230872	RF Power Source	Schmid & Partner Engineering AG	POWERSOURCE1	4300	2024/01/03	12
SAR	145500	Dielectric probe	Schmid & Partner Engineering AG	DAK3.5	1129	2024/01/16	12
SAR	146258	Network Analyzer	Keysight Technologies Inc	8753ES	US39171777	2023/10/05	12
SAR	145086	Ruler(300mm)	SHINWA	I3134	-	2024/02/26	12
SAR	145087	Ruler(100x50mm,L)	SHINWA	I2101	-	2024/02/26	12
SAR	144986	Thermo-Hygrometer data logger	SATO KEIRYOKI	SK-L200THllc/SK-LTHllc-2	015246/08169	2023/08/04	12
SAR	201967	Digital thermometer	HANNA	Checktemp-4	A01440226111	2023/08/04	12
SAR	201968	Digital thermometer	HANNA	Checktemp-4	A01310946111	2023/08/04	12
SAR	191844	Thermo-Hygrometer	CUSTOM, Inc	CTH-201	-	2023/08/03	12
SAR	146176	Spectrum Analyzer	ADVANTEST	R3272	101100994	-	-
SAR	146185	DI water	MonotaRo	34557433	-	-	-
SAR	146112	Primepure Ethanol	Kanto Chemical Co., Inc.	I4032-79	-	-	-
SAR	207714	Head Tissue Simulating Liquid	Schmid & Partner Engineering AG	HBBL600-10000V6	SL AAH U16 BC	-	-

\* SAR test was performed 2024-05-13.

The expiration date of calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chain of calibrations. All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

\* Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.


[Test Item] AT: Antenna terminal conducted power, SAR: Specific Absorption Rate

\* LIMS ID: 146112, the parameters of primepure Ethanol (as reference liquid) used for the simulated tissue parameter confirmation was defined the NPL Report MAT23 (<http://www.npl.co.uk/content/conpublication/4295>)

## Appendix 3-2: Measurement System

### Appendix 3-2-1: SAR Measurement System

These measurements were performed with the automated near-field scanning system DASY8 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot, which positions the probes with a positional repeatability of better than  $\pm 0.03$  mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probes EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

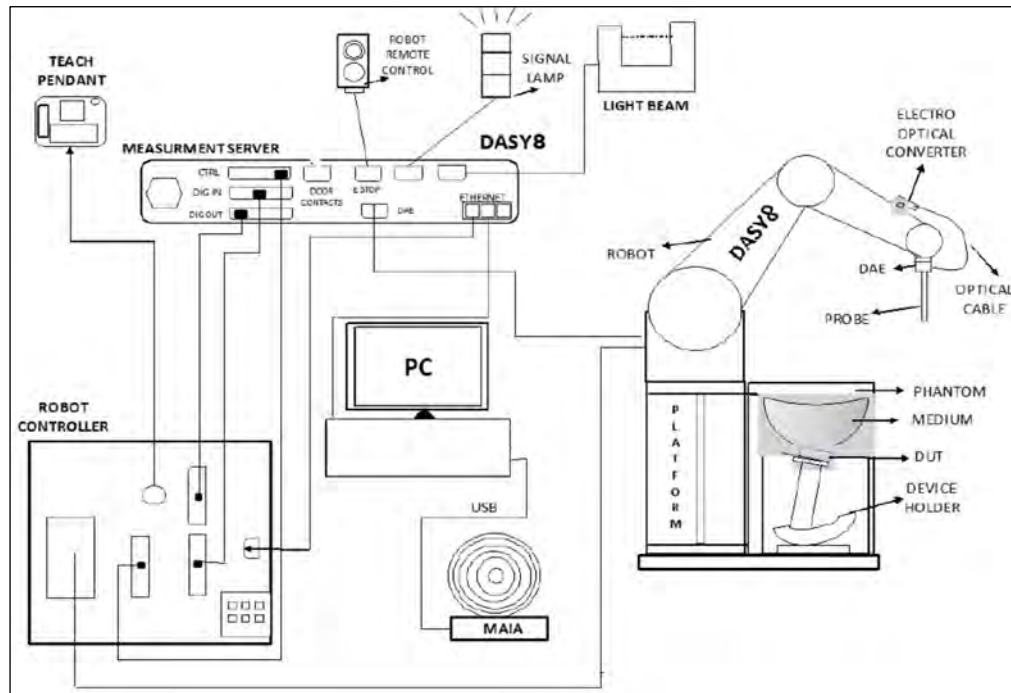

The DASY8 SAR/APD system for performing compliance tests consist of the following items:

- 6-axis robotic arm (Stäubli TX2-60L) for positioning the probe
- Mounting Platform for keeping the phantoms at a fixed location relative to the robot
- Measurement Server for handling all time-critical tasks, such as measurement data acquisition and supervision of safety features
- EOC (Electrical to Optical Converter) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server
- LB (Light-Beam unit) for probe alignment (measurement of the exact probe length and eccentricity)
- SAR probe (EX3DV4 probes) for measuring the E-field distribution in the phantom. The SAR distribution and the psSAR (peak spatial averaged SAR) are derived from the E-field measurement.
- SAR phantom that represents a physical model with an equivalent human anatomy. A Specific Anthropomorphic Mannequin (SAM) head is usually used for handheld devices, and a Flat phantom is used for body-worn devices.
- TSL (Tissue Simulating Liquid) representing the dielectric properties of used tissue, e.g. Head Simulating Liquid, HSL.
- DAE (Data Acquisition Electronics) for reading the probe voltages and transmitting it to the DASY8 PC.
- Device Holder for positioning the DUT beneath the phantom.
- MAIA (Modulation and Interference Analyzer) for confirming the accuracy of the probe linearization parameters
- Operator PC for running the DASY8 software to define/execute the measurements
- System validation kits for system check/validation purposes.

**Platforms**

The platform is a multi-phantom support structure made of a wood and epoxy composite ( $\epsilon = 3.3$  and loss tangent  $\delta < 0.07$ ). It is a strong and rigid structure transparent to electric and magnetic fields (nonmetallic components).

**TX2-60L robot, CS9 robot controller**

- Number of Axes : 6
- Repeatability :  $\pm 0.03$  mm
- Manufacture : Stäubli

**DASY8 Measurement server**

The DASY8 Measurement Server handles all time critical tasks such as acquisition of measurement data, detection of phantom surface, control of robot movements, supervision of safety features.

- Manufacture : Schmid & Partner Engineering AG

**Data Acquisition Electronic (DAE)**

The DAE is used to acquire the probe sensor voltages and transfer them to the DASY8 Measurement Server, and to report mechanical surface detection and probe collisions. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, and a command decoder with a control logic unit. Transmission to the DASY8 Measurement Server is accomplished through an optical downlink for data and status information and an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts used for mechanical surface detection and probe collision detection.

- Measurement Range : 1  $\mu$ V to > 200 mV (2 range settings: 4 mV (low), 400 mV (high))
- Input Offset voltage : < 1  $\mu$ V (with auto zero)
- Input Resistance : 200 M $\Omega$
- Battery operation : > 10 hrs. (with two rechargeable 9V battery)
- Manufacture : Schmid & Partner Engineering AG

**Electro-Optical Converter (EOC8-TX2-60L)**

The Electrical to Optical Converter (EOC8) supports as data exchange between the DAE and the measurement server (optical connector) and data acquisition based on Ethernet protocol.

- Manufacture : Schmid & Partner Engineering AG

**Light Beam Switch**

The light beam unit allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm, as well as the probe length and the horizontal probe offset, are measured. The software then corrects all movements within the measurement jobs, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

- Manufacture : Schmid & Partner Engineering AG

**SAR measurement software**

- Software version : Refer to Appendix 3-1 (Equipment used)
- Manufacture : Schmid & Partner Engineering AG

**E-Field Probe**

- Model : EX3DV4
- Frequency : 4 MHz to 10 GHz, Linearity:  $\pm 0.2$  dB (30 MHz to 10 GHz)
- Construction : Symmetrical design with triangular core, Built-in shielding against static charges, PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
- CF : Refer to calibration data of Appendix. (CF: Conversion Factors)
- Directivity :  $\pm 0.1$  dB in TSL (rotation around probe axis) /  $\pm 0.3$  dB in TSL (rotation normal to probe axis)
- Dynamic Range : 10  $\mu$ W/g to > 100 mW/g; Linearity:  $\pm 0.2$  dB (noise: typically < 1  $\mu$ W/g)
- Dimension : Overall length: 330 mm (Tip: 20 mm) / Tip diameter: 2.5 mm (Body: 12 mm)  
Typical distance from probe tip to dipole centers: 1mm
- Application : High precision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.
- Manufacture : Schmid & Partner Engineering AG

**ELI Phantom**

The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 4 MHz to 10 GHz. ELI is fully compatible with the IEC/IEEE 62209-1528 standard and all known tissue simulating liquids.


ELI V8.0 phantom shell has optimized pretension in the bottom surface during production, such that the phantom is more robust and with reduced sagging.

- Model Number : ELI V8.0 flat phantom
- Shell Material : Vinyl ester, fiberglass reinforced (VE-GF)
- Shell Thickness :  $2.0 \pm 0.2$  mm (bottom plate)
- Dimensions : 600 mm  $\times$  400 mm (oval) (volume: Approx. 30 liters)
- Manufacture : Schmid & Partner Engineering AG

**Device Holder, Laptop holder, support material**

Accurate device positioning is crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards. The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

- Device holder: In combination with the ELI phantom, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Transmitter devices can be easily and accurately positioned. The low-loss dielectric urethane foam was used for the mounting section of device holder.
  - Material : Polyoxymethylene (POM)
  - Manufacture : Schmid & Partner Engineering AG
- Laptop holder: A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices (e.g., laptops, cameras, etc.) according to IEC 62209-2.
  - Material : Polyoxymethylene (POM), PET-G, Foam
  - Manufacture : Schmid & Partner Engineering AG
- Support form: Urethane foam

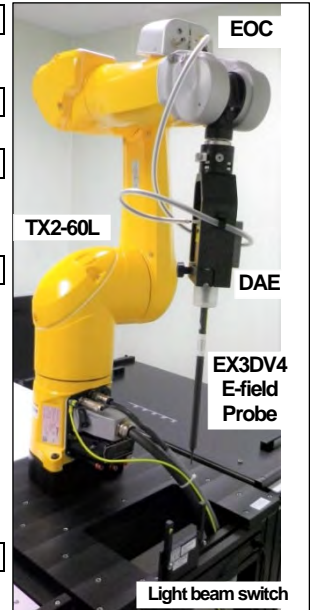

### Data storage and evaluation (post processing)

The uplink signal transmitted by the DUT is measured inside the TSL by the probe, which is accurately positioned at a precisely known distance and with a normal orientation with respect to the phantom surface. The dipole / loop sensors at the probe tips pick up the signal and generate a voltage, which is measured by the voltmeter inside the DAE. The DAE returns digital values, which are converted to an optical signal and transmitted via the EOC to the measurement server. The data is finally transferred to the DASY8 software for further post processing. In addition, the DASY8 software periodically requests a measurement with short-circuited inputs from the DAE to compensate the amplifier offset and drift. This procedure is called DAE zeroing.

The operator has access to the following low level measurement settings:

- the integration time is the voltage acquisition time at each measurement point. It is typically 0.5 s.
- the zeroing period indicates how often the DAE zeroing is performed.

In parallel, the MAIA measures the characteristics of the uplink signal via the air interface and sends this information to the DASY8 software, which compares them to the communication system defined by the operator. A warning is issued if any difference is detected.

The measurement data is now acquired and can be post processed to compute the psSAR1g /8g /10g.

The measured voltages are not directly proportional to SAR and must be linearized. The formulas below are based on [1] (\*1).

The measured voltage is first linearized using the (a, b, c, d) set of parameters specific to the communication system and sensor:

$$V_{comp_i} = U_i + U_i^2 \cdot \frac{d}{d_{cp_i}}$$

with $V_{comp_i}$	= compensated voltage of channel i ( $\mu V$ )	(i = x,y,z)
$U_j$	= input voltage of channel i ( $\mu V$ )	(i = x,y,z)
$d$	= PMR factor d (dB)	(Probe parameter)
$d_{cp_i}$	= diode compression point of channel i ( $\mu V$ )	(Probe parameter, i = x,y,z)

$$V_{comp_i \text{ dB}\sqrt{\mu V}} = 10 \cdot \log_{10}(V_{comp_i})$$

$$corr_i = a_i \cdot e^{-\frac{(b_i - 10 \log_{10}(V_{comp_i}))^2}{c_i}}$$

with $corr_i$	= correction factor of channel i (dB)	(i = x,y,z)
$V_{comp_i \text{ dB}\sqrt{\mu V}}$	= compensated voltage of channel i ( $\text{dB}\sqrt{\mu V}$ )	(i = x,y,z)
$a_j$	= PMR factor a of channel i (dB)	(Probe parameter, i = x,y,z)
$b_j$	= PMR factor b of channel i ( $\text{dB}\sqrt{\mu V}$ )	(Probe parameter, i = x,y,z)
$c_j$	= PMR factor c of channel i (-)	(Probe parameter, i = x,y,z)

The voltage  $V_{i \text{ dB}\sqrt{\mu V}}$  is the linearized voltage in  $\text{dB}\sqrt{\mu V}$ :

$$V_{i \text{ dB}\sqrt{\mu V}} = V_{comp_i \text{ dB}\sqrt{\mu V}} - corr_i$$

with $V_{i \text{ dB}\sqrt{\mu V}}$	= linearized voltage of channel i ( $\text{dB}\sqrt{\mu V}$ )	(i = x,y,z)
$V_{comp_i \text{ dB}\sqrt{\mu V}}$	= compensated voltage of channel i ( $\text{dB}\sqrt{\mu V}$ )	(i = x,y,z)
$corr_i$	= PMR factor a of channel i (dB)	(i = x,y,z)

Finally, the linearized voltage is converted in  $\mu V$  :

$$V_i = 10^{\frac{V_{i \text{ dB}\sqrt{\mu V}}}{10}}$$

with $V_j$	= linearized voltage of channel i ( $\mu V$ )	(i = x,y,z)
$V_{comp_i \text{ dB}\sqrt{\mu V}}$	= linearized voltage of channel i ( $\text{dB}\sqrt{\mu V}$ )	(i = x,y,z)

The Field data for each channel are calculated using the linearized voltage:

$$E\text{-field probes: } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with $V_j$	= linearized voltage of channel i in $\mu V$	(i = x,y,z)
$Norm_j$	= sensor sensitivity of channel i in $\mu V/(V/m)^2$ for E-field Probes	(i = x,y,z)
$ConvF$	= sensitivity enhancement in solution	
$E_j$	= electric field strength of channel i in V/m	(i = x,y,z)

The RMS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The E-field data value is used to calculate SAR :

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR	= local specific absorption rate in mW/g
$E_{tot}$	= total field strength in V/m
$\sigma$	= conductivity in [ $\Omega/m$ ] or [S/m]
$\rho$	= equivalent tissue density in g/cm <sup>3</sup>

Note: The resulting linearized voltage is only approximated because the probe UID is used 0 (CW) for the test signal in this test report.

(\*1) [1] Jagadish Nadakuduti, Sven Kuehn, Marcel Fehr, Mark Douglas Katja Pokovic and Niels Kuster, "The Effect of Diode Response of electromagnetic Field Probes for the Measurements of Complex Signals." IEEE Transactions on Electromagnetic Compatibility, vol. 54, pp. 1195–1204, Dec. 2012.


**Appendix 3-2-2: SAR system check results**

Prior to the SAR assessment of EUT, the Daily check was performed to test whether the SAR system was operating within its target of ±10%. The Daily check results are in the table below.

Daily check results (*. Abbreviations: F: Frequency, Meas.: Measured, Cal.: Calibration value, STD: Standard value, Dev.: Deviation)																	
Liquid type: Head	F [MHz]	ΔSAR			SAR (1g) [W/kg] (*b)						SAR (10g) [W/kg] (*b)				Dev. Limit [%]		
		1g [%]	10g [%]	Pin [dBm]	Meas. (*a)	1W scaled	Target	Deviation	Meas. (*c)	1W scaled	Target	Deviation					
Date					Cal. (°c)	STD (°d)	Cal. (°c)	STD (°d)	Meas. (°c)	1W scaled	Cal. (°c)	STD (°d)	Cal. (°c)	STD (°d)			
2024-05-13	2450	1.1	0.6	17.01	2.61	51.38	53.4	52.4	-3.8	-1.9	1.21	23.95	25	24	-4.2	-0.2	≤10

- \*a. (2.45 GHz) The Measured SAR/ value is obtained at 17 dBm (50 mW) setting of POWERSOURCE1 (LIMS ID#230872, S/N: 4300) calibrated by Schmid & Partner Engineering AG, the data sheet was filed in this report.
- \*b. The measured SAR value of Daily check was compensated for tissue dielectric deviations (ΔSAR) and scaled to 1W of output power in order to compare with the manufacturer's calibration target value which was normalized.  
 $\Delta\text{SAR corrected SAR (1g) (W/kg)} = (\text{Measured SAR(1g) (W/kg)}) \times (100 - (\Delta\text{SAR1g}(\%))) / 100$   
 $\Delta\text{SAR corrected SAR (10g,8g) (W/kg)} = (\text{Measured SAR(10g,8g) (W/kg)}) \times (100 - (\Delta\text{SAR10g}(\%))) / 100$
- \*c. The target value is a parameter defined in the calibration data sheet of D2450V2 (sn:822) dipole calibrated by Schmid & Partner Engineering AG, the data sheet was filed in this report.
- \*d. The target value (normalized to 1W) is defined in IEEE Std.1528.


**Appendix 3-2-3: SAR system check measurement data**



Dipole: D2450V2 - SN822 ; Mode: CW (0) ; Frequency: 2450 MHz ; Test Distance: 10 mm (dipole to liquid) ; Power setting: 17.0 dBm  
 TSL parameters used: Head(v6) ; f= 2450 MHz; Conductivity: 1.835 S/m; Permittivity: 38.94

DASY8 Configuration: - Electronics: DAE4 - SN626 (Calibrated:2024-01-09)/ - Phantom: ELI V8.0 (20deg probe tilt) ; Serial: 2161 ; Phantom section: Flat  
 - Probe: EX3DV4 - SN3907(Calibrated: 2024-01-15); ConvF: (6.83, 7.07, 6.68) / - Software: 16.2.4.2524 (Measurement); 16.2.4.2524 (Evaluation)

Scan Setup			Measurement Results		
Setup Items	Area Scan	Zoom Scan	Meas. Items	Area Scan	Zoom Scan
Grid Extents [mm]	40.0x80.0	30.0x 30.0x30.0	psSAR1g [W/kg]	2.62	<b>2.61</b>
Grid Steps [mm]	10.0x10.0	5.0x 5.0x1.5	psSAR10g [W/kg]	1.21	<b>1.21</b>
Sensor Surface [mm]	3.0	1.4	Power Drift [dB]	0.02	0.01
Graded Grid	N/A	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	N/A	1.5	Scaling Factor [dB]	N/A	N/A
MAIA monitored	Y	Y	TSL Correction	No correction	No correction
Surface Detection	VMS + 6p	VMS + 6p	M2/M1 [%]	N/A	80.7
Scan Method	Measured	Measured	Dist 3dB Peak [mm]	N/A	9.0

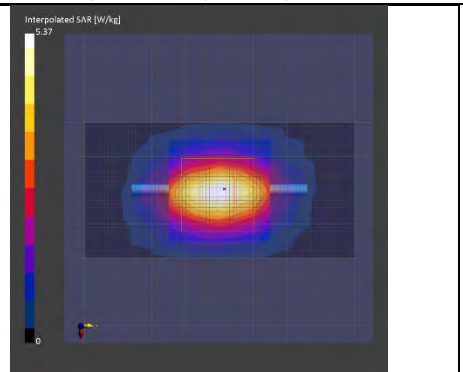

Remarks: \* Date tested:2024-05-13 ; Tested by: Hiroshi Naka; Tested place:No.7 shielded room; Ambient: 23 deg.C. / 78 %RH; Liquid depth: 150 mm;  
 \* Liquid temperature: 22.5 deg.C. ± 0.5 deg.C. (22.5 deg.C., in check); \* Red cubic: big=SAR(10g) / small=SAR(1g)  
 \* Project file name-Measurement Group: 240509\_15260493\_Y2975.d8sar- SPC Measurement Group

**Appendix 3-3: Measurement Uncertainty**

Uncertainty of SAR measurement (2.4 GHz ~ 6 GHz) (*. liquid: head(v6), DAK-3.5, Wi-Fi(BT)) (v11r05)							1g SAR	10g SAR	
Symbol	Error Description	Uncertainty (Unc.)	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g) (Std. Unc.)	ui (10g) (Std. Unc.)	
<b>Measurement System (DASY8)</b>									
CF	Probe Calibration (EX3DV4) (HSL: 10%)	± 14.0 %	Normal	2	1	1	± 7.0 %	± 7.0 %	
CF <sub>drift</sub>	Probe Calibration Drift	± 1.7 %	Rectangular	√3	1	1	± 1.0 %	± 1.0 %	
LIN	Probe Linearity	± 4.7 %	Rectangular	√3	1	1	± 2.7 %	± 2.7 %	
BBS	Broadband Signal	± 2.6 %	Rectangular	√3	1	1	± 1.5 %	± 1.5 %	
ISO1	Probe Isotropy	± 7.6 %	Rectangular	√3	1	1	± 4.4 %	± 4.4 %	
DAE	Data Acquisition	± 1.2 %	Normal	1	1	1	± 1.2 %	± 1.2 %	
AMB	RF Ambient (noise&refraction) (< 12μW/g)	± 1.0 %	Normal	1	1	1	± 1.0 %	± 1.0 %	
Δ <sub>sys</sub>	Probe Positioning	± 0.5 %	Normal	1	0.33	0.33	± 0.2 %	± 0.2 %	
DAT	Data Processing	± 2.3 %	Normal	1	1	1	± 2.3 %	± 2.3 %	
<b>Phantom and Device Error</b>									
LIQ(σ)	Conductivity (measured) (DAK-3.5)	± 5.0 %	Normal	2	0.78	0.71	± 2.0 %	± 1.8 %	
LIQ(Tσ)	Conductivity (temperature) (≤ 2 deg.C.)	± 2.4 %	Rectangular	√3	0.78	0.71	± 1.1 %	± 1.0 %	
EPS	Phantom Permittivity (liquid to antenna: ≥ 5 mm)	± 14.0 %	Rectangular	√3	0.25	0.25	± 2.0 %	± 2.0 %	
DIS	Distance EUT-TSL	± 2.7 %	Normal	1	2	2	± 5.4 %	± 5.4 %	
D <sub>xyz</sub>	Test Sample positioning	± 1.8 %	Normal	1	1	1	± 5.0 %	± 5.0 %	
H	Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	
MOD	EUT Modulation	± 2.4 %	Rectangular	√3	1	1	± 1.4 %	± 1.4 %	
TAS	Time-average SAR	± 0.0 %	Rectangular	√3	1	1	± 0.0 %	± 0.0 %	
RF <sub>drift</sub>	Drift of output power (measured, < 0.2 dB)	± 4.7 %	Normal	2	1	1	± 2.4 %	± 2.4 %	
<b>Correction to the SAR results</b>									
C(e,σ)	Deviation to Target (e,σ: ≤ 10 %, IEC head)	± 1.9 %	Normal	1	1	0.84	± 1.9 %	± 1.6 %	
C(R)	SAR Scaling	± 0 %	Rectangular	√3	1	1	± 0.0 %	± 0.0 %	
u(ΔSAR)	<b>(SAR: 2.4 GHz-6 GHz) Combined Standard Uncertainty</b>						<b>RSS</b>	<b>± 12.3 %</b>	<b>± 12.3 %</b>
<b>U</b>	<b>(SAR: 2.4 GHz-6 GHz) Expanded Uncertainty</b>						<b>k=2</b>	<b>± 24.6 %</b>	<b>± 24.6 %</b>

\*. This uncertainty budget is suggested by IEC/IEEE 62209-1528 and determined by SPEAG, DASY8 Module SAR Manual, 2022-08 (Chapter 6.3, DASY8 Uncertainty Budget for Hand-held/Body-worn Devices, Frequency band: 300 MHz - 3 GHz range and 3 GHz - 6 GHz range). All listed error components have v<sub>eff</sub> equal to ∞.




Uncertainty of SAR daily check (2.4 GHz ~ 6 GHz) (*. liquid: head(v6), DAK-3.5, CW) (v11r05)							1g SAR	10g SAR	
Symbol	Error Description	Uncertainty (Unc.)	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g) (Std. Unc.)	ui (10g) (Std. Unc.)	
<b>Measurement System (DASY8)</b>									
CF	Probe Calibration (EX3DV4) (HSL: 10%)	± 14.0 %	Normal	2	1	1	± 7.0 %	± 7.0 %	
CF <sub>drift</sub>	Probe Calibration Drift	± 1.7 %	Rectangular	√3	1	1	± 1.0 %	± 1.0 %	
LIN	Probe Linearity	± 4.7 %	Rectangular	√3	1	1	± 2.7 %	± 2.7 %	
ISO2	Probe Isotropy	± 4.7 %	Rectangular	√3	1	1	± 2.7 %	± 2.7 %	
DAE	Data Acquisition	± 1.2 %	Normal	1	1	1	± 1.2 %	± 1.2 %	
AMB	RF Ambient (noise&refraction) (<12μW/g)	± 1.0 %	Normal	1	1	1	± 1.0 %	± 1.0 %	
Δ <sub>sys</sub>	Probe Positioning	± 0.5 %	Normal	1	0.33	0.33	± 0.2 %	± 0.2 %	
DAT	Data Processing	± 2.3 %	Normal	1	1	1	± 2.3 %	± 2.3 %	
<b>Phantom and Device Error</b>									
LIQ(σ)	Conductivity (measured) (DAK-3.5)	± 5.0 %	Normal	2	0.78	0.71	± 2.0 %	± 1.8 %	
LIQ(Tσ)	Conductivity (temperature) (≤ 2 deg.C.)	± 2.4 %	Rectangular	√3	0.78	0.71	± 1.1 %	± 1.0 %	
EPS	Phantom Permittivity (liquid to antenna: ≥ 5 mm)	± 14.0 %	Rectangular	√3	0.25	0.25	± 2.0 %	± 2.0 %	
VAL	Validation antenna uncertainty	± 5.5 %	Rectangular	√3	1	1	± 3.2 %	± 3.2 %	
Pin	Uncertainty in accepted power	± 2.5 %	Normal	2	1	1	± 1.3 %	± 1.3 %	
DIS	Distance EUT-TSL	± 2.0 %	Normal	1	2	2	± 4.0 %	± 4.0 %	
D <sub>xyz</sub>	Test Sample positioning	± 1.0 %	Normal	1	1	1	± 1.0 %	± 1.0 %	
RF <sub>drift</sub>	Drift of output power (measured, < 0.1 dB)	± 2.3 %	Rectangular	√3	1	1	± 1.3 %	± 1.3 %	
<b>Correction to the SAR results</b>									
C(e,σ)	Deviation to Target (e,σ: ≤ 10 %, IEC head)	± 1.9 %	Normal	1	1	0.84	± 1.9 %	± 1.6 %	
u(ΔSAR)	<b>(SAR daily check: 2.4 GHz-6 GHz) Combined Standard Uncertainty</b>						<b>RSS</b>	<b>± 10.7 %</b>	<b>± 10.7 %</b>
<b>U</b>	<b>(SAR daily check: 2.4 GHz-6 GHz) Expanded Uncertainty</b>						<b>k=2</b>	<b>± 21.4 %</b>	<b>± 21.4 %</b>

\*. This uncertainty budget is suggested by IEC/IEEE 62209-1528 and determined by SPEAG, DASY8 Module SAR Manual, 2022-08 (Chapter 6.2, DASY8 Uncertainty Budget for System Verification, Frequency band: 300 MHz - 6 GHz range). All listed error components have v<sub>eff</sub> equal to ∞.

\*. Table of uncertainties are listed for ISO/IEC 17025.

\*. Although this standard determines only the limit value of uncertainty, there is no applicable rule of uncertainty in this. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

**Appendix 3-4: Calibration certificates**

LIMS ID	Description	Type/Model	Serial Number	Manufacture	Calibration Certificate	Note
146235	Dosimetric E-Field Probe	EX3DV4	3907	SPEAG		-
145090	Dipole Antenna (2.45 GHz)	D2450V2	822	SPEAG		*1
230872	RF Power Source	POWERSORCE1	4300	SPEAG		-

\*1: As stated on page 2 of the certificate, the calibration was performed in accordance with the latest standard IEC/IEEE 62209-1528. Therefore, the reported SAR values are valid for any system that complies with IEC/IEEE 62209-1528 including all new versions of DASY such as DASY6 and DASY8.

**-End of report-**