



# FCC Test Report

Test report no.: EMC\_716FCC15.247\_2004\_510

**FCC Part 15.247 for FHSS systems / CANADA RSS-210**  
**Model: Voyager 510 Series Headset**  
**FCC ID: AL8-510**  
**IC: 457A-510**



**TTI-P-G 081/94-A0**

Accredited according to **ISO/IEC 17025**



**Bluetooth Qualification  
Test Facility  
(BQTF)**



FCC listed # 101450

IC recognized # 3925

## **CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

## Table of Contents

<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>
<b>1.2</b>	<b>Testing laboratory</b>
<b>1.3</b>	<b>Details of applicant</b>
<b>1.4</b>	<b>Application details</b>
<b>1.5</b>	<b>Test item</b>
<b>1.6</b>	<b>Test standards</b>
<b>2</b>	<b>Technical test</b>
<b>2.1</b>	<b>Summary of test results</b>
<b>2.2</b>	<b>Test report</b>
<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

### **TEST REPORT PREPARED BY:**

**EMC Engineer: Harpreet Sidhu**

#### **1.2 Testing laboratory**

**CETECOM Inc.**

**411 Dixon Landing Road, Milpitas, CA-95035, USA**

**Phone: +1 408 586 6200 Fax: +1 408 586 6299**

**E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)**

**Internet: [www.cetecom.com](http://www.cetecom.com)**

### 1.3 Details of applicant

Name : Plantronics, Inc.  
Street : 345 Encinal St.  
City / Zip Code : Santa Cruz / 95060  
Country : USA  
Contact : Edward F. Godstein  
Telephone : +831 458 7573  
Fax : +831 429 5731  
e-mail : [ed.goldstein@plantronics.com](mailto:ed.goldstein@plantronics.com)

### 1.4 Application details

Date of receipt test item : 2004-08-27  
Date of test : 2004-08-27, 2004-09-15/20/22

### 1.5 Test item

Marketing Name : Voyager 510 Series Headset  
Model No. : Voyager 510 Series Headset  
Description : [BT Headset](#)  
HW / SW version : 4 / 1.3  
FCC-ID : AL8-510  
IC ID : 457A-510

#### Additional information

Frequency : 2402MHz – 2480MHz  
Type of modulation : GFSK  
Number of channels : 79  
Antenna : Internal  
Power supply : Plantronics 66278-01, Lithium Ion Polymer Battery (120mAH)  
Output power : 3.7dBm (2.34mW) max. conducted peak power  
Extreme vol. Limits : 3.0 – 4.2VDC (3.7 nominal)  
Extreme temp. Tolerance : 0°C-50°C

**1.6 Test standards: FCC Part 15 §15.247 (DA00-705) / RSS 210**

**Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.**

**2 Technical test****2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests  
Performed

Final Verdict:  
(only "passed" if all single measurements are "passed")

**Passed**

**Technical responsibility for area of testing:**

2005-02-14 EMC & Radio

Lothar Schmidt  
(EMC Manager)



Date

Section

Name

Signature

**Responsible for test report and project leader:**

2005-02-14 EMC & Radio Harpreet Sidhu (EMC Engineer)



Date

Section

Name

Signature

## **2.2 Test report**

**TEST REPORT**

**Test report no.: EMC\_716FCC15.247\_2004\_510**

**TEST REPORT REFERENCE**


<b>LIST OF MEASUREMENTS</b>		<b>PAGE</b>
<b>CARRIER FREQUENCY SEPERATION</b>	§15.247(a)	7
<b>NUMBER OF HOPPING CHANNELS</b>	§15.247(a)	8
<b>TIME OF OCCUPANCY (DWELL TIME)</b>	§15.247(a)	9
<b>SPECTRUM BANDWIDTH OF FHSS SYSTEM</b>	§15.247(a)	12
<b>MAXIMUM PEAK OUTPUT POWER</b>	§ 15.247 (b) (3)	16
<b>BAND EDGE COMPLIANCE</b>	§15.247 (d)	24
<b>EMISSION LIMITATIONS</b>	§15.247 (d)	28
<b>CONDUCTED EMISSIONS</b>	§ 15.107/207	43
<b>RECEIVER SPURIOUS RADIATION</b>	§ 15.209	44
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>		49
<b>BLOCK DIAGRAMS</b>		50

## CARRIER FREQUENCY SEPERATION

§15.247(a)



	Marker 3 [T1]	RBW	30 kHz	RF Att	30 dB
Ref Lvl	0.90 dBm	VBW	100 kHz		
11.4 dBm	2.44200000 GHz	SWT	8.5 ms	Unit	dBm

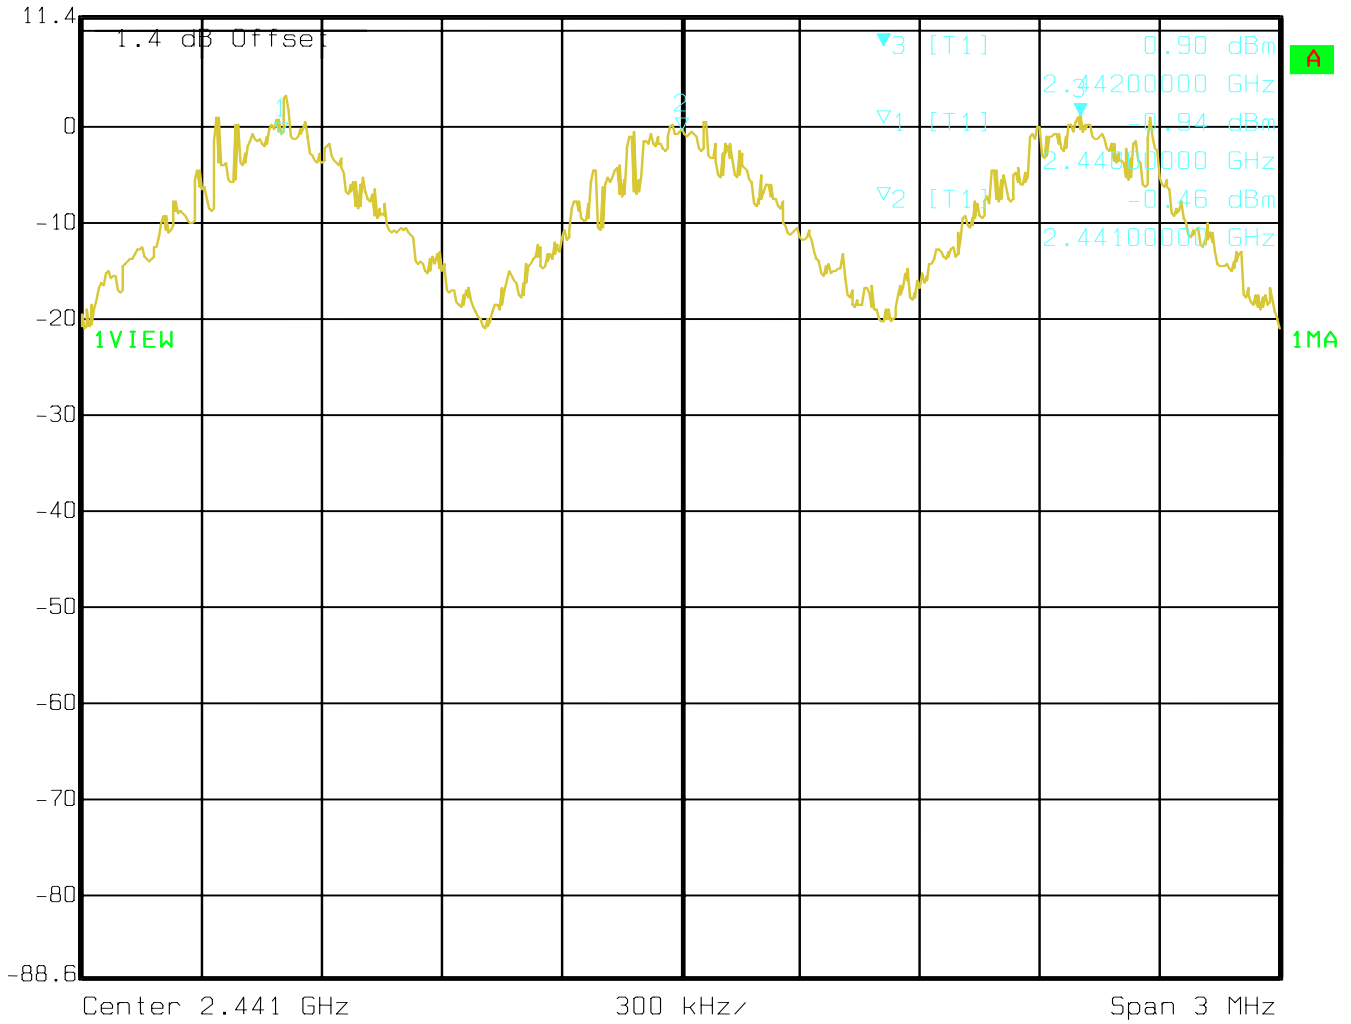

Date: 27.AUG.2004 11:30:40

**NUMBER OF HOPPING CHANNELS**


**§15.247(a)**

**The number of hopping channels is 79**



Ref Lvl  
11.4 dBm

RBW 100 kHz RF Att 30 dB  
VBW 1 MHz  
SWT 21.5 ms Unit dBm

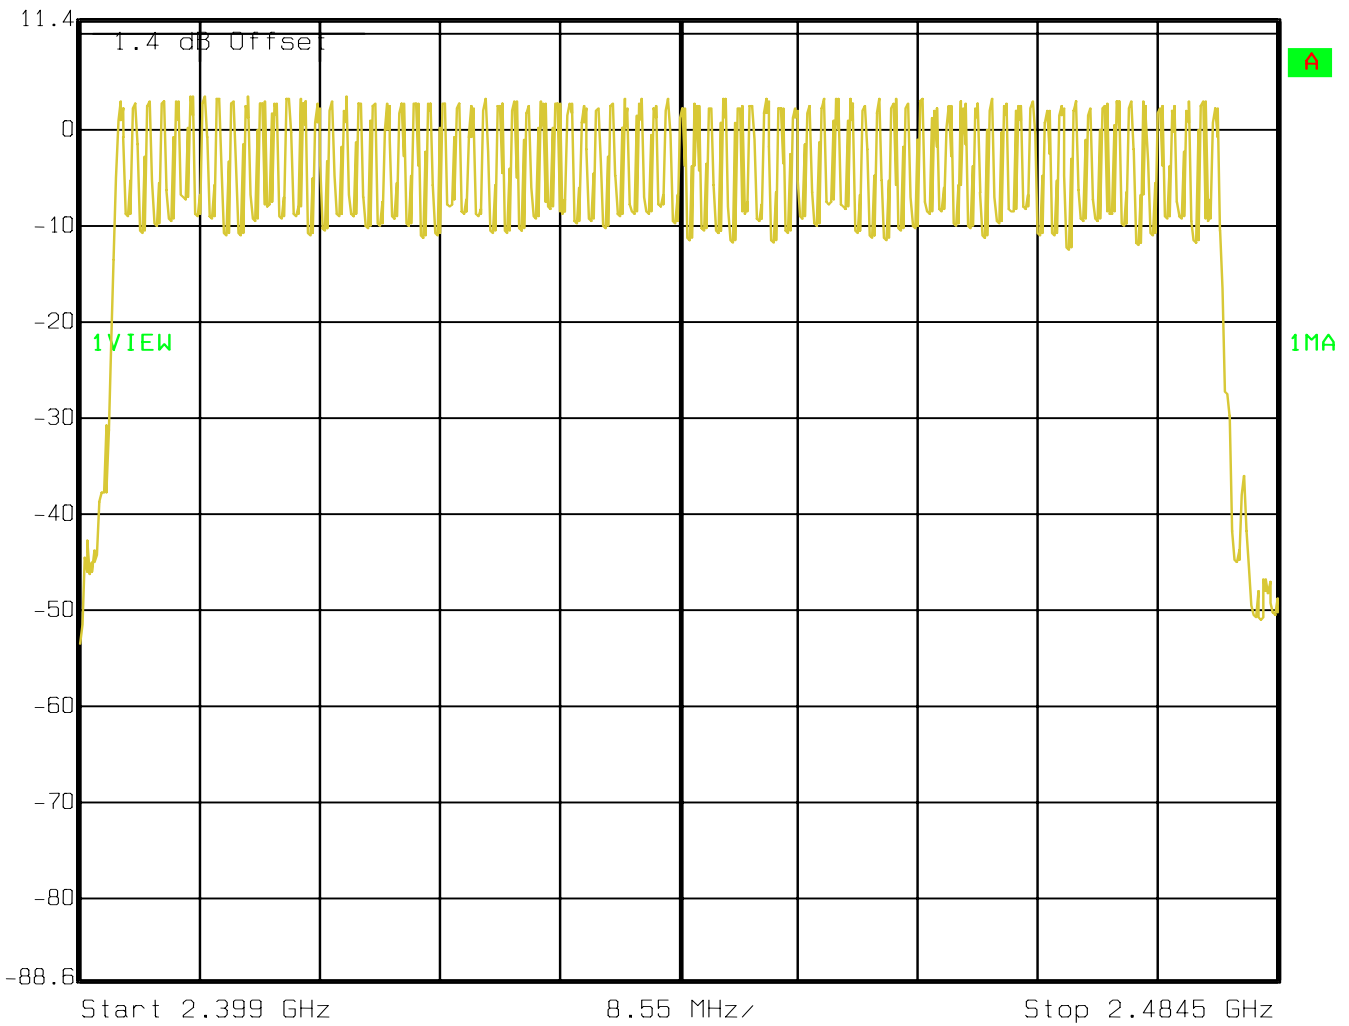

Date: 27.AUG.2004 11:42:50




**TIME OF OCCUPANCY (DWELL TIME)**  
**DH1 – Packet**

§15.247(a)

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and so for 31.6 seconds you have 320.108 times of appearance.

Each Tx-time per appearance is 410.82µs.

So we have 320.108 \* 410.82µs = 131.50ms per 31.6 seconds.

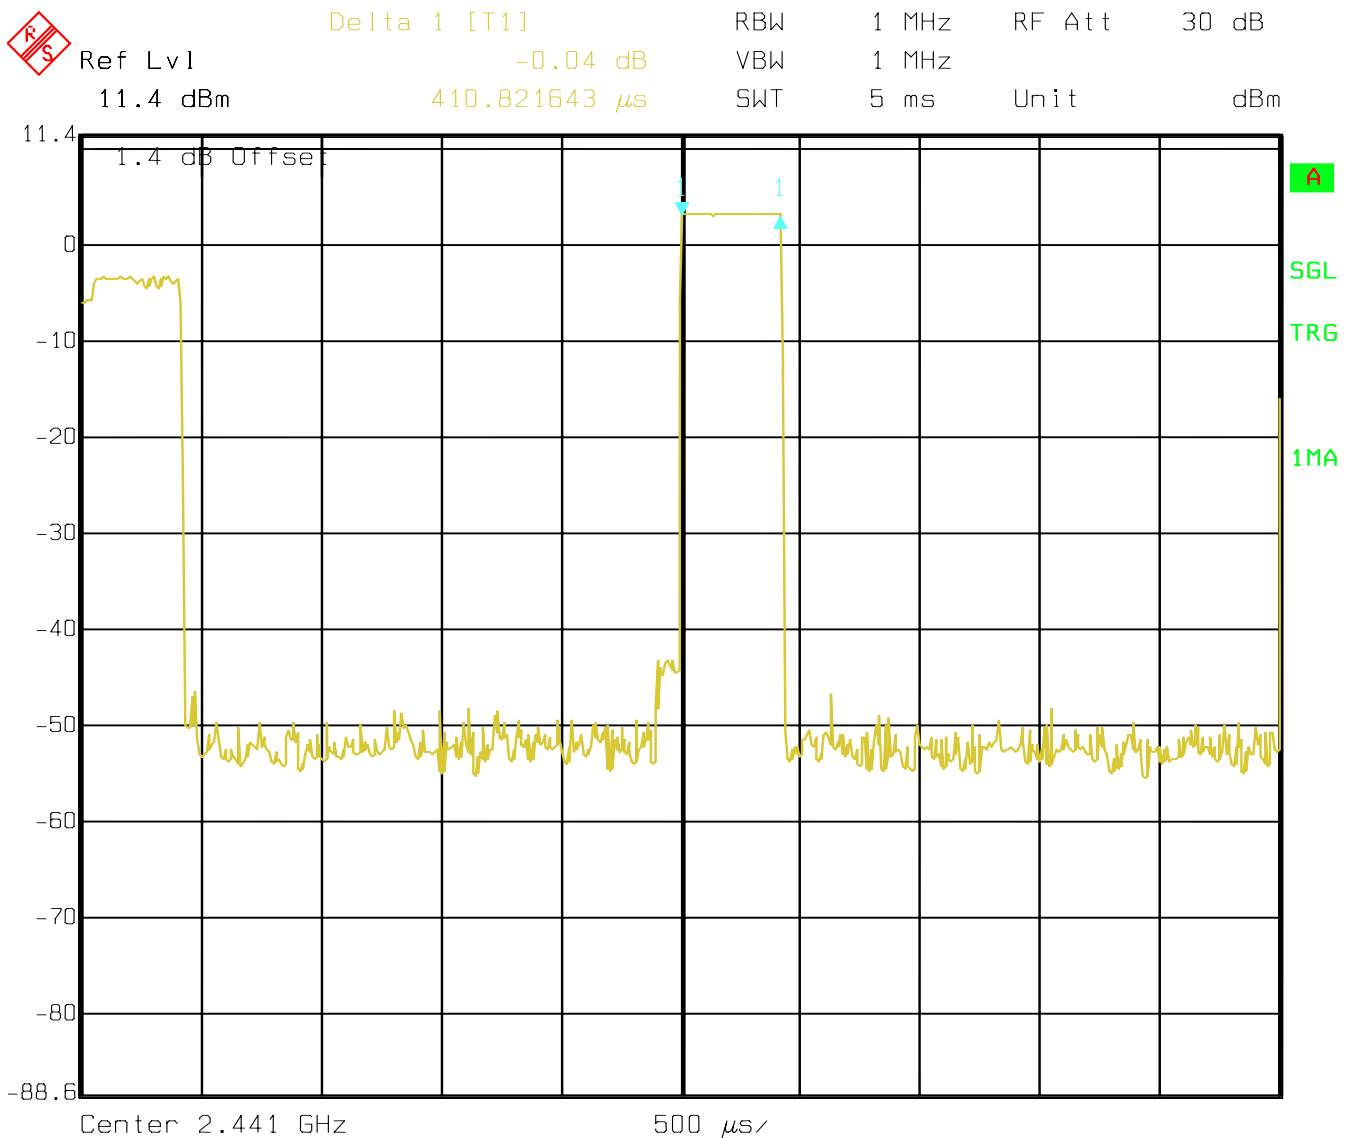

## TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

### DH3 – Packet

**A DH3 Packets need 3 time slots for transmit and 1 for receiving, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 31.6 seconds you have 161.16 times of appearance.**

**Each Tx-time per appearance is 1.62ms.**

**So we have 161.16 \* 1.62ms = 261.07ms per 31.6 seconds.**

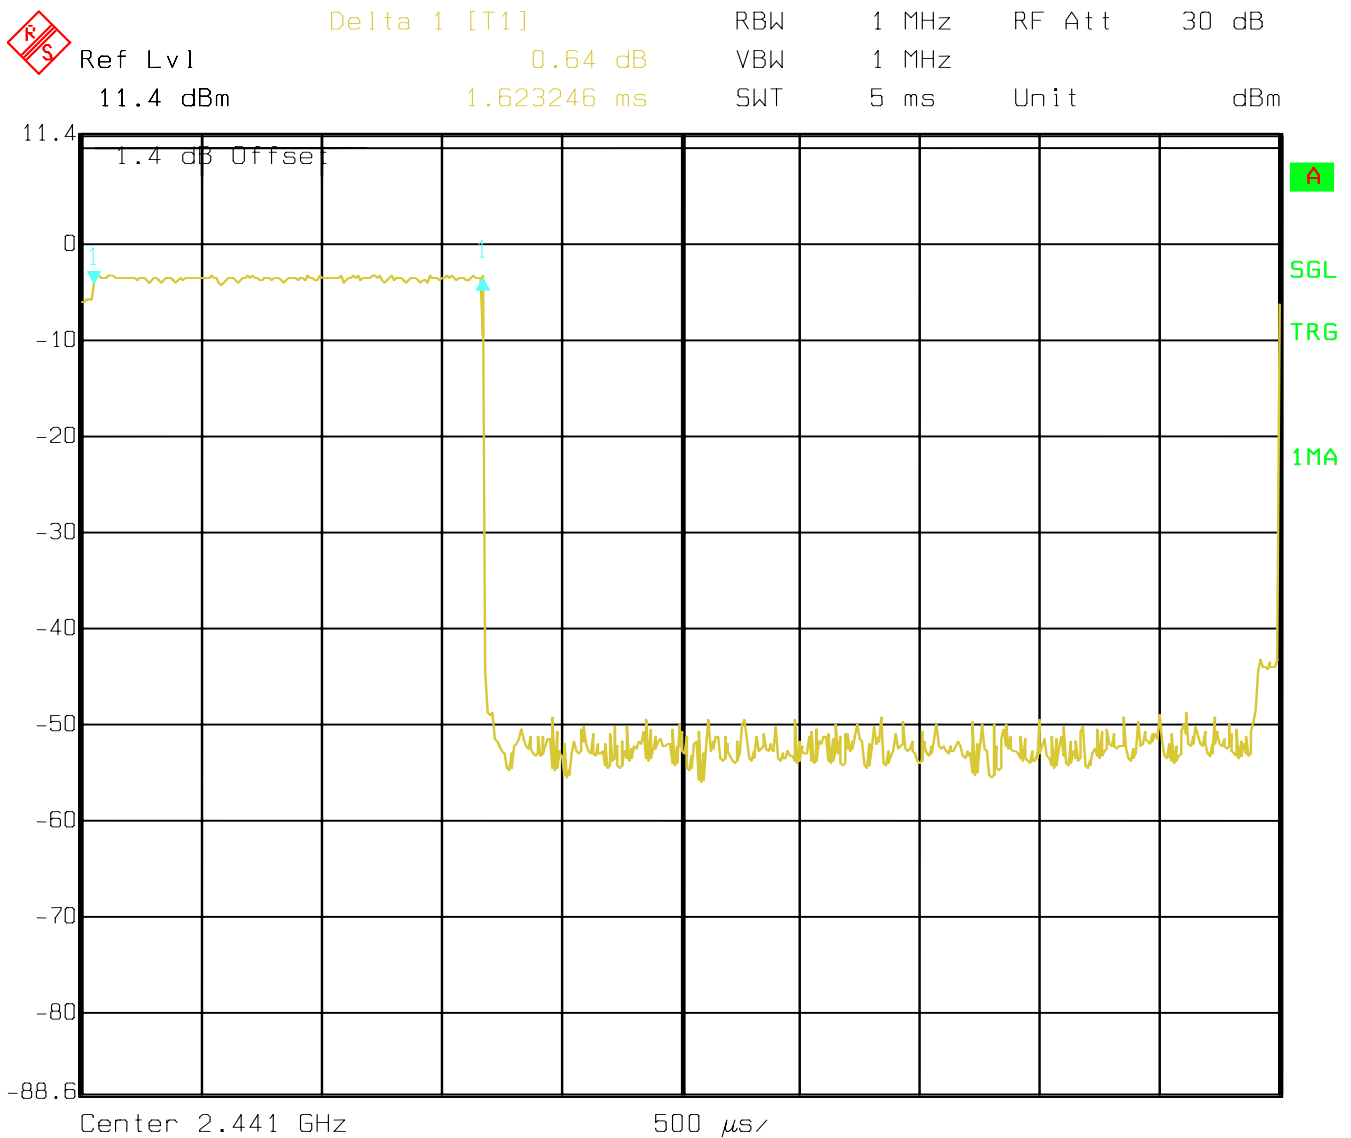

Date: 27.AUG.2004 11:38:16

## TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

### DH5 – Packet

At DH5 Packets you need 5 time slots for transmit and 1 for receiving, then the system makes worst case 266,7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 106.176 times of appearance.

Each Tx-time per appearance is 2.87ms.

So we have  $106.176 * 2.87\text{ms} = 304.72\text{ms}$  per 31.6 seconds.

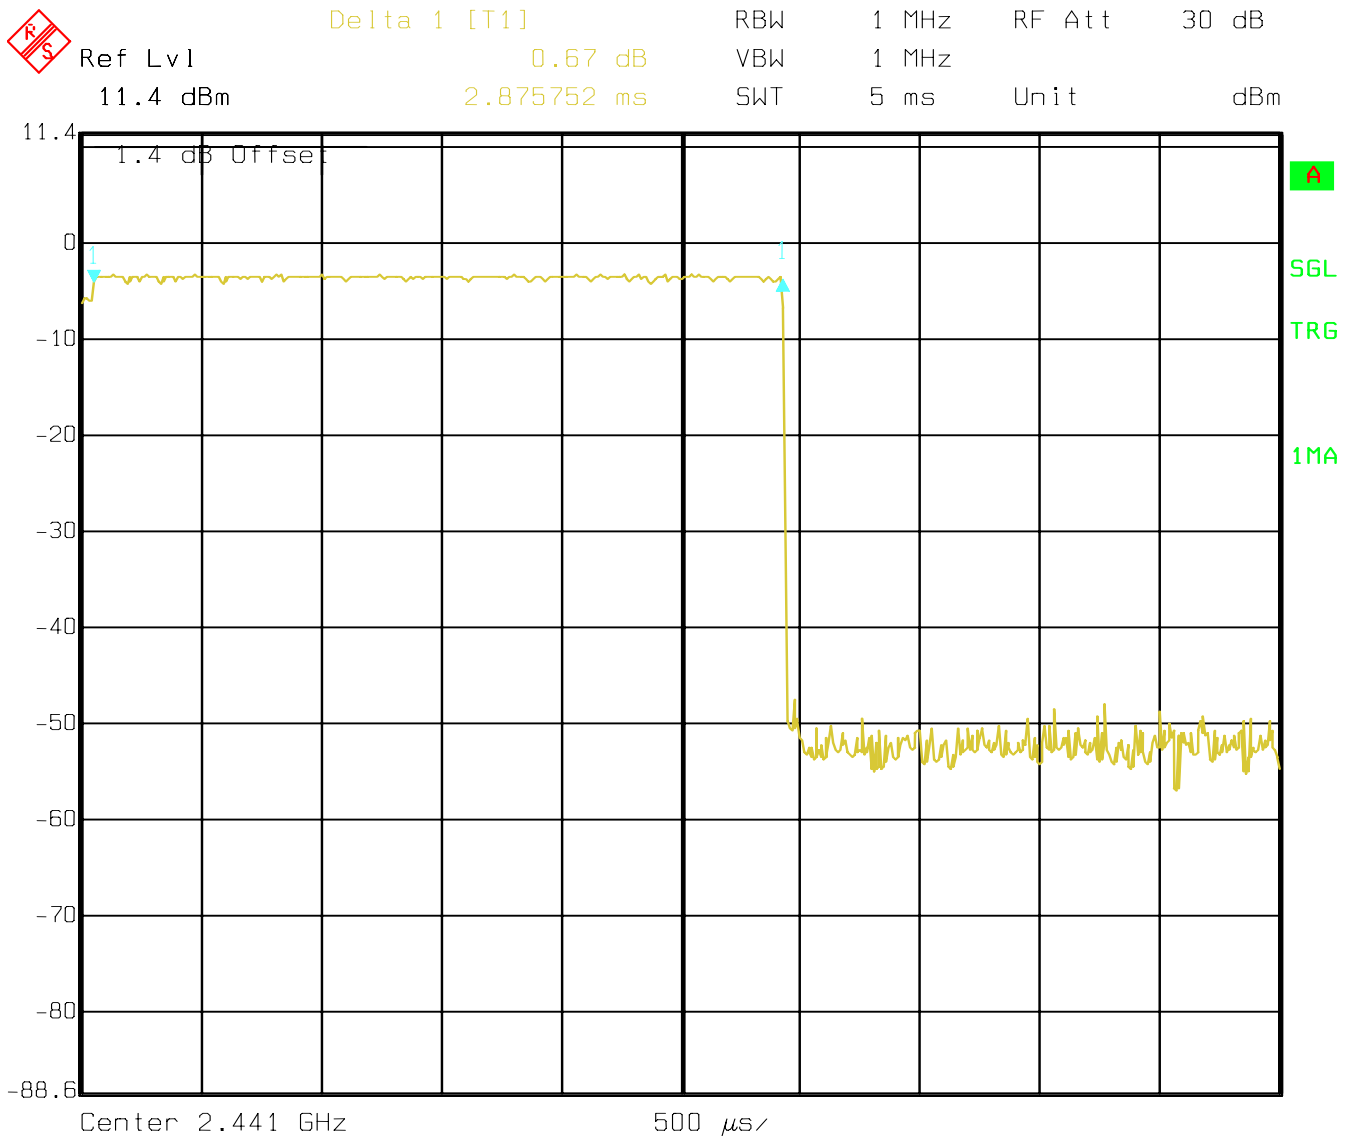

**SPECTRUM BANDWIDTH OF FHSS SYSTEM**  
**20 dB bandwidth**

§15.247(a)

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
Frequency (MHz)		2402	2441	2480
$T_{nom}(23)^{\circ}C$	$V_{nom}$	877.75	877.75	877.75

RBW / VBW as provided in the "Measurement Guidelines" (DA 00-705, March 30, 2000)

**LIMIT****SUBCLAUSE §15.247(a) (1)**

The maximum 20dB bandwidth shall be at maximum 1000 KHz

**SPECTRUM BANDWIDTH OF FHSS SYSTEM**  
**20 dB bandwidth**

§15.247(a)

**Lowest Channel: 2402MHz**



Delta 1 [T1]

RBW 10 kHz RF Att 30 dB

Ref Lvl 11.4 dBm

1.52 dB

VBW 10 kHz

11.4 dBm


877.75551102 kHz

SWT

50 ms

Unit

dBm

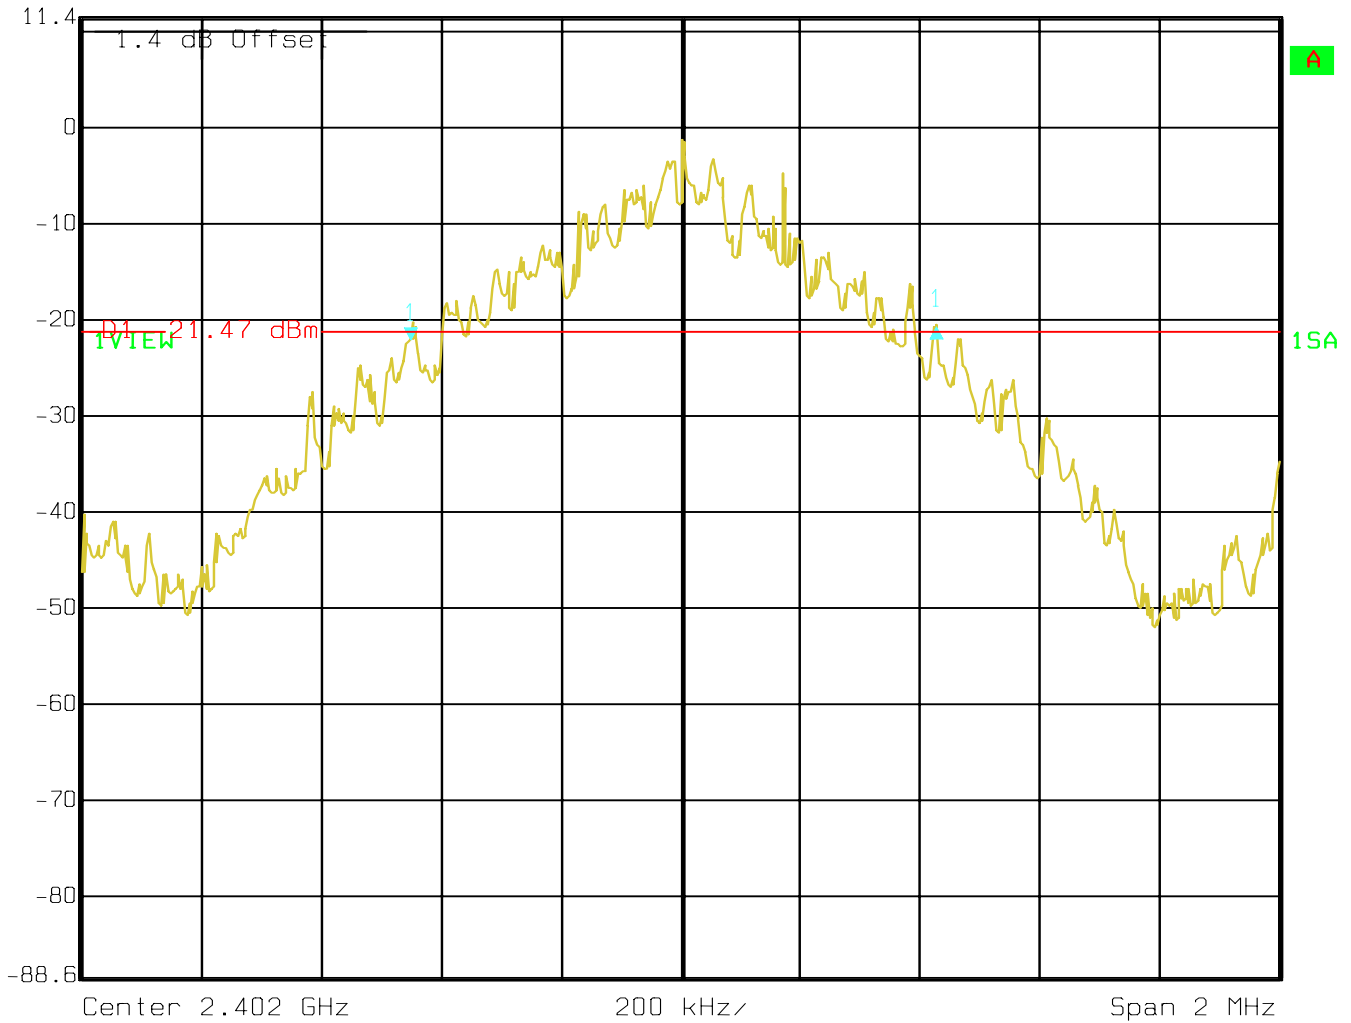


Date: 27.AUG.2004 11:04:34



## SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)

Highest Channel: 2480MHz

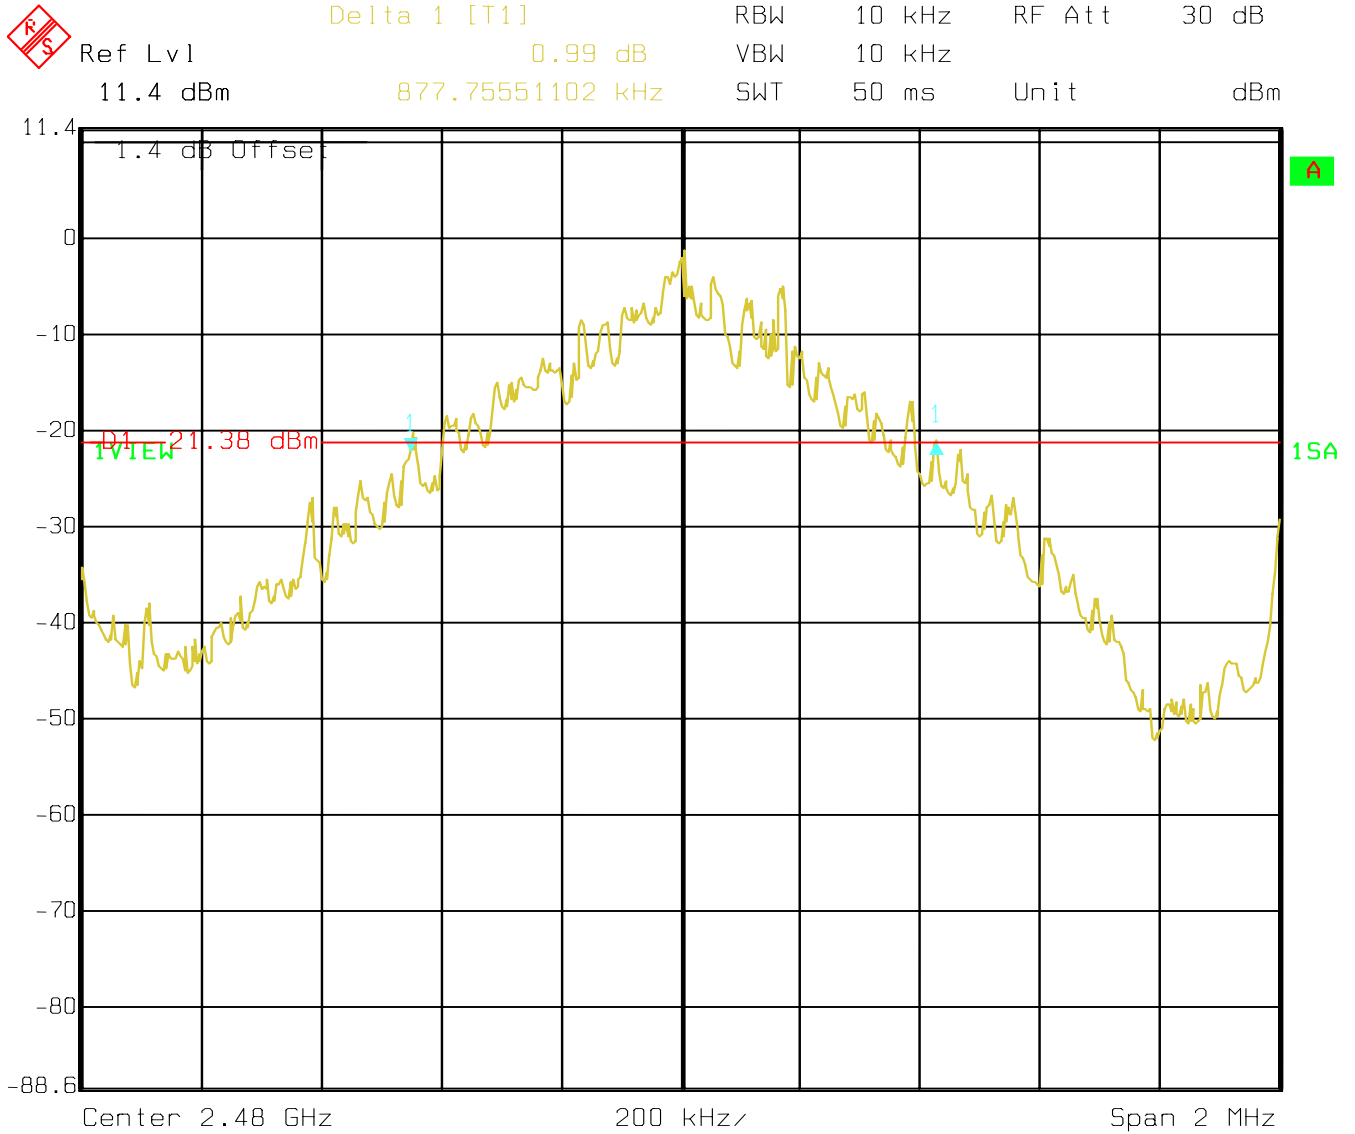

Date: 27.AUG.2004 11:03:19

**MAXIMUM PEAK OUTPUT POWER  
(Conducted)**

§ 15.247 (b) (3)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T <sub>nom</sub> (23)°C	V <sub>nom</sub>	3.70	3.24	3.11
Measurement uncertainty		±0.5dBm		

RBW / VBW: 3 MHz

**LIMIT**

SUBCLAUSE § 15.247 (b) (3)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt




## PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b) (3)

Lowest Channel: 2402MHz



	Marker 1 [T1]	RBW	3 MHz	RF Att	30 dB
Ref Lvl	3.70 dBm	VBW	3 MHz		
21.4 dBm	2.40170942 GHz	SWT	5 ms	Unit	dBm

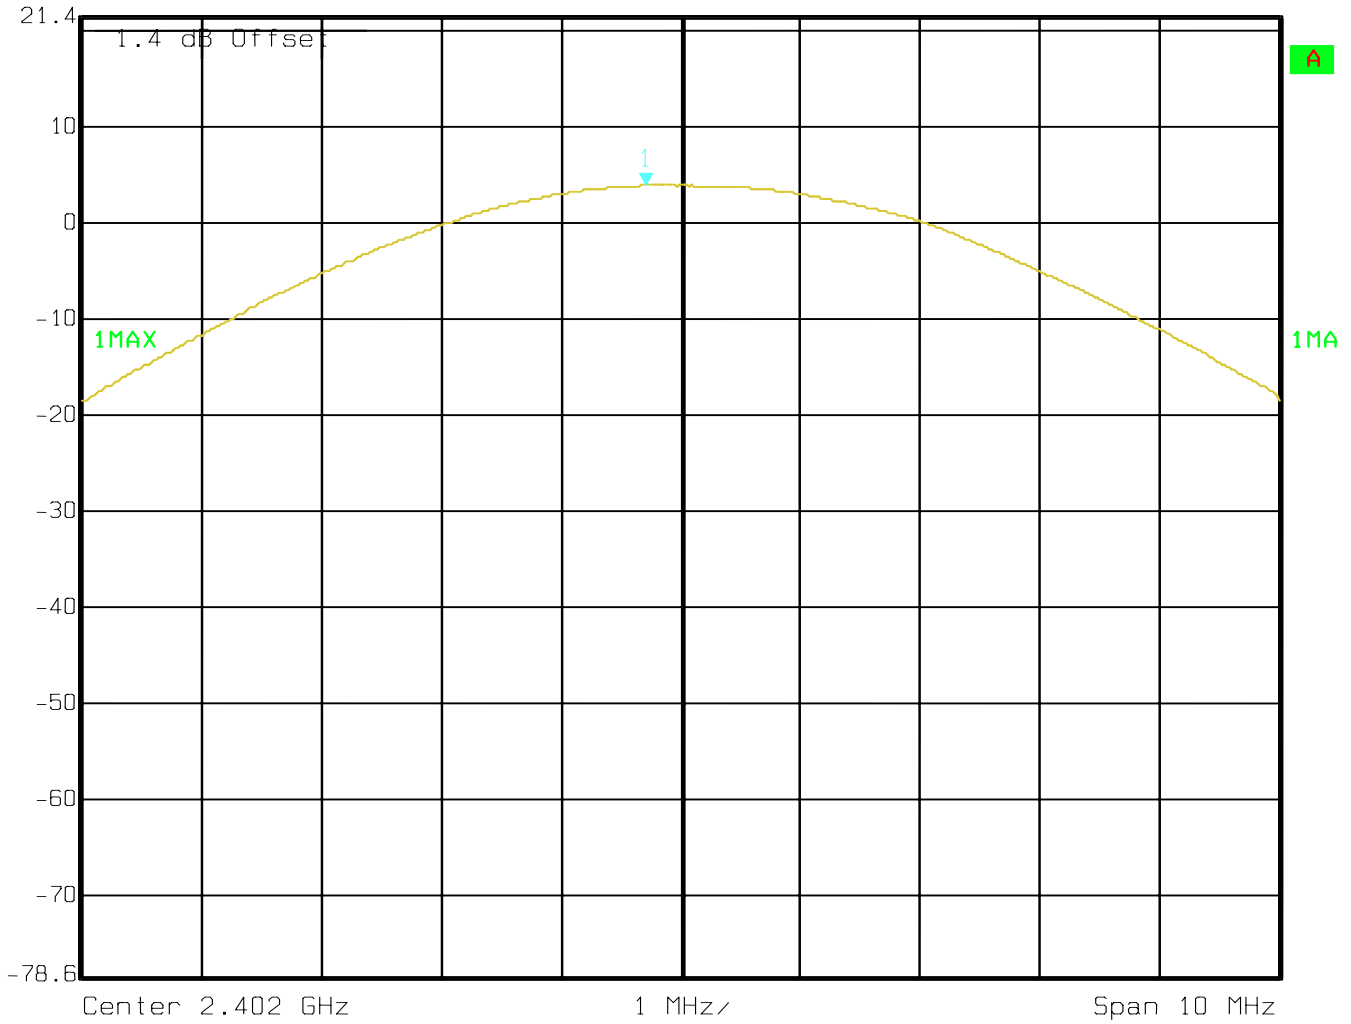

Date: 27.AUG.2004 10:44:30


## PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b) (3)

Mid Channel: 2441MHz



	Marker 1 [T1]	RBW	3 MHz	RF Att	30 dB
Ref Lvl	3.24 dBm	VBW	3 MHz		
21.4 dBm	2.44066934 GHz	SWT	5 ms	Unit	dBm

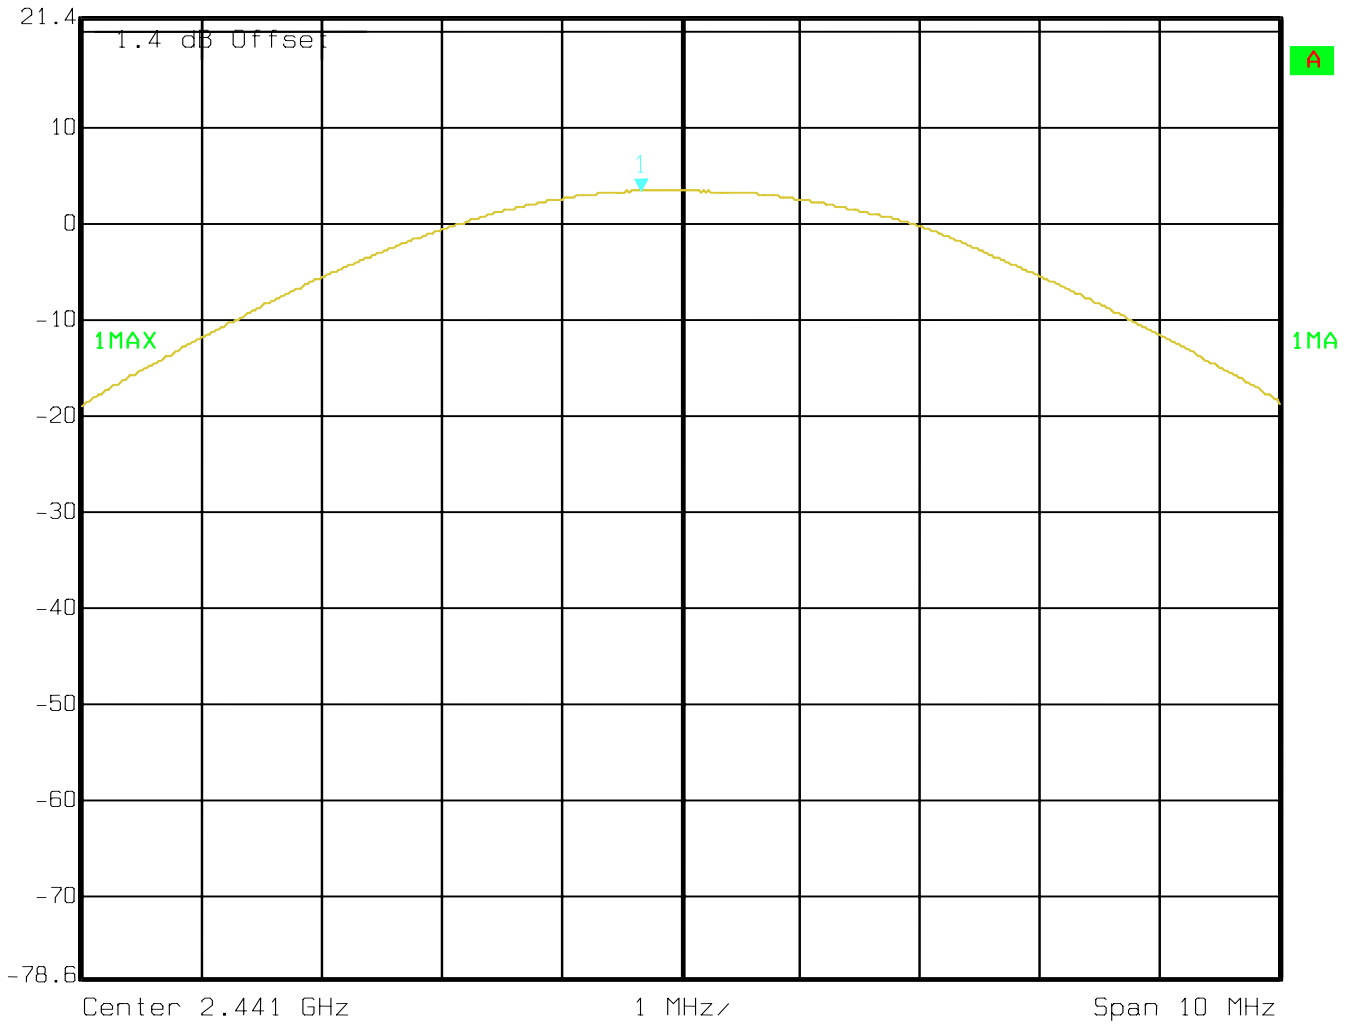

Date: 27.AUG.2004 10:43:47

**PEAK OUTPUT POWER (CONDUCTED)**

§15.247 (b) (3)

**Highest Channel: 2480MHz**



Marker 1 [T1]


RBW 3 MHz RF Att 30 dB

Ref Lvl 3.11 dBm

VBW 3 MHz

21.4 dBm 2.47976954 GHz

SWT 5 ms Unit dBm

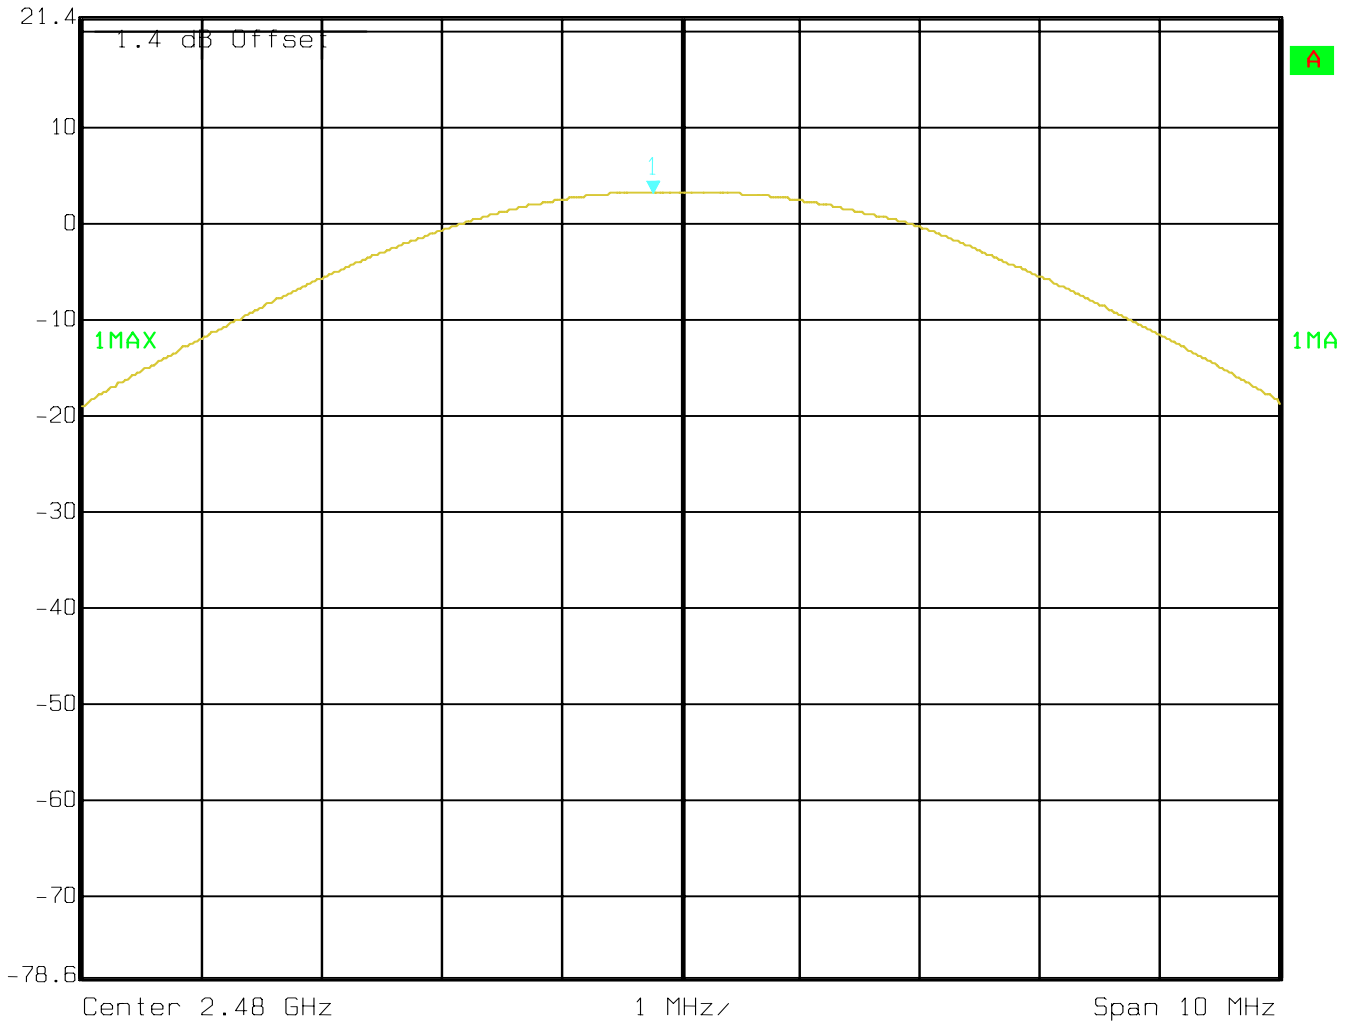

Date: 27.AUG.2004 10:45:15

**MAXIMUM PEAK OUTPUT POWER  
(RADIATED)**

§15.247 (b) (3)

**EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
		2402	2441	2480
Frequency (MHz)				
$T_{nom}$ (23)°C	$V_{nom}$	2.34	2.29	0.80
Measurement uncertainty		±0.5dBm		

RBW/VBW: 3 MHz

**LIMIT**

SUBCLAUSE §15.247 (b) (3)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt


**PEAK OUTPUT POWER (RADIATED)**

**§15.247 (b) (3)**

**Lowest Channel: 2402MHz**

SWEEP TABLE: "EIRP BT low channel"


Short Description:		EIRP Bluetooth channel-2402MHz		
Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.397GHz	2.407GHz	MaxPeak	Coupled	3 MHz

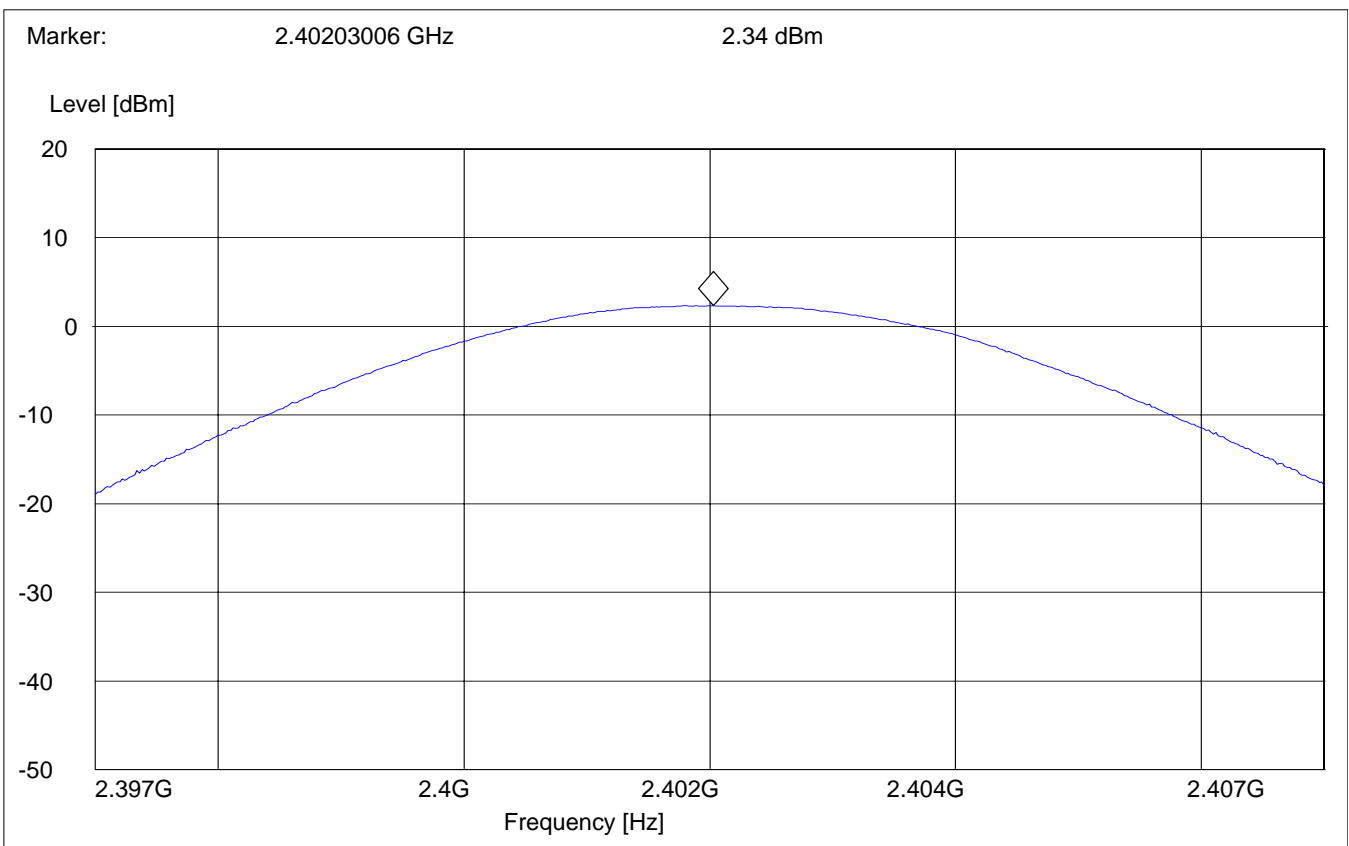

**PEAK OUTPUT POWER (RADIATED)****§15.247 (b) (3)****Mid Channel: 2441MHz**

SWEEP TABLE: "EIRP BT Mid channel"

Short Description:		EIRP Bluetooth channel-2441MHz		
Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.436GHz	2.446GHz	MaxPeak	Coupled	3 MHz

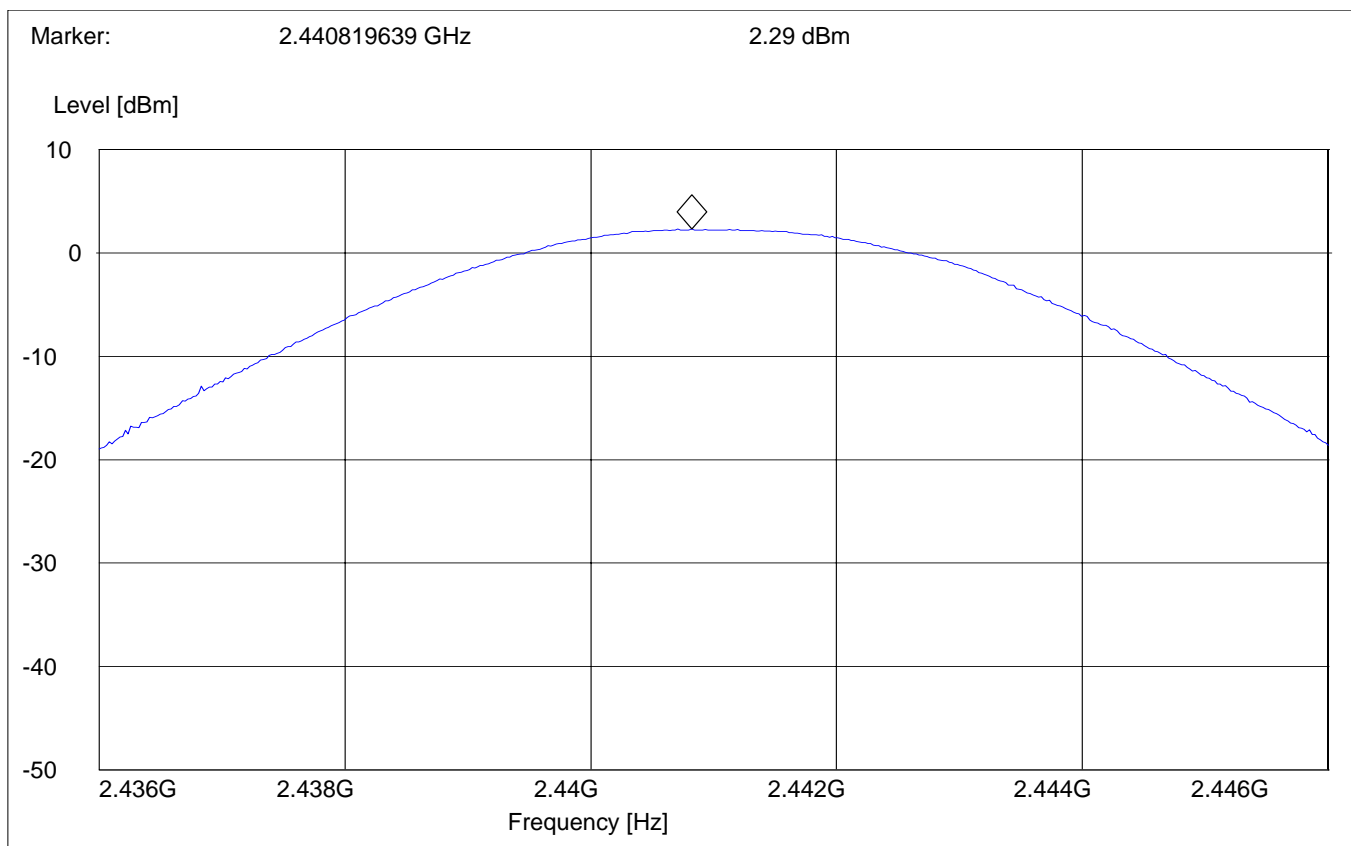


**PEAK OUTPUT POWER (RADIATED)****§15.247 (b) (3)****Highest Channel: 2480MHz**

SWEEP TABLE: "EIRP BT High channel"

Short Description: EIRP Bluetooth channel-2480MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.475GHz	2.485GHz	MaxPeak	Coupled	3 MHz

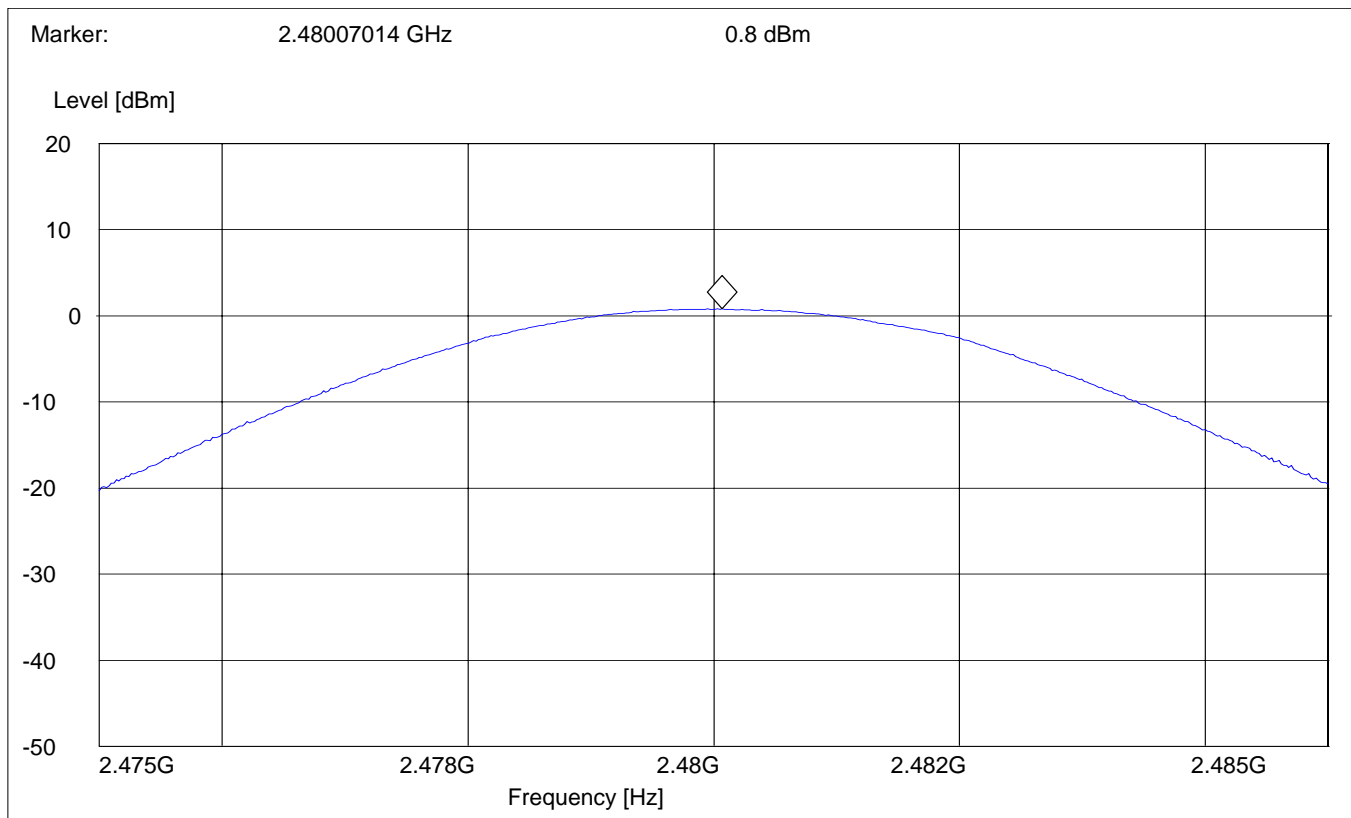

**BAND EDGE COMPLIANCE**

§15.247 (d)


**Low frequency section (spurious in the restricted band 2310 – 2390 MHz)**

**Average Measurement**

**(This plot is valid for both Hopping ON & OFF)**

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_AVG"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 54dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

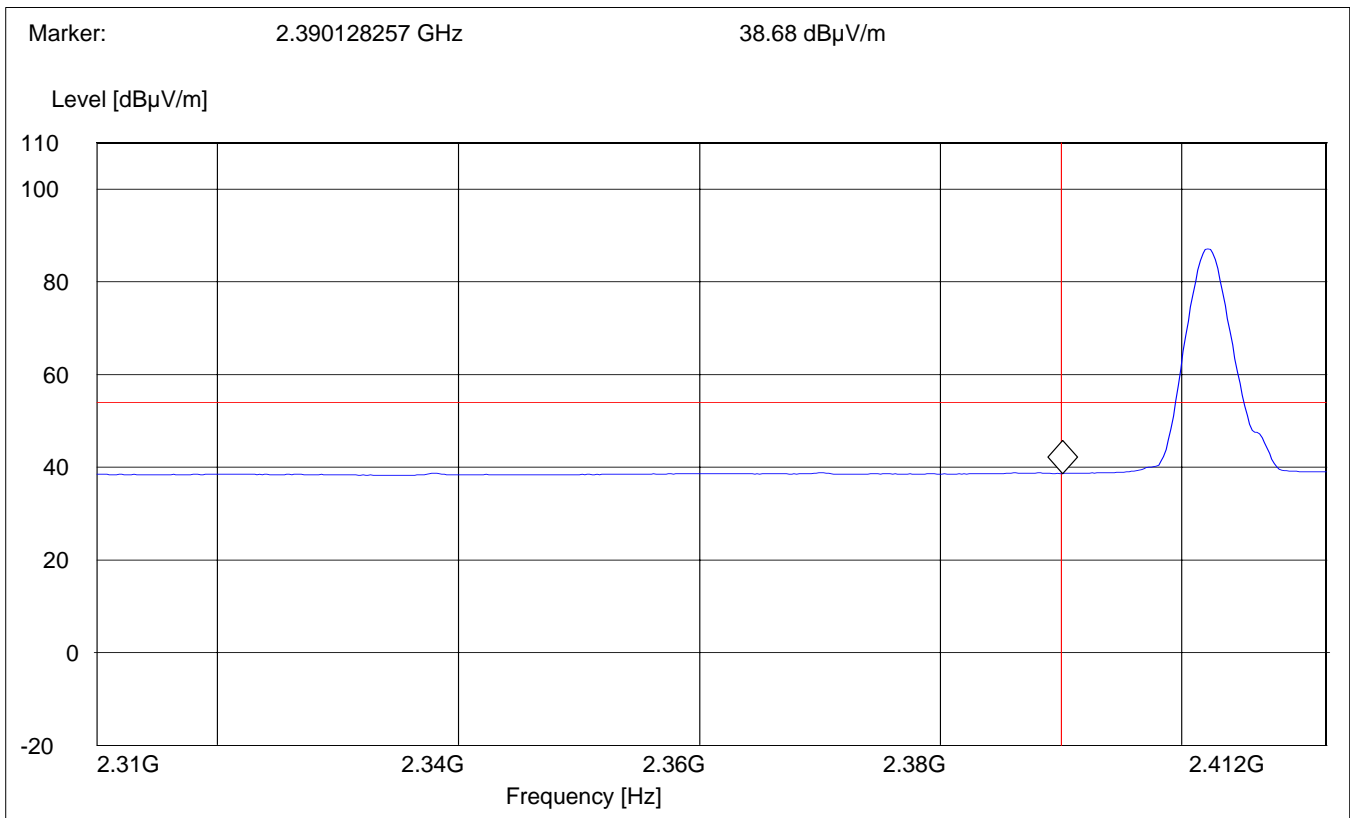



**BAND EDGE COMPLIANCE**

§15.247 (d)


**Low frequency section (spurious in the restricted band 2310 – 2390 MHz)**

**Peak Measurement**

**(This plot is valid for both Hopping ON & OFF)**

Operating condition : Tx at 2402MHz  
 SWEEP TABLE : "FCC15.247 LBE\_Pk"  
 Short Description : FCC15.247 BT Low-band-edge  
 Limit Line : 74dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

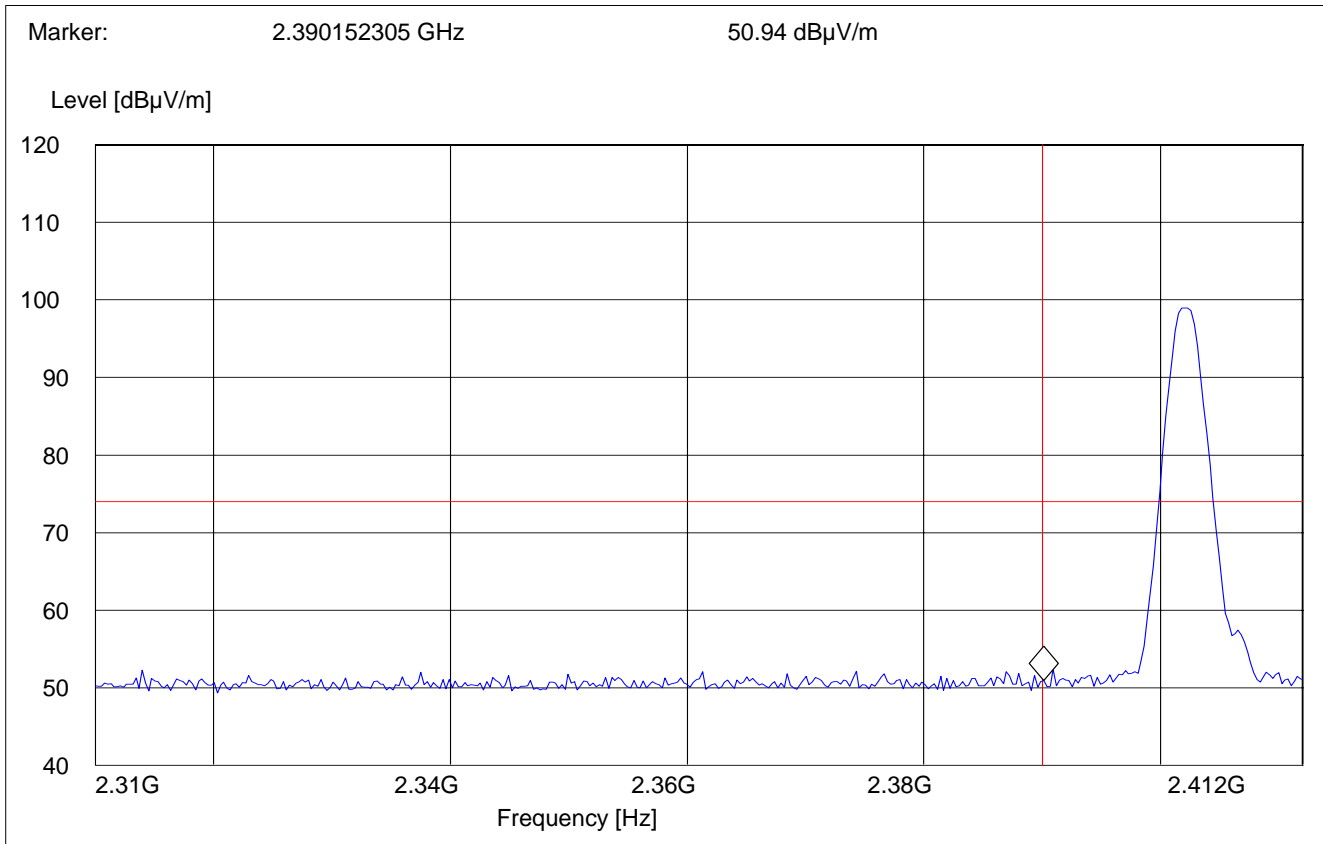

**BAND EDGE COMPLIANCE**

§15.247 (d)


**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)**

**Average Measurement**

**(This plot is valid for both Hopping ON & OFF)**

Operating condition : Tx at 2480MHz  
 SWEEP TABLE : "FCC15.247 HBE\_AVG"  
 Short Description : FCC15.247 BT High-band-edge  
 Limit Line : 54dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

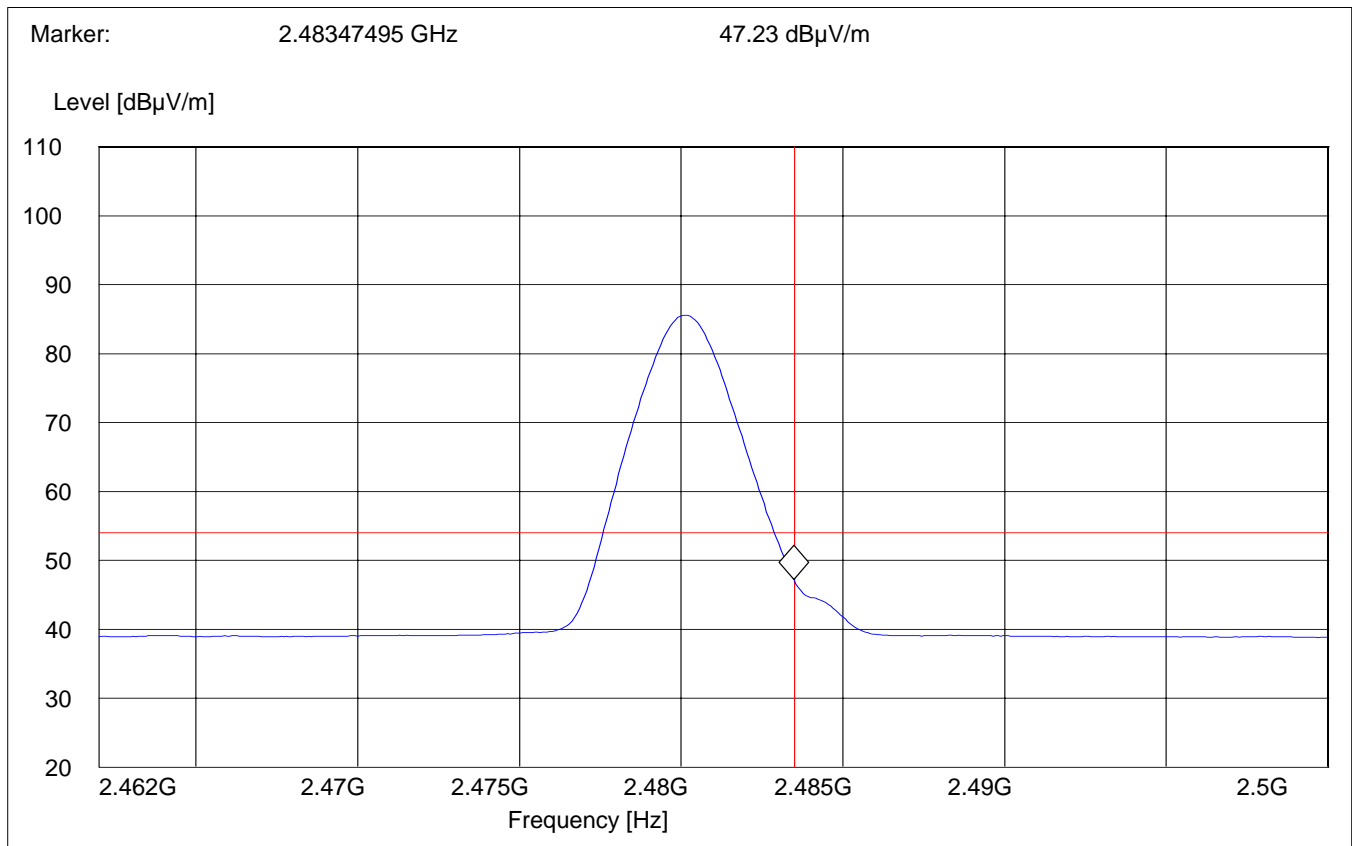


**BAND EDGE COMPLIANCE**

§15.247 (d)

**High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)****Peak Measurement****(This plot is valid for both Hopping ON & OFF)**

Operating condition : Tx at 2480MHz  
SWEEP TABLE : "FCC15.247 HBE\_PK"  
Short Description : FCC15.247 BT High-band-edge  
Limit Line : 74dB $\mu$ V

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

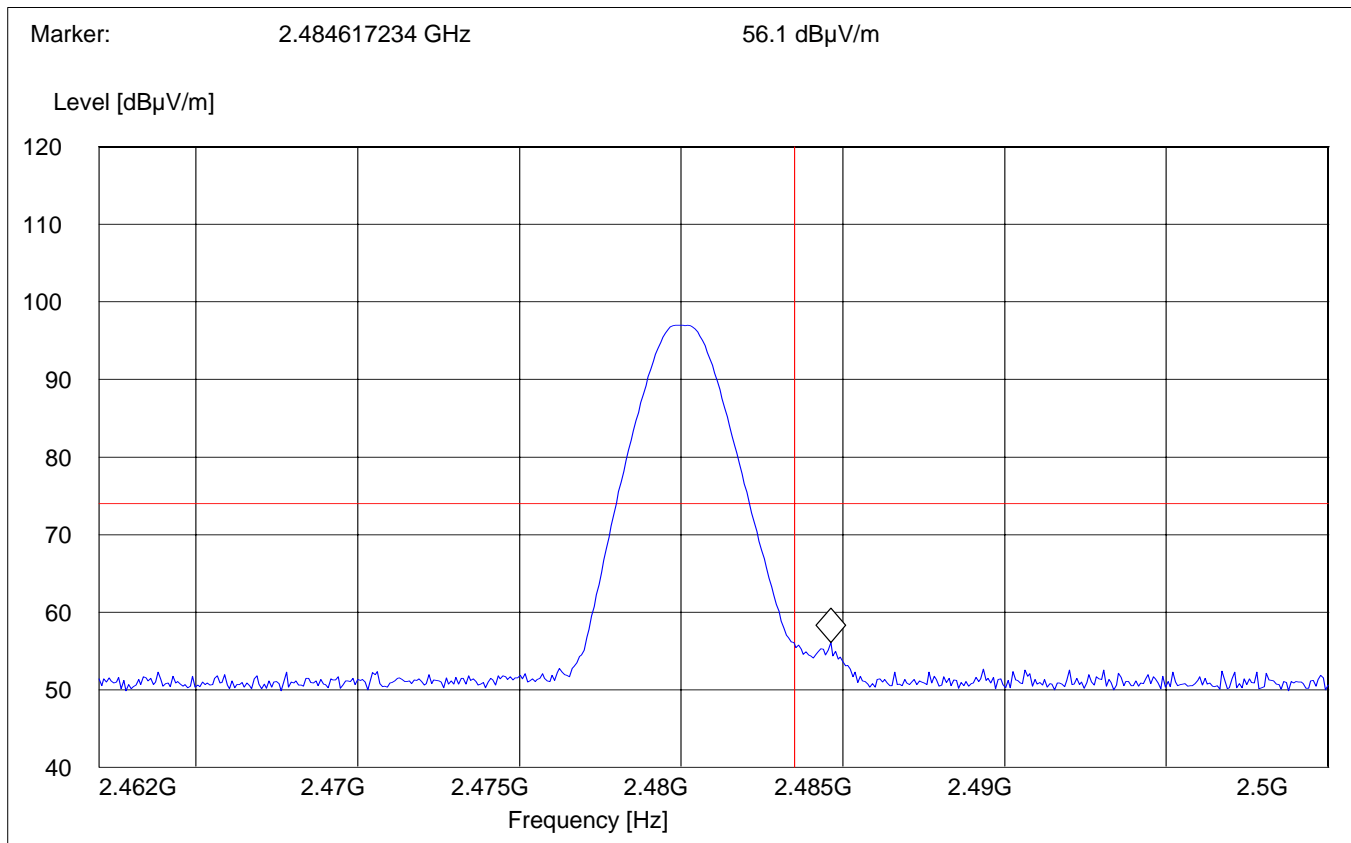

**EMISSION LIMITATIONS  
Transmitter (Conducted)  
LIMITS****§15.247 (d)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions that fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**NOTE:** Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.




**EMISSION LIMITATIONS - Conducted (Transmitter)**

**§15.247 (d)**

**Mid Channel (2441MHz): 30MHz - 25GHz**



Ref Lvl 11.4 dBm  
Marker 1 [T1] 2.36 dBm  
2.44100000 GHz  
RBW 100 kHz RF Att 30 dB  
VBW 100 kHz  
SWT 6.4 s Unit dBm

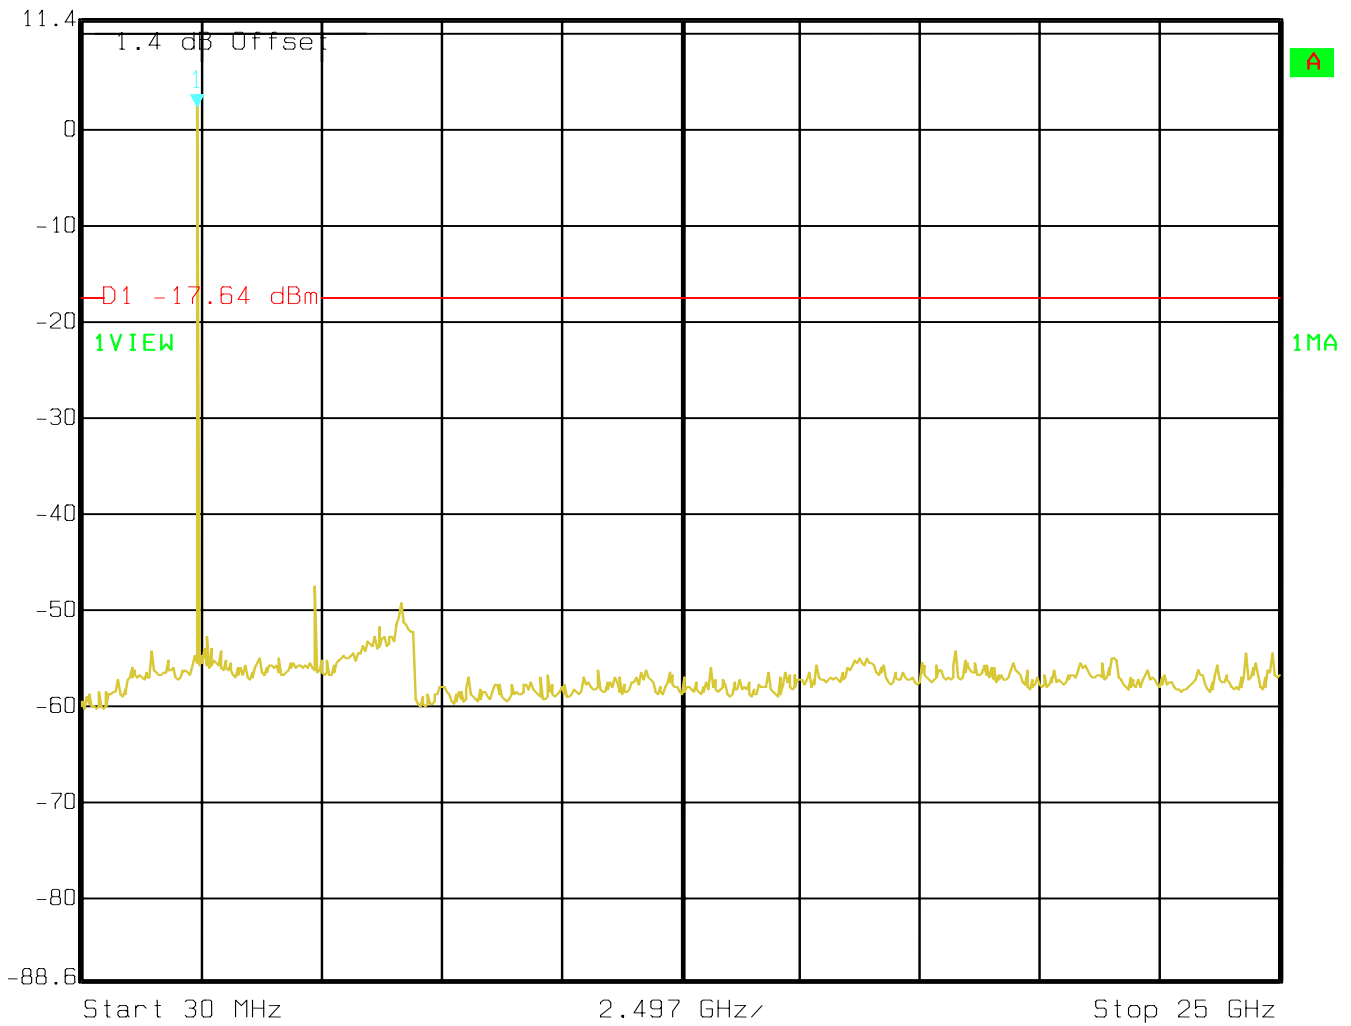


Date: 27.AUG.2004 11:10:08

## EMISSION LIMITATIONS - Conducted (Transmitter)

§15.247 (d)

Highest Channel (2480MHz): 30MHz - 25GHz

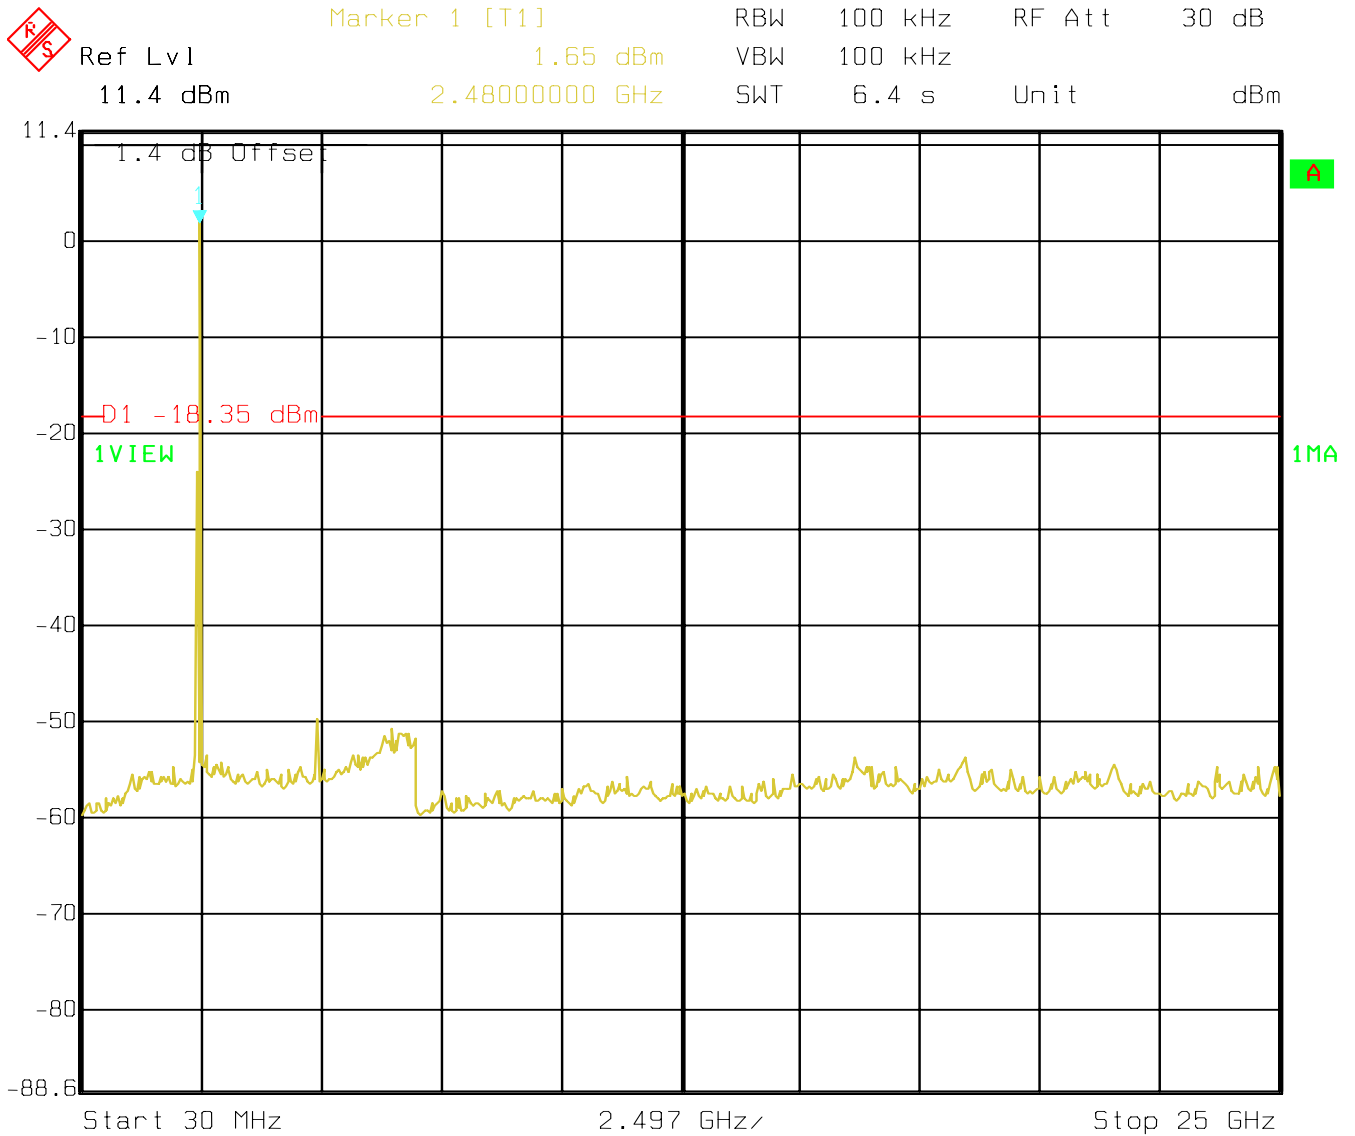

Date: 27.AUG.2004 11:11:27

**EMISSION LIMITATIONS**  
**Transmitter (Radiated)**

§15.247 (d)

**LIMITS**

**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions that fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.
3. All measurements are done in peak mode unless specified with plots.

**Results for the radiated measurements below 30MHz according § 15.33**

<b>Frequency</b>	<b>Measured values</b>	<b>Remarks</b>
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels



**EMISSION LIMITATIONS - Radiated (Transmitter)**

§15.247 (d)

**Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.**

<b>Transmit at Lowest channel Frequency 2402MHz</b>			
<b>Frequency (MHz)</b>	<b>Level (dB<math>\mu</math>V/m)</b>		
	<b>Peak</b>	<b>Quasi-Peak</b>	<b>Average</b>
4803.6	64.49		41.5
6919.23	47.89		

<b>Transmit at Middle channel Frequency 2441MHz</b>			
<b>Frequency (MHz)</b>	<b>Level (dB<math>\mu</math>V/m)</b>		
	<b>Peak</b>	<b>Quasi-Peak</b>	<b>Average</b>
4883.7	62.76		38.98
7302.6	43.01		
9755.5	48.01		

<b>Transmit at Highest channel Frequency 2480MHz</b>			
<b>Frequency (MHz)</b>	<b>Level (dB<math>\mu</math>V/m)</b>		
	<b>Peak</b>	<b>Quasi-Peak</b>	<b>Average</b>
4951.9	59.74		36.44
9925.85	46.77		

**EMISSION LIMITATIONS - Radiated (Transmitter)**


**§15.247 (d)**

**30MHz – 1GHz**

**Antenna: vertical**


**Note: This plot is valid for low, mid & high channels (worst-case plot)**

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

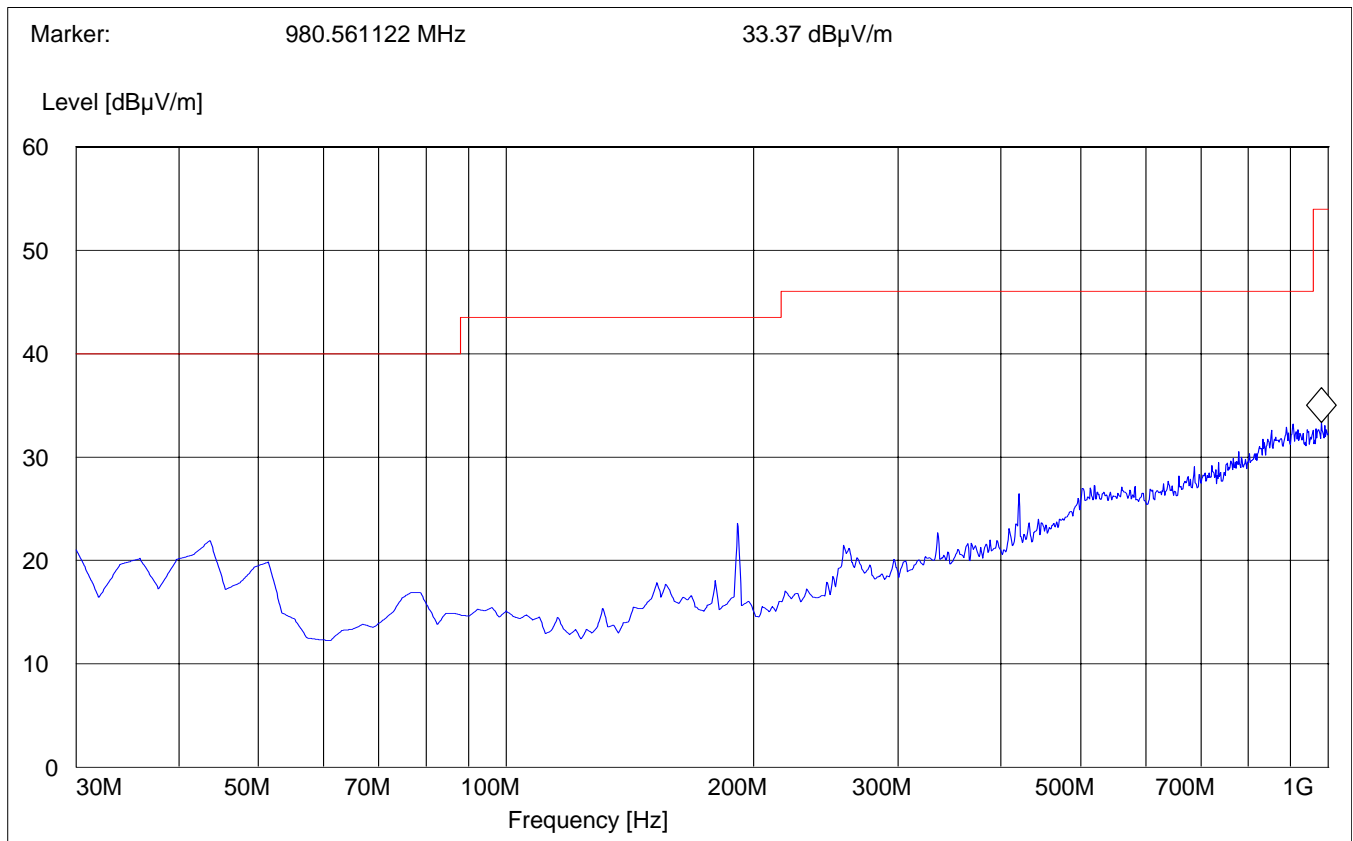

**EMISSION LIMITATIONS - Radiated (Transmitter)****§15.247 (d)****30MHz – 1GHz****Antenna: horizontal****Note: This plot is valid for low, mid & high channels (worst-case plot)**

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

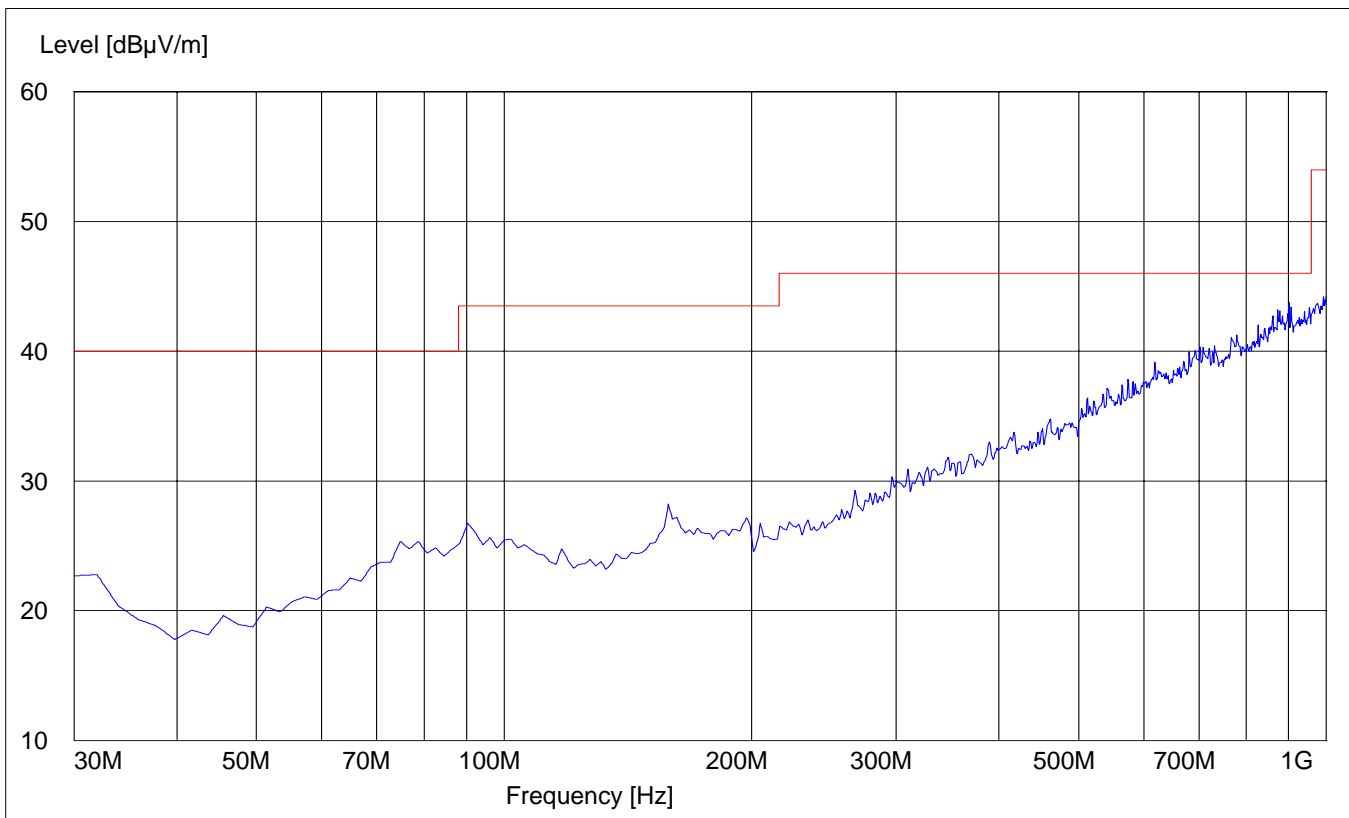


## EMISSION LIMITATIONS - Radiated (Transmitter) Lowest Channel (2402MHz): 1GHz – 3GHz

§15.247 (d)

**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

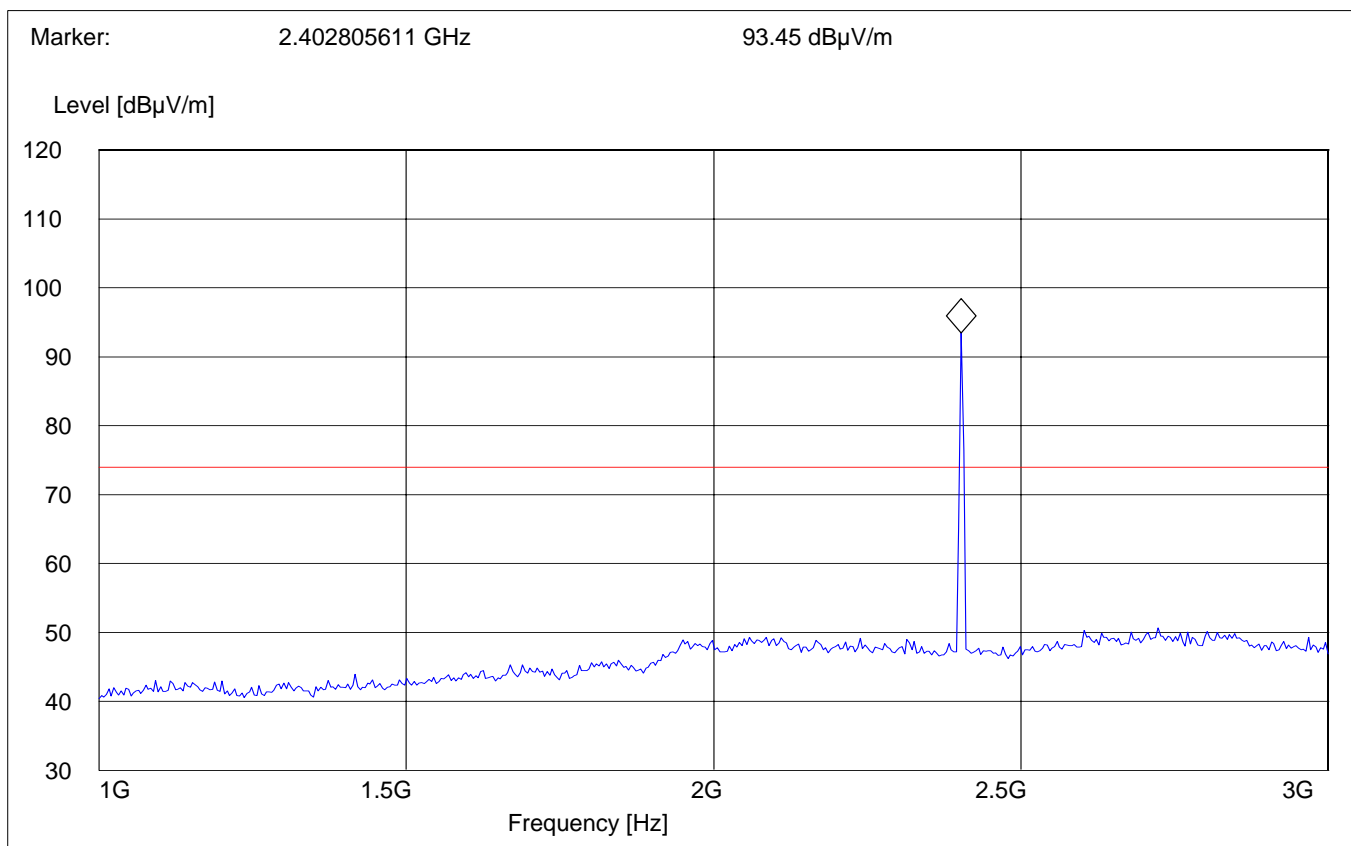


**EMISSION LIMITATIONS - Radiated (Transmitter)**

§15.247 (d)

**Lowest Channel (2402MHz): 3GHz – 18GHz**


**Average**

SWEEP TABLE:		"BT Spuri hi 3-18G"				
Short Description:		Bluetooth Spurious 3-18 GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

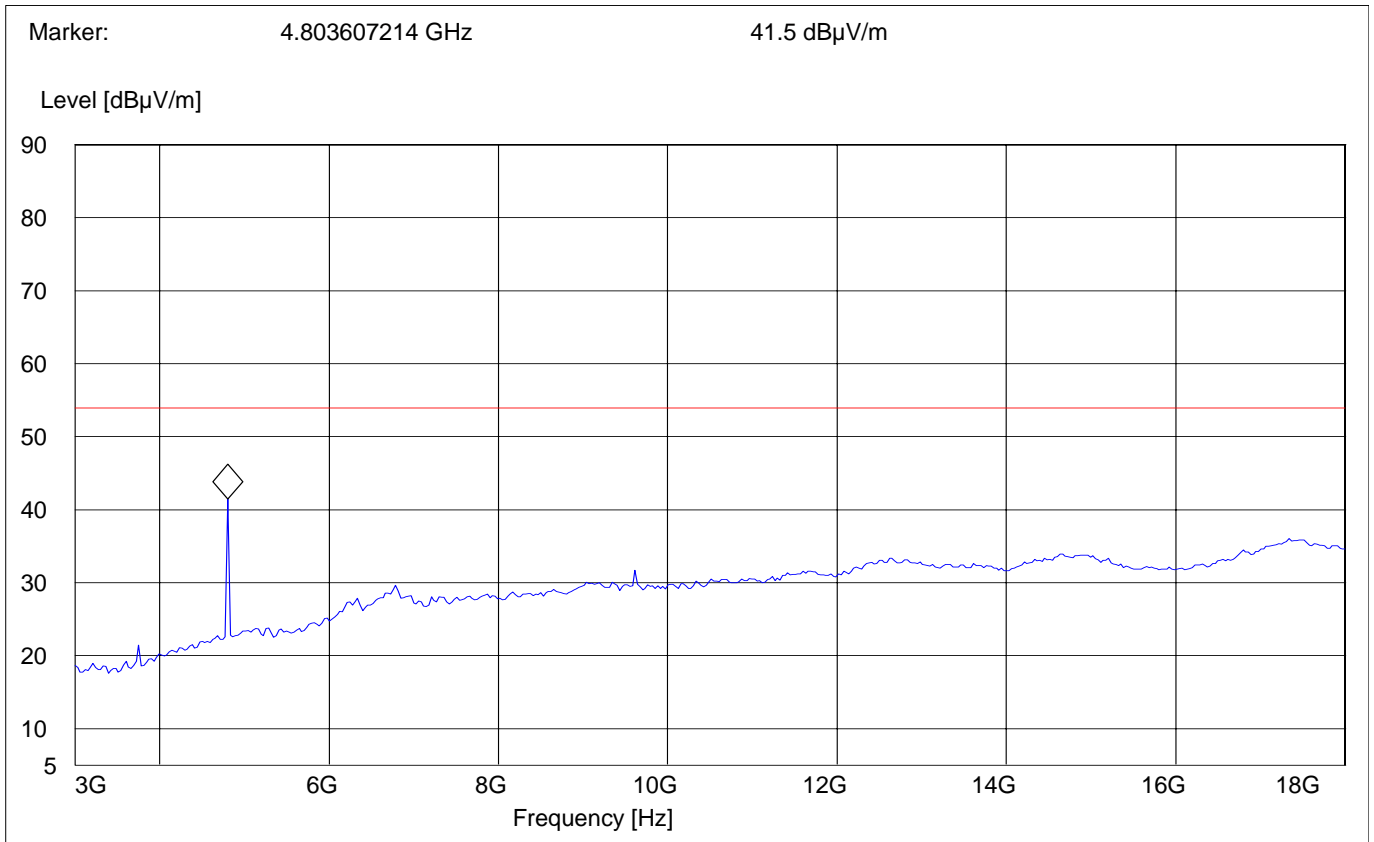

**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**Middle Channel (2441MHz): 1GHz – 3GHz****§15.247 (d)****NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

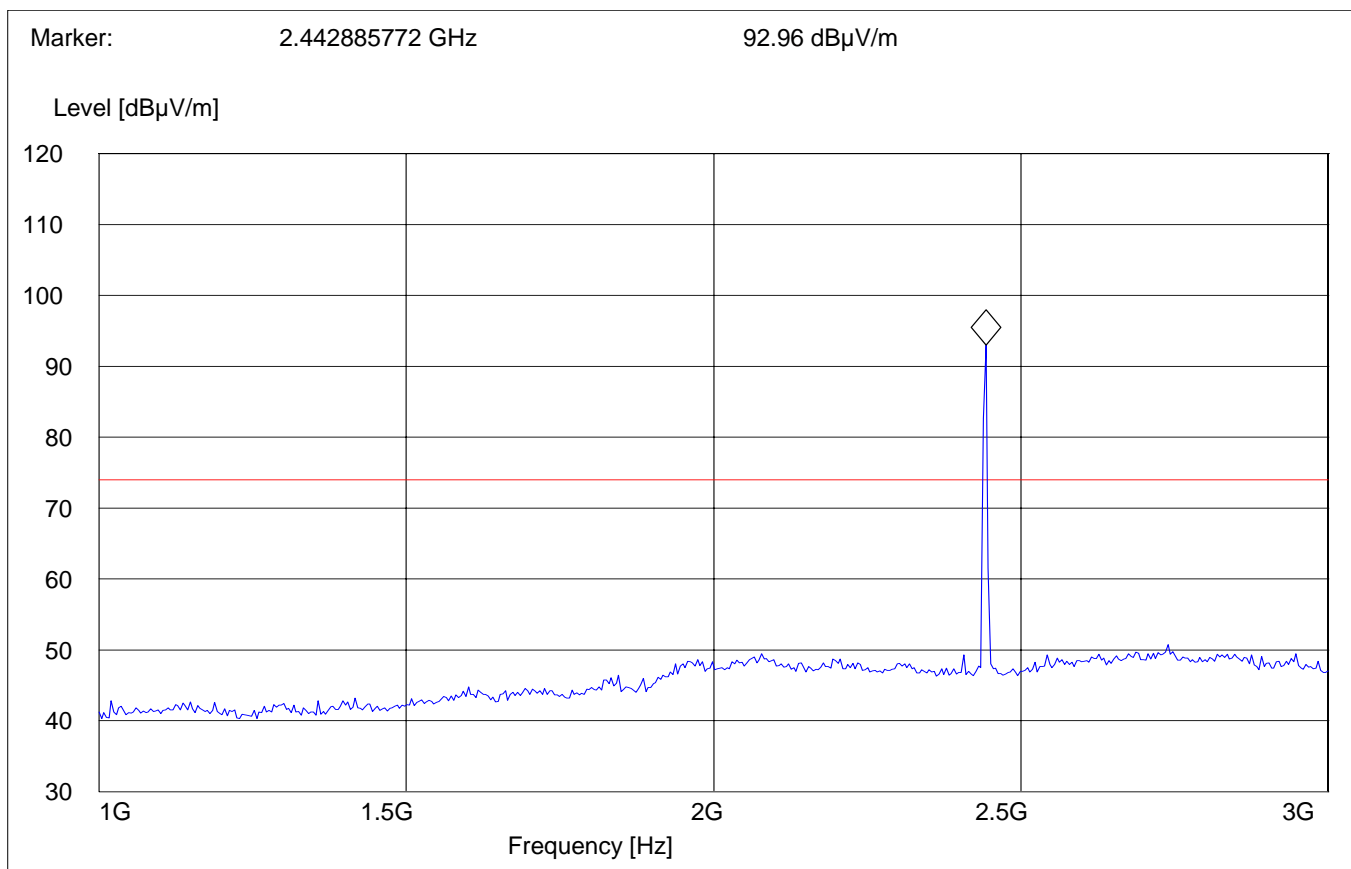


**EMISSION LIMITATIONS - Radiated (Transmitter)**

**§15.247 (d)**

**Middle Channel (2441MHz): 3GHz – 18GHz**

Average

SWEEP TABLE:		"BT Spuri hi 3-18G"				
Short Description:		Bluetooth Spurious 3-18GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

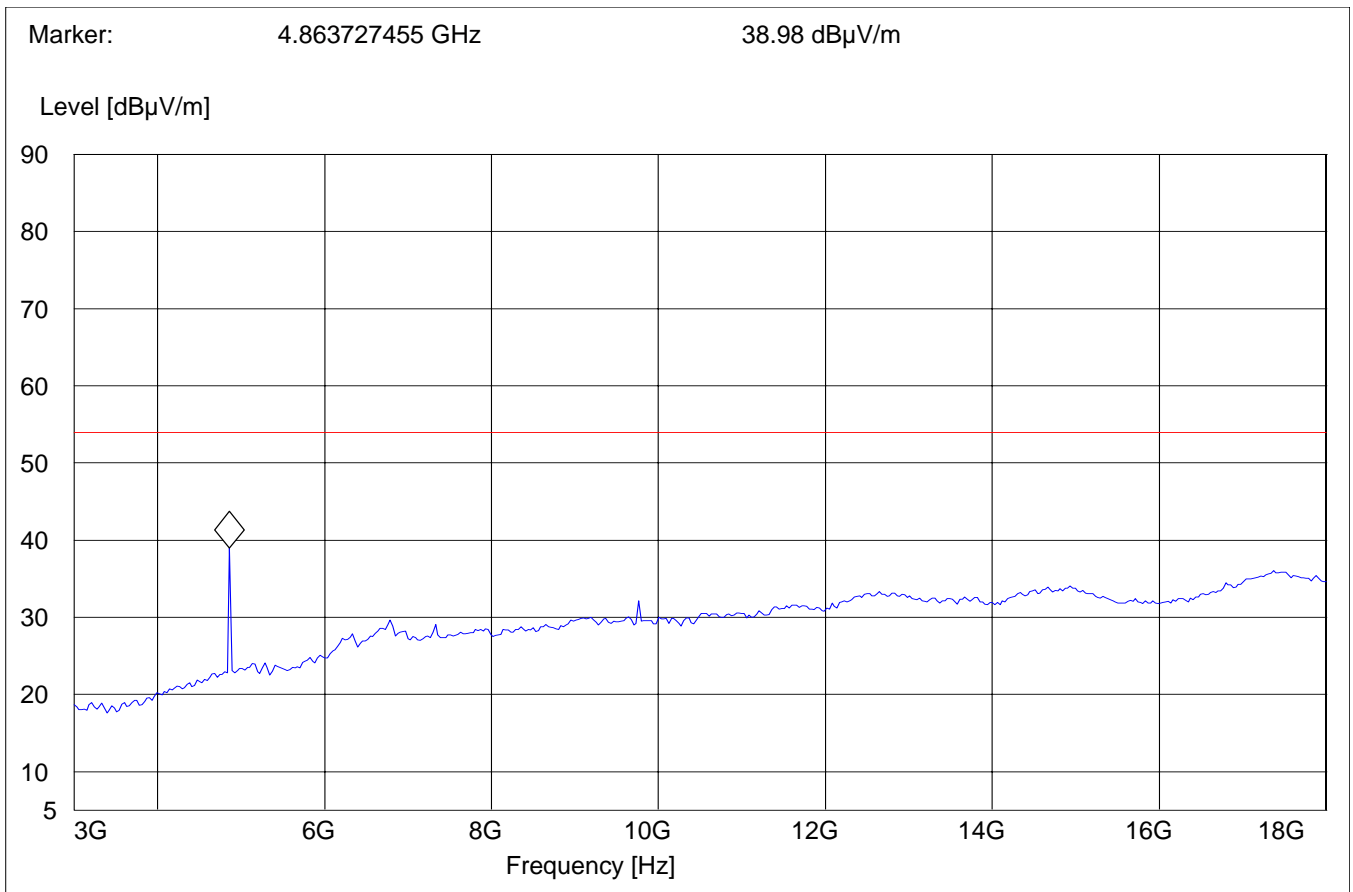


**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**Highest Channel (2480MHz): 1GHz – 3GHz**

§15.247 (d)

**NOTE: The peak above the limit is the carrier frequency.**

SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

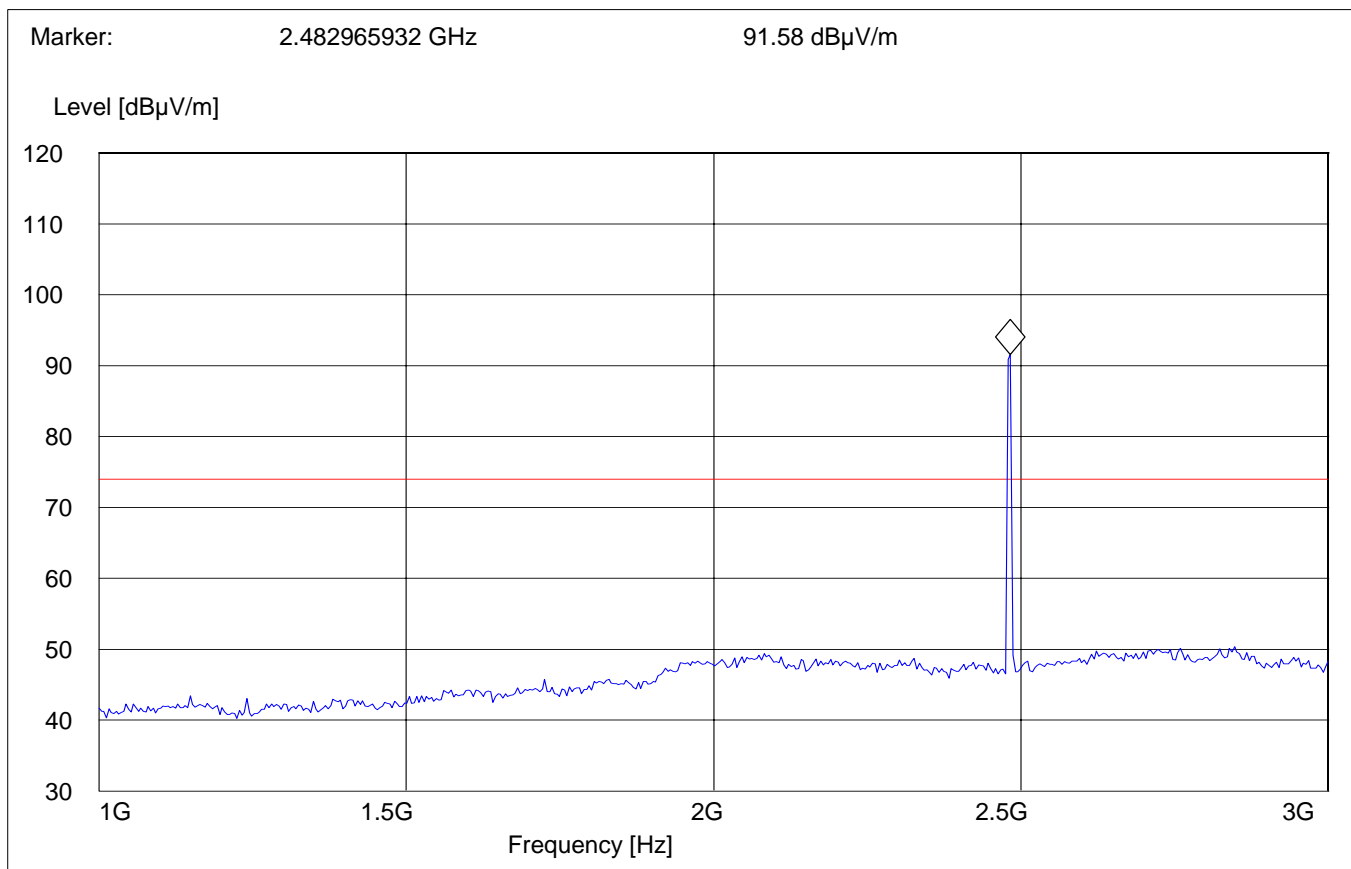




**EMISSION LIMITATIONS - Radiated (Transmitter)**

§15.247 (d)

**Highest Channel (2480MHz): 3GHz – 18GHz**


**Average**

SWEEP TABLE:		"BT Spuri hi 3-18G"				
Short Description:		Bluetooth Spurious 3-18GHz				
Start	Stop	Detector	Meas.	RBW	Transducer	
Frequency	Frequency	Time	Bandw.		VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

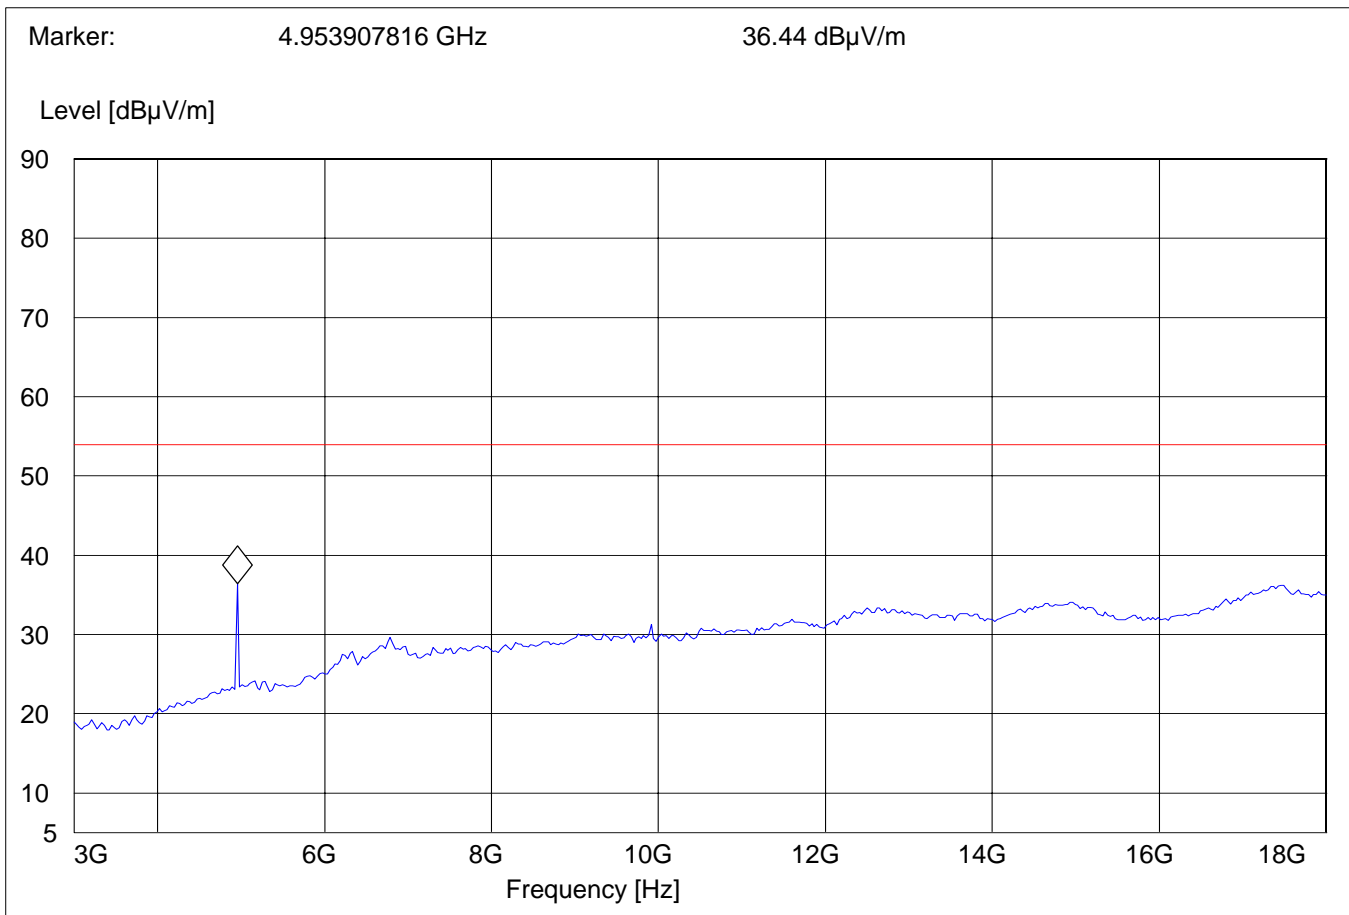

**EMISSION LIMITATIONS - Radiated (Transmitter)****§15.247 (d)****18GHz – 26.5GHz****Note: This plot is valid for low, mid & high channels (worst-case plot)**

SWEEP TABLE:		"BT Spuri hi 18-26.5G"			
Short Description:		Bluetooth Spurious 18-26.5GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

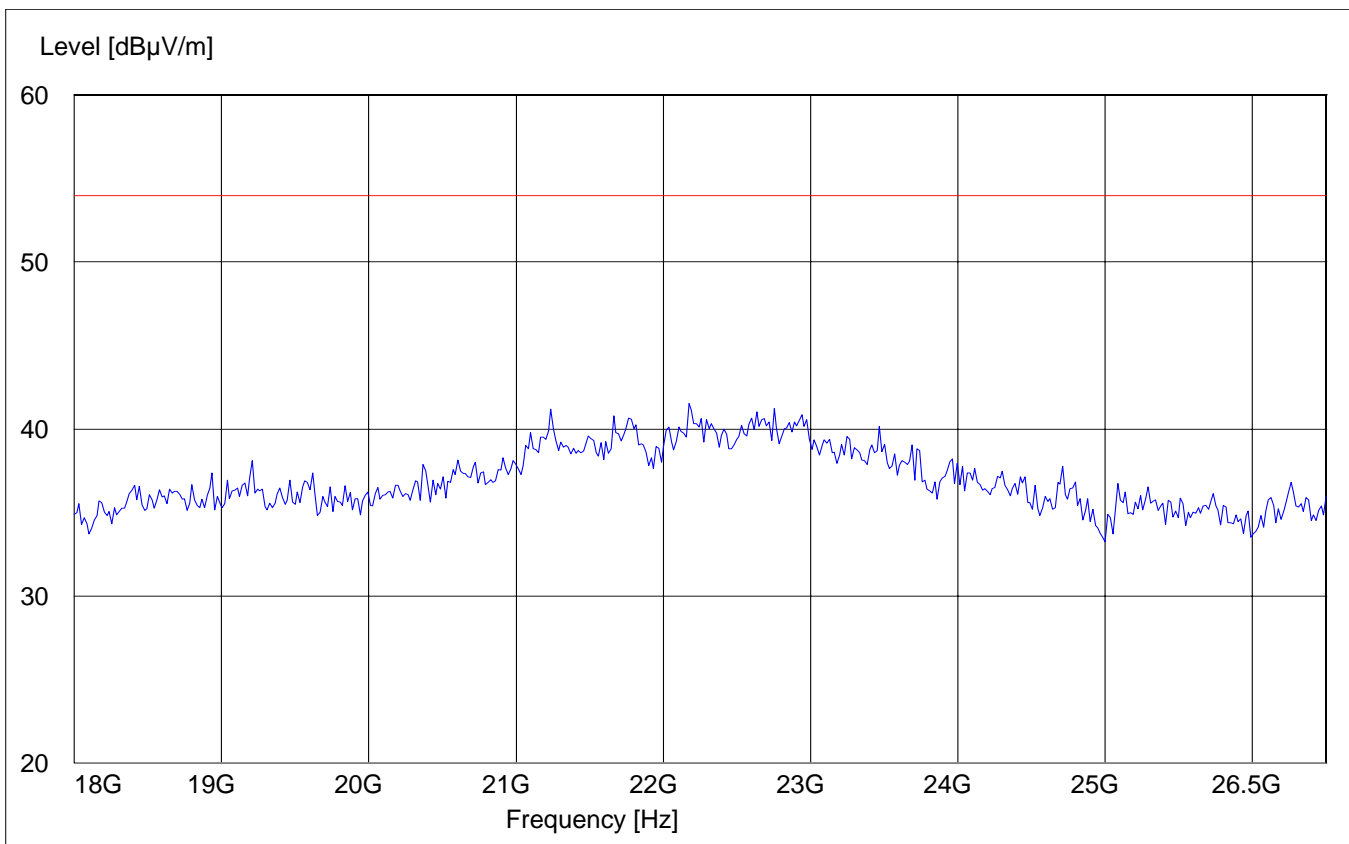

**CONDUCTED EMISSIONS**

§ 15.107/207

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


**Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

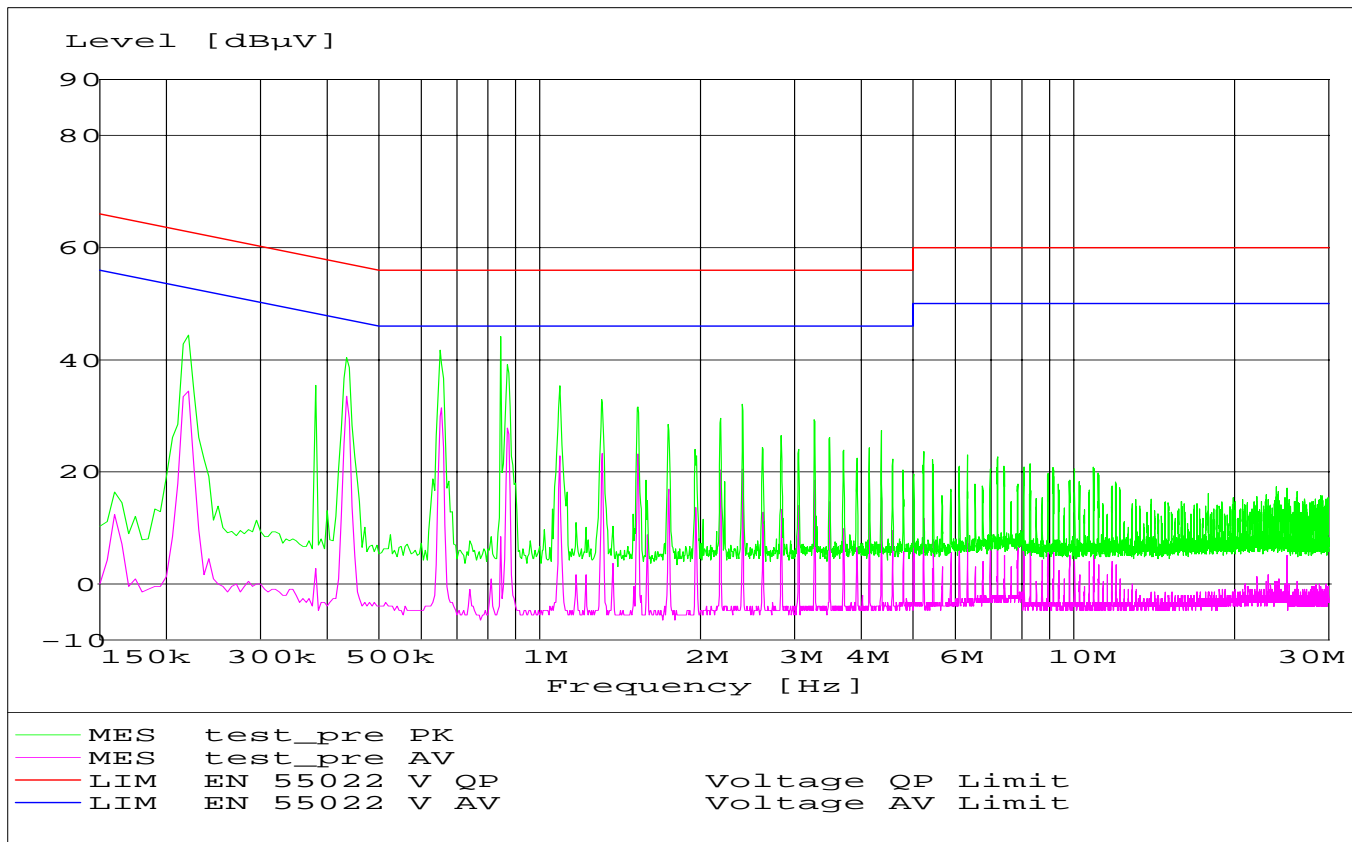

**RECEIVER SPURIOUS RADIATION**

§ 15.209

**Limits**

<b>Frequency (MHz)</b>	<b>Field strength (<math>\mu\text{V/m}</math>)</b>	<b>Measurement distance (m)</b>
<b>0.009 - 0.490</b>	<b>2400/F(kHz)</b>	<b>300</b>
<b>0.490 - 1.705</b>	<b>24000/F(kHz)</b>	<b>30</b>
<b>1.705 - 30.0</b>	<b>30</b>	<b>30</b>
<b>30 - 88</b>	<b>100</b>	<b>3</b>
<b>88 - 216</b>	<b>150</b>	<b>3</b>
<b>216 - 960</b>	<b>200</b>	<b>3</b>
<b>above 960</b>	<b>500</b>	<b>3</b>

**NOTE:**


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode unless specified with the plots.

**RECEIVER SPURIOUS RADIATION  
30MHz – 1GHz**

§ 15.209

**Antenna: vertical (worst-case plot)**


SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

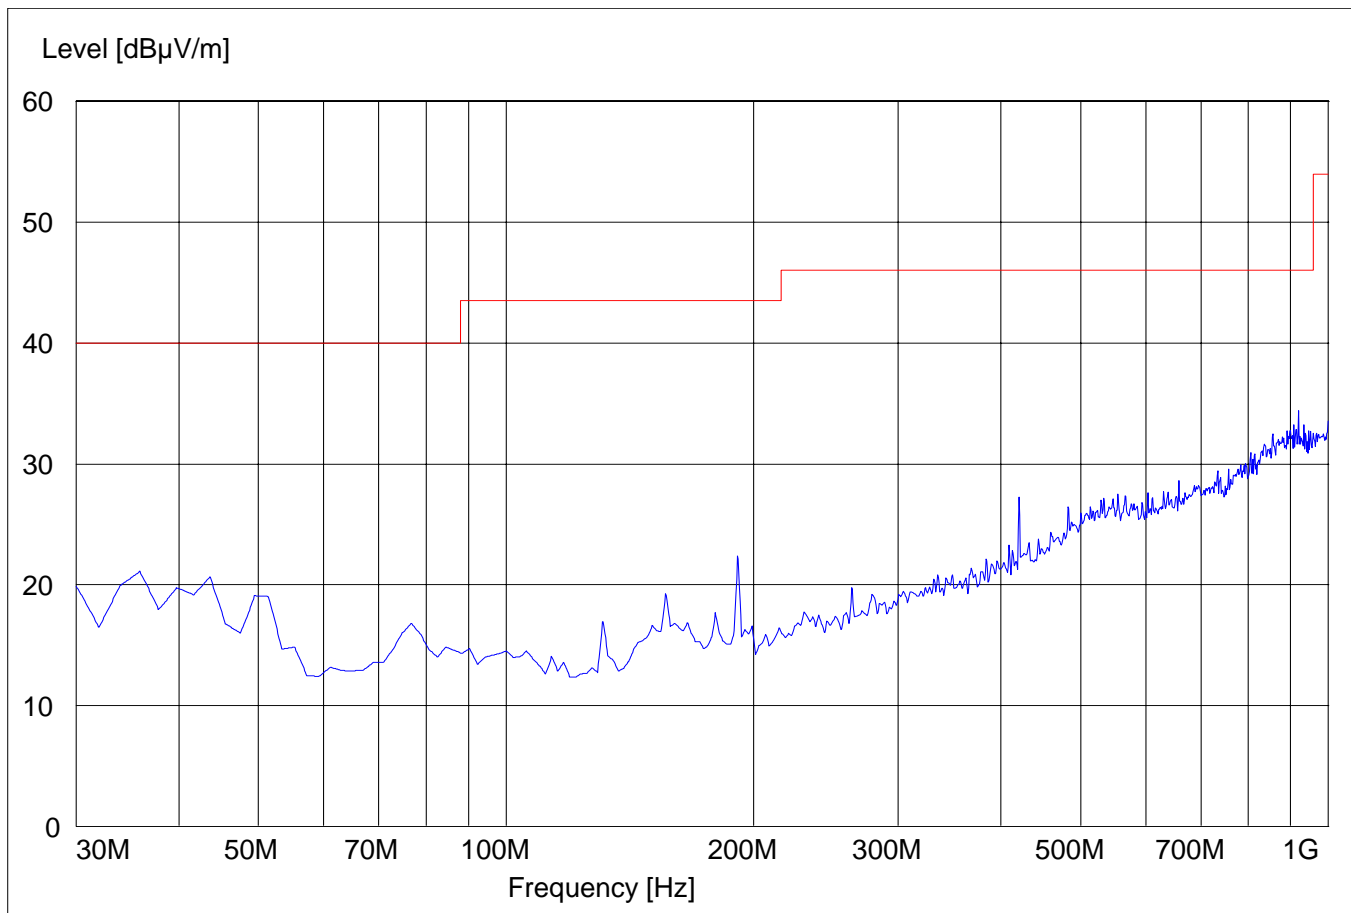

**RECEIVER SPURIOUS RADIATION**  
**1GHz – 3GHz**

§ 15.209


SWEEP TABLE:		"BT Spuri hi 1-3G"			
Short Description:		Bluetooth Spurious 1-3GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

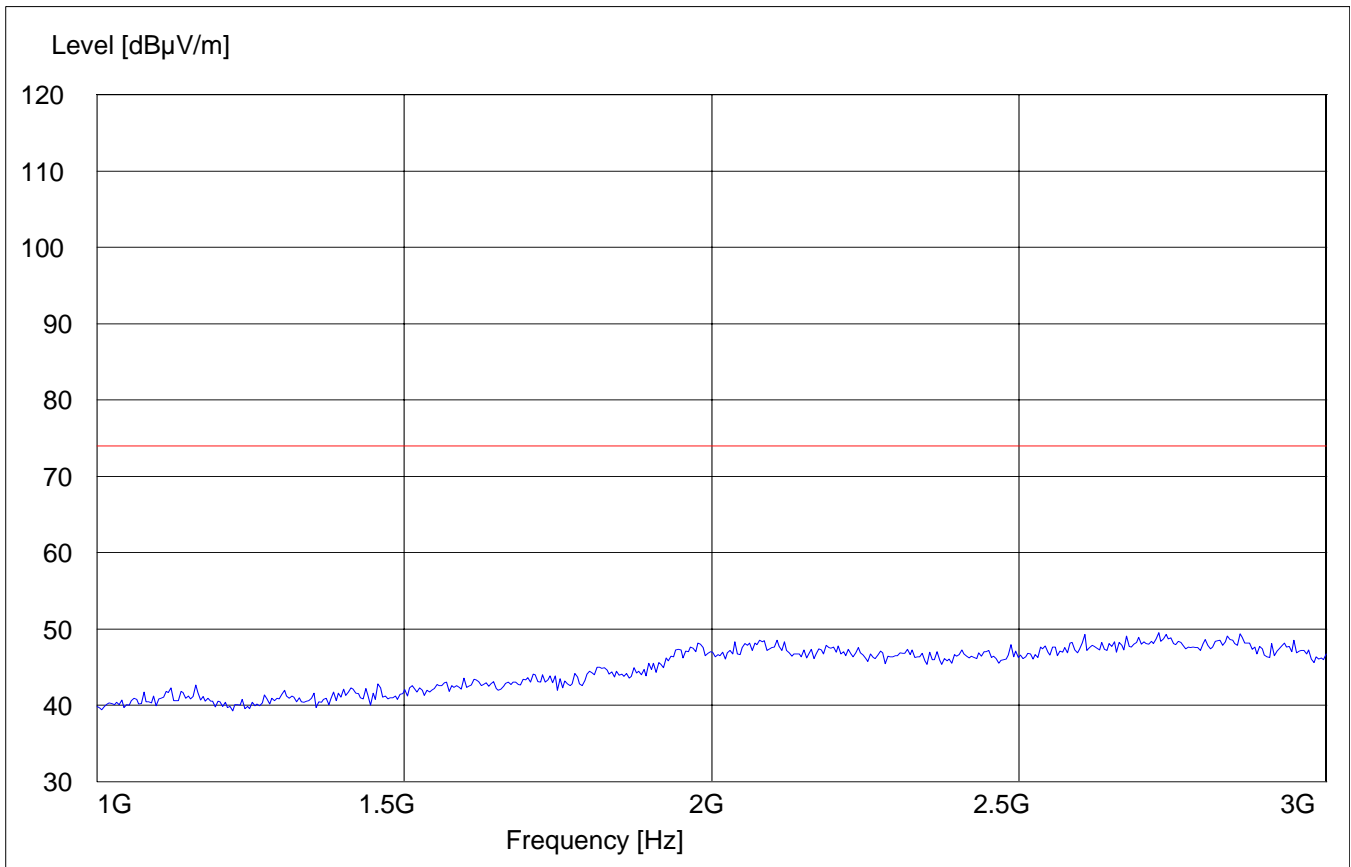

## RECEIVER SPURIOUS RADIATION 3GHz – 18GHz

§ 15.209

SWEEP TABLE:		"BT Spuri hi 3-18G"			
Short Description:		Bluetooth Spurious 3-18 GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

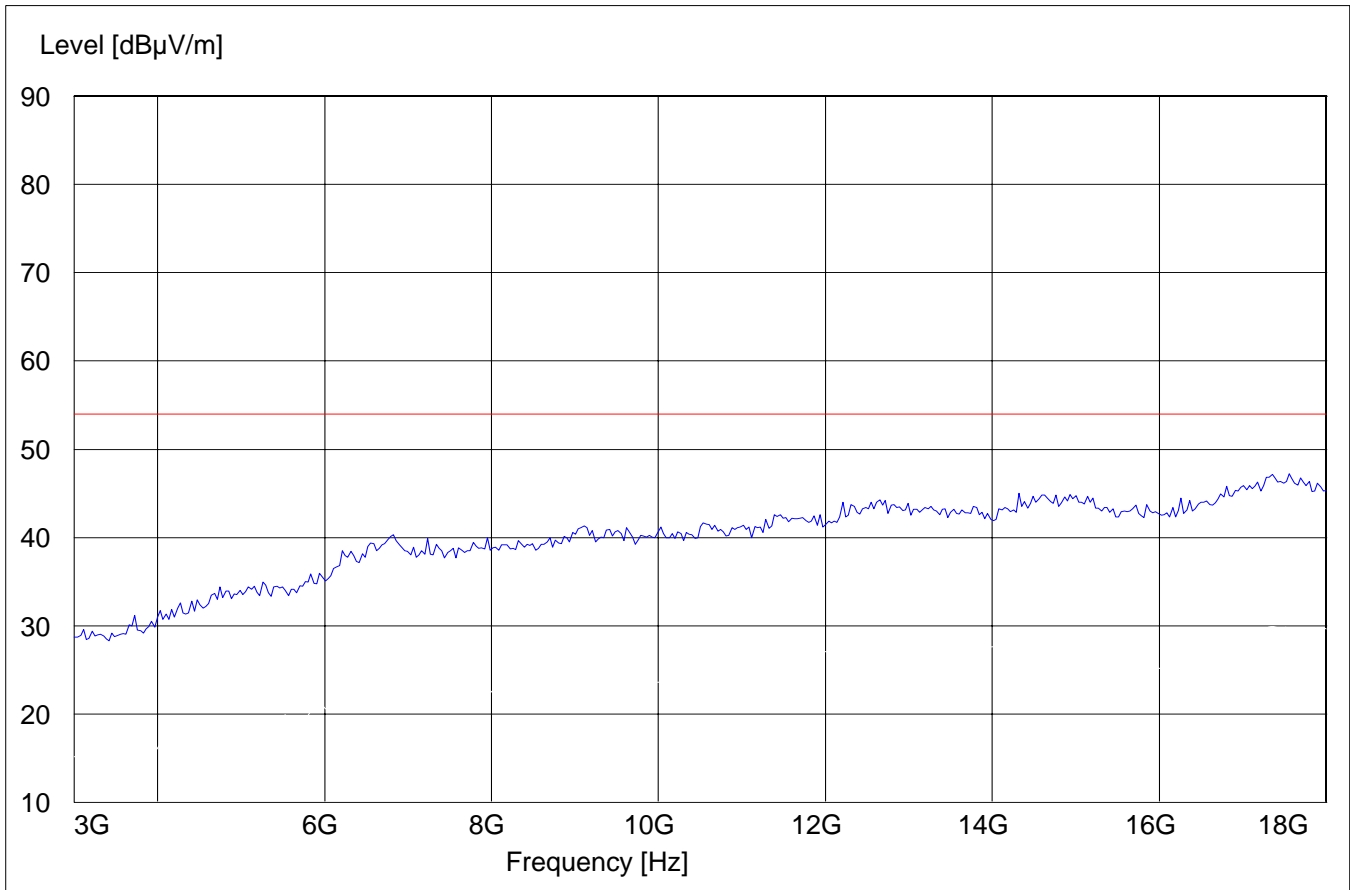


**RECEIVER SPURIOUS RADIATION**  
**18GHz – 26.5GHz**

§ 15.209

SWEEP TABLE: "BT Spuri hi 18-26.5G"  
Short Description: Bluetooth Spurious 18-26.5GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

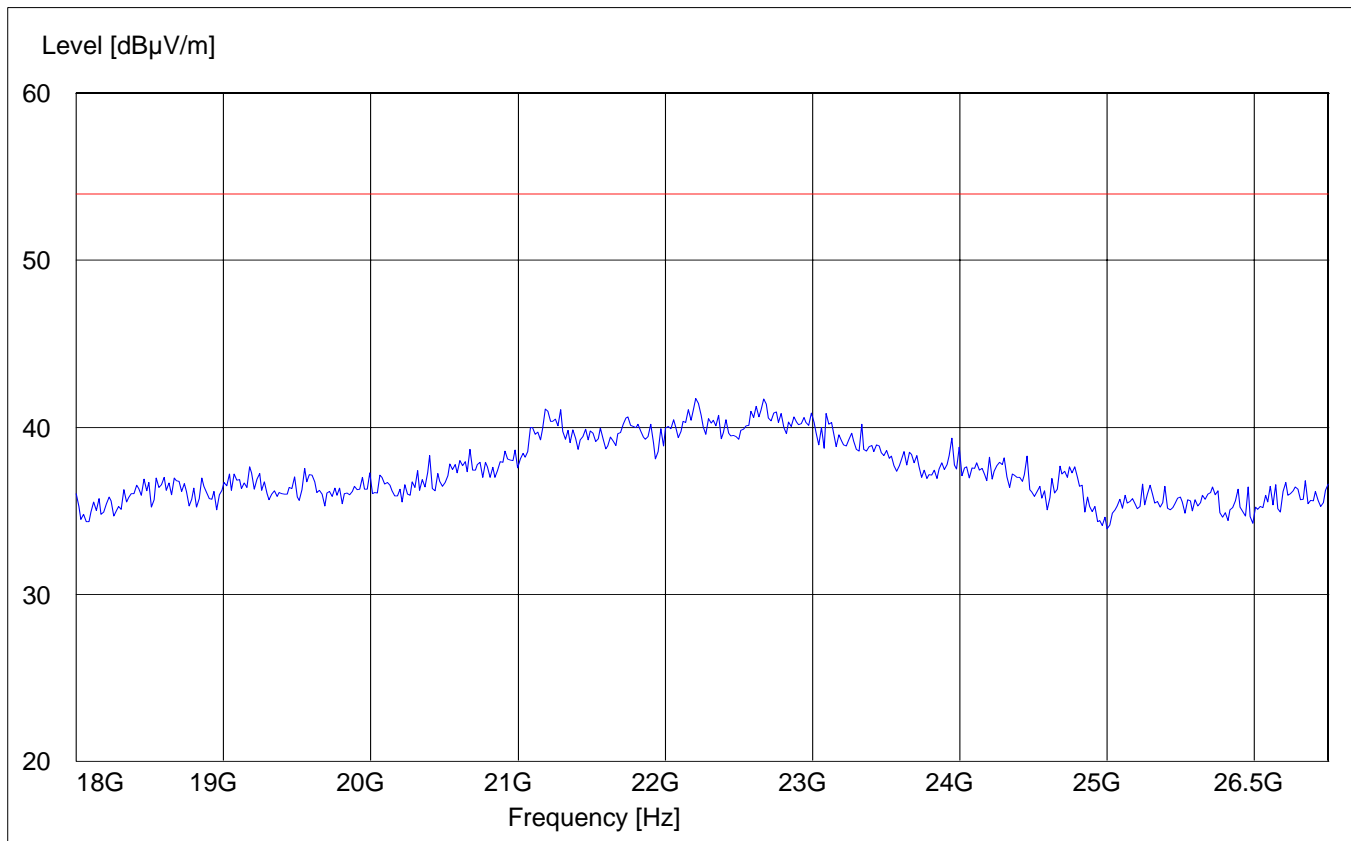




**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	2-3GHz Band reject filter	BRM50701	Microtronics	6
07	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
08	Pre-Amplifier	JS4-00102600	Miteq	00616

**BLOCK DIAGRAMS**  
**Conducted Testing**

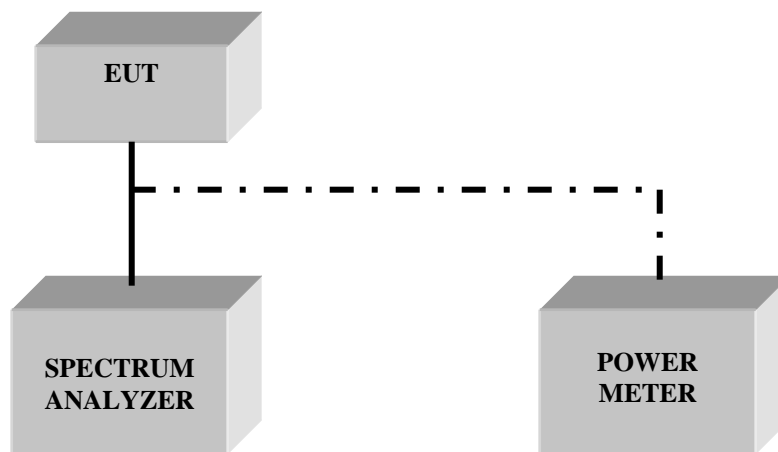

**Radiated Testing**

**ANECHOIC CHAMBER**

