

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT AND INDUSTRY CANADA RSS-210

0F

	OF
Product Name:	Bluetooth Headphones
Brand Name:	PLANTRONICS
Model Name:	BackBeat 903+
Model Difference:	N/A
IC:	457A-BB903P
FCC ID:	AL8-BB903P
Report No.:	EF/2010/40004~5
Issue Date:	Int 06 2010
Issue Date.	Jul. 06, 2010
Rule Part:	\$15.247, Cat: DSS
	·
	§15.247, Cat: DSS
Rule Part:	§15.247, Cat: DSS RSS-210 issue 7:2007, Annex 8
Rule Part: Prepared for:	§15.247, Cat: DSS RSS-210 issue 7:2007, Annex 8 Plantronics, Inc.
Rule Part:	§15.247, Cat: DSS RSS-210 issue 7:2007, Annex 8 Plantronics, Inc. 345 Encinal Street, Santa Cruz, CA95060 USA
Rule Part: Prepared for:	§15.247, Cat: DSS RSS-210 issue 7:2007, Annex 8 Plantronics, Inc. 345 Encinal Street, Santa Cruz, CA95060 USA SGS Taiwan Ltd.
Rule Part: Prepared for:	 §15.247, Cat: DSS RSS-210 issue 7:2007, Annex 8 Plantronics, Inc. 345 Encinal Street, Santa Cruz, CA95060 USA SGS Taiwan Ltd. Electronics & Communication Laboratory



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnificareleation is sold by the Conjugations for Electronic Documents at <u>www.sgs.com/terms</u> and <u>conjugations</u> and and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. GS Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 2 of 86

CERTIFICATION OF COMPLIANCE

Applicant:	Plantronics, Inc.	
	345 Encinal Street, Santa Cruz, CA95060 USA	
Product Name:	Bluetooth Headphones	
Brand Name:	PLANTRONICS	
IC:	457A-BB903P	
FCC ID:	AL8-BB903P	
Model No.:	BackBeat 903+	
Model Difference:	N/A	
File Number:	EF/2010/40004~05	
Date of test:	Jun. 21, 2010 ~ Jun. 30, 2010	
Date of EUT Received:	Jun. 21, 2010	

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and RSS-Gen. issue 2:2007, the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C:2007, §15.247 and RSS-210 issue 7: 2007 Annex 8.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Brian Chang	Date:	Jul. 06, 2010
Prepared By:	Brian Chang / Engineer Tiffany Kao	Date:	Jul. 06, 2010
Approved By:	Tiffany Kao / Clerk Tihurt In Vincent Su / Manager	Date:	Jul. 06, 2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sgs.com Member of SGS Group



Version

Version No.	Date	Description
00	Jul. 06, 2010	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際計分有認明・近報告結米僅封測訊之体前負負、回時近後前埋執電知ズ。今本報告大整全公司者圓訂可, 个小可即过復聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document departue parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCG Taivan 1 Id 1 No 134 Wirk Ung Dead Wirku Individual Virtual Zong Taipei Compt. Taivan CHIEST ENT 28 134 B#

f (886-2) 2298-0488

www.tw.sgs.com



Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	8
	1.3.	Test Methodology	8
	1.4.	Test Facility	8
	1.5.	Special Accessories	8
	1.6.	Equipment Modifications	8
2.	SYST	TEM TEST CONFIGURATION	9
	2.1.	EUT Configuration	9
	2.2.	EUT Exercise	9
	2.3.	Test Procedure	9
	2.4.	Configuration of Tested System	10
3.	SUM	MARY OF TEST RESULTS	11
4.	DES	CRIPTION OF TEST MODES	11
5.	AC P	OWER LINE CONDUCTED EMISSION TEST	12
	5.1.	Standard Applicable:	12
	5.2.	Measurement Equipment Used:	12
	5.3.	EUT Setup:	12
	5.4.	Measurement Procedure:	13
	5.5.	Measurement Result:	13
6.	PEA	K OUTPUT POWER MEASUREMENT	16
	6.1.	Standard Applicable:	16
	6.2.	Measurement Equipment Used:	16
	6.3.	.Test Set-up:	17
	6.4.	Measurement Procedure:	17
	6.5.	Measurement Result:	18
7.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	23
	7.1.	Standard Applicable:	23
	7.2.	Measurement Equipment Used:	24
	7.3.	Test SET-UP:	25
	7.4.	Measurement Procedure:	26
	7.5.	Field Strength Calculation	26
	7.6.	Measurement Result:	26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際計分有認明・近報告結米僅封測訊之体品質真 「同時近体品性保留90天 % 本報告去総本公司書面計可) 不可部位複聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCG Takung Life Life 14 / Wu Kung Poard Wirku Inductrial Zong. Taking Taking Taking Ya 124 Bit No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 GS Taiwan Ltd.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 5 of 86

8.	SPUR	LOUS EMISSION TEST	35
	8.1.	Standard Applicable:	35
	8.2.	Measurement Equipment Used:	35
	8.3.	Test SET-UP:	35
	8.4.	Measurement Procedure:	36
	8.5.	Field Strength Calculation	36
	8.6.	Measurement Result:	36
9.	FREC	UENCY SEPARATION	61
	9.1.	Standard Applicable:	61
	9.2.	Measurement Equipment Used:	61
	9.3.	Test Set-up:	61
	9.4.	Measurement Procedure:	61
	9.5.	Measurement Result:	61
10.	NUM	BER OF HOPPING FREQUENCY	63
	10.1.	Standard Applicable:	63
	10.2.	Measurement Equipment Used:	63
	10.3.	Test Set-up:	63
	10.4.	Measurement Procedure:	63
	10.5.	Measurement Result:	63
11.	TIME	C OF OCCUPANCY (DWELL TIME)	656
	11.1.	Standard Applicable:	66
	11.2.	Measurement Equipment Used:	66
	11.3.	Test Set-up:	66
	11.4.	Measurement Procedure:	66
	11.5.	Measurement Result:	67
12.	Peak	Power Spectral Density	73
	12.1.	Standard Applicable:	73
	12.2.	Measurement Equipment Used:	73
	12.3.	Test Set-up:	73
	12.4.	Measurement Procedure:	73
	12.5.	Measurement Result:	74
13.	20dB	Bandwidth & 99% Bandwidth	79
	13.1.	Standard Applicable:	79
	13.2.	Measurement Equipment Used:	79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際計分有認明・近報告結米僅封測訊之体前負負、回時近後前埋執電知ズ。今本報告大整全公司者圓訂可, 个小可即过復聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document departue parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCG Taivan 1 Id 1 No 134 Wirk Ung Dead Wirku Individual Virtual Zong Taipei Compt. Taivan CHIEST ENT 28 134 B#



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 6 of 86

	13.3.	Test Set-up:	. 79
	13.4.	Measurement Procedure:	. 79
	13.5.	Measurement Result:	. 80
14.	ANTE	ENNA REQUIREMENT	. 86
	14.1.	Standard Applicable:	. 86
	14.2.	Antenna Connected Construction:	. 86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

際計分有認明・近報告結米僅封測訊之体前負負、回時近後前埋執電知ズ。今本報告大整全公司者圓訂可, 个小可即过復聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document departue parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCG Taivan 1 Id 1 No 134 Wirk Ung Dead Wirku Individual Virtual Zong Taipei Compt. Taivan CHIEST ENT 28 134 B#

f (886-2) 2298-0488



1. GENERAL INFORMATION

1.1. Product Description

General:

Product Name:	Bluetooth Headphones		
Brand Name:	PLANTRONICS		
Model Name:	BackBeat 903+		
Model Difference:	N/A		
	3.7Vdc re-chargeable battery or 100-240Vdc by AC/DC power adapter		
Power Supply :	Battery:	 Model:471540, Supplier: ATL Model: PP451839AB, Supplier: TIANJ IN LI SHEN BATTERY 	
	Adapter:	1. Model: SSA-3W-05 050018F Supplier: PLAN- TRONICS	
Flash Memory :	 Model: SST39VF1601-70-4I-B3K, Supplier: SST Model: EN29LV160BB-70BIP, Supplier: EON 		

Bluetooth:

Frequency Range:	2402 – 2480MHz	
Thequency Kallge.		
Bluetooth Version:	V1.1 (GFSK)V1.2 (GFSK)V2.0 (GFSK)V2.0 + EDR (GFSK + π /4DQPSK + 8DPSK)V2.1 + EDR (GFSK + π /4DQPSK + 8DPSK)	
Channel number:	79 channels	
Modulation type:	Frequency Hopping Spread Spectrum	
Transmit Power:	3.70dBm	
Dwell Time:	<= 0.4s	
Operating Mode:	Point-to-Point	
Antenna Designation:	PIFA Antenna / 0.93 dBi.	

The EUT is compliance with Bluetooth 2.1 + EDR Standard.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the strain where the strain where the strain the strain



1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>AL8-BB903P</u> filing to comply with Section 15.247 of the FCC Part 15C, Subpart C Rules. And IC: <u>457A-BB903P</u> filing to comply with Industry Canada RSS-210 issue 7: 2007 Annex 8.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2007. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

台灣檢驗科技股份有限公司

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to experime the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sgs.com



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was tested with a test program to fix the Tx/RX frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7, 13 of ANSI C63.4-2003 and RSS-Gen:2007.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003 and DA 00-705..

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnificaelectronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488

www.tw.sgs.com



2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1.	Notebook	DELL	E5400	3704625136
3.	Bluetooth Software	Bluesuite 1.22	CSR	Version 1.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of liability, indemnifica-and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)/	AC Demon line Conducted Emission	
RSS-Gen §7.2.2	AC Power line Conducted Emission	Compliant
§15.247(b)(1)/	Deals Output Downer	Compliant
RSS-210 issue 7,§A8.4(2)	Peak Output Power	Compliant
§15.247(d)	100 KHz Bandwidth Of	Compliant
RSS-210 issue 7,§A8.5	Frequency Band Edges	Compliant
§15.247(c)		
RSS-Gen §7.2.3	TX/RX Spurious Emission	Compliant
RSS-210 issue 7,§A2.9		
§15.247(a)(1)/	Encourse Separation	Compliant
RSS-210 issue 7,§A8.1(b)	Frequency Separation	Compliant
§15.247(a)(1)(iii)/	Number of hopping frequency	Compliant
RSS-210 issue 7,§A8.1(d)	Number of hopping frequency	Compliant
§15.247(a)(1)(ii)/	Time of Occupancy	Compliant
RSS-210 issue 7,§A8.1(d)	Time of Occupancy	Compliant
§15.247/	Deals Dower Density	Compliant
RSS-210 issue 7,§A8.2(b)	Peak Power Density	Compliant
§15.247(a)(1)	20dB Bandwidth	
RSS210 issue ,§A8.1(b)	& 99% Power Bandwidth	Compliant
\$15.203, \$15.247(c)/	Antonio Deminiment	Compliant
RSS-GEN 7.1.4,	Antenna Requirement	Compliant
RSS-210 issue 7,§A8.4		

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) \sim mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing with BDR and EDR and to contrast with X, Y, Z axis, X axis which has Worst Case.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

```
www.tw.sgs.com
```



5. AC POWER LINE CONDUCTED EMISSION TEST

5.1. Standard Applicable:

According to §15.207 and RSS-Gen §7.2.2, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range		imits B(uV)		
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		
Note				
1. The lower limit shall apply at the transition frequencies				

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2. Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2009	09/14/2010			
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011			
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2010	02/01/2011			
Coaxial Cables	N/A	WK CE Cable	N/A	11/28/2009	11/27/2010			

5.3. EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnificareleation is sold by the Conjugate to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. GS Taiwan Ltd.





5.4. Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

5.5. Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


台灣檢驗科技股份有限公司

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnificareleation is sold by the Conjugate to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Bluetooth Mode			Test Date:	Jun. 30, 2010
Temperature:	24 °C	Humidity:	58 %	Test By:	Brian

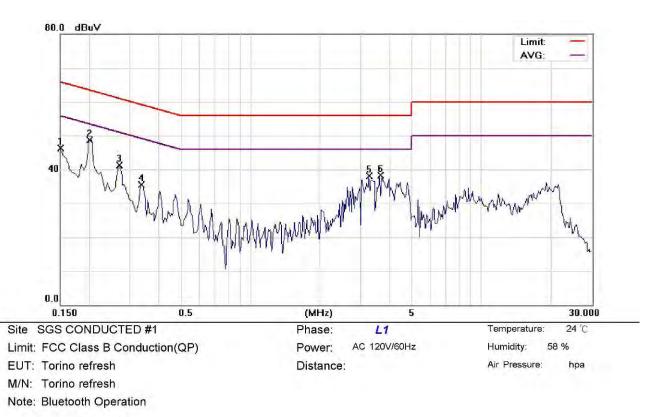

No. Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.1500	46.10	0.14	46.24	66.00	-19.76	peak		
2 *	0.2000	48.67	0.12	48.79	63.61	-14.82	peak		
3	0.2700	41.25	0.12	41.37	61.12	-19.75	peak		
4	0.3350	35.40	0.12	35.52	59.33	-23.81	peak		
5	3.2600	37.87	0.19	38.06	56.00	-17.94	peak		
6	3.6500	38.11	0.19	38.30	56.00	-17.70	peak		
	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				- M. S. S.				


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

際計労有認明,近後古結末無到週載之後的首員,「同时以後的世報用90人。今年校日本産生公司す自由」,「いう可以な家で This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, f electronic format documents, subject to Terms and Conditions for Electronic Document at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or and conditions.htm and, for falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sgs.com



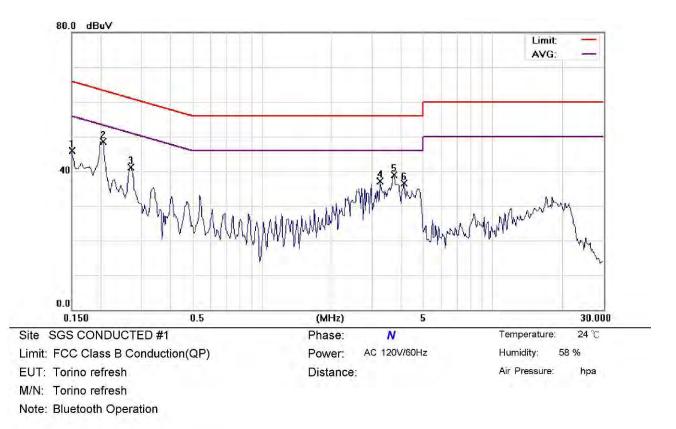

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.1500	45.81	0.15	45.96	66.00	-20.04	peak		
2	*	0.2050	48.35	0.13	48.48	63.41	-14.93	peak		
3		0.2700	40.99	0.13	41.12	61.12	-20.00	peak		
4		3.2500	36.92	0.18	37.10	56.00	-18.90	peak		
5		3.7200	38.77	0.19	38.96	56.00	-17.04	peak		
6		4,1300	36.24	0.20	36.44	56.00	-19.56	peak	· · · · · · · · · · · · · · · · · · ·	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



6. PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable:

According to \$15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

According to RSS-210 issue 7,§A8.4(2), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2010	04/18/2012				
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2010	01/24/2011				
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2010	01/04/2011				
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010				
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010				
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010				
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010				

6.2. Measurement Equipment Used:


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6.3. .Test Set-up:

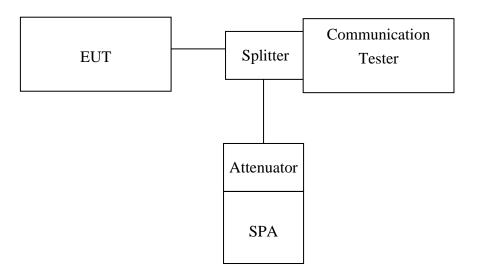

6.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max peak function, RBW, 20dB bandwidth, VBW>RBW)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions</u>, the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北紫五股工業區五工路 134 號



6.5. Measurement Result:

BDR mode:

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	3.57	0.00	3.57	0.00228	1
2441.00	3.53	0.00	3.53	0.00225	1
2480.00	3.07	0.00	3.07	0.00203	1

*Note: offset 0.2dB

EDR mode:

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	3.70	0.00	3.70	0.00234	1
2441.00	3.67	0.00	3.67	0.00233	1
2480.00	3.46	0.00	3.46	0.00222	1

*Note: offset 0.2dB

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Wet アンドルボック したれ 日本 医生 20 (move) (Mone Carlos Carlo




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 19 of 86



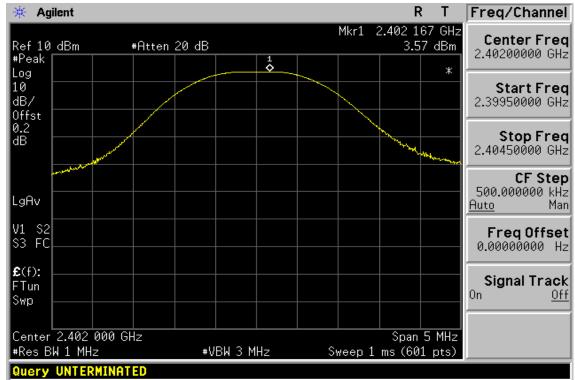

Peak Power Output Data Plot (CH Mid) (BDR mode)

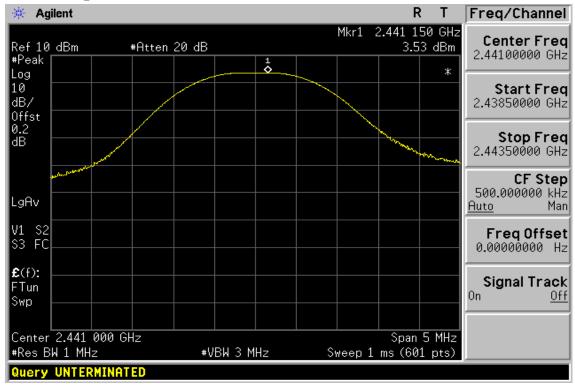


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 20 of 86

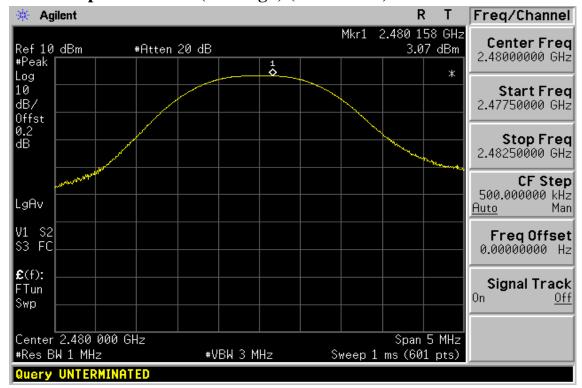

Peak Power Output Data Plot (CH High) (BDR mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the company. Any unauthorized alteration, forgery or talsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 21 of 86

Peak Power Output Data Plot (CH Low) (EDR mode)

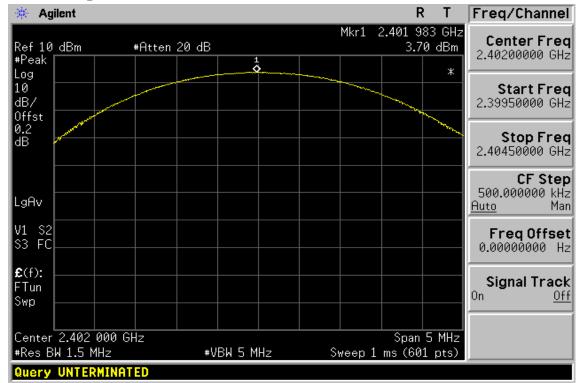

Peak Power Output Data Plot (CH Mid) (EDR mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.	No.134, Wu Kung Road, Wuku Ir	idustrial Zone, Taipei County, Taiwan /台	北縣五股工業區五工路 134 號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 22 of 86

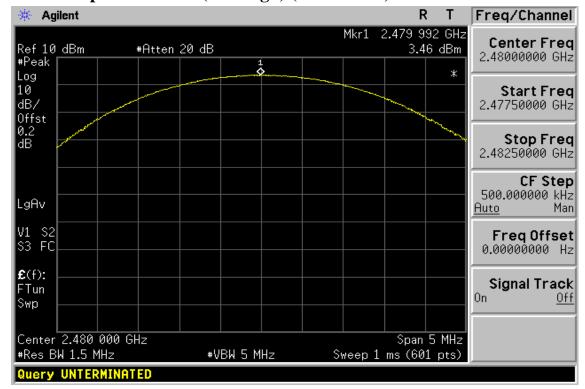

Peak Power Output Data Plot (CH High) (EDR mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the company. Any unauthorized alteration, forgery or talsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 23 of 86

7. **100KHz BANDWIDTH OF BAND EDGES MEASUREMENT**

7.1. Standard Applicable:

According to §15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

According to RSS-210 issue 7,§A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.2. Measurement Equipment Used:

7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

7.2.2. Radiated emission:

966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011				
Loop antenna	MESSTEC	FLA30	03/10086	07/08/2009	07/07/2011				
Bilog Antenna	SCHWAZBECK	VULB9160	3136	09/15/2009	09/14/2010				
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2010	05/08/2012				
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/27/2010				
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011				
Turn Table	HD	DT420	N/A	N.C.R	N.C.R				
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R				
Controller	HD	HD100	N/A	N.C.R	N.C.R				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011				
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why style and the style and the style and style and style and the style and style and style and the style and style and style and style and the style and style and style and the style and style and style and style and style and style and style and

f (886-2) 2298-0488

www.tw.sgs.com



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 25 of 86


7.3. Test SET-UP:

7.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

7.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

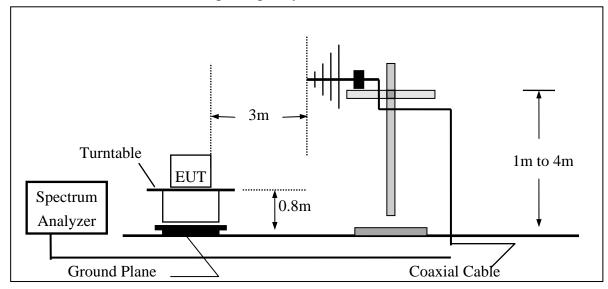

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

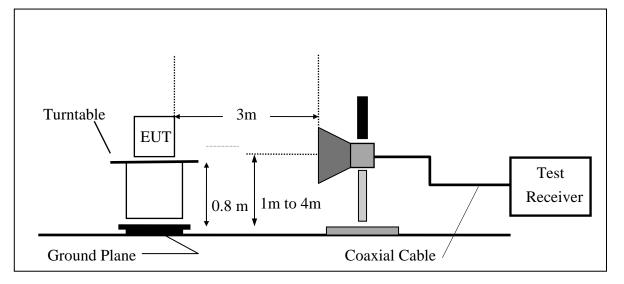

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

why of the address where the second and conditions.htm and, for falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488



7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to experime the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Member of SGS Group


www.tw.sgs.com



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 27 of 86

BDR Mode Band Edges Test Data CH-Low

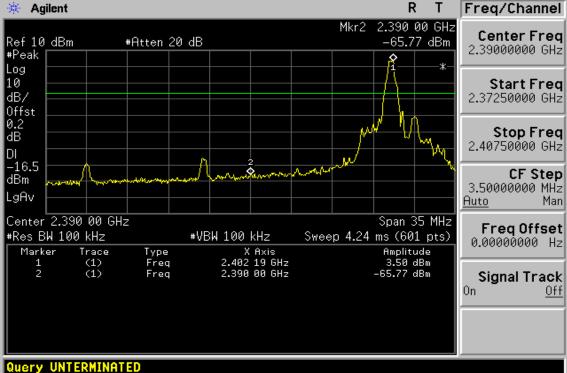

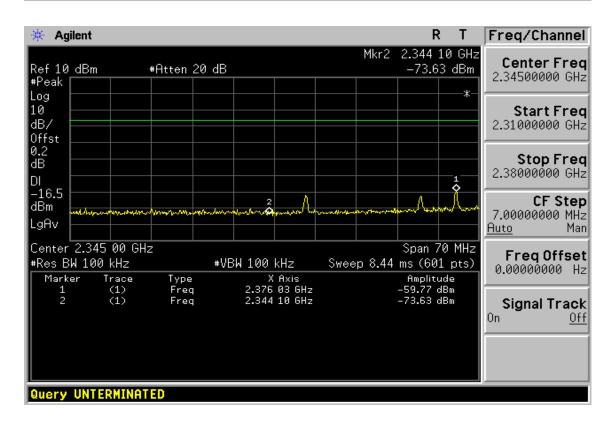

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 28 of 86

Band Edges Test Data CH-High

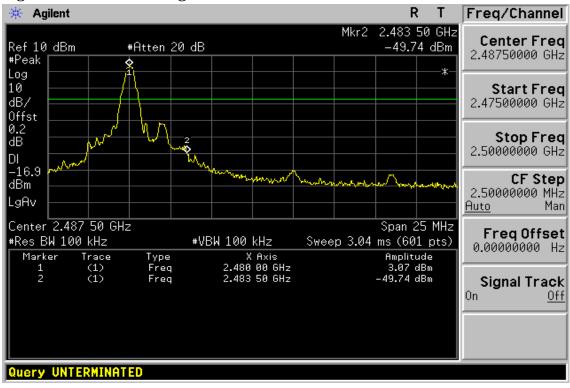

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

www.tw.sgs.com

SGS	FCC ID: AL8-BB903P IC: 457A-BB903P	-	o.: EF/2010/40004~5 e: Jul. 06, 2010 of 86
Radiated Emission: (BDR mode)Operation ModeTX CH LowFundamental Frequency2402 MHzTemperature25 °CHumidity65 %		Test Date Test By Pol	Jun. 30, 2010 Brian Ver.
Peak AV	Actual FS	Peak AV	
Freq.Reading Reading Ant./C(MHz)(dBuV)(dBuV)(dBuV)		Limit Limi)(dBuV/m)(dBuV/	0
2390.00 52.2710.70	6 41.51	74.00 54.00	-32.49 Peak
Operation ModeTX CH LowFundamental Frequency2402 MHzTemperature25 °CHumidity65 %		Test Date Test By Pol	Jun. 30, 2010 Brian Hor.
Peak AV	Actual FS	Peak AV	
Freq. Reading Reading Ant./C (MHz) (dBuV) (dBuV) CF(dl	L Peak AV B) (dBuV/m) (dBuV/m	Limit Limit)(dBuV/m)(dBuV/	8
2390.00 52.7610.76		74.00 54.00	· · · ·

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 30 of 86

Radiated Emission:

Operation Mode	TX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480 MHz	Test By	Brian
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2483.50	56.33		-10.46	45.87		74.00	54.00	-28.13	Peak
Operation Fundamen Temperatu Humidity	tal Freque					Test Test Pol	By	Jun. 30, 20 Brian Hor.	010
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2483.50	57.11		-10.46	46.65		74.00	54.00	-27.35	Peak

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to unato the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 31 of 86

EDR Mode Band Edges Test Data CH-Low



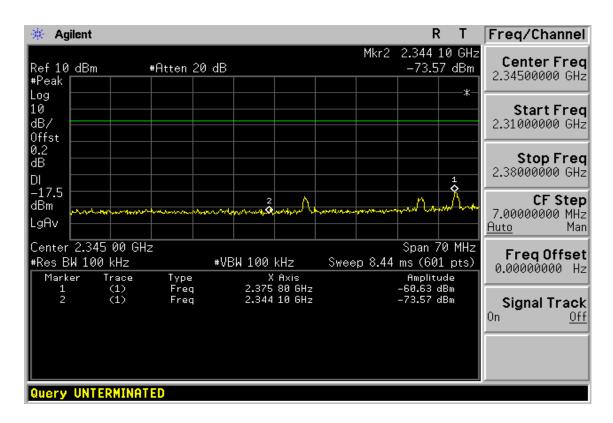

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 32 of 86

Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488

SGS	FCC ID: AL8-BB903P IC: 457A-BB903P	Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 33 of 86	
Radiated Emission:Operation ModeTX CH LowFundamental Frequency2402 MHzTemperature25 °CHumidity65 %		Test Date Test By Pol	Jun. 30, 2010 Brian Ver.
Peak AV	Actual FS	Peak AV	
Freq. Reading Reading Ant./C (MHz) (dBuV) (dBuV) CF(d	L Peak AV B) (dBuV/m) (dBuV/m)	Limit Limit (dBuV/m)(dBuV/m	8
2390.00 52.2610.7	6 41.50	74.00 54.00	-32.50 Peak
Operation ModeTX CH LowFundamental Frequency2402 MHzTemperature25 °CHumidity65 %		Test Date Test By Pol	Jun. 30, 2010 Brian Hor.
Peak AV	Actual FS	Peak AV	
Freq. Reading Reading Ant./C (MHz) (dBuV) (dBuV) CF(d)	L Peak AV B) (dBuV/m) (dBuV/m)	Limit Limit (dBuV/m)(dBuV/m	8
2390.00 51.6110.7	6 40.85	74.00 54.00	-33.15 Peak

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 34 of 86

Radiated Emission:

Operation Mode	TX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480 MHz	Test By	Brian
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2483.50	57.28		-10.46	46.82		74.00	54.00	-27.18	Peak
Operation Fundamen Temperatu Humidity	tal Freque					Test Test Pol	By	Jun. 30, 20 Brian Hor.	10
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading (dBuV)	Ant./CL CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/n	0	Remark
2483.50	59.95		-10.46	49.49		74.00	54.00	-24.51	Peak

Remark :

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to experime the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8. SPURIOUS EMISSION TEST

8.1. Standard Applicable:

According to \$15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in \$15.209(a). And according to \$15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §7.2.3 and RSS-210 issue 7,§A2.9, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

8.2. Measurement Equipment Used:

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

Refer to section 7.2 for details.

8.3. Test SET-UP:

8.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

8.3.2. Radiated emission:

Refer to section 7.3 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.4. Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to exome the company of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 37 of 86

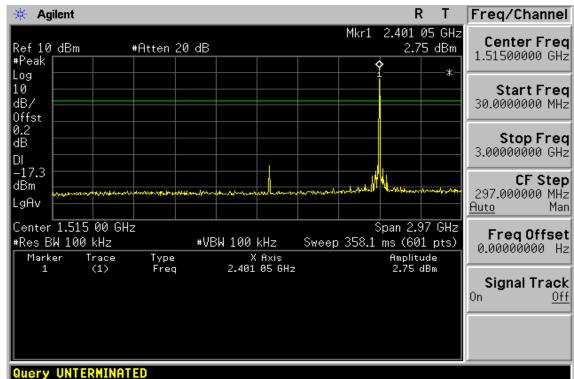

BDR Mode Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz



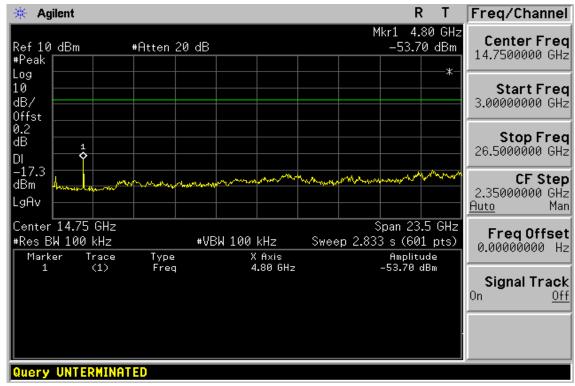


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 38 of 86

Ch Mid 30MHz – 3GHz

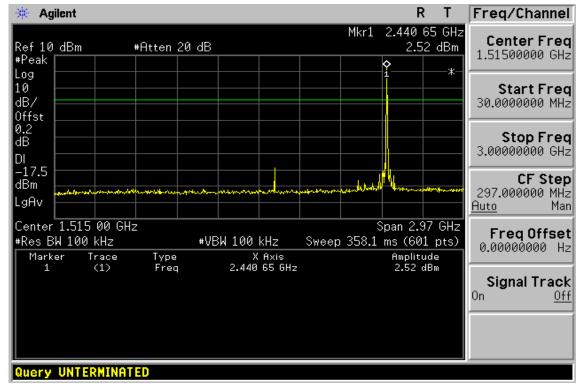

Ch Mid 3GHz – 26.5GHz

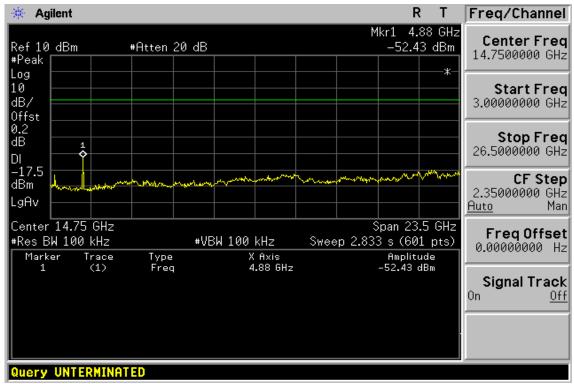


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Ch High 30MHz – 3GHz

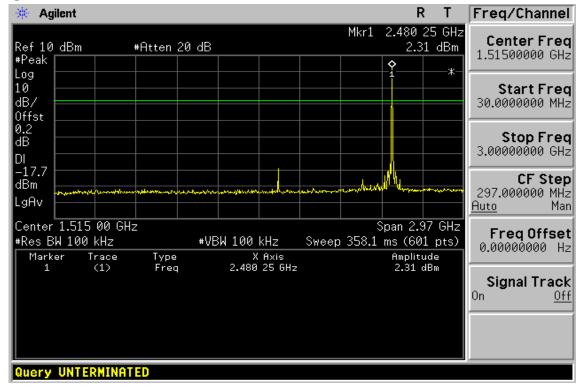

Ch High 3GHz – 26.5GHz

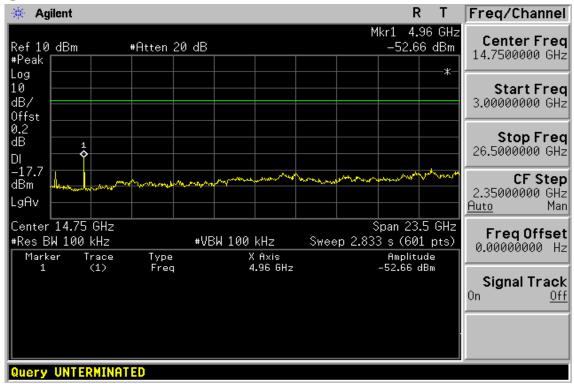


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 40 of 86



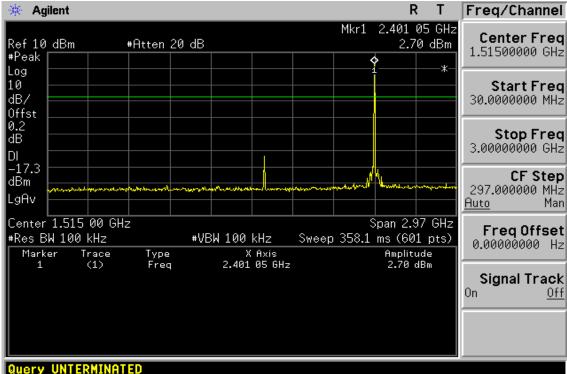



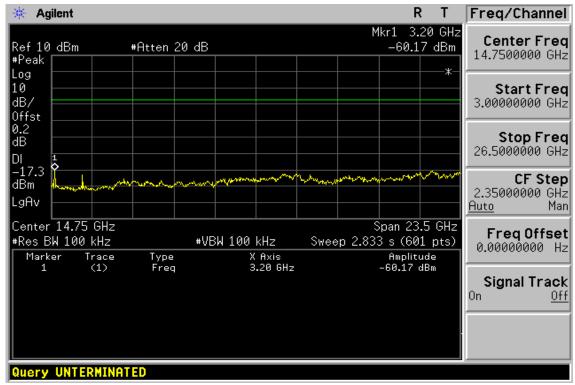


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 41 of 86

Ch Mid 30MHz – 3GHz

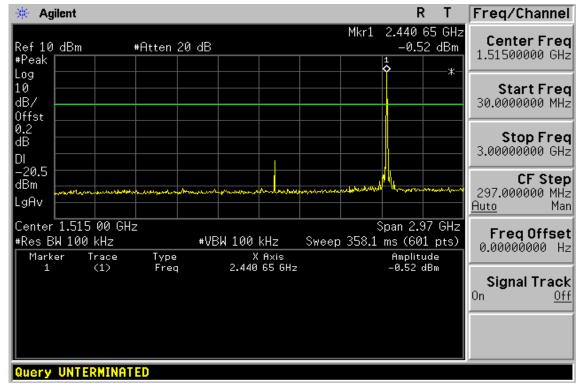

Ch Mid 3GHz – 26.5GHz

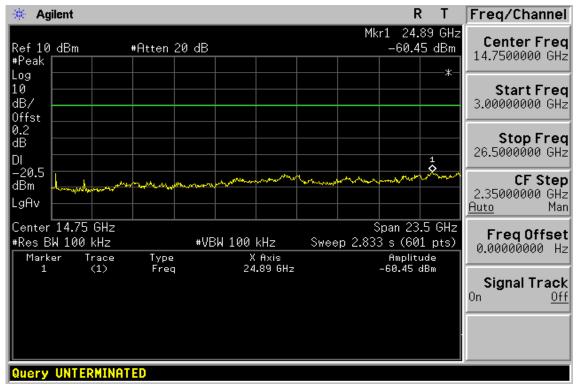


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Ch High 30MHz – 3GHz

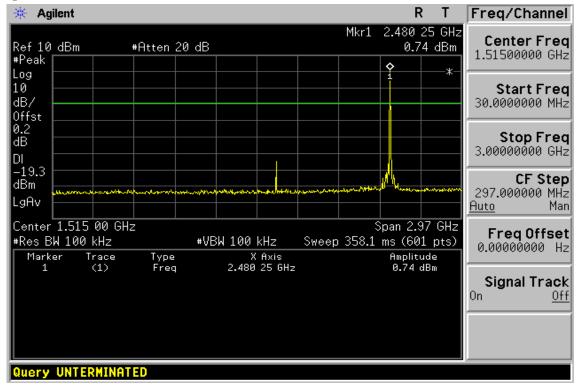

Ch High 3GHz – 26.5GHz

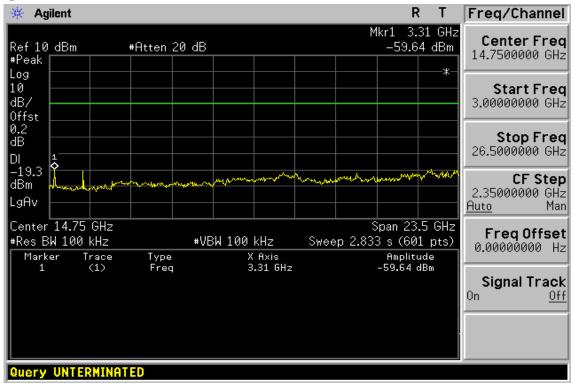

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Spurious Emission Measurement Result (below 1GHz) (Worst EDR mode)

Operation Mode	TX CH Low	Test Date	Jun. 30, 2010
Fundamental Frequency	2402MHz	Test By	Brian
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

Freq	. Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz	z) H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
143.4	9 V	Peak	57.16	-27.31	29.85	43.50	-13.65
221.0	9 V	Peak	62.41	-30.56	31.85	46.00	-14.15
259.8	9 V	Peak	62.12	-29.67	32.45	46.00	-13.55
284.1	4 V	Peak	60.23	-28.89	31.34	46.00	-14.66
494.6	3 V	Peak	58.56	-24.83	33.73	46.00	-12.27
800.1	8 V	Peak	50.65	-20.20	30.45	46.00	-15.55
121.1	8 H	Peak	66.55	-28.71	37.84	43.50	-5.66
153.1	9 Н	Peak	59.51	-26.97	32.54	43.50	-10.96
245.3	4 H	Peak	62.99	-29.82	33.17	46.00	-12.83
284.1	4 H	Peak	62.07	-28.89	33.18	46.00	-12.82
424.7	9 H	Peak	58.05	-25.49	32.56	46.00	-13.44
795.3	3 Н	Peak	51.99	-20.22	31.77	46.00	-14.23

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. GS Taiwan Ltd.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 44 of 86

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	Jun. 30, 2010
Fundamental Frequency	2441MHz	Test By	Brian
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

	Freq. Ant.Pol.		Detector Mode	Reading	Factor Actual FS		Limit3m	0	
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	65.89	V	Peak	60.97	-28.54	32.43	40.00	-7.57	
	145.43	V	Peak	57.38	-27.36	30.02	43.50	-13.48	
	259.89	V	Peak	61.90	-29.67	32.23	46.00	-13.77	
	286.08	V	Peak	60.07	-28.84	31.23	46.00	-14.77	
	499.48	V	Peak	58.05	-24.78	33.27	46.00	-12.73	
	795.33	V	Peak	51.56	-20.22	31.34	46.00	-14.66	
	121.18	Н	Peak	67.31	-28.71	38.60	43.50	-4.90	
	184.23	Н	Peak	63.34	-30.00	33.34	43.50	-10.16	
	242.43	Н	Peak	62.49	-29.87	32.62	46.00	-13.38	
	286.08	Н	Peak	62.81	-28.84	33.97	46.00	-12.03	
	303.54	Н	Peak	64.11	-28.24	35.87	46.00	-10.13	
	800.18	Н	Peak	55.36	-20.20	35.16	46.00	-10.84	

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. GS Taiwan Ltd.



Operation Mode	TX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480MHz	Test By	Brian
Temperature	25 °C	Pol	Ver./Hor.
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	140.58	V	Peak	56.40	-27.44	28.96	43.50	-14.54
	213.33	V	Peak	61.65	-31.01	30.64	43.50	-12.86
	247.28	V	Peak	60.99	-29.79	31.20	46.00	-14.80
	286.08	V	Peak	59.55	-28.84	30.71	46.00	-15.29
	494.63	V	Peak	57.92	-24.83	33.09	46.00	-12.91
	795.33	V	Peak	52.97	-20.22	32.75	46.00	-13.25
	121.18	Н	Peak	67.22	-28.71	38.51	43.50	-4.99
	245.34	Н	Peak	62.34	-29.82	32.52	46.00	-13.48
	286.08	Н	Peak	61.85	-28.84	33.01	46.00	-12.99
	366.59	Н	Peak	59.81	-26.74	33.07	46.00	-12.93
	417.03	Н	Peak	56.73	-25.64	31.09	46.00	-14.91
	798.24	Н	Peak	52.14	-20.21	31.93	46.00	-14.07

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz °
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd.



Operation Mode	TX CH Low	Test Date	Jun. 30, 2010
Fundamental Frequency	2402 MHz	Test By	Brian
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1598.0	50.02		-13.95	36.07		74.00	54.00	-37.93	Peak
4804.0	42.54		-6.01	36.53		74.00	54.00	-37.47	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	TX CH Low	Test Date	Jun. 30, 2010
Fundamental Frequency	2402 MHz	Test By	Brian
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1598.0	51.77		-13.95	37.82		74.00	54.00	-36.18	Peak
4804.0	43.09		-6.01	37.08		74.00	54.00	-36.92	Peak
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		
16814.0						74.00	54.00		
19216.0						74.00	54.00		
21618.0						74.00	54.00		
24020.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	TX CH Mid	Test Date	Jun. 30, 2010
Fundamental Frequency	2441 MHz	Test By	Brian
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1630.5	46.57		-13.80	32.77		74.00	54.00	-41.23	Peak
4882.0	42.10		-5.93	36.17		74.00	54.00	-37.83	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	TX CH Mid	Test Date	Jun. 30, 2010
Fundamental Frequency	2441 MHz	Test By	Brian
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1630.5	52.45		-13.80	38.65		74.00	54.00	-35.35	Peak
4882.0	42.04		-5.93	36.11		74.00	54.00	-37.89	Peak
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		
17087.0						74.00	54.00		
19528.0						74.00	54.00		
21969.0						74.00	54.00		
24410.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	TX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480 MHz	Test By	Brian
Temperature	25 ℃	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1643.5	49.91		-13.76	36.15		74.00	54.00	-37.85	Peak
4960.0	41.07		-5.87	35.20		74.00	54.00	-38.80	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	TX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480 MHz	Test By	Brian
Temperature	25 °C	Pol	Hor.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1643.5	51.99		-13.76	38.23		74.00	54.00	-35.77	Peak
4960.0	41.39		-5.87	35.52		74.00	54.00	-38.48	Peak
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		
17360.0						74.00	54.00		
19840.0						74.00	54.00		
22320.0						74.00	54.00		
24800.0						74.00	54.00		

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 52 of 86

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	RX CH Low	Test Date	Jun.30, 2010
Fundamental Frequency	2402MHz	Test By	Brian
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
((MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
1	153.19	V	Peak	56.60	-26.97	29.63	43.50	-13.87
1	196.84	V	Peak	60.70	-31.07	29.63	43.50	-13.87
2	255.04	V	Peak	61.69	-29.75	31.94	46.00	-14.06
2	287.05	V	Peak	59.31	-28.80	30.51	46.00	-15.49
Z	194.63	V	Peak	58.35	-24.83	33.52	46.00	-12.48
8	300.18	V	Peak	51.16	-20.20	30.96	46.00	-15.04
1	121.18	Н	Peak	66.71	-28.71	38.00	43.50	-5.50
2	256.98	Н	Peak	62.63	-29.71	32.92	46.00	-13.08
2	284.14	Н	Peak	62.08	-28.89	33.19	46.00	-12.81
2	421.88	Н	Peak	57.29	-25.54	31.75	46.00	-14.25
2	494.63	Н	Peak	54.80	-24.83	29.97	46.00	-16.03
8	300.18	Н	Peak	53.10	-20.20	32.90	46.00	-13.10

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Wet ST 日成 プレル Relat 電力 増加 に 解 の 目前 に アレット Physics Phy



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 53 of 86

Radiated Spurious Emission Measurement Result (below 1GHz)

D ()

Operation Mode	RX CH Mid	Test Date	Jun. 30, 2010
Fundamental Frequency	2441MHz	Test By	Brian
Temperature	25°C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	149.31	V	Peak	56.39	-27.10	29.29	43.50	-14.21
	245.34	V	Peak	60.69	-29.82	30.87	46.00	-15.13
	264.74	V	Peak	60.71	-29.48	31.23	46.00	-14.77
	286.08	V	Peak	59.97	-28.84	31.13	46.00	-14.87
	499.48	V	Peak	58.46	-24.78	33.68	46.00	-12.32
	795.33	V	Peak	52.37	-20.22	32.15	46.00	-13.85
	119.24	Н	Peak	66.84	-28.89	37.95	43.50	-5.55
	245.34	Н	Peak	62.92	-29.82	33.10	46.00	-12.90
	256.98	Н	Peak	63.84	-29.71	34.13	46.00	-11.87
	286.08	Н	Peak	61.98	-28.84	33.14	46.00	-12.86
	417.03	Н	Peak	56.70	-25.64	31.06	46.00	-14.94
	494.63	Н	Peak	54.45	-24.83	29.62	46.00	-16.38
	800.18	Н	Peak	53.59	-20.20	33.39	46.00	-12.61

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz \circ
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 54 of 86

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	RX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480MHz	Test By	Brian
Temperature	25 ℃	Pol	Ver./Hor
Humidity	65%		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	143.49	V	Peak	56.37	-27.31	29.06	43.50	-14.44
	158.04	V	Peak	55.86	-26.99	28.87	43.50	-14.63
	259.89	V	Peak	61.03	-29.67	31.36	46.00	-14.64
	288.99	V	Peak	60.66	-28.76	31.90	46.00	-14.10
	494.63	V	Peak	58.32	-24.83	33.49	46.00	-12.51
	795.33	V	Peak	51.17	-20.22	30.95	46.00	-15.05
	121.18	Н	Peak	68.52	-28.71	39.81	43.50	-3.69
	245.34	Н	Peak	63.31	-29.82	33.49	46.00	-12.51
	284.14	Н	Peak	61.68	-28.89	32.79	46.00	-13.21
	426.73	Н	Peak	57.90	-25.44	32.46	46.00	-13.54
	615.88	Н	Peak	55.16	-22.50	32.66	46.00	-13.34
	798.24	Н	Peak	52.88	-20.21	32.67	46.00	-13.33

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz $\,\circ\,$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	RX CH Low	Test Date	Jun. 30, 2010
Fundamental Frequency	2402 MHz	Test By	Brian
Temperature	25°C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1598.0	51.09		-13.95	37.14		74.00	54.00	-36.86	Peak
2391.0	46.01		-10.76	35.25		74.00	54.00	-38.75	Peak
4804.0						74.00	54.00		
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	RX CH Low	Test Date	Jun. 30, 2010
Fundamental Frequency	2402 MHz	Test By	Brian
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1598.0	52.14		-13.95	38.19		74.00	54.00	-35.81	Peak
2391.0	48.87		-10.76	38.11		74.00	54.00	-35.89	Peak
4804.0						74.00	54.00		
7206.0						74.00	54.00		
9608.0						74.00	54.00		
12010.0						74.00	54.00		
14412.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	RX CH Mid	Test Date	Jun. 30, 2010
Fundamental Frequency	2441 MHz	Test By	Brian
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1630.5	46.99		-13.80	33.19		74.00	54.00	-40.81	Peak
2443.0	44.61		-10.59	34.02		74.00	54.00	-39.98	Peak
4882.0						74.00	54.00		
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	RX CH Mid	Test Date	Jun. 30, 2010
Fundamental Frequency	2441 MHz	Test By	Brian
Temperature	25 °C	Pol	Hor
Humidity	65%		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1630.5	52.84		-13.80	39.04		74.00	54.00	-34.96	Peak
2443.0	47.44		-10.59	36.85		74.00	54.00	-37.15	Peak
4882.0						74.00	54.00		
7323.0						74.00	54.00		
9764.0						74.00	54.00		
12205.0						74.00	54.00		
14646.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Mode	RX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480 MHz	Test By	Brian
Temperature	25 ℃	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1643.5	49.88		-13.76	36.12		74.00	54.00	-37.88	Peak
2475.5	43.65		-10.46	33.19		74.00	54.00	-40.81	Peak
4960.0						74.00	54.00		
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Operation Mode	RX CH High	Test Date	Jun. 30, 2010
Fundamental Frequency	2480 MHz	Test By	Brian
Temperature	25 ℃	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1643.5	52.41		-13.76	38.65		74.00	54.00	-35.35	Peak
2475.5	47.66		-10.46	37.20		74.00	54.00	-36.80	Peak
4960.0						74.00	54.00		
7440.0						74.00	54.00		
9920.0						74.00	54.00		
12400.0						74.00	54.00		
14880.0						74.00	54.00		

Remark:

- (1) Measuring frequencies scanned from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column
- (4) Spectrum Peak Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9. FREQUENCY SEPARATION

9.1. Standard Applicable:

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

According to RSS 210 issue 6, A8.1(b), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2. Measurement Equipment Used:

Refer to section 6.2 for details.

9.3. Test Set-up:

Refer to section 6.3 for details.

9.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Adjust Span to 3.0 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

9.5. Measurement Result:

Channel separation (MHz)	Limit	Result
1	>=25KHz or 2/3 times 20dB bandwidth	PASS


Note: Refer to next page for plots.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Frequency Separation Test Data

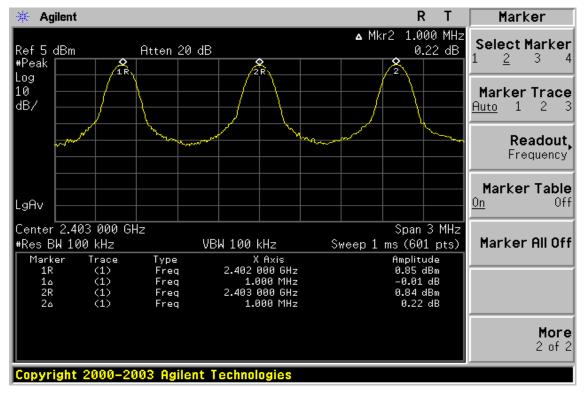

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488 www.tw.sgs.com



10. NUMBER OF HOPPING FREQUENCY

10.1. Standard Applicable:

According to \$15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

According to RSS-210 issue 7,§A8.1(d), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum conducted output power shall not exceed 1 W. For all other frequency hopping systems, the maximum peak conducted output power shall not exceed 0.125 W.

10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

10.3. Test Set-up:

Refer to section 6.3 for details.

10.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW=430KHz, VBW=1.3MHz,
- 5. Max hold, view and count how many channel in the band.

10.5. Measurement Result:

Note: Refer to next page for plots.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 64 of 86

Channel Number 2.4 GHz – 2.441GHz

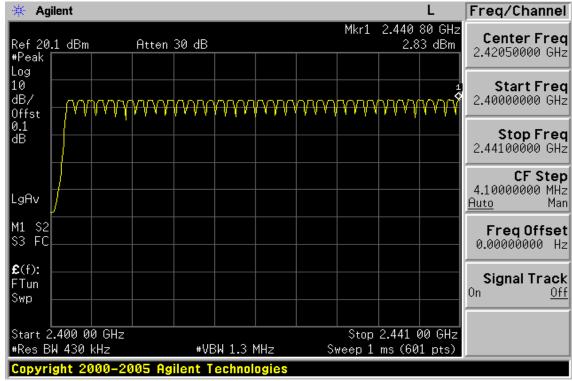



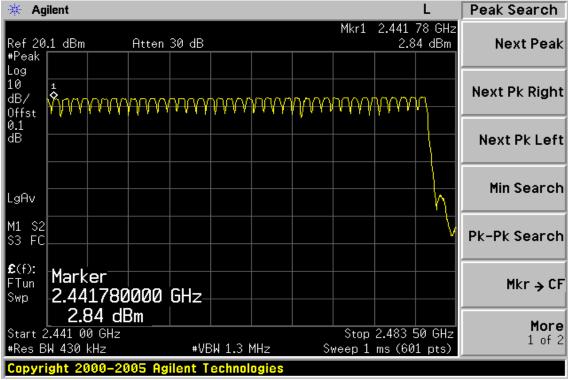


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 65 of 86

AFH Mode

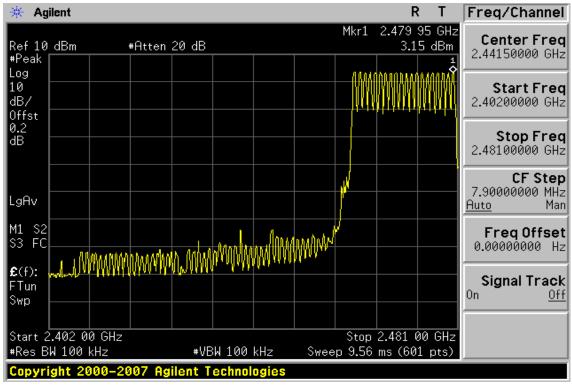

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



11. TIME OF OCCUPANCY (DWELL TIME)

11.1. Standard Applicable:

According to \$15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

According to RSS-210 issue 7,§A8.1(d), Frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

11.3. Test Set-up:

Refer to section 6.3 for details.

11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW=1MHz,VBW=3MHz, Span = 0Hz, Adjust Sweep = 15ms.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



11.5. Measurement Result:

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low:	DH1 time slot = $0.417 \text{ (ms)} * (1600/(2*79)) * 31.6 = 133.44 \text{ (ms)}$
	DH3 time slot = 1.667 (ms) * (1600/(4*79)) * 31.6 = 266.72 (ms)
	DH5 time slot = 2.925 (ms) * (1600/(6*79)) * 31.6 = 312.00 (ms)
CH Mid:	DH1 time slot = 0.417 (ms) * (1600/(2*79)) * 31.6 = 133.44 (ms)
	DH3 time slot = 1.667 (ms) * (1600/(4*79)) * 31.6 = 266.72 (ms)
	DH5 time slot = 2.925 (ms) * (1600/(6*79)) * 31.6 = 312.00 (ms)
CH High:	DH1 time slot = $0.417 \text{ (ms)} * (1600/(2*79)) * 31.6 = 133.44 \text{ (ms)}$
	DH3 time slot = 1.667 (ms) * (1600/(4*79)) * 31.6 = 266.72 (ms)
	DH5 time slot = 2.925 (ms) * (1600/(6*79)) * 31.6 = 312.00 (ms)

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

際計分有認明・匹報告結果僅到測点之体結算員「同時匹体給量体留90天。本報告去総本公司書面計可)、个可部位複聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 68 of 86

CH-Low



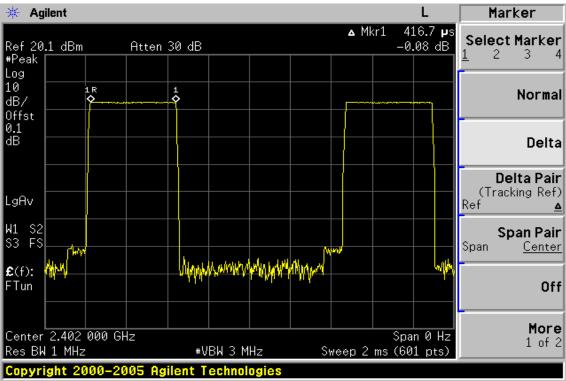

DH3

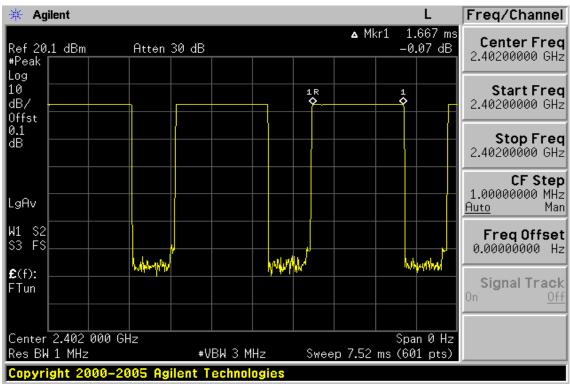

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the style and the aster and the aster and the style and th




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 69 of 86

DH5

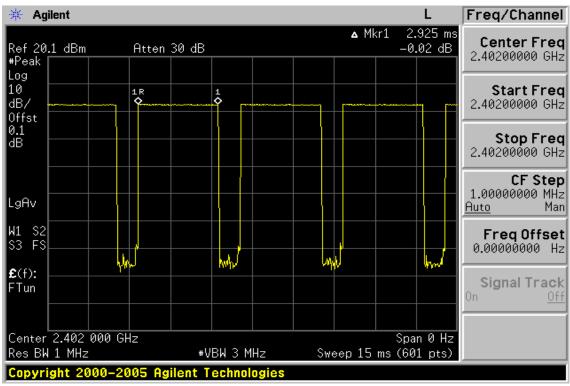

CH-Mid DH1

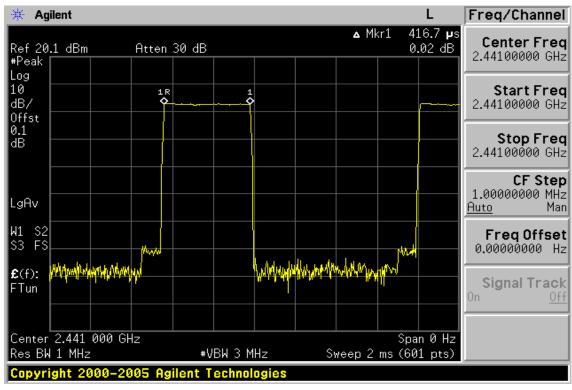


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 70 of 86

DH3

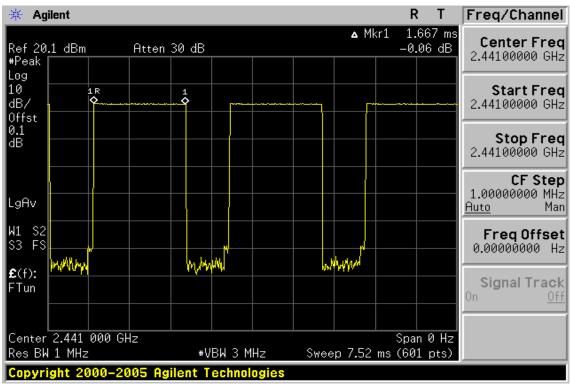

DH5

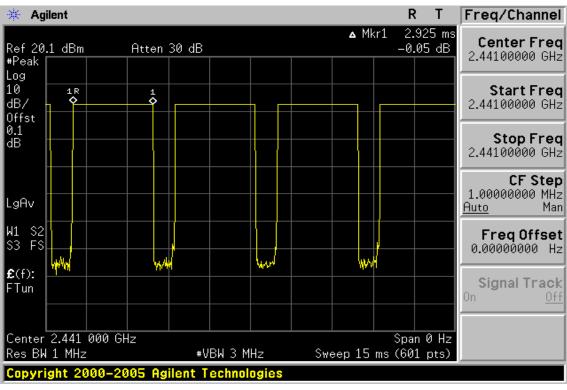

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client and the transaction contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document be transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 71 of 86

CH-High DH1

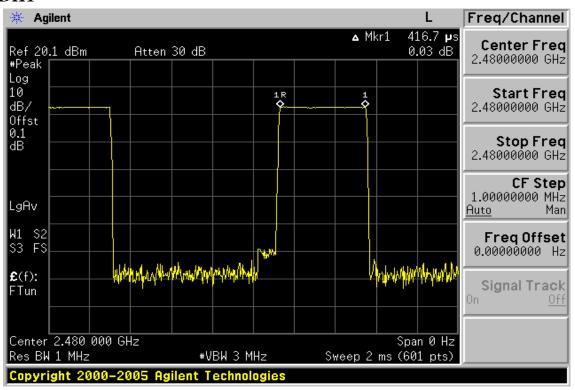

DH3

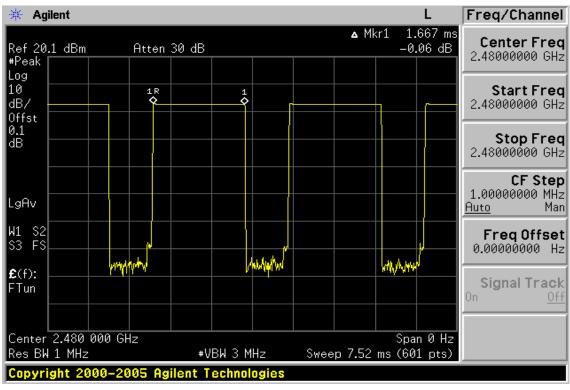


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the style and the aster and the aster and the style and th



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 72 of 86

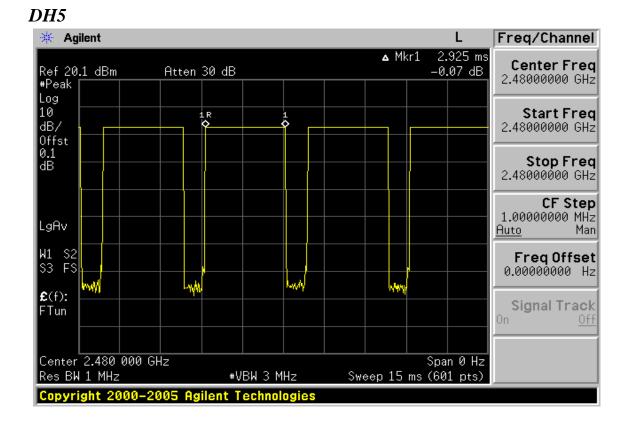

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the style and the aster and the aster and the style and th

f (886-2) 2298-0488



12. Peak Power Spectral Density

12.1. Standard Applicable:

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

According to RSS-210 issue 7, §A8.2(b) and §A8.3(2), The transmitter power spectral density (into the antenna) shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document terms and be produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12.5. Measurement Result:

BDR Mode

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-7.82	0.00	-7.82	8
Mid	-7.92	0.00	-7.92	8
High	-8.00	0.00	-8.00	8

EDR Mode

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-9.00	0.00	-9.00	8
Mid	-8.78	0.00	-8.78	8
High	-9.21	0.00	-9.21	8

Note: offset 0.2dB for path lose.

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of liability, indemnifica-and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd.




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 75 of 86

Power Spectral Density Test Plot (CH-Low) (BDR)

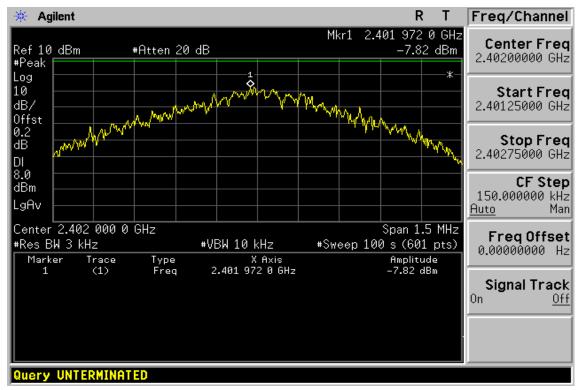

Power Spectral Density Test Plot (CH-Mid) (BDR)

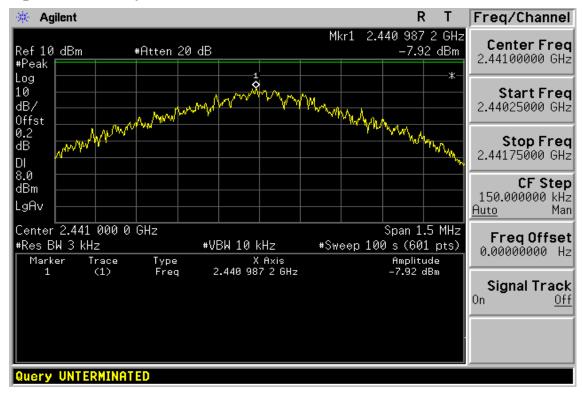

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 76 of 86

Power Spectral Density Test Plot (CH-High) (BDR)

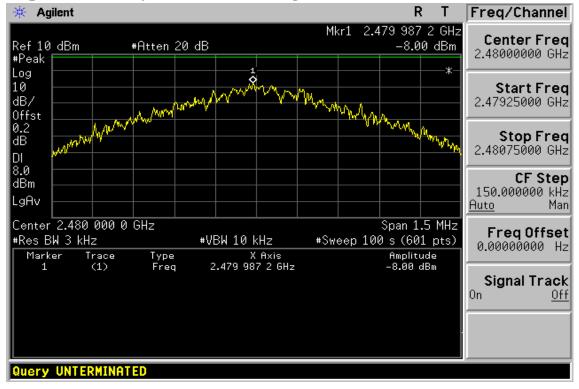

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 77 of 86

Power Spectral Density Test Plot (CH-Low) (EDR)

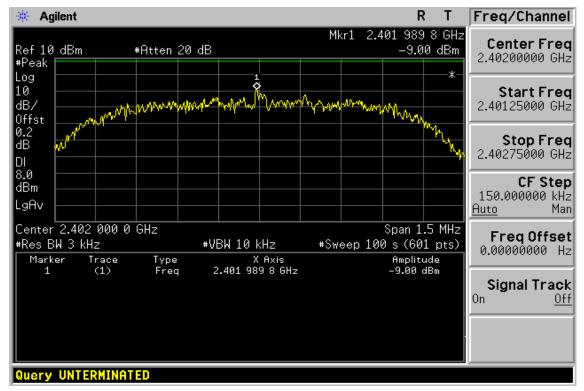

Power Spectral Density Test Plot (CH-Mid) (EDR)

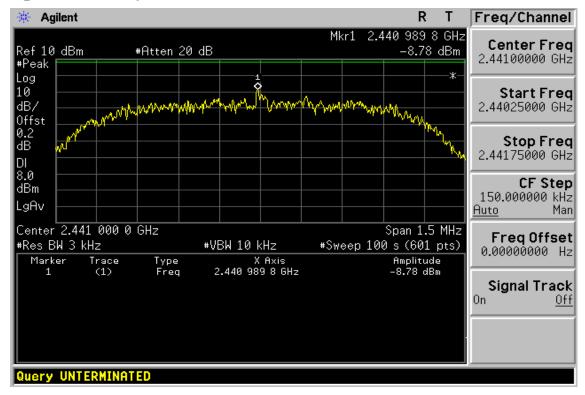

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.	No. 134, WU Kung Road, Wuku Indu	istrial Zone, Taipel County, Taiwan /台:	化縣五股上美區五上路 134 號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com
			Member of SGS Group



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 78 of 86

Power Spectral Density Test Plot (CH-High) (EDR)

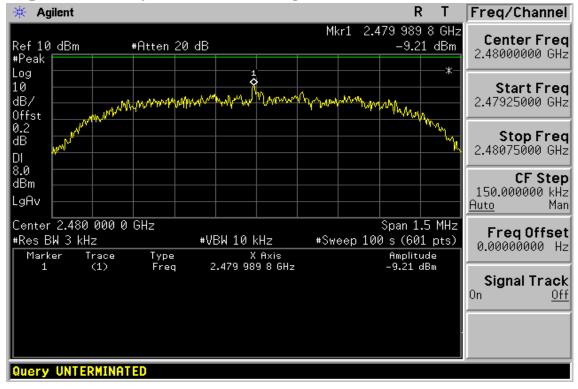

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13. 20dB Bandwidth & 99% Bandwidth

13.1. Standard Applicable:

According to §15.247(a)(1), and RSS210 A8.1(b) for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

13.2. Measurement Equipment Used:

Refer to section 6.2 for details.

13.3. Test Set-up:

Refer to section 6.3 for details.

13.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnificareleation is sold by the Conjugations for Electronic Documents at <u>www.sgs.com/terms</u> and <u>conjugations</u> and and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd.

www.tw.sgs.com



FCC ID: AL8-BB903P IC: 457A-BB903P

Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 80 of 86

13.5. Measurement Result:

20dB Bandwidth : BDR mode

СН	Bandwidth	
	(kHz)	
Lower	925.358	
Mid	926.446	
Higher	928.142	

20dB Bandwidth : EDR mode

СН	Bandwidth	2/3 Bandwidth
	(MHz)	(MHz)
Lower	1.25	0.833
Mid	1.253	0.835
Higher	1.25	0.833

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to its General Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



99% Bandwidth : BDR Mode

СН	Bandwidth (kHz)
Lower	875.1352
Mid	871.9435
Higher	859.3529

99% Bandwidth : EDR Mode

СН	Bandwidth (MHz)
Lower	1.1943
Mid	1.1868
Higher	1.1827

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms</u> and <u>conditions.htm</u> and, for electronic format documents, subject to its General Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnifica-tion and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



FCC ID: AL8-BB903P IC: 457A-BB903P Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 82 of 86

BDR Mode 20dB Bandwidth & 99% Bandwidth Test Data CH-Low



20dB Bandwidth & 99% Bandwidth Test Data CH-Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 83 of 86



20dB Bandwidth & 99% Bandwidth Test Data CH-High

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the style and the analysis and the analysis and the analysis and the approval of the style and the style and the analysis and the style and the approval of the style and the style and

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




FCC ID: AL8-BB903P IC: 457A-BB903P Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 84 of 86

EDR Mode 20dB Bandwidth & 99% Bandwidth Test Data CH-Low

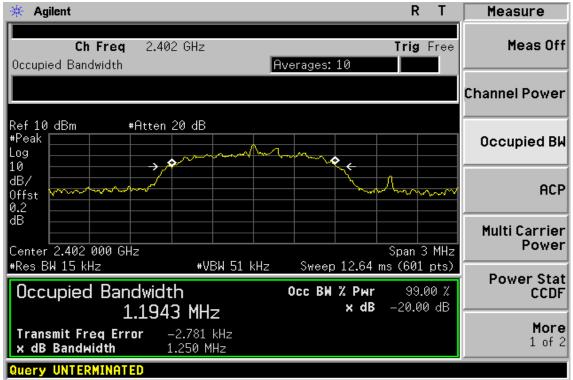

20dB Bandwidth & 99% Bandwidth Test Data CH-Mid

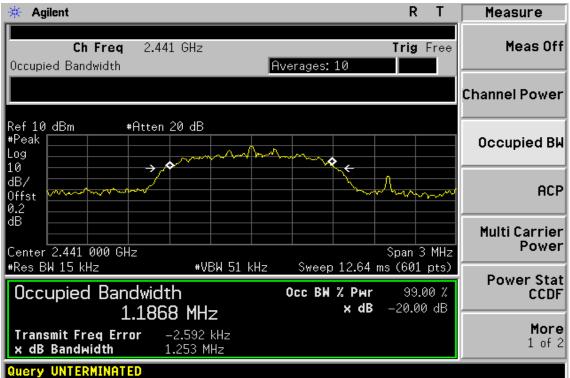


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why strain the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is insued by the Company subject to its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EF/2010/40004~5 Issue Date: Jul. 06, 2010 Page: 85 of 86

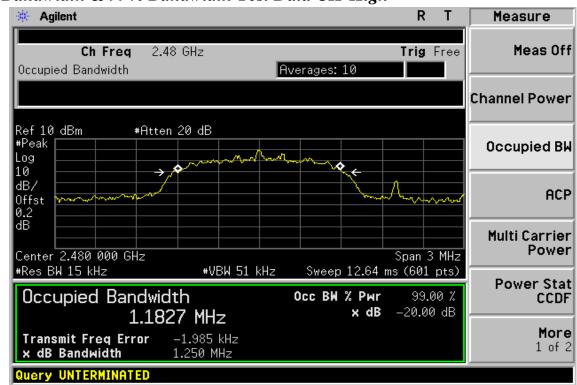

20dB Bandwidth & 99% Bandwidth Test Data CH-High

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

why style and the and the and the analysis in the and the analysis is a style and the analysis in the analysis is a style and the approval of the transaction form the style and the analysis and the approval of the style and the analysis and the analysis and the analysis and the approval of the style and the style and the analysis and the style and the approval of the style and the style and



14. ANTENNA REQUIREMENT

14.1. Standard Applicable:

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-GEN 7.1.4, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the high-est-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

14.2. Antenna Connected Construction:

The directional gains of antenna used for transmitting is 0.93dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taiwei County, Taiwan /台北縣五股工業區五工路 134 號

f (886-2) 2298-0488 www.tw.sgs.com