


TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	4
	Standard Test Conditions and Engineering Practices	5
2.1046(a)	Carrier Output Power (Conducted)	6
2.1051	Unwanted Emissions (Transmitter Conducted)	8
2.1053(a)	Field Strength of Spurious Radiation	11
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	14
90.214	Transient Frequency Behavior	18
2.1047(a)	Audio Low Pass Filter (Voice Input)	24
2.1047(a)	Audio Frequency Response	27
2.1047(b)	Modulation Limiting	29
2.1055(a)(1)	Frequency Stability (Temperature Variation)	34
2.1055(b)(1)	Frequency Stability (Voltage Variation)	37
2.202(g)	Necessary Bandwidth and Emission Bandwidth	38

PAGE NO.

1 of 38.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SiT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85224
- c) Report Number: d98a0040
- d) Client: Kenwood Communications Corporation  
P.O. Box 22745  
Long Beach, CA 90801-5745
- e) Identification: TKR-830  
FCC ID: ALH24673110  
Description: UHF FM REPEATER
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: October 19, 1998  
EUT Received: September 4, 1998
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:   
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 38.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

22, 74, 90, 95

Sub-part 2.1033

(c) (1): NAME AND ADDRESS OF APPLICANT:

Kenwood Communications Corporation  
2201 E. Dominguez St  
P.O. Box 22745  
Long Beach, CA 90801-5745

VENDOR:

Kenwood Communications Corporation  
P.O. Box 22745  
Long Beach, CA 90801-5745

(c) (2): FCC ID: ALH24673110

MODEL NO: TKR-830

(c) (3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 16K0F3E, 11K0F3E

(c) (5): FREQUENCY RANGE, MHz: 450 to 480

(c) (6): POWER RATING, Watts: 5  
\_\_\_ Switchable \_\_\_ Variable \_\_\_ x N/A

(c) (7): MAXIMUM POWER RATING, Watts: 300

PAGE NO. 3 of 38.

Subpart 2.1033 (continued)

(c) (8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,  
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
COLLECTOR VOLTAGE, Vdc = per manual  
SUPPLY VOLTAGE, Vdc = 13.6

(c) (9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:  
Including description of circuitry & devices provided for  
determining and stabilizing frequency, for suppression of  
spurious radiation, for limiting modulation and limiting  
power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13): DIGITAL MODULATION DESCRIPTION:

ATTACHED EXHIBITS  
x N/A

(c) (14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 38.

Sub-part

2.1033(c) (14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- ☒ 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- ☒ 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- ☒ 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- ☒ 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 101 - Fixed Microwave Services

PAGE NO.

5 of 38.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 6 of 38.  
NAME OF TEST: Carrier Output Power (Conducted)  
SPECIFICATION: 47 CFR 2.1046(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

MEASUREMENT RESULTS  
 (Worst case)

FREQUENCY OF CARRIER, MHz = 465, 450, 480

<u>POWER SETTING</u>	<u>R. F. POWER, WATTS</u>
Low	5

SUPERVISED BY:

*Morton Flom P. Eng.*


Morton Flom, P. Eng.

PAGE NO.

7 of 38.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT  
 TEST 2: FREQUENCY STABILITY

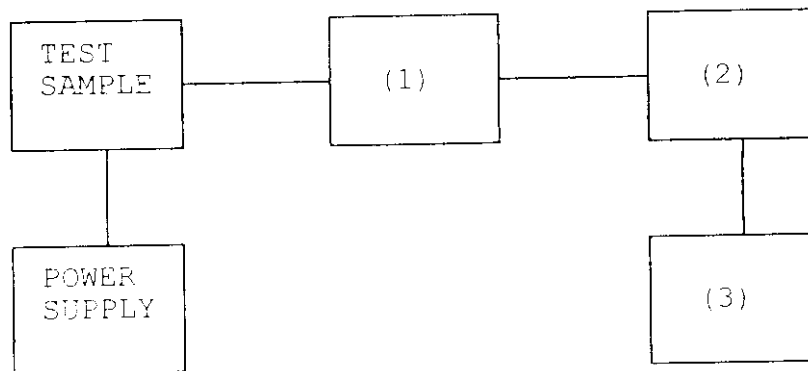

Asset Description

s/n

## (1) COAXIAL ATTENUATOR

_____	i00122 Narda 766-10	7802
_____	i00123 Narda 766-10	7802A
_____	i00069 Bird 8329 (30 dB)	1006
<u>  x  </u>	i00113 Sierra 661A-3D	1059

## (2) POWER METERS

_____	i00014 HP 435A	1733A05836
<u>  x  </u>	i00039 HP 436A	2709A26776
<u>  x  </u>	i00020 HP 8901A POWER MODE	2105A01087

## (3) FREQUENCY COUNTER

_____	i00042 HP 5383A	1628A00959
<u>  x  </u>	i00019 HP 5334B	2704A00347
<u>  x  </u>	i00020 HP 8901A FREQUENCY MODE	2105A01087



PAGE NO. 8 of 38.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 465, 450, 480

SPECTRUM SEARCHED, GHz = 0 to 10 x  $F_c$

MAXIMUM RESPONSE, Hz = 2820

ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT

LIMIT(S), dBc  
 $-(43+10 \times \log P) = -50$  (5 Watts)

SUPERVISED BY:


  
 Morton Flom, P. Eng.

PAGE NO.

9 of 38.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

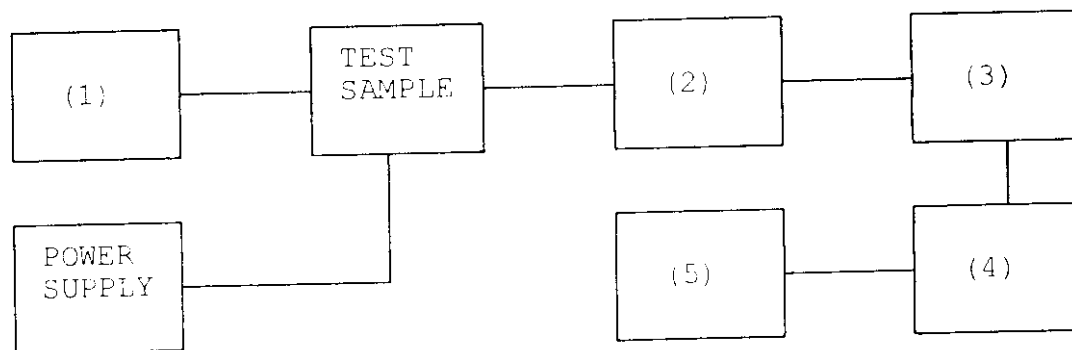

Asset Description

s/n

(1) <u>AUDIO OSCILLATOR/GENERATOR</u>		
<u>    </u> i00010	HP 204D	1105A04683
<u>    </u> i00017	HP 8903A	2216A01753
<u>  x  </u> i00012	HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>		
<u>    </u> i00122	Narda 766-10	7802
<u>    </u> i00123	Narda 766-10	7802A
<u>  x  </u> i00069	Bird 8329 (30 dB)	1006
<u>  x  </u> i00113	Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>		
<u>  x  </u> i00126	Eagle TNF-1	100-250
<u>  x  </u> i00125	Eagle TNF-1	50-60
<u>  x  </u> i00124	Eagle TNS-1	250-850
(4) <u>SPECTRUM ANALYZER</u>		
<u>  x  </u> i00048	HP 8566B	2511A01467
<u>    </u> i00029	HP 8563E	3213A00104
(5) <u>SCOPE</u>		
<u>    </u> i00058	HP 1741A	2251A09356
<u>    </u> i00030	HP 54502A	2927A0209
<u>    </u> i00071	Tektronix 935	1935-B011343

PAGE NO.

10 of 38.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)  
 g9870136: 1998-Jul-23 Thu 10:16:00  
 STATE: 2:High Power


FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
465.000000	930.286000	-42.8	-79.7	-29.8
465.000000	1394.673000	-41.7	-78.6	-28.7
465.000000	1859.847000	-42.2	-79.1	-29.2
465.000000	2325.140000	-41.5	-78.4	-28.5
465.000000	2790.300000	-44.4	-81.3	-31.4
465.000000	3255.473000	-44.1	-81	-31.1
465.000000	3720.091000	-44.6	-81.5	-31.6
465.000000	4184.848000	-43.8	-80.7	-30.8
465.000000	4649.656000	-44.2	-81.1	-31.2
465.000000	5114.859000	-44.1	-81	-31.1
465.000000	5580.020000	-42.9	-79.8	-29.9
465.000000	6044.651000	-37.9	-74.8	-24.9
465.000000	6510.173000	-38.6	-75.5	-25.6
465.000000	6975.416000	-38.4	-75.3	-25.4

PAGE NO. 11 of 38.  
NAME OF TEST: Field Strength of Spurious Radiation  
SPECIFICATION: 47 CFR 2.1053(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.  
  
The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
6. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
7. The worst case for all channels is shown.
8. Measurement results: ATTACHED FOR WORST CASE

## RADIATED TEST SETUP

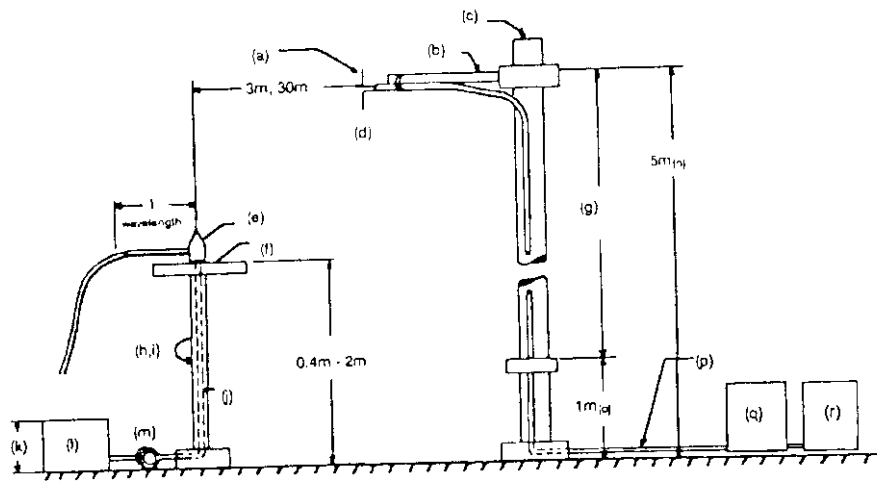

NOTES:

- NOTES:
- |  |   |
|--|---|
| (a) Search Antenna - Rotatable on boom                                   | (j) Cables routed through hollow turntable center |
| (b) Non-metallic boom  | (k) 30 cm or less                                 |
| (c) Non-metallic mast  | (l) External power source                         |
| (d) Adjustable horizontally  | (m) 10 cm diameter coil of excess cable           |
| (e) Equipment Under Test   | (n) 25 cm (V), 1 m-7 m (V, H)                     |
| (f) Turntable  | (o) 25 cm from bottom end of 'V', 1m normally     |
| (g) Boom adjustable in height.   | (p) Calibrated Cable at least 10m in length       |
| (h) External control cables routed horizontally at least one wavelength. | (q) Amplifier (optional)                          |
| (i) Rotatable  | (r) Spectrum Analyzer                             |

Asset	Description	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>				
_____	i00065	EMCO 3109B 100Hz-50MHz	2336	12 mo.
_____	i00033	Singer 94593-1 10kHz-32MHz	0219	12 mo.
_____	x i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo. Oct-98
_____	x i00089	Apriel 2001 200MHz-1GHz	001500	12 mo. Oct-98
_____	x i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo. Oct-98
_____	i00085	EMCO 3116 10GHz-40GHz	2076	12 mo.
<u>AMPLIFIER</u>				
_____	i00028	HP 8449A	2749A00121	12 mo. Mar-98
<u>SPECTRUM ANALYZER</u>				
_____	i00029	HP 8563E	3213A00104	12 mo.
_____	x i00033	HP 85462A	3625A00357	12 mo. Dec-97
_____	i00048	HP 8566B	2511AD1467	6 mo. Mar-98

PAGE NO. 13 of 38.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT

<u>EMISSION, MHz/HARMONIC</u>	<u>SPURIOUS LEVEL, dBc</u>
-------------------------------	----------------------------

2nd to 10th	<-70
-------------	------

SUPERVISED BY:

*Morton Flom P. Eng.*

Morton Flom, P. Eng.

PAGE NO. 14 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

15 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g9870155: 1998-Jul-23 Thu 09:53:00  
 STATE: 2:High Power

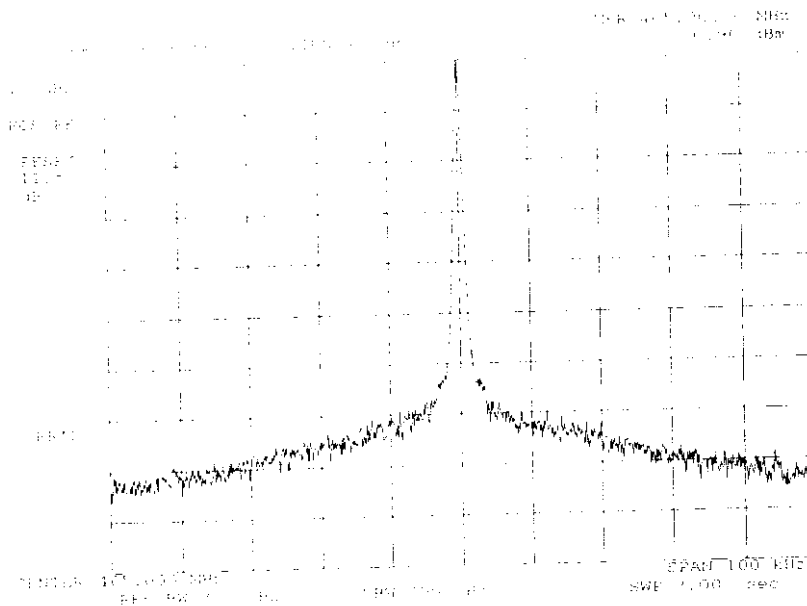

POWER:  
 MODULATION:

HIGH  
 NONE

SUPERVISED BY:

*Morton Flom P. Eng.*


Morton Flom, P. Eng.



PAGE NO.

16 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g9870134: 1998-Jul-23 Thu 09:55:00  
 STATE: 2:High Power

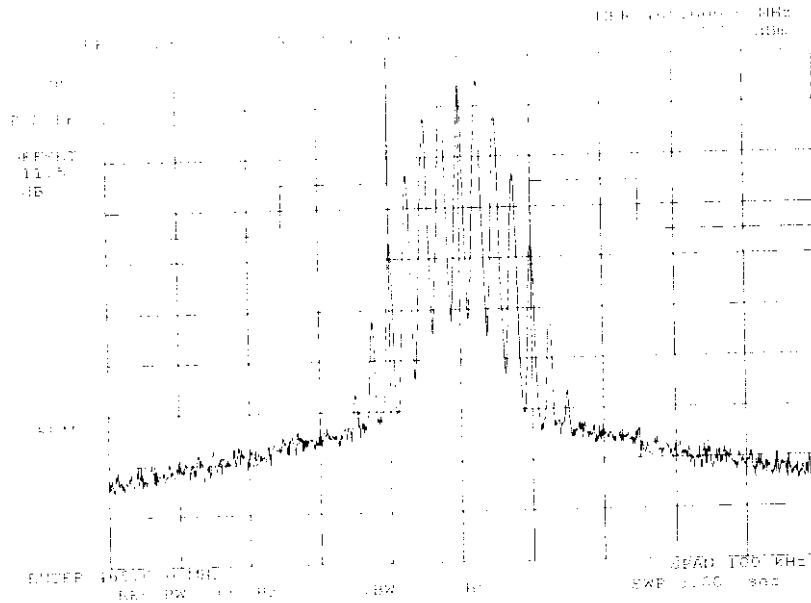

POWER:  
 MODULATION:

HIGH  
 VOICE: 2500 Hz SINE WAVE  
 MASK: B, VHF/UHF 25kHz,  
 w/LPF

SUPERVISED BY:


*Morton Flom P. Eng.*

Morton Flom, P. Eng.

PAGE NO.

17 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g9870177: 1998-Jul-23 Thu 09:59:00  
 STATE: 2:High Power

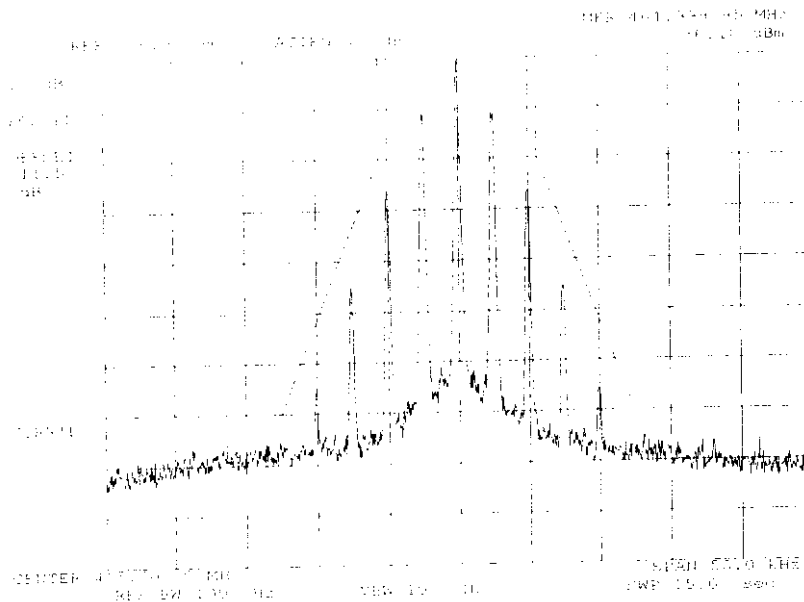

POWER:  
 MODULATION:

HIGH  
 VOICE: 2500 Hz SINE WAVE  
 MASK: D, VHF/UHF 12.5kHz BW

SUPERVISED BY:

*Morton Flom P. Eng.*  
 Morton Flom, P. Eng.

PAGE NO. 18 of 38.

NAME OF TEST: Transient Frequency Behavior

SPECIFICATION: 47 CFR 90.214

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19

TEST EQUIPMENT: As per attached page

### MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a guide.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

LEVELS MEASURED:	
step f, dBm	= -11.7
step h, dBm	= -33.9
step l, dBm	= 16.5


*Morton Flom P. Eng.*

Morton Flom, P. Eng.

SUPERVISED BY:

PAGE NO.

19 of 38.

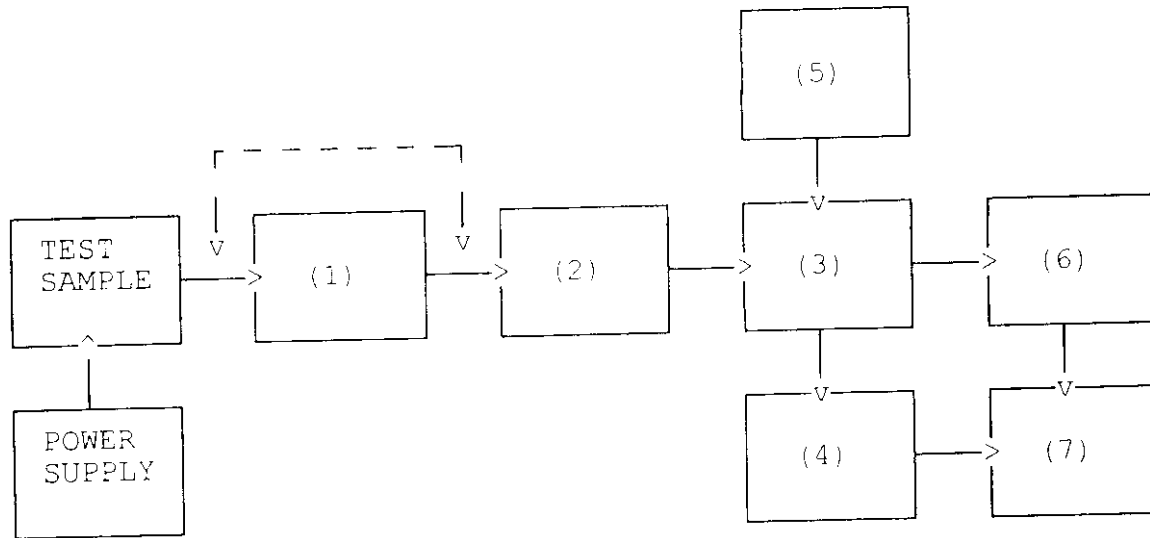TRANSIENT FREQUENCY BEHAVIOR

Asset Description

s/n

(1) ATTENUATOR (Removed after 1st step)

x	i00112 Philco 30 dB	989
---	---------------------	-----

(2) ATTENUATOR

i00112	Philco 30 dB	989
--------	--------------	-----

i00172	Bird 30 dB	989
--------	------------	-----

x	i00122 Narda 10 dB	7802
---	--------------------	------

i00123	Narda 10 dB	7802A
--------	-------------	-------

i00110	Kay Variable	145-387
--------	--------------	---------

(3) COMBINER

x	i00154 4 x 25 $\Omega$ COMBINER	154
---	---------------------------------	-----

(4) CRYSTAL DETECTOR

x	i00159 HP 8470B	1822A10054
---	-----------------	------------

(5) RF SIGNAL GENERATOR

i00018	HP 8656A	2228A03472
--------	----------	------------

i00031	HP 8656A	2402A06180
--------	----------	------------

x	i00067 HP 8920A	3345U01242
---	-----------------	------------

(6) MODULATION ANALYZER

x	i00020 HP 8901A	2105A01087
---	-----------------	------------


(7) SCOPE

x	i00030 HP 54502A	2927A00209
---	------------------	------------

PAGE NO. \_\_\_\_\_

20 of 38.

NAME OF TEST: Transient Frequency Behavior  
g9870119: 1998-Jul-23 Thu 08:35:00  
STATE: 0:General

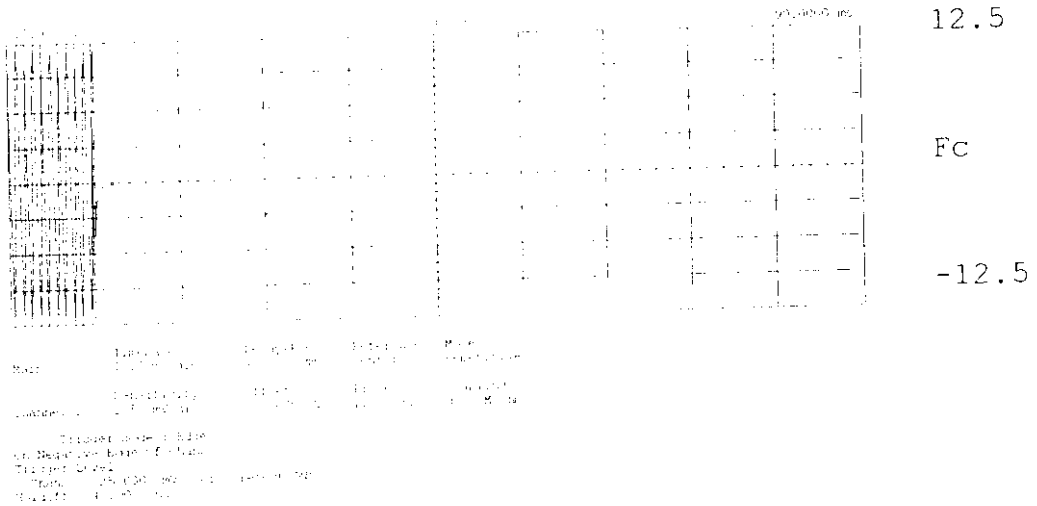

POWER:  
MODULATION:  
DESCRIPTION:

n/a  
Ref Gen=12.5 kHz Deviation  
CARRIER ON TIME


SUPERVISED BY:

M. Flom P. Eng.  
Morton Flom, P. Eng.

PAGE NO.

21 of 38.


NAME OF TEST: Transient Frequency Behavior  
 g9870125: 1998-Jul-23 Thu 08:38:00  
 STATE: 0:General

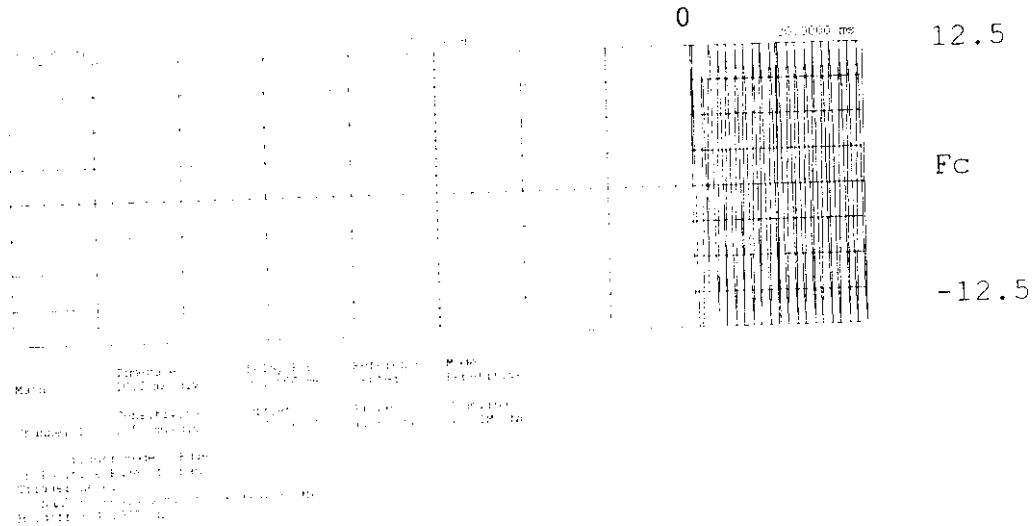

PAGE NO.

22 of 38.

NAME OF TEST: Transient Frequency Behavior  
g9870116: 1998-Jul-23 Thu 08:26:00  
STATE: 0:General

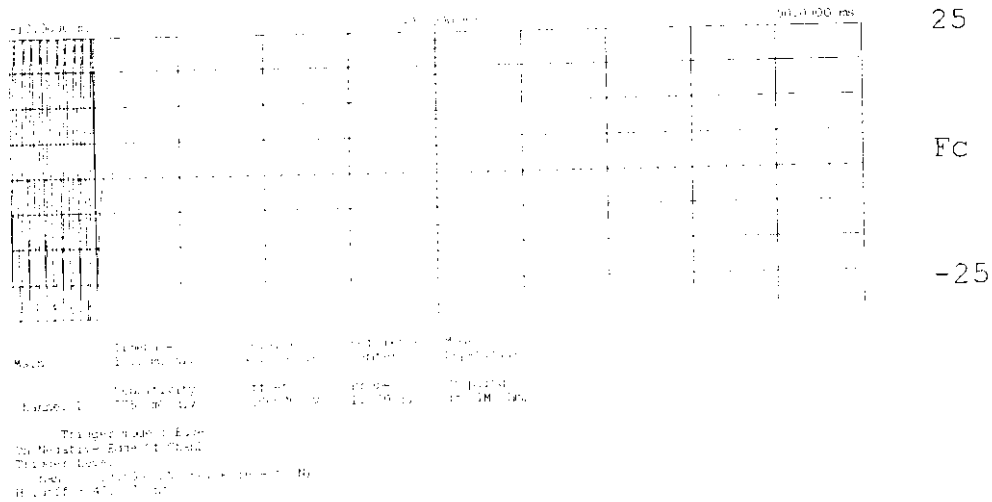

POWER:  
MODULATION:  
DESCRIPTION:

n/a  
Ref Gen=25 kHz Deviation  
CARRIER ON TIME

SUPERVISED BY:


Am. Inst. P. Eng.

Morton Flom, P. Eng.

PAGE NO.

23 of 38.

NAME OF TEST: Transient Frequency Behavior  
g9870131: 1998-Jul-23 Thu 08:38:00  
STATE: 0:General

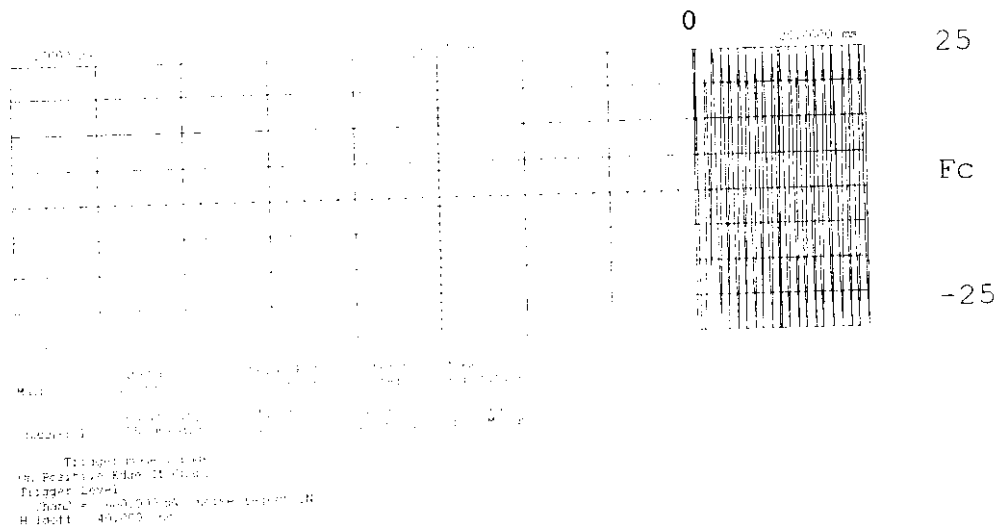

POWER:  
MODULATION:  
DESCRIPTION:

n/a  
Ref Gen=12.5 kHz Deviation  
CARRIER OFF TIME

SUPERVISED BY:

M. Flom P. Eng.  
Morton Flom, P. Eng.



PAGE NO. 24 of 38.  
NAME OF TEST: Audio Low Pass Filter (Voice Input)  
SPECIFICATION: 47 CFR 2.1047(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

25 of 38.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION  
 TEST B. AUDIO FREQUENCY RESPONSE  
 TEST C. HUM AND NOISE LEVEL  
 TEST D. RESPONSE OF LOW PASS FILTER  
 TEST E. MODULATION LIMITING

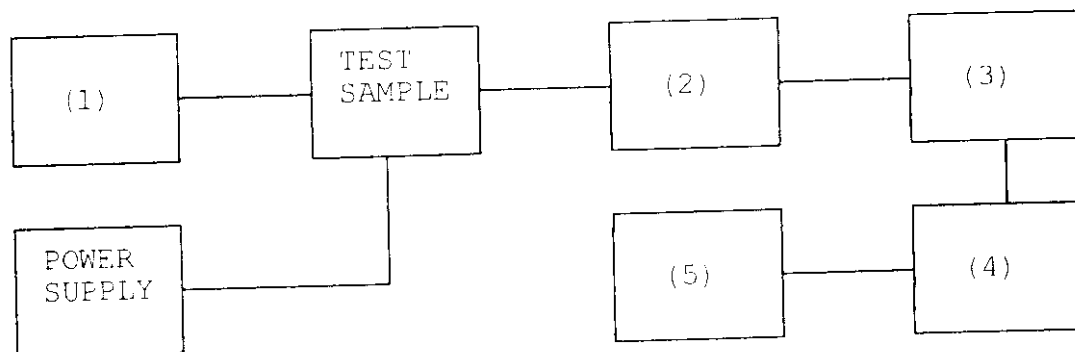


Asset	Description	s/n
(1)	LINE IMPEDANCE STABILIZATION NETWORK	
___	i00010 HP 204D	1105A04683
x	i00017 HP 8903A	2216A01753
x	i00118 HP 33120A	US36002064
(2)	COAXIAL ATTENUATOR	
___	i00122 NARDA 766-10	7802
___	i00123 NARDA 766-10	7802A
x	i00113 SIERRA 661A-3D	1059
___	i00069 BIRD 8329 (30 dB)	10066
(3)	MODULATION ANALYZER	
x	i00020 HP 8901A	2105A01087
(4)	AUDIO ANALYZER	
x	i00017 HP 8903A	2216A01753
(5)	SCOPE	
___	i00058 HP 1741A	2215A09356
___	i00071 Tektronix 935	1935-B011343

PAGE 26 of 38.

## FREQUENCY RESPONSE OF AUDIO LOW PASS FILTER

KENWOOD, TKR-830

21 JUL 1998, 15:07

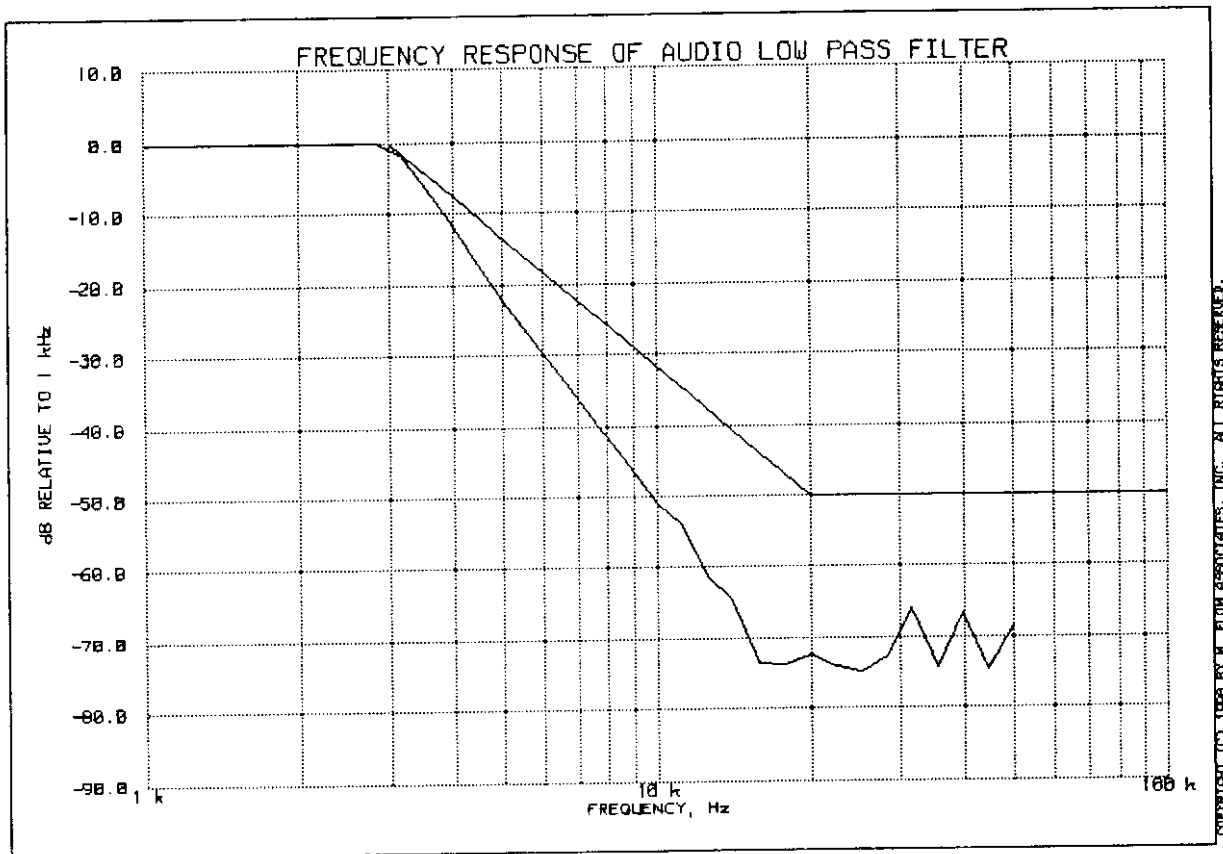

PEAK AUDIO FREQUENCY, Hz: 2820

SUPERVISED BY:

*M. Flom P. Eng.*

MORTON FLOM, P. Eng.


PAGE NO. 27 of 38.  
NAME OF TEST: Audio Frequency Response  
SPECIFICATION: 47 CFR 2.1047(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE 28 of 38.

TRANSMITTER AUDIO FREQUENCY RESPONSE  
 KENWOOD, TKR-830  
 21 JUL 1998, 14:33

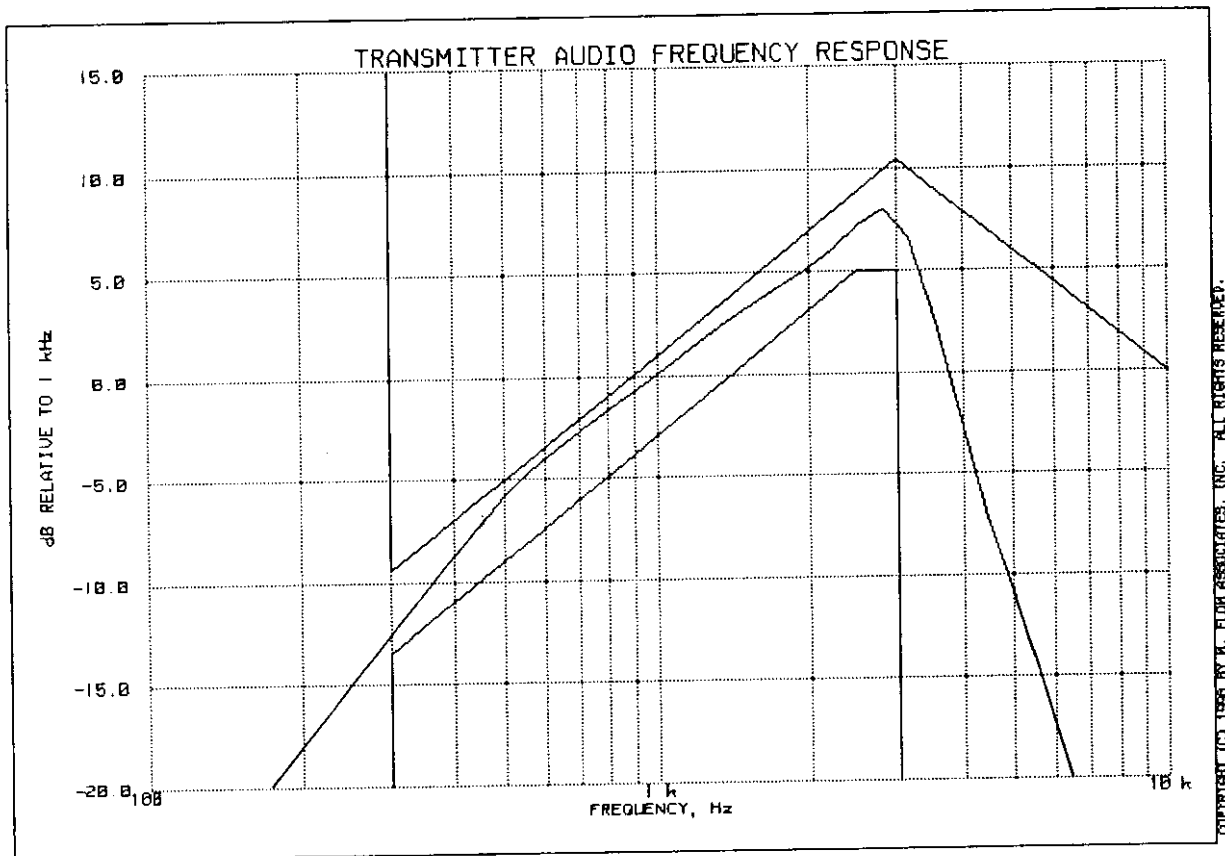

PEAK AUDIO FREQUENCY, Hz: 2820

TABLE VALUES:

FREQUENCY, Hz	LEVEL, dB	FREQUENCY, LEVEL, Hz dB	FREQUENCY, LEVEL, Hz dB
300	-14.3	30000	-17.7
20000	-17.8	50000	-17.7

*M. Flom P. Eng.*

SUPERVISED BY:


MORTON FLOM, P. Eng.

PAGE NO. 29 of 38.  
NAME OF TEST: Modulation Limiting  
SPECIFICATION: 47 CFR 2.1047(b)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

MODULATION LIMITING  
KENWOOD, TKR-830  
1998-JUL-21, 15:13

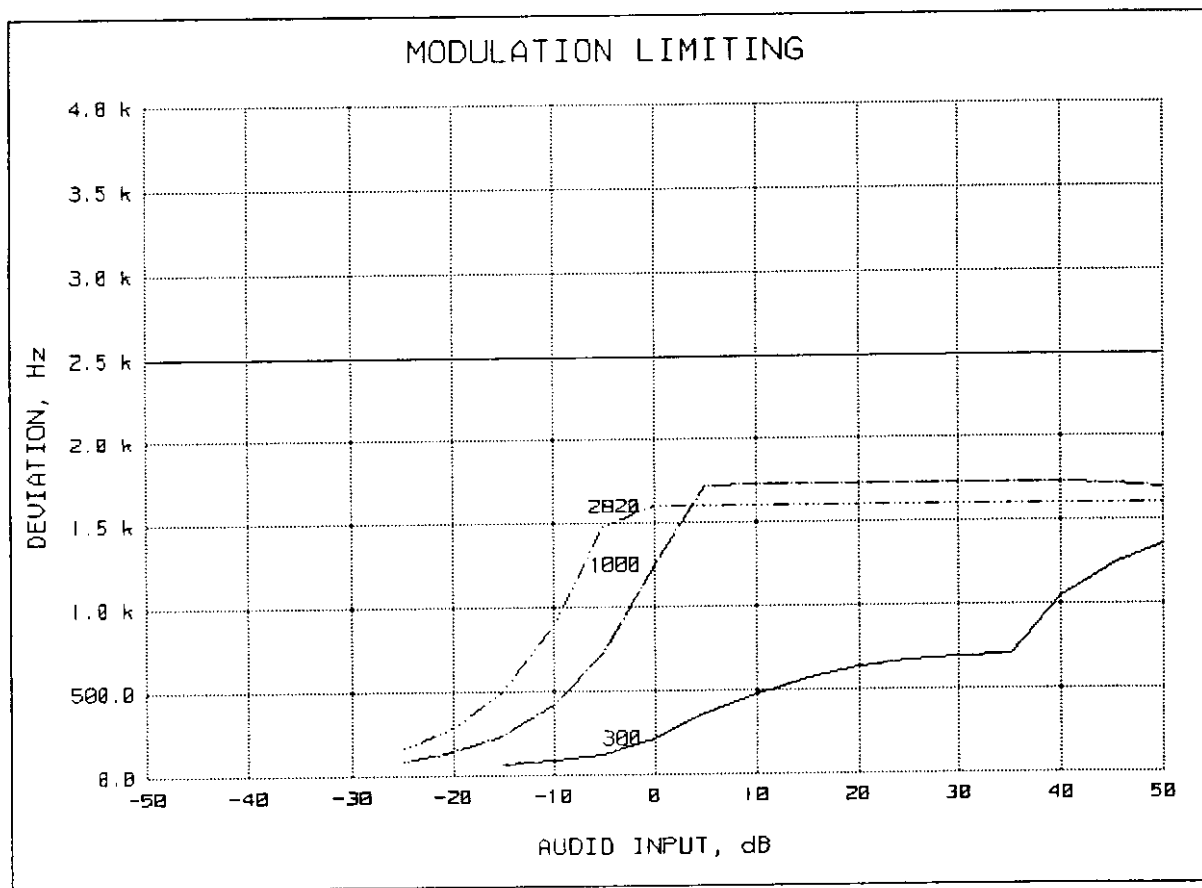

REFERENCE DEVIATION, kHz	= 1.25
REFERENCE MODULATION, Hz	= 1000
PEAKS	= POSITIVE
AUDIO AMPLITUDE, mV	= 11.72


*M. Flom P. Eng.*

SUPERVISED BY:

MORTON FLOM, P. Eng.

PAGE 31 of 38.

MODULATION LIMITING  
 KENWOOD, TKR-830  
 1998-JUL-21, 15:13

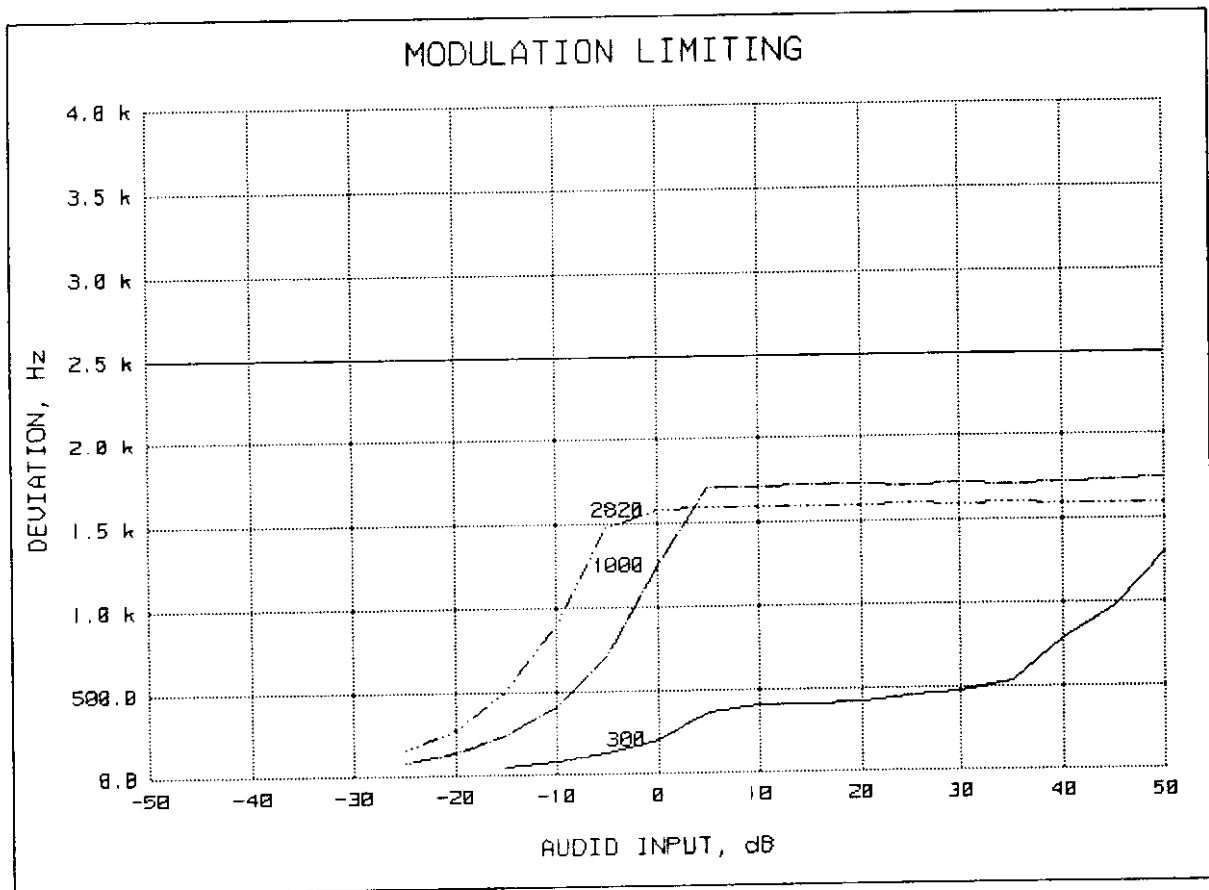

REFERENCE DEVIATION, kHz	= 1.25
REFERENCE MODULATION, Hz	= 1000
PEAKS	= NEGATIVE
AUDIO AMPLITUDE, mV	= 11.72

*M. F. Eng.*


SUPERVISED BY:

MORTON FLOM, P. Eng.



PAGE 32 of 38.

MODULATION LIMITING  
 KENWOOD, TKR-830  
 1998-JUL-21, 15:18

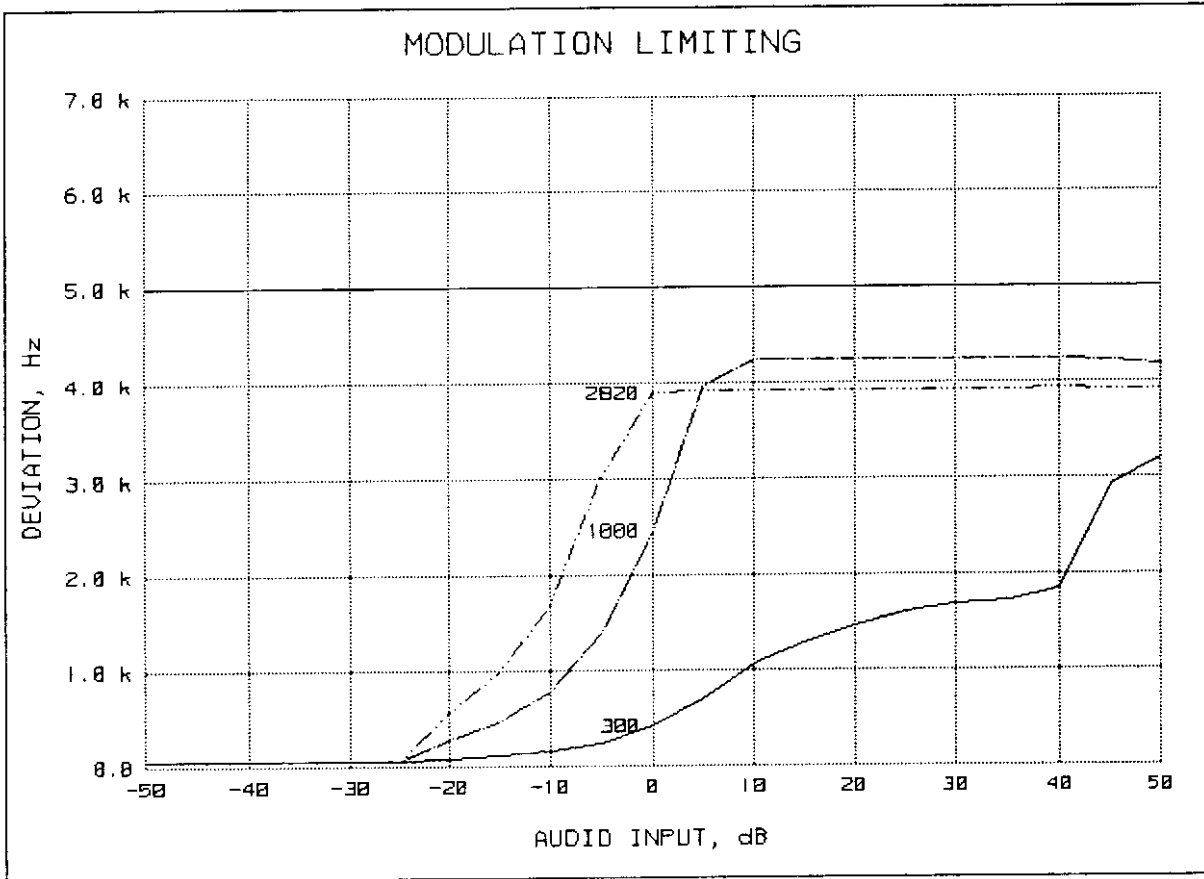


REFERENCE DEVIATION, kHz	= 2.5
REFERENCE MODULATION, Hz	= 1000
PEAKS	= POSITIVE
AUDIO AMPLITUDE, mV	= 9.1

*M. Flom P. Eng.*

SUPERVISED BY:

MORTON FLOM, P. Eng.

MODULATION LIMITING  
KENWOOD, TKR-830  
1998-JUL-21, 15:18

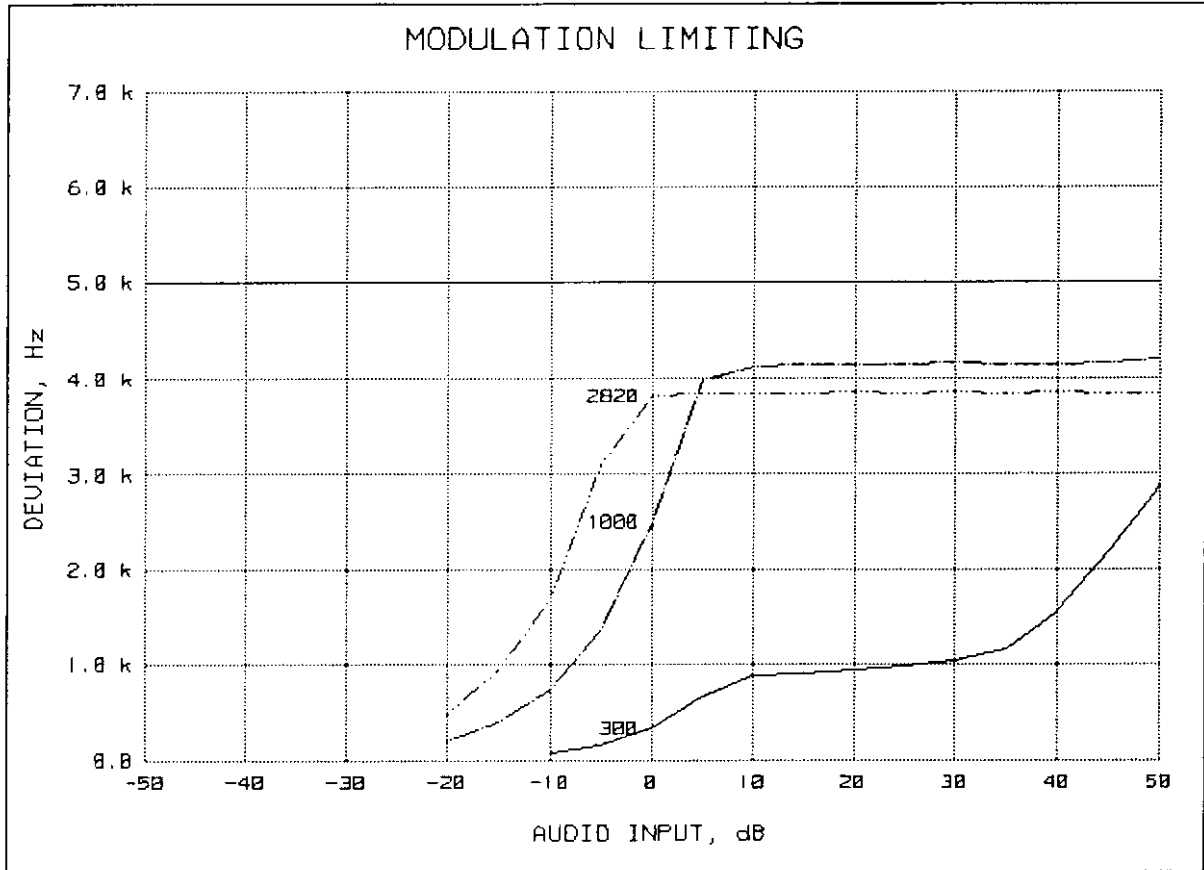

REFERENCE DEVIATION, kHz = 2.5  
REFERENCE MODULATION, Hz = 1000  
PEAKS = NEGATIVE  
AUDIO AMPLITUDE, mV = 9.64

*M. F. F. Eng.*

SUPERVISED BY:

MORTON FLOM, P. Eng.

PAGE NO. 34 of 38.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

35 of 38.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY  
 TEST B. CARRIER FREQUENCY STABILITY  
 TEST C. OPERATIONAL PERFORMANCE STABILITY  
 TEST D. HUMIDITY  
 TEST E. VIBRATION  
 TEST F. ENVIRONMENTAL TEMPERATURE  
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION  
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

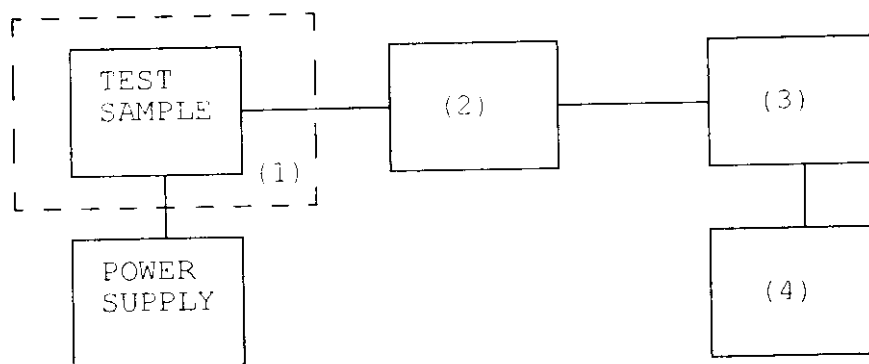

Asset	Description	s/n
-------	-------------	-----

(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
<u>x</u>	i00027 Tenny Temp. Chamber	9083-765-234
<u>   </u>	i00 Weber Humidity Chamber	
<u>   </u>	i00 L.A.B. RVH 18-100	

(2)	<u>COAXIAL ATTENUATOR</u>	
<u>   </u>	i00122 NARDA 766-10	7802
<u>   </u>	i00123 NARDA 766-10	7802A
<u>x</u>	i00113 SIERRA 661A-3D	1059
<u>   </u>	i00069 BIRD 8329 (30 dB)	10066


(3)	<u>R.F. POWER</u>	
<u>   </u>	i00014 HP 435A POWER METER	1733A05839
<u>x</u>	i00039 HP 436A POWER METER	2709A26776
<u>x</u>	i00020 HP 8901A POWER MODE	2105A01087

(4)	<u>FREQUENCY COUNTER</u>	
<u>   </u>	i00042 HP 5383A	1628A00959
<u>x</u>	i00019 HP 5334B	2704A00347
<u>x</u>	i00020 HP 8901A	2105A01087

# TRANSMITTER FREQUENCY STABILITY

KENWOOD, TKR-830

24 JUL 1998, 07:19

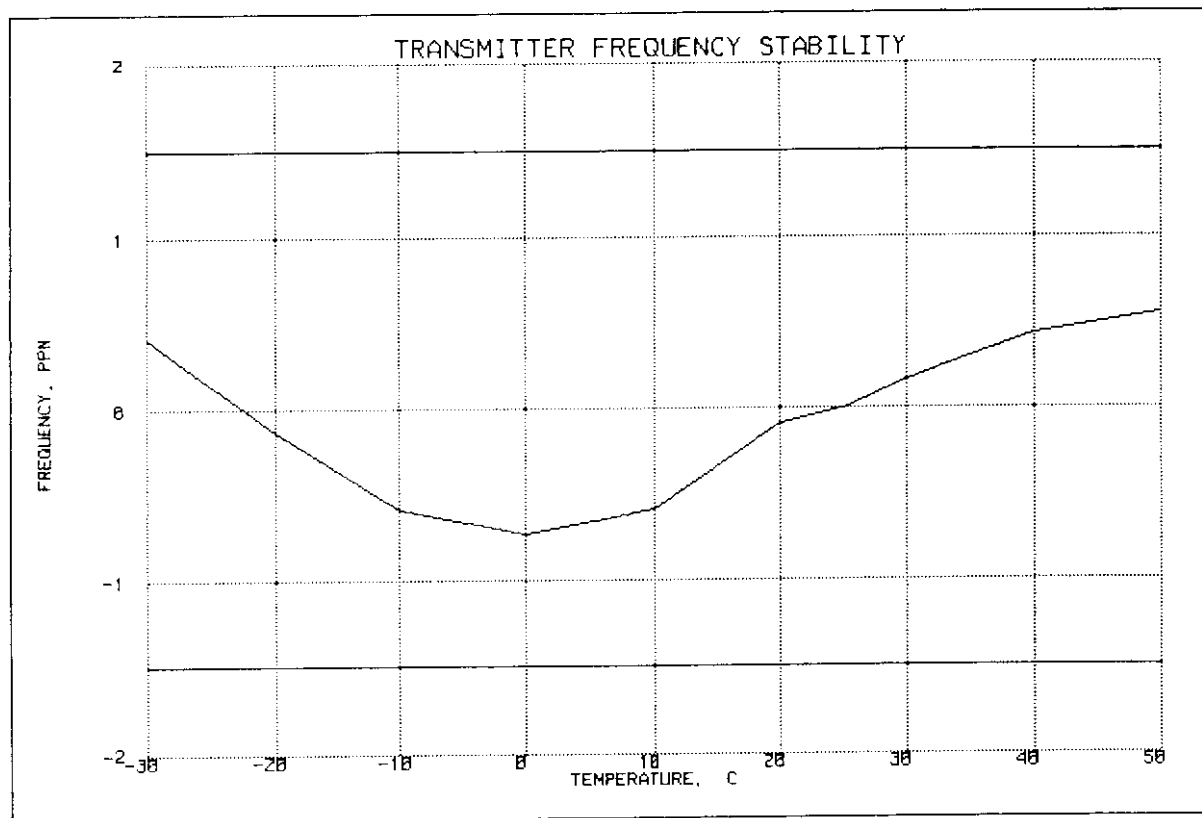

FREQUENCY OF CARRIER, MHz = 464.99986

LIMIT, ppm = 1.5

LIMIT, Hz = 697

SUPERVISED BY:

*M. F. Eng.*

MORTON FLOM, P. Eng.

PAGE NO. 37 of 38.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at  $25 \pm 5^\circ\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

g9870115: 1998-Jul-21 Tue 15:26:20

STATE: 0:General

LIMIT, ppm = 1.5

LIMIT, Hz = 697

BATTERY END POINT (Voltage) = 8.6

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.56	465.000000	0	0.00
100	13.6	465.000000	0	0.00
115	15.64	465.000010	10	0.02
63	8.6	465.000000	0	0.00

*Morton Flom P. Eng.*

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 38 of 38.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B <sub>n</sub> ), kHz	= (2 × M) + (2 × D × K)
	= 16K0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 2.5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B <sub>n</sub> ), kHz	= (2 × M) + (2 × D × K)
	= 11K0

SUPERVISED BY:

*M. Morton P. Eng.*

Morton Flom, P. Eng.

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, appearing to read "M. Flom P. Eng.", with a stylized underline.

Morton Flom, P. Eng.



## STATEMENT OF QUALIFICATIONS

### EDUCATION:

1. B. ENG. in ENGINEERING PHYSICS, 1949, McGill University, Montreal, Canada.
2. Post Graduate Studies, McGill University & Sir George Williams University, Montreal.

### PROFESSIONAL AFFILIATIONS:

1. ARIZONA SOCIETY OF PROFESSIONAL ENGINEERS (NSPE), #026 031 821.
2. ORDER OF ENGINEERS (QUEBEC) 1949. #4534.
3. ASSOCIATION OF PROFESSIONAL ENGINEERS, GEOPHYSICISTS & GEOLOGISTS OF ALBERTA #5916.
4. REGISTERED ENGINEERING CONSULTANT - GOVERNMENT OF CANADA, DEPARTMENT OF COMMUNICATIONS. Radio Equipment Approvals.
5. IEEE, Lifetime Member No. 0417204 (member since 1947).

### EXPERIENCE:

1. Research/Development/Senior Project Engineer, R.C.A. LIMITED (4 years).
2. Owner/Chief Engineer of Electronics. Design/Manufacturing & Cable TV Companies (10 years).
3. CONSULTING ENGINEER (over 25 years).

  
MORTON FLOM, P. Eng.