

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

KENWOOD USA CORPORATION
3975 John Creek Court, Suite 300
Suwanee, GA 30024
USA

Rule Part(s):	FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)
Test Procedure(s):	FCC OET Bulletin 65, Supplement C (Edition 01-01)
Device Classification:	Licensed Non-Broadcast Transmitter Held to Face (TNF)
Device Type:	Portable FM UHF PTT Radio Transceiver
FCC IDENTIFIER:	ALH37333120
Model(s):	TK-3180-K2/K4
Modulation:	FM (UHF)
Tx Frequency Range:	400 - 470 MHz
Max. RF Output Power Measured:	37.04 dBm Conducted (400.05 MHz) 37.37 dBm Conducted (435.05 MHz) 37.21 dBm Conducted (469.95 MHz)
Antenna Type(s) Tested:	Stubby 400 - 440 MHz (P/N: KRA-23M3) Stubby 440 - 470 MHz (P/N: KRA-23M) Whip 400-440 MHz (P/N: KRA-27M3) Whip 440 - 470 MHz (P/N: KRA-27M)
Battery Type(s) Tested:	Li-ion 7.5 V, 1700 mAh (P/N: KNB-33L) NiCd 7.5 V, 1700 mAh (P/N: KNB-31A) NiMH 7.5 V, 2500 mAh (P/N: KNB-32N)
Body-Worn Accessories Tested:	Speaker-Microphone (P/N: KMC-25) Plastic Belt-Clip (P/N: KBH-11)
Max. SAR Levels Measured:	Face-held: 4.40 W/kg (50% Duty Cycle) Body-worn: 5.94 W/kg (50% Duty Cycle)

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the Occupational / Controlled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Russell W. Pipe
Senior Compliance Technologist
Celltech Labs Inc.



TABLE OF CONTENTS		
1.0	INTRODUCTION.....	3
2.0	DESCRIPTION OF DUT.....	3
3.0	SAR MEASUREMENT SYSTEM.....	4
4.0	MEASUREMENT SUMMARY.....	5-6
5.0	DETAILS OF SAR EVALUATION.....	7
6.0	EVALUATION PROCEDURES.....	7
7.0	SYSTEM PERFORMANCE CHECK.....	8
8.0	SIMULATED EQUIVALENT TISSUES.....	9
9.0	SAR SAFETY LIMITS.....	9
10.0	ROBOT SYSTEM SPECIFICATIONS.....	10
11.0	PROBE SPECIFICATION.....	11
12.0	PLANAR PHANTOM.....	11
13.0	VALIDATION PHANTOM.....	11
14.0	DEVICE HOLDER.....	11
15.0	TEST EQUIPMENT LIST.....	12
16.0	MEASUREMENT UNCERTAINTIES.....	13-14
17.0	REFERENCES.....	15
	APPENDIX A - SAR MEASUREMENT DATA.....	16
	APPENDIX B - SYSTEM PERFORMANCE CHECK DATA.....	17
	APPENDIX C - SYSTEM VALIDATION PROCEDURES.....	18
	APPENDIX D - PROBE CALIBRATION.....	19
	APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS.....	20
	APPENDIX F - SAR TEST SETUP & DUT PHOTOGRAPHS.....	21

1.0 INTRODUCTION

This measurement report demonstrates compliance of the Kenwood USA Corporation TK-3180-K2/K4 Portable FM UHF PTT Radio Transceiver FCC ID: ALH37333120 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]), were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

FCC Rule Part(s)	47 CFR §2.1093		
IC Rule Part(s)	RSS-102 Issue 1 (Provisional)		
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (Edition 01-01)		
Device Classification	Licensed Non-Broadcast Transmitter Held to Face (TNF)		
Device Type	Portable FM UHF PTT Radio Transceiver		
FCC IDENTIFIER	ALH37333120		
Model(s)	TK-3180-K2/K4		
Serial No.	U-09 (Identical Prototype)		
Modulation	FM (UHF)		
Tx Frequency Range	400 - 470 MHz		
Max. RF Output Power Measured	37.04 dBm	Conducted	400.05 MHz
	37.37 dBm	Conducted	435.05 MHz
	37.21 dBm	Conducted	469.95 MHz
Antenna Type(s) Tested	Stubby	400 - 440 MHz	Length: 84 mm P/N: KRA-23M3
	Stubby	440 - 470 MHz	Length: 84 mm P/N: KRA-23M
	Whip	400 - 440 MHz	Length: 175 mm P/N: KRA-27M3
	Whip	440 - 470 MHz	Length: 153 mm P/N: KRA-27M
Battery Type(s) Tested	Li-ion	7.5 V, 1700 mAh	P/N: KNB-33L
	NiCd	7.5 V, 1700 mAh	P/N: KNB-31A
	NiMH	7.5 V, 2500 mAh	P/N: KNB-32N
Body-Worn Accessories Tested	Plastic Belt-Clip (P/N: KBH-11)		
	Speaker-Microphone (P/N: KMC-25)		

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with validation phantom



DASY4 SAR Measurement System with Plexiglas planar phantom

4.0 MEASUREMENT SUMMARY

FACE-HELD SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg)	
								Duty Cycle			Duty Cycle	
								100%	50%		100%	50%
435.05	Mid	CW	Stubby	KRA-23M	Li-ion	2.5	37.23	6.73	3.37	-0.226	7.09	3.54
435.05	Mid	CW	Stubby	KRA-23M	NiCd	2.5	37.26	6.68	3.34	-0.378	7.29	3.64
435.05	Mid	CW	Stubby	KRA-23M	NiMH	2.5	37.26	6.42	3.21	-0.408	7.05	3.53
435.05	Mid	CW	Stubby	KRA-23M3	Li-ion	2.5	37.37	4.74	2.37	-0.141	4.90	2.45
435.05	Mid	CW	Stubby	KRA-23M3	NiCd	2.5	37.28	4.70	2.35	-0.280	5.01	2.51
435.05	Mid	CW	Stubby	KRA-23M3	NiMH	2.5	37.27	4.69	2.35	-0.281	5.00	2.50
435.05	Mid	CW	Whip	KRA-27M	Li-ion	2.5	37.25	8.25	4.13	-0.168	8.58	4.29
435.05	Mid	CW	Whip	KRA-27M	NiCd	2.5	37.26	8.03	4.02	-0.396	8.80	4.40
435.05	Mid	CW	Whip	KRA-27M	NiMH	2.5	37.30	7.58	3.79	-0.406	8.32	4.16
469.95	High	CW	Whip	KRA-27M	NiCd	2.5	37.21	6.64	3.32	-0.446	7.36	3.68
435.05	Mid	CW	Whip	KRA-27M3	Li-ion	2.5	37.27	7.22	3.61	-0.0251	7.26	3.63
435.05	Mid	CW	Whip	KRA-27M3	NiCd	2.5	37.26	6.93	3.47	-0.189	7.24	3.62
435.05	Mid	CW	Whip	KRA-27M3	NiMH	2.5	37.31	6.84	3.42	-0.196	7.16	3.58

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BRAIN: 8.0 W/kg (averaged over 1 gram)

Test Date	June 8, 2004		Relative Humidity	37	%
Measured Fluid Type	450 MHz Brain		Atmospheric Pressure	102.2	kPa
Dielectric Constant ϵ_r	IEEE Target		Ambient Temperature	23.4	°C
	43.5	± 5%	43.7	Fluid Temperature	22.5
Conductivity σ (mho/m)	IEEE Target		Fluid Depth	≥ 15	cm
	0.87	± 5%	0.88	ρ (Kg/m³)	1000

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
- The power drifts measured by the DASY system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
- The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Antenna Type	Antenna Part No.	Battery Type	Body-worn Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg)	
									Duty Cycle			Duty Cycle	
									100%	50%		100%	50%
435.05	Mid	CW	Stubby	KRA-23M	Li-ion	Belt-Clip Speaker-Mic	1.7	37.27	9.78	4.89	-0.329	10.6	5.27
435.05	Mid	CW	Stubby	KRA-23M	NiCd	Belt-Clip Speaker-Mic	1.2	37.21	9.64	4.82	-0.499	10.8	5.41
435.05	Mid	CW	Stubby	KRA-23M	NiMH	Belt-Clip Speaker-Mic	1.2	37.22	8.91	4.46	-0.377	9.72	4.86
469.95	High	CW	Stubby	KRA-23M	NiCd	Belt-Clip Speaker-Mic	1.2	37.12	7.97	3.99	-0.663	9.28	4.64
435.05	Mid	CW	Stubby	KRA-23M3	Li-ion	Belt-Clip Speaker-Mic	1.7	37.24	6.60	3.30	-0.174	6.87	3.43
435.05	Mid	CW	Stubby	KRA-23M3	NiCd	Belt-Clip Speaker-Mic	1.2	37.26	6.79	3.40	-0.202	7.11	3.56
435.05	Mid	CW	Stubby	KRA-23M3	NiMH	Belt-Clip Speaker-Mic	1.2	37.24	6.53	3.27	-0.295	6.99	3.49
435.05	Mid	CW	Whip	KRA-27M	Li-ion	Belt-Clip Speaker-Mic	1.7	37.23	11.0	5.50	-0.226	11.6	5.79
435.05	Mid	CW	Whip	KRA-27M	NiCd	Belt-Clip Speaker-Mic	1.2	37.27	10.7	5.35	-0.455	11.9	5.94
435.05	Mid	CW	Whip	KRA-27M	NiMH	Belt-Clip Speaker-Mic	1.2	37.25	9.44	4.72	-0.431	10.4	5.21
469.95	High	CW	Whip	KRA-27M	NiCd	Belt-Clip Speaker-Mic	1.2	37.18	9.01	4.51	-0.407	9.90	4.95
435.05	Mid	CW	Whip	KRA-27M3	Li-ion	Belt-Clip Speaker-Mic	1.7	37.23	9.15	4.58	-0.0847	9.33	4.67
435.05	Mid	CW	Whip	KRA-27M3	NiCd	Belt-Clip Speaker-Mic	1.2	37.24	9.16	4.58	-0.170	9.53	4.76
435.05	Mid	CW	Whip	KRA-27M3	NiMH	Belt-Clip Speaker-Mic	1.2	37.27	8.94	4.47	-0.248	9.47	4.73
400.05	Low	CW	Whip	KRA-27M3	NiCd	Belt-Clip Speaker-Mic	1.2	37.04	9.37	4.69	-0.114	9.62	4.81

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date	June 9, 2004		Relative Humidity	41	%
Measured Fluid Type	450 MHz Body		Atmospheric Pressure	101.8	kPa
Dielectric Constant ϵ_r	IEEE Target		Ambient Temperature	23.4	°C
	56.7	± 5%	56.9	Fluid Temperature	22.7
Conductivity σ (mho/m)	IEEE Target		Fluid Depth	≥ 15	cm
	0.94	± 5%	0.94	ρ (Kg/m ³)	1000

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the scaled SAR levels at the mid channel (50% duty cycle) were ≥ 3dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
- The power drifts measured by the DASYS system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissue mixture were measured prior to the evaluation using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).
- The SAR evaluations were performed within 24 hours of the system performance check.

5.0 DETAILS OF SAR EVALUATION

The Kenwood USA Corporation TK-3180-K2/K4 Portable FM UHF PTT Radio Transceiver FCC ID: ALH37333120 was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix F.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front side of the DUT and the outer surface of the planar phantom for the duration of the tests.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom. With the Li-ion battery, the belt-clip accessory provided a 1.7 cm separation distance between the back of the DUT and the outer surface of the planar phantom. With the NiCd and NiMH batteries, the belt-clip accessory provided a 1.2 cm separation distance between the back of the DUT and the outer surface of the planar phantom. The DUT was tested for body-worn SAR with the speaker-microphone accessory connected.
3. The conducted power levels were measured before each test using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
4. The power drifts measured by the DASY system during the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the test data table (pages 5-6).
5. A SAR versus time power drift evaluation was performed for the duration of the area scan measurement in the test configuration that reported the maximum scaled SAR level (Body-Worn, NiCd Battery, KRA-27M Whip Antenna). See Appendix A (SAR Test Plots) for SAR versus Time power drift evaluation plot.
6. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down to room temperature and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
7. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
8. The SAR evaluations were performed using a Plexiglas planar phantom.
9. A stack of low-density, low-loss dielectric foamed polystyrene was used in place of the device holder.
10. The SAR evaluations were performed within 24 hours of the system performance check.

6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix D). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed using a planar phantom with a 450MHz dipole (see Appendix C for system validation procedure). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters). A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plots).

SYSTEM PERFORMANCE CHECK													
Test Date	450MHz Equiv. Tissue	SAR 1g (W/kg)		Dielectric Constant ϵ_r		Conductivity σ (mho/m)		ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Measured	IEEE Target	Measured	IEEE Target	Measured						
06/08/04	Brain	1.23 $\pm 10\%$	1.25 (+1.6%)	43.5 $\pm 5\%$	43.7	0.87 $\pm 5\%$	0.88	1000	23.0	22.5	≥ 15	42	102.2
06/09/04	Brain	1.23 $\pm 10\%$	1.24 (+0.8%)	43.5 $\pm 5\%$	43.3	0.87 $\pm 5\%$	0.86	1000	23.6	21.7	≥ 15	39	101.9

Note(s):
 1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

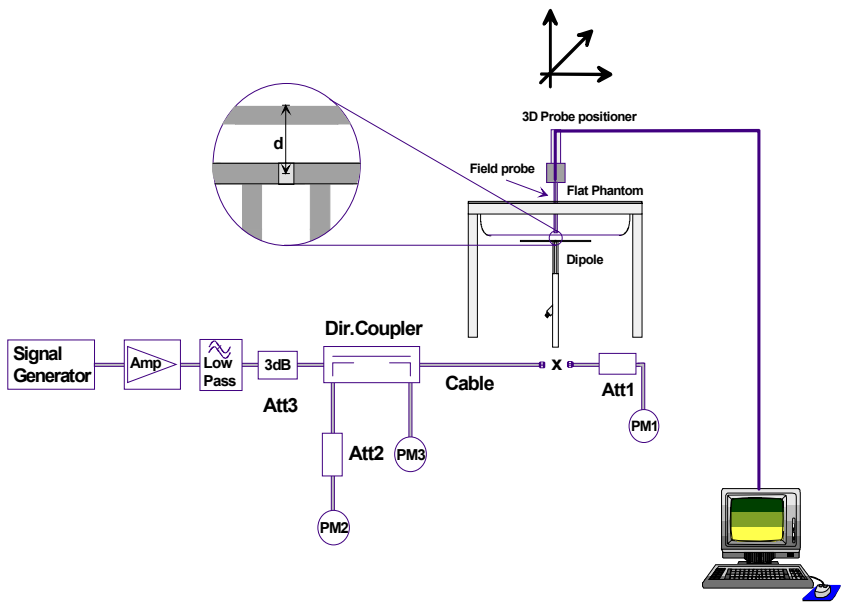


Figure 1. System Performance Check Setup Diagram



450MHz Dipole Setup

8.0 SIMULATED EQUIVALENT TISSUES

The 450MHz simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared and measured for dielectric parameters (permittivity and conductivity) according to standardized procedures.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450MHz Brain (System Check & DUT Evaluation)	450MHz Body (DUT Evaluation)
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
 Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1387
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Phantom(s)

Evaluation Phantom

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm \pm 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450 MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm \pm 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

11.0 PROBE SPECIFICATION (ET3DV6)

Construction: Symmetrical design with triangular core
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g. glycol)

Calibration: In air from 10 MHz to 2.5 GHz
 In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)

Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.2 dB in brain tissue (rotation around probe axis)
 ± 0.4 dB in brain tissue (rotation normal to probe axis)

Dynamic Range: $5 \mu\text{W/g}$ to > 100 mW/g; Linearity: ± 0.2 dB

Surface Detection: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

Dimensions: Overall length: 330 mm
 Tip length: 16 mm
 Body diameter: 12 mm
 Tip diameter: 6.8 mm
 Distance from probe tip to dipole centers: 2.7 mm

Application: General dosimetry up to 3 GHz
 Compliance tests of mobile phone



ET3DV6 E-Field Probe

12.0 PLANAR PHANTOM

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld and body-worn radio transceivers. The planar phantom is mounted on the side of the DASY4 compact system table.



Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.



Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT	SERIAL NO.	CALIBRATION DATE
Schmid & Partner DASY4 System	-	-
DASY4 Measurement Server	1078	N/A
-Robot	599396-01	N/A
DAE3	353	Dec 2003
DAE3	370	May 2004
-ET3DV6 E-Field Probe	1387	Mar 2004
-ET3DV6 E-Field Probe	1590	May 2004
-300MHz Validation Dipole	135	Oct 2003
-450MHz Validation Dipole	136	Nov 2003
-835MHz Validation Dipole	411	Mar 2004
-900MHz Validation Dipole	054	June 2004
-1800MHz Validation Dipole	247	June 2004
-2450MHz Validation Dipole	150	Sept 2003
-SAM Phantom V4.0C	1033	N/A
-Barski Planar Phantom	03-01	N/A
-Plexiglas Planar Phantom	161	N/A
-Validation Planar Phantom	137	N/A
HP 85070C Dielectric Probe Kit	N/A	N/A
Gigatronics 8651A Power Meter	8650137	April 2004
Gigatronics 8652A Power Meter	1835267	April 2004
Gigatronics 80701A Power Sensor	1833535	April 2004
Gigatronics 80701A Power Sensor	1833542	April 2004
Gigatronics 80701A Power Sensor	1834350	April 2004
HP E4408B Spectrum Analyzer	US39240170	Dec 2003
HP 8594E Spectrum Analyzer	3543A02721	April 2004
HP 8753E Network Analyzer	US38433013	April 2004
HP 8648D Signal Generator	3847A00611	April 2004
Amplifier Research 5S1G4 Power Amplifier	26235	N/A

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C_i 1g	Standard Uncertainty ±% (1g)	V_i OR V_{eff}
Measurement System						
Probe calibration	± 4.0	Normal	1	1	± 4.0	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1- C_p)	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(C_p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	Normal	√3	1	± 6.7	12
Device holder uncertainty	± 5.0	Normal	√3	1	± 5.9	8
Power drift	± 5.0	Rectangular	√3		± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.03	
Expanded Uncertainty (k=2)					± 26.07	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C_i 1g	Standard Uncertainty ±% (1g)	V_i OR V_{eff}
Measurement System						
Probe calibration	± 4.0	Normal	1	1	± 4.0	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1- C_p)	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(C_p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	± 1.2	∞
Input Power	± 4.7	Rectangular	√3	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 9.58	
Expanded Uncertainty (k=2)					± 19.16	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Std 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

Test Report S/N:	052104-510ALH
Test Date(s):	June 08-09, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX A - SAR MEASUREMENT DATA

Face-Held SAR - Li-ion Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.23 dBm (Conducted)

7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.1 V/m; Power Drift = -0.226 dB

Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 6.73 mW/g; SAR(10 g) = 4.84 mW/g

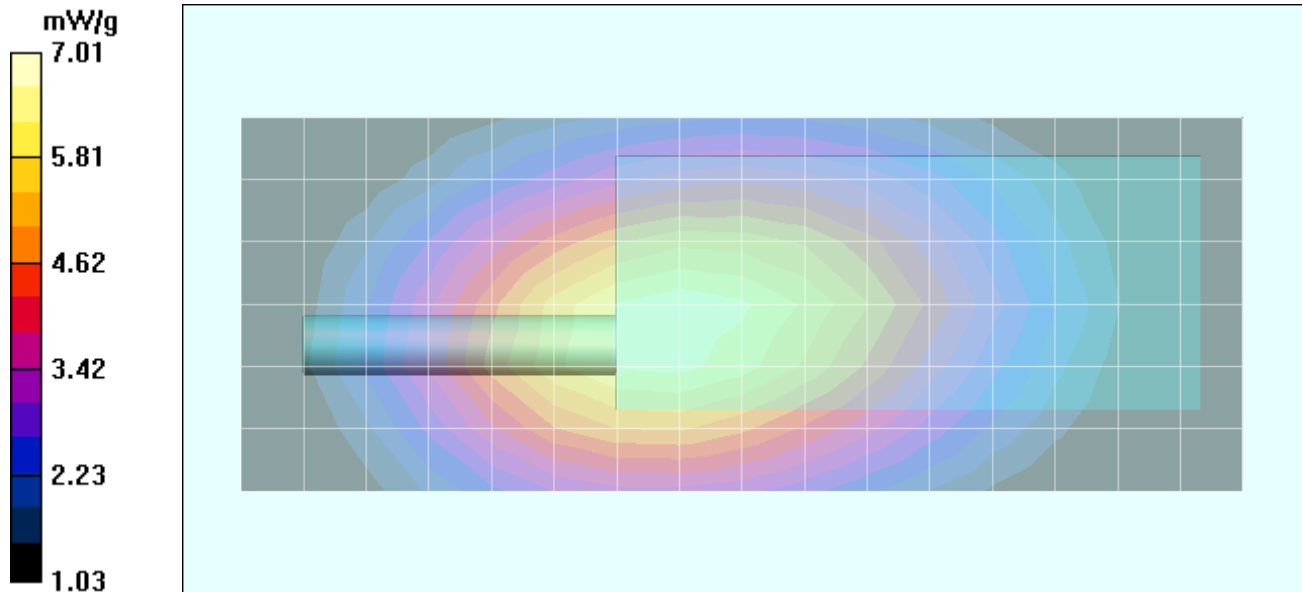

Face-Held SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.26 dBm (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.5 V/m; Power Drift = -0.378 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 6.68 mW/g; SAR(10 g) = 4.84 mW/g

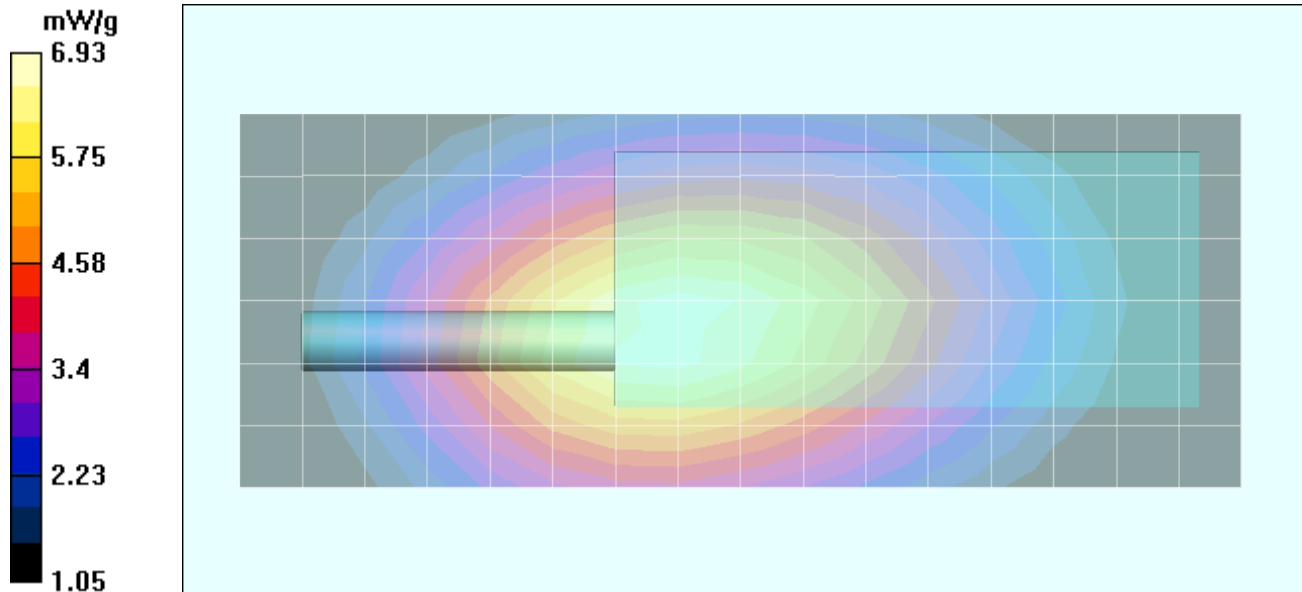

Face-Held SAR - NiMH Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.26 dBm (Conducted)

7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.3 V/m; Power Drift = -0.408 dB

Peak SAR (extrapolated) = 9.81 W/kg

SAR(1 g) = 6.42 mW/g; SAR(10 g) = 4.63 mW/g

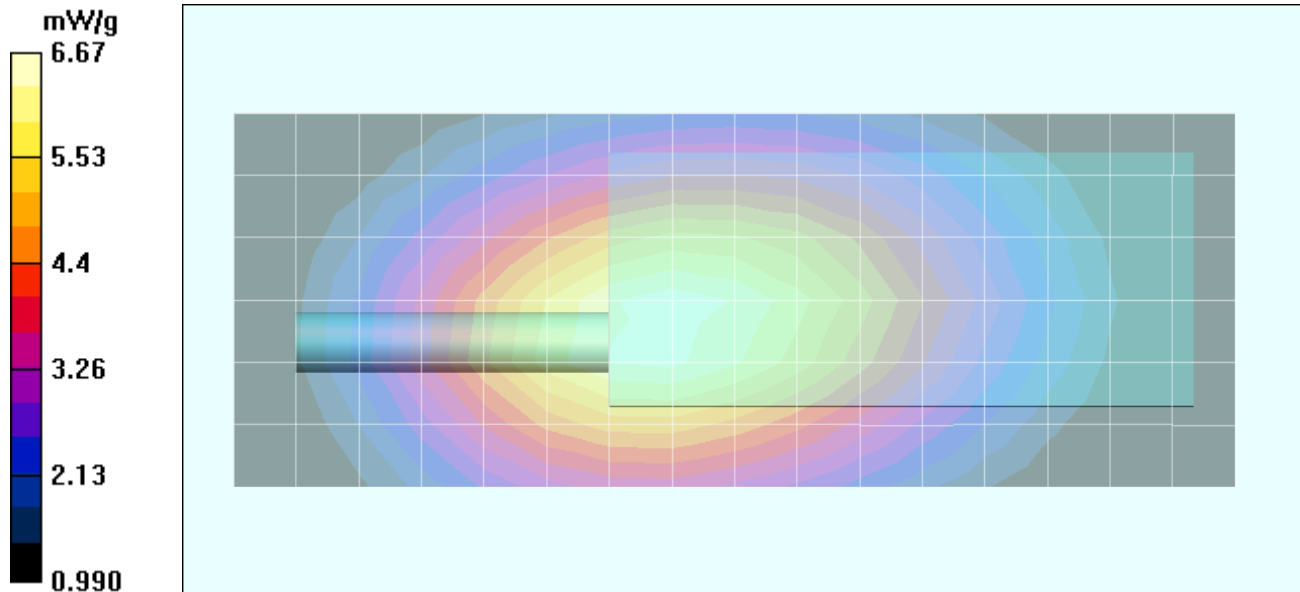

Face-Held SAR - Li-ion Battery - Stubby Antenna (P/N: KRA-23M3)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.37 dBm (Conducted)
 7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)
 Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 72.8 V/m; Power Drift = -0.141 dB
 Peak SAR (extrapolated) = 7.24 W/kg
SAR(1 g) = 4.74 mW/g; SAR(10 g) = 3.43 mW/g

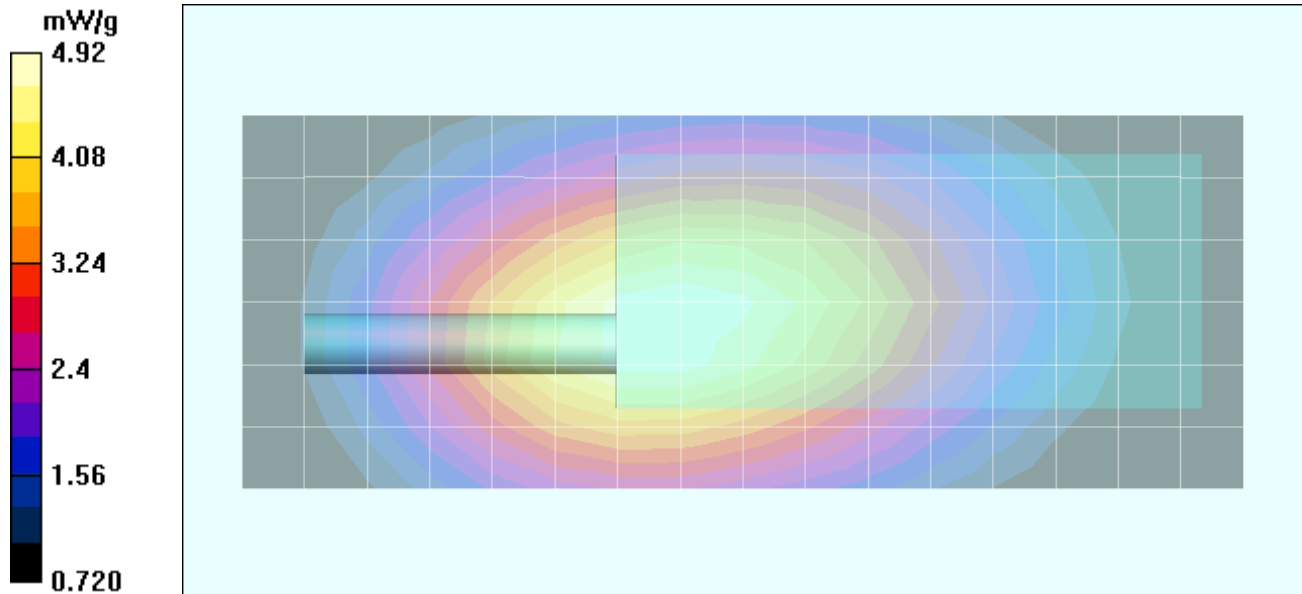

Face-Held SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M3)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.28 dBm (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 73.6 V/m; Power Drift = -0.280 dB

Peak SAR (extrapolated) = 7.19 W/kg

SAR(1 g) = 4.70 mW/g; SAR(10 g) = 3.4 mW/g

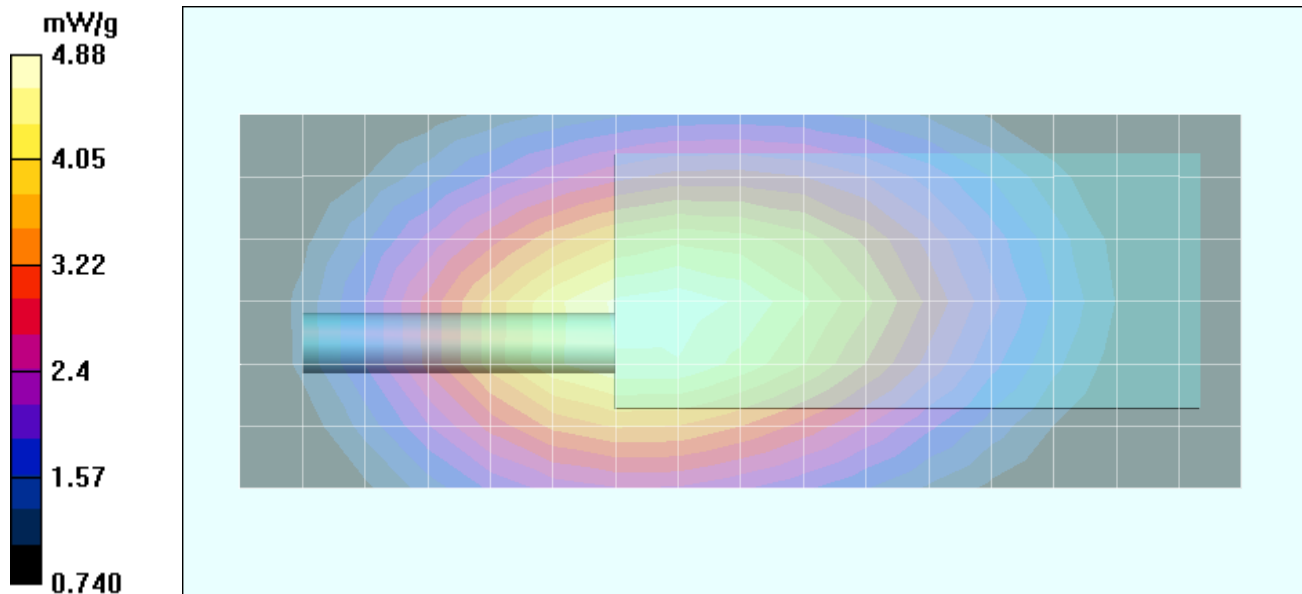

Face-Held SAR - NiMH Battery - Stubby Antenna (P/N: KRA-23M3)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.27 dBm (Conducted)

7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 74.1 V/m; Power Drift = -0.281 dB

Peak SAR (extrapolated) = 7.17 W/kg

SAR(1 g) = 4.69 mW/g; SAR(10 g) = 3.38 mW/g

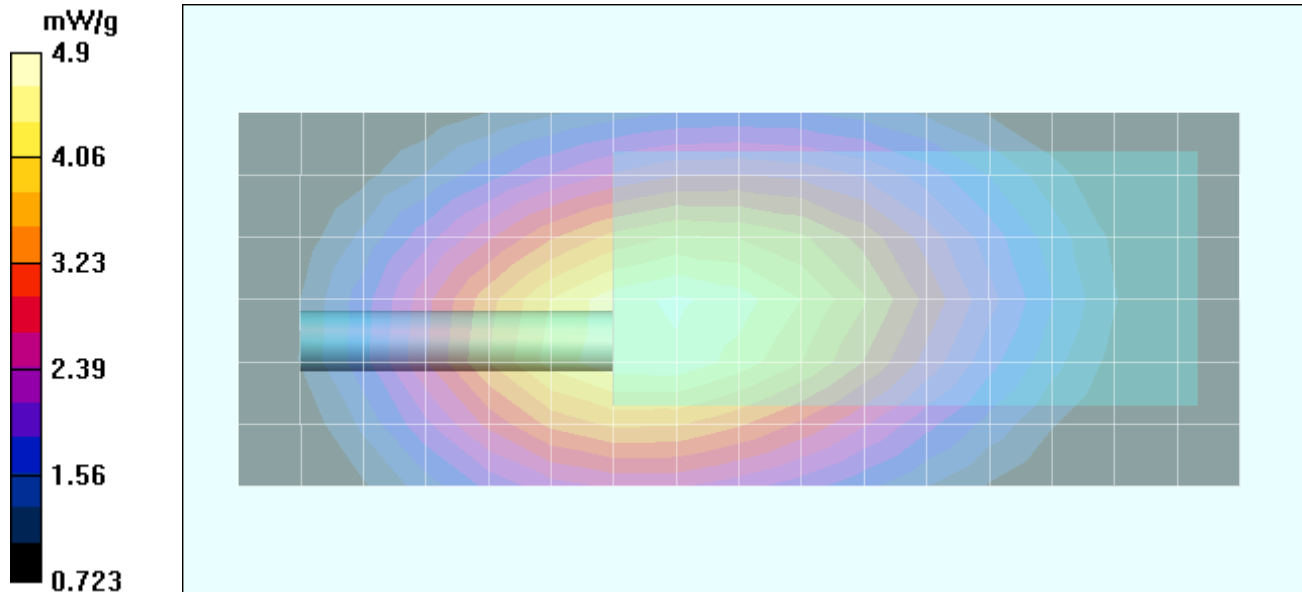

Face-Held SAR - Li-ion Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.25 dBm (Conducted)

7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.6 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 8.25 mW/g; SAR(10 g) = 5.97 mW/g

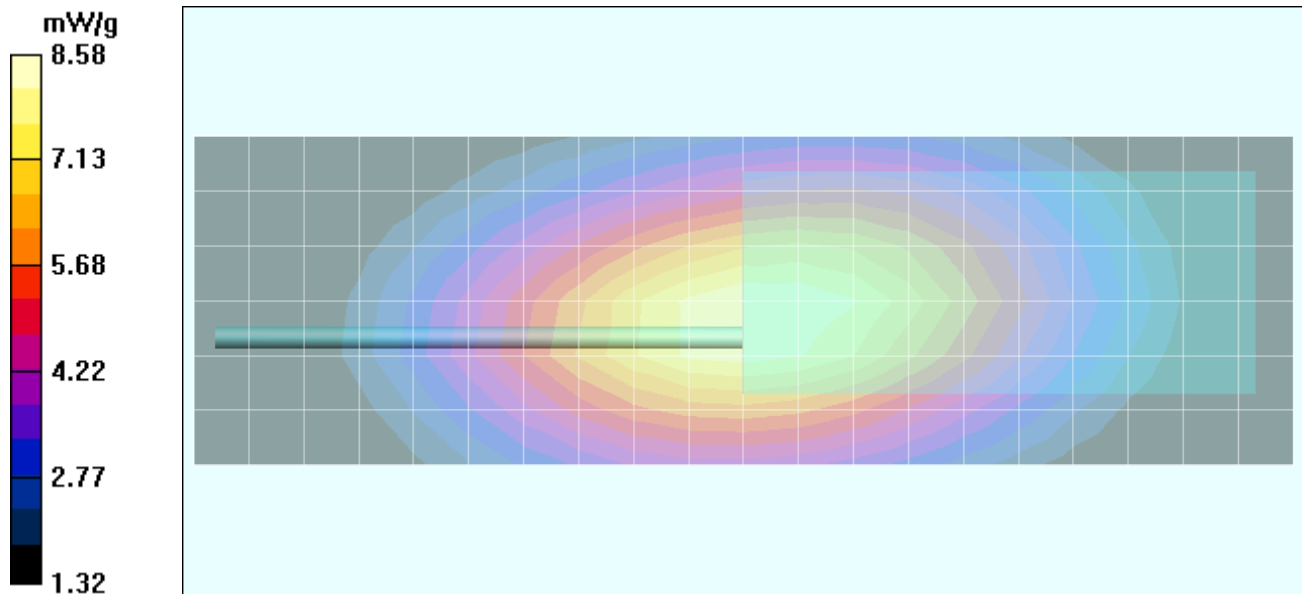

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.26 dBm (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 97.4 V/m; Power Drift = -0.396 dB

Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 8.03 mW/g; SAR(10 g) = 5.8 mW/g

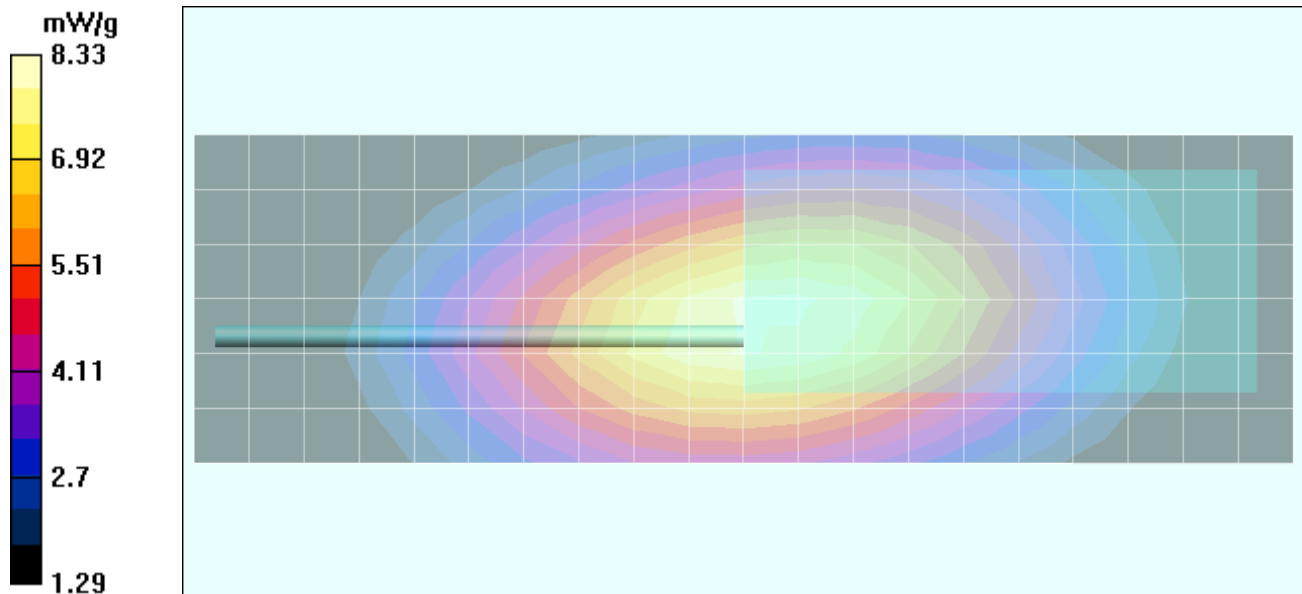

Z-Axis Scan

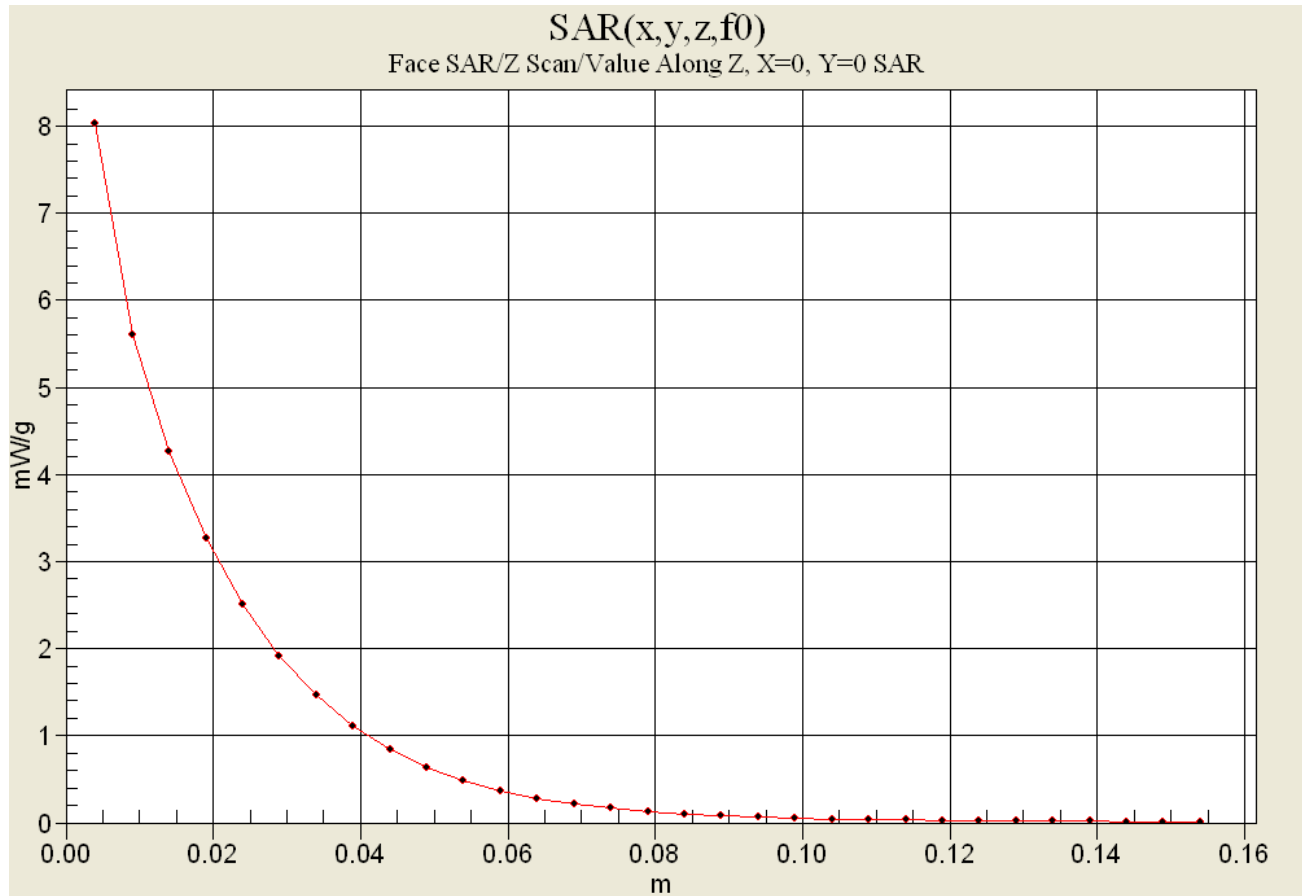

Face-Held SAR - NiMH Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.30 dBm (Conducted)

7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 95.4 V/m; Power Drift = -0.406 dB

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 7.58 mW/g; SAR(10 g) = 5.47 mW/g

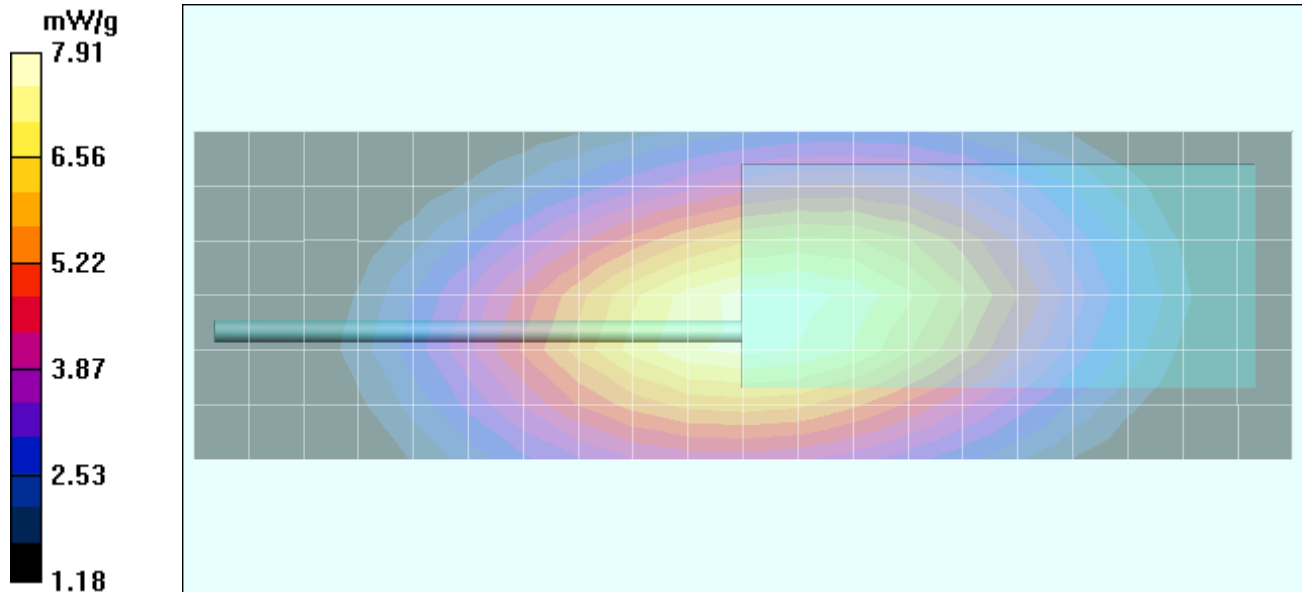

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 469.95 MHz; Duty Cycle: 1:1

RF Output Power: 37.21 dBm (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - High Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.9 V/m; Power Drift = -0.446 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 6.64 mW/g; SAR(10 g) = 4.79 mW/g

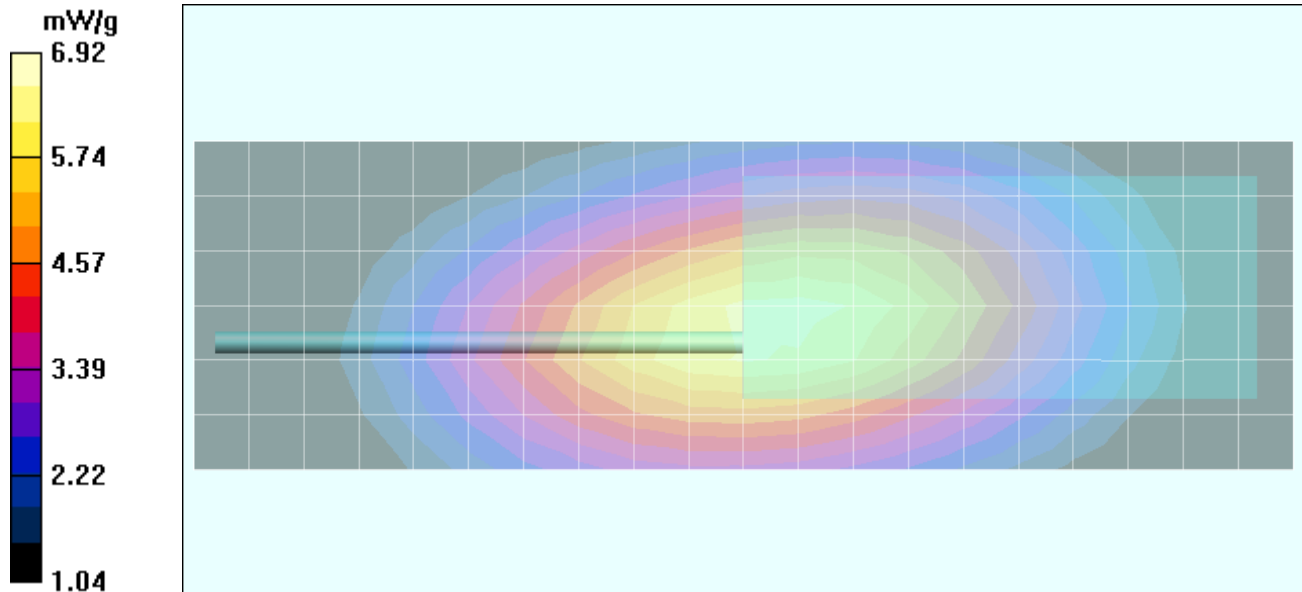

Face-Held SAR - Li-ion Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.27 dBm (Conducted)
 7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)
 Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 90 V/m; Power Drift = -0.0251 dB
 Peak SAR (extrapolated) = 11 W/kg
SAR(1 g) = 7.22 mW/g; SAR(10 g) = 5.22 mW/g

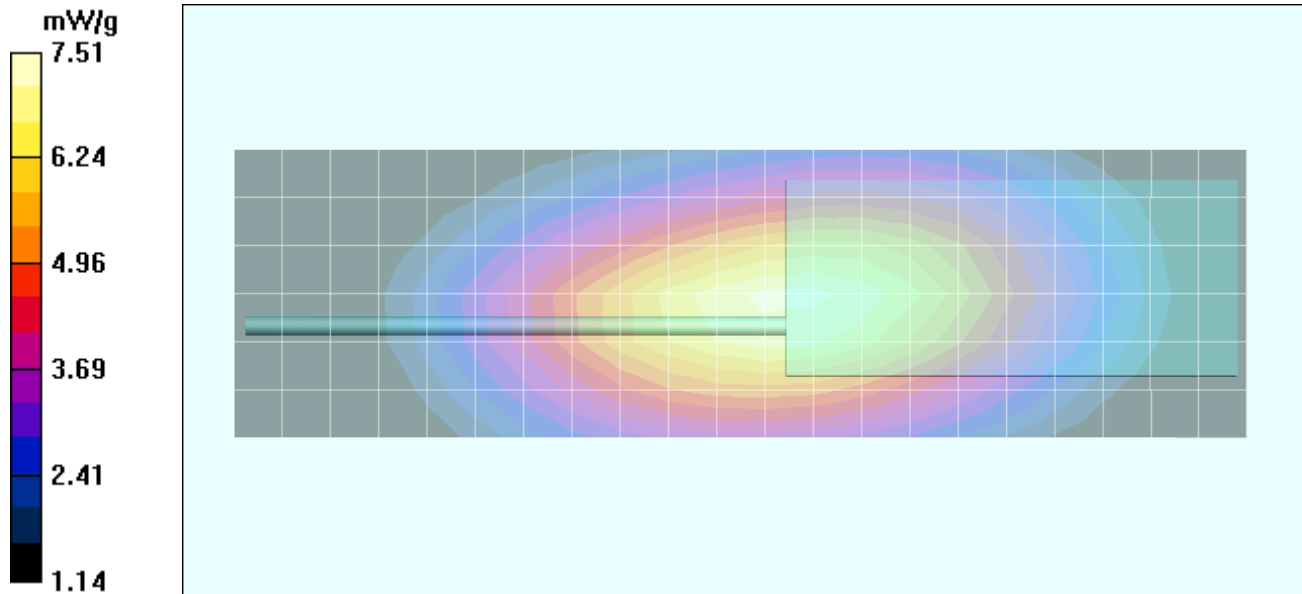

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF

Frequency: 435.05 MHz; Duty Cycle: 1:1

RF Output Power: 37.26 dBm (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.5 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 6.93 mW/g; SAR(10 g) = 5.01 mW/g

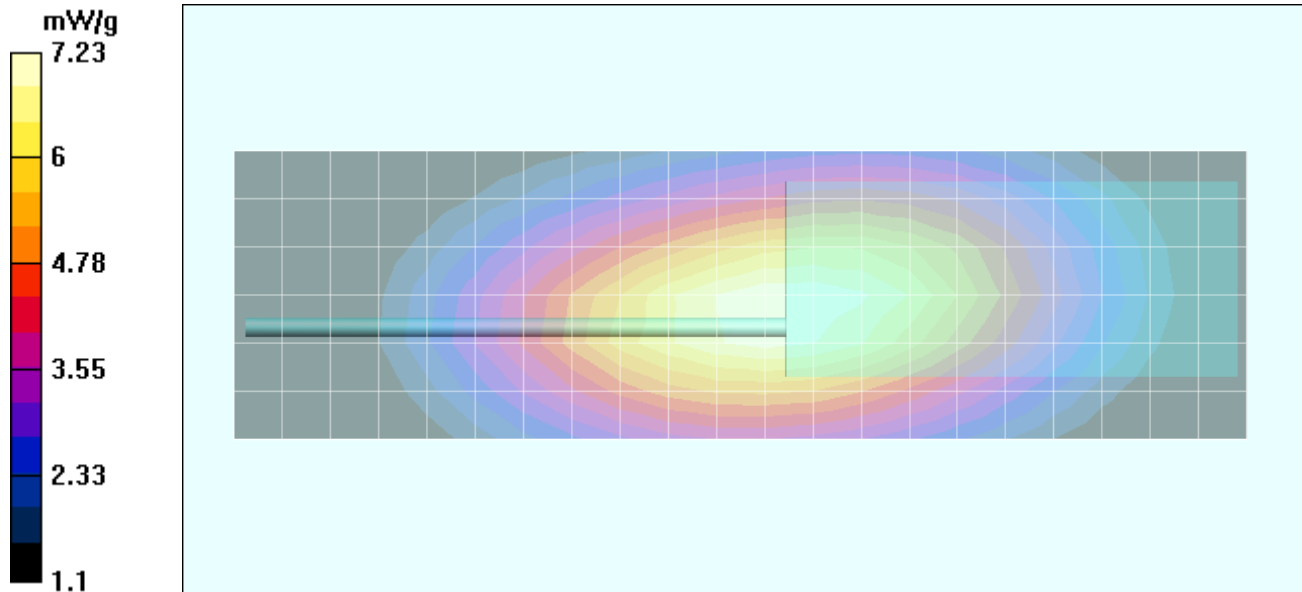

Face-Held SAR - NiMH Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/08/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 37%

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.31 dBm (Conducted)
 7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)
 Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Face-Held - 2.5 cm Separation Distance - Mid Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 88.7 V/m; Power Drift = -0.196 dB
 Peak SAR (extrapolated) = 10.4 W/kg
SAR(1 g) = 6.84 mW/g; SAR(10 g) = 4.95 mW/g

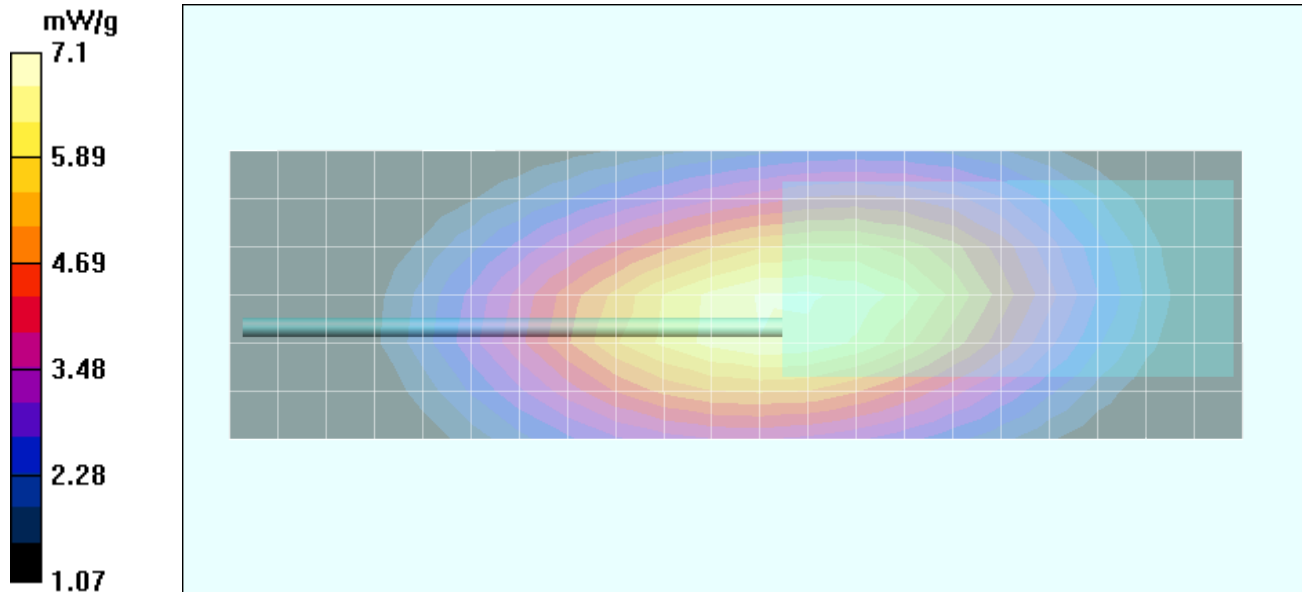

Body-Worn SAR - Li-ion Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.27 dBm (Conducted)
 7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 102.4 V/m; Power Drift = -0.329 dB
 Peak SAR (extrapolated) = 15.4 W/kg
SAR(1 g) = 9.78 mW/g; SAR(10 g) = 6.89 mW/g

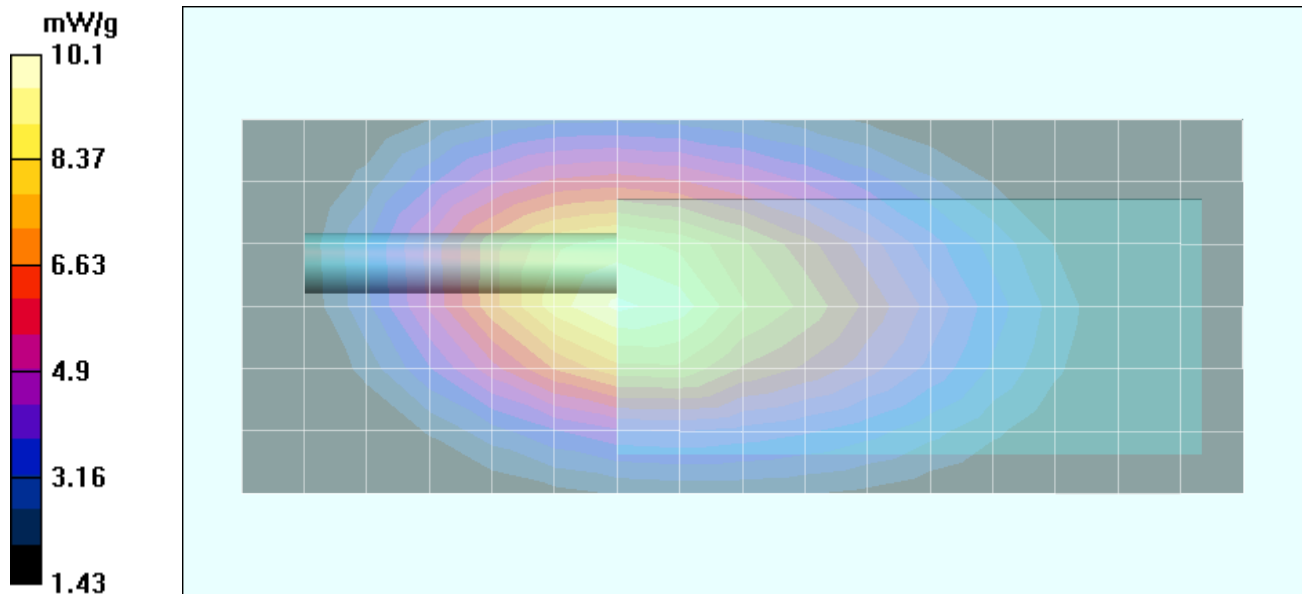

Body-Worn SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.21 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 103.4 V/m; Power Drift = -0.499 dB
 Peak SAR (extrapolated) = 15.3 W/kg
SAR(1 g) = 9.64 mW/g; SAR(10 g) = 6.77 mW/g

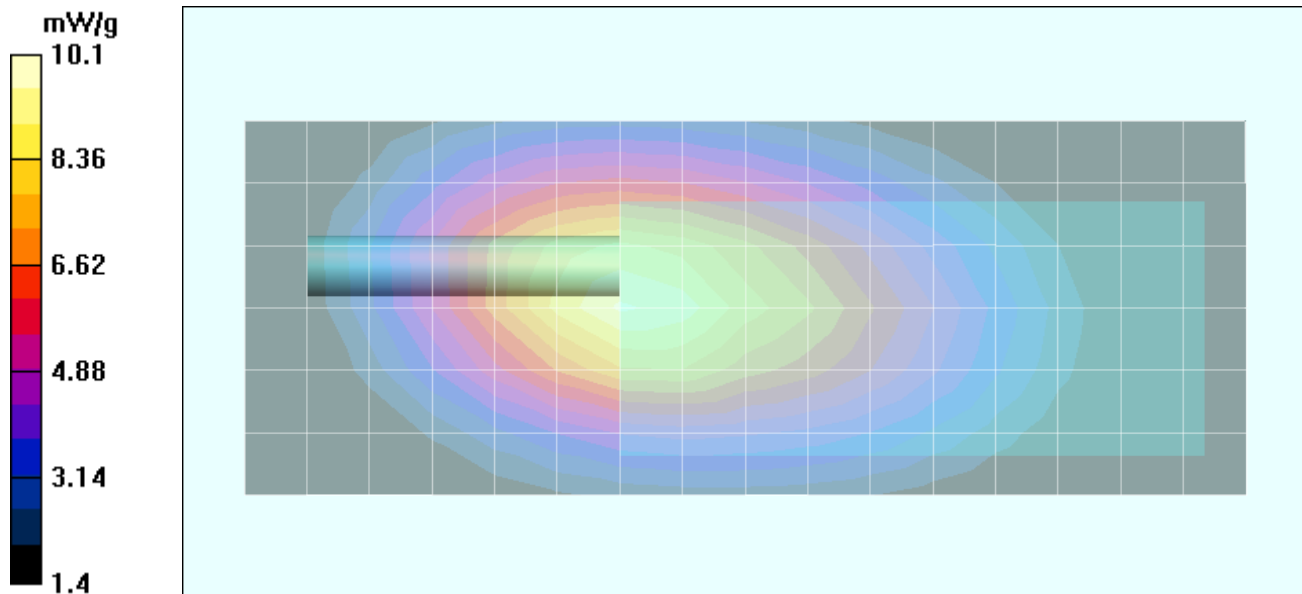

Body-Worn SAR - NiMH Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.22 dBm (Conducted)
 7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 97.5 V/m; Power Drift = -0.377 dB
 Peak SAR (extrapolated) = 14.2 W/kg
SAR(1 g) = 8.91 mW/g; SAR(10 g) = 6.24 mW/g

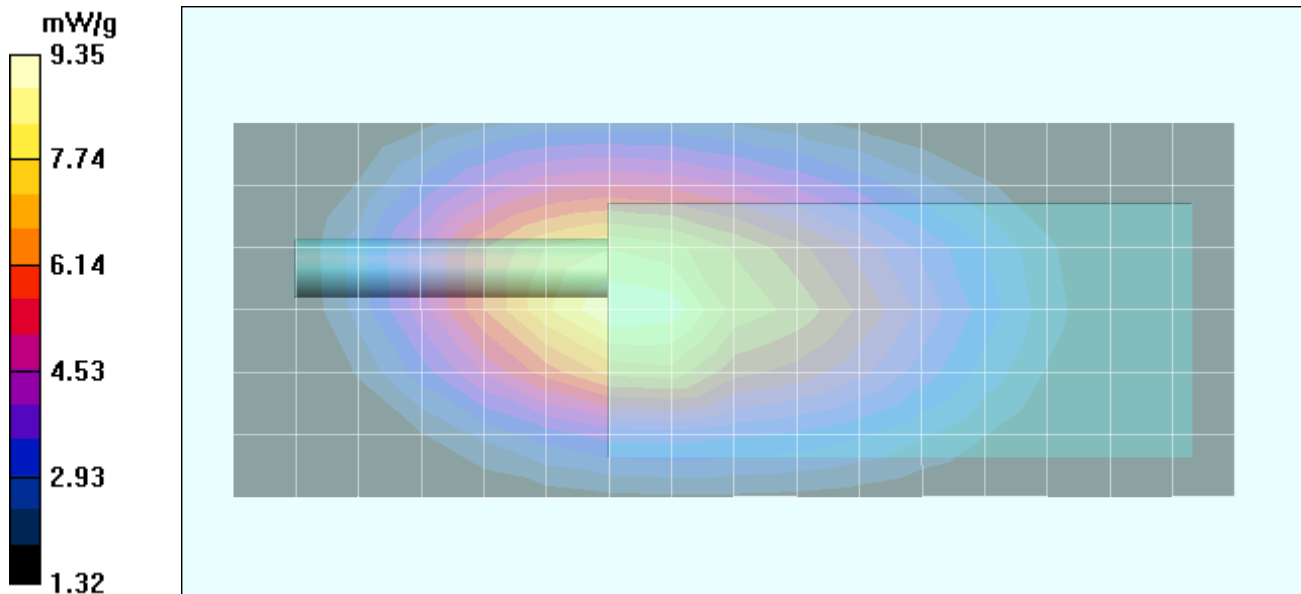

Body-Worn SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 469.95 MHz; Duty Cycle: 1:1
 RF Output Power: 37.12 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - High Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 88 V/m; Power Drift = -0.663 dB
 Peak SAR (extrapolated) = 12.7 W/kg
SAR(1 g) = 7.97 mW/g; SAR(10 g) = 5.54 mW/g

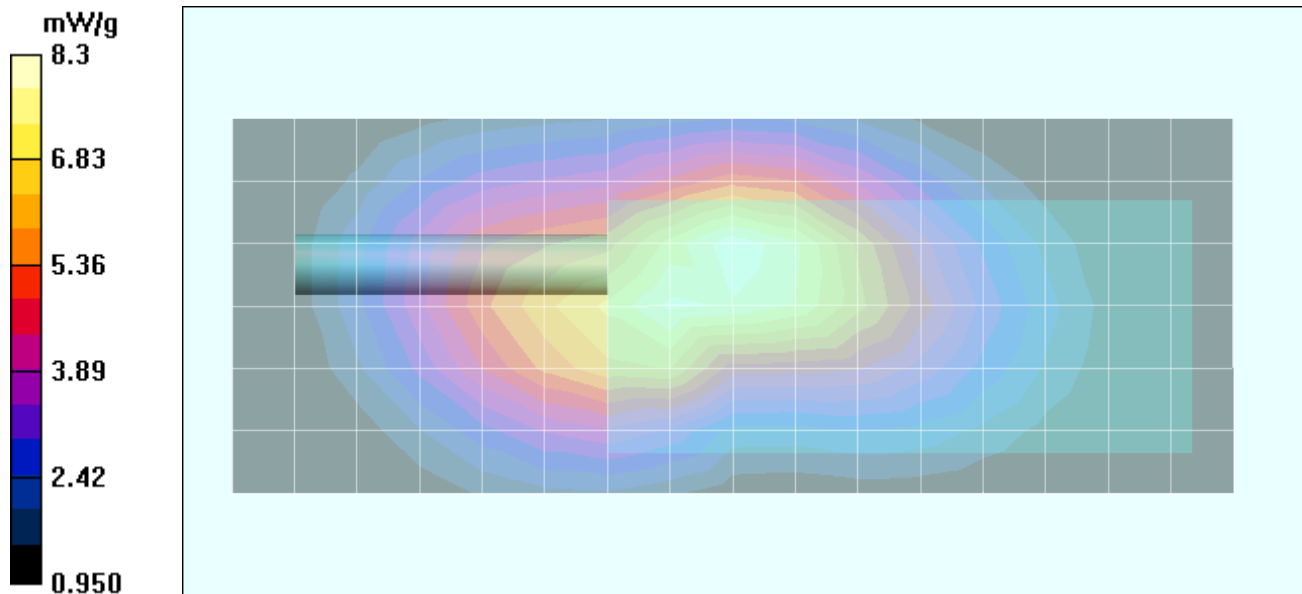

Body-Worn SAR - Li-ion Battery - Stubby Antenna (P/N: KRA-23M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.24 dBm (Conducted)
 7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 85 V/m; Power Drift = -0.174 dB
 Peak SAR (extrapolated) = 10.4 W/kg
SAR(1 g) = 6.60 mW/g; SAR(10 g) = 4.67 mW/g

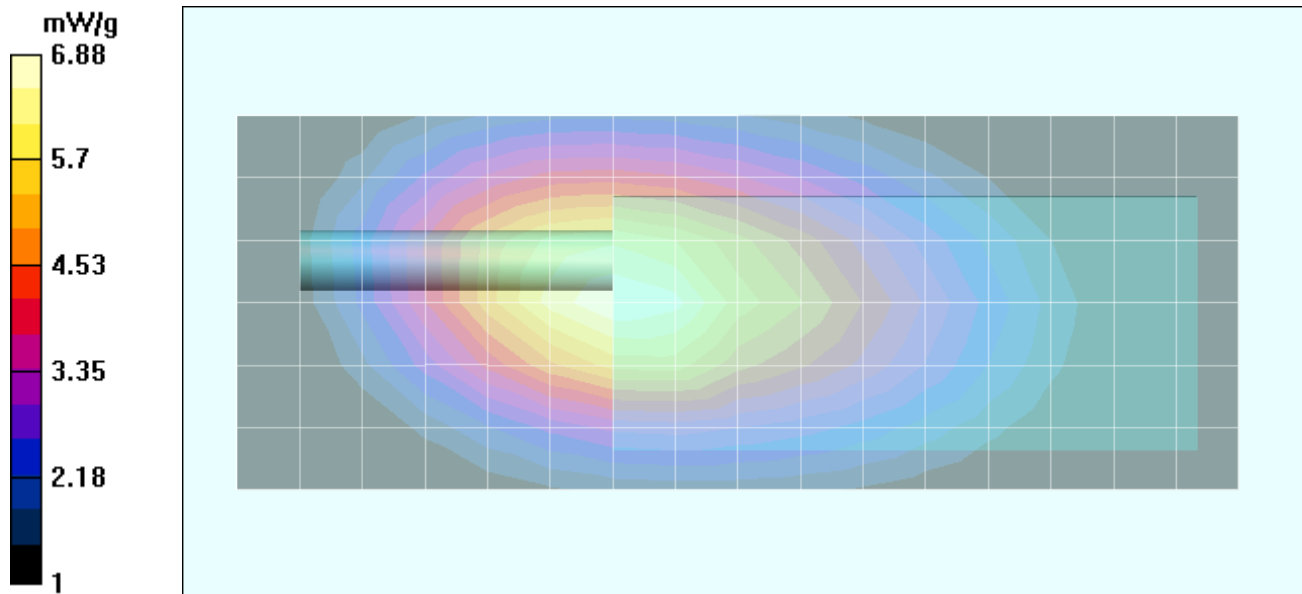

Body-Worn SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.26 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 85.1 V/m; Power Drift = -0.202 dB
 Peak SAR (extrapolated) = 10.8 W/kg
SAR(1 g) = 6.79 mW/g; SAR(10 g) = 4.78 mW/g

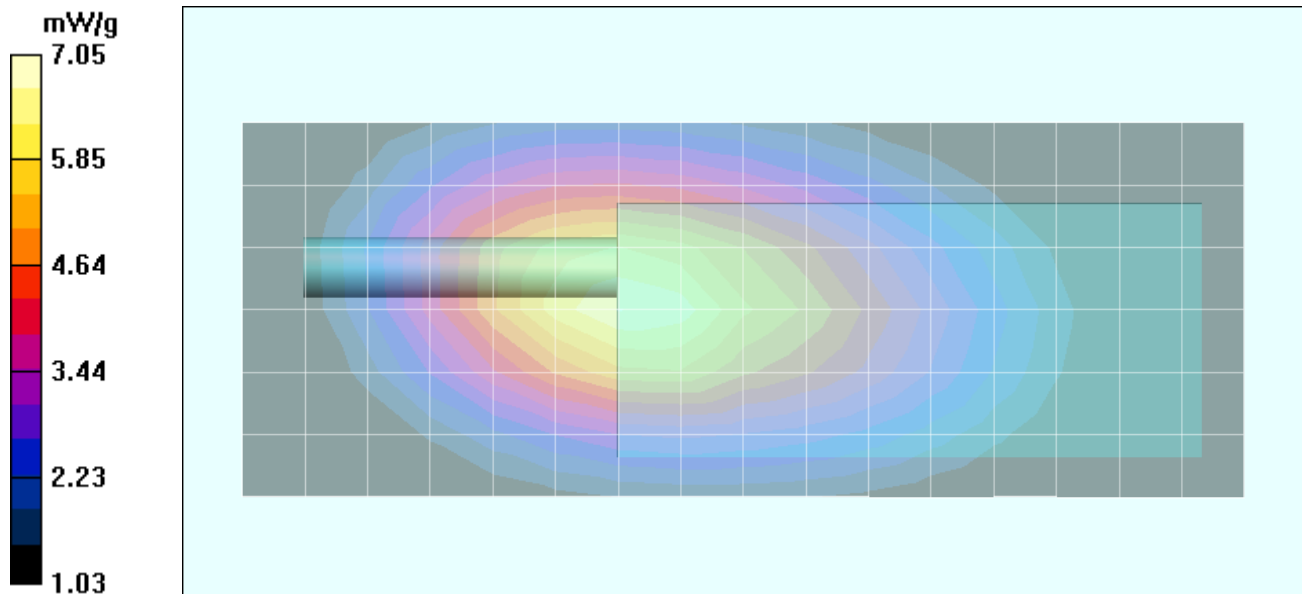

Body-Worn SAR - NiMH Battery - Stubby Antenna (P/N: KRA-23M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.24 dBm (Conducted)
 7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x17x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 83.4 V/m; Power Drift = -0.295 dB
 Peak SAR (extrapolated) = 10.6 W/kg
SAR(1 g) = 6.53 mW/g; SAR(10 g) = 4.57 mW/g

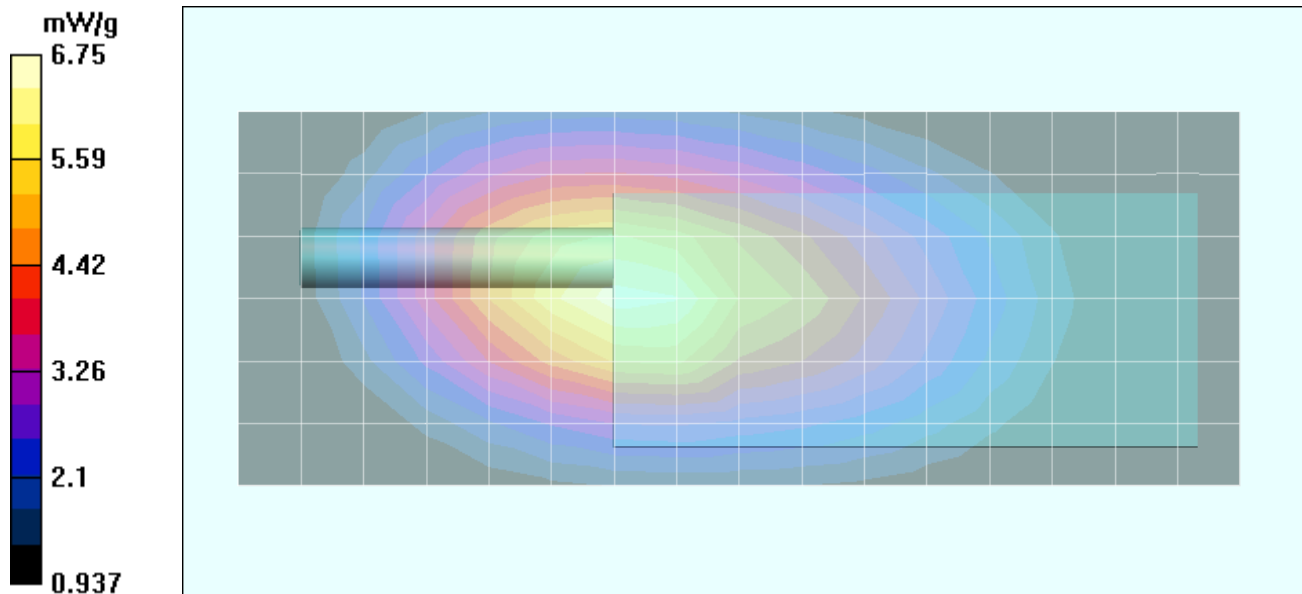

Body-Worn SAR - Li-ion Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.23 dBm (Conducted)
 7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 107.6 V/m; Power Drift = -0.226 dB
 Peak SAR (extrapolated) = 17.2 W/kg
SAR(1 g) = 11.0 mW/g; SAR(10 g) = 7.83 mW/g

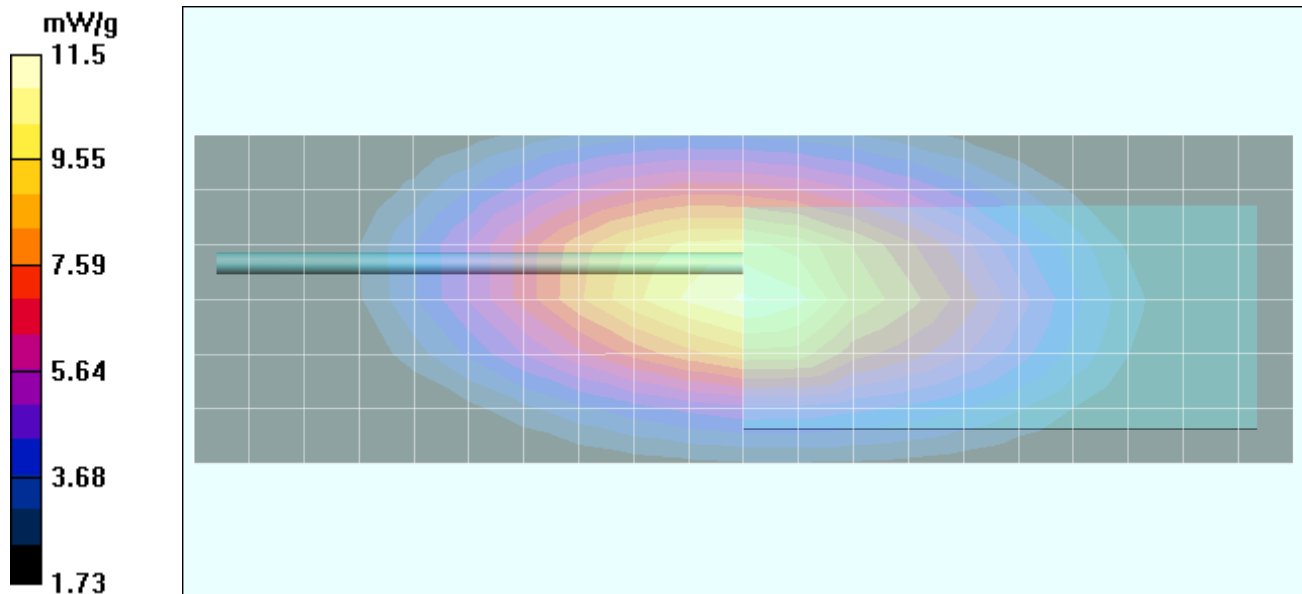

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.27 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x21x1):


Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 108.3 V/m; Power Drift = -0.455 dB
 Peak SAR (extrapolated) = 16.8 W/kg
SAR(1 g) = 10.7 mW/g; SAR(10 g) = 7.63 mW/g

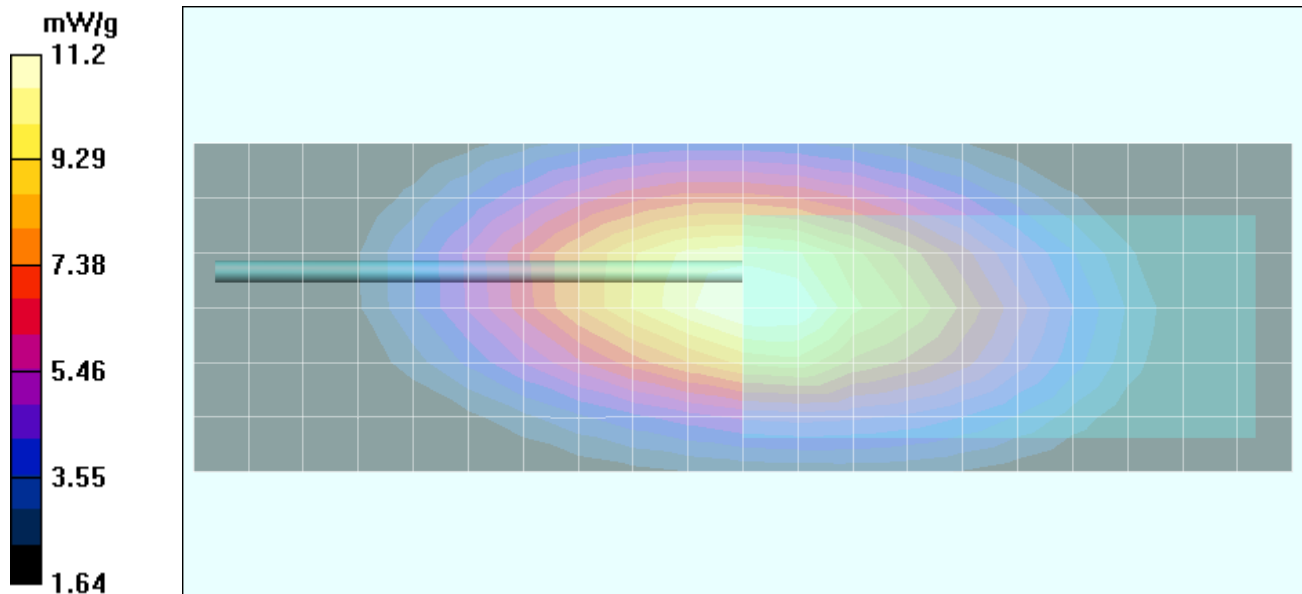

Z-Axis Scan

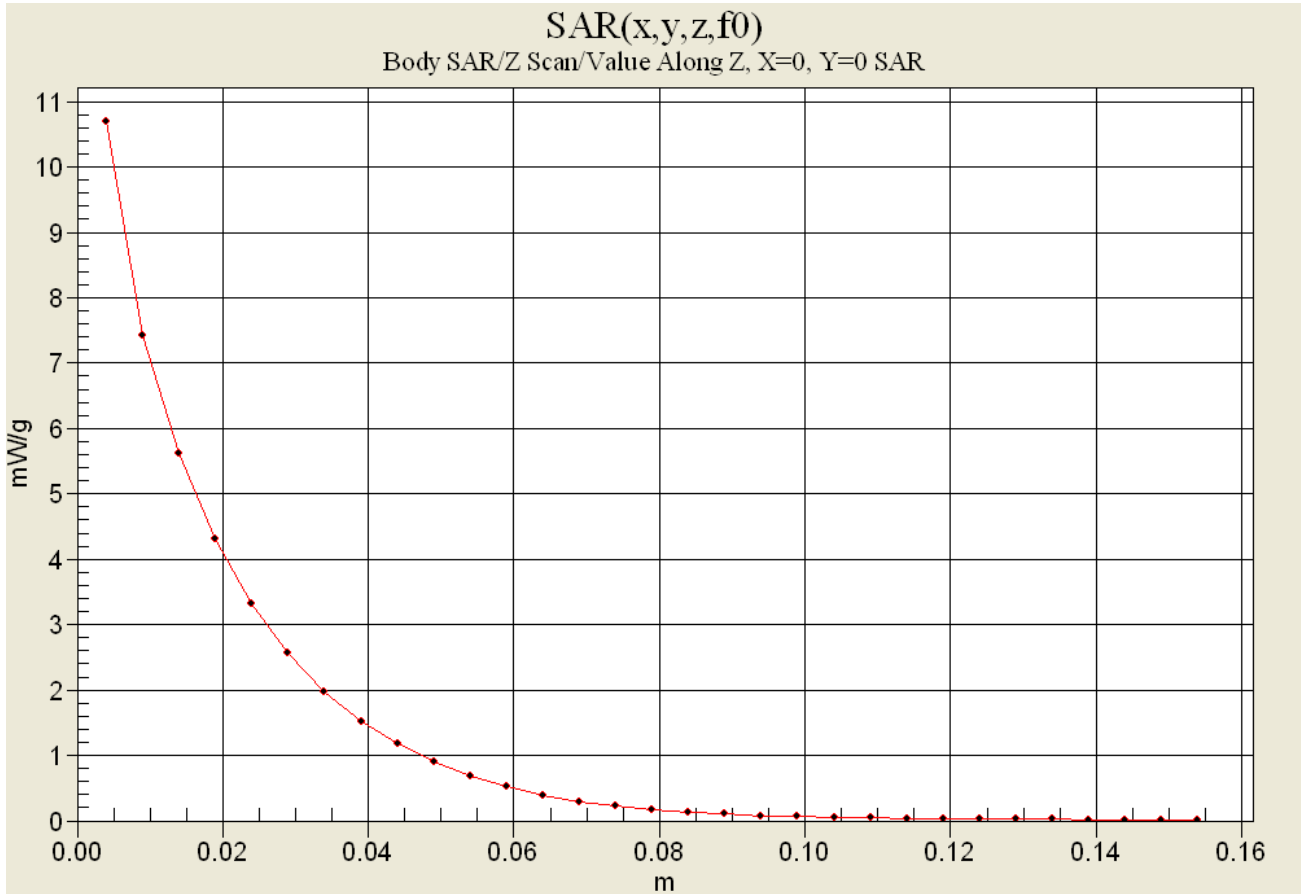


SAR-versus-Time Power Drift Evaluation

Belt-Clip & Speaker-Microphone Accessories

NiCd Battery (P/N: KNB-31A)

Whip Antenna (P/N: KRA-27M)

Mid Channel (435.05 MHz)

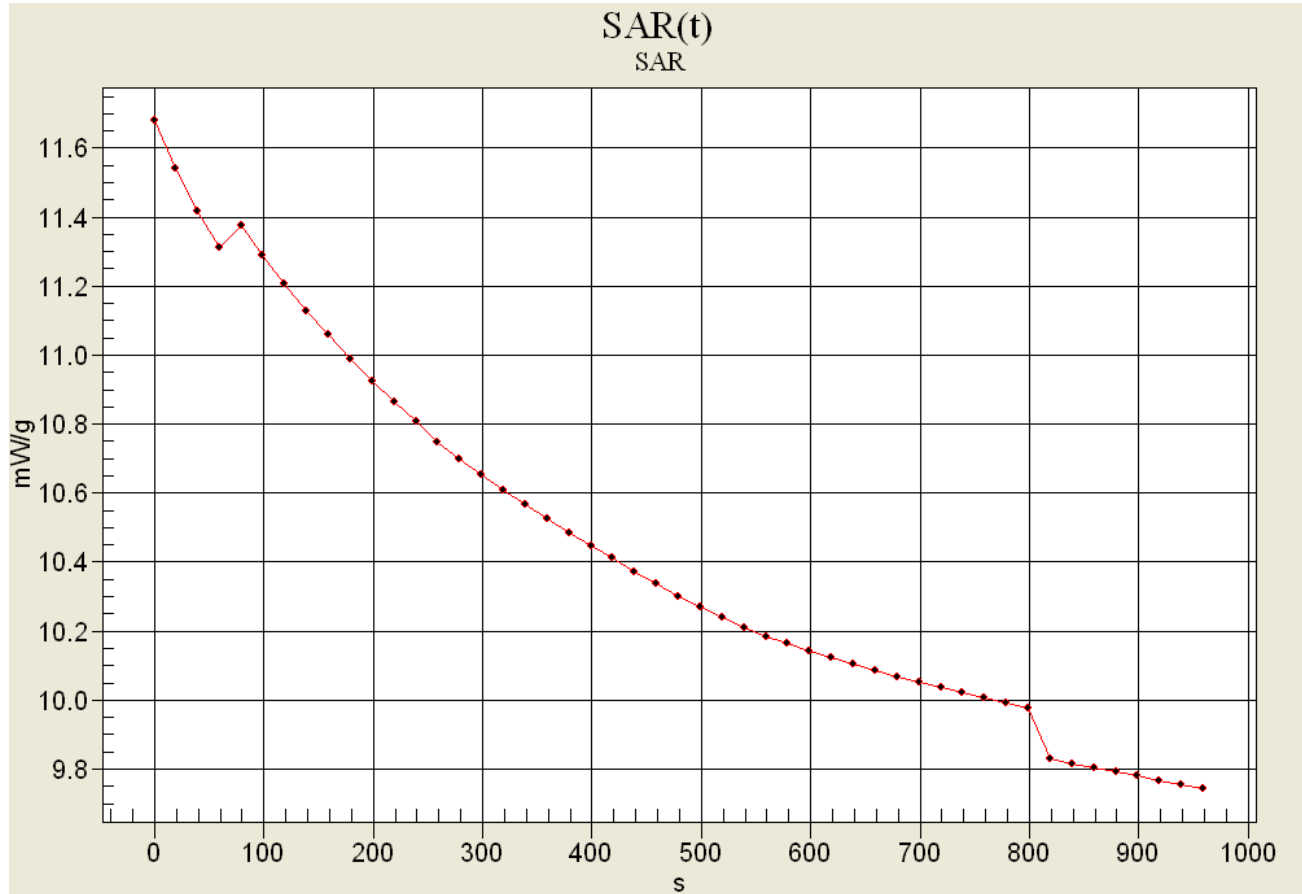

Start SAR: 11.685 mW/g

End SAR: 9.753 mW/g (-0.785 dB)

SAR after 340s: 10.573 mW/g (-0.434 dB)

(340s: Zoom Scan Duration)

Body-Worn SAR - NiMH Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.25 dBm (Conducted)
 7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 102.2 V/m; Power Drift = -0.431 dB
 Peak SAR (extrapolated) = 15.2 W/kg
SAR(1 g) = 9.44 mW/g; SAR(10 g) = 6.68 mW/g

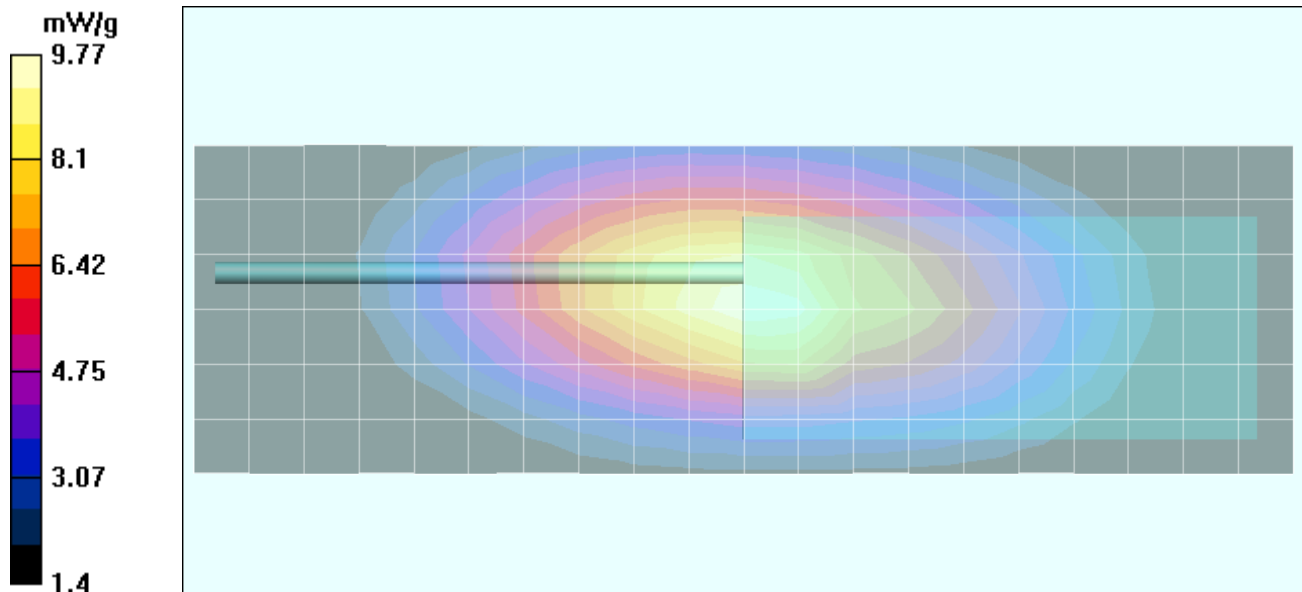

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 469.95 MHz; Duty Cycle: 1:1
 RF Output Power: 37.18 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - High Channel/Area Scan (7x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 91.9 V/m; Power Drift = -0.407 dB
 Peak SAR (extrapolated) = 14.3 W/kg
SAR(1 g) = 9.01 mW/g; SAR(10 g) = 6.23 mW/g

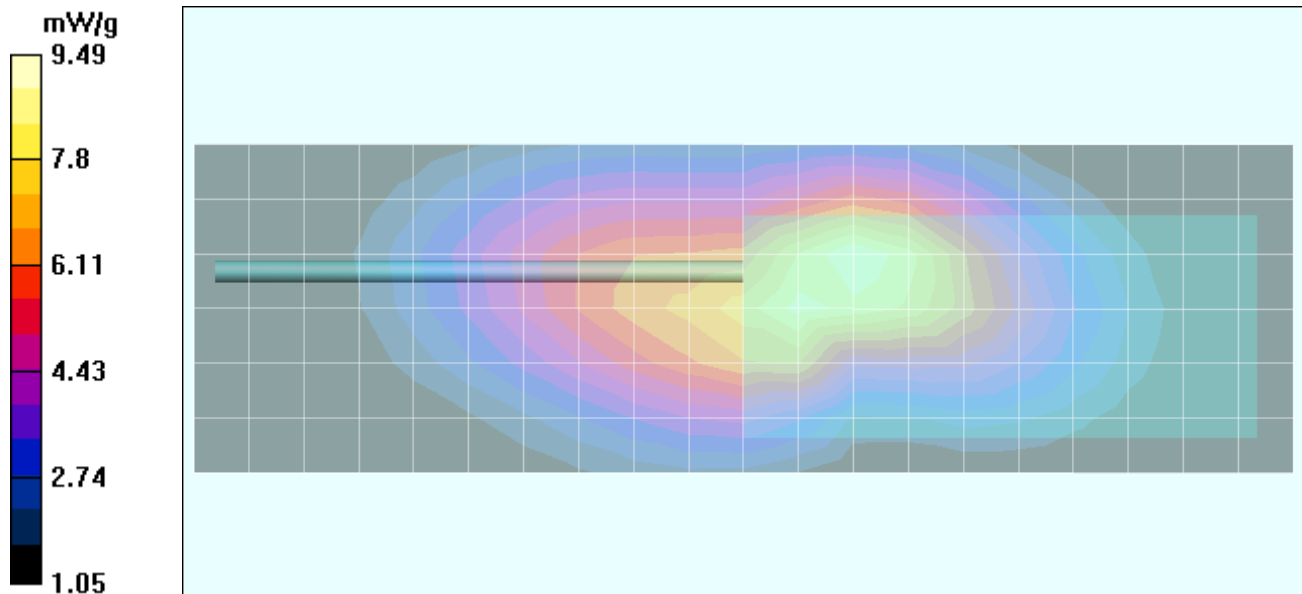

Body-Worn SAR - Li-ion Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.23 dBm (Conducted)
 7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.7 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 98 V/m; Power Drift = -0.0847 dB
 Peak SAR (extrapolated) = 14.2 W/kg
SAR(1 g) = 9.15 mW/g; SAR(10 g) = 6.56 mW/g

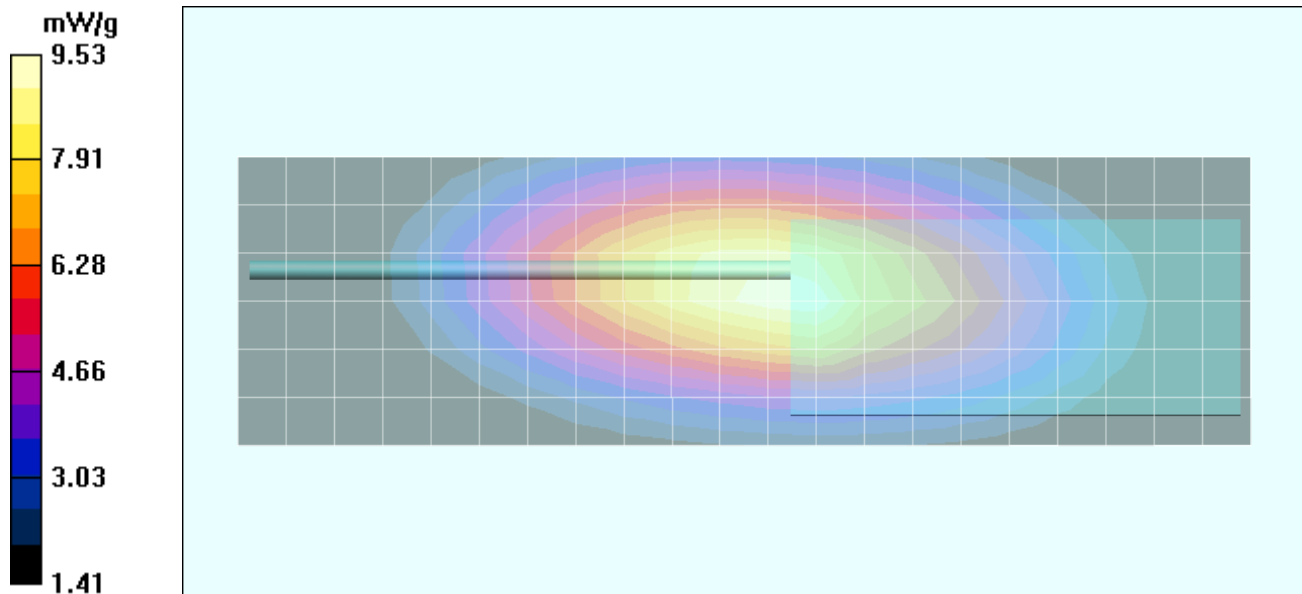

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.24 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 99 V/m; Power Drift = -0.170 dB
 Peak SAR (extrapolated) = 14.3 W/kg
SAR(1 g) = 9.16 mW/g; SAR(10 g) = 6.55 mW/g

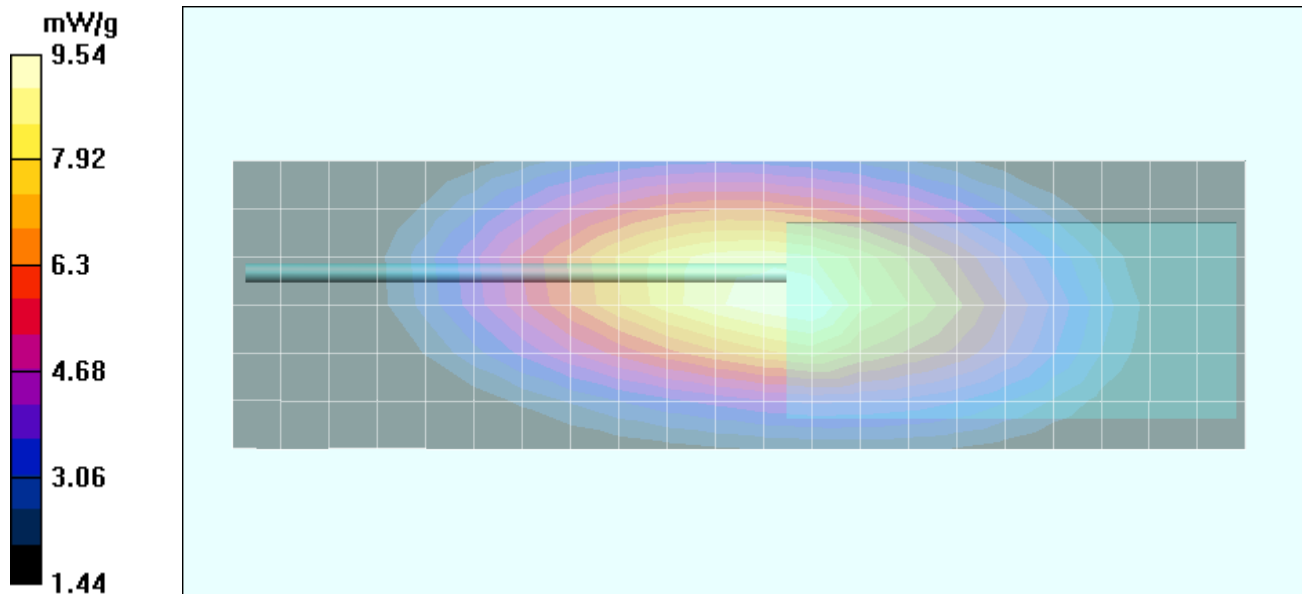

Body-Worn SAR - NiMH Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 435.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.27 dBm (Conducted)
 7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 98 V/m; Power Drift = -0.248 dB
 Peak SAR (extrapolated) = 14.1 W/kg
SAR(1 g) = 8.94 mW/g; SAR(10 g) = 6.36 mW/g

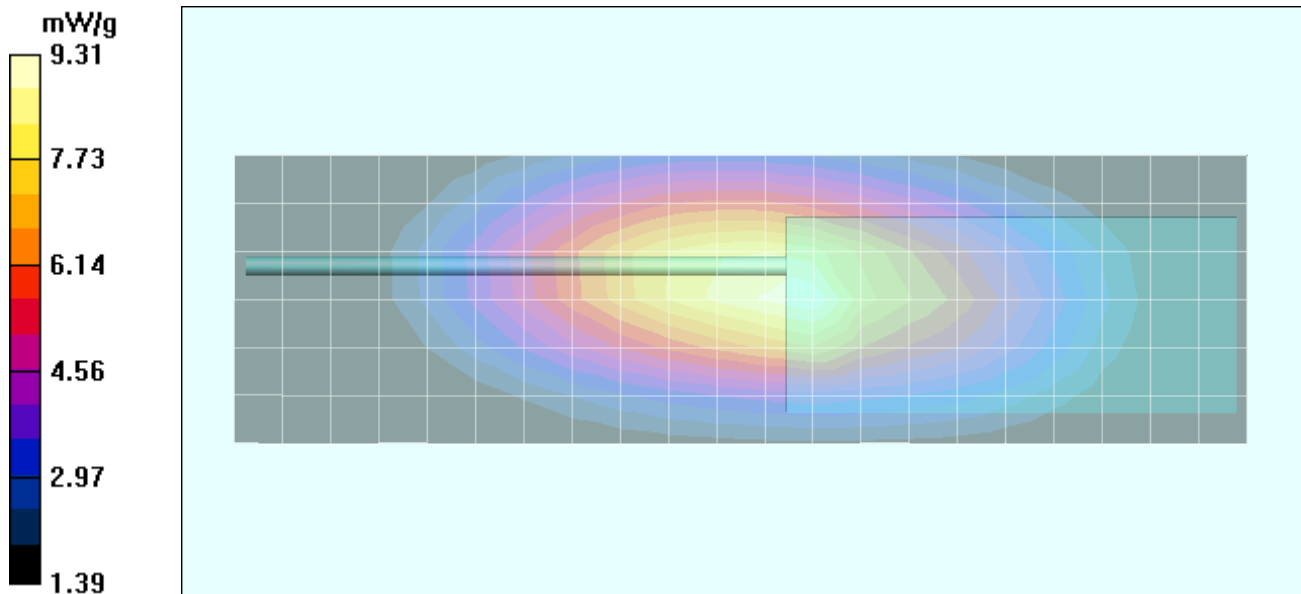

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M3)

Date Tested: 06/09/04

DUT: Kenwood Model: TK-3180-K2; Type: Portable FM UHF PTT Radio Transceiver; Serial: U-09

Ambient Temp: 23.4 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 41%

Body-Worn Accessories: Plastic Belt-Clip (P/N: KBH-11), Speaker-Microphone (P/N: KMC-25)

Communication System: FM UHF
 Frequency: 400.05 MHz; Duty Cycle: 1:1
 RF Output Power: 37.04 dBm (Conducted)
 7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)
 Medium: M450 ($\sigma = 0.94$ mho/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.6, 7.6, 7.6); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Low Channel/Area Scan (7x22x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 1.2 cm Belt-Clip Separation Distance from Battery - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 97.7 V/m; Power Drift = -0.114 dB
 Peak SAR (extrapolated) = 14.7 W/kg
SAR(1 g) = 9.37 mW/g; SAR(10 g) = 6.69 mW/g

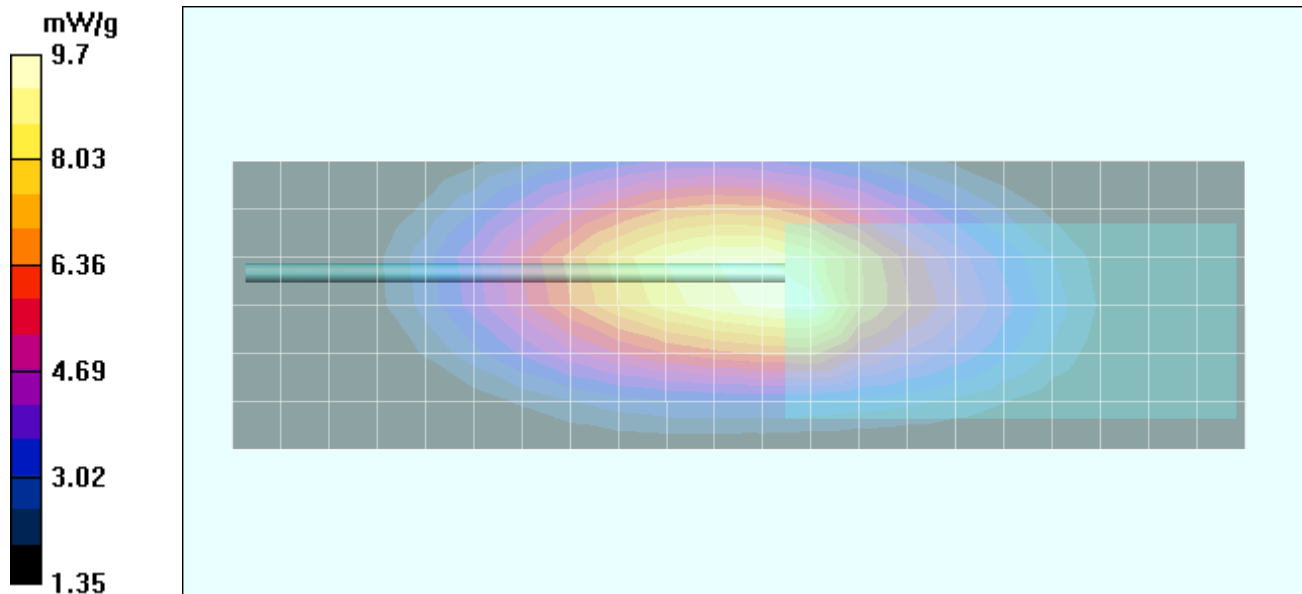

Test Report S/N:	052104-510ALH
Test Date(s):	June 08-09, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

System Performance Check - 450 MHz Dipole

Date Tested: 06/08/04

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136

Ambient Temp: 23.0 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 102.2 kPa; Humidity: 42%

Communication System: CW
 Forward Conducted Power: 250mW
 Frequency: 450 MHz; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.88$ mho/m; $\epsilon_r = 43.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

450 MHz System Performance Check/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 38.8 V/m; Power Drift = -0.008 dB
 Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.802 mW/g

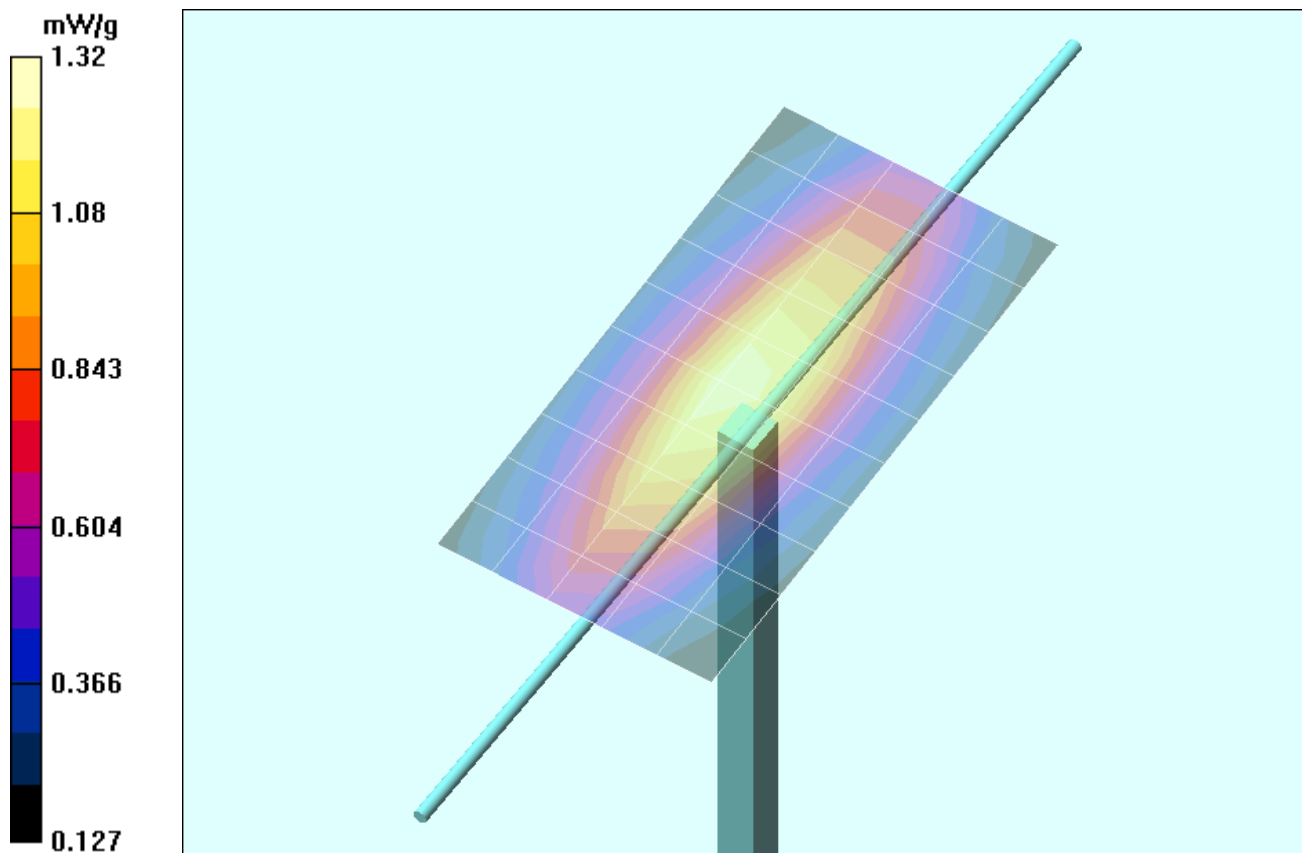

Z-Axis Scan

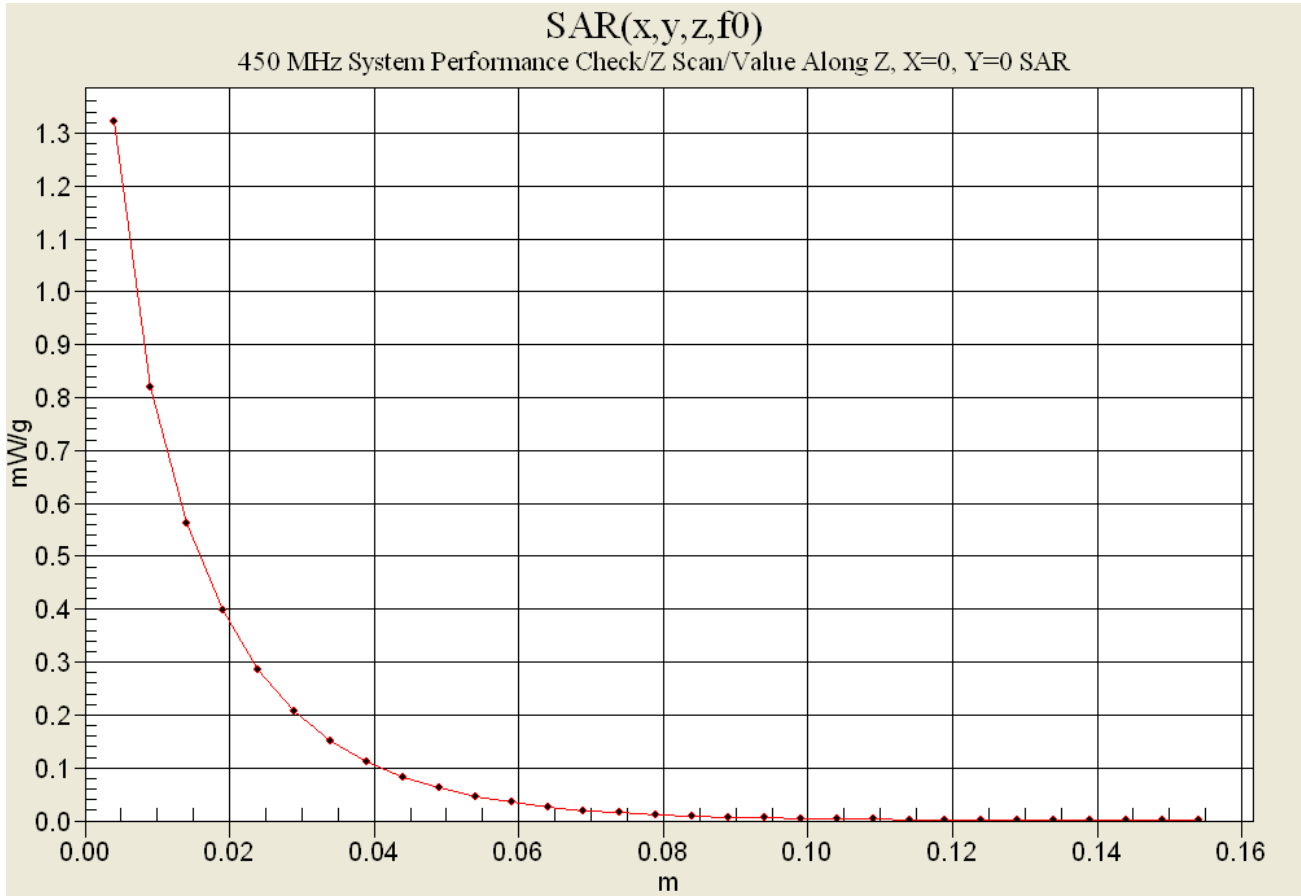

System Performance Check - 450 MHz Dipole

Date Tested: 06/09/04

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136

Ambient Temp: 23.6 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 39%

Communication System: CW
 Forward Conducted Power: 250mW
 Frequency: 450 MHz; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.86$ mho/m; $\epsilon_r = 43.3$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

450 MHz System Performance Check/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm

450 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.2 V/m; Power Drift = -0.0 dB
 Peak SAR (extrapolated) = 2.15 W/kg
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.798 mW/g

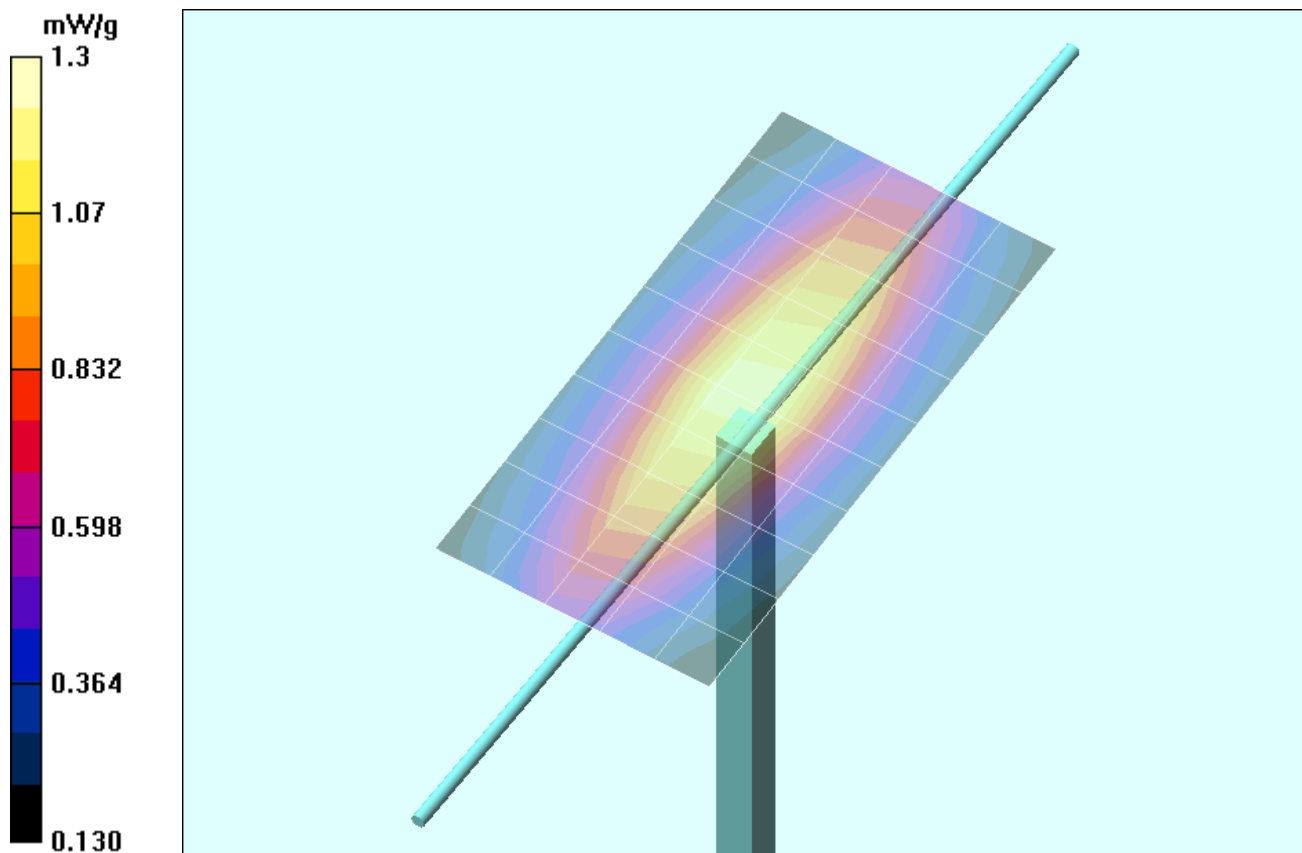

Z-Axis Scan

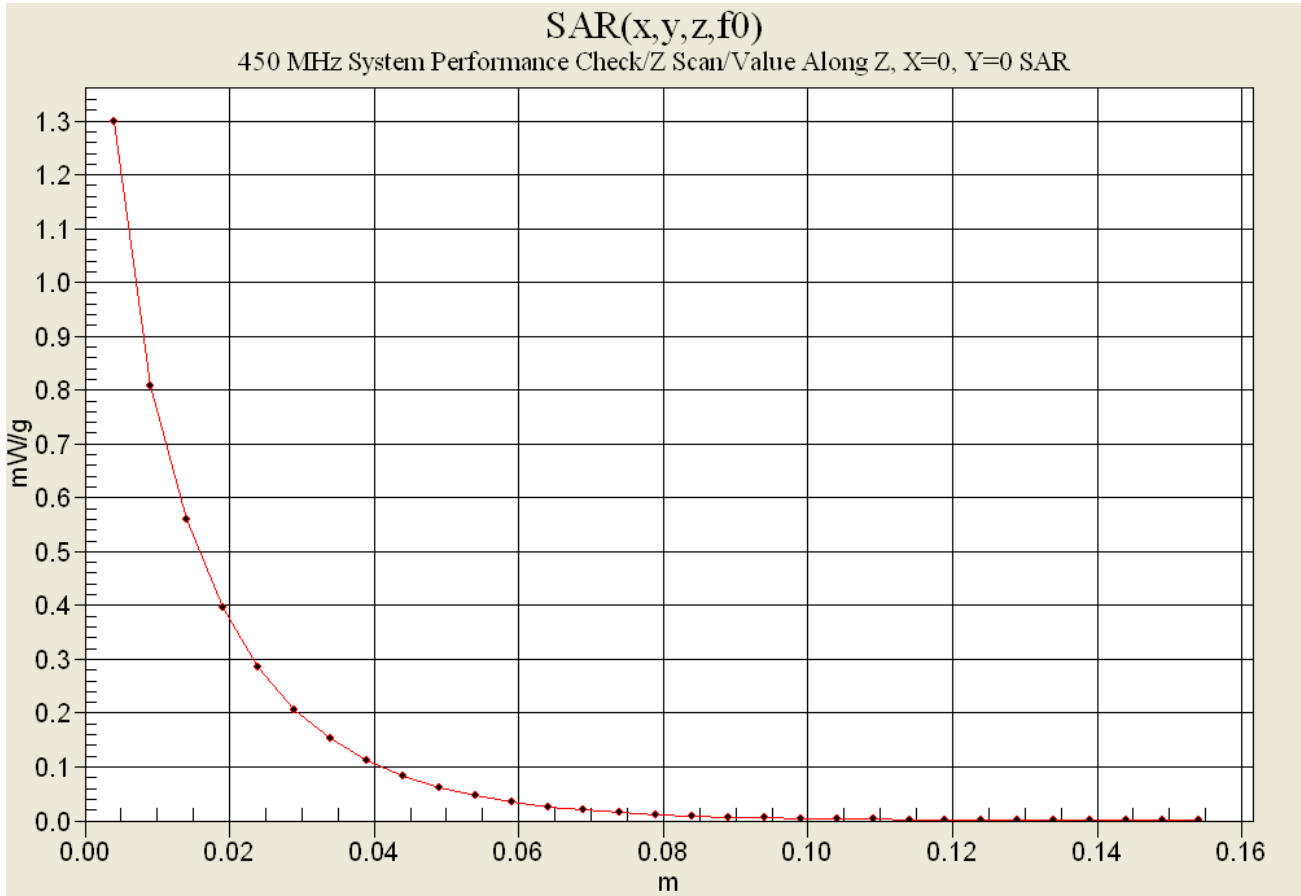

Test Report S/N:	052104-510ALH
Test Date(s):	June 08-09, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX C - SYSTEM VALIDATION

450MHz SYSTEM VALIDATION DIPOLE

Type:

450MHz Validation Dipole

Serial Number:

136

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

November 4, 2003

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:

Spencer Watson

Approved by:

Russell W. Pope

1. Dipole Construction & Electrical Characteristics


The validation dipole was constructed in accordance with the IEEE Std “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”. The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 450MHz $\text{Re}\{Z\} = 49.982\Omega$


$\text{Im}\{Z\} = 7.2324\Omega$

Return Loss at 450MHz


-22.597dB

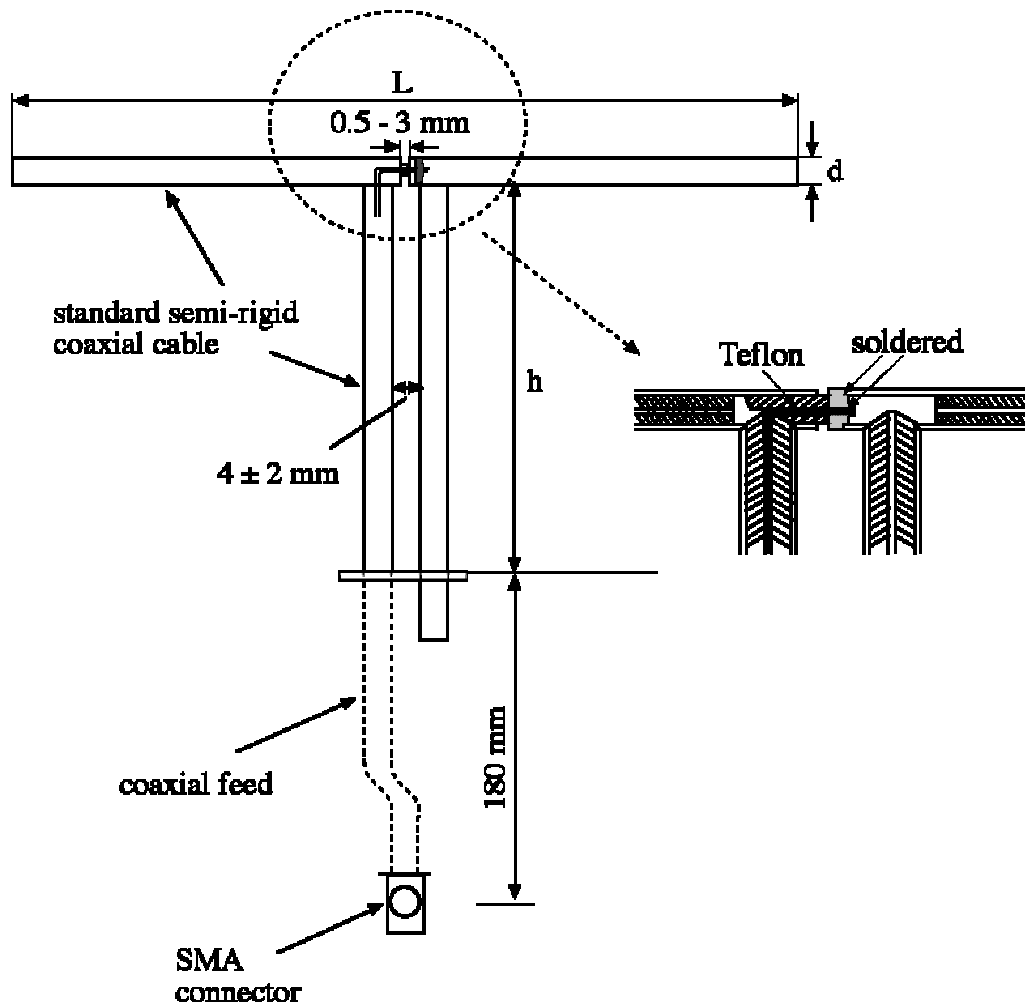

CH1 S11 1 U FS 1: 49.982 Ω 7.2324 Ω 2.5579 nH 4 Nov 2003 12:04:21 450.000 000 MHz

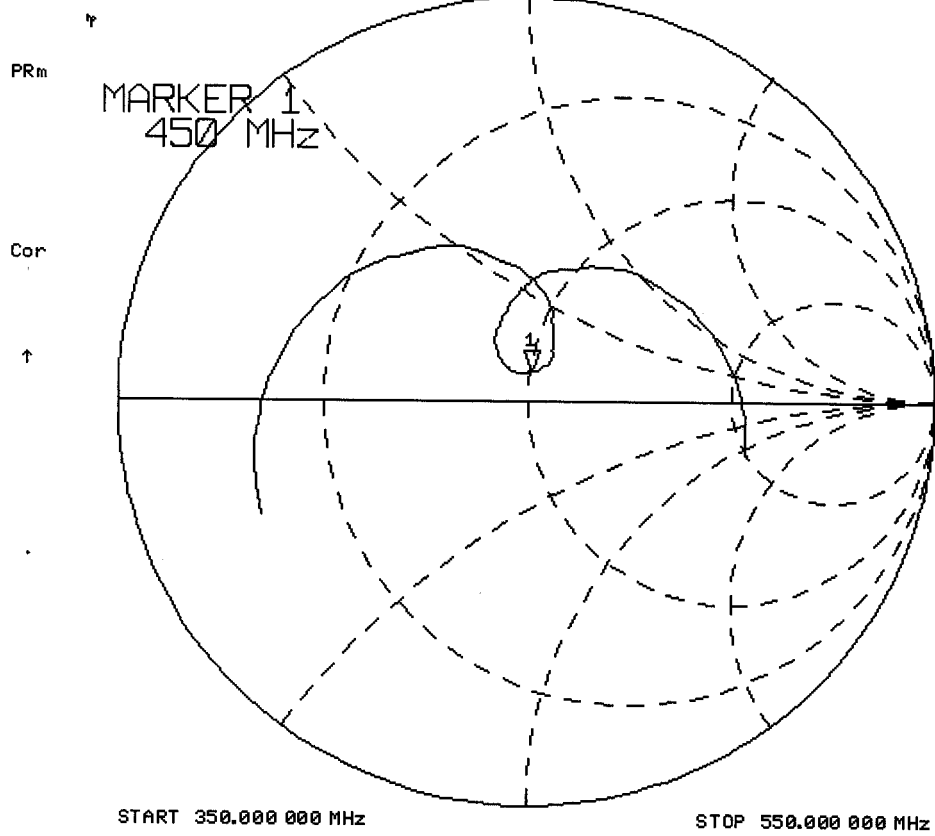

[CH1] S11 LOG 10 dB/REF 0 dB 4 Nov 2003 12:06:24
1:-22.597 dB 450.000 000 MHz

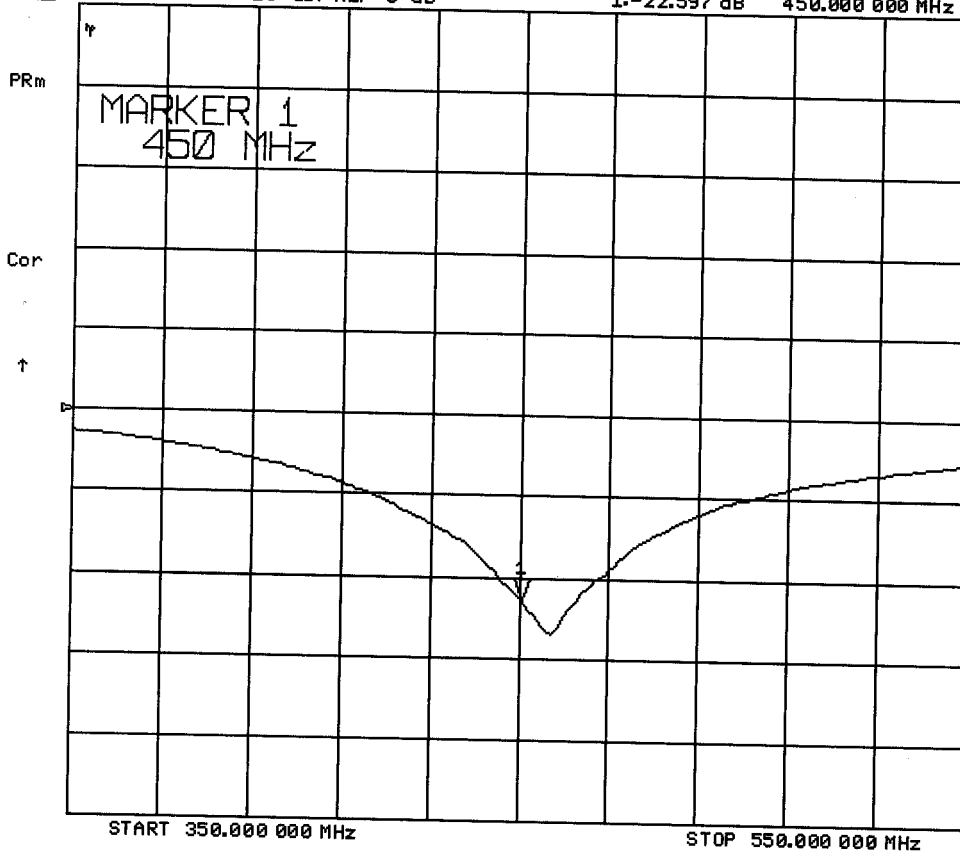

2. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6




3. Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material. The inner dimensions of the phantom are as follows:

Length: 83.5 cm
 Width: 36.9 cm
 Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

4. Dimensions of Plexiglas Planar Phantom

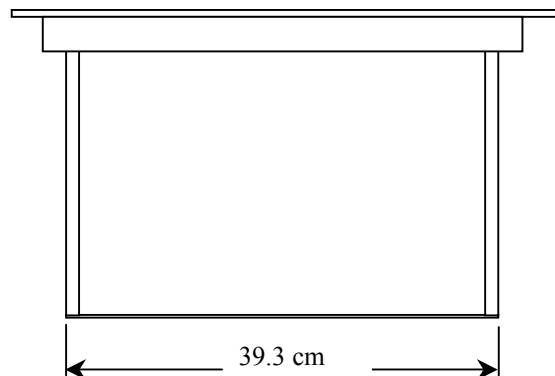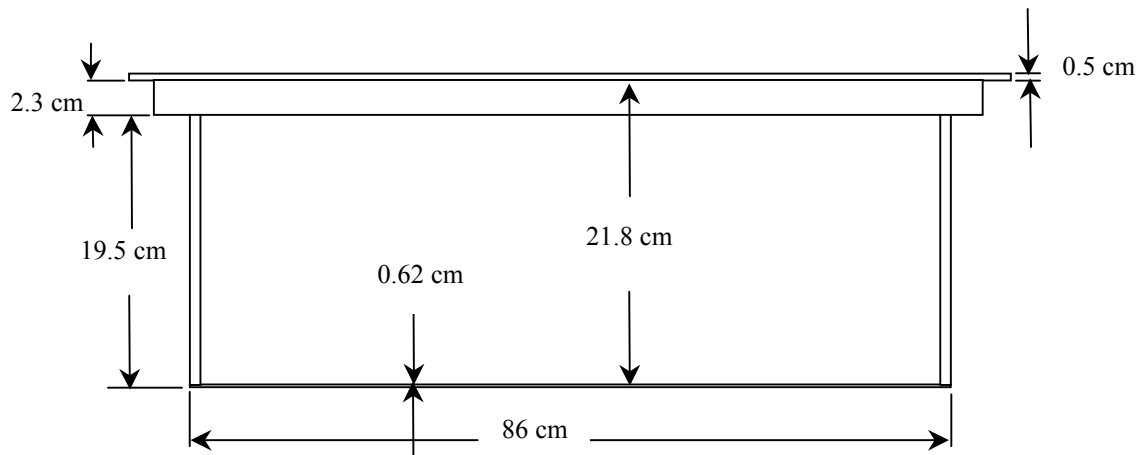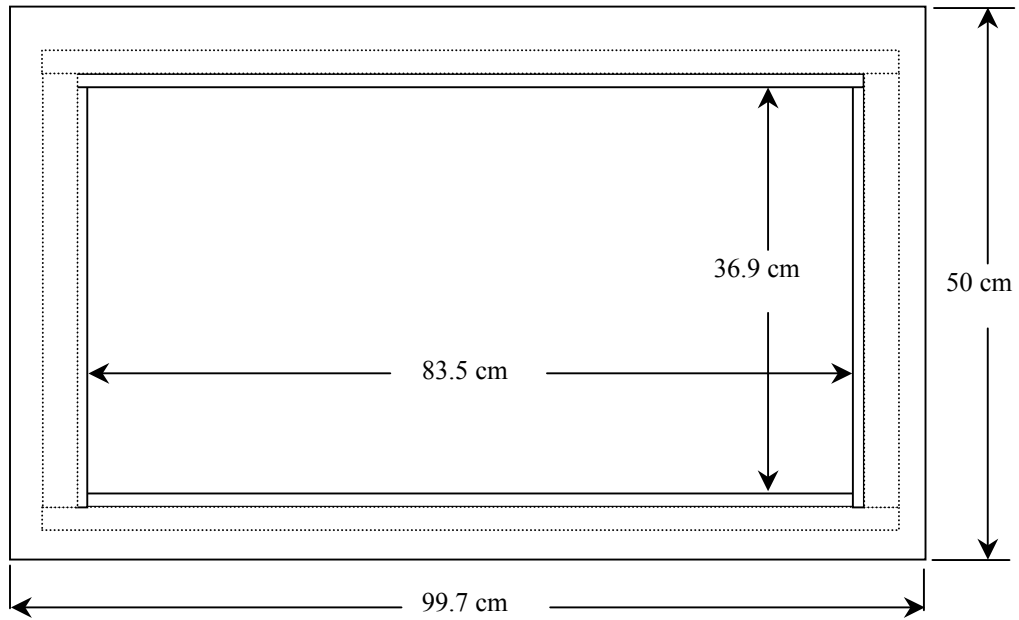

5. 450MHz System Validation Setup



450MHz System Validation Setup



6. Measurement Conditions

The planar phantom was filled with brain simulating tissue having the following parameters at 450MHz:

Relative Permittivity:	43.7
Conductivity:	0.88 mho/m
Fluid Temperature:	22.0 °C
Fluid Depth:	≥ 15.0 cm

Environmental Conditions:


Ambient Temperature:	22.1 °C
Humidity:	49 %
Barometric Pressure:	102.8 kPa

The 450MHz simulated brain tissue mixture consists of the following ingredients:

Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
450MHz Target Dielectric Parameters at 22 °C	$\epsilon_r = 43.5$ $\sigma = 0.87 \text{ S/m}$

7. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

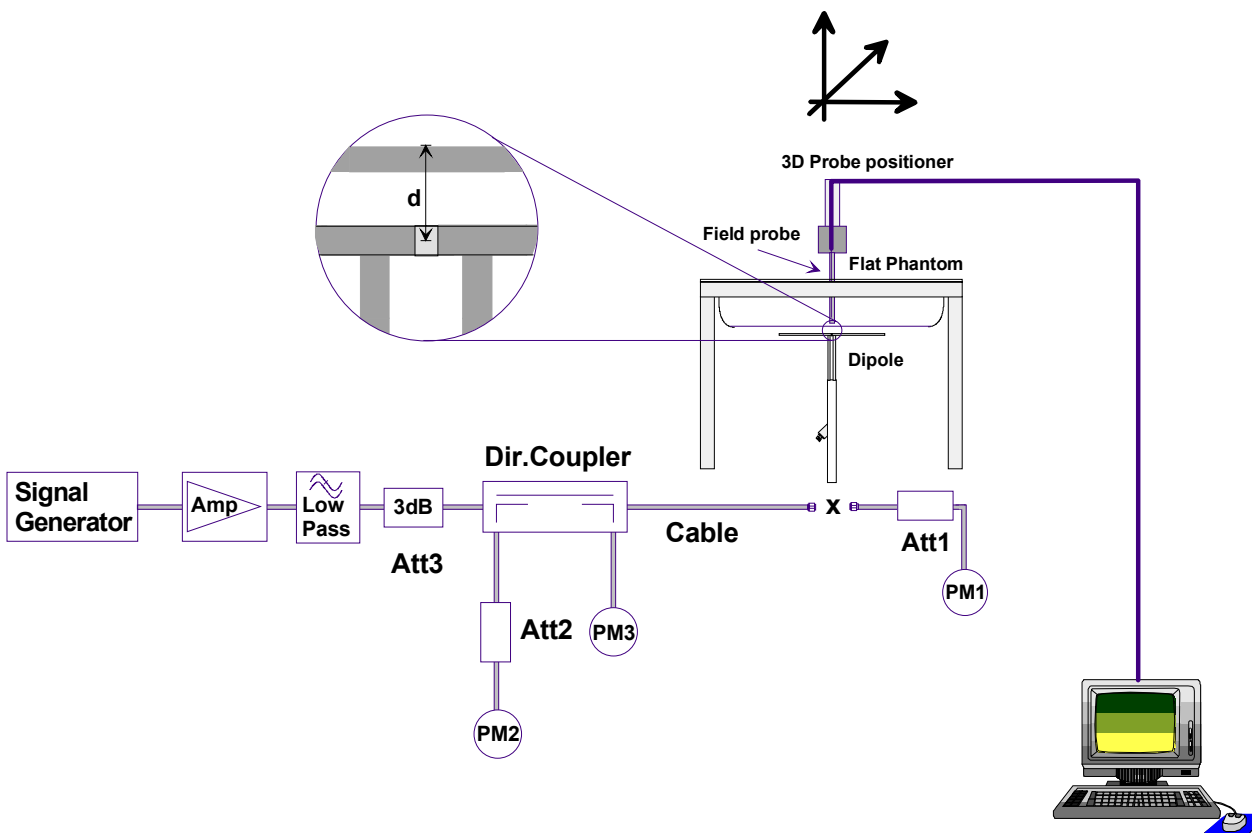

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

8. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	1.29	5.16	0.810	3.24	2.28
Test 2	1.31	5.24	0.827	3.31	2.31
Test 3	1.30	5.20	0.823	3.29	2.29
Test 4	1.30	5.20	0.822	3.29	2.29
Test 5	1.29	5.16	0.819	3.28	2.28
Test 6	1.30	5.20	0.826	3.30	2.28
Test 7	1.31	5.24	0.826	3.30	2.30
Test 8	1.31	5.24	0.829	3.32	2.30
Test 9	1.30	5.20	0.822	3.29	2.28
Test 10	1.31	5.24	0.822	3.29	2.33
Average Value	1.30	5.21	0.823	3.29	2.29

The results have been normalized to 1W (forward power) into the dipole.

IEEE Target over 1cm³ (1g) of tissue: 1.23 mW/g (+/- 10%)

Averaged over 1cm (1g) of tissue: 5.21 mW/g

Averaged over 10cm (10g) of tissue: 3.29 mW/g

Test Date: 11/04/03

DUT: Dipole 450MHz; Model: D450V2; Type: System Performance Check; Serial: 136

Ambient Temp: 22.1°C; Fluid Temp: 22.0°C; Barometric Pressure: 102.8 kPa; Humidity: 49%

Communication System: CW
Forward Conducted Power: 250 mW
Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450 ($\sigma = 0.88$ mho/m, $\epsilon_r = 43.7$, $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 26/02/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 19/05/2003
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

450 MHz Validation/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 39 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 1.3 mW/g


450 MHz Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.822 mW/g

Reference Value = 39 V/m

Power Drift = 0.08 dB

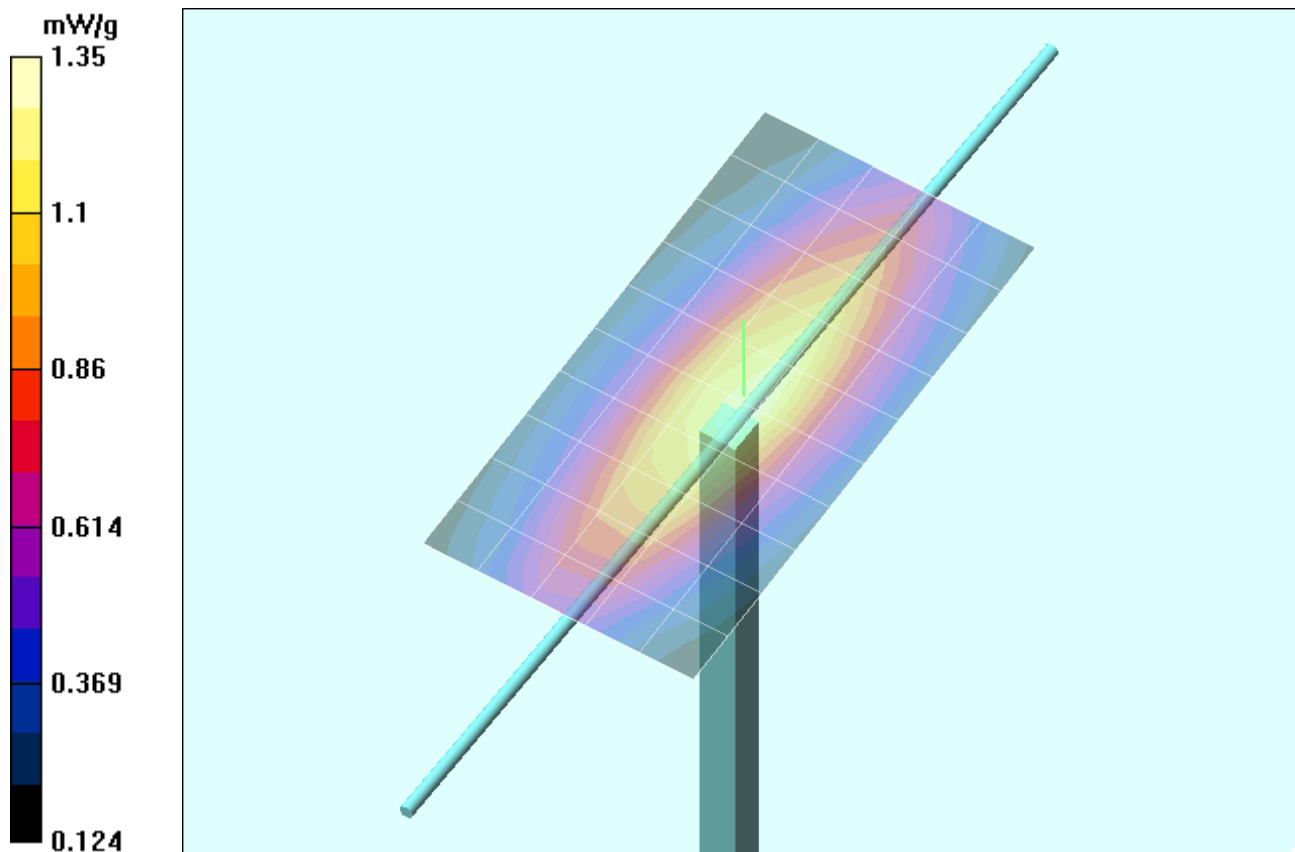

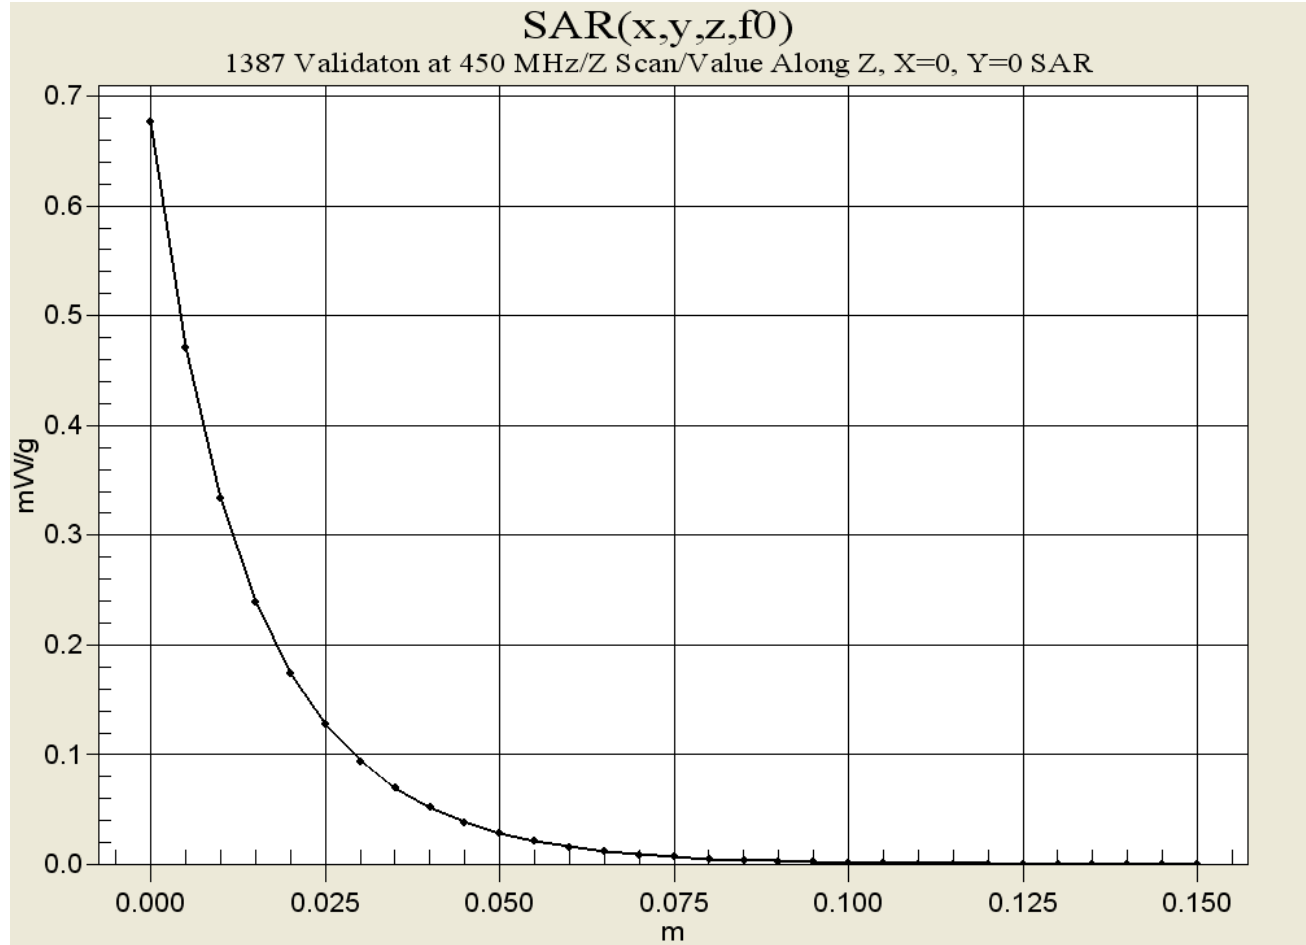

450MHz System Validation

Measured Fluid Dielectric Parameters (Brain)

November 04, 2003

Frequency	ϵ'	ϵ''
350.000000 MHz	46.2660	40.8224
360.000000 MHz	45.9937	40.0986
370.000000 MHz	45.7556	39.4543
380.000000 MHz	45.5625	38.7387
390.000000 MHz	45.2820	38.1140
400.000000 MHz	45.0146	37.4981
410.000000 MHz	44.7508	36.9734
420.000000 MHz	44.5046	36.4917
430.000000 MHz	44.2494	35.9460
440.000000 MHz	43.9621	35.5647
450.000000 MHz	43.7384	35.2106
460.000000 MHz	43.5513	34.7930
470.000000 MHz	43.2846	34.3970
480.000000 MHz	43.0654	33.9576
490.000000 MHz	42.8566	33.6391
500.000000 MHz	42.6744	33.2270
510.000000 MHz	42.5036	32.8459
520.000000 MHz	42.3492	32.5261
530.000000 MHz	42.1783	32.1727
540.000000 MHz	41.9985	31.7385
550.000000 MHz	41.8097	31.4862

Test Report S/N:	052104-510ALH
Test Date(s):	June 08-09, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX D - PROBE CALIBRATION

Client **Celltech**

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1387**

Calibration procedure(s) **QA CAL-01.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 18, 2004**



Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04
Reference 20 dB Attenuator	SN: 5086 (20b)	3-Apr-03 (METAS, No. 251-0340)	Apr-04
Fluke Process Calibrator Type 702	SN: 6295803	8-Sep-03 (Sintrel SCS No. E-030020)	Sep-04
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Technician	
Approved by:	Katja Pokovic	Laboratory Director	

Date issued: March 18, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Probe ET3DV6

SN:1387

Manufactured:	September 21, 1999
Last calibrated:	February 26, 2003
Recalibrated:	March 18, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1387

Sensitivity in Free Space

NormX	1.62 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.71 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.71 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^A

DCP X	92	mV
DCP Y	92	mV
DCP Z	92	mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Sensor Cener to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	9.3	4.4
SAR _{be} [%]	With Correction Algorithm	0.0	0.1

Head 1800 MHz Typical SAR gradient: 10 % per mm

Sensor to Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	14.8	10.0
SAR _{be} [%]	With Correction Algorithm	0.2	0.0

Sensor Offset


Probe Tip to Sensor Center	2.7 mm
Optical Surface Detection	in tolerance

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.




^A numerical linearization parameter: uncertainty not required

Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)


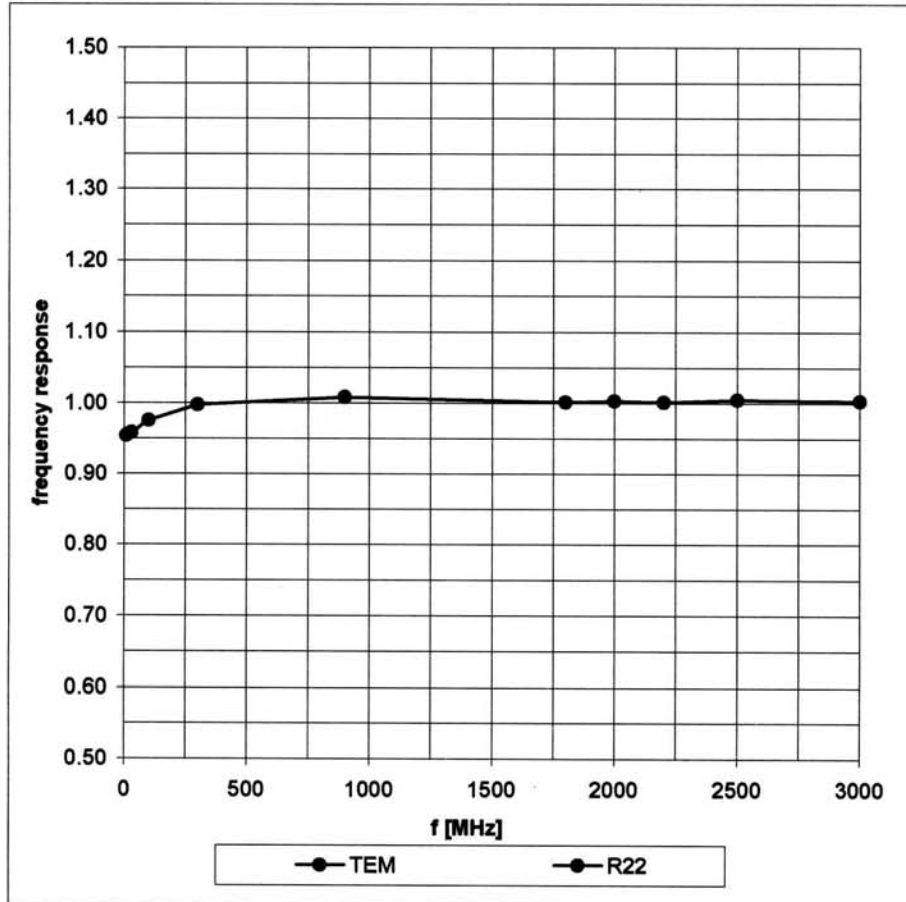


Receiving Pattern (ϕ) , $\theta = 0^\circ$

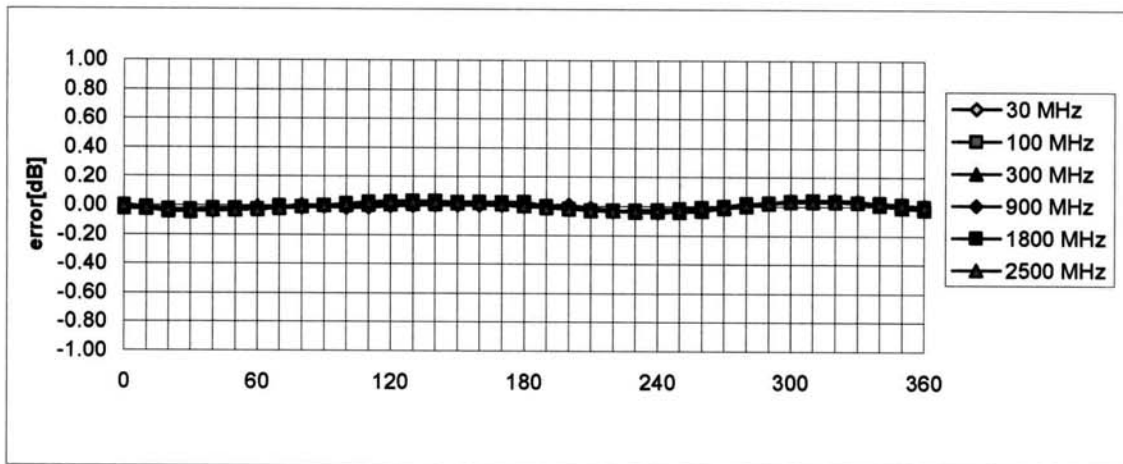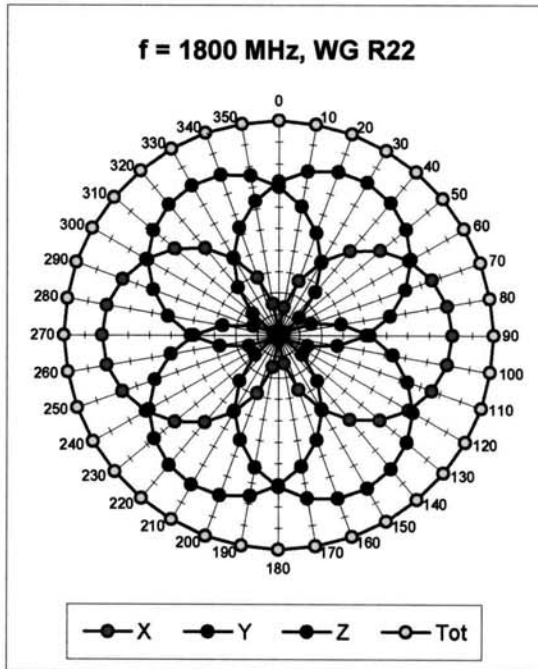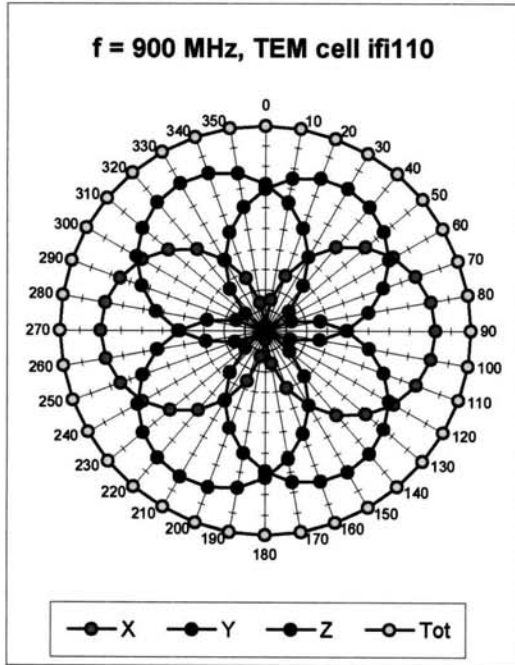


Axial Isotropy Error $\lt; \pm 0.2 \text{ dB}$

Dynamic Range f(SAR_{head}) (Waveguide R22)

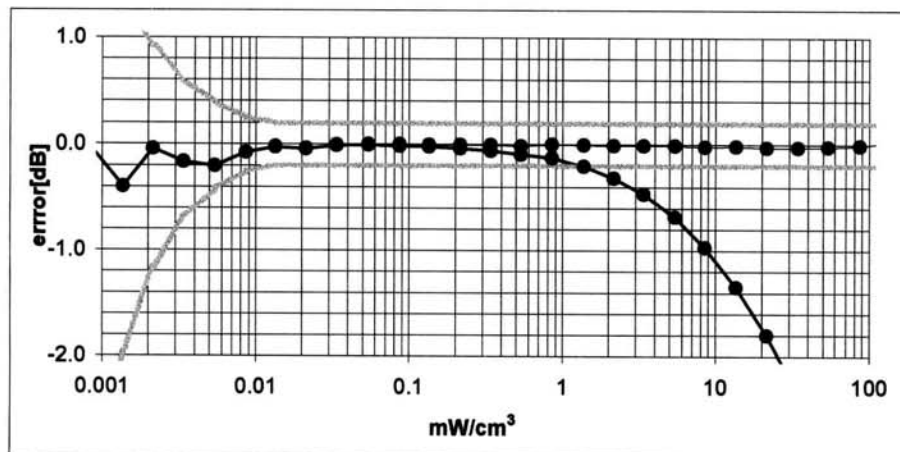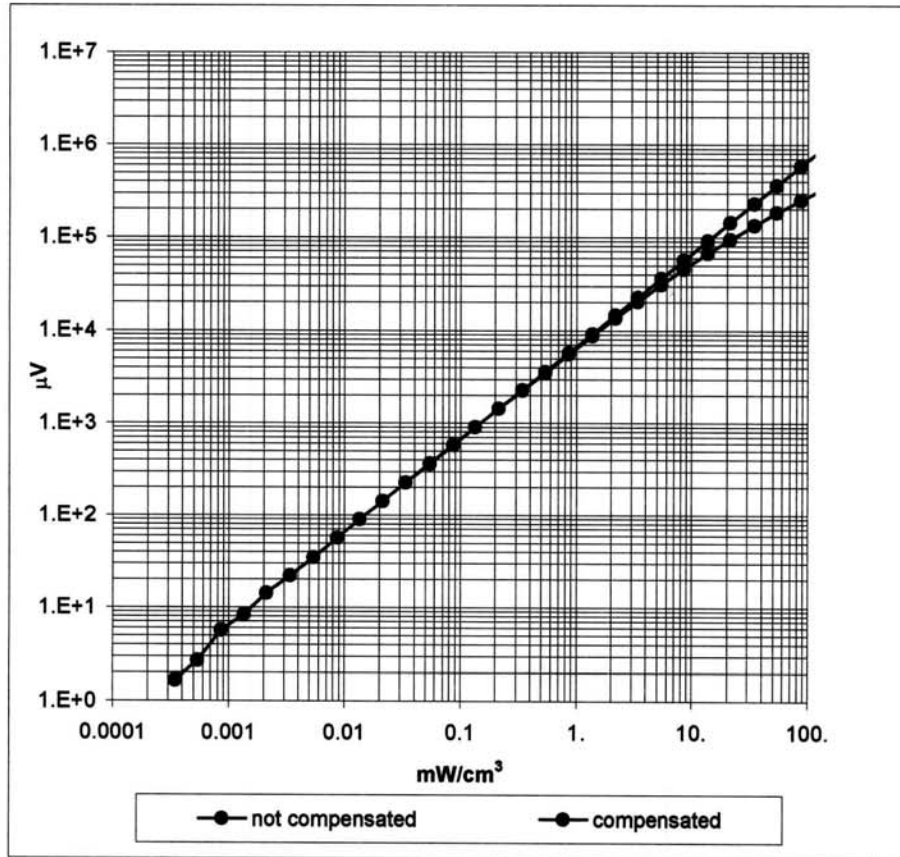

Probe Linearity $\pm 0.2\text{ dB}$

Conversion Factor Assessment

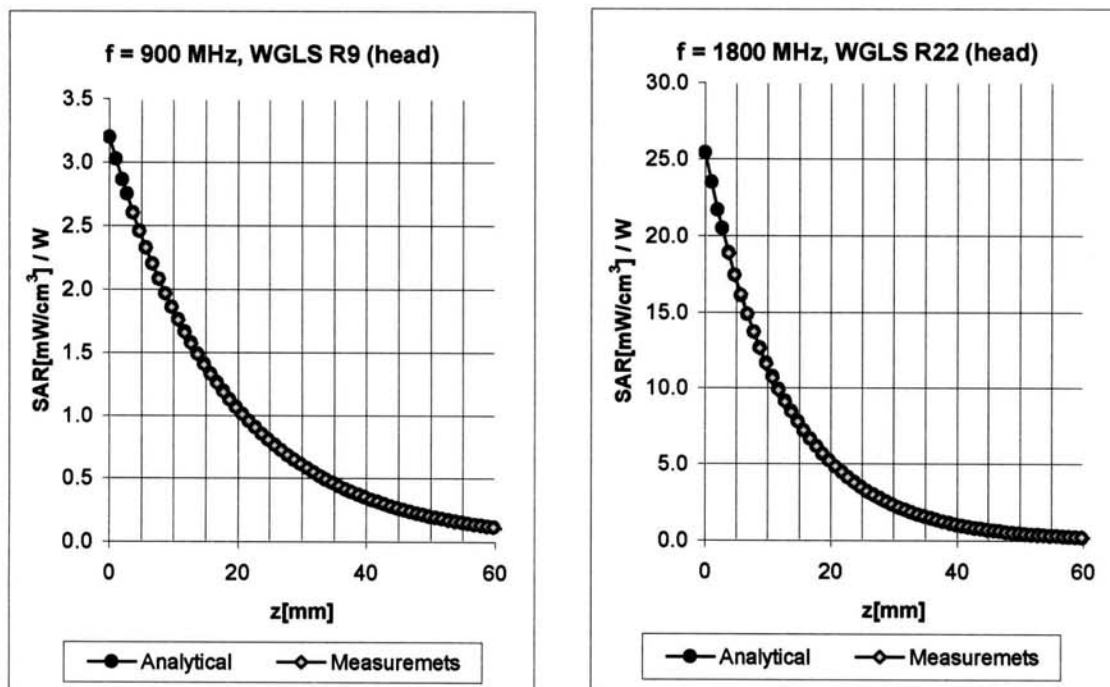


f [MHz]	Validity [MHz] ^B	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	750-950	Head	41.5 ± 5%	0.90 ± 5%	0.72	1.78	6.71 ± 11.9%	(k=2)
1750	1700-1800	Head	40.0 ± 5%	1.40 ± 5%	0.51	2.67	5.38 ± 9.7%	(k=2)
1900	1850-1950	Head	40.0 ± 5%	1.40 ± 5%	0.55	2.66	5.25 ± 9.7%	(k=2)
2450	2400-2500	Head	39.2 ± 5%	1.80 ± 5%	0.99	1.89	4.77 ± 9.7%	(k=2)
835	750-950	Body	55.2 ± 5%	0.97 ± 5%	0.56	2.04	6.24 ± 11.9%	(k=2)
1750	1700-1800	Body	53.3 ± 5%	1.52 ± 5%	0.58	2.82	4.68 ± 9.7%	(k=2)
1900	1850-1950	Body	53.3 ± 5%	1.52 ± 5%	0.62	2.77	4.57 ± 9.7%	(k=2)
2450	2400-2500	Body	52.7 ± 5%	1.95 ± 5%	1.75	1.28	4.50 ± 9.7%	(k=2)

^B The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

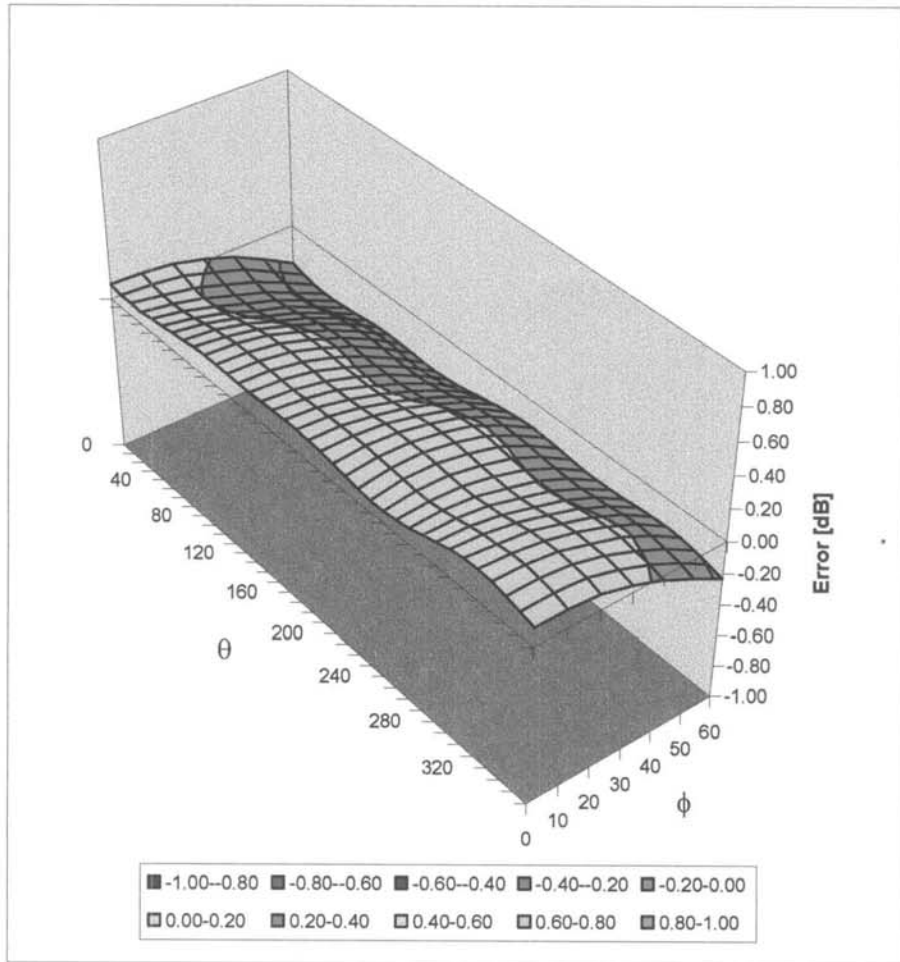

Spherical Isotropy Error <math>\lt; \pm 0.4 dB

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1387

Place of Assessment:

Zurich

Date of Assessment:


March 22, 2004

Probe Calibration Date:

March 18, 2004

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



Dosimetric E-Field Probe ET3DV6 SN:1387

Conversion factor (\pm standard deviation)

150 MHz	ConvF	9.1 \pm 8%	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
300 MHz	ConvF	7.8 \pm 8%	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 MHz	ConvF	7.5 \pm 8%	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
150 MHz	ConvF	8.7 \pm 8%	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
450 MHz	ConvF	7.6 \pm 8%	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.

Test Report S/N:	052104-510ALH
Test Date(s):	June 08-09, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS

450 MHz System Performance Check & DUT Evaluation (Face)

Measured Fluid Dielectric Parameters (Brain)

June 08, 2004

Frequency	e'	e''
350.000000 MHz	46.2268	40.8868
360.000000 MHz	45.9830	40.1925
370.000000 MHz	45.6885	39.5423
380.000000 MHz	45.4538	38.9076
390.000000 MHz	45.2395	38.2702
400.000000 MHz	44.8825	37.7476
410.000000 MHz	44.6768	37.1686
420.000000 MHz	44.4298	36.6631
430.000000 MHz	44.2070	36.1190
440.000000 MHz	44.0053	35.7213
450.000000 MHz	43.7315	35.2869
460.000000 MHz	43.4908	34.8763
470.000000 MHz	43.3545	34.4942
480.000000 MHz	43.1342	34.0527
490.000000 MHz	42.9158	33.6814
500.000000 MHz	42.6662	33.2796
510.000000 MHz	42.4659	32.9195
520.000000 MHz	42.2749	32.5720
530.000000 MHz	42.1008	32.2835
540.000000 MHz	41.9527	31.8821
550.000000 MHz	41.7774	31.6095

450 MHz System Performance Check

Measured Fluid Dielectric Parameters (Brain)

June 09, 2004

Frequency	e'	e''
350.000000 MHz	45.8144	39.7061
360.000000 MHz	45.4702	39.0122
370.000000 MHz	45.1851	38.4724
380.000000 MHz	44.9858	37.8952
390.000000 MHz	44.7230	37.3346
400.000000 MHz	44.5195	36.8149
410.000000 MHz	44.2767	36.2443
420.000000 MHz	44.0393	35.7801
430.000000 MHz	43.7529	35.2475
440.000000 MHz	43.5285	34.7974
450.000000 MHz	43.2773	34.4186
460.000000 MHz	43.0725	33.9764
470.000000 MHz	42.8121	33.5890
480.000000 MHz	42.6430	33.2127
490.000000 MHz	42.4038	32.8980
500.000000 MHz	42.1814	32.5259
510.000000 MHz	42.0044	32.1779
520.000000 MHz	41.8038	31.8476
530.000000 MHz	41.6354	31.4762
540.000000 MHz	41.4563	31.1046
550.000000 MHz	41.2573	30.8517

450 MHz DUT Evaluation (Body)

Measured Fluid Dielectric Parameters (Muscle)



June 09, 2004

Frequency	ϵ'	ϵ''
350.000000 MHz	58.5294	44.1249
360.000000 MHz	58.2802	43.3408
370.000000 MHz	58.1707	42.5735
380.000000 MHz	58.0092	41.8743
390.000000 MHz	57.8426	41.1110
400.000000 MHz	57.7191	40.4391
410.000000 MHz	57.5330	39.7461
420.000000 MHz	57.4263	39.1708
430.000000 MHz	57.2321	38.5366
440.000000 MHz	57.0790	38.0289
450.000000 MHz	56.9045	37.5272
460.000000 MHz	56.7926	37.0235
470.000000 MHz	56.6162	36.5894
480.000000 MHz	56.4735	36.1108
490.000000 MHz	56.3088	35.6726
500.000000 MHz	56.1642	35.2987
510.000000 MHz	56.0222	34.8348
520.000000 MHz	55.8778	34.4888
530.000000 MHz	55.7266	34.0902
540.000000 MHz	55.6526	33.6868
550.000000 MHz	55.5678	33.3627


Test Report S/N:	052104-510ALH
Test Date(s):	June 08-09, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX F - SAR TEST SETUP & DUT PHOTOGRAPHS



FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
with Stubby Antenna (P/N: KRA-23) & Li-ion Battery

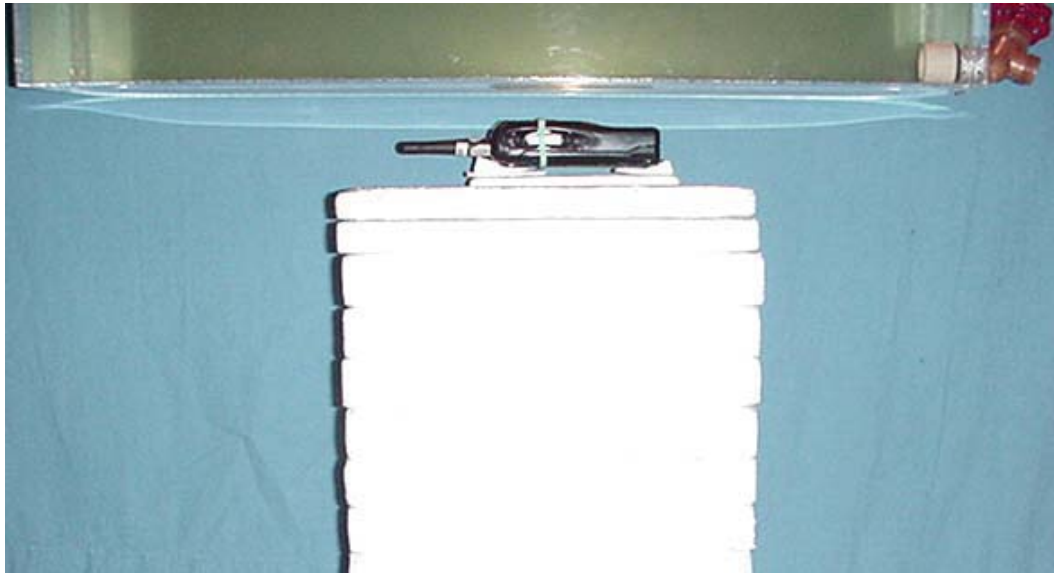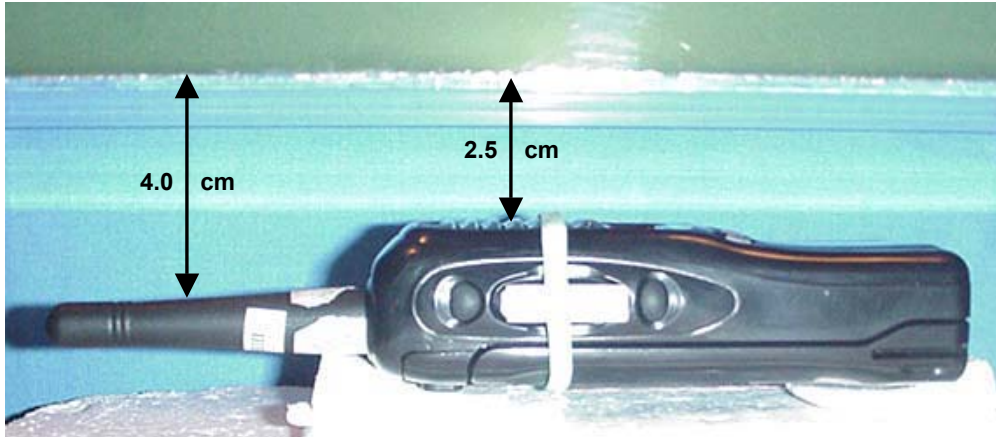



FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
with Stubby Antenna (P/N: KRA-23) & NiCd / NiMH Battery

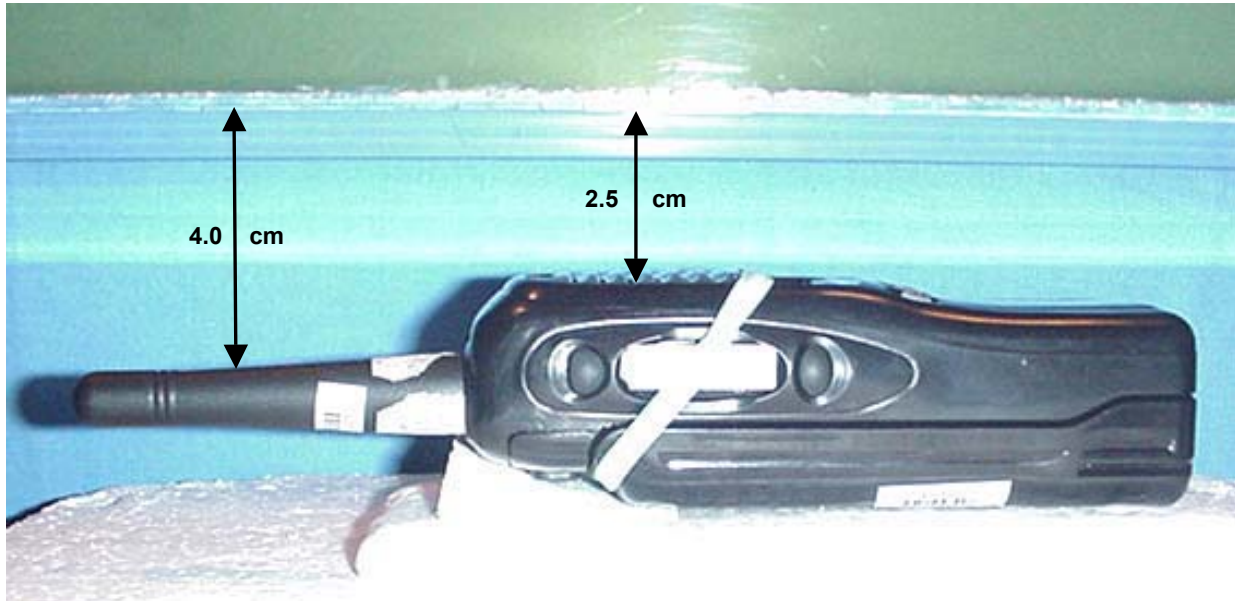



FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
with Whip Antenna (P/N: KRA-27M) & Li-ion Battery

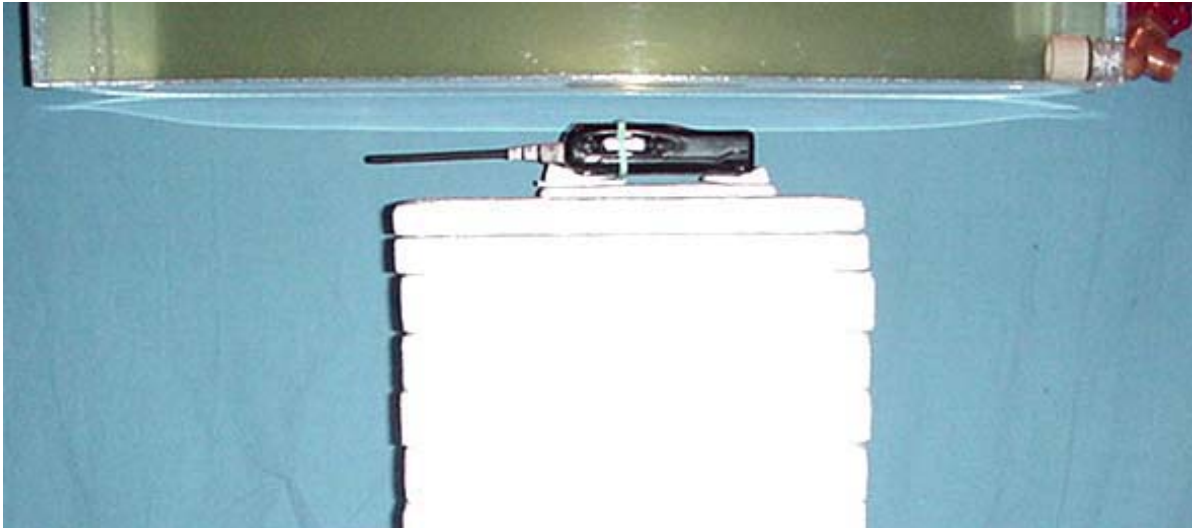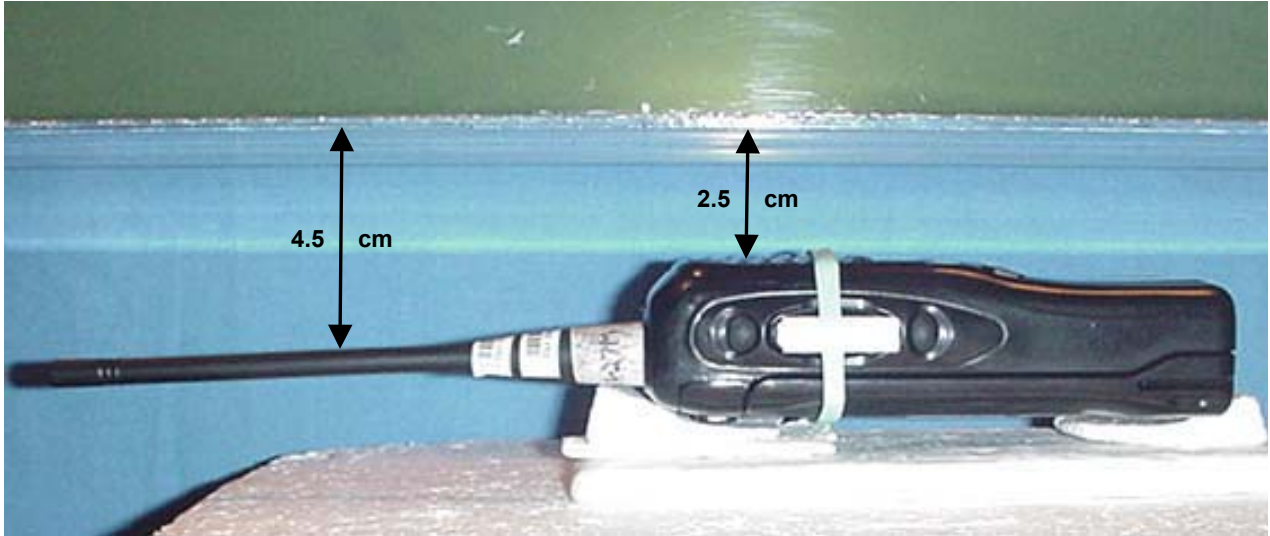


FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
with Whip Antenna (P/N: KRA-27M) & NiCd / NiMH Battery

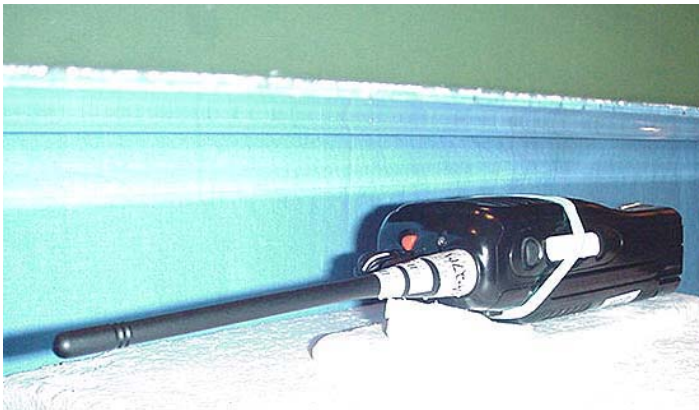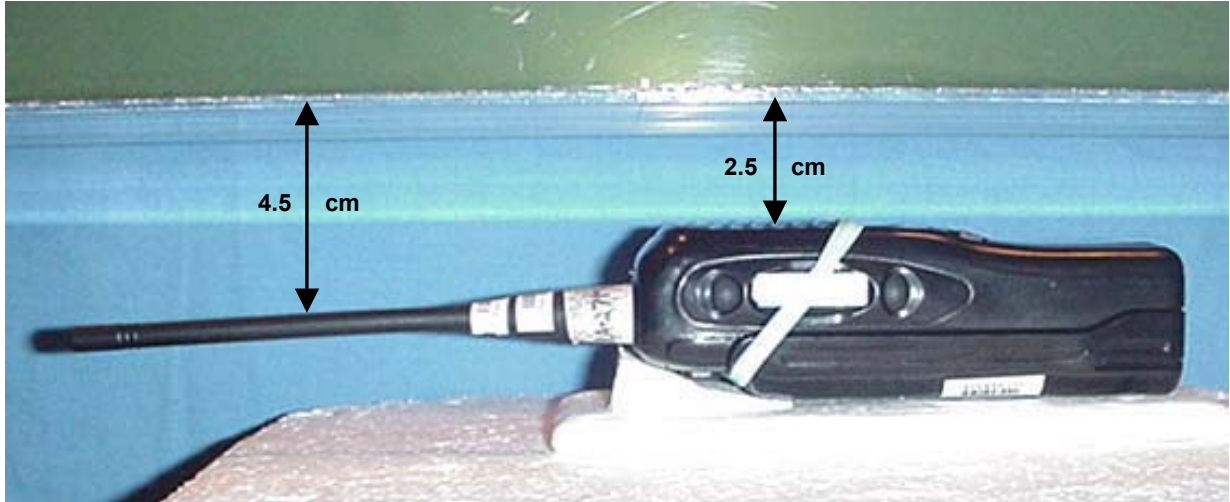




FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
with Whip Antenna (P/N: KRA-27M3) & Li-ion Battery

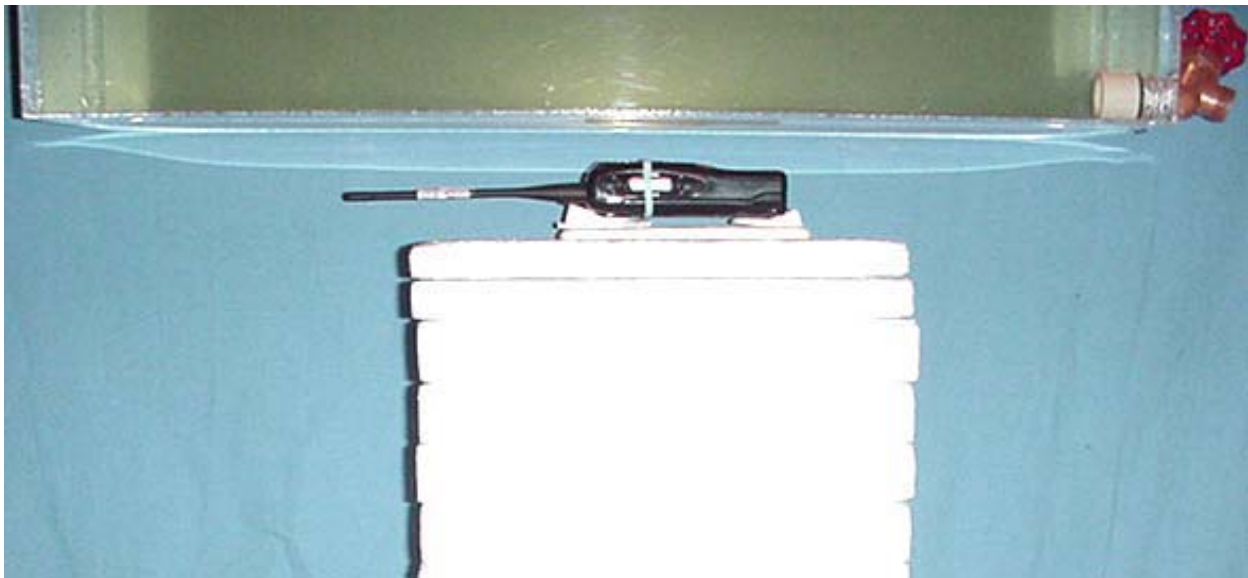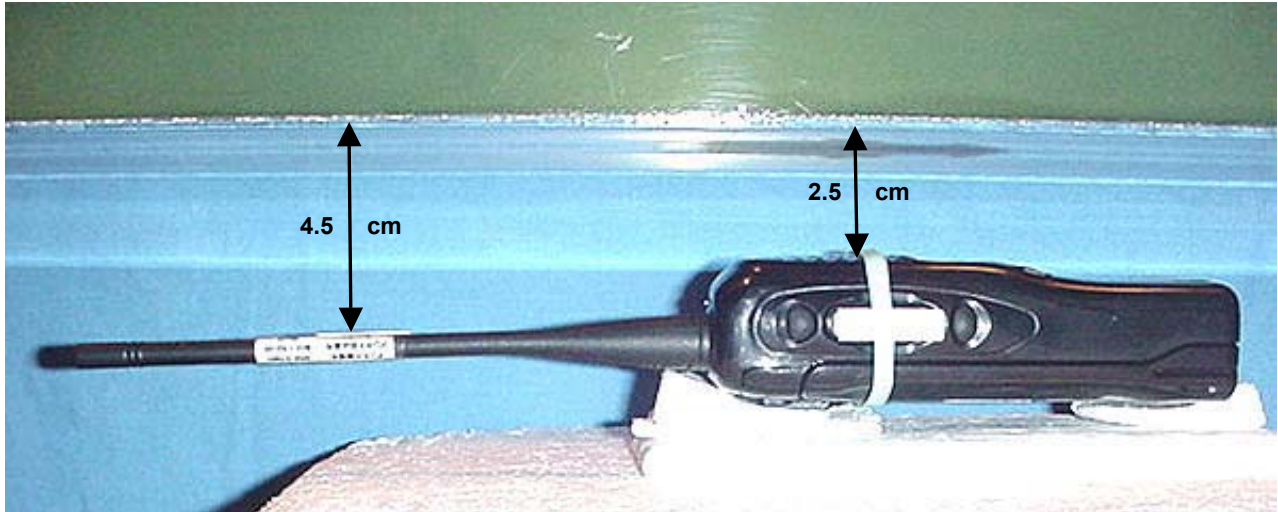

FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
with Whip Antenna (P/N: KRA-27M3) & NiCd / NiMH Battery


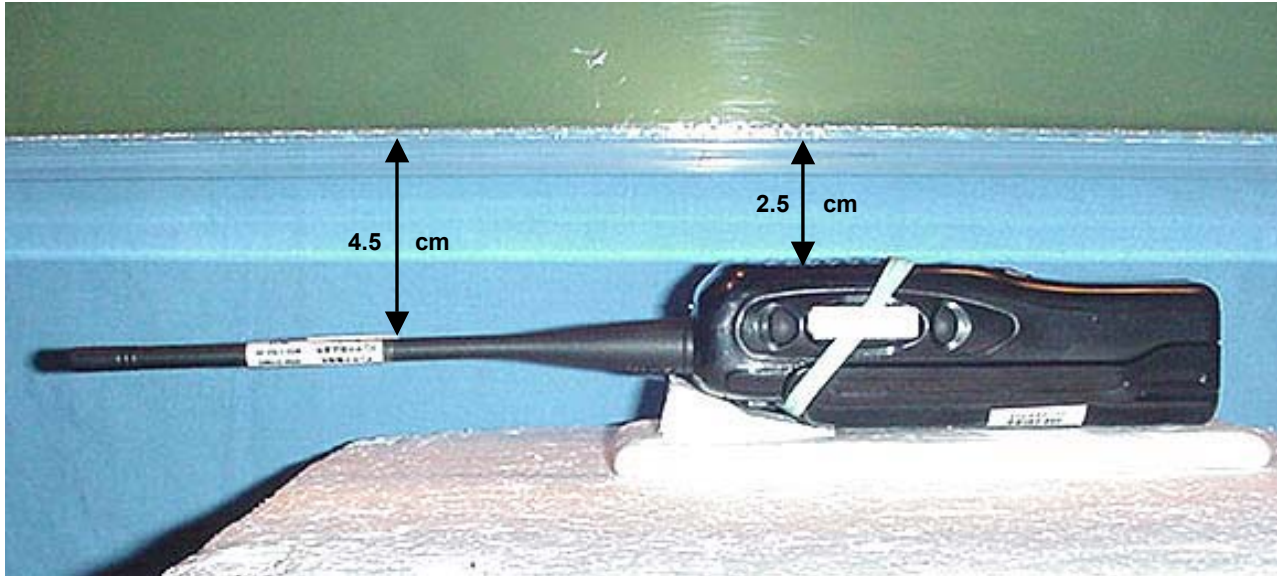


BODY-WORN SAR TEST SETUP PHOTOGRAPHS
1.7 cm Plastic Belt-Clip Separation Distance from Battery to Planar Phantom
with Stubby Antenna (P/N: KRA-23) & Li-ion Battery
Speaker-Microphone Accessory

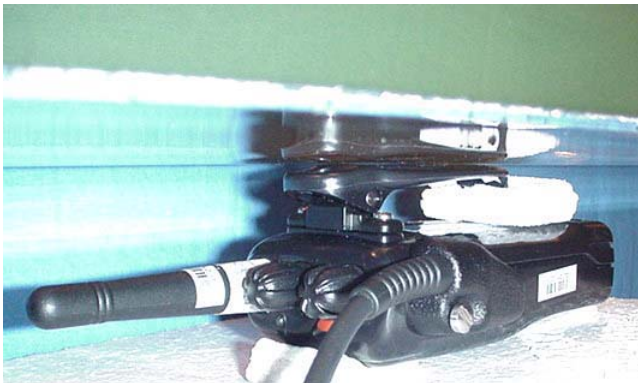
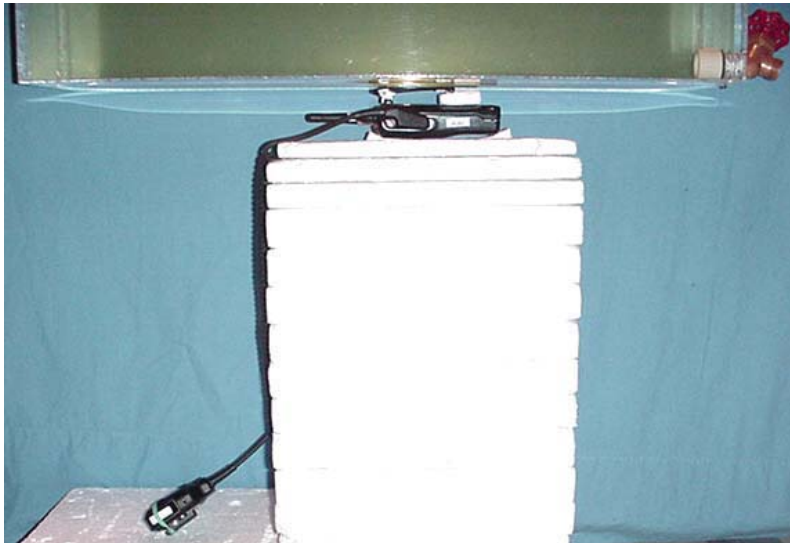
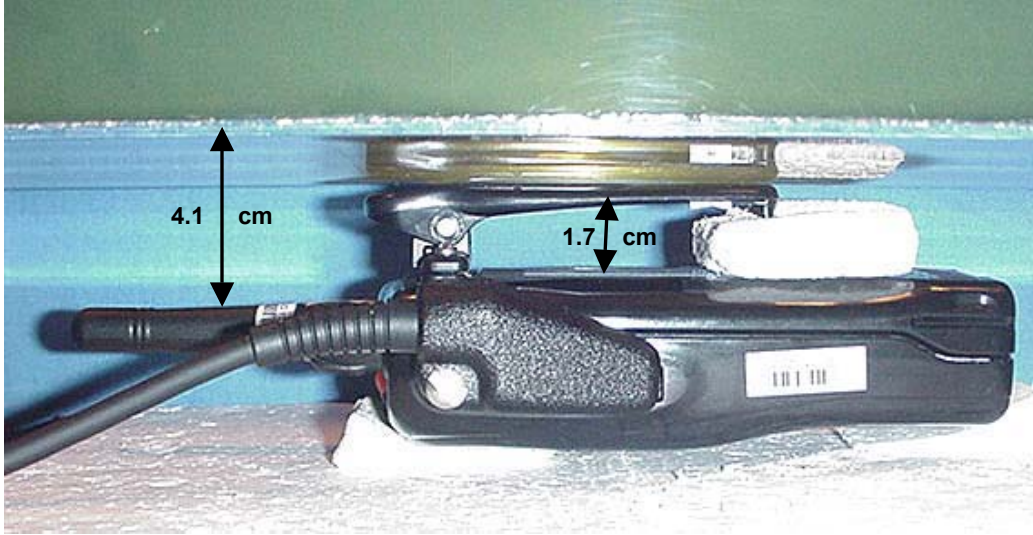


BODY-WORN SAR TEST SETUP PHOTOGRAPHS

1.2 cm Plastic Belt-Clip Separation Distance from Battery to Planar Phantom
with Stubby Antenna (P/N: KRA-23) & NiCd / NiMH Battery
Speaker-Microphone Accessory

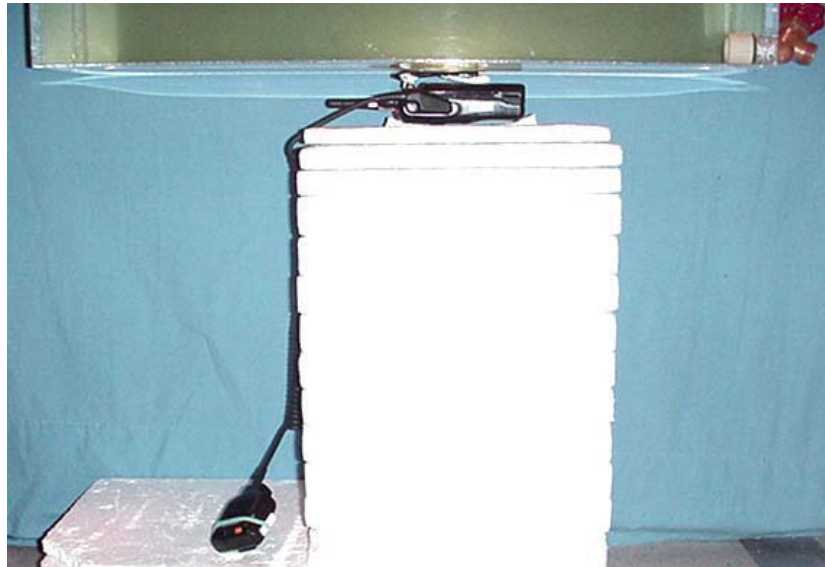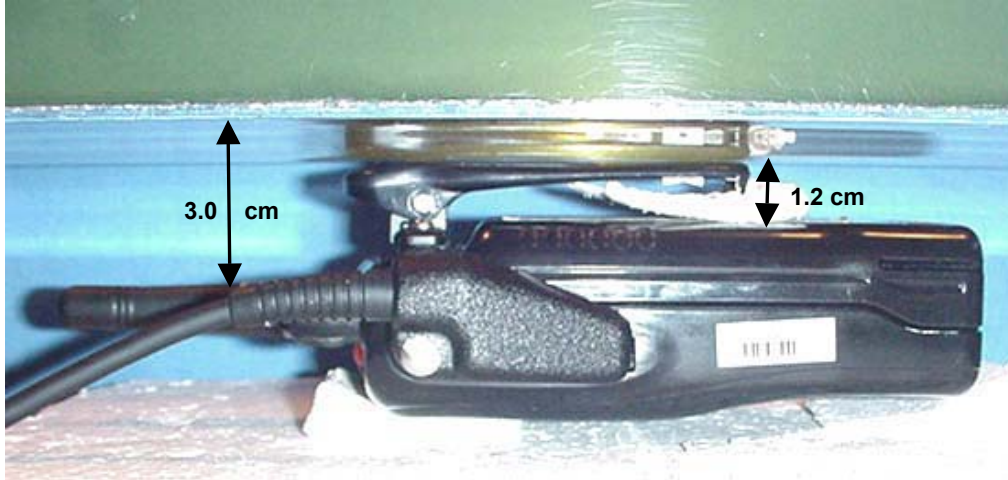


BODY-WORN SAR TEST SETUP PHOTOGRAPHS
1.7 cm Plastic Belt-Clip Separation Distance from Battery to Planar Phantom
with Whip Antenna (P/N: KRA-27M) & Li-ion Battery
Speaker-Microphone Accessory

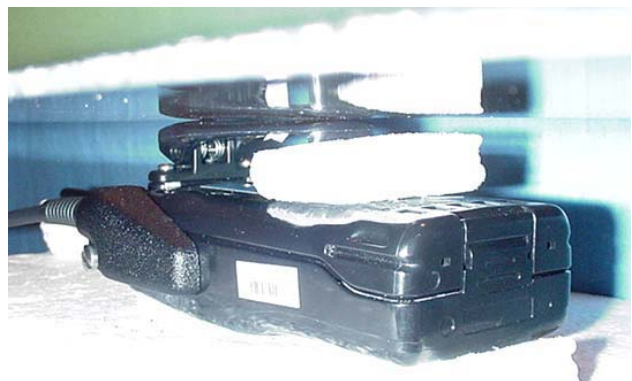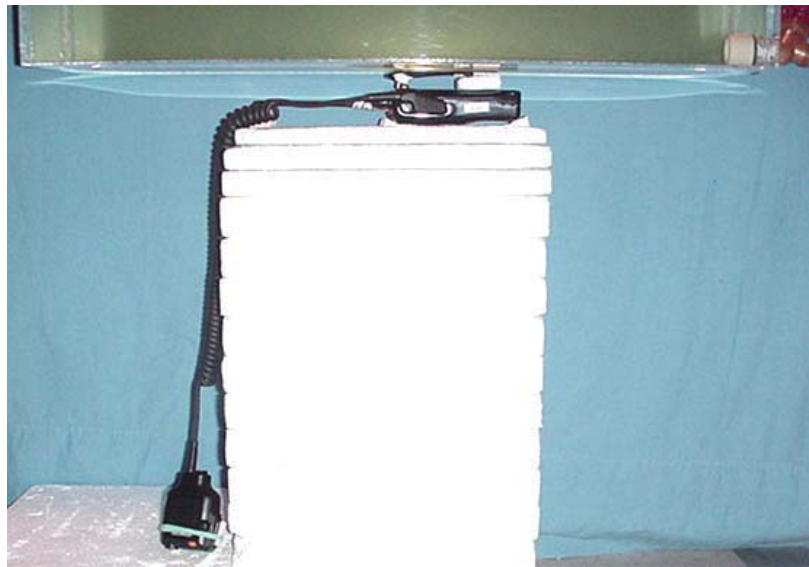
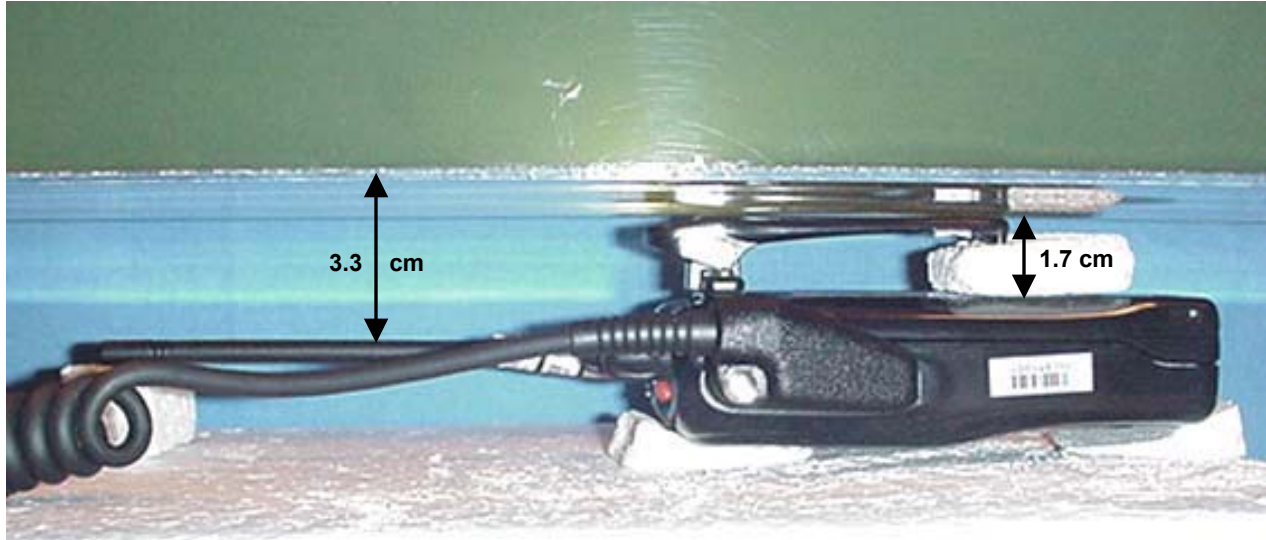


BODY-WORN SAR TEST SETUP PHOTOGRAPHS



1.2 cm Plastic Belt-Clip Separation Distance from Battery to Planar Phantom
with Whip Antenna (P/N: KRA-27M) & NiCd / NiMH Battery
Speaker-Microphone Accessory

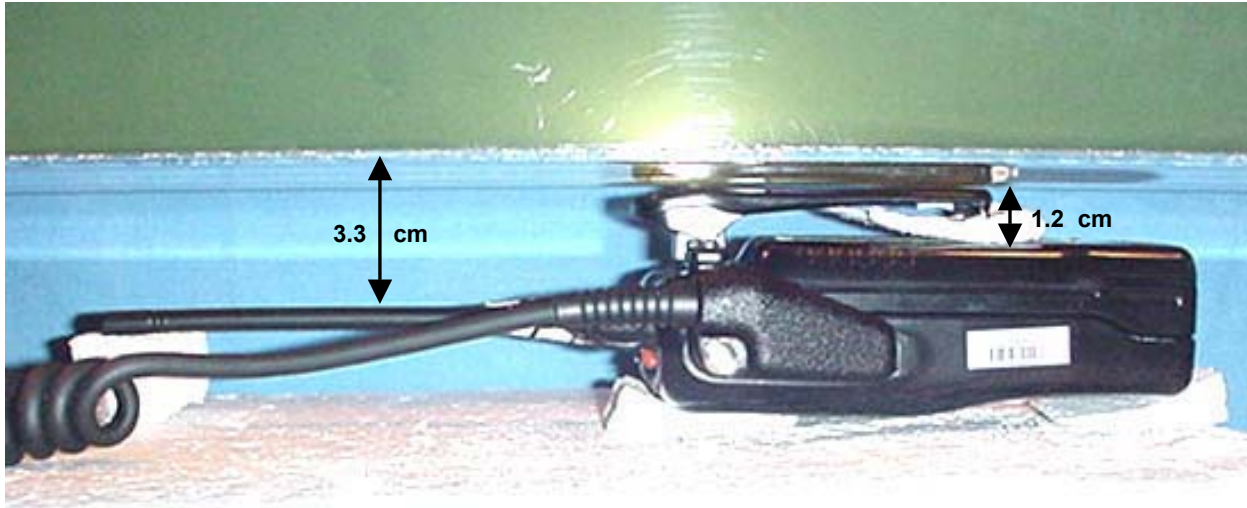

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
1.7 cm Plastic Belt-Clip Separation Distance from Battery to Planar Phantom
with Whip Antenna (P/N: KRA-27M3) & Li-ion Battery
Speaker-Microphone Accessory

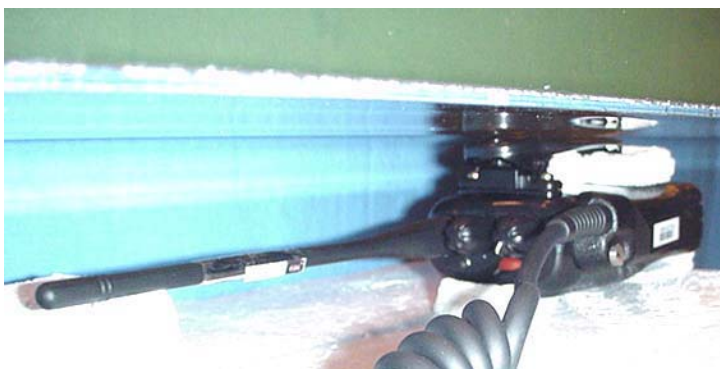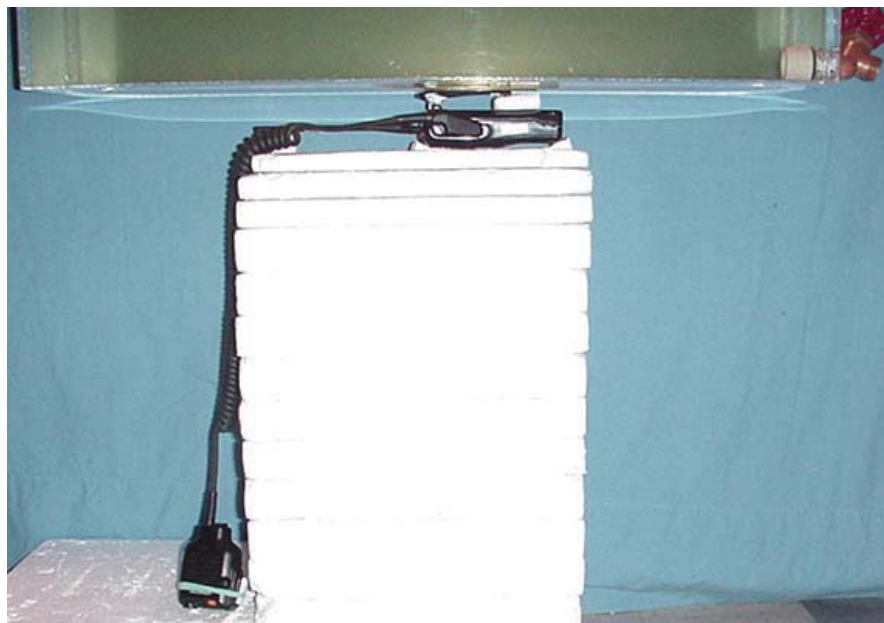

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
1.2 cm Plastic Belt-Clip Separation Distance from Battery to Planar Phantom
with Whip Antenna (P/N: KRA-27M3) & NiCd / NiMH Battery
Speaker-Microphone Accessory

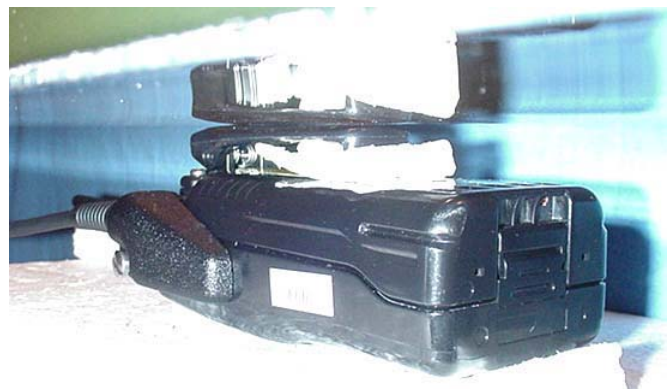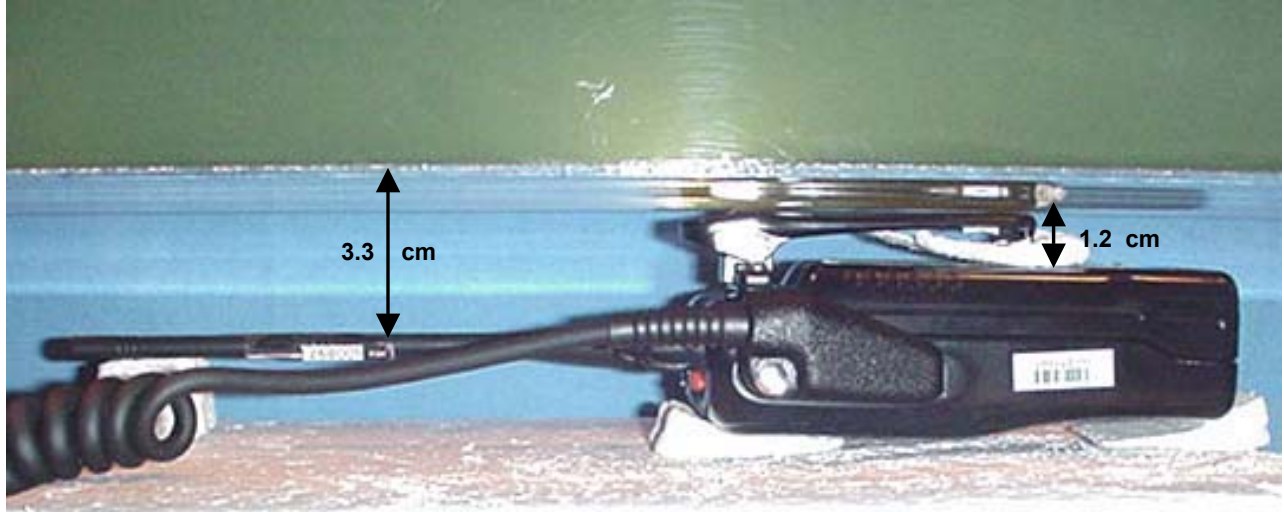

DUT PHOTOGRAPHS



Front of DUT
Stubby Antenna
(P/N: KRA-23M)



Front of DUT
Stubby Antenna
(P/N: KRA-23M3)



Front of DUT
Whip Antenna
(P/N: KRA-27M)



Front of DUT
Whip Antenna
(P/N: KRA-27M3)

DUT PHOTOGRAPHS



Front of DUT



Back of DUT with Plastic Belt-Clip



Back of DUT with NiMH Battery



Back of DUT with Li-ion Battery



Top End of DUT



Bottom End of DUT

DUT PHOTOGRAPHS



Left Side of DUT with Li-ion Battery & Plastic Belt-Clip accessory



Right Side of DUT with Li-ion Battery & Plastic Belt-Clip accessory



Plastic Belt-Clip accessory (P/N: KBH-11) & Li-ion Battery

DUT PHOTOGRAPHS



Left Side of DUT with NiCd / NiMH Battery & Plastic Belt-Clip accessory



Right Side of DUT with NiCd / NiMH Battery & Plastic Belt-Clip accessory



Plastic Belt-Clip accessory (P/N: KBH-11) & NiMH Battery

DUT PHOTOGRAPHS



NiCd Battery

NiMH Battery

Li-ion Battery



DUT Battery Compartment



Li-ion Battery


NiCd Battery

NiMH Battery

DUT PHOTOGRAPHS



Stubby Antenna (P/N: KRA-23M)

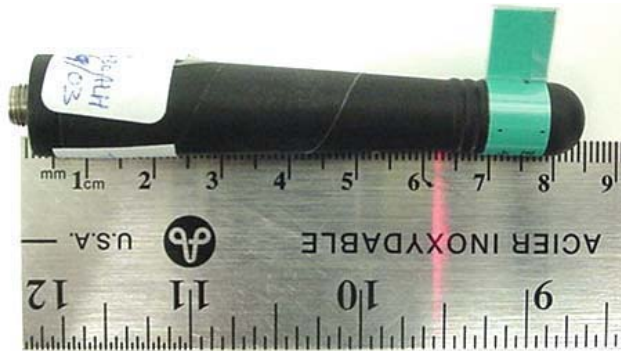

Stubby Antenna (P/N: KRA-23M3)



Whip Antenna (P/N: KRA-27M)



Whip Antenna (P/N: KRA-27M3)

DUT PHOTOGRAPHS



DUT with Speaker-Microphone Accessory (P/N: KMC-25)