



FCC PART 15.407

TEST REPORT

For

BearExtender

1406 Henry Street, Berkeley, California, 94709, USA

FCC ID: AMB-BE0272

Report Type: Original Report	Product Type: 1200Mbps 11AC Wireless Dual Band USB Adapter
Test Engineer: Leon Chen	<i>Leon Chen</i>
Report Number: R2DG130930001-00B	
Report Date: 2013-10-15	
Reviewed By: Ivan Cao RF Leader	<i>Ivan Cao</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.
 * This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"
 (Rev.2), This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
ANTENNA INFORMATION.....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EQUIPMENT MODIFICATIONS.....	6
EUT EXERCISE SOFTWARE.....	7
SUPPORT EQUIPMENT LIST AND DETAILS.....	8
EXTERNAL CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP.....	8
SUMMARY OF TEST RESULTS.....	9
FCC §15.407(f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD.....	10
FCC §15.203 – ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD.....	11
ANTENNA CONNECTOR CONSTRUCTION.....	11
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS.....	12
APPLICABLE STANDARD.....	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE.....	14
TEST RESULTS SUMMARY.....	14
TEST DATA.....	14
FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS.....	17
APPLICABLE STANDARD.....	17
MEASUREMENT UNCERTAINTY.....	17
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	18
TEST PROCEDURE.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY.....	20
TEST DATA.....	20
CONDUCTED SPURIOUS EMISSION AT ANTENNA PORT.....	27
TEST DATA.....	27
FCC §15.407(b) (1) (2) (3) (4) – OUT OF BAND EMISSIONS.....	66
APPLICABLE STANDARD.....	66
TEST PROCEDURE.....	66
TEST EQUIPMENT LIST AND DETAILS.....	66

TEST DATA67

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH79

 APPLICABLE STANDARD79

 TEST EQUIPMENT LIST AND DETAILS.....79

 TEST PROCEDURE79

 TEST DATA79

FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER.....94

 APPLICABLE STANDARD94

 TEST EQUIPMENT LIST AND DETAILS.....94

 TEST PROCEDURE94

 TEST DATA95

FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY109

 APPLICABLE STANDARD109

 TEST PROCEDURE109

 TEST EQUIPMENT LIST AND DETAILS.....109

 TEST DATA110

FCC §15.407(a) (6) – PEAK EXCURSION RATIO124

 APPLICABLE STANDARD124

 TEST PROCEDURE124

 TEST EQUIPMENT LIST AND DETAILS.....124

 TEST DATA124

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *BearExtender*'s product, model number: *BearExtender Turbo (FCC ID: AMB-BE0272)* or ("EUT") in this report is a *1200Mbps 11AC Wireless Dual Band USB Adapter*, which was measured approximately: 9.0 cm (L) x5.5 cm (W) x1.7 cm (H), rated input voltage: DC 5V.

* All measurement and test data in this report was gathered from production sample serial number: 130930001 (Assigned by BAACL, Dongguan). The EUT was received on 2013-09-30.

Antenna information

Chain	manufacturer	Model Name	Antenna Type	Antenna Gain
0	huaDeChang	124041950	Dipole	2400-2500MHz:2.17dBi 5150-5350MHz:1.5dBi 5725-5850MHz:2.20dBi
1	huaDeChang	124041950	Dipole	2400-2500MHz:2.17dBi 5150-5350MHz:1.5dBi 5725-5850MHz:2.20dBi

Objective

This type approval report is prepared on behalf of *BearExtender* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and E of the Federal Communications Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: *AMB-BE0272*
FCC Part 15B JBP submissions with FCC ID: *AMB-BE0272*.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5180~5240MHz band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n20 and 802.11 ac20, Channel 36, 40 and 48 was tested, for 802.11n40 and 802.11 ac40, Channel 38, 46 was tested, for 802.11 ac80, Channel 42 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

For 802.11a, the EUT can transmit with chain 0 or chain 1, therefore investigated worst case to representative chain 0 in test report.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “MP-TOOL” was used for testing, which was provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

Test Mode	Test Software Version	MP-TOOL		
5G band 802.11a	Test Frequency	5180MHz	5200MHz	5240MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	20	19	21
5G band 802.11n ht20	Test Frequency	5180MHz	5200MHz	5240MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting (Ant 1)	13	13	16
	Power Level Setting (Ant 2)	17	18	18
5G band 802.11n ht40	Test Frequency	5190MHz	/	5230MHz
	Data Rate	MCS0	/	MCS0
	Power Level Setting (Ant 1)	14	/	17
	Power Level Setting (Ant 2)	21	/	21
5G band 802.11 ac20	Test Frequency	5180MHz	5200MHz	5240MHz
	Data Rate	NSS MCS0	NSS MCS0	NSS MCS0
	Power Level Setting (Ant 1)	13	13	16
	Power Level Setting (Ant 2)	18	18	20
5G band 802.11 ac40	Test Frequency	5190MHz	/	5230MHz
	Data Rate	NSS MCS0	/	NSS MCS0
	Power Level Setting (Ant 1)	14	/	17
	Power Level Setting (Ant 2)	21	/	23
5G band 802.11 ac80	Test Frequency	5210MHz	/	/
	Data Rate	NSS MCS0	/	/
	Power Level Setting (Ant 1)	11	/	/
	Power Level Setting (Ant 2)	16	/	/


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
DELL	Notebook	PP11L	QDS-BRCM1017

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Detachable Printer Cable	yes	No	1.2	Notebook	Printer
Detachable Serial Cable	yes	No	1.2	Notebook	Modem
Detachable Keyboard Cable	yes	No	1.5	Notebook	Keyboard
Detachable USB Cable	Yes	No	1.5	Notebook	EUT

Block Diagram of Test Setup

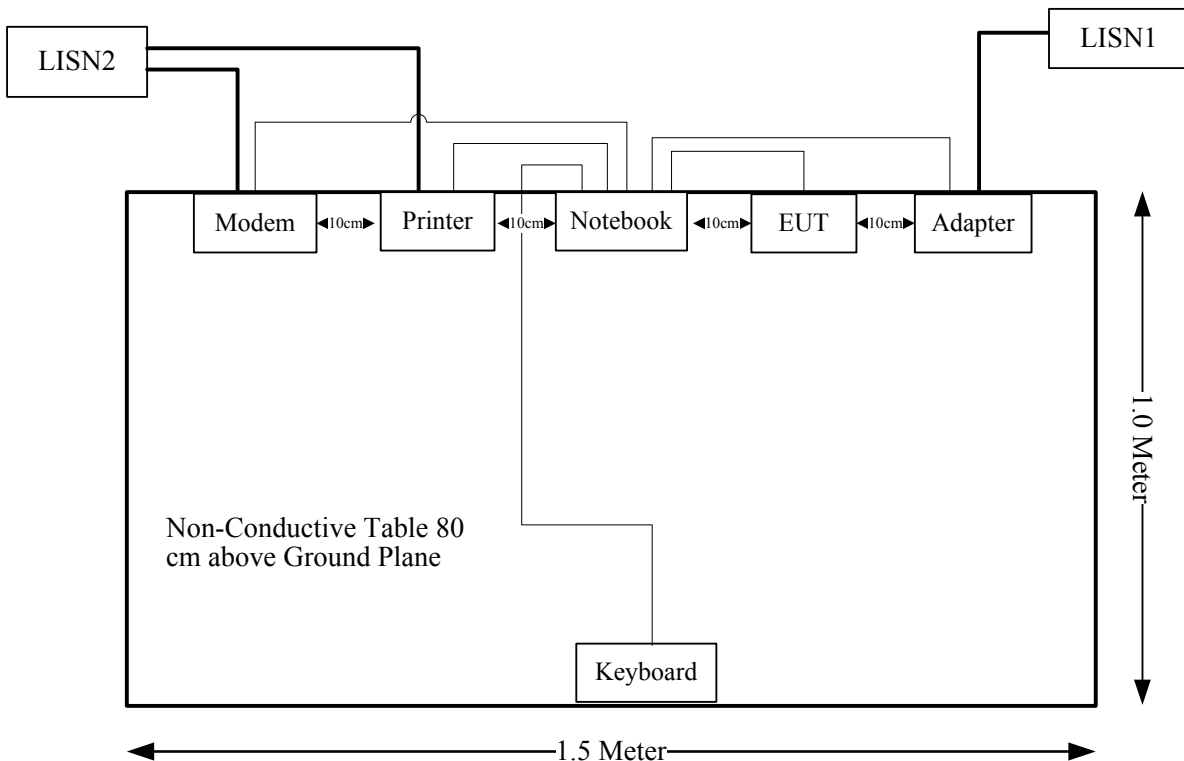

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1),(2),(3),(4)	Out Of Band Emissions	Compliance
§15.407(a) (1)	26 dB Bandwidth	Compliance
§15.407(a)(1),	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(5)	Power Spectral Density	Compliance
§15.407(a)(6)	Peak Excursion Ratio	Compliance

FCC §15.407(f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11a	5180	1.5	1.41	13.51	22.44	20	0.006	1.0
802.11n ht20	5180	1.5	1.41	13.25	21.13	20	0.006	1.0
802.11n ht40	5190	1.5	1.41	10.46	11.12	20	0.003	1.0
802.11ac20	5180	1.5	1.41	13.11	20.46	20	0.006	1.0
802.11ac40	5190	1.5	1.41	13.19	20.84	20	0.006	1.0
802.11ac80	5210	1.5	1.41	10.29	10.69	20	0.003	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1),if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two dipole antennas, which was used a unique type of connector to attach to the EUT, and complied with 15.203, the maximum gain is 1.5 dBi in 5150-5250MHz, please refer to the internal photos.

Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

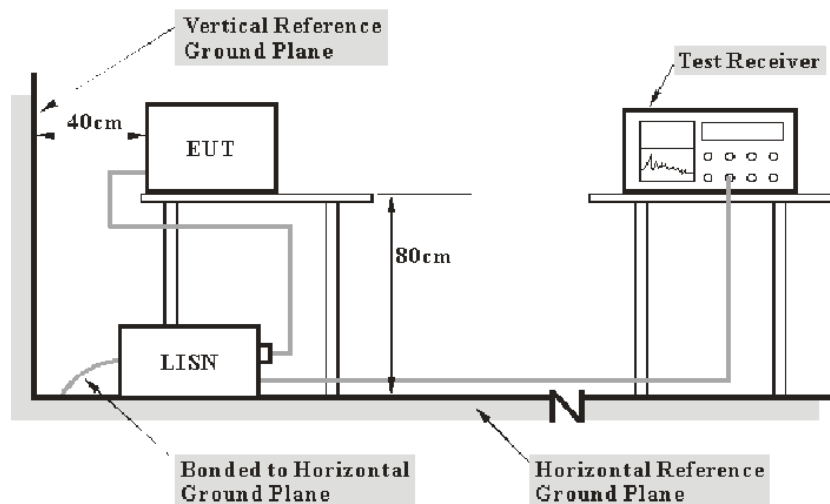

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCS 30	830245/006	2012-11-29	2013-11-28
R&S	Two-line V-network	ENV216	3560.6550.12	2013-2-18	2014-2-17
R&S	L.I.S.N	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

10.24 dB at 0.440 MHz in the Line conducted mode

Test Data

Environmental Conditions

Temperature:	27.1 ° C
Relative Humidity:	50 %
ATM Pressure:	100.3 kPa

The testing was performed by Leon Chen on 2013-10-08.

Test Mode: Transmitting

120 V, 60 Hz, Line:



Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.440	38.30	0.32	57.06	18.76	QP
0.440	36.82	0.32	47.06	10.24	AV
0.710	36.00	0.31	56.00	16.00	QP
0.710	29.44	0.31	46.00	16.56	AV
1.310	34.82	0.33	56.00	17.18	QP
1.310	28.89	0.33	46.00	17.11	AV
0.880	33.32	0.32	56.00	18.68	QP
0.880	29.98	0.32	46.00	16.02	AV
0.540	32.64	0.31	56.00	18.36	QP
0.540	24.59	0.31	46.00	21.41	AV
1.960	32.13	0.36	56.00	19.87	QP
1.960	23.61	0.36	46.00	22.39	AV

120V, 60 Hz, Neutral:



Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.710	35.37	0.22	56.00	20.63	QP
0.710	30.75	0.22	46.00	15.25	AV
0.880	34.78	0.23	56.00	21.22	QP
0.880	31.65	0.23	46.00	14.35	AV
1.310	35.01	0.24	56.00	20.99	QP
1.310	30.20	0.24	46.00	15.80	AV
1.670	34.67	0.26	56.00	21.33	QP
1.670	30.93	0.26	46.00	15.07	AV
1.490	33.99	0.25	56.00	22.01	QP
1.490	28.63	0.25	46.00	17.37	AV
0.520	33.56	0.21	56.00	22.44	QP
0.520	31.49	0.21	46.00	14.51	AV

FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to KDB 789033 D01 General UNII Test Procedures v01, emission shall be computed as:
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 G:

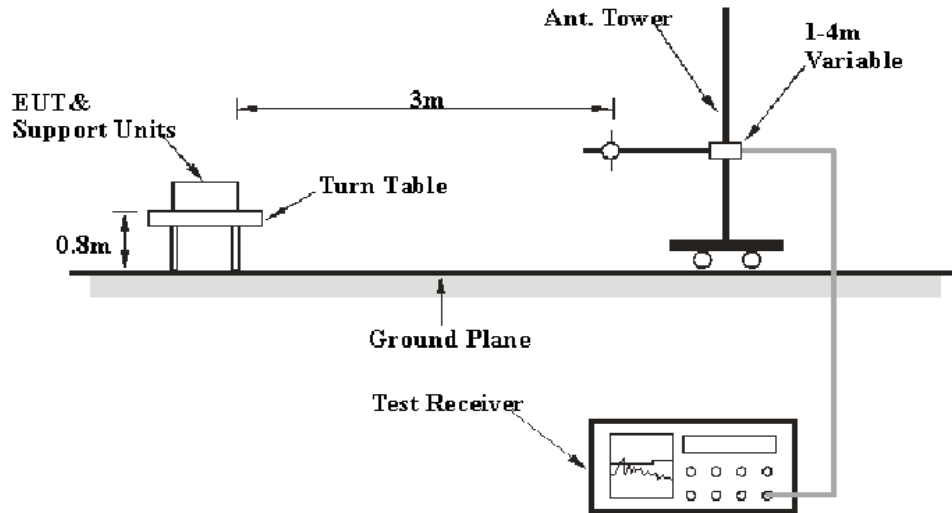

Above 1 G:

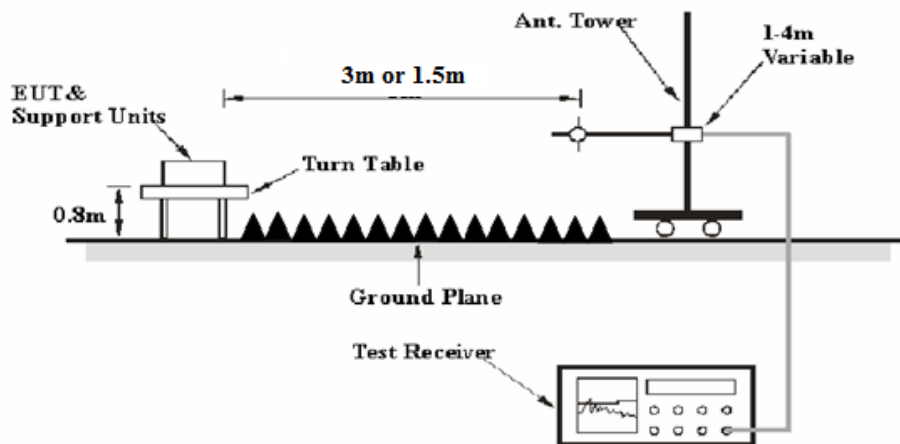

The radiated emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source,

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to C63.4, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log(3\text{m}/1.5\text{m})$ dB

Extrapolation result = Corrected Amplitude (dB μ V/m) -6dB

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2011-9-6	2014-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-12-7	2013-12-6
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	N/A	N/A
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02-1304	2013-6-16	2014-6-15
Ducommun Technologies	Horn antenna	ARH-2823-02	1007726-02-1302	2013-6-16	2014-6-15
QUINSTAR	Amplifier	QLW-18045536-JO	15964001001	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407, with the worst margin reading of:

2.70 dB at 53.28 MHz in the **Vertical** polarization for 802.11n20 Mode

Test Data**Environmental Conditions**

Temperature:	24.3~26.3 °C
Relative Humidity:	56~62 %
ATM Pressure:	100.3~100.8 kPa

The testing was performed by Leon Chen from 2013-09-30 to 2013-10-12.

Mode: Transmitting

802.11a Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5180 MHz										
5180	59.68	PK	H	31.46	5.49	0.00	96.63	90.63	N/A	N/A
5180	48.72	AV	H	31.46	5.49	0.00	85.67	79.67	N/A	N/A
5180	72.62	PK	V	31.46	5.49	0.00	109.57	103.57	N/A	N/A
5180	61.42	AV	V	31.46	5.49	0.00	98.37	92.37	N/A	N/A
5150	26.76	PK	V	31.40	5.45	0.00	63.61	57.61	68.20	10.59
5150	14.82	AV	V	31.40	5.45	0.00	51.67	45.67	54.00	8.33
10360	34.89	PK	V	36.97	8.34	25.85	54.35	48.35	68.20	19.85
15540	33.25	PK	V	37.43	11.42	24.10	58.00	52.00	68.20	16.20
15540	18.23	AV	V	37.43	11.42	24.10	42.98	36.98	54.00	17.02
1645.62	33.45	PK	V	23.89	3.17	26.92	33.59	27.59	68.20	40.61
1645.62	18.31	AV	V	23.89	3.17	26.92	18.45	12.45	54.00	41.55
2245.62	32.28	PK	V	25.24	3.70	27.23	33.99	27.99	68.20	40.21
2245.62	17.86	AV	V	25.24	3.70	27.23	19.57	13.57	54.00	40.43
53.52	49.8	QP	V	7.83	0.95	21.41	37.17	37.17	40.00	2.83*
Middle Channel:5200 MHz										
5200	61.26	PK	H	31.50	5.51	0.00	98.27	92.27	N/A	N/A
5200	60.35	AV	H	31.50	5.51	0.00	97.36	91.36	N/A	N/A
5200	73.24	PK	V	31.50	5.51	0.00	110.25	104.25	N/A	N/A
5200	62.18	AV	V	31.50	5.51	0.00	99.19	93.19	N/A	N/A
10400	34.68	PK	V	36.98	8.34	25.92	54.08	48.08	68.20	20.12
15600	33.24	PK	V	37.32	11.46	24.12	57.90	51.90	68.20	16.30
15600	18.23	AV	V	37.32	11.46	24.12	42.89	36.89	54.00	17.11
1645.62	33.48	PK	V	23.89	3.17	26.92	33.62	27.62	68.20	40.58
1645.62	18.42	AV	V	23.89	3.17	26.92	18.56	12.56	54.00	41.44
1669.63	32.69	PK	V	23.94	3.17	26.94	32.86	26.86	68.20	41.34
1669.63	17.86	AV	V	23.94	3.17	26.94	18.03	12.03	54.00	41.97
2245.62	33.62	PK	V	25.24	3.70	27.23	35.33	29.33	68.20	38.87
2245.62	18.35	AV	V	25.24	3.70	27.23	20.06	14.06	54.00	39.94
53.25	49.8	QP	V	7.88	0.94	21.41	37.21	37.21	40.00	2.79*
High Channel:5240 MHz										
5240	61.07	PK	H	31.58	5.09	0.00	97.74	91.74	N/A	N/A
5240	50.62	AV	H	31.58	5.09	0.00	87.29	81.29	N/A	N/A
5240	73.73	PK	V	31.58	5.09	0.00	110.40	104.40	N/A	N/A
5240	62.35	AV	V	31.58	5.09	0.00	99.02	93.02	N/A	N/A
5350	27.62	PK	V	31.80	4.58	0.00	64.00	58.00	68.20	10.20
5350	15.32	AV	V	31.80	4.58	0.00	51.70	45.70	54.00	8.30
10480	35.62	PK	V	37.00	8.34	26.02	54.94	48.94	68.20	19.26
15720	33.65	PK	V	37.10	11.54	23.53	58.76	52.76	68.20	15.44
15720	18.36	AV	V	37.10	11.54	23.53	43.47	37.47	54.00	16.53
1668.32	33.42	PK	V	23.94	3.17	26.94	33.59	27.59	68.20	40.61
1668.32	18.23	AV	V	23.94	3.17	26.94	18.40	12.40	54.00	41.60
2298.91	32.69	PK	V	25.38	4.10	27.19	34.98	28.98	68.20	39.22
2298.91	17.89	AV	V	25.38	4.10	27.19	20.18	14.18	54.00	39.82
53.52	49.8	QP	V	7.83	0.95	21.41	37.17	37.17	40.00	2.83*

*Within measurement uncertainty!

802.11n20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5180 MHz										
5180	56.42	PK	H	31.46	5.49	0.00	93.37	87.37	N/A	N/A
5180	45.36	AV	H	31.46	5.49	0.00	82.31	76.31	N/A	N/A
5180	70.74	PK	V	31.46	5.49	0.00	107.69	101.69	N/A	N/A
5180	59.23	AV	V	31.46	5.49	0.00	96.18	90.18	N/A	N/A
5150	26.85	PK	V	31.40	5.45	0.00	63.70	57.70	68.20	10.50
5150	14.53	AV	V	31.40	5.45	0.00	51.38	45.38	54.00	8.62
10360	34.52	PK	V	36.97	8.34	25.85	53.98	47.98	68.20	20.22
15540	33.68	PK	V	37.43	11.42	24.10	58.43	52.43	68.20	15.77
15540	18.36	AV	V	37.43	11.42	24.10	43.11	37.11	54.00	16.89
1663.21	33.74	PK	V	23.93	3.17	26.93	33.91	27.91	68.20	40.29
1663.21	18.25	AV	V	23.93	3.17	26.93	18.42	12.42	54.00	41.58
2315.25	33.81	PK	V	25.42	3.96	27.18	36.01	30.01	68.20	38.19
2315.25	18.35	AV	V	25.42	3.96	27.18	20.55	14.55	54.00	39.45
53.65	49.8	QP	V	7.80	0.95	21.41	37.14	37.14	40.00	2.86*
Middle Channel:5200 MHz										
5200	57.36	PK	H	31.50	5.51	0.00	94.37	88.37	N/A	N/A
5200	46.52	AV	H	31.50	5.51	0.00	83.53	77.53	N/A	N/A
5200	71.25	PK	V	31.50	5.51	0.00	108.26	102.26	N/A	N/A
5200	60.14	AV	V	31.50	5.51	0.00	97.15	91.15	N/A	N/A
10400	34.96	PK	V	36.98	8.34	25.92	54.36	48.36	68.20	19.84
15600	33.57	PK	V	37.32	11.46	24.12	58.23	52.23	68.20	15.97
15600	18.36	AV	V	37.32	11.46	24.12	43.02	37.02	54.00	16.98
1669.96	33.57	PK	V	23.94	3.17	26.94	33.74	27.74	68.20	40.46
1669.96	18.34	AV	V	23.94	3.17	26.94	18.51	12.51	54.00	41.49
2214.63	33.25	PK	V	25.16	3.52	27.25	34.68	28.68	68.20	39.52
2214.63	18.06	AV	V	25.16	3.52	27.25	19.49	13.49	54.00	40.51
2245.62	33.45	PK	V	25.24	3.70	27.23	35.16	29.16	68.20	39.04
2245.62	18.14	AV	V	25.24	3.70	27.23	19.85	13.85	54.00	40.15
53.28	49.9	QP	V	7.87	0.94	21.41	37.30	37.30	40.00	2.70*
High Channel:5240 MHz										
5240	57.72	PK	H	31.58	5.09	0.00	94.39	88.39	N/A	N/A
5240	46.31	AV	H	31.58	5.09	0.00	82.98	76.98	N/A	N/A
5240	71.21	PK	V	31.58	5.09	0.00	107.88	101.88	N/A	N/A
5240	60.08	AV	V	31.58	5.09	0.00	96.75	90.75	N/A	N/A
5350	26.58	PK	V	31.80	4.58	0.00	62.96	56.96	68.20	11.24
5350	14.86	AV	V	31.80	4.58	0.00	51.24	45.24	54.00	8.76
10480	35.84	PK	V	37.00	8.34	26.02	55.16	49.16	68.20	19.04
15720	33.62	PK	V	37.10	11.54	23.53	58.73	52.73	68.20	15.47
15720	18.42	AV	V	37.10	11.54	23.53	43.53	37.53	54.00	16.47
1669.68	33.62	PK	V	23.94	3.17	26.94	33.79	27.79	68.20	40.41
1669.68	18.52	AV	V	23.94	3.17	26.94	18.69	12.69	54.00	41.31
2245.75	33.52	PK	V	25.24	3.70	27.23	35.23	29.23	68.20	38.97
2245.75	18.36	AV	V	25.24	3.70	27.23	20.07	14.07	54.00	39.93
53.52	49.9	QP	V	7.83	0.95	21.41	37.27	37.27	40.00	2.73*

*Within measurement uncertainty!

802.11n40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5190 MHz										
5190	53.86	PK	H	31.48	5.50	0.00	90.84	84.84	N/A	N/A
5190	42.75	AV	H	31.48	5.50	0.00	79.73	73.73	N/A	N/A
5190	67.62	PK	V	31.48	5.50	0.00	104.60	98.60	N/A	N/A
5190	56.32	AV	V	31.48	5.50	0.00	93.30	87.30	N/A	N/A
5150	27.25	PK	V	31.40	5.45	0.00	64.10	58.10	68.20	10.10
5150	15.36	AV	V	31.40	5.45	0.00	52.21	46.21	54.00	7.79
10380	35.62	PK	V	36.98	8.34	25.89	55.05	49.05	68.20	19.15
15570	33.62	PK	V	37.37	11.44	24.11	58.32	52.32	68.20	15.88
15570	18.62	AV	V	37.37	11.44	24.11	43.32	37.32	54.00	16.68
1685.96	33.41	PK	V	23.97	3.18	26.95	33.61	27.61	68.20	40.59
1685.96	18.24	AV	V	23.97	3.18	26.95	18.44	12.44	54.00	41.56
2245.63	33.18	PK	V	25.24	3.70	27.23	34.89	28.89	68.20	39.31
2245.63	17.96	AV	V	25.24	3.70	27.23	19.67	13.67	54.00	40.33
53.52	49.8	QP	V	7.83	0.95	21.41	37.17	37.17	40.00	2.83*
High Channel:5230 MHz										
5230	54.52	PK	H	31.56	5.20	0.00	91.28	85.28	N/A	N/A
5230	43.26	AV	H	31.56	5.20	0.00	80.02	74.02	N/A	N/A
5230	67.19	PK	V	31.56	5.20	0.00	103.95	97.95	N/A	N/A
5230	56.24	AV	V	31.56	5.20	0.00	93.00	87.00	N/A	N/A
5350	28.59	PK	V	31.80	4.58	0.00	64.97	58.97	68.20	9.23
5350	15.12	AV	V	31.80	4.58	0.00	51.50	45.50	54.00	8.50
10460	35.68	PK	V	36.99	8.34	26.00	55.01	49.01	68.20	19.19
15690	33.68	PK	V	37.16	11.52	23.67	58.69	52.69	68.20	15.51
15690	18.24	AV	V	37.16	11.52	23.67	43.25	37.25	54.00	16.75
1689.62	33.47	PK	V	23.98	3.18	26.95	33.68	27.68	68.20	40.52
1689.62	18.23	AV	V	23.98	3.18	26.95	18.44	12.44	54.00	41.56
2247.36	32.98	PK	V	25.24	3.71	27.23	34.70	28.70	68.20	39.50
2247.36	17.86	AV	V	25.24	3.71	27.23	19.58	13.58	54.00	40.42
53.25	49.8	QP	V	7.88	0.94	21.41	37.21	37.21	40.00	2.79*

*Within measurement uncertainty!

802.11ac20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5180 MHz										
5180	56.32	PK	H	31.46	5.49	0.00	93.27	87.27	N/A	N/A
5180	45.82	AV	H	31.46	5.49	0.00	82.77	76.77	N/A	N/A
5180	71.36	PK	V	31.46	5.49	0.00	108.31	102.31	N/A	N/A
5180	60.24	AV	V	31.46	5.49	0.00	97.19	91.19	N/A	N/A
5150	27.15	PK	V	31.40	5.45	0.00	64.00	58.00	68.20	10.20
5150	15.05	AV	V	31.40	5.45	0.00	51.90	45.90	54.00	8.10
10360	35.26	PK	V	36.97	8.34	25.85	54.72	48.72	68.20	19.48
15540	33.62	PK	V	37.43	11.42	24.10	58.37	52.37	68.20	15.83
15540	18.42	AV	V	37.43	11.42	24.10	43.17	37.17	54.00	16.83
1676.21	33.74	PK	V	23.95	3.18	26.94	33.93	27.93	68.20	40.27
1676.21	18.25	AV	V	23.95	3.18	26.94	18.44	12.44	54.00	41.56
2324.87	33.42	PK	V	25.44	3.87	27.18	35.55	29.55	68.20	38.65
2324.87	18.42	AV	V	25.44	3.87	27.18	20.55	14.55	54.00	39.45
53.36	49.7	QP	V	7.86	0.94	21.41	37.09	37.09	40.00	2.91*
Middle Channel:5200 MHz										
5200	58.05	PK	H	31.50	5.51	0.00	95.06	89.06	N/A	N/A
5200	46.85	AV	H	31.50	5.51	0.00	83.86	77.86	N/A	N/A
5200	71.81	PK	V	31.50	5.51	0.00	108.82	102.82	N/A	N/A
5200	60.32	AV	V	31.50	5.51	0.00	97.33	91.33	N/A	N/A
10400	34.84	PK	V	36.98	8.34	25.92	54.24	48.24	68.20	19.96
15600	33.75	PK	V	37.32	11.46	24.12	58.41	52.41	68.20	15.79
15600	18.36	AV	V	37.32	11.46	24.12	43.02	37.02	54.00	16.98
1668.52	33.25	PK	V	23.94	3.17	26.94	33.42	27.42	68.20	40.78
1668.52	18.12	AV	V	23.94	3.17	26.94	18.29	12.29	54.00	41.71
2298.58	33.85	PK	V	25.38	4.10	27.19	36.14	30.14	68.20	38.06
2298.58	18.32	AV	V	25.38	4.10	27.19	20.61	14.61	54.00	39.39
2345.62	33.47	PK	V	25.50	3.66	27.16	35.47	29.47	68.20	38.73
2345.62	17.96	AV	V	25.50	3.66	27.16	19.96	13.96	54.00	40.04
53.25	49.8	QP	V	7.88	0.94	21.41	37.21	37.21	40.00	2.79*
High Channel:5240 MHz										
5240	57.62	PK	H	31.58	5.09	0.00	94.29	88.29	N/A	N/A
5240	46.35	AV	H	31.58	5.09	0.00	83.02	77.02	N/A	N/A
5240	71.85	PK	V	31.58	5.09	0.00	108.52	102.52	N/A	N/A
5240	60.42	AV	V	31.58	5.09	0.00	97.09	91.09	N/A	N/A
5350	27.36	PK	V	31.80	4.58	0.00	63.74	57.74	68.20	10.46
5350	15.32	AV	V	31.80	4.58	0.00	51.70	45.70	54.00	8.30
10480	34.86	PK	V	37.00	8.34	26.02	54.18	48.18	68.20	20.02
15720	33.47	PK	V	37.10	11.54	23.53	58.58	52.58	68.20	15.62
15720	18.21	AV	V	37.10	11.54	23.53	43.32	37.32	54.00	16.68
1719.62	33.47	PK	V	24.04	3.25	26.97	33.79	27.79	68.20	40.41
1719.62	18.42	AV	V	24.04	3.25	26.97	18.74	12.74	54.00	41.26
2227.14	33.65	PK	V	25.19	3.59	27.24	35.19	29.19	68.20	39.01
2227.14	18.23	AV	V	25.19	3.59	27.24	19.77	13.77	54.00	40.23
53.74	49.8	QP	V	7.78	0.95	21.41	37.12	37.12	40.00	2.88*

*Within measurement uncertainty!

802.11ac40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5190 MHz										
5190	54.36	PK	H	31.48	5.50	0.00	91.34	85.34	N/A	N/A
5190	43.21	AV	H	31.48	5.50	0.00	80.19	74.19	N/A	N/A
5190	66.28	PK	V	31.48	5.50	0.00	103.26	97.26	N/A	N/A
5190	55.41	AV	V	31.48	5.50	0.00	92.39	86.39	N/A	N/A
5150	27.86	PK	V	31.40	5.45	0.00	64.71	58.71	68.20	9.49
5150	18.24	AV	V	31.40	5.45	0.00	55.09	49.09	54.00	4.91
10380	35.47	PK	V	36.98	8.34	25.89	54.90	48.90	68.20	19.30
15570	33.47	PK	V	37.37	11.44	24.11	58.17	52.17	68.20	16.03
15570	18.36	AV	V	37.37	11.44	24.11	43.06	37.06	54.00	16.94
166.57	33.75	PK	V	12.26	1.55	21.44	26.12	20.12	68.20	48.08
166.57	18.31	AV	V	12.26	1.55	21.44	10.68	4.68	54.00	49.32
2317.21	33.62	PK	V	25.42	3.94	27.18	35.80	29.80	68.20	38.40
2317.21	18.26	AV	V	25.42	3.94	27.18	20.44	14.44	54.00	39.56
53.35	49.9	QP	V	7.86	0.94	21.41	37.29	37.29	40.00	2.71*
High Channel:5230 MHz										
5230	55.32	PK	H	31.56	5.20	0.00	92.08	86.08	N/A	N/A
5230	43.96	AV	H	31.56	5.20	0.00	80.72	74.72	N/A	N/A
5230	67.95	PK	V	31.56	5.20	0.00	104.71	98.71	N/A	N/A
5230	56.71	AV	V	31.56	5.20	0.00	93.47	87.47	N/A	N/A
5350	27.69	PK	V	31.80	4.58	0.00	64.07	58.07	68.20	10.13
5350	14.62	AV	V	31.80	4.58	0.00	51.00	45.00	54.00	9.00
10460	35.45	PK	V	36.99	8.34	26.00	54.78	48.78	68.20	19.42
15690	33.68	PK	V	37.16	11.52	23.67	58.69	52.69	68.20	15.51
15690	18.26	AV	V	37.16	11.52	23.67	43.27	37.27	54.00	16.73
1669.25	33.62	PK	V	23.94	3.17	26.94	33.79	27.79	68.20	40.41
1669.25	18.24	AV	V	23.94	3.17	26.94	18.41	12.41	54.00	41.59
2695.26	33.47	PK	V	26.41	4.06	27.36	36.58	30.58	68.20	37.62
2695.26	18.31	AV	V	26.41	4.06	27.36	21.42	15.42	54.00	38.58
53.42	49.7	QP	V	7.85	0.95	21.41	37.09	37.09	40.00	2.91*

*Within measurement uncertainty!

802.11ac80 Mode:


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5210 MHz										
5210	50.13	PK	H	31.52	5.41	0.00	87.06	81.06	N/A	N/A
5210	39.68	AV	H	31.52	5.41	0.00	76.61	70.61	N/A	N/A
5210	62.23	PK	V	31.52	5.41	0.00	99.16	93.16	N/A	N/A
5210	50.48	AV	V	31.52	5.41	0.00	87.41	81.41	N/A	N/A
5150	27.81	PK	V	31.40	5.45	0.00	64.66	58.66	68.20	9.54
5350	27.09	PK	V	31.80	4.58	0.00	63.47	57.47	68.20	10.73
5350	14.71	AV	V	31.80	4.58	0.00	51.09	45.09	54.00	8.91
5150	14.73	AV	V	31.40	5.45	0.00	51.58	45.58	54.00	8.42
10420	36.52	PK	V	36.98	8.34	25.95	55.89	49.89	68.20	18.31
15630	33.68	PK	V	37.27	11.48	23.97	58.46	52.46	68.20	15.74
15630	18.54	AV	V	37.27	11.48	23.97	43.32	37.32	54.00	16.68
1669.63	33.74	PK	V	23.94	3.17	26.94	33.91	27.91	68.20	40.29
1669.63	18.23	AV	V	23.94	3.17	26.94	18.40	12.40	54.00	41.60
2323.36	33.47	PK	V	25.44	3.88	27.18	35.61	29.61	68.20	38.59
2323.36	18.32	AV	V	25.44	3.88	27.18	20.46	14.46	54.00	39.54
53.36	49.8	QP	V	7.86	0.94	21.41	37.19	37.19	40.00	2.81*

*Within measurement uncertainty!

Conducted Spurious Emission at Antenna Port

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The Resolution bandwidth is set to 100 kHz below 1GHz, 1MHz above 1GHz, The Video bandwidth is set to \geq Resolution bandwidth, report the peak value out of the operating band. Offset the antenna gain and cable loss.
3. Repeat above procedures until all frequencies measured were complete.



Test data

Mode: Transmitting


Please refer to the following table and plots.

Test mode	Channel	Worst Reading Level (dBm)			Limit (dBm)	Result
		Chain0	Chain1	Chain0+1		
802.11a	Low	-36.54	/	/	-27	PASS
	Middle	-36.09	/	/	-27	PASS
	High	-35.06	/	/	-27	PASS
802.11n20	Low	-36.25	-36.84	-33.52	-27	PASS
	Middle	-37.07	-36.7	-33.87	-27	PASS
	High	-37.19	-37.94	-34.54	-27	PASS
802.11n40	Low	-37.29	-37.79	-34.52	-27	PASS
	High	-36.62	-37.49	-34.02	-27	PASS
802.11ac20	Low	-36.51	-36.06	-33.27	-27	PASS
	Middle	-36.49	-36.61	-33.54	-27	PASS
	High	-36.6	-36.9	-33.74	-27	PASS
802.11ac40	Low	-34.73	-37.79	-32.99	-27	PASS
	High	-36.02	-37.49	-33.68	-27	PASS
802.11ac80	Low	-36.56	-36.38	-33.46	-27	PASS

Note: the antenna gain is 1.5 dBi, cable loss 0.5 dB.


Please refer to the following plots.

802.11a Low Channel 30M-1G

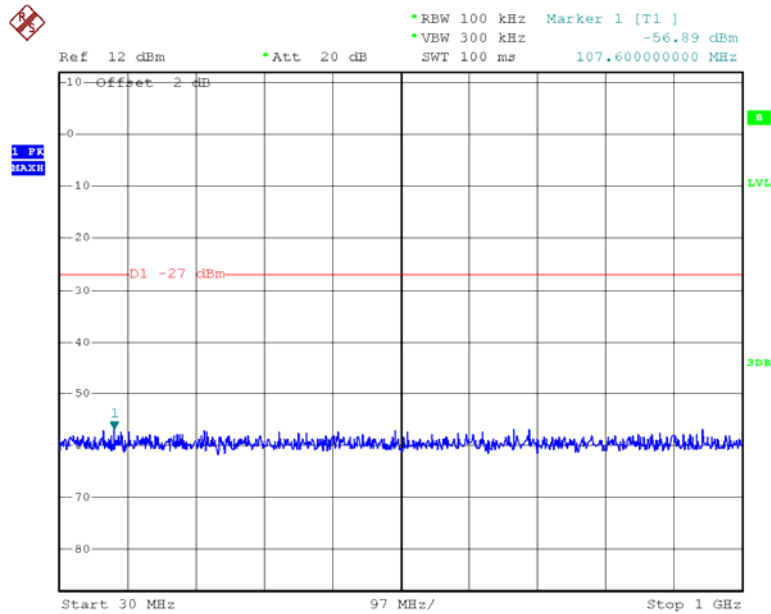


Date: 10.OCT.2013 11:41:38

802.11a Low Channel 1G-26.5G

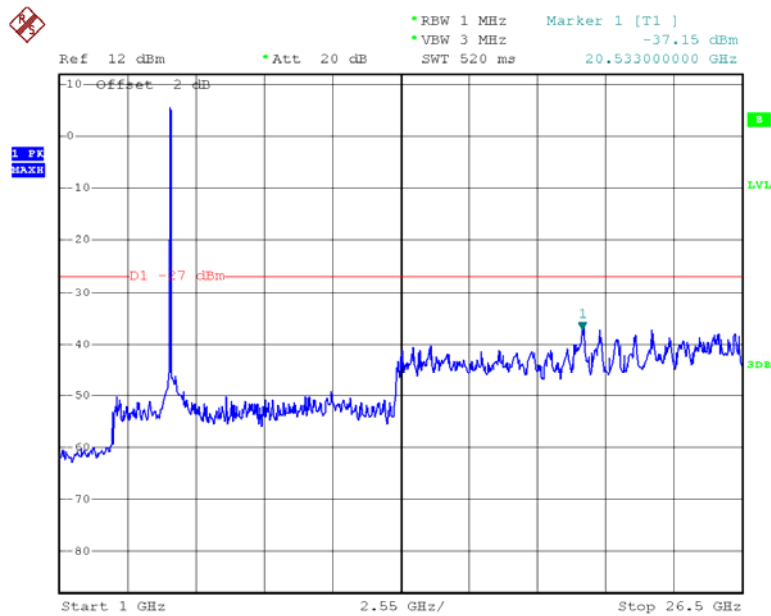


Date: 10.OCT.2013 11:41:14

802.11a Low Channel 26.5-40G

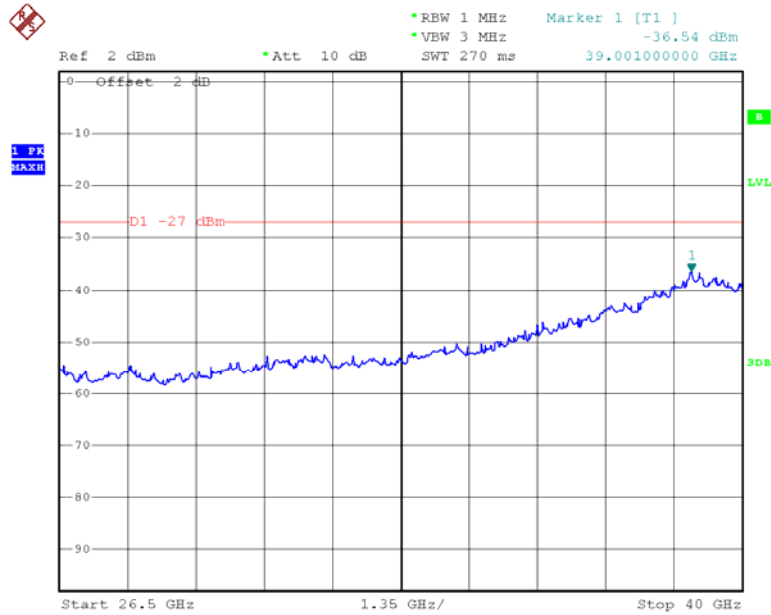


Date: 10.OCT.2013 08:58:03

802.11a Middle Channel 30M-1G

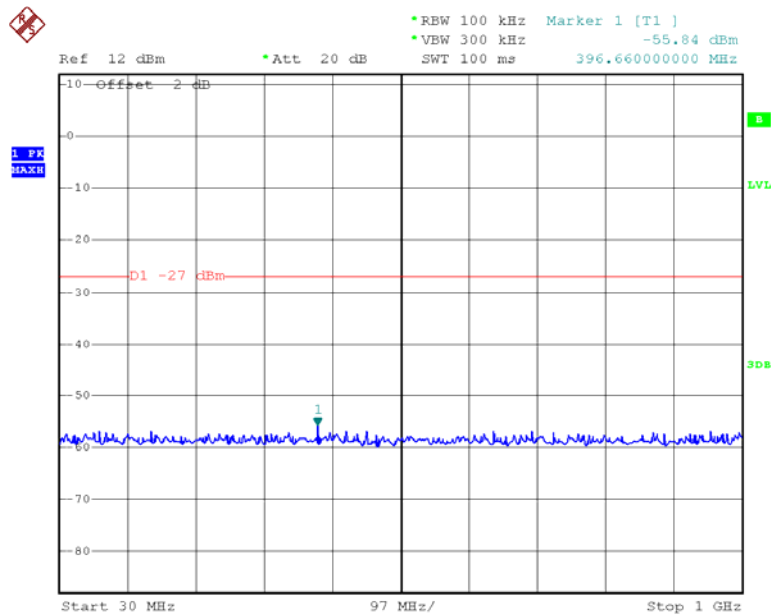


Date: 10.OCT.2013 09:13:44

802.11a Middle Channel 1G -26.5G

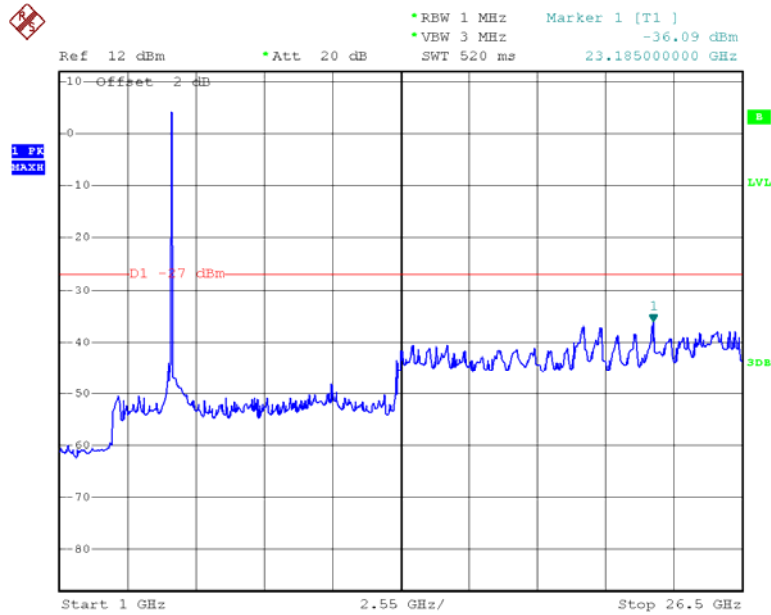


Date: 10.OCT.2013 09:14:27

802.11a Middle Channel 26.5-40G

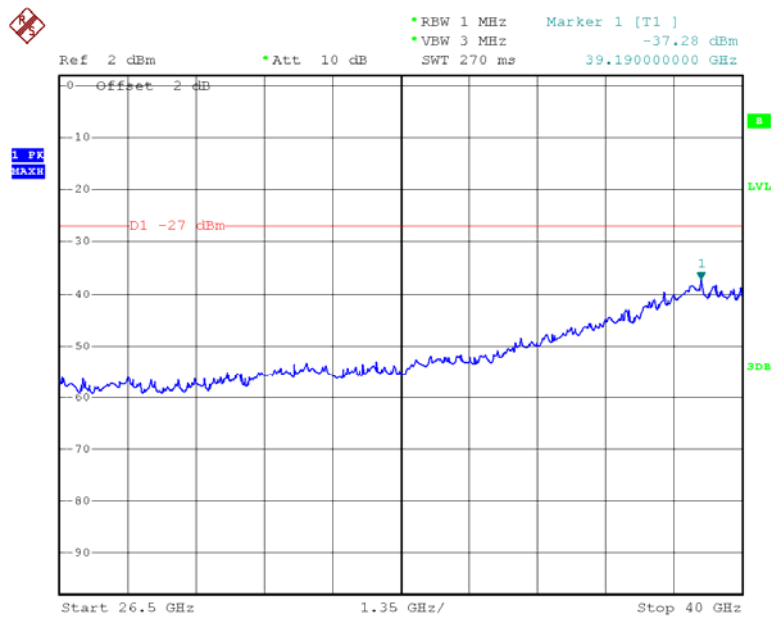


Date: 10.OCT.2013 09:15:06

802.11a High Channel 30M-1G

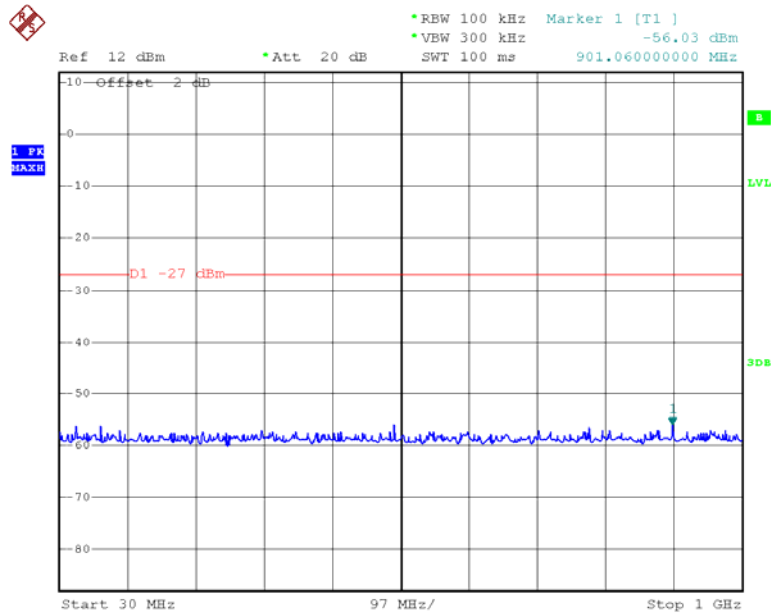


Date: 10.OCT.2013 09:25:46

802.11a High Channel 1G-26.5G

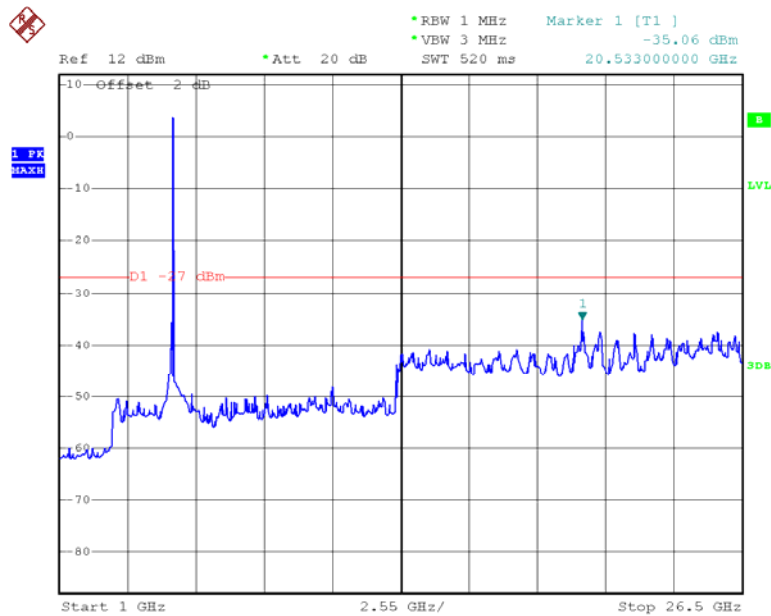


Date: 10.OCT.2013 09:26:51

802.11a High Channel 26.5-40G

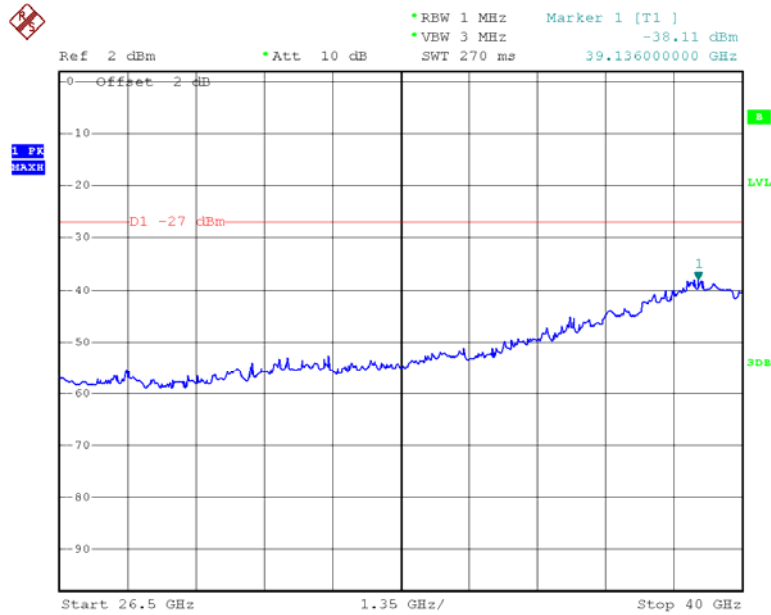


Date: 10.OCT.2013 09:27:27

Chain 0: 802.11n20 Low Channel 30M-1G

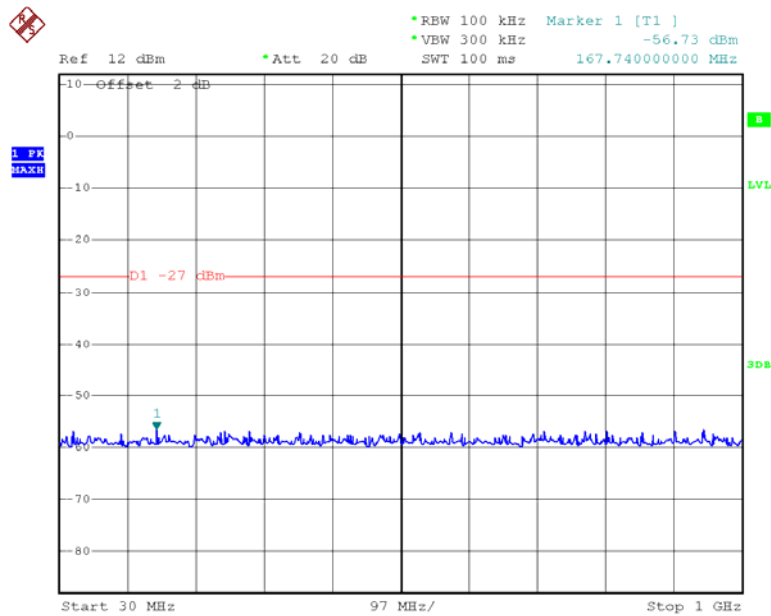


Date: 10.OCT.2013 09:42:08

Chain 0: 802.11n20 Low Channel 1G-26.5G

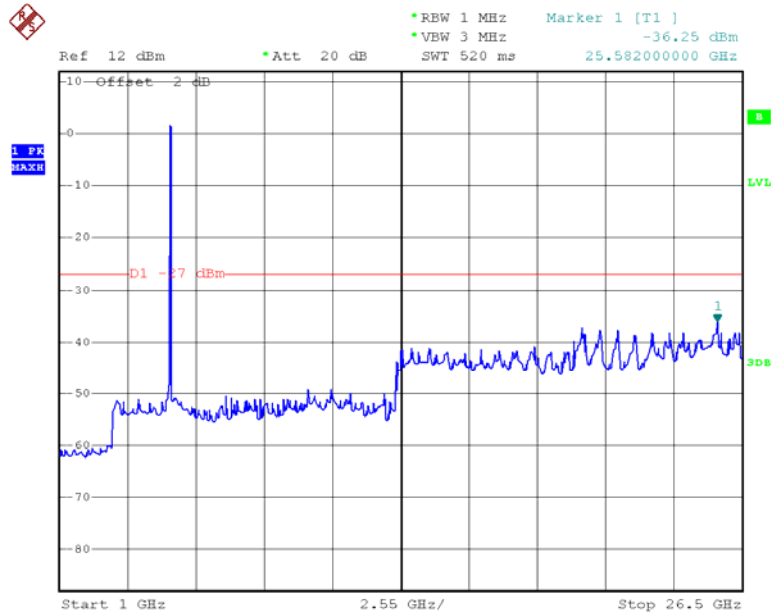


Date: 10.OCT.2013 09:42:56

Chain 0: 802.11n20 Low Channel 26.5-40G

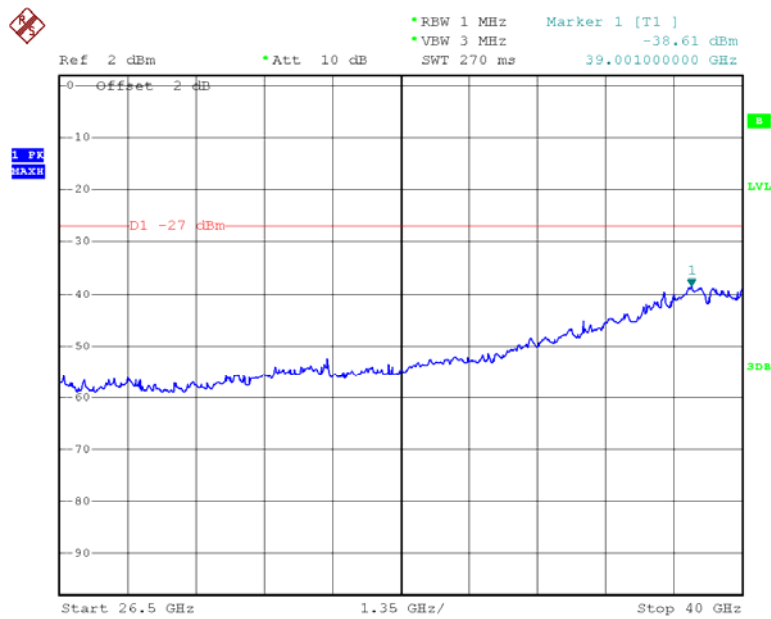


Date: 10.OCT.2013 09:43:42

Chain 0: 802.11n20 Middle Channel 30M-1G

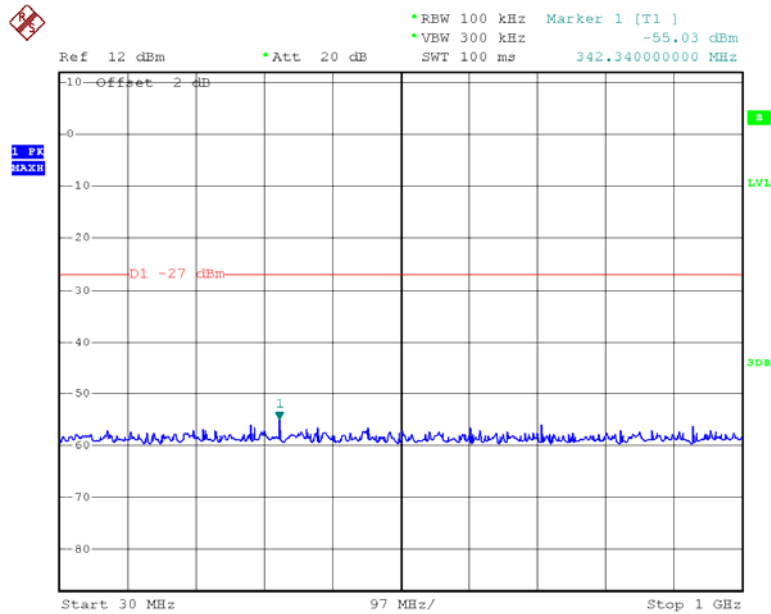


Date: 10.OCT.2013 09:58:03

Chain 0: 802.11n20 Middle Channel 1G -26.5G

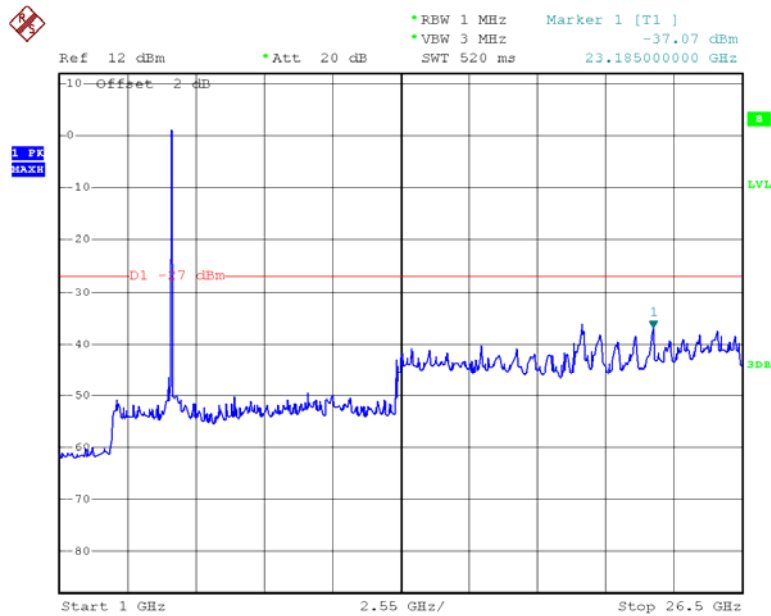


Date: 10.OCT.2013 09:58:38

Chain 0: 802.11n20 Middle Channel 26.5-40G

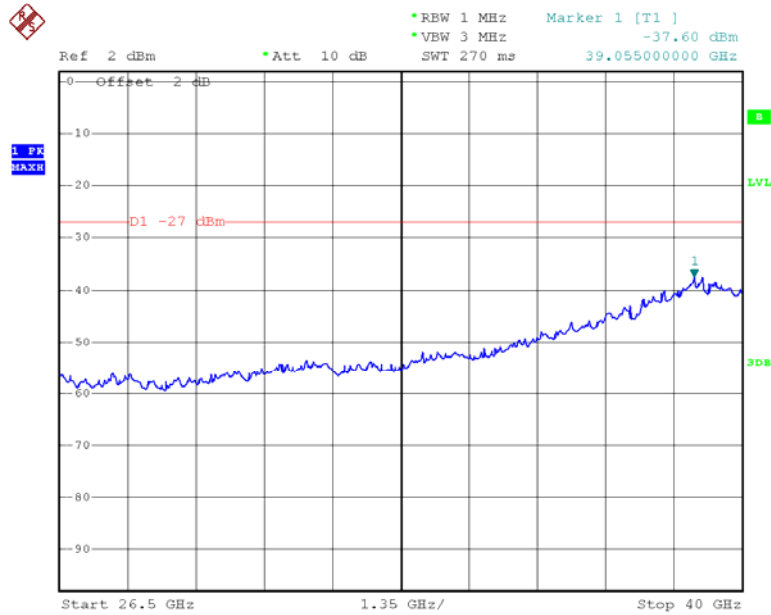


Date: 10.OCT.2013 09:59:20

Chain 0: 802.11n20 High Channel 30M-1G

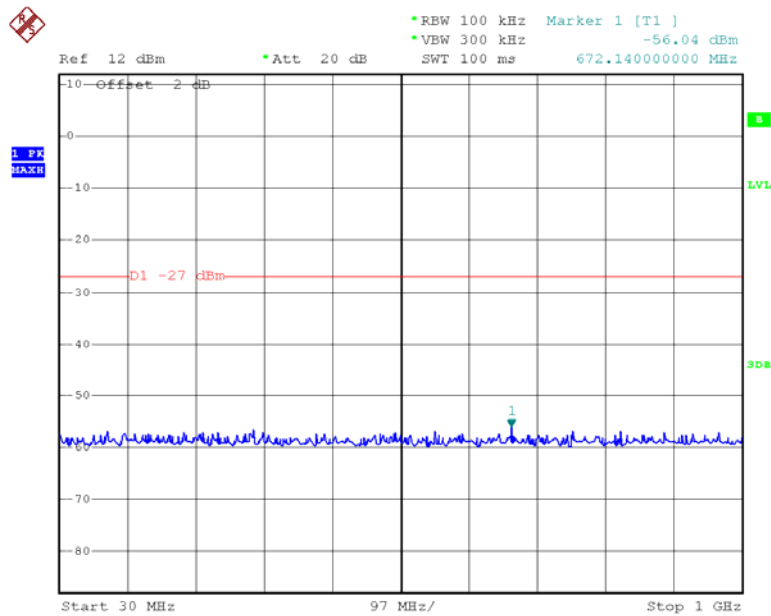


Date: 10.OCT.2013 10:09:36

Chain 0: 802.11n20 High Channel 1G-26.5G

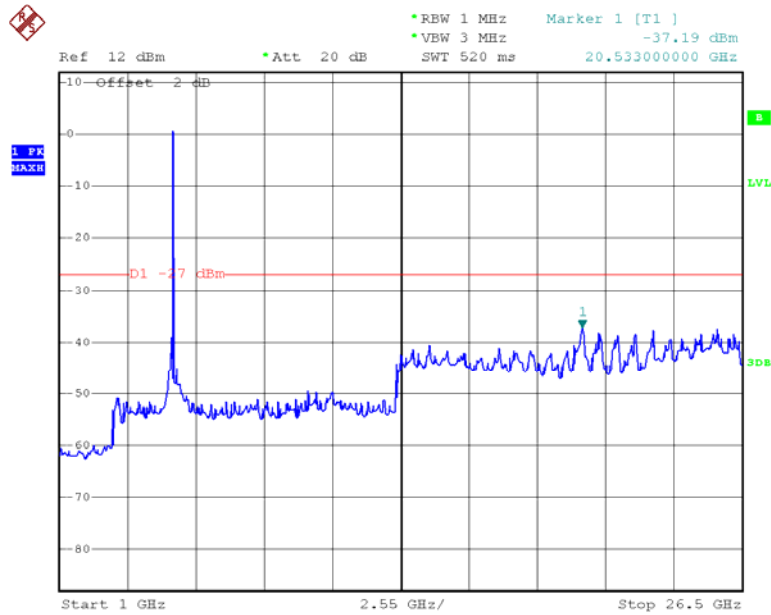


Date: 10.OCT.2013 10:10:10

Chain 0: 802.11n20 High Channel 26.5-40G

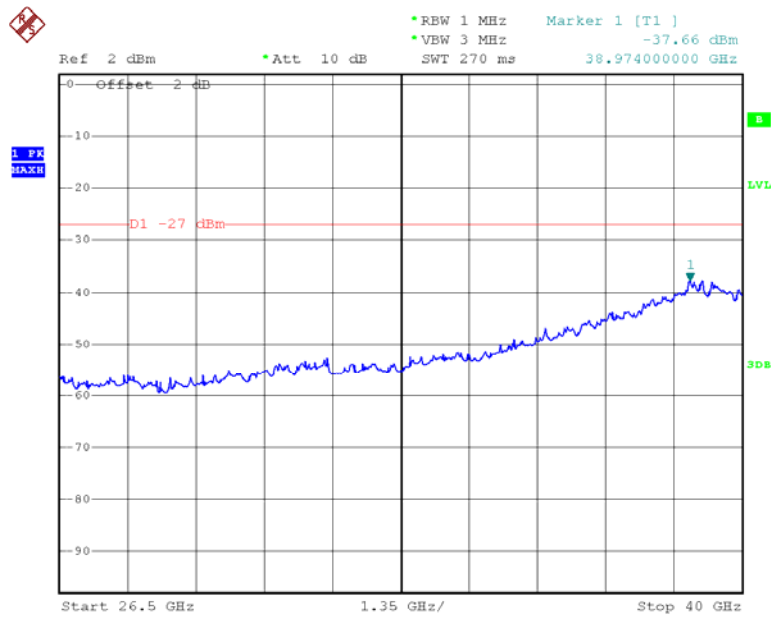


Date: 10.OCT.2013 10:11:14

Chain 1: 802.11n20 Low Channel 30M-1G

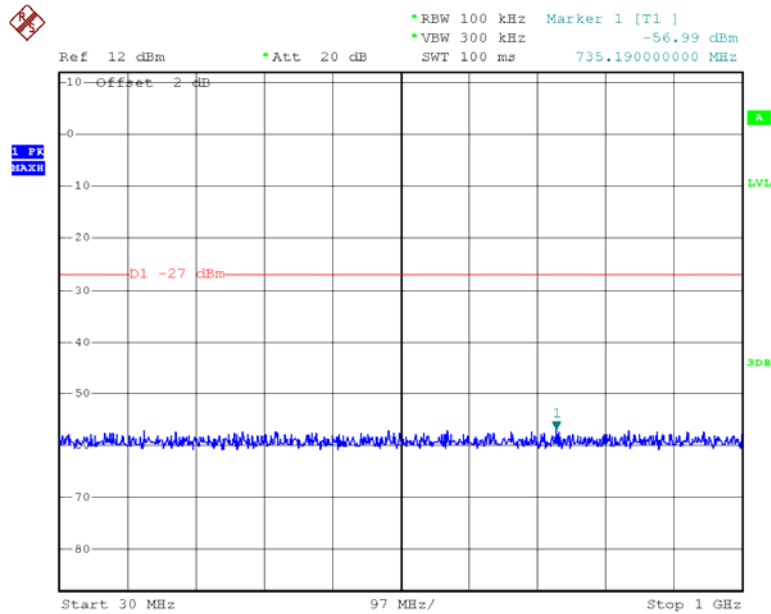


Date: 12.OCT.2013 09:23:19

Chain 1: 802.11n20 Low Channel 1G-26.5G

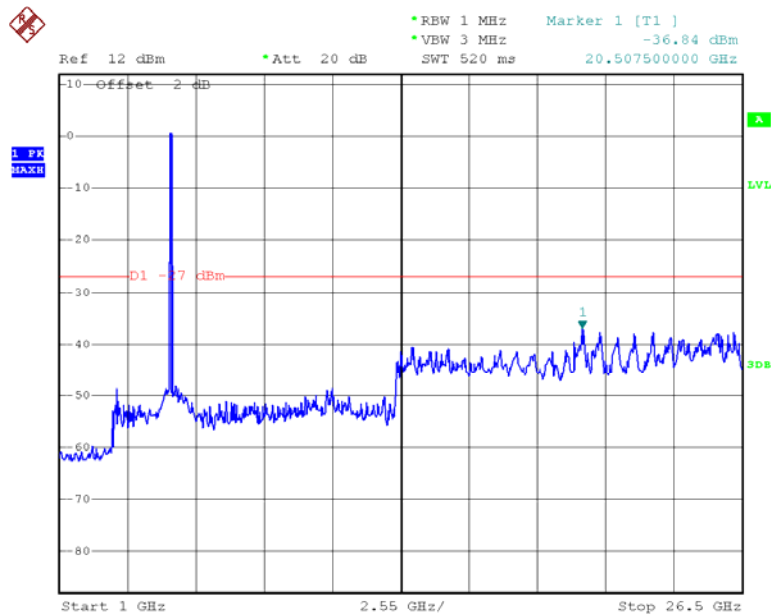


Date: 12.OCT.2013 09:23:51

Chain 1: 802.11n20 Low Channel 26.5-40G

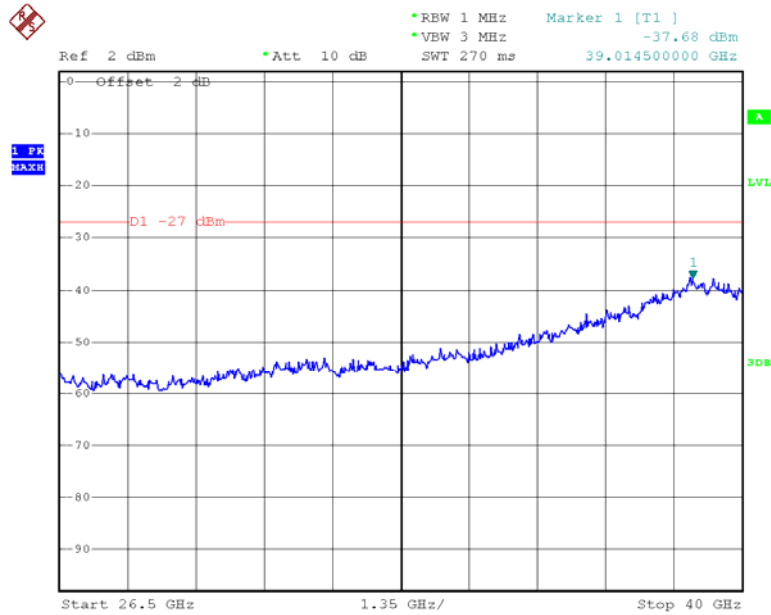


Date: 12.OCT.2013 09:24:25

Chain 1: 802.11n20 Middle Channel 30M-1G

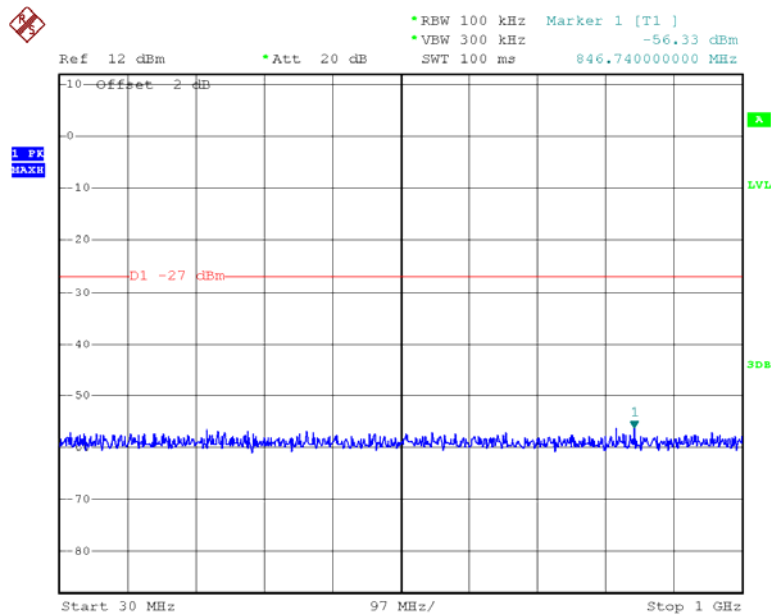


Date: 12.OCT.2013 09:30:01

Chain 1: 802.11n20 Middle Channel 1G -26.5G

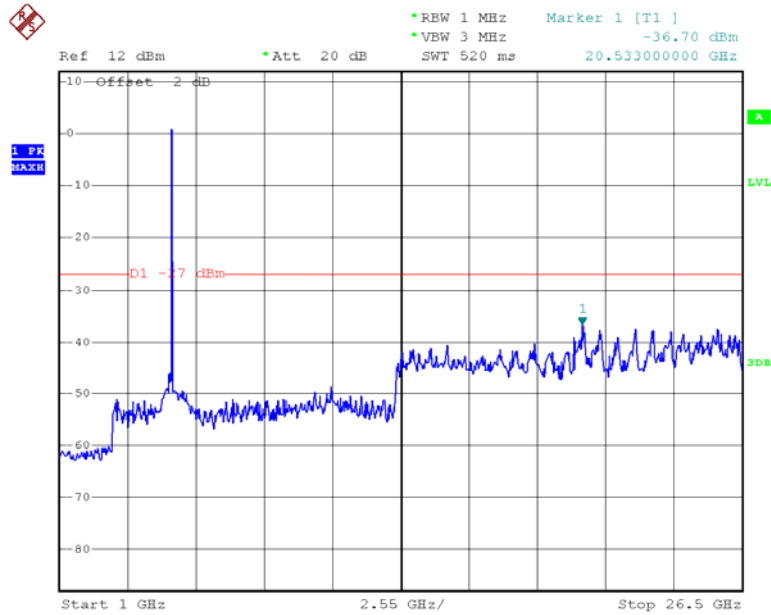


Date: 12.OCT.2013 09:30:31

Chain 1: 802.11n20 Middle Channel 26.5-40G

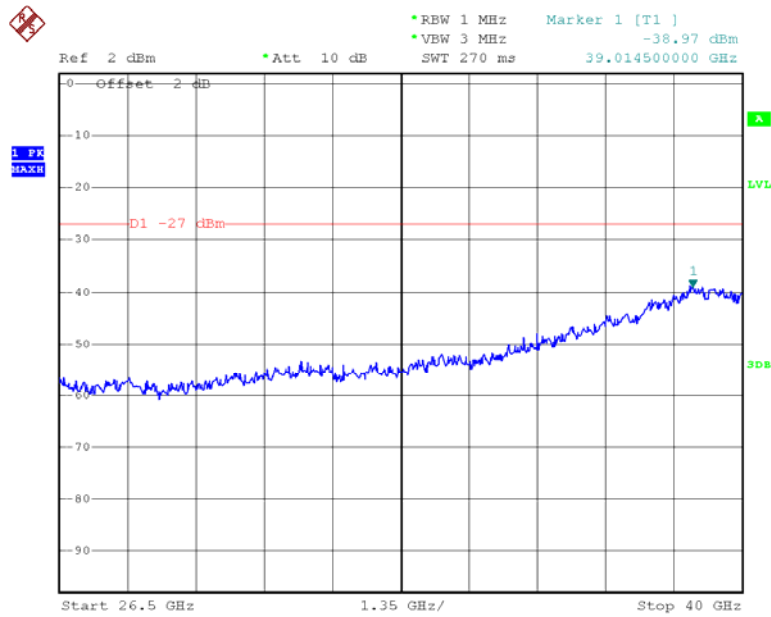


Date: 12.OCT.2013 09:30:54

Chain 1: 802.11n20 High Channel 30M-1G

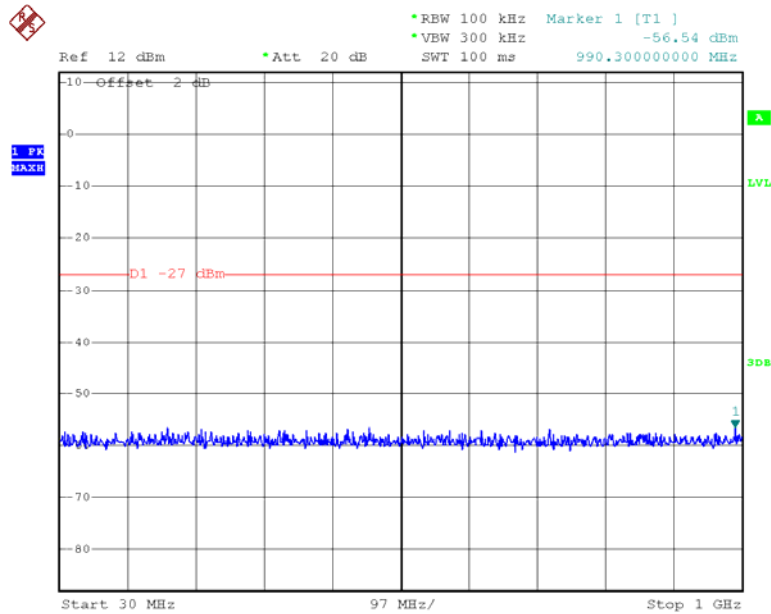


Date: 12.OCT.2013 09:37:31

Chain 1: 802.11n20 High Channel 1G-26.5G

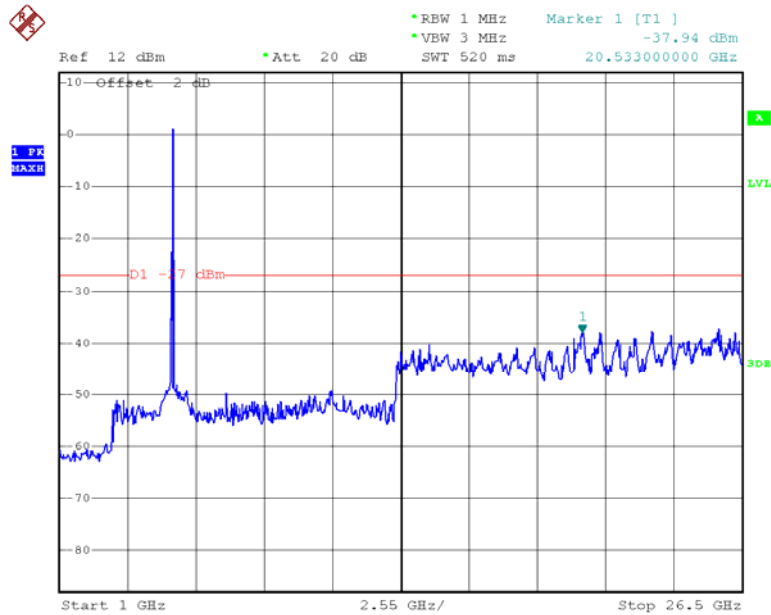


Date: 12.OCT.2013 09:37:57

Chain 1: 802.11n20 High Channel 26.5-40G

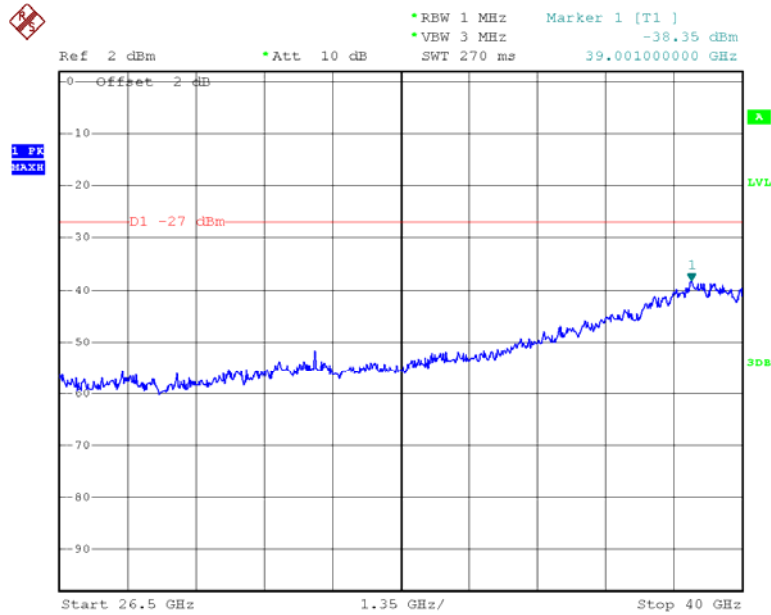


Date: 12.OCT.2013 09:38:22

Chain 0: 802.11n40 Low Channel 30M-1G

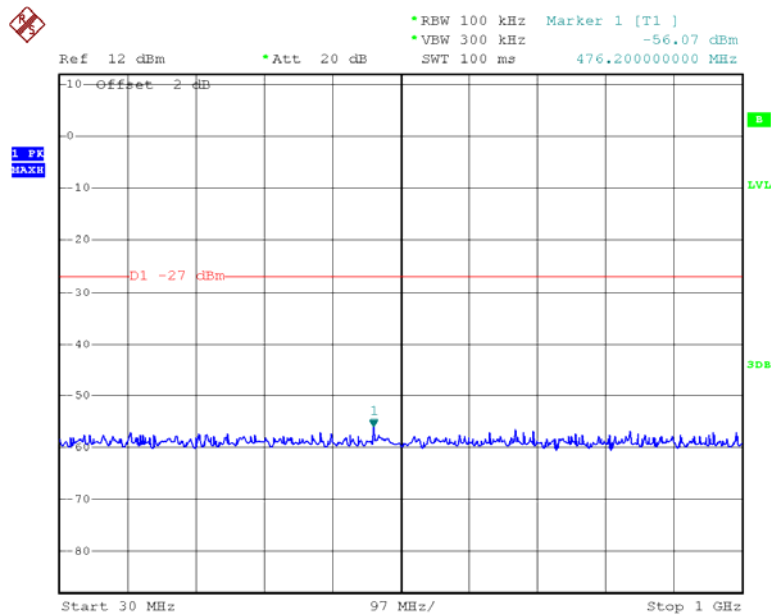


Date: 10.OCT.2013 19:41:39

Chain 0: 802.11n40 Low Channel 1G-26.5G

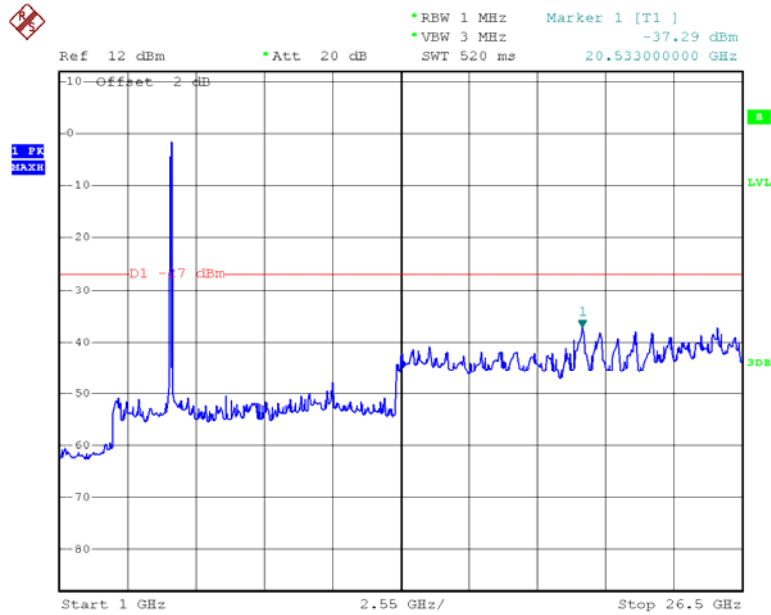


Date: 10.OCT.2013 19:42:20

Chain 0: 802.11n40 Low Channel 26.5-40G

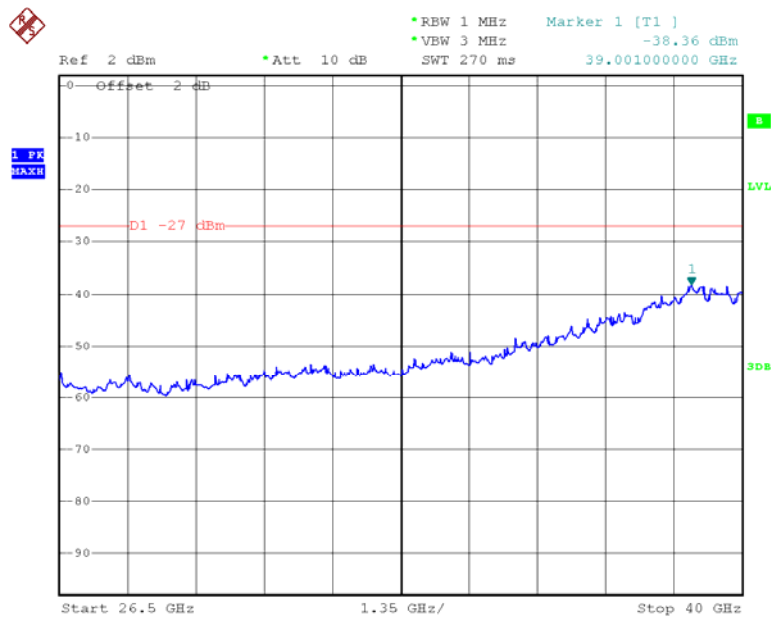


Date: 10.OCT.2013 19:43:01

Chain 0: 802.11n40 High Channel 30M-1G

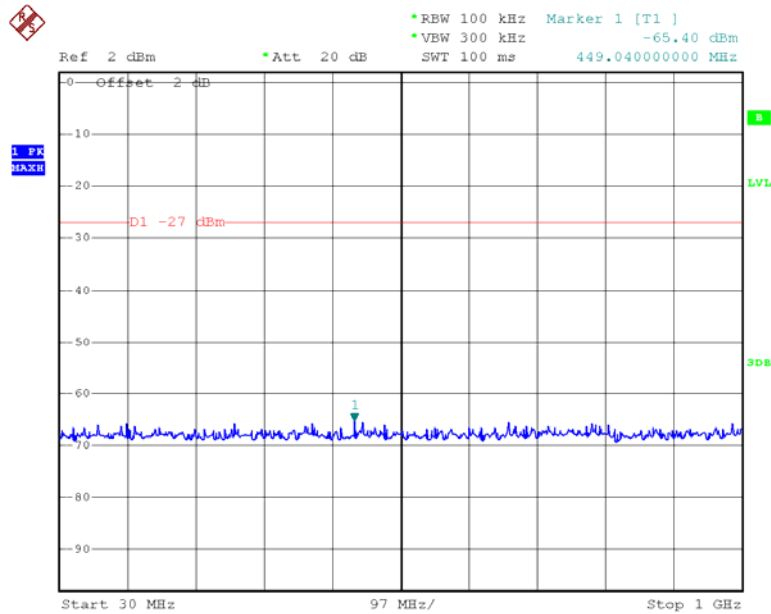


Date: 10.OCT.2013 19:46:19

Chain 0: 802.11n40 High Channel 1G-26.5G

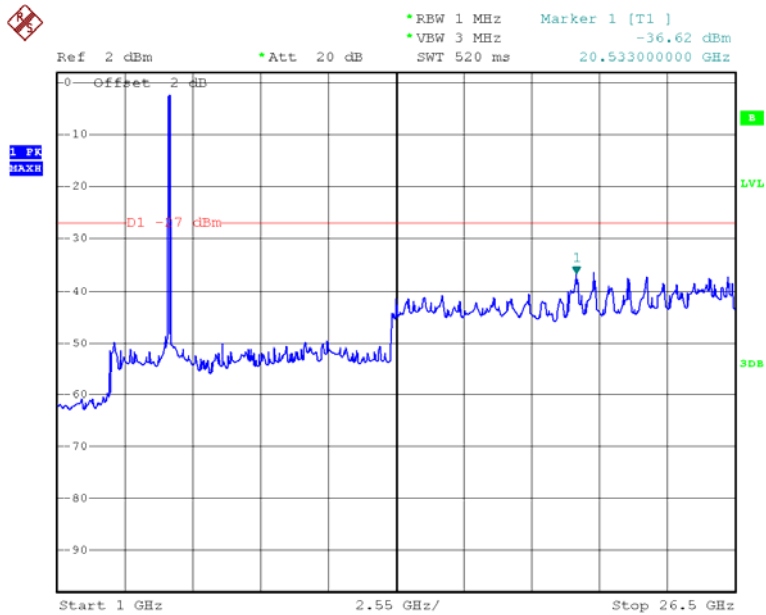


Date: 10.OCT.2013 19:45:38

Chain 0: 802.11n40 High Channel 26.5-40G

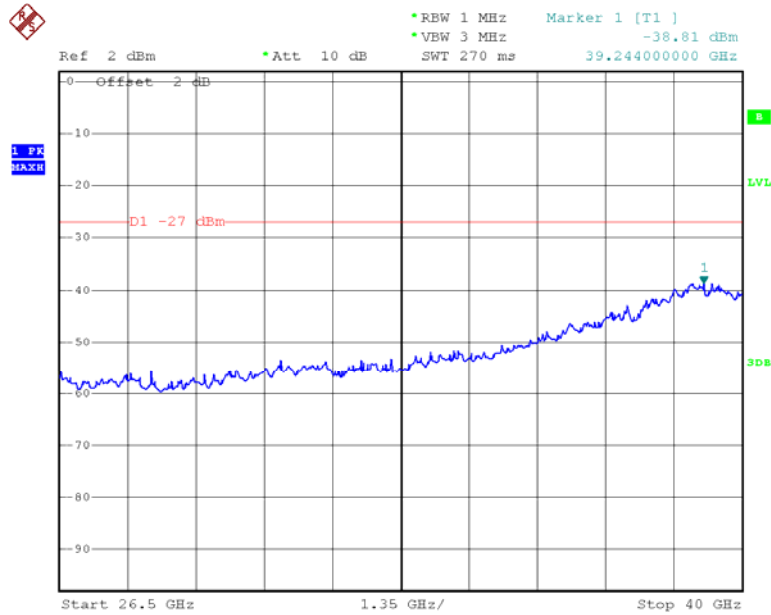


Date: 10.OCT.2013 19:44:17

Chain 1: 802.11n40 Low Channel 30M-1G

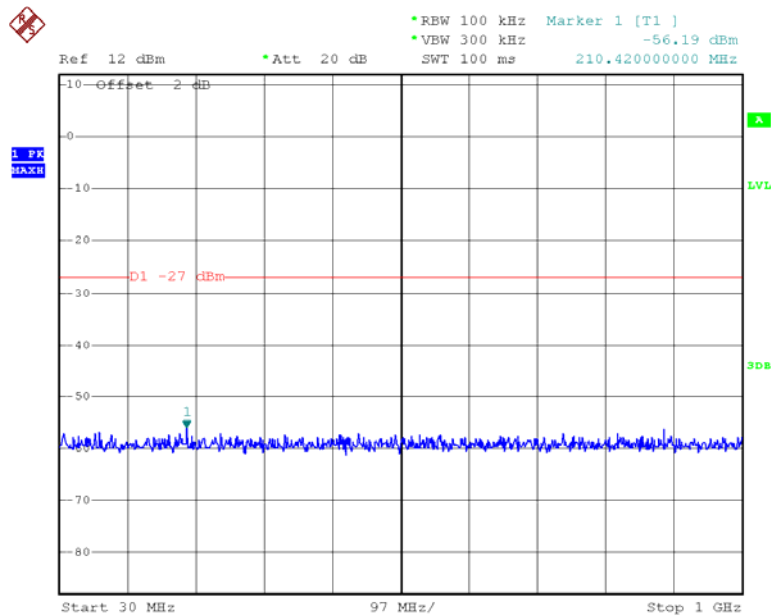


Date: 12.OCT.2013 10:07:42

Chain 1: 802.11n40 Low Channel 1G-26.5G

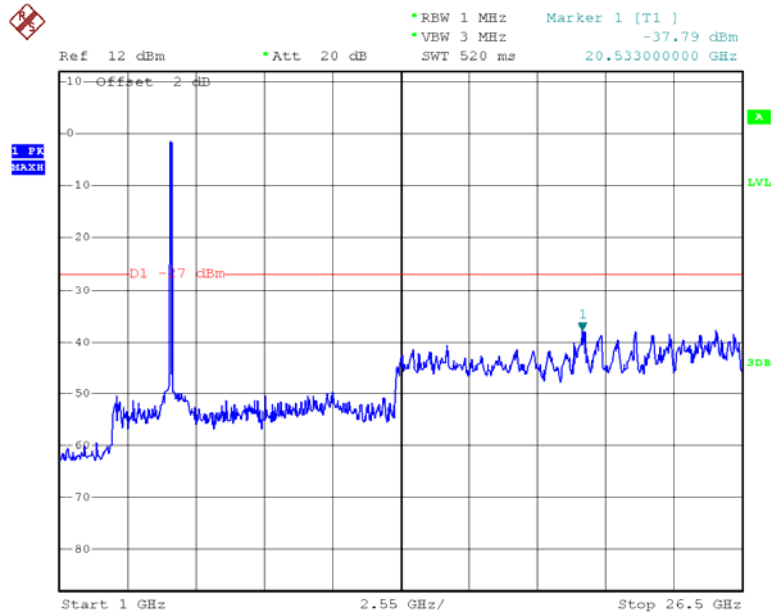


Date: 12.OCT.2013 10:08:05

Chain 1: 802.11n40 Low Channel 26.5-40G

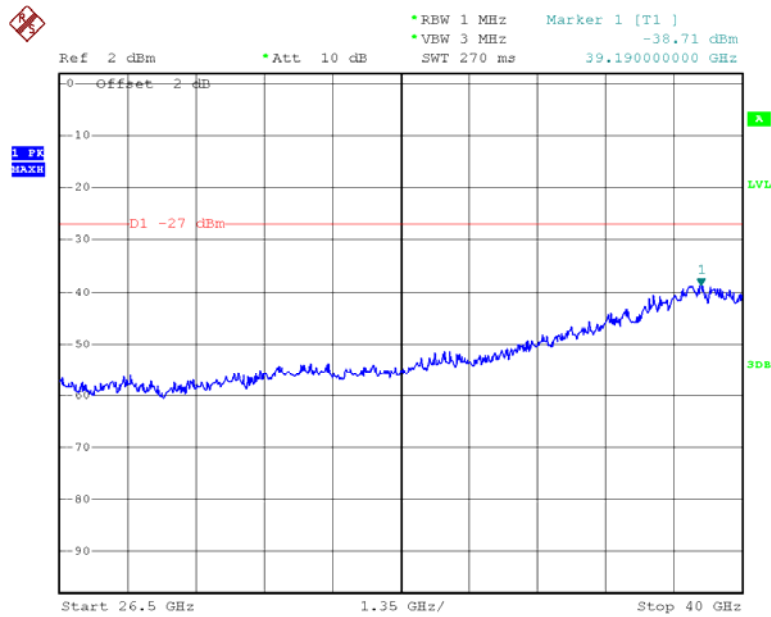


Date: 12.OCT.2013 10:08:26

Chain 1: 802.11n40 High Channel 30M-1G

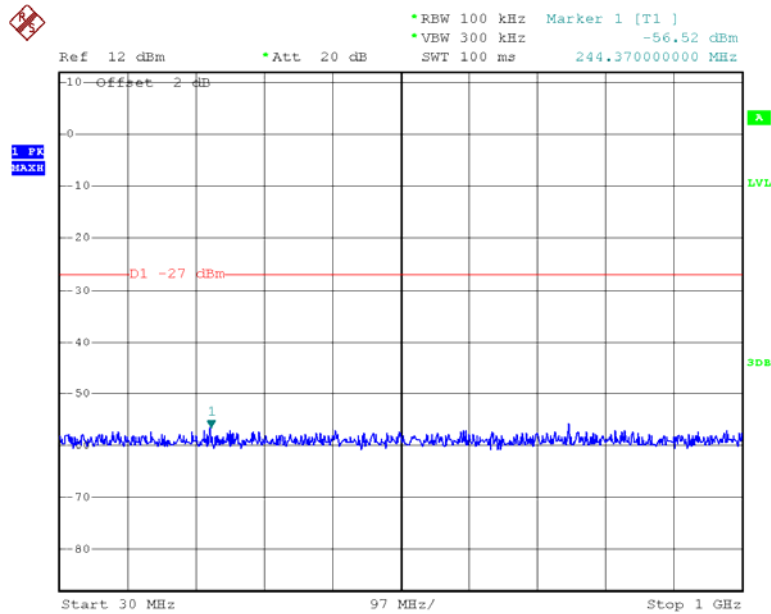


Date: 12.OCT.2013 10:16:16

Chain 1: 802.11n40 High Channel 1G-26.5G

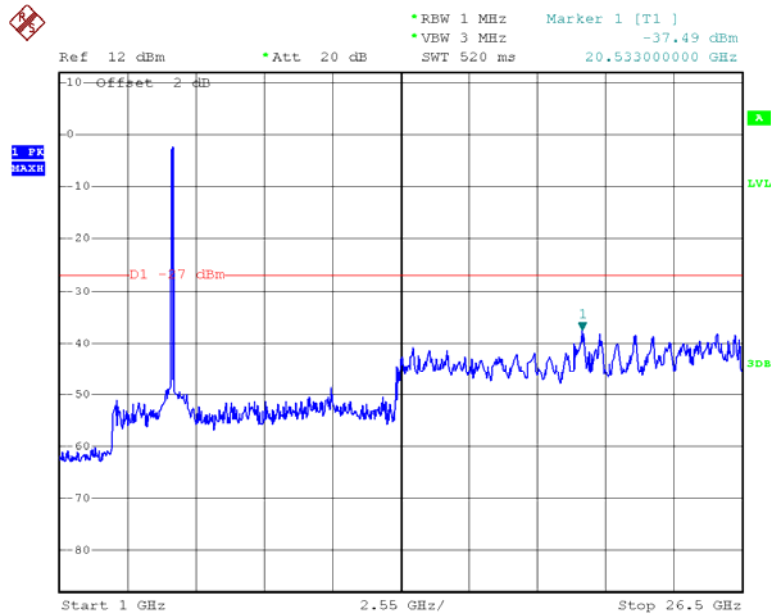


Date: 12.OCT.2013 10:16:39

Chain 1: 802.11n40 High Channel 26.5-40G

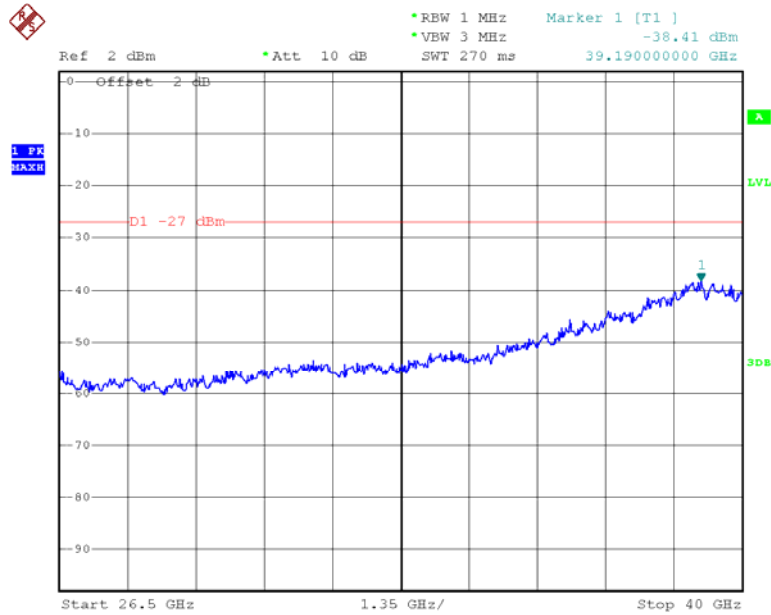


Date: 12.OCT.2013 10:17:04

Chain 0: 802.11ac20 Low Channel 30M-1G

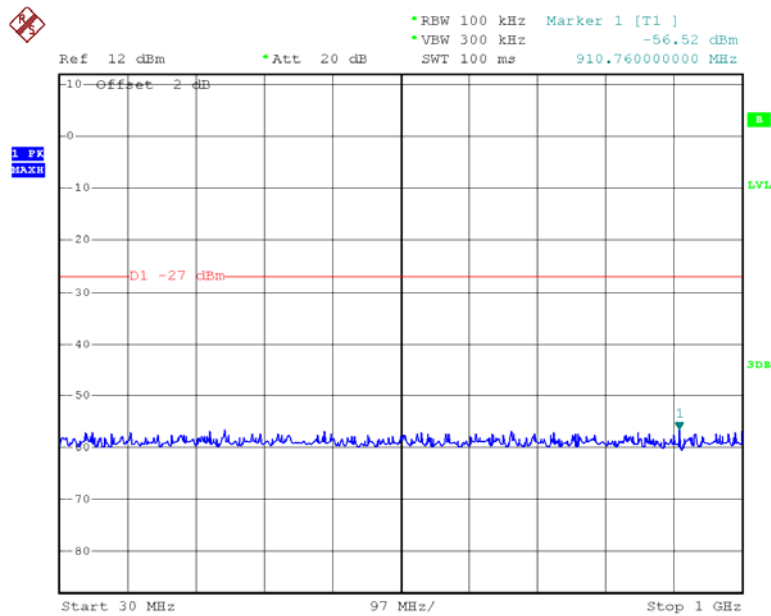


Date: 30.SEP.2013 10:26:12

Chain 0: 802.11ac20 Low Channel 1G-26.5G

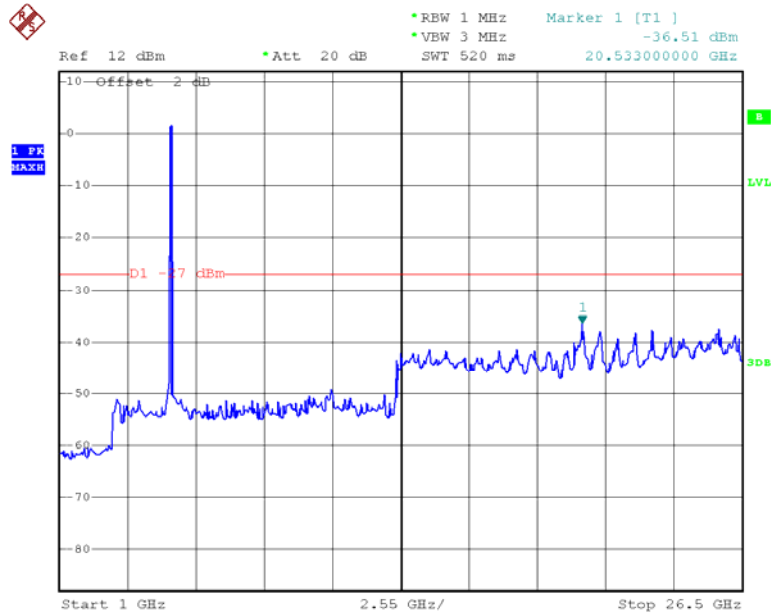


Date: 30.SEP.2013 10:26:55

Chain 0: 802.11ac20 Low Channel 26.5-40G

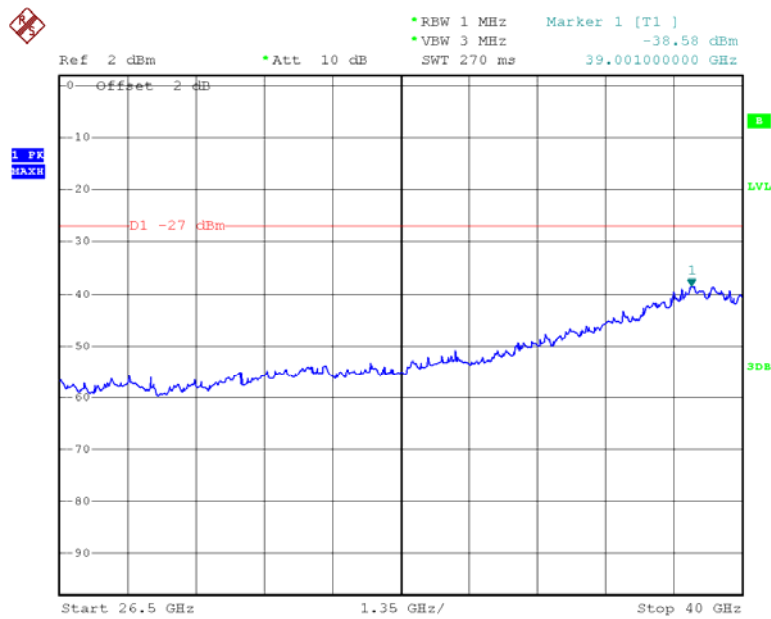


Date: 30.SEP.2013 10:27:34

Chain 0: 802.11ac20 Middle Channel 30M-1G

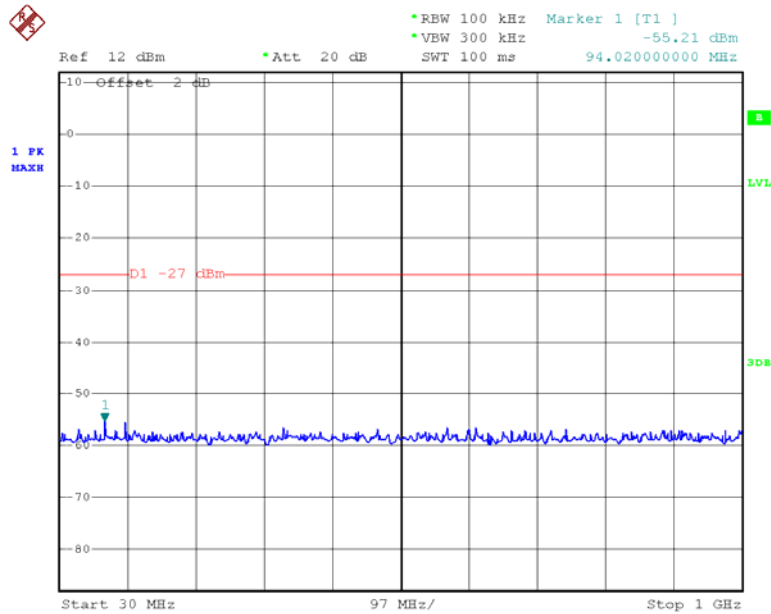


Date: 10.OCT.2013 11:21:41

Chain 0: 802.11ac20 Middle Channel 1G -26.5G

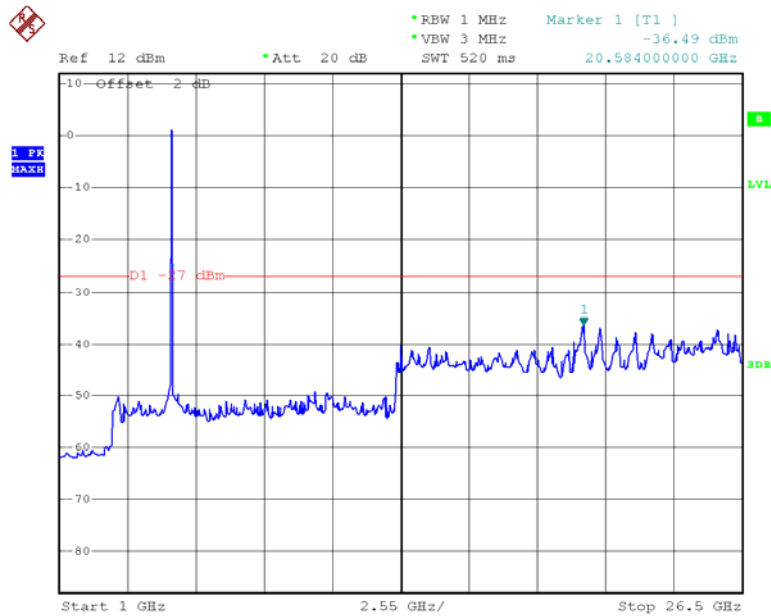


Date: 10.OCT.2013 11:23:06

Chain 0: 802.11ac20 Middle Channel 26.5-40G

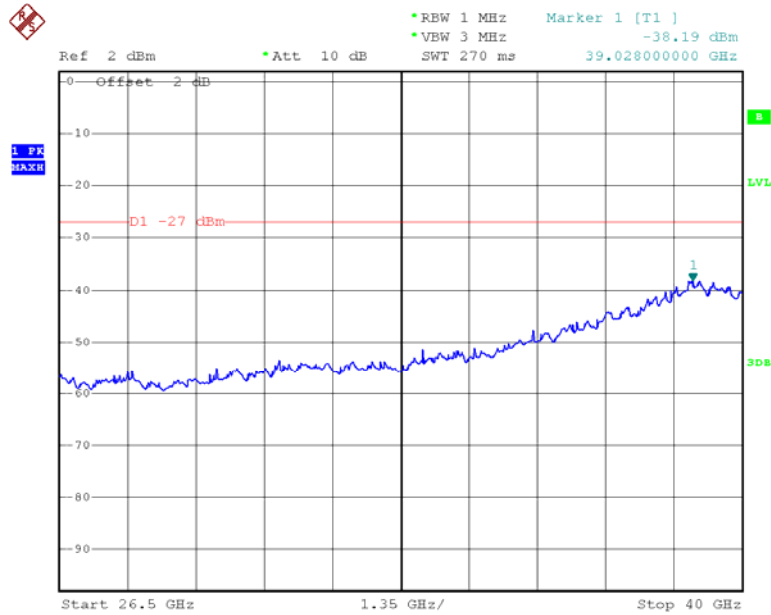


Date: 10.OCT.2013 11:24:32

Chain 0: 802.11ac20 High Channel 30M-1G

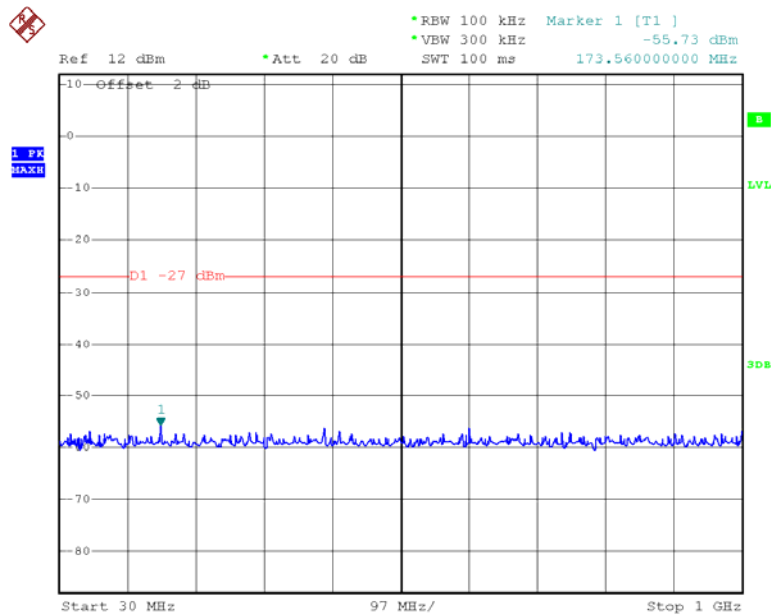


Date: 10.OCT.2013 11:34:11

Chain 0: 802.11ac20 High Channel 1G-26.5G

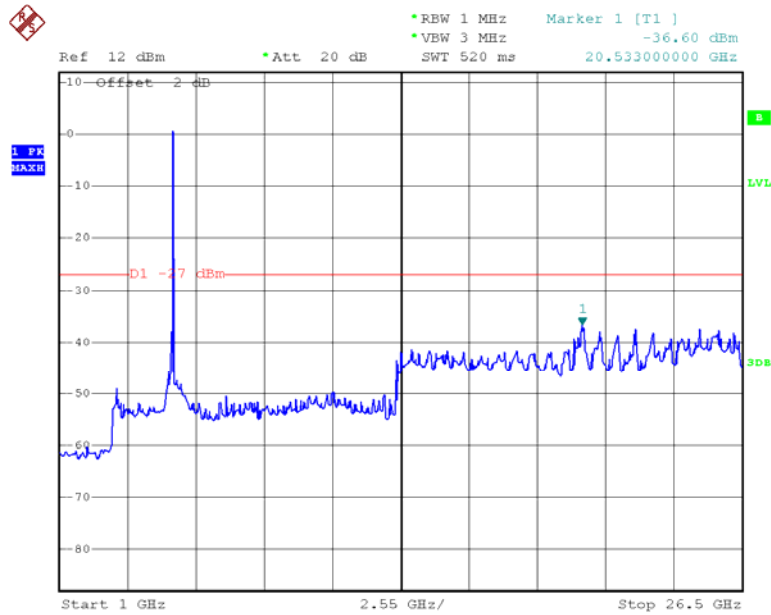


Date: 10.OCT.2013 11:35:00

Chain 0: 802.11ac20 High Channel 26.5-40G

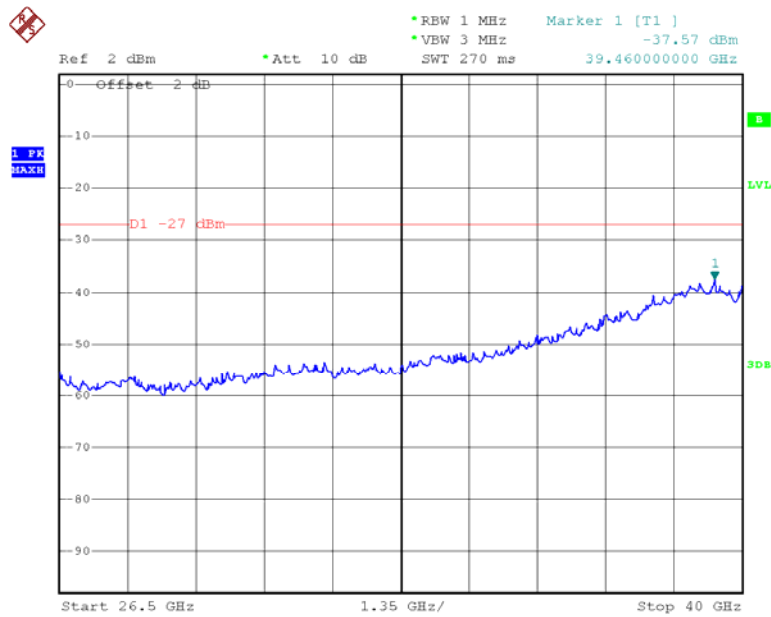


Date: 10.OCT.2013 11:35:48

Chain 1: 802.11ac20 Low Channel 30M-1G

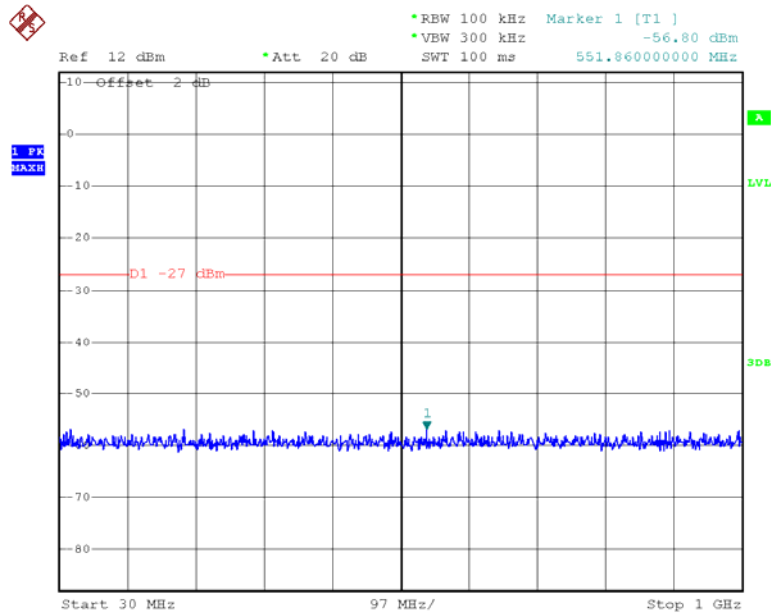


Date: 12.OCT.2013 09:46:01

Chain 1: 802.11ac20 Low Channel 1G-26.5G

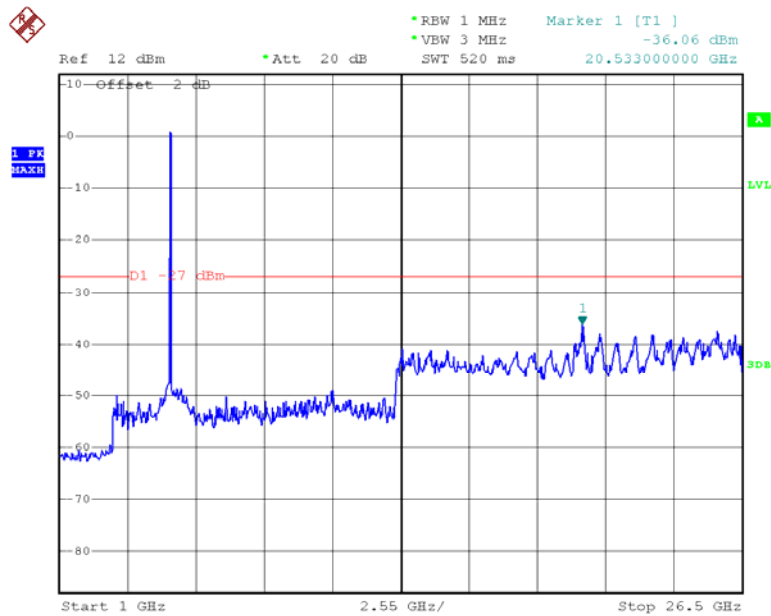


Date: 12.OCT.2013 09:46:29

Chain 1: 802.11ac20 Low Channel 26.5-40G

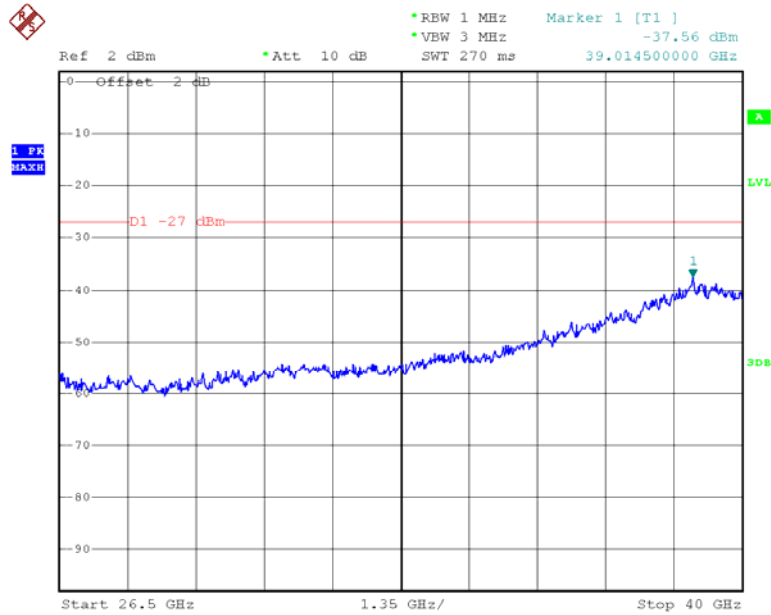


Date: 12.OCT.2013 09:46:55

Chain 1: 802.11ac20 Middle Channel 30M-1G

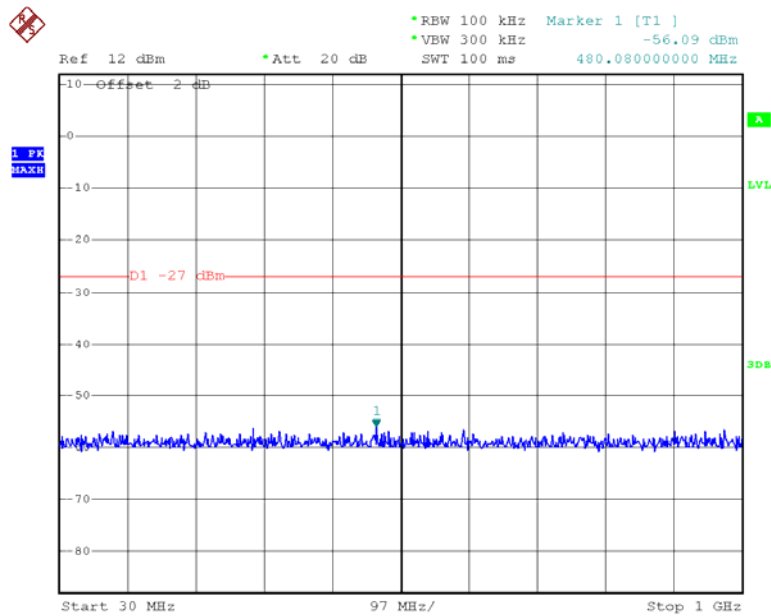


Date: 12.OCT.2013 09:51:01

Chain 1: 802.11ac20 Middle Channel 1G -26.5G

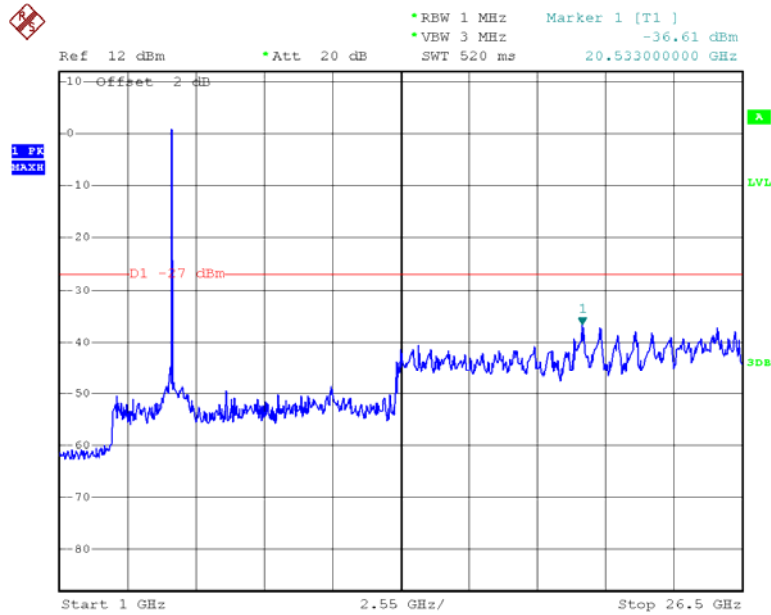


Date: 12.OCT.2013 09:51:34

Chain 1: 802.11ac20 Middle Channel 26.5-40G

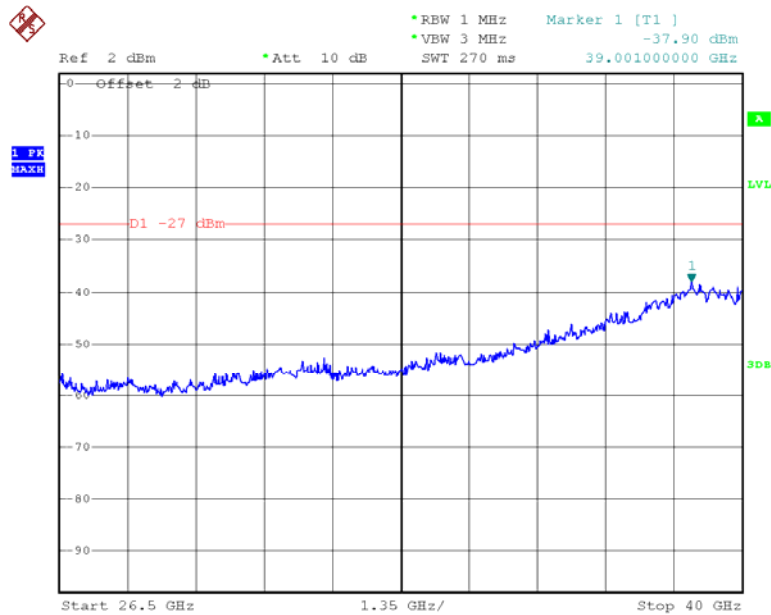


Date: 12.OCT.2013 09:51:59

Chain 1: 802.11ac20 High Channel 30M-1G

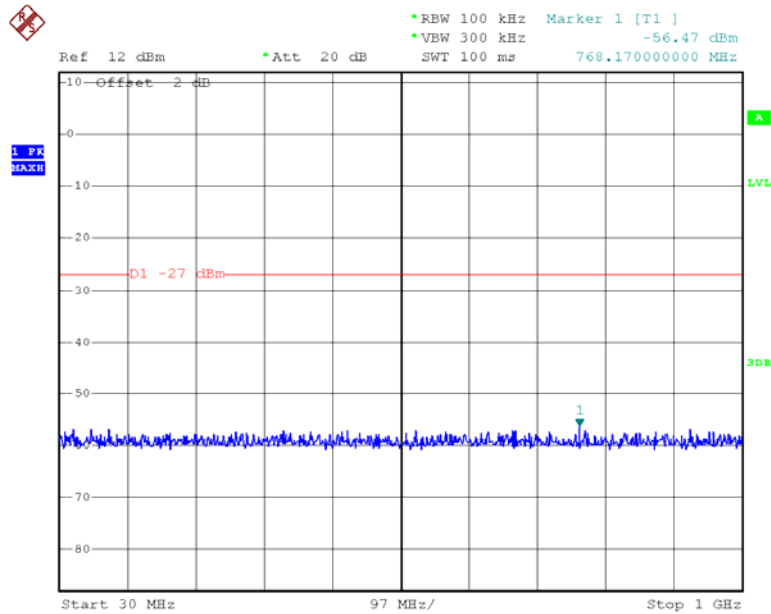


Date: 12.OCT.2013 09:57:58

Chain 1: 802.11ac20 High Channel 1G-26.5G

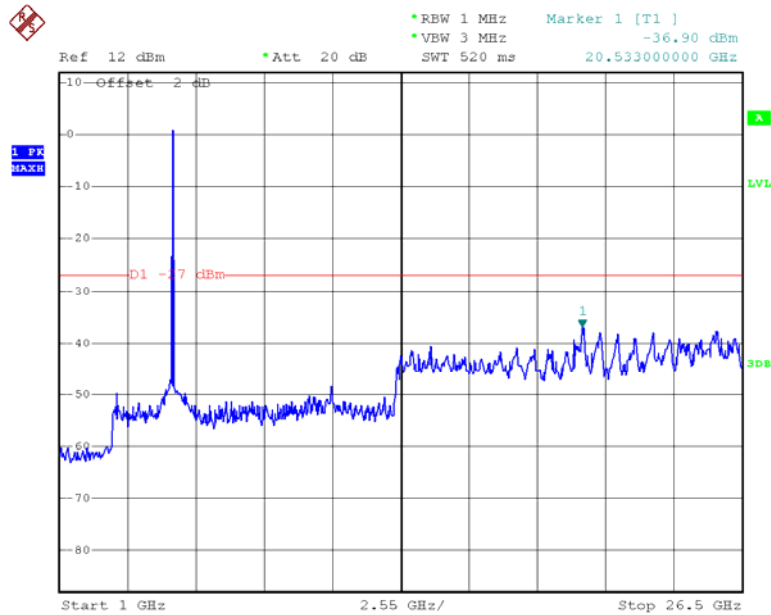


Date: 12.OCT.2013 09:58:24

Chain 1: 802.11ac20 High Channel 26.5-40G

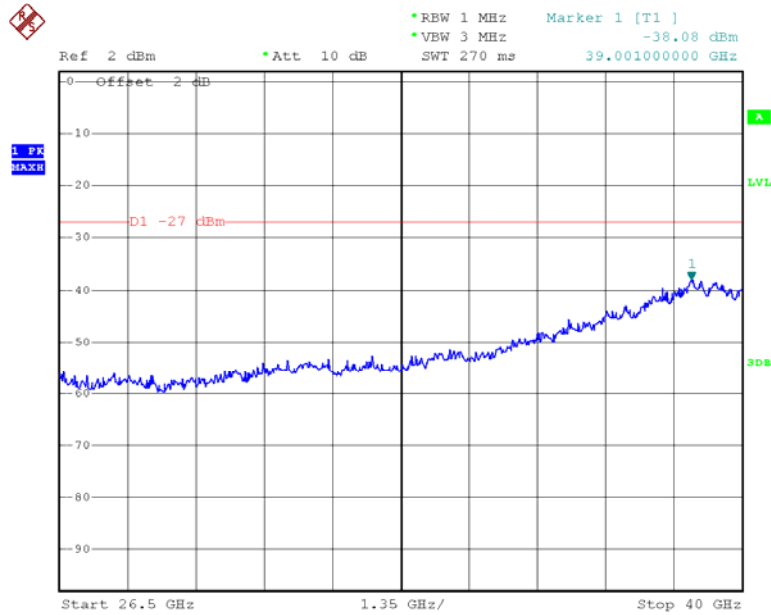


Date: 12.OCT.2013 09:59:05

Chain 0: 802.11ac40 Low Channel 30M-1G

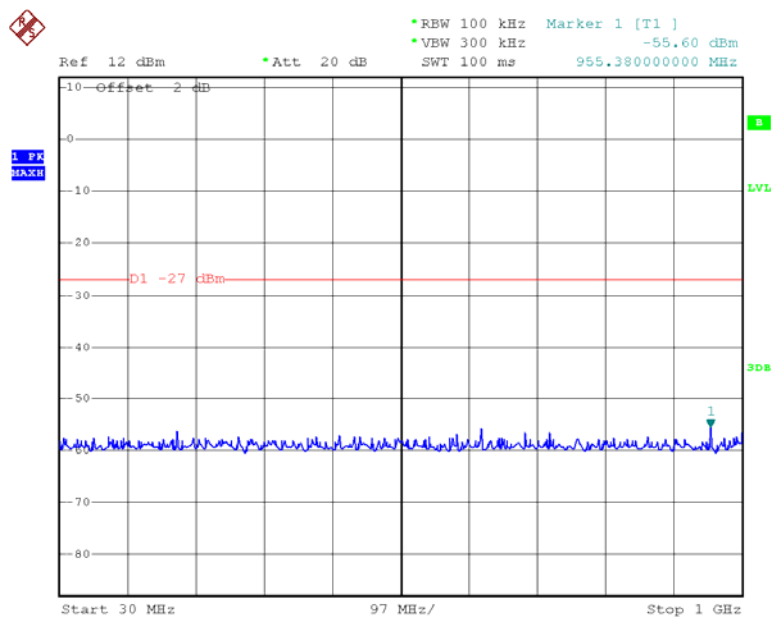


Date: 10.OCT.2013 20:06:30

Chain 0: 802.11ac40 Low Channel 1G-26.5G

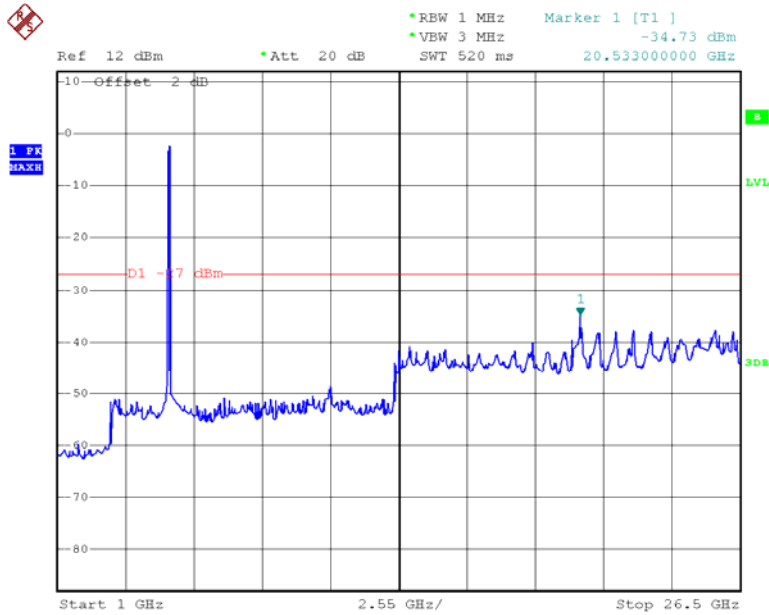


Date: 10.OCT.2013 20:07:00

Chain 0: 802.11ac40 Low Channel 26.5-40G

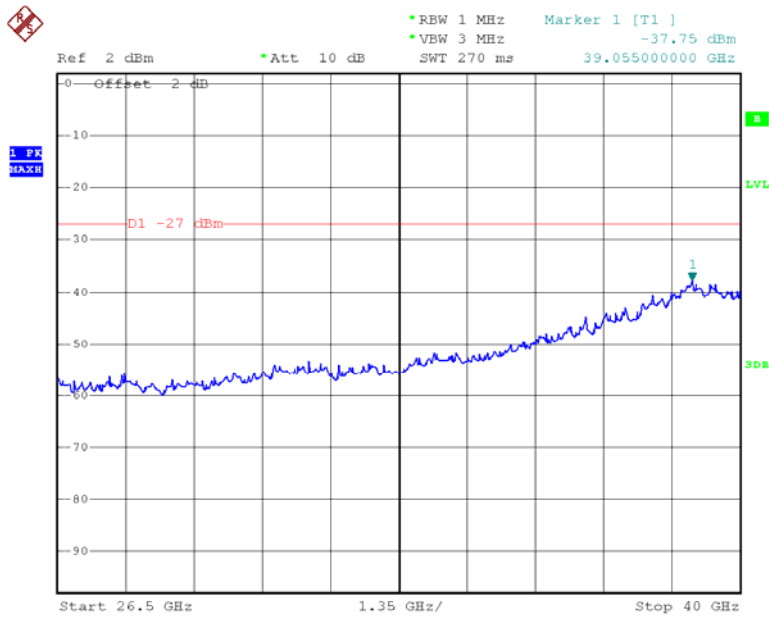


Date: 10.OCT.2013 20:07:40

Chain 0: 802.11ac40 High Channel 30M-1G

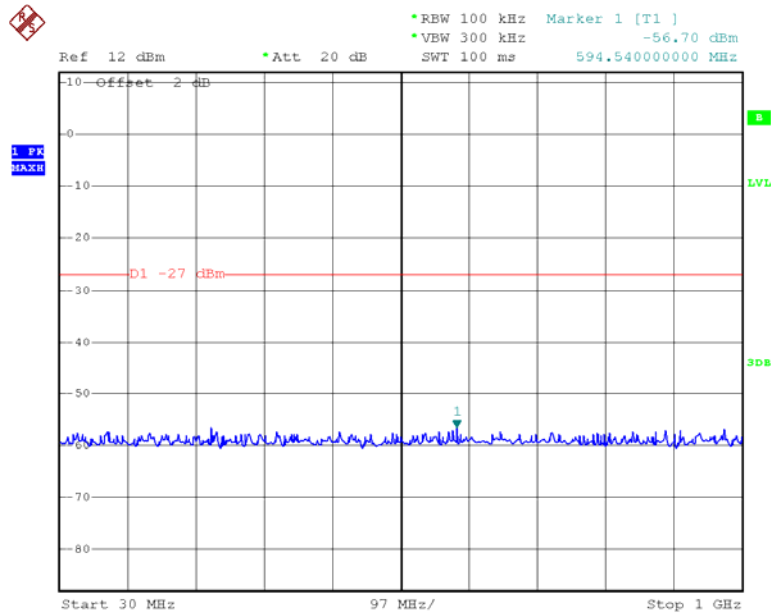


Date: 10.OCT.2013 20:11:34

Chain 0: 802.11ac40 High Channel 1G-26.5G

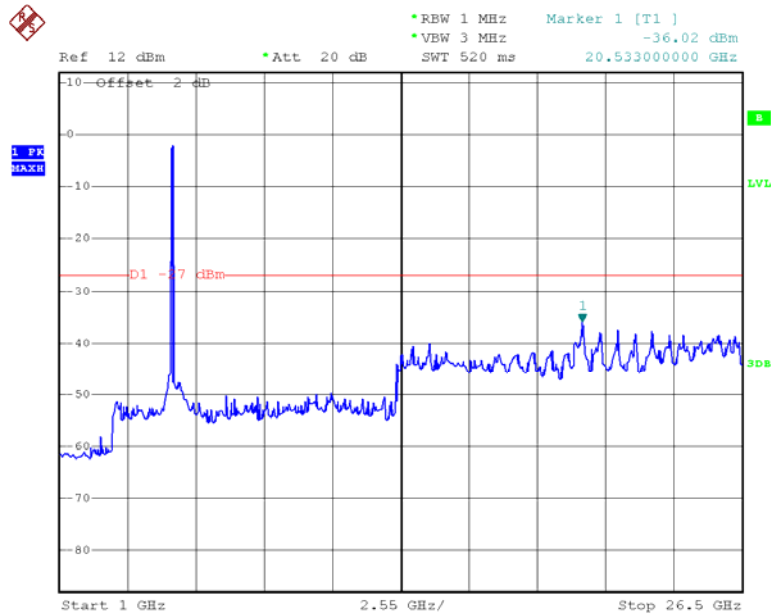


Date: 10.OCT.2013 20:15:46

Chain 0: 802.11ac40 High Channel 26.5-40G

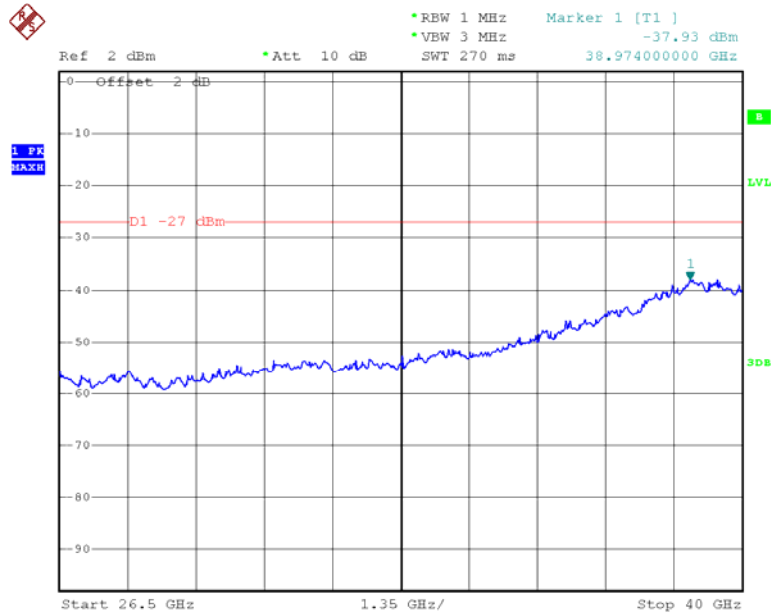


Date: 10.OCT.2013 20:08:33

Chain 1: 802.11ac40 Low Channel 30M-1G

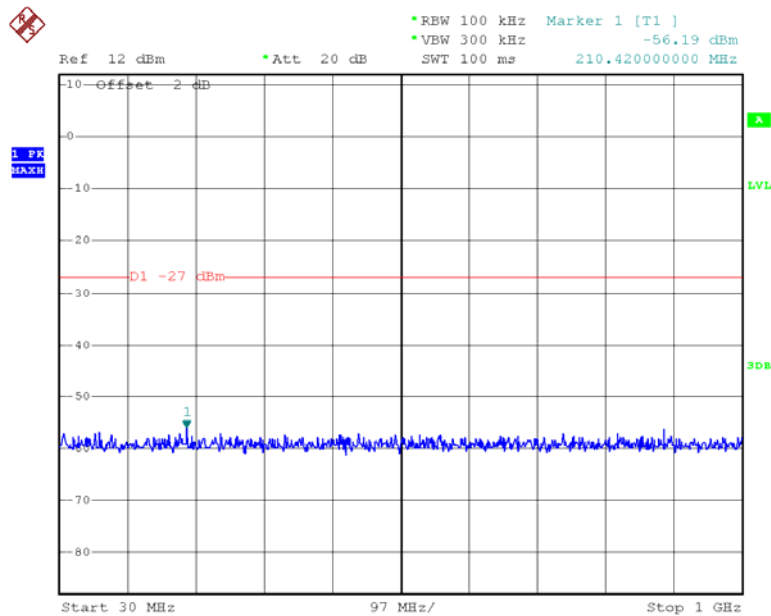


Date: 12.OCT.2013 10:07:42

Chain 1: 802.11ac40 Low Channel 1G-26.5G

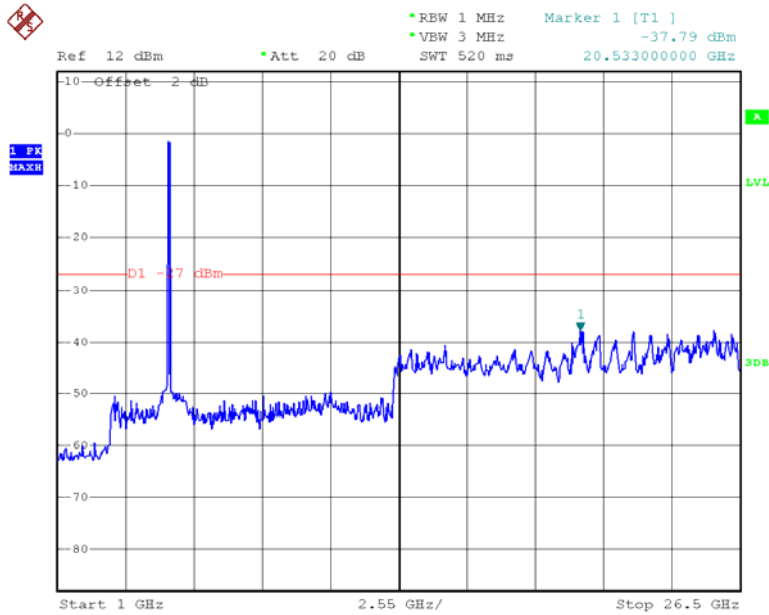


Date: 12.OCT.2013 10:08:05

Chain 1: 802.11ac40 Low Channel 26.5-40G

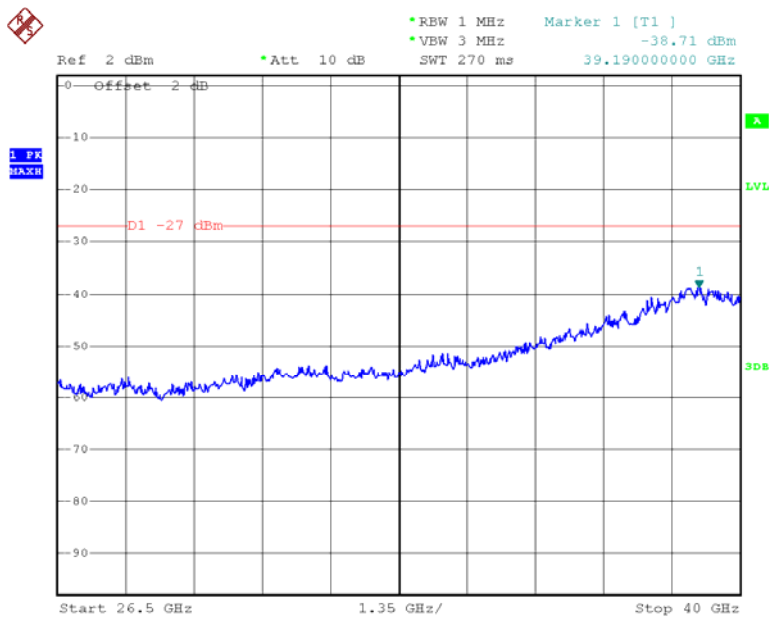


Date: 12.OCT.2013 10:08:26

Chain 1: 802.11ac40 High Channel 30M-1G

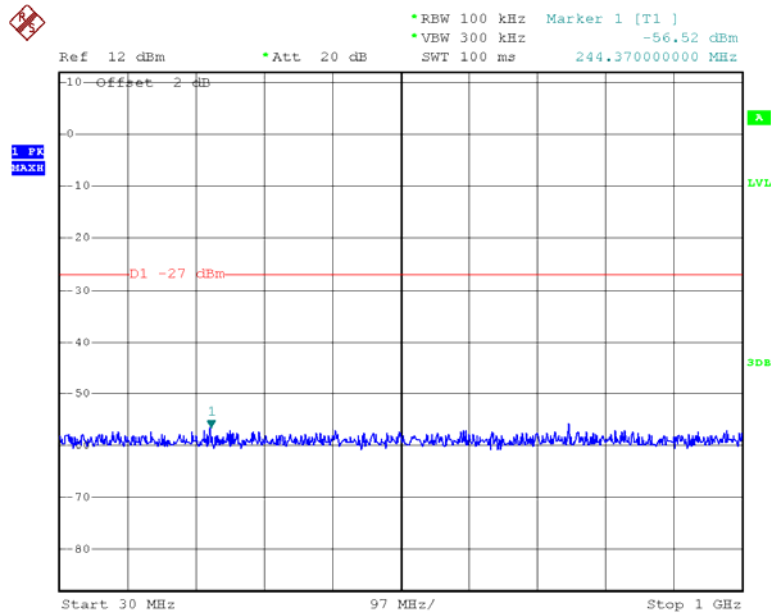


Date: 12.OCT.2013 10:16:16

Chain 1: 802.11ac40 High Channel 1G-26.5G

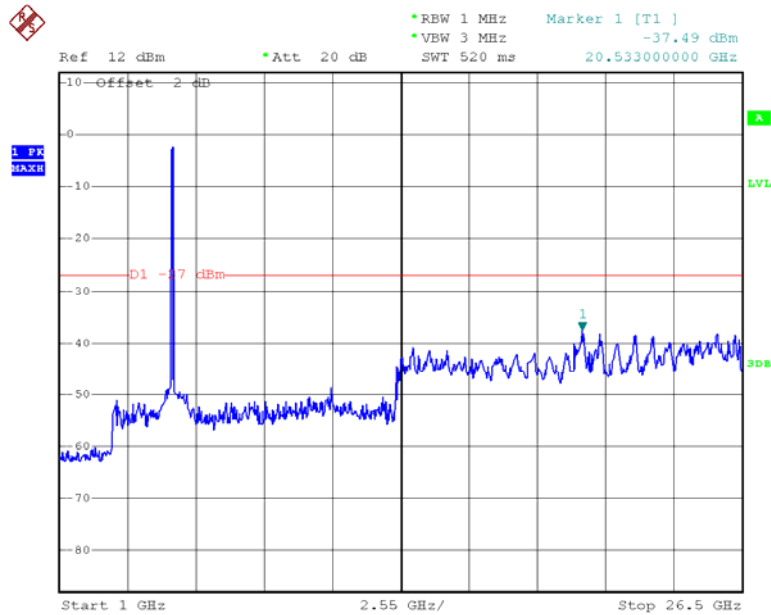


Date: 12.OCT.2013 10:16:39

Chain 1: 802.11ac40 High Channel 26.5-40G

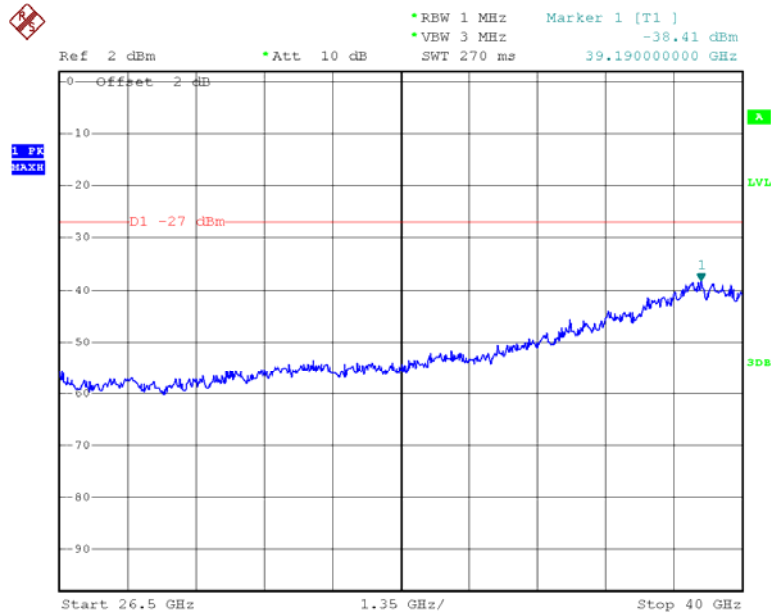


Date: 12.OCT.2013 10:17:04

Chain 0: 802.11ac80 Low Channel 30M-1G

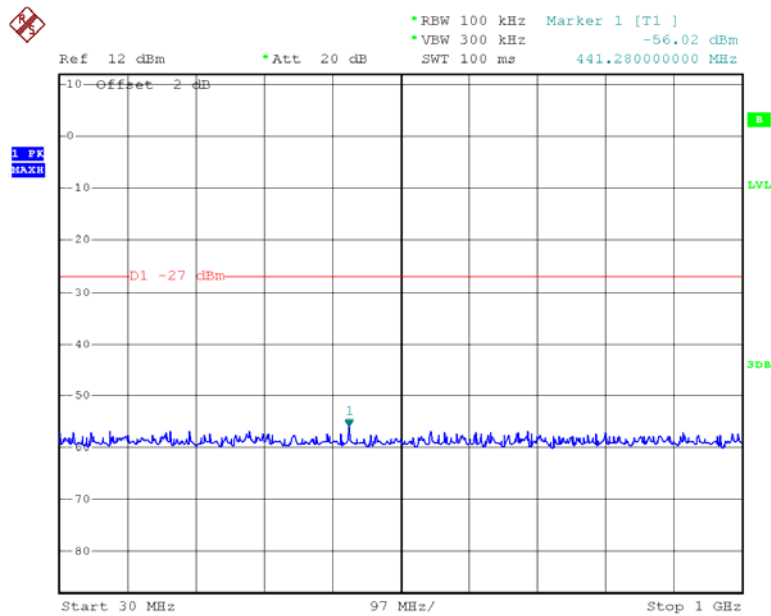


Date: 10.OCT.2013 20:38:18

Chain 0: 802.11ac80 Low Channel 1G-26.5G

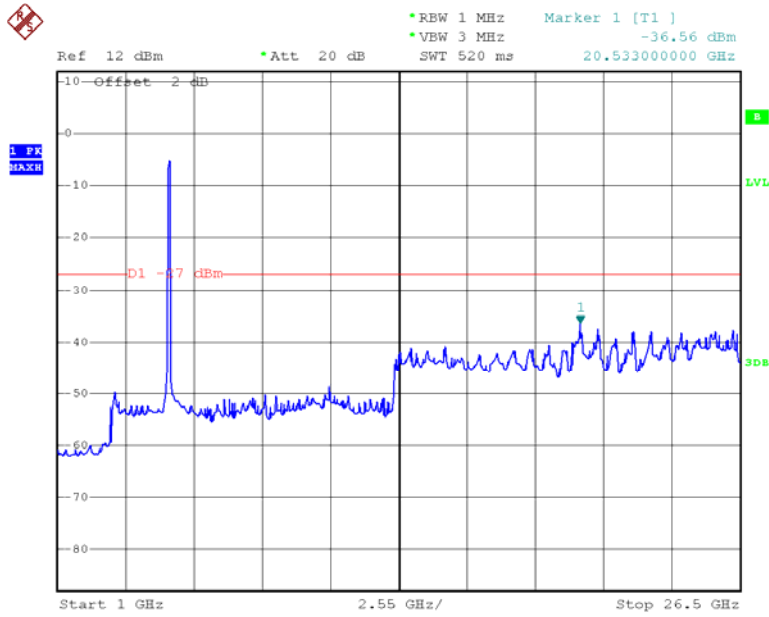


Date: 10.OCT.2013 20:39:05

Chain 0: 802.11ac80 Low Channel 26.5-40G

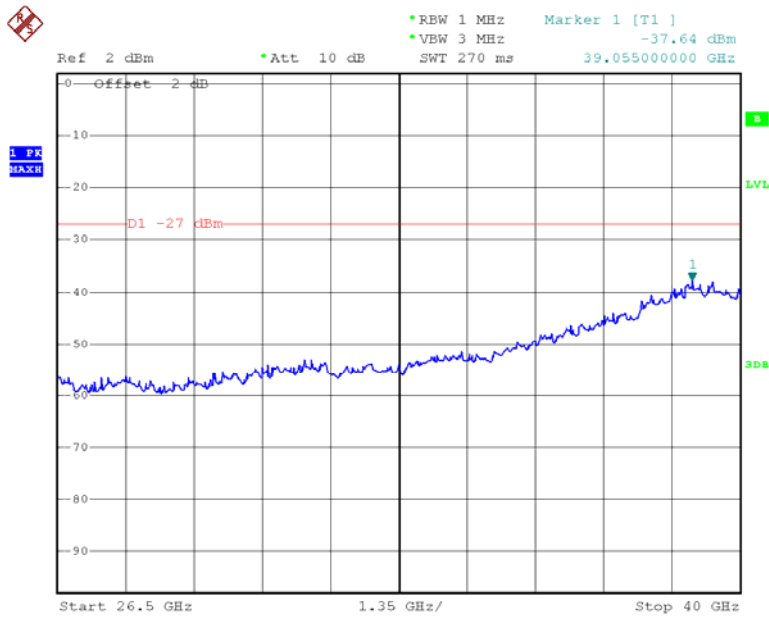


Date: 10.OCT.2013 20:39:52

Chain 1: 802.11ac80 Low Channel 30M-1G

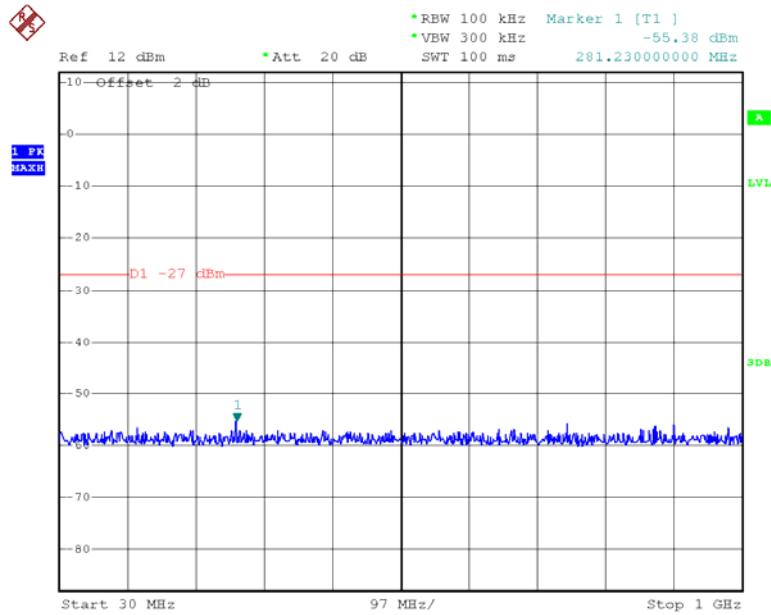


Date: 12.OCT.2013 10:56:07

Chain 1: 802.11ac80 Low Channel 1G-26.5G

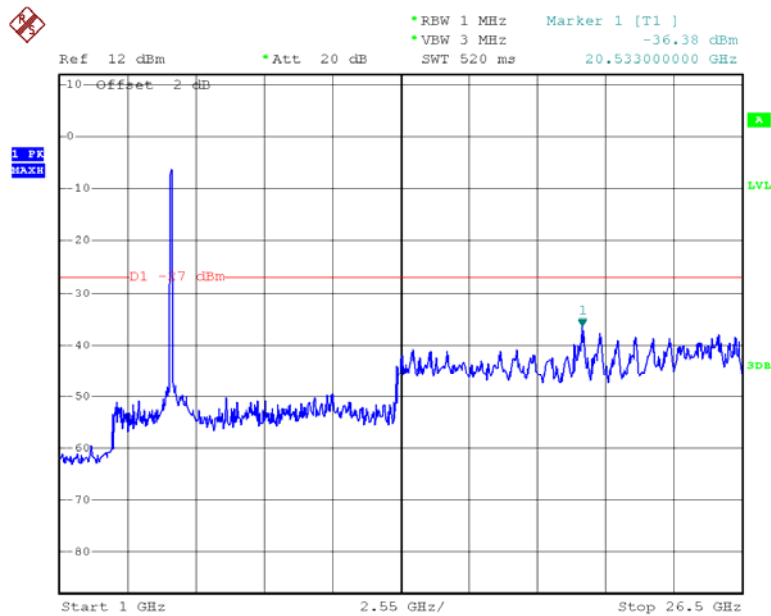

Date: 12.OCT.2013 10:56:35

Chain 1: 802.11ac80 Low Channel 26.5-40G

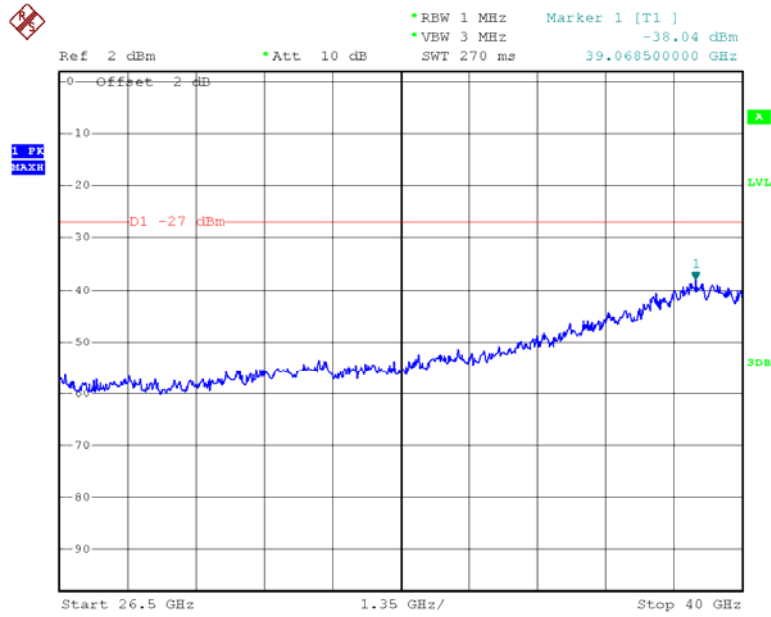

Date: 12.OCT.2013 10:56:58

FCC §15.407(b) (1) (2) (3) (4) – OUT OF BAND EMISSIONS

Applicable Standard

FCC §15.407 (b) (1), (2), (3), (4);

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band.

For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibration or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW to 3MHz of spectrum analyzer. Offset the antenna gain and cable loss.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4~28.6°C
Relative Humidity:	50~61 %
ATM Pressure:	100.3~100.8 kPa


The testing was performed by Leon Chen from 2013-09-30 to 2013-10-12.

Please refer to the following table and plots.

Test mode	Band Edge	Worst Reading Level (dBm)			Limit (dBm)	Result
		Chain0	Chain1	Chain0+1		
802.11a	Left	-42.05	/	/	-27	PASS
	Right	-41.48	/	/	-27	PASS
802.11n20	Left	-42.18	-41.19	-38.65	-27	PASS
	Right	-42.15	-41.92	-39.02	-27	PASS
802.11n40	Left	-42.99	-42.65	-39.81	-27	PASS
	Right	-42.65	-42.44	-39.53	-27	PASS
802.11ac20	Left	-42.18	-41.66	-38.9	-27	PASS
	Right	-41.06	-41.26	-38.15	-27	PASS
802.11ac40	Left	-42.01	-42.65	-39.31	-27	PASS
	Right	-41.57	-42.44	-38.97	-27	PASS
802.11ac80	Left	-41.46	-42.08	-38.75	-27	PASS
	Right	-41.55	-41.91	-38.72	-27	PASS


Note: the antenna gain is 1.5 dBi; the cable loss is 0.5 dB.

802.11a Band Edge, Left Side

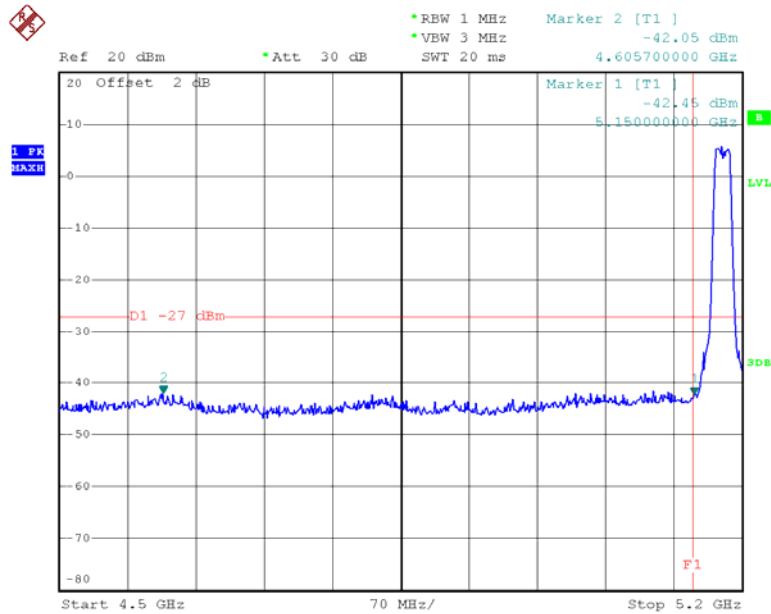


Date: 10.OCT.2013 11:38:16

802.11a Band Edge, Right Side

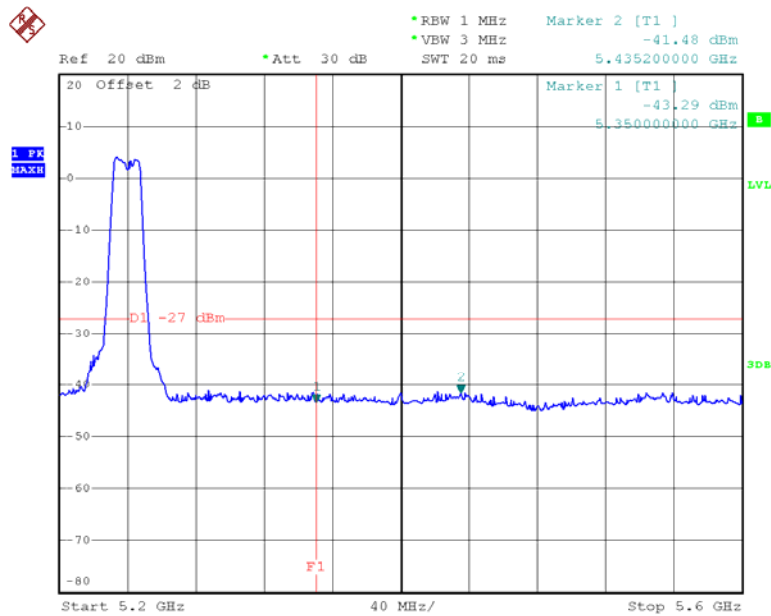


Date: 10.OCT.2013 09:24:26

Chain 0: 802.11n ht20 Band Edge, Left Side

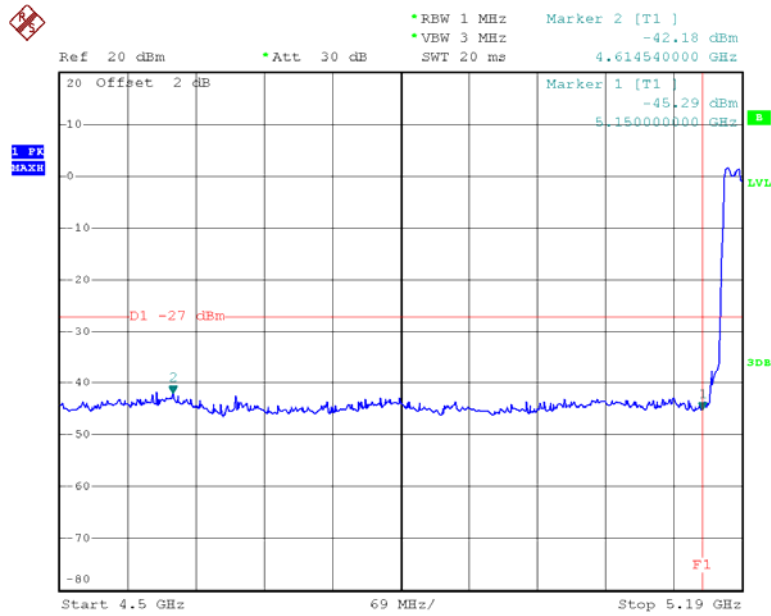


Date: 10.OCT.2013 09:40:42

Chain 0: 802.11n ht20 Band Edge, Right Side

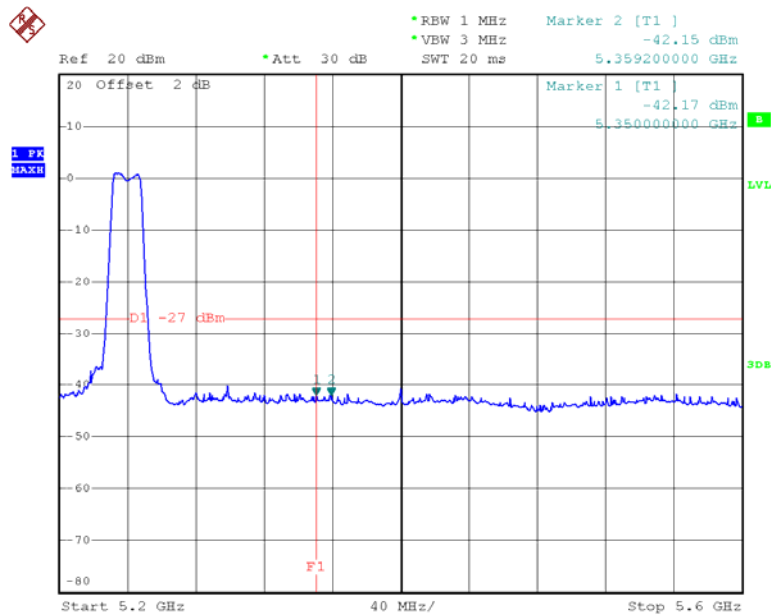


Date: 10.OCT.2013 10:08:45

Chain 1: 802.11n ht20 Band Edge, Left Side

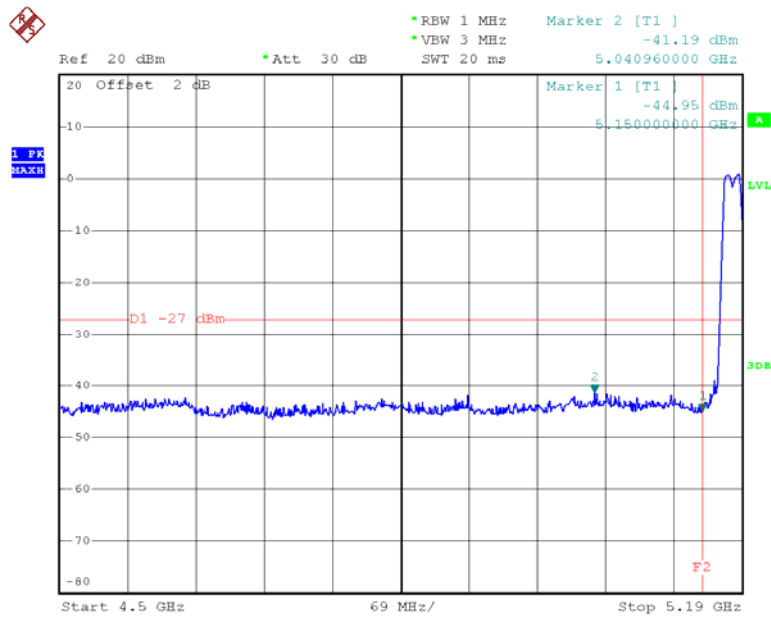


Date: 12.OCT.2013 09:22:39

Chain 1: 802.11n ht20 Band Edge, Right Side

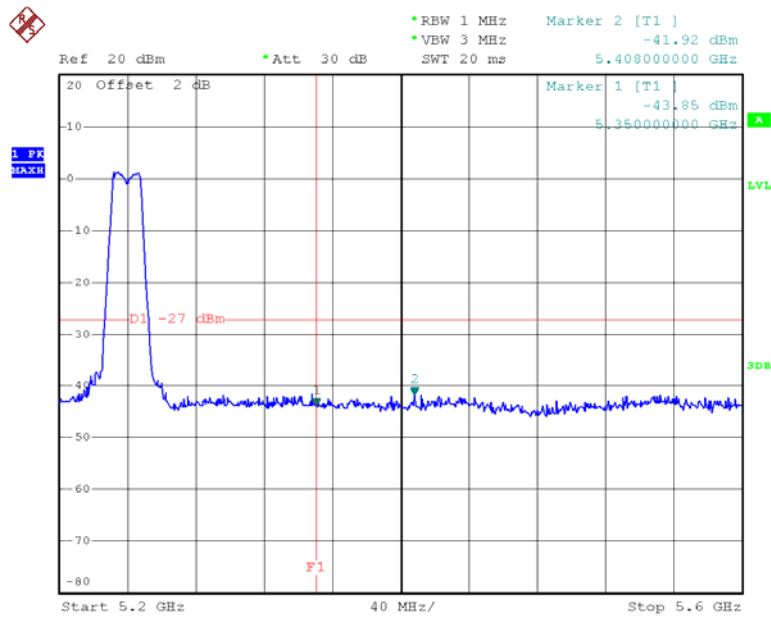


Date: 12.OCT.2013 09:36:49

Chain 0: 802.11n ht40 Band Edge, Left Side

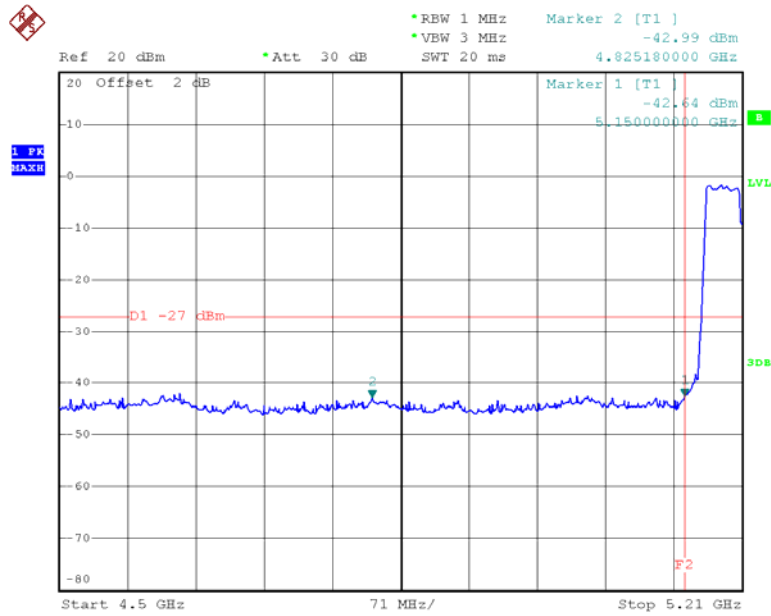


Date: 10.OCT.2013 19:40:47

Chain 0: 802.11n ht40 Band Edge, Right Side

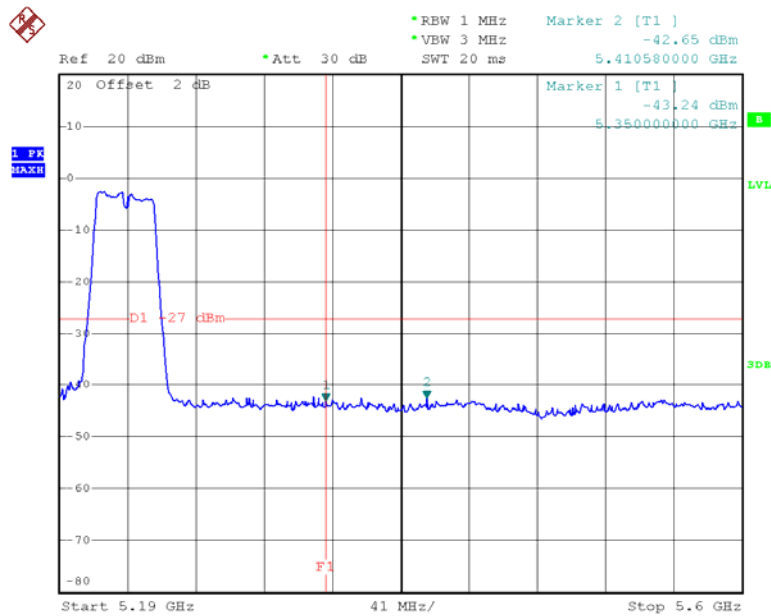


Date: 10.OCT.2013 19:48:41

Chain 1: 802.11n ht40 Band Edge, Left Side

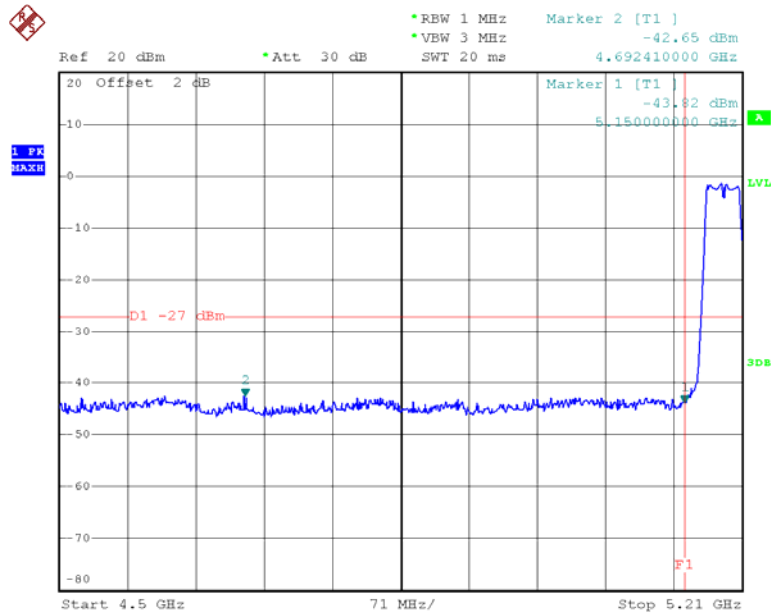


Date: 12.OCT.2013 10:07:15

Chain 1: 802.11n ht40 Band Edge, Right Side

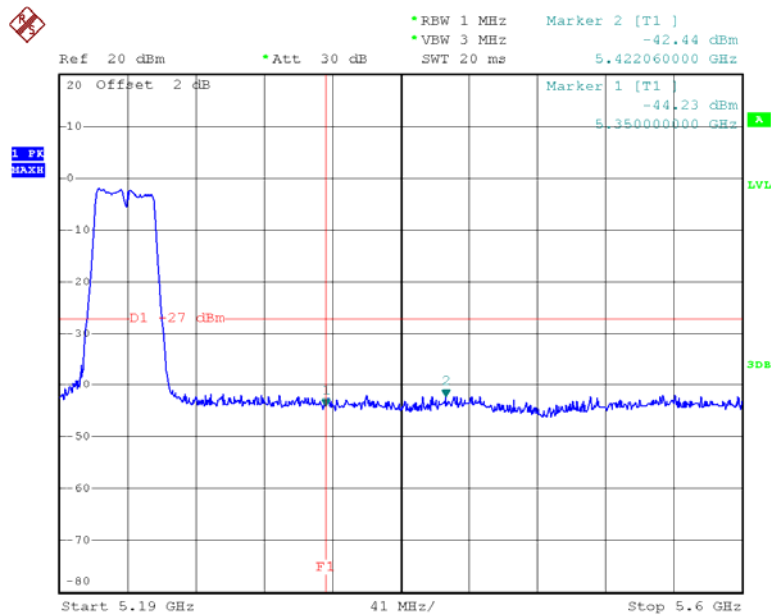


Date: 12.OCT.2013 10:15:45

Chain 0: 802.11ac20 Band Edge, Left Side

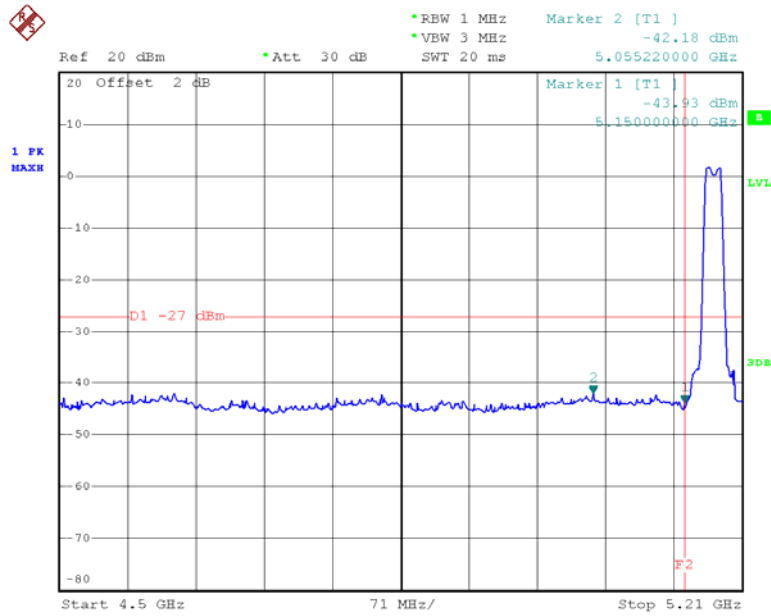


Date: 30.SEP.2013 10:25:12

Chain 0: 802.11ac20 Band Edge, Right Side

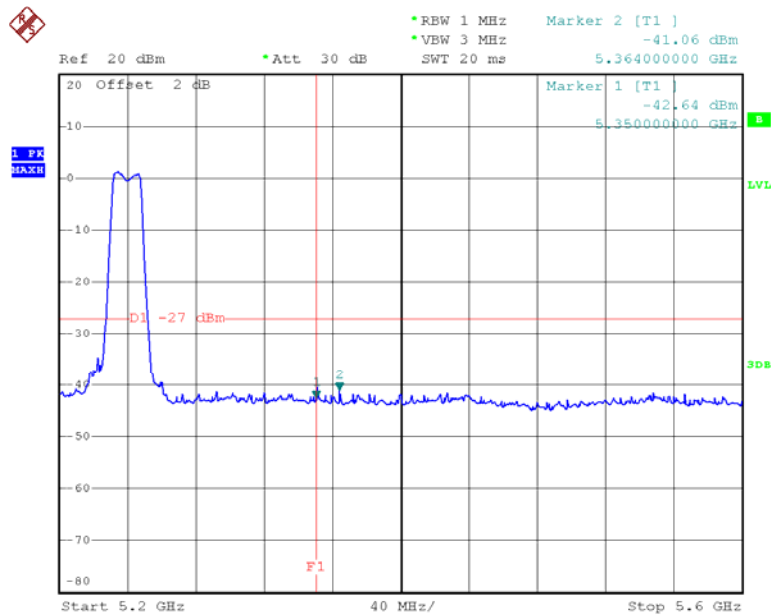


Date: 10.OCT.2013 11:33:07

Chain 1: 802.11ac20 Band Edge, Left Side

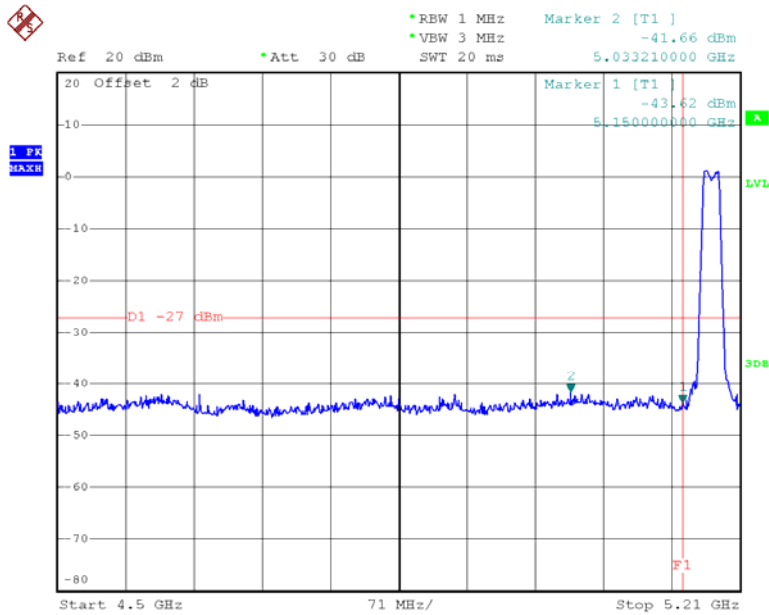


Date: 12.OCT.2013 09:45:28

Chain 1: 802.11ac20 Band Edge, Right Side

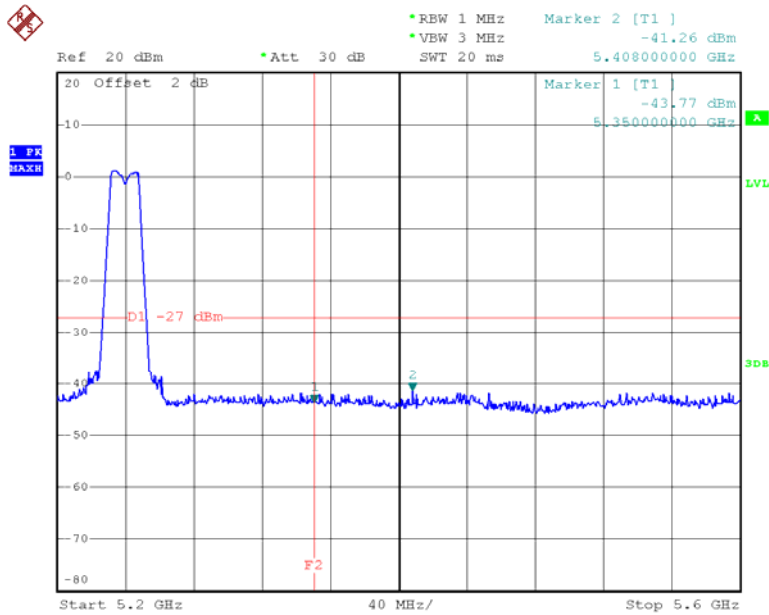


Date: 12.OCT.2013 09:57:07

Chain 0: 802.11ac40 Band Edge, Left Side

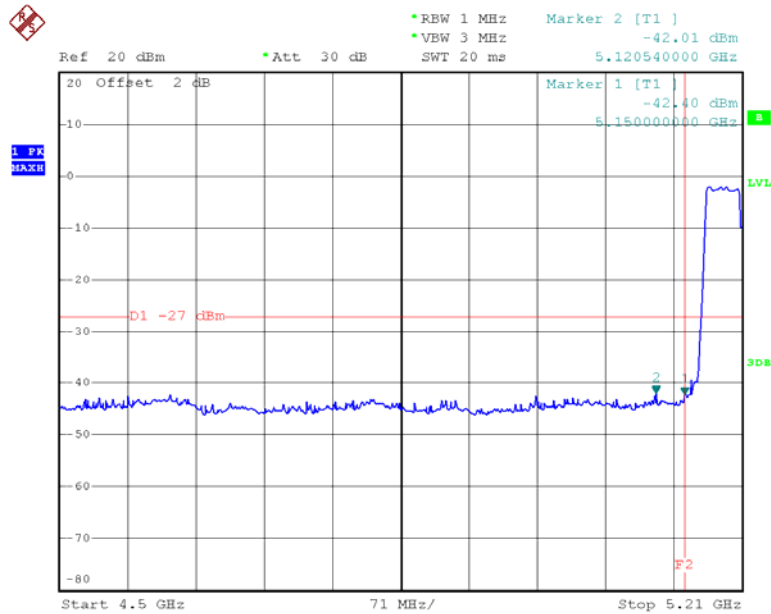


Date: 10.OCT.2013 20:05:32

Chain 0: 802.11ac40 Band Edge, Right Side

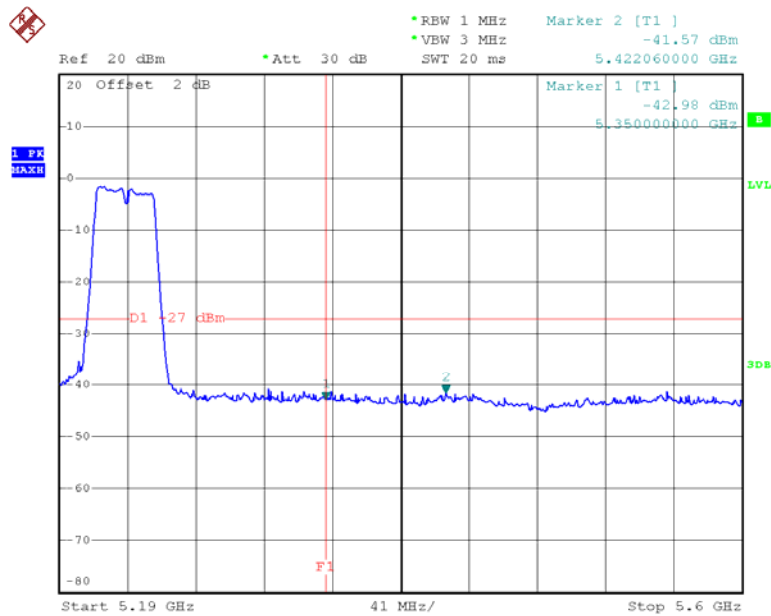


Date: 10.OCT.2013 20:14:45

Chain 1: 802.11ac40 Band Edge, Left Side

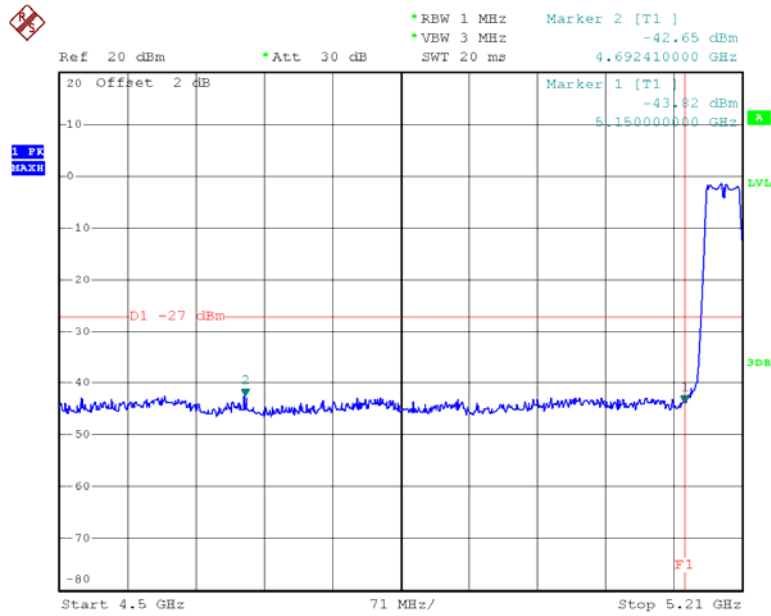


Date: 12.OCT.2013 10:07:15

Chain 1: 802.11ac40 Band Edge, Right Side

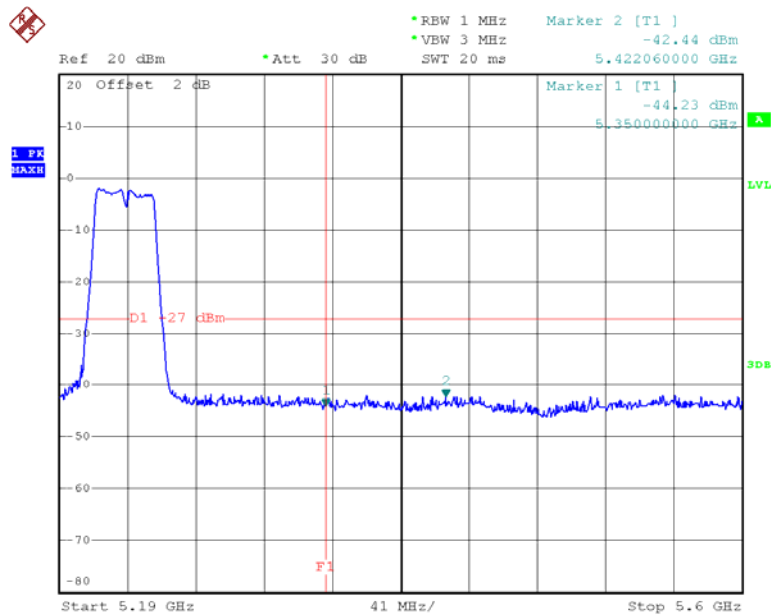


Date: 12.OCT.2013 10:15:45

Chain 0: 802.11ac80 Band Edge, Left Side

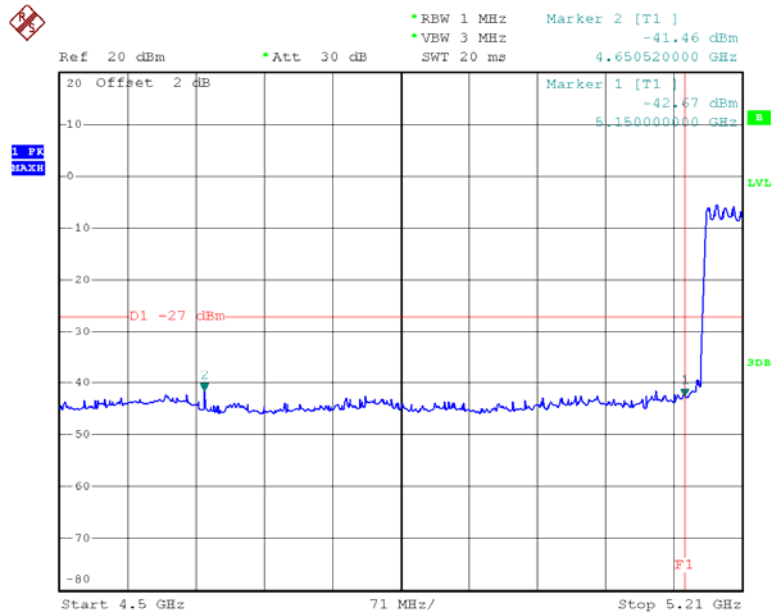


Date: 10.OCT.2013 20:33:39

Chain 0: 802.11ac80 Band Edge, Right Side

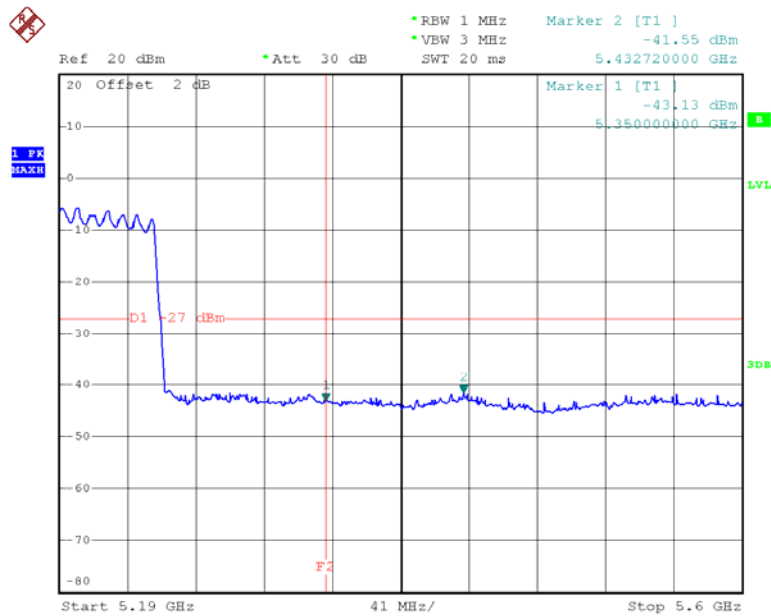


Date: 10.OCT.2013 20:35:16

Chain 1: 802.11ac80 Band Edge, Left Side

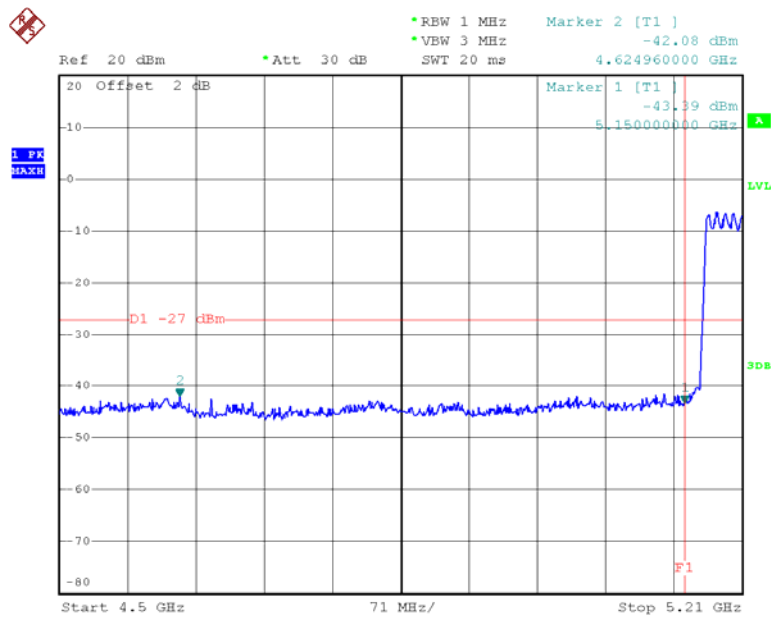

Date: 12.OCT.2013 10:54:48

Chain 1: 802.11ac80 Band Edge, Right Side

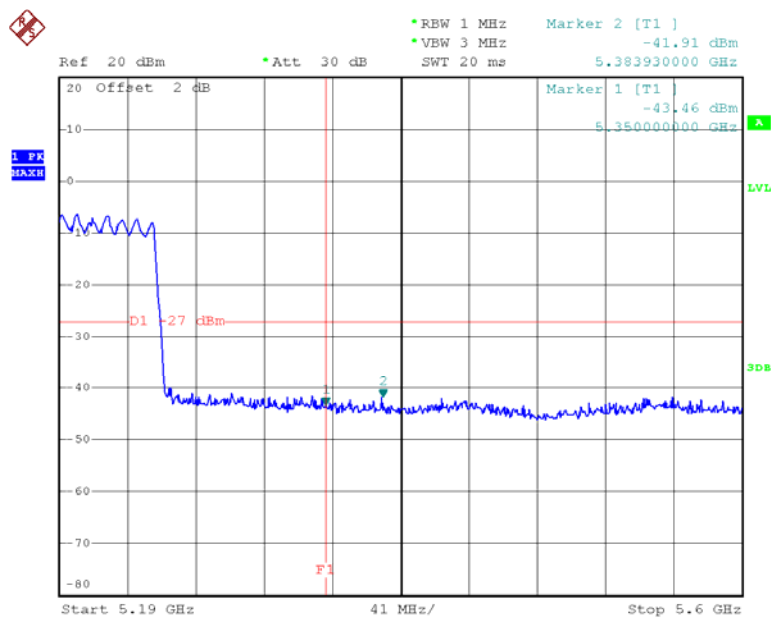

Date: 12.OCT.2013 10:55:23

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

6. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
7. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
8. Use a RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Use a peak detector. Do not use the Max Hold function. Rather, use the view button to capture the emission. Measure maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat, measurement as needed until the RBW/EBW ratio is approximately 1%.
9. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	27.4~28.6°C
Relative Humidity:	50~61 %
ATM Pressure:	100.3~100.8 kPa

The testing was performed by Leon Chen from 2013-09-30 to 2013-10-12.


Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting


Test mode	Channel	Frequency	26 dB Bandwidth (MHz)	
		(MHz)	Chain0	Chain1
802.11a	Low	5180	21.56	/
	Middle	5200	21.76	/
	High	5240	21.76	/
802.11n20	Low	5180	22.56	23.12
	Middle	5200	22.40	23.20
	High	5240	22.40	23.20
802.11n40	Low	5190	43.20	43.68
	High	5230	43.20	43.36
802.11ac20	Low	5180	22.40	23.00
	Middle	5200	22.64	23.20
	High	5240	22.40	23.20
802.11ac40	Low	5190	43.20	43.68
	High	5230	43.20	43.36
802.11ac80	Low	5210	85.44	85.60

802.11a Low Channel

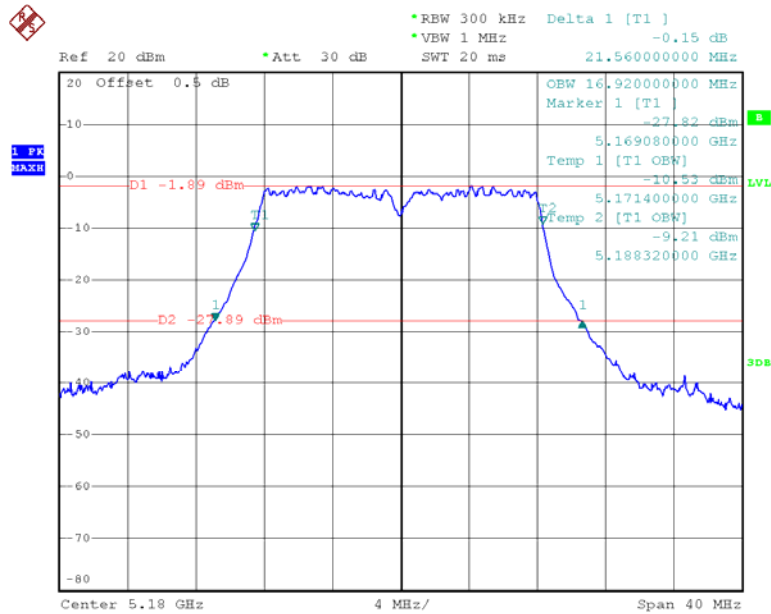


Date: 10.OCT.2013 11:33:33

802.11a Middle Channel

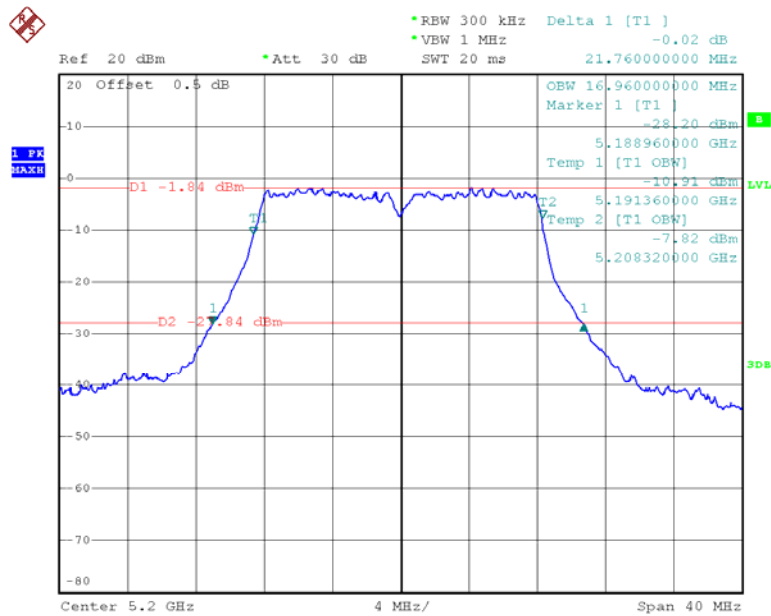


Date: 10.OCT.2013 09:07:39

802.11a High Channel

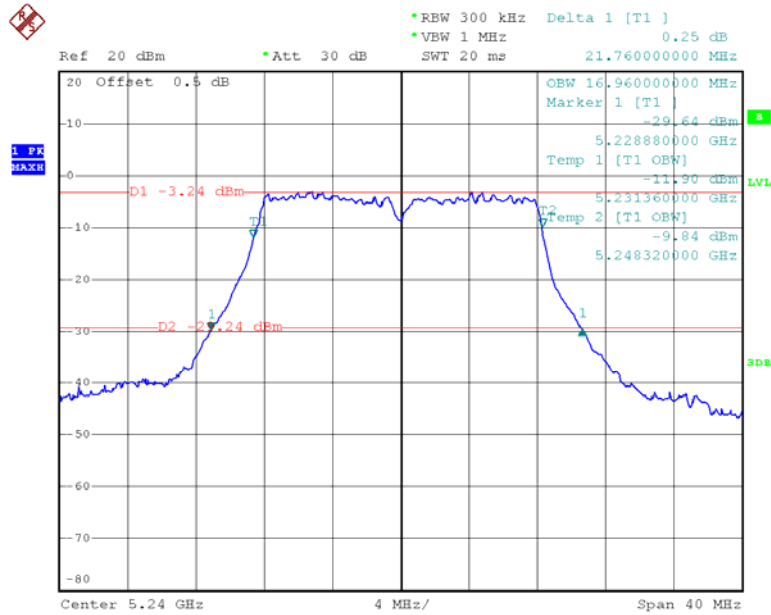


Date: 10.OCT.2013 09:18:23

Chain 0:802.11n20 Low Channel

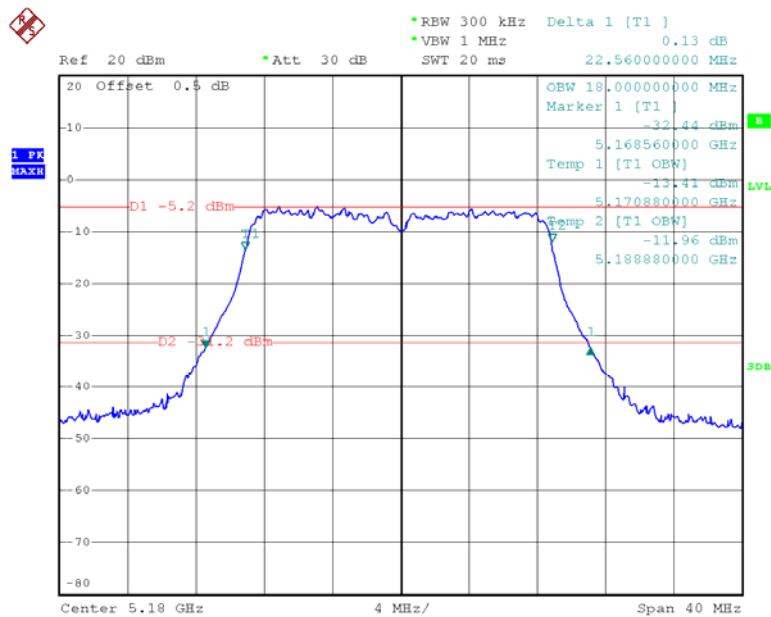


Date: 10.OCT.2013 09:35:03

Chain 0:802.11n20 Middle Channel

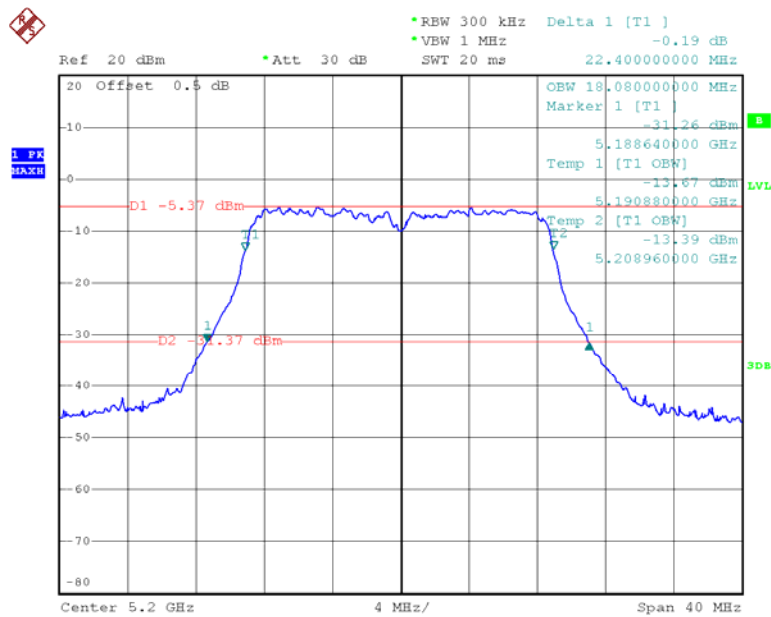


Date: 10.OCT.2013 09:47:45

Chain 0:802.11n20 High Channel

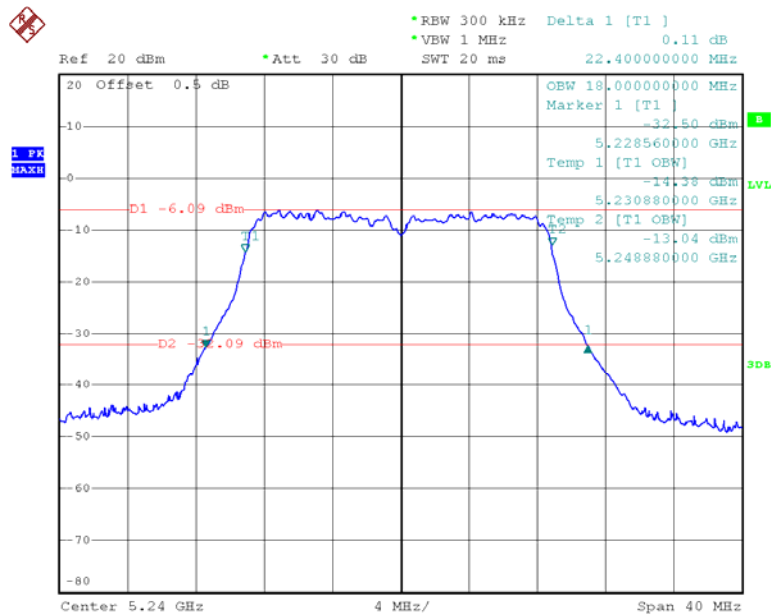


Date: 10.OCT.2013 10:02:55

Chain 1:802.11n20 Low Channel

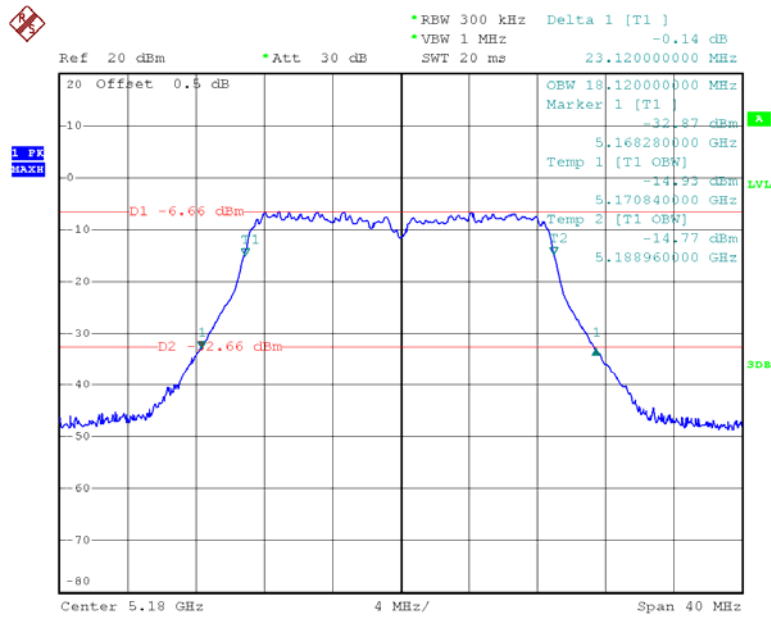


Date: 12.OCT.2013 09:13:45

Chain 1:802.11n20 Middle Channel

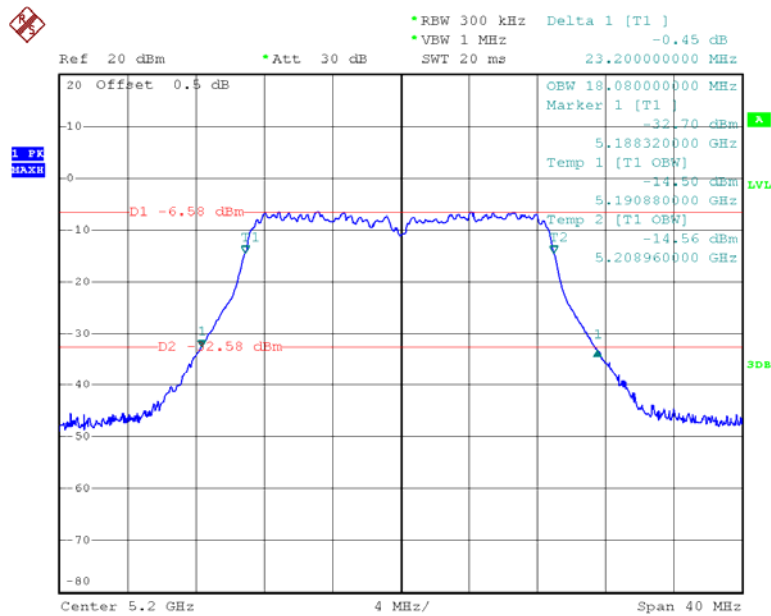


Date: 12.OCT.2013 09:27:15

Chain 1:802.11n20 High Channel

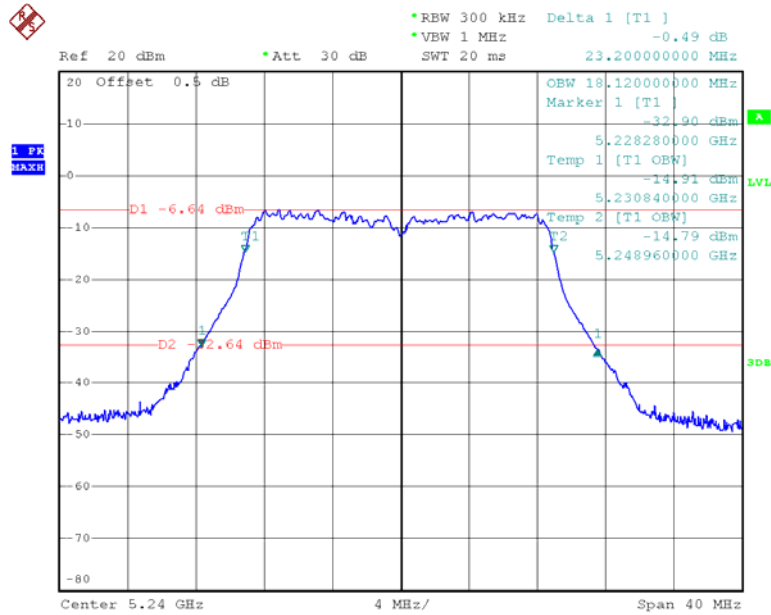


Date: 12.OCT.2013 09:33:03

Chain 0:802.11n40 Low Channel

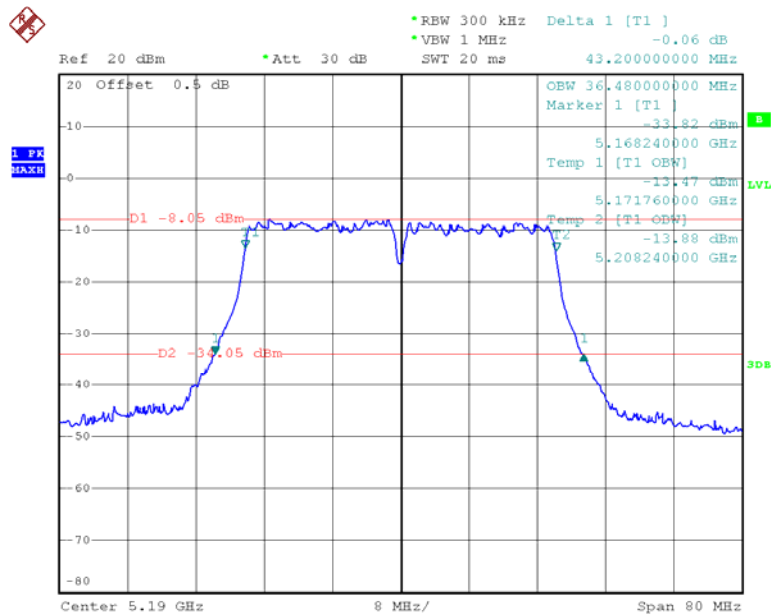


Date: 10.OCT.2013 19:36:00

Chain 0:802.11n40 High Channel

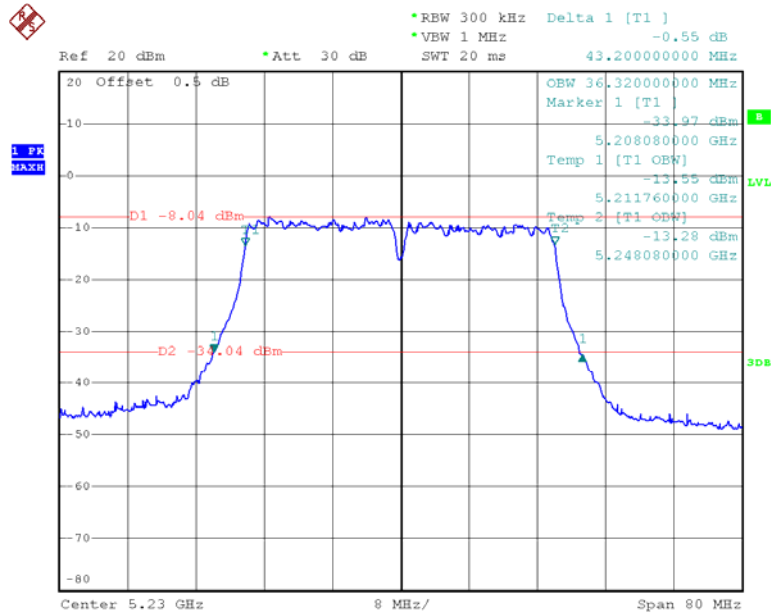


Date: 10.OCT.2013 19:51:00

Chain 1:802.11n40 Low Channel

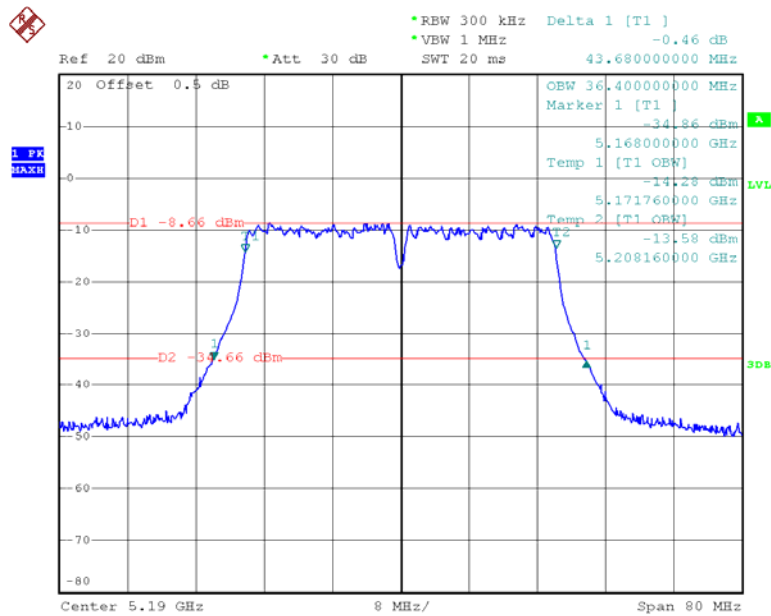


Date: 12.OCT.2013 10:04:11

Chain 1:802.11n40 High Channel

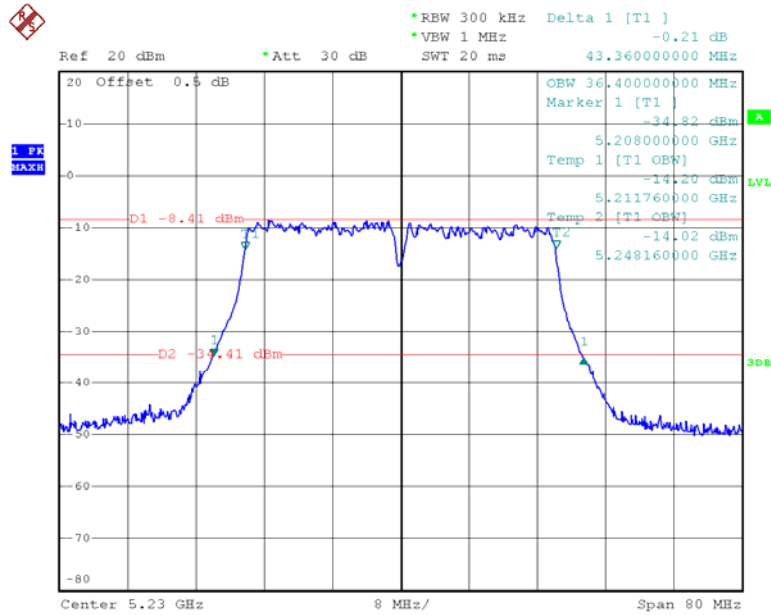


Date: 12.OCT.2013 10:10:45

Chain 0:802.11ac20 Low Channel

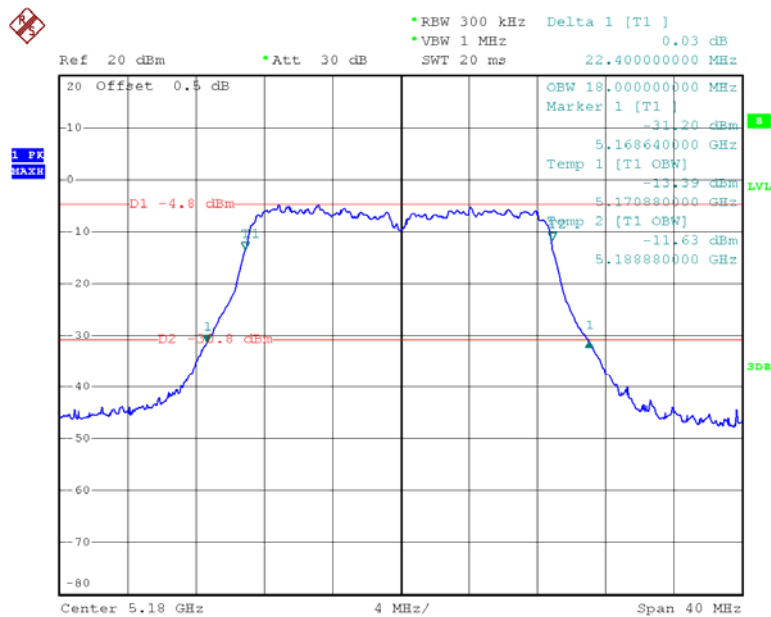


Date: 30.SEP.2013 10:19:54

Chain 0:802.11ac20 Middle Channel

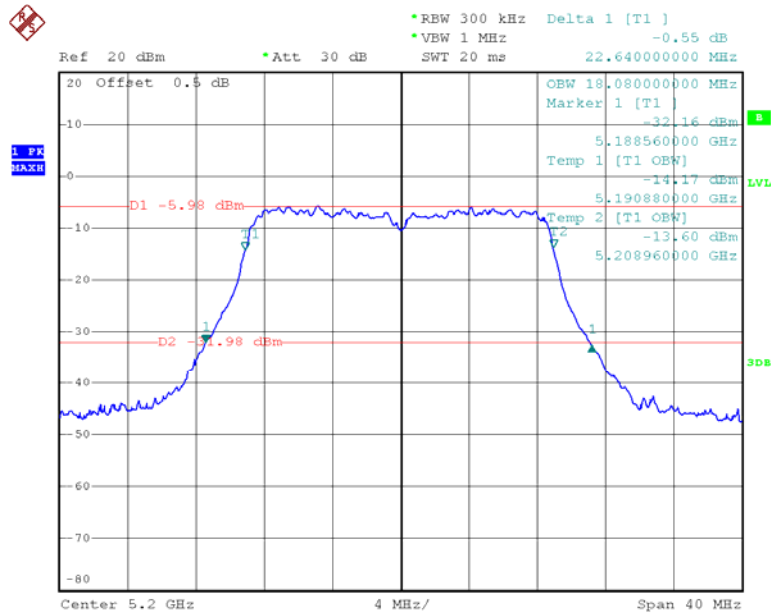


Date: 10.OCT.2013 11:02:45

Chain 0:802.11ac20 High Channel

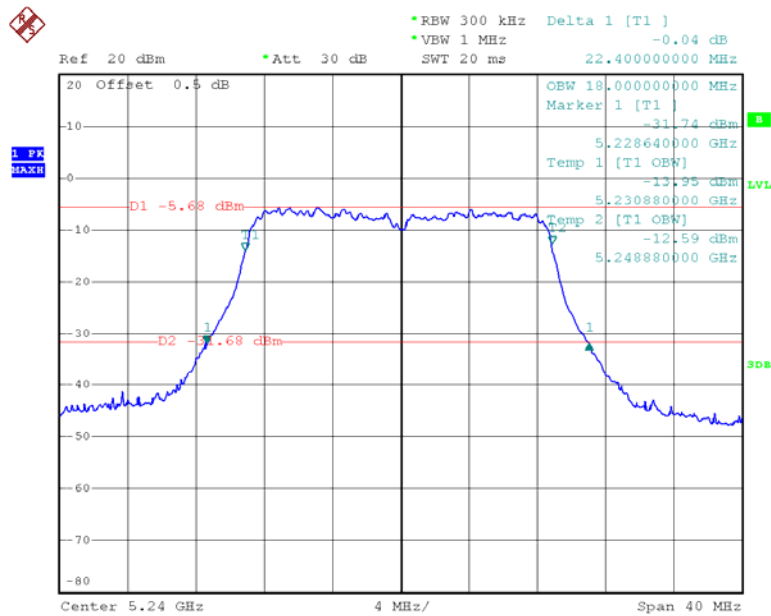


Date: 10.OCT.2013 11:26:50

Chain 1:802.11ac20 Low Channel

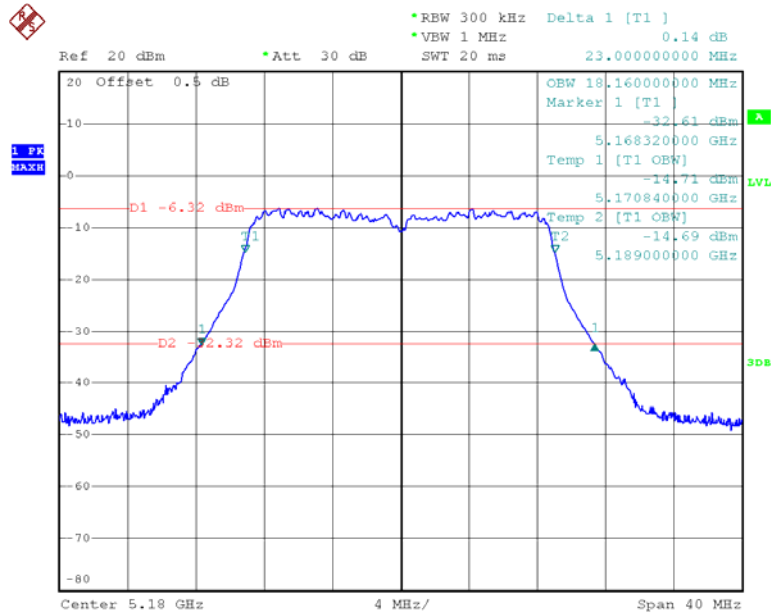


Date: 12.OCT.2013 09:41:39

Chain 1:802.11ac20 Middle Channel

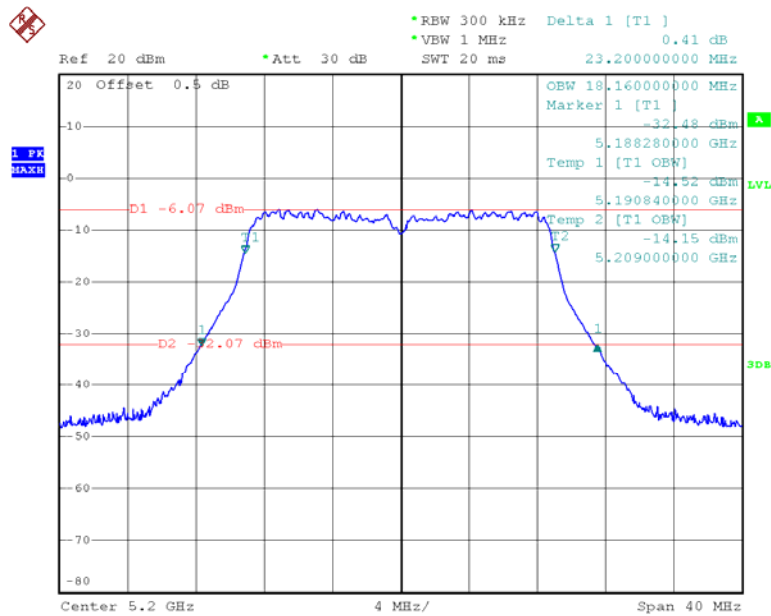


Date: 12.OCT.2013 09:48:29

Chain 1:802.11ac20 High Channel

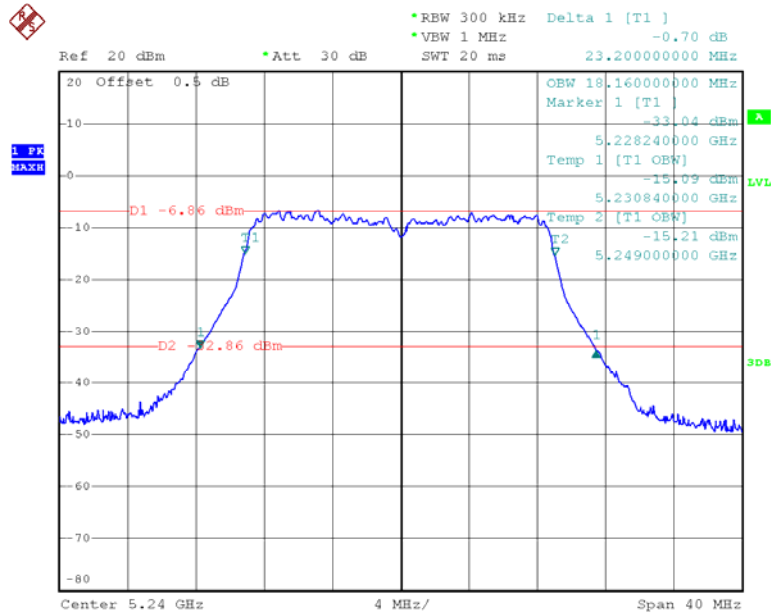


Date: 12.OCT.2013 09:53:59

Chain 0:802.11ac40 Low Channel

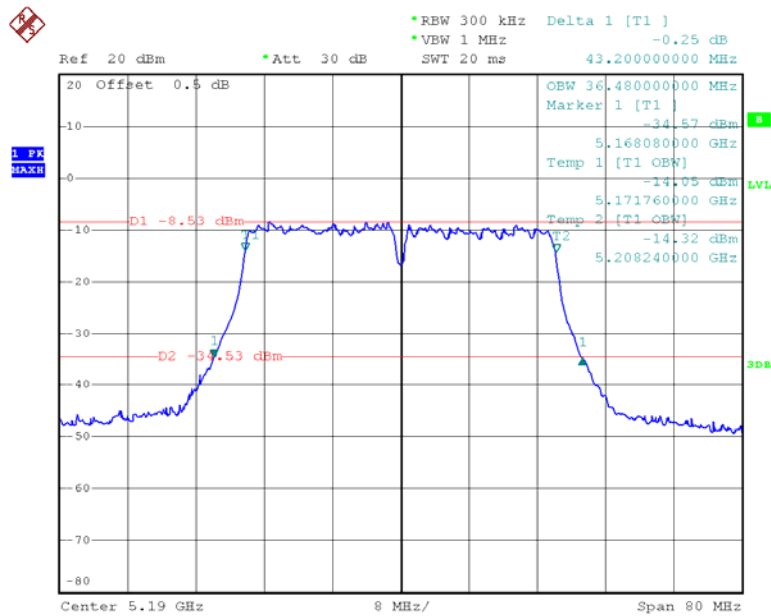


Date: 10.OCT.2013 19:59:50

Chain 0:802.11ac40 High Channel

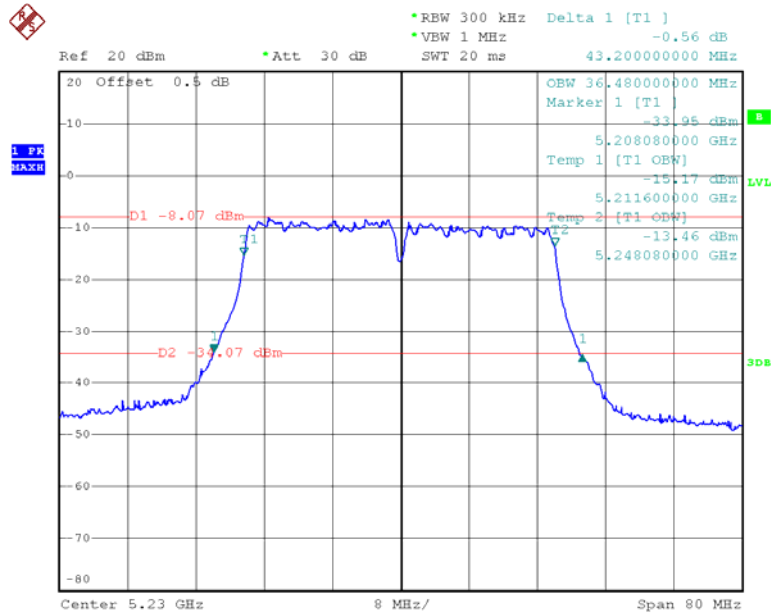


Date: 10.OCT.2013 20:17:28

Chain 1:802.11ac40 Low Channel

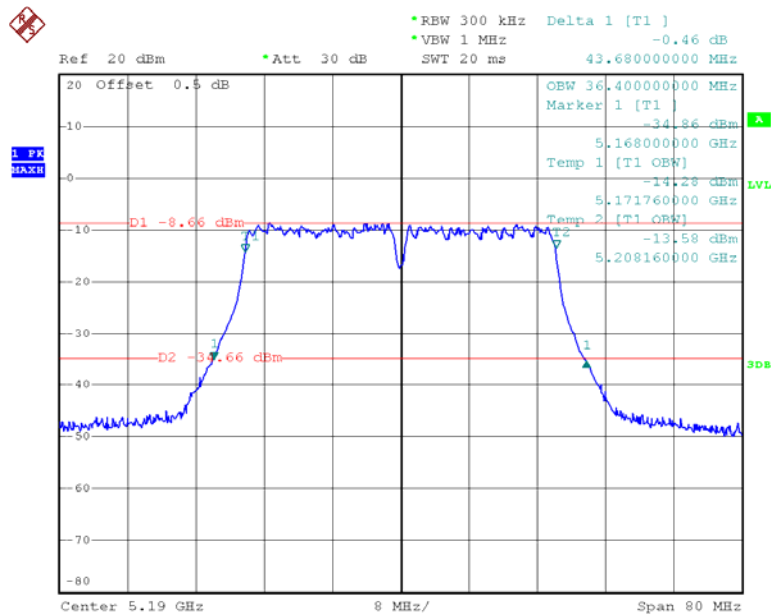


Date: 12.OCT.2013 10:04:11

Chain 1:802.11ac40 High Channel

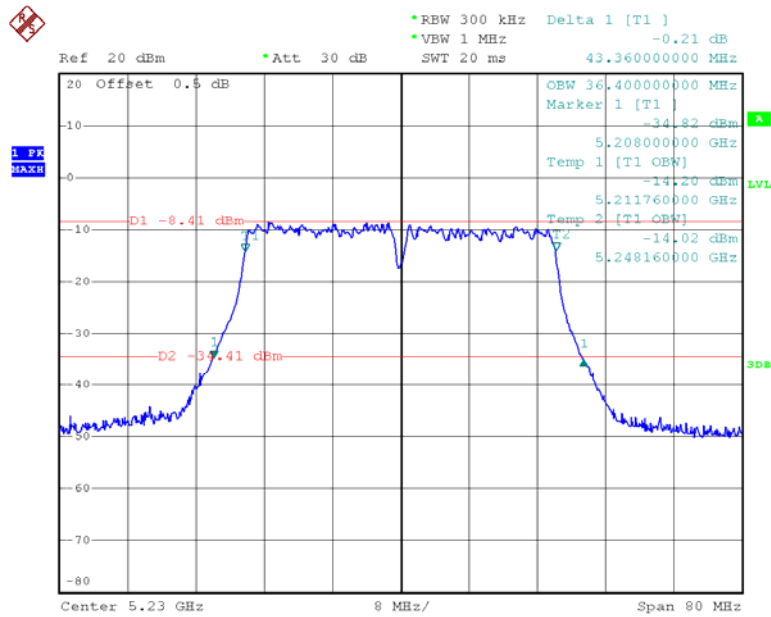


Date: 12.OCT.2013 10:10:45

Chain 0:802.11ac80 Low Channel

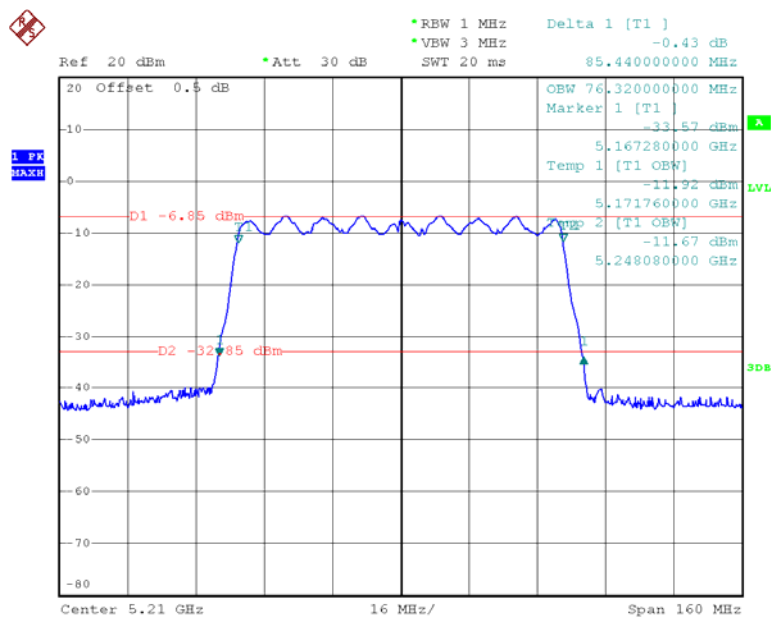

Date: 10.OCT.2013 13:19:04

Chain 1:802.11ac80 Low Channel

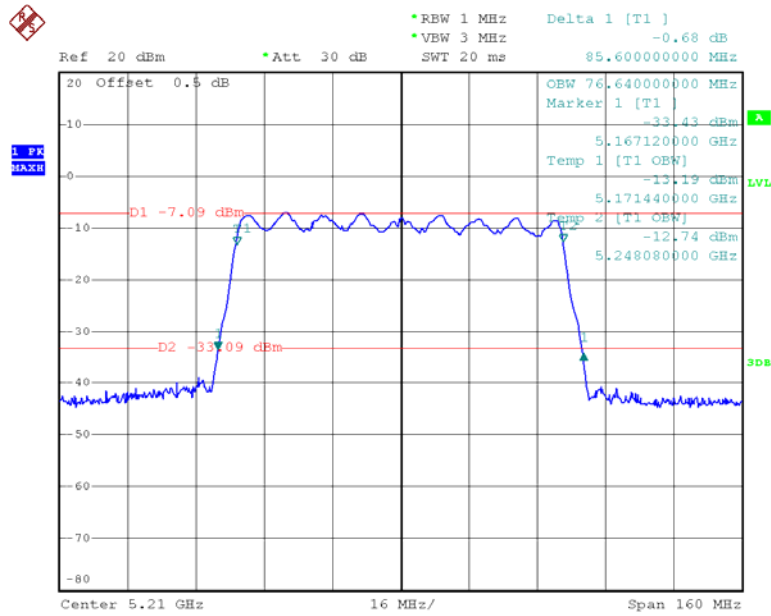

Date: 10.OCT.2013 13:24:54

FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set span to encompass the entire emission bandwidth (EBW) of the signal. Set RBW = 1 MHz. Set VBW \geq 3 MHz. Use sample detector mode Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions


Temperature:	27.4~28.6°C
Relative Humidity:	50~61 %
ATM Pressure:	100.3~100.8 kPa

The testing was performed by Leon Chen from 2013-09-30 to 2013-10-12.

Test Mode: Transmitting


Test mode	Channel	Conducted Output Power (dBm)			Limit (dBm)	Result
		Chain0	Chain1	Chain0+1		
802.11a	Low	13.51	/	13.51	17	PASS
	Middle	12.7	/	12.7	17	PASS
	High	12.28	/	12.28	17	PASS
802.11n20	Low	10.17	10.31	13.25	17	PASS
	Middle	10.11	10.03	13.08	17	PASS
	High	9.84	10.11	12.99	17	PASS
802.11n40	Low	10.09	10.46	13.29	17	PASS
	High	10	10.03	13.03	17	PASS
802.11ac20	Low	10.17	10.03	13.11	17	PASS
	Middle	10.08	10.02	13.06	17	PASS
	High	9.87	10.01	12.95	17	PASS
802.11ac40	Low	9.88	10.46	13.19	17	PASS
	High	9.97	10.03	13.01	17	PASS
802.11ac80	Low	7.41	7.14	10.29	17	PASS

802.11a RF Output Power, Low Channel

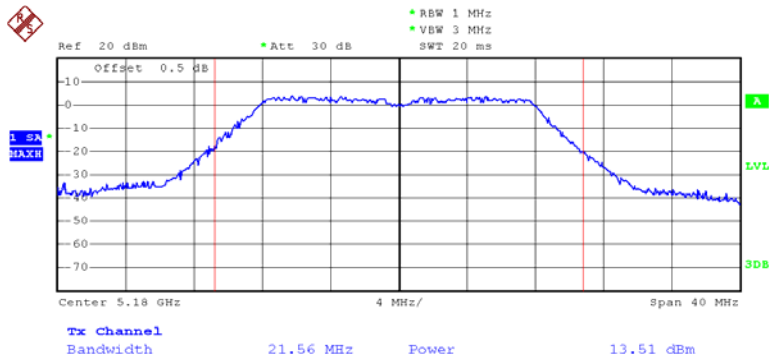


Date: 10.OCT.2013 11:34:43

802.11a RF Output Power, Middle Channel

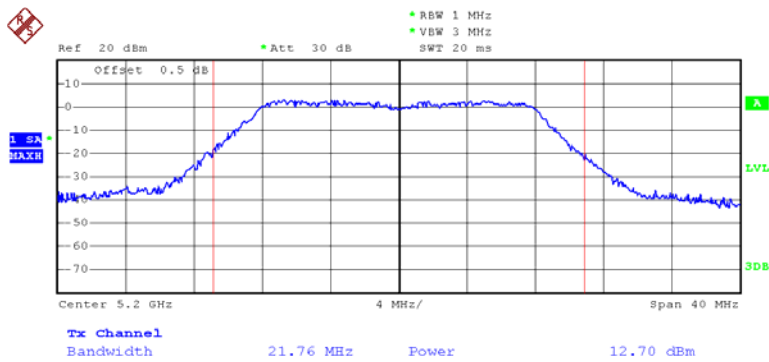


Date: 10.OCT.2013 09:09:05

802.11a RF Output Power, High Channel

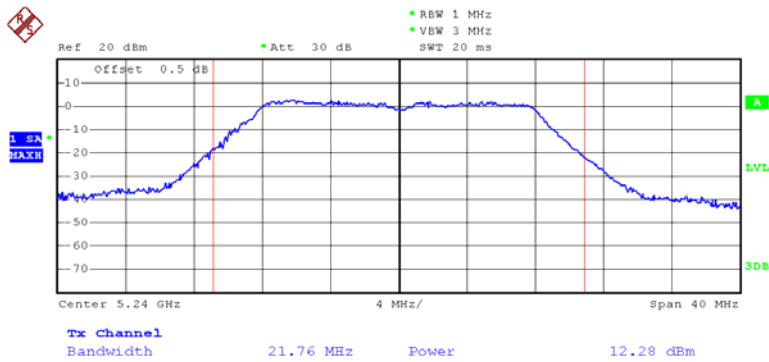


Date: 10.OCT.2013 09:19:20

Chain 0:802.11n20 RF Output Power, Low Channel

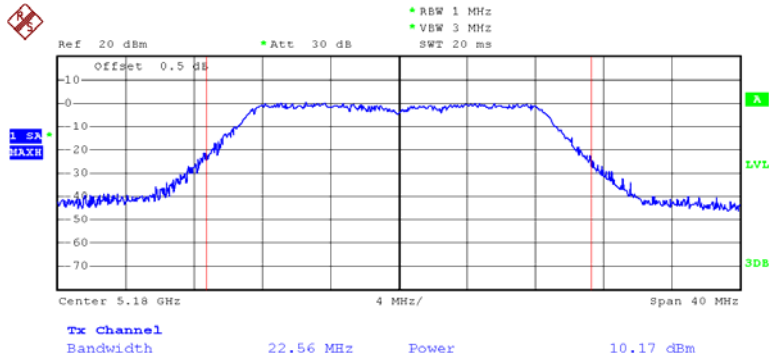


Date: 10.OCT.2013 09:36:05

Chain 0:802.11n20 RF Output Power, Middle Channel

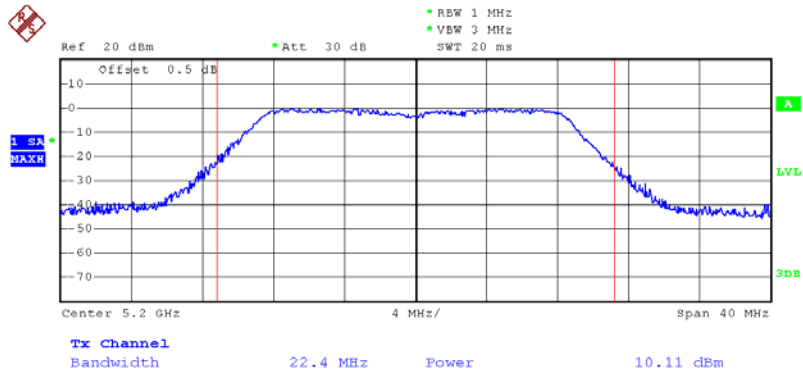


Date: 10.OCT.2013 09:48:34

Chain 0:802.11n20 RF Output Power, High Channel

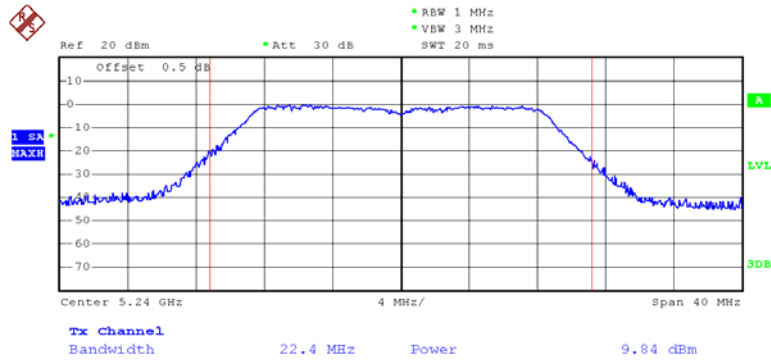


Date: 10.OCT.2013 10:04:03

Chain 1:802.11n20 RF Output Power, Low Channel

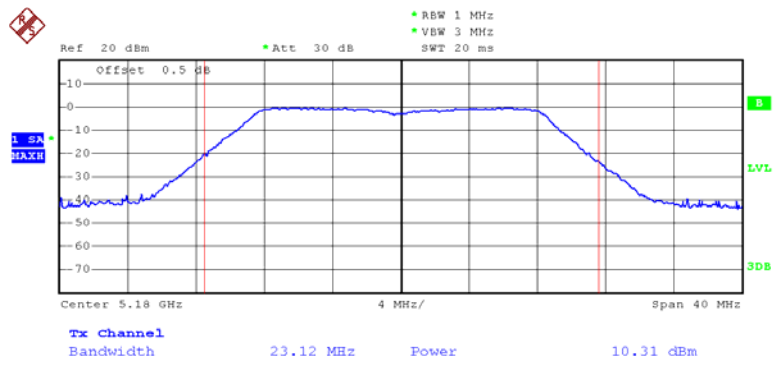


Date: 12.OCT.2013 09:19:33

Chain 1:802.11n20 RF Output Power, Middle Channel

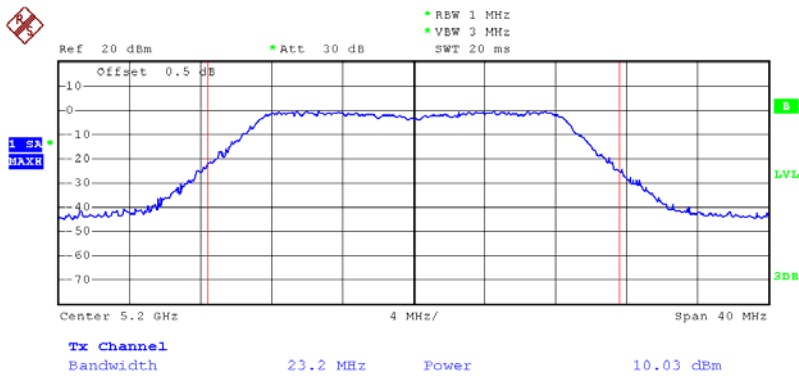


Date: 12.OCT.2013 09:28:04

Chain 1:802.11n20 RF Output Power, High Channel

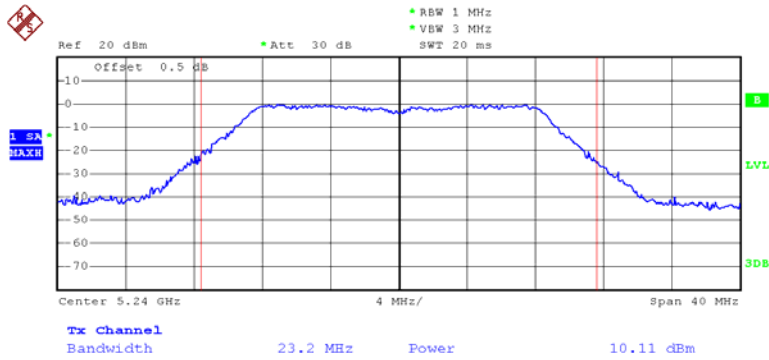


Date: 12.OCT.2013 09:33:53

Chain 0:802.11n40 RF Output Power, Low Channel

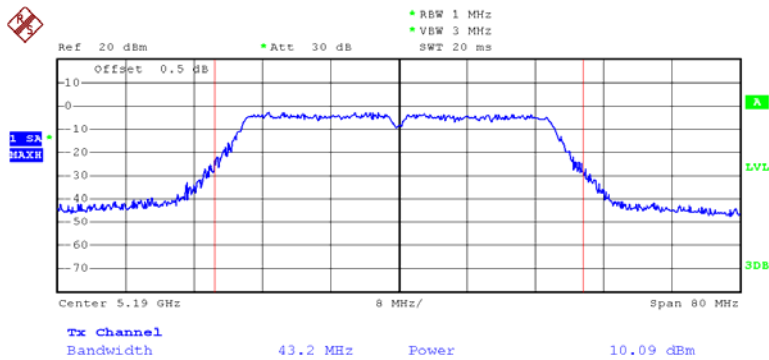


Date: 10.OCT.2013 19:36:47

Chain 0:802.11n40 RF Output Power, High Channel

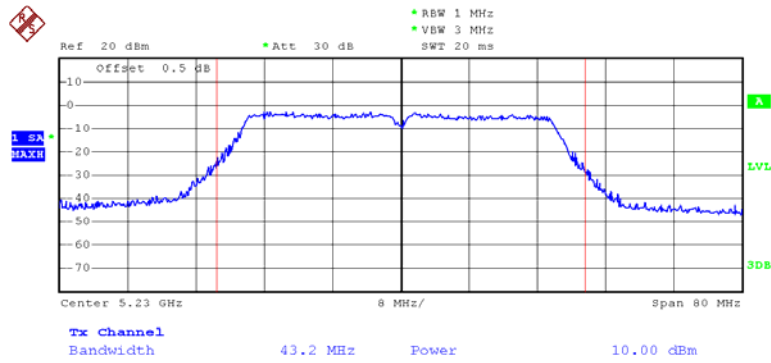


Date: 10.OCT.2013 19:52:01

Chain 1:802.11n40 RF Output Power, Low Channel

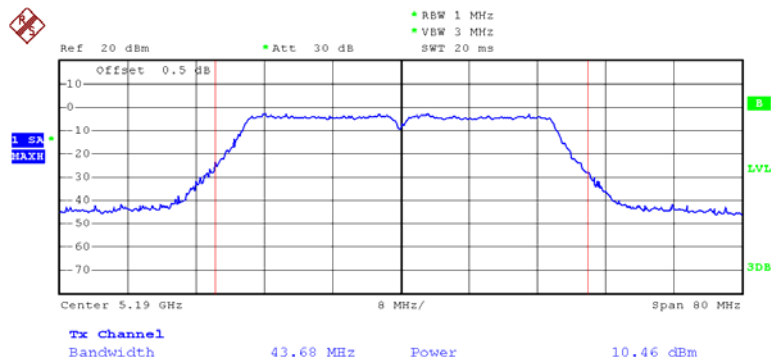


Date: 12.OCT.2013 10:05:09

Chain 1:802.11n40 RF Output Power, High Channel

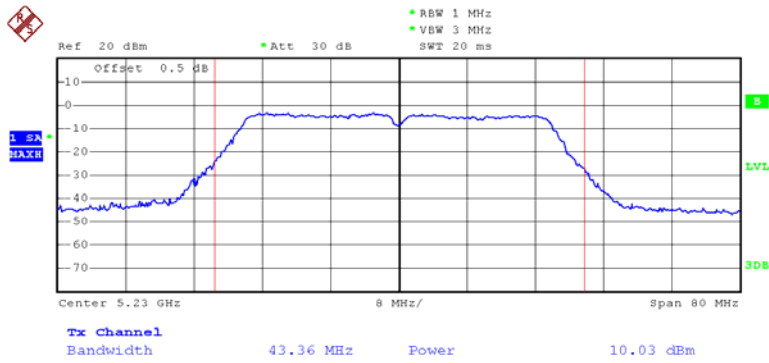


Date: 12.OCT.2013 10:12:22

Chain 0:802.11ac20 RF Output Power, Low Channel

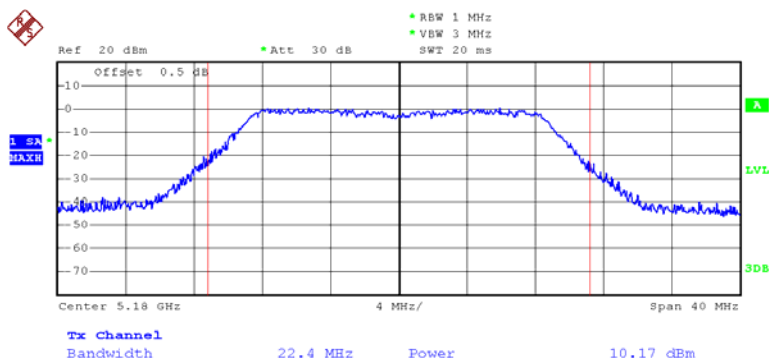


Date: 30.SEP.2013 10:20:35

Chain 0:802.11ac20 RF Output Power, Middle Channel

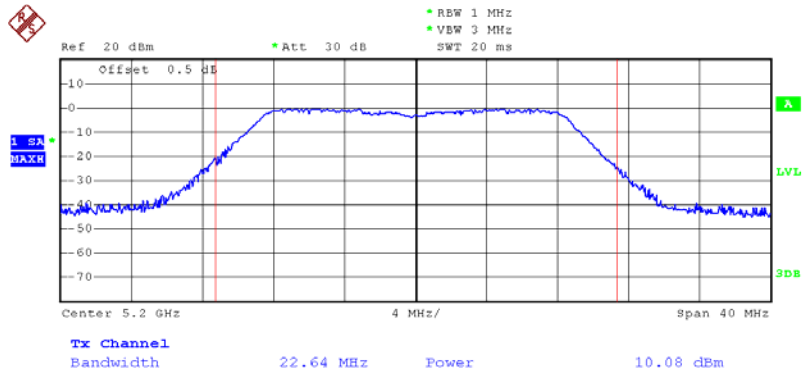


Date: 10.OCT.2013 11:03:49

Chain 0:802.11ac20 RF Output Power, High Channel

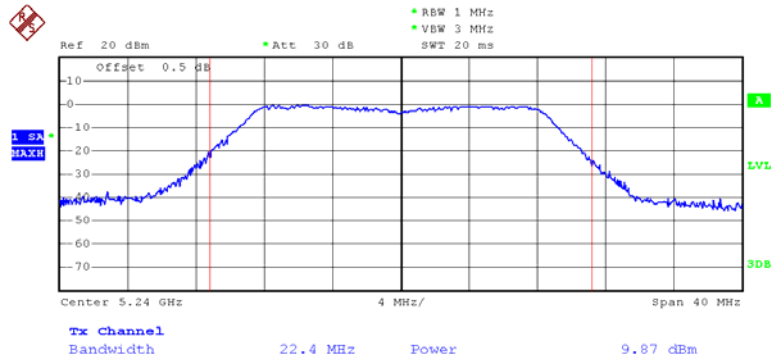


Date: 10.OCT.2013 11:28:07

Chain 1:802.11ac20 RF Output Power, Low Channel

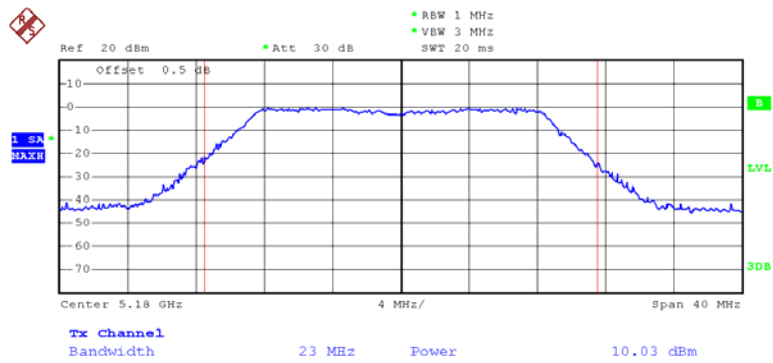


Date: 12.OCT.2013 09:42:43

Chain 1:802.11ac20 RF Output Power, Middle Channel

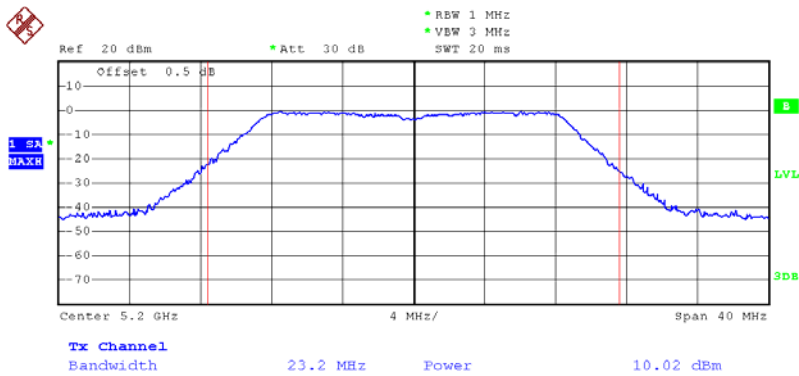


Date: 12.OCT.2013 09:49:18

Chain 1:802.11ac20 RF Output Power, High Channel

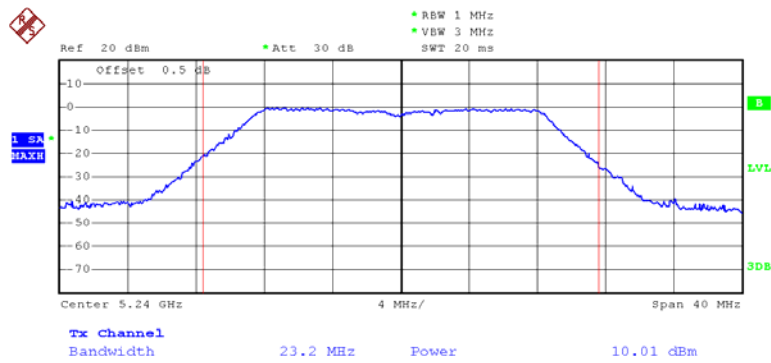


Date: 12.OCT.2013 09:55:11

Chain 0:802.11ac40 RF Output Power, Low Channel

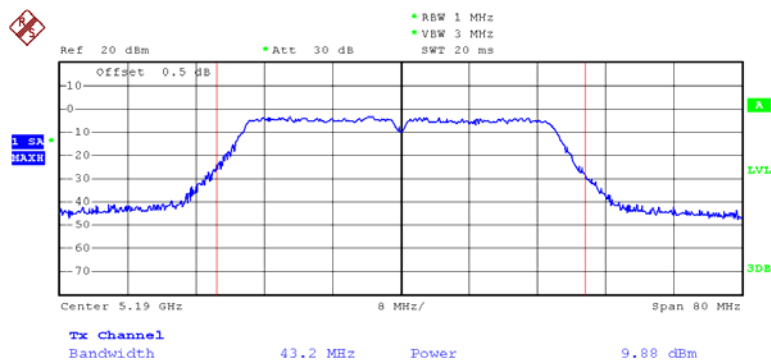


Date: 10.OCT.2013 20:00:47

Chain 0:802.11ac40 RF Output Power, High Channel

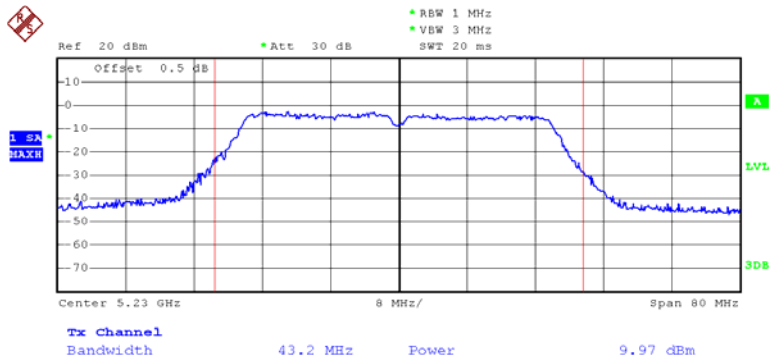


Date: 10.OCT.2013 20:18:28

Chain 1:802.11ac40 RF Output Power, Low Channel

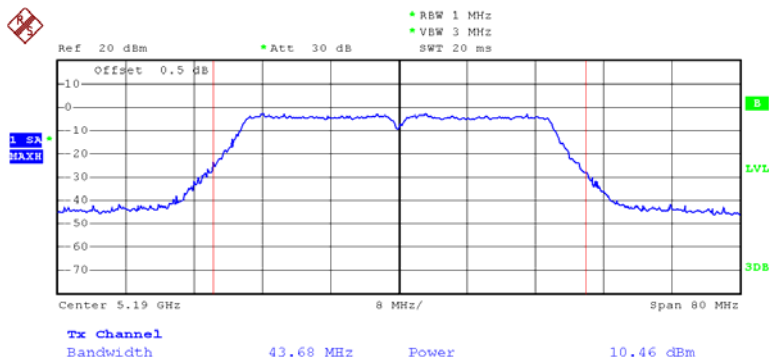


Date: 12.OCT.2013 10:05:09

Chain 1:802.11ac40 RF Output Power, High Channel

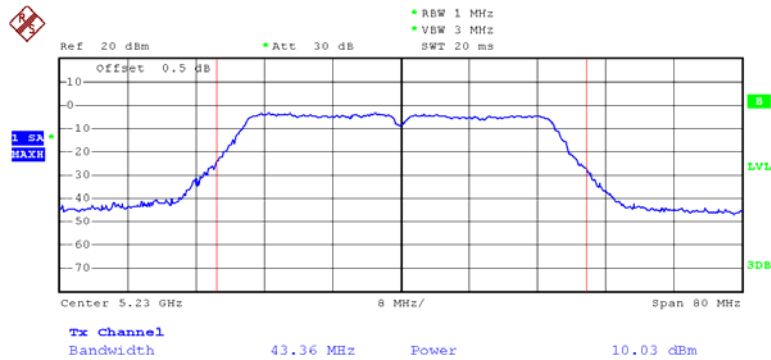


Date: 12.OCT.2013 10:12:22

Chain 0:802.11ac80 RF Output Power, Low Channel

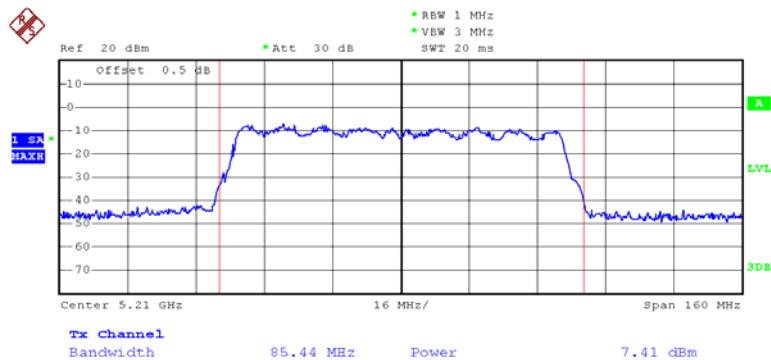

Date: 10.OCT.2013 20:28:42

Chain 1:802.11ac80 RF Output Power, Low Channel

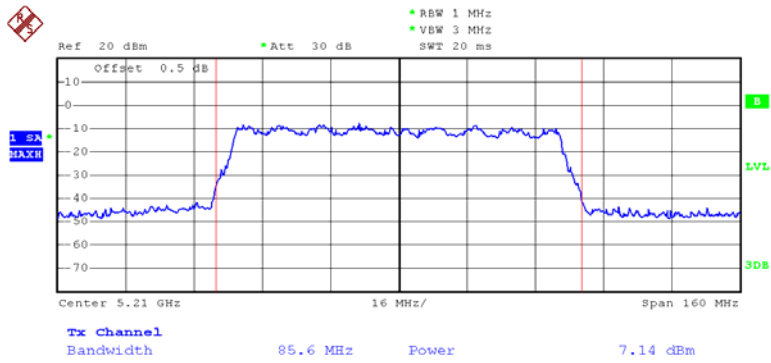

Date: 10.OCT.2013 13:25:50

FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmits power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.4~28.6°C
Relative Humidity:	50~61 %
ATM Pressure:	100.3~100.8 kPa

The testing was performed by Leon Chen from 2013-09-30 to 2013-10-12.

Test Mode: Transmitting


Test mode	Channel	PSD (dBm/MHz)			Limit (dBm/MHz)	Result
		Chain0	Chain1	Chain0+1		
802.11a	Low	3.54	/	/	4	PASS
	Middle	2.73	/	/	4	PASS
	High	2.85	/	/	4	PASS
802.11n20	Low	-0.08	-0.89	2.54	4	PASS
	Middle	-0.43	-0.53	2.53	4	PASS
	High	-0.72	-0.51	2.4	4	PASS
802.11n40	Low	-3.08	-3.33	-0.19	4	PASS
	High	-3.14	-3.6	-0.35	4	PASS
802.11ac20	Low	-0.03	-0.57	2.72	4	PASS
	Middle	-0.56	-0.76	2.35	4	PASS
	High	-0.57	0.7	3.12	4	PASS
802.11ac40	Low	-3.81	-0.33	1.28	4	PASS
	High	-3.25	-3.6	-0.41	4	PASS
802.11ac80	Low	-7.99	-8.19	2.54	4	PASS

Power Spectral Density, 802.11a Low Channel

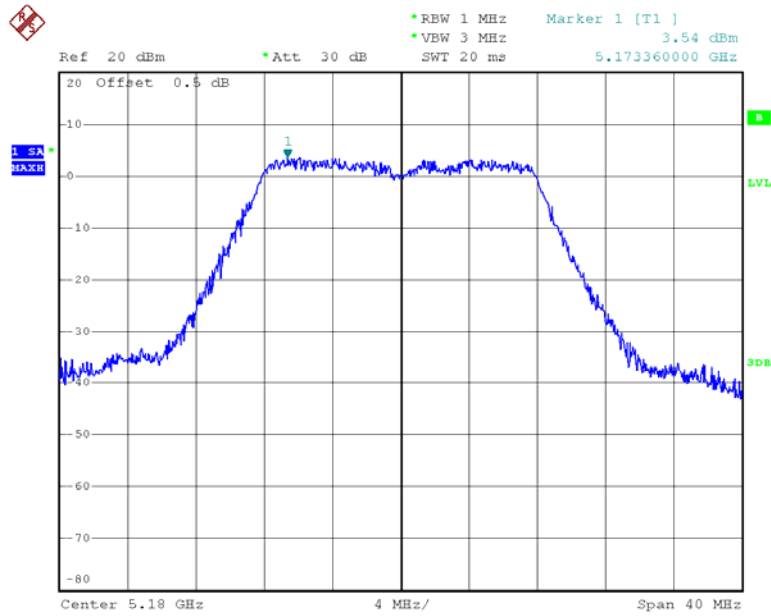


Date: 10.OCT.2013 11:35:34

Power Spectral Density, 802.11a Middle Channel

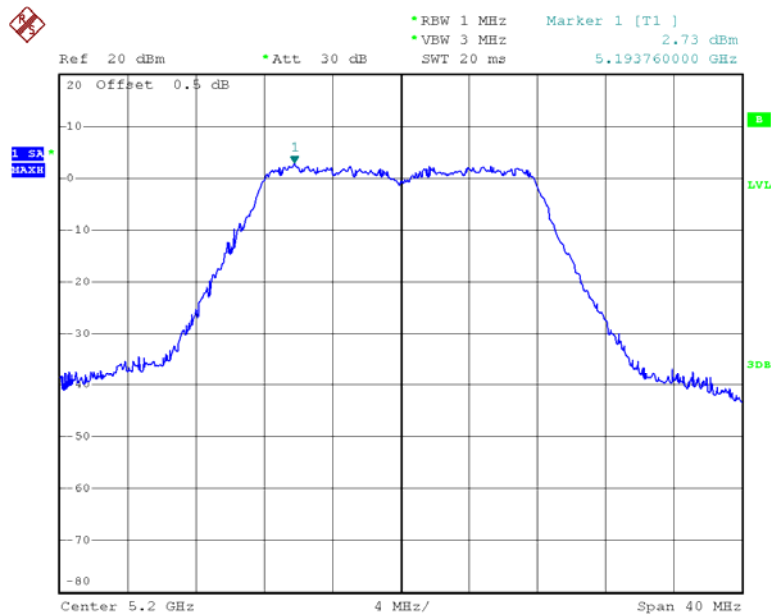


Date: 10.OCT.2013 09:10:31

Power Spectral Density, 802.11a High Channel

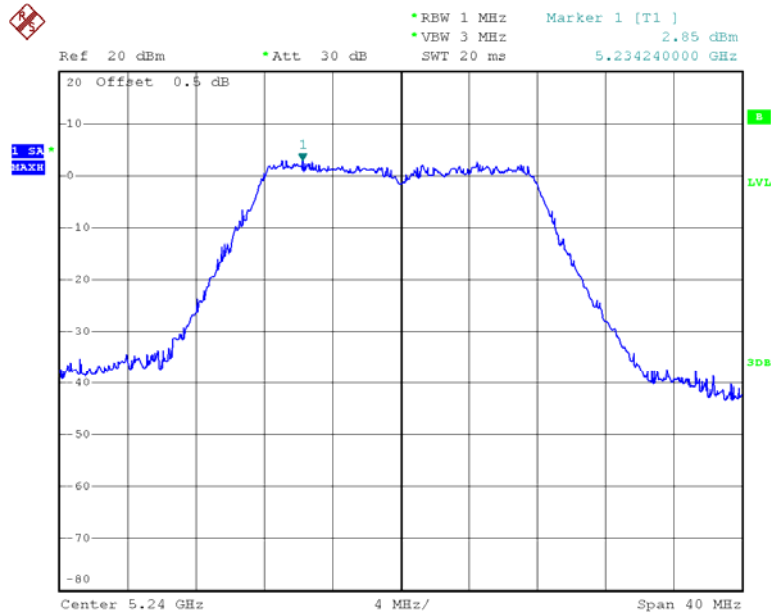


Date: 10.OCT.2013 09:21:16

Chain 0: Power Spectral Density, 802.11n20 Low Channel

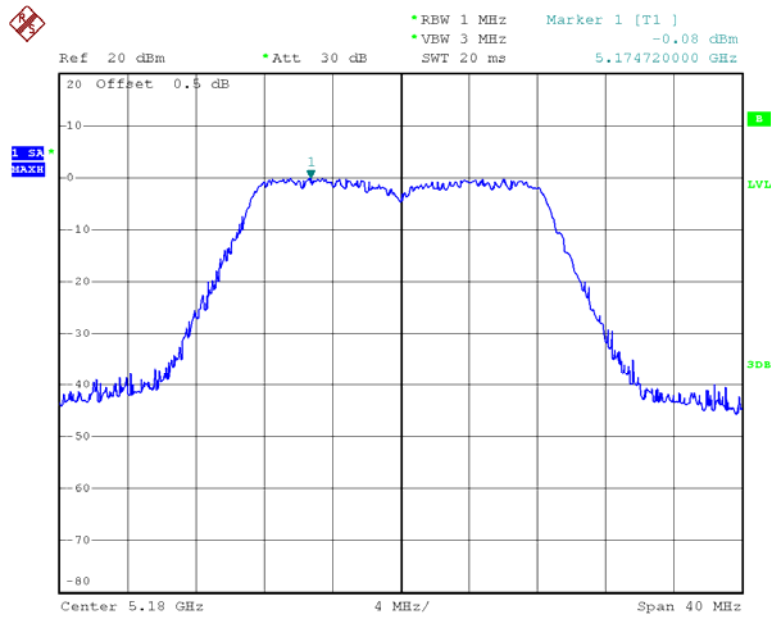


Date: 10.OCT.2013 09:37:03

Chain 0: Power Spectral Density, 802.11n20 Middle Channel

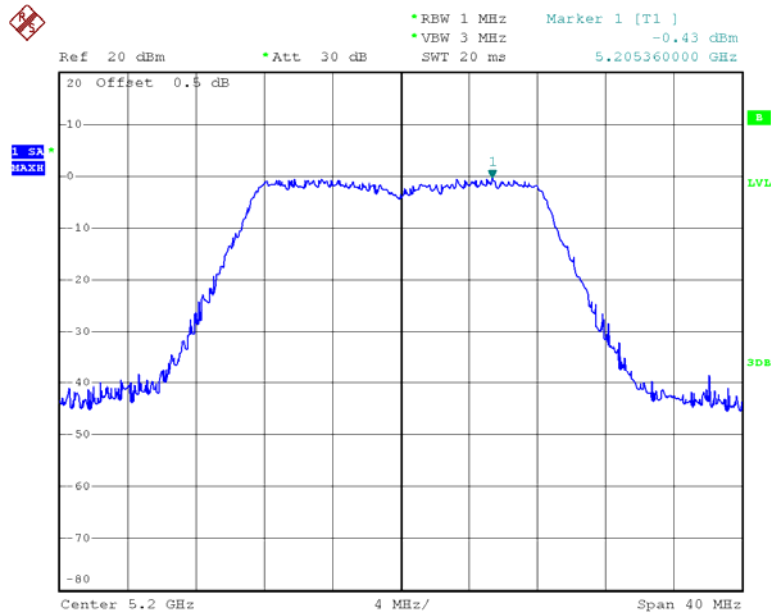


Date: 10.OCT.2013 09:49:48

Chain 0: Power Spectral Density, 802.11n20 High Channel

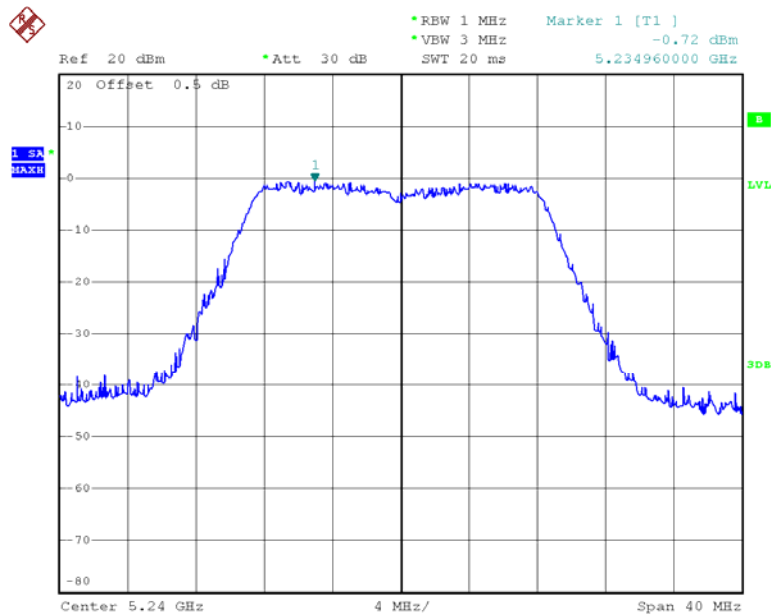


Date: 10.OCT.2013 10:05:15

Chain 1:Power Spectral Density, 802.11 n20 Low Channel

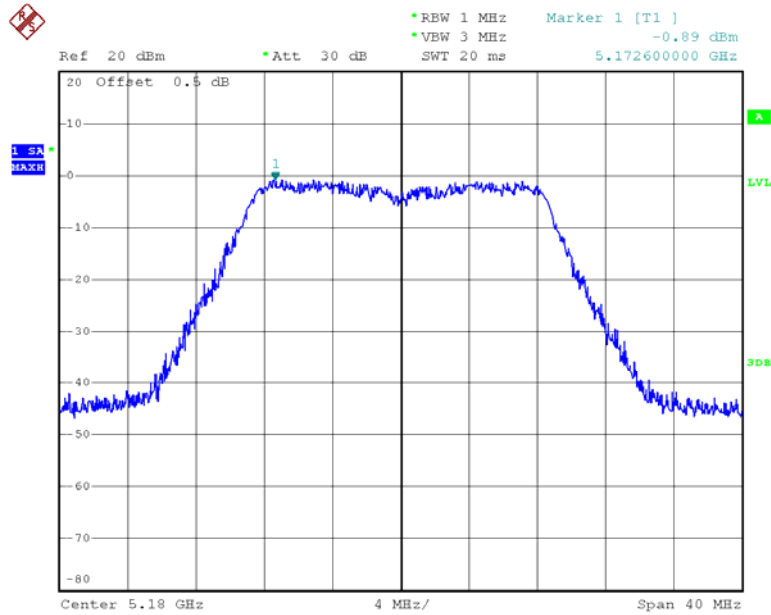


Date: 12.OCT.2013 09:20:11

Chain 1:Power Spectral Density, 802.11n20 Middle Channel

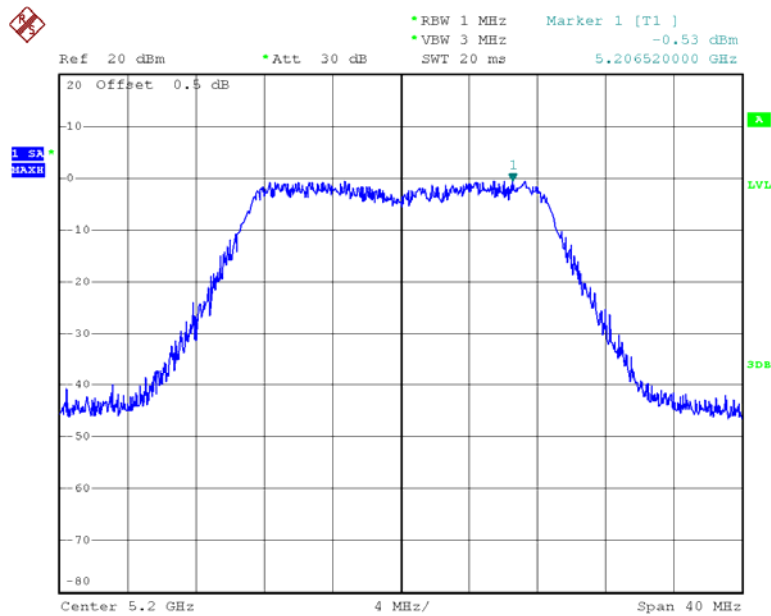


Date: 12.OCT.2013 09:28:33

Chain 1: Power Spectral Density, 802.11n20 High Channel

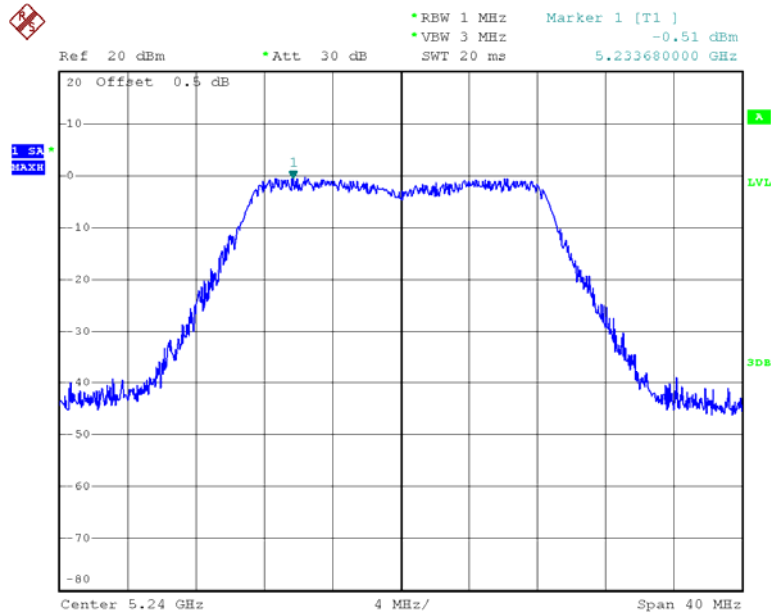


Date: 12.OCT.2013 09:34:50

Chain 0: Power Spectral Density, 802.11n40 Low Channel

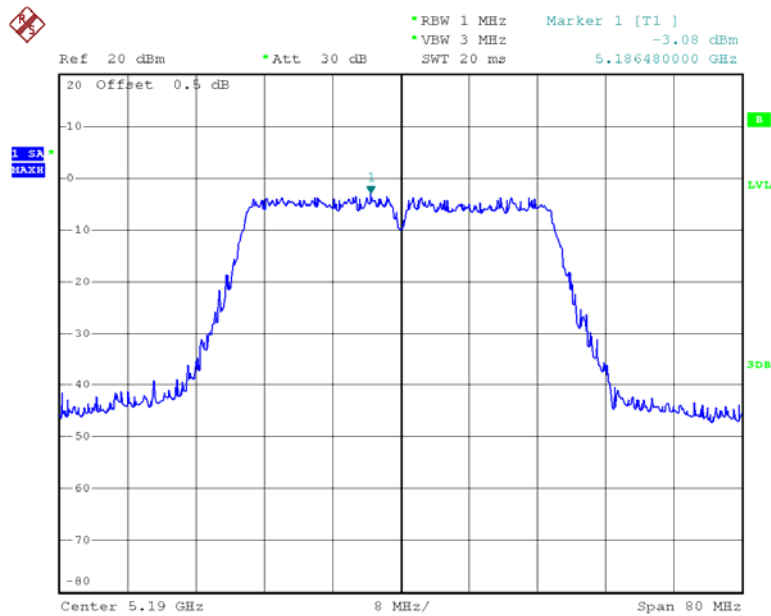


Date: 10.OCT.2013 19:37:46

Chain 0: Power Spectral Density, 802.11n40 High Channel

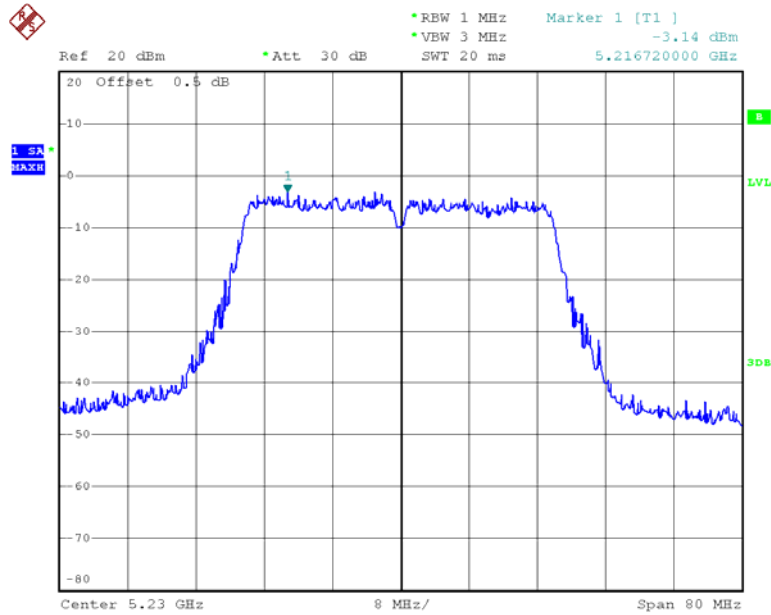


Date: 10.OCT.2013 19:53:04

Chain 1: Power Spectral Density, 802.11n40 Low Channel

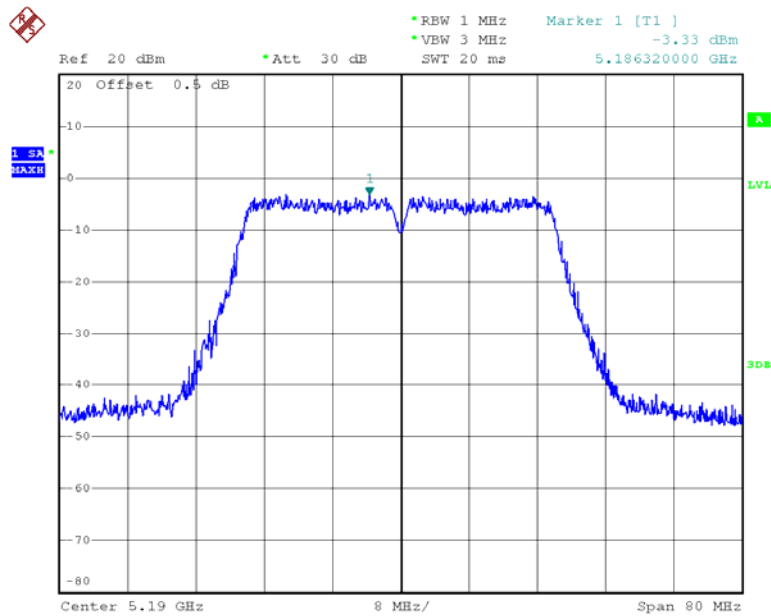


Date: 12.OCT.2013 10:05:36

Chain 1: Power Spectral Density, 802.11n40 High Channel

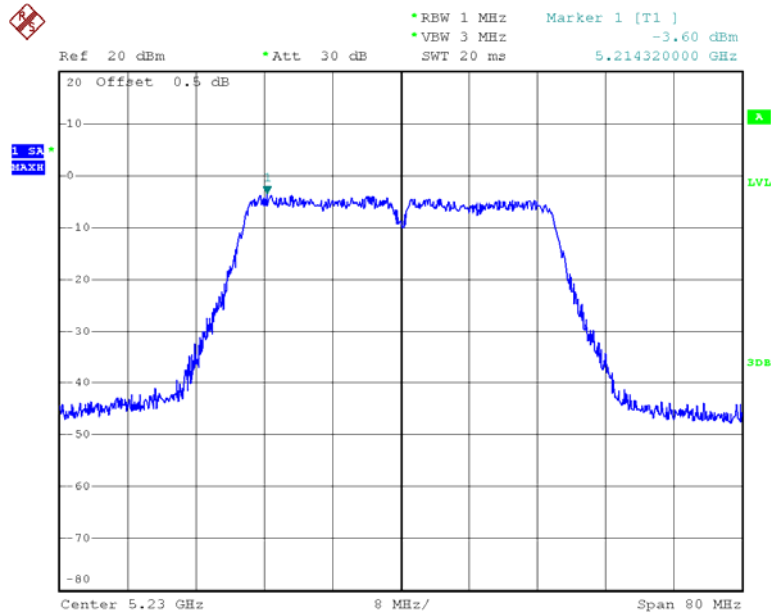


Date: 12.OCT.2013 10:13:20

Chain 0: Power Spectral Density, 802.11ac20 Low Channel

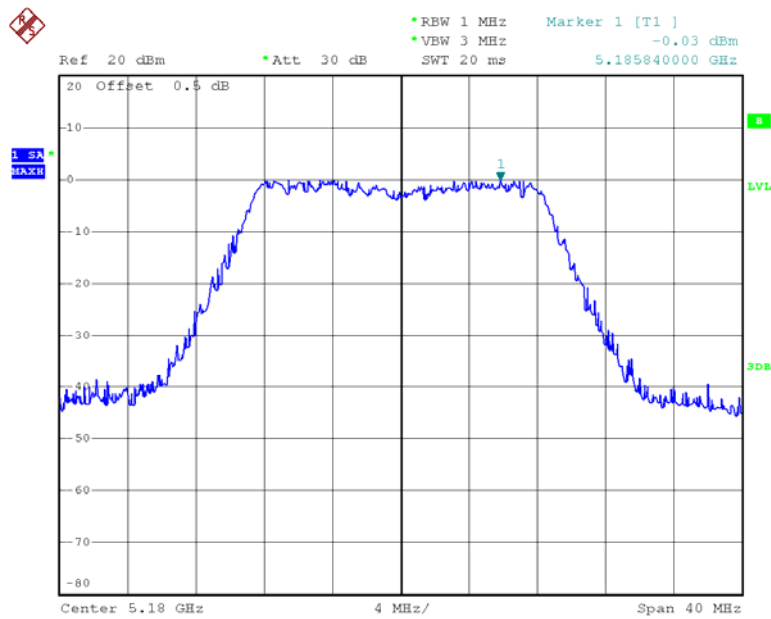


Date: 30.SEP.2013 10:21:34

Chain 0: Power Spectral Density, 802.11ac20 Middle Channel

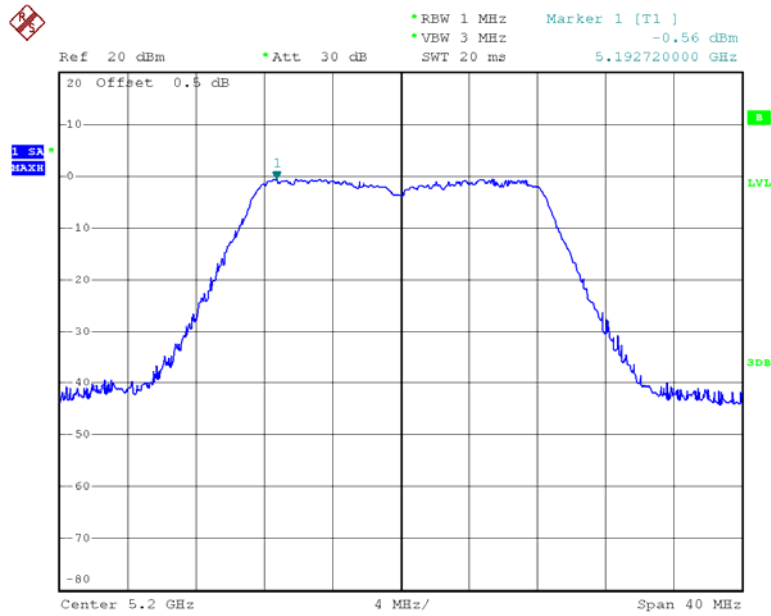


Date: 10.OCT.2013 11:05:53

Chain 0: Power Spectral Density, 802.11ac20 High Channel

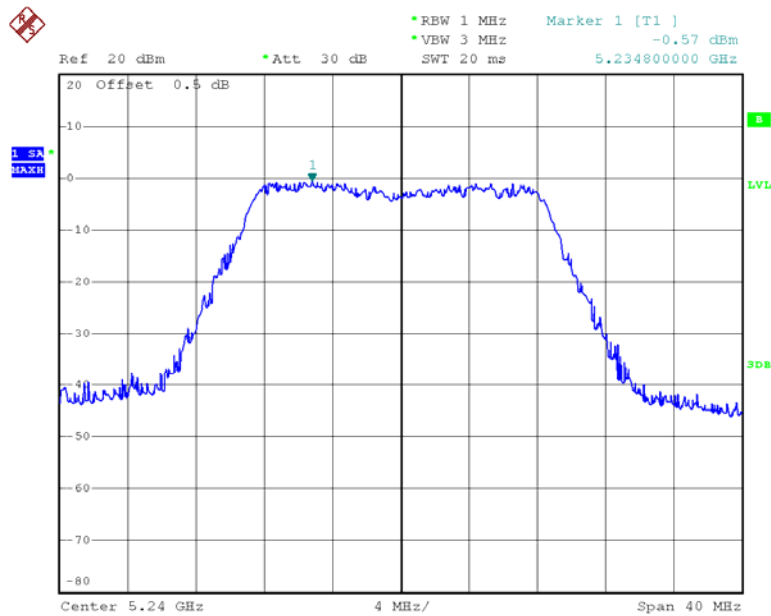


Date: 10.OCT.2013 11:29:29

Chain 1: Power Spectral Density, 802.11 ac20 Low Channel

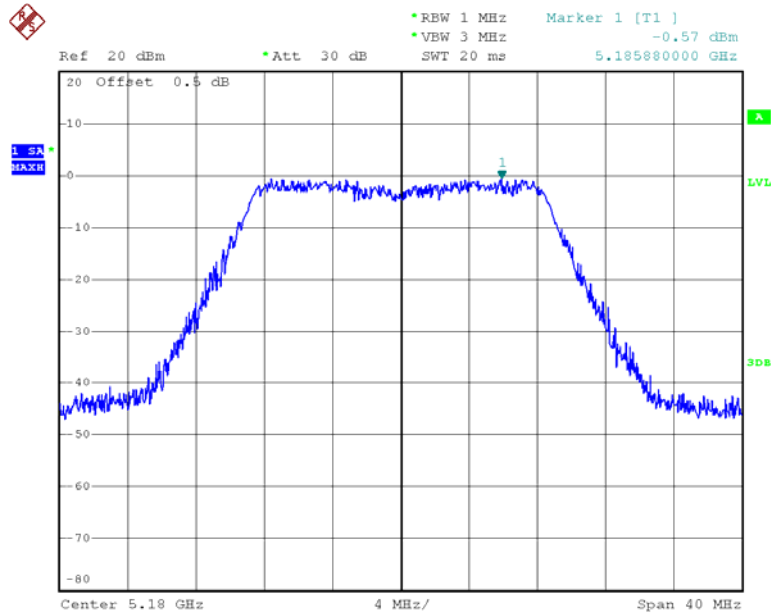


Date: 12.OCT.2013 09:43:48

Chain 1: Power Spectral Density, 802.11ac20 Middle Channel

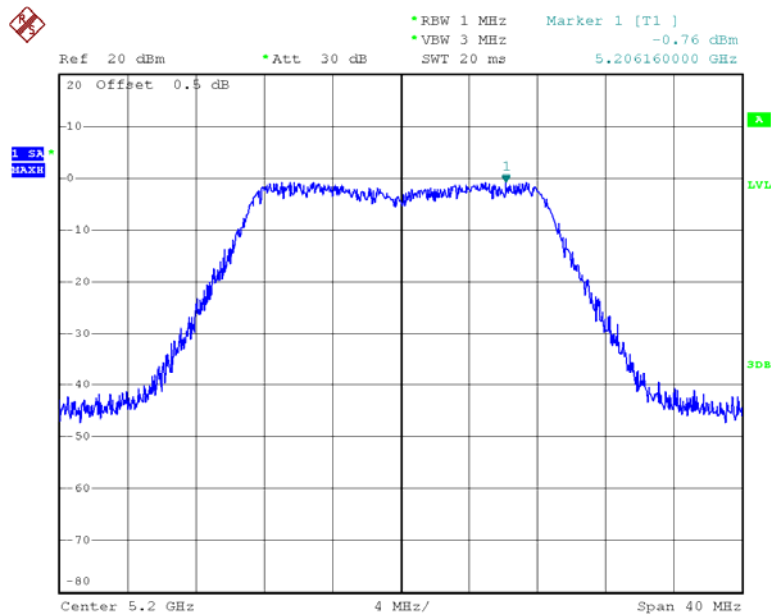


Date: 12.OCT.2013 09:49:45

Chain 1: Power Spectral Density, 802.11ac20 High Channel

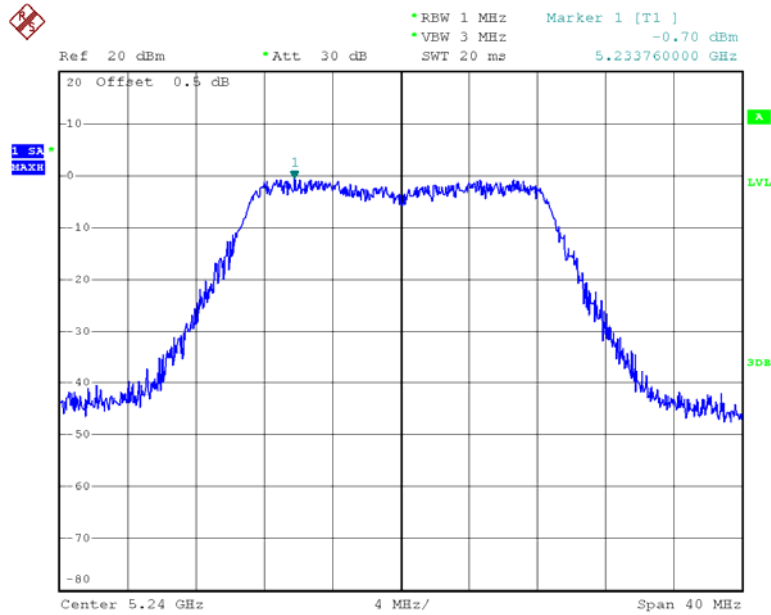


Date: 12.OCT.2013 09:55:33

Chain 0: Power Spectral Density, 802.11ac40 Low Channel

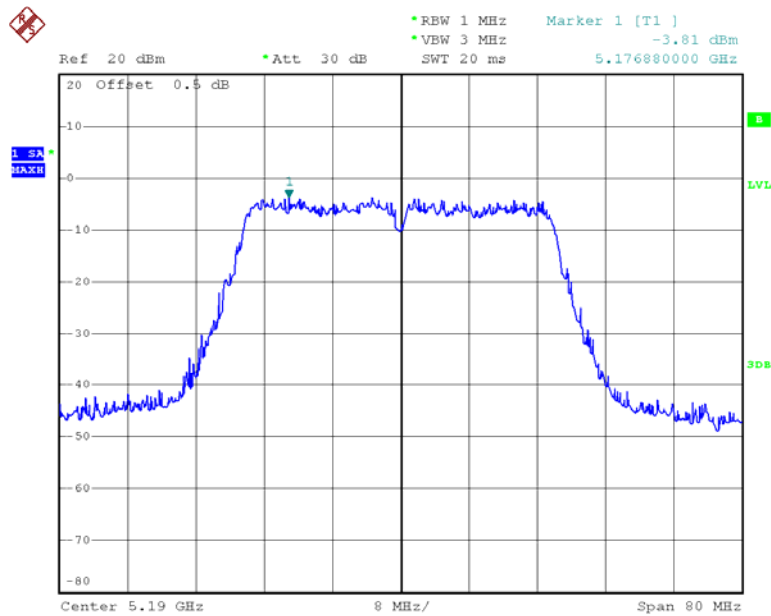


Date: 10.OCT.2013 20:02:02

Chain 0: Power Spectral Density, 802.11ac40 High Channel

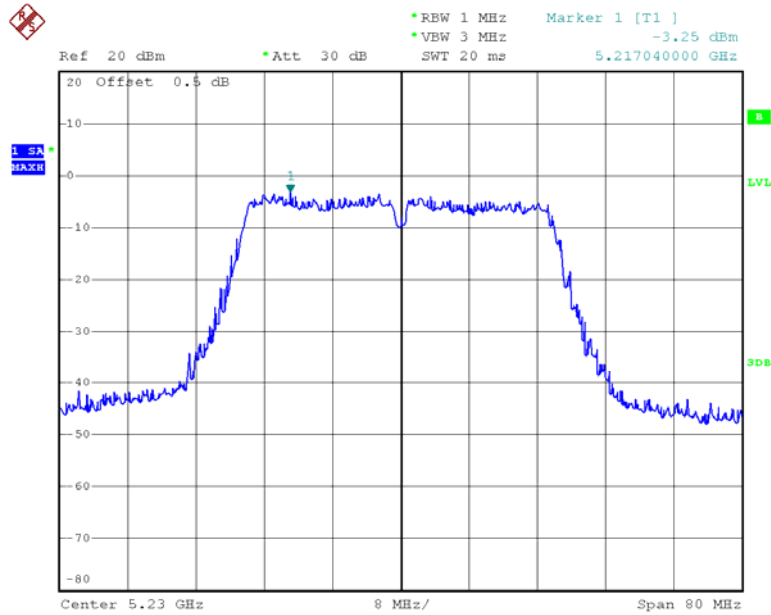


Date: 10.OCT.2013 20:19:41

Chain 1: Power Spectral Density, 802.11ac40 Low Channel

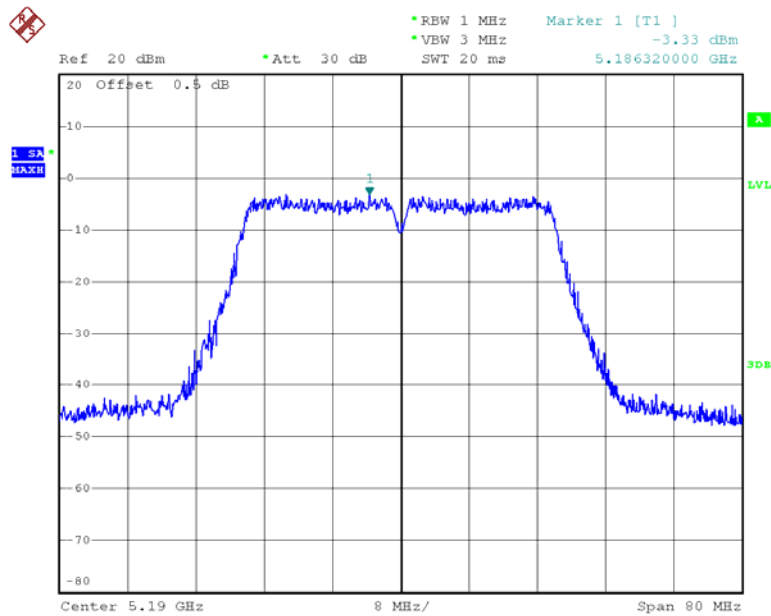


Date: 12.OCT.2013 10:05:36

Chain 1: Power Spectral Density, 802.11ac40 High Channel

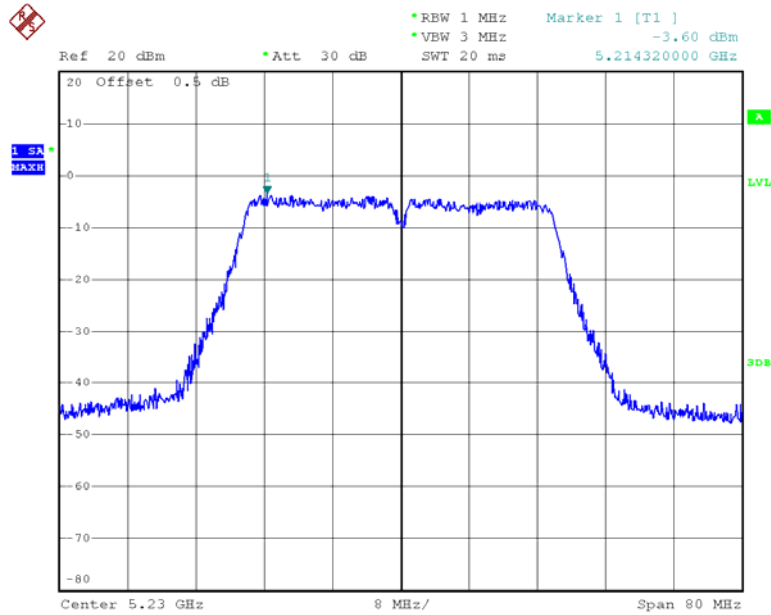


Date: 12.OCT.2013 10:13:20

Chain 0: Power Spectral Density, 802.11ac80 Low Channel

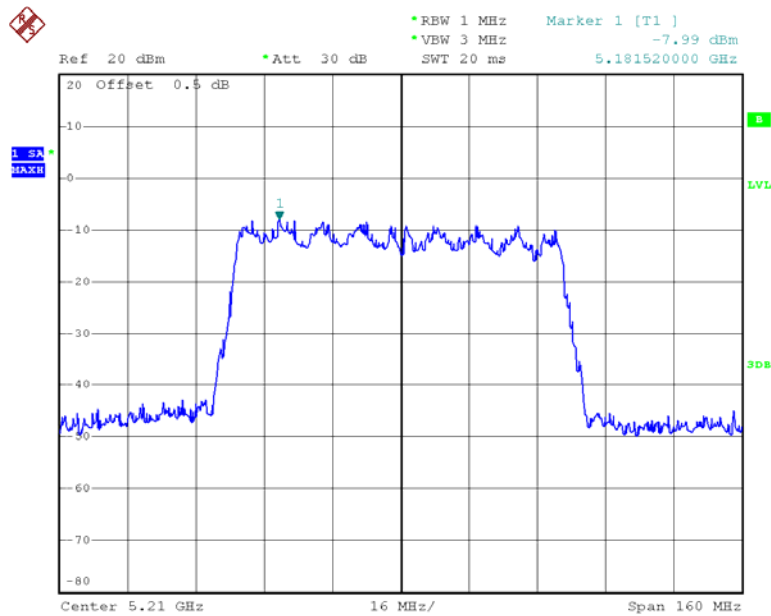

Date: 10.OCT.2013 20:29:25

Chain 1: Power Spectral Density, 802.11ac80 Low Channel

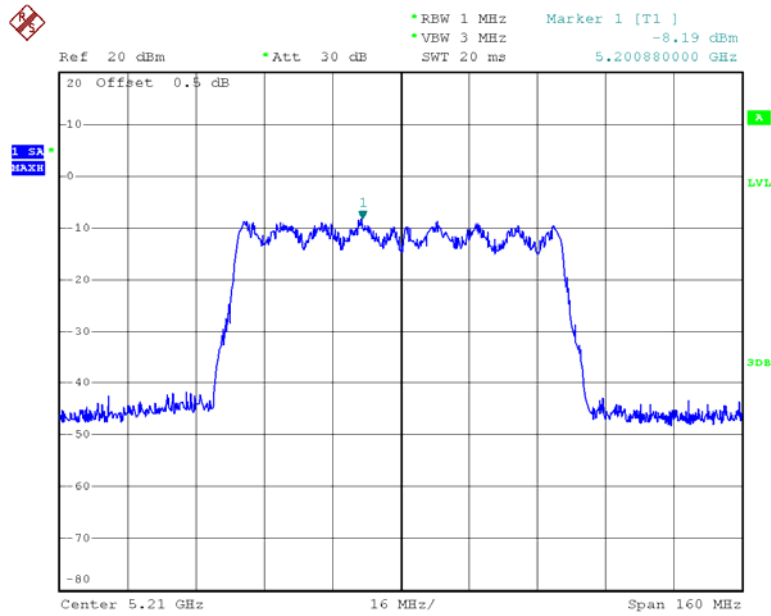

Date: 12.OCT.2013 10:52:52

FCC §15.407(a) (6) – PEAK EXCURSION RATIO

Applicable Standard

According to §15.407(a) (6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Procedure


Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and maxhold settings.

2nd Trace:

- create the 2nd trace using the settings described in the setion “FCC §15.407(a)(1)(2) – CONDUCTED TRANSMITTER OUTPUT POWER”.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.4~28.6°C
Relative Humidity:	50~61 %
ATM Pressure:	100.3~100.8 kPa

The testing was performed by Leon Chen from 2013-09-30 to 2013-10-12.

Test Mode: Transmitting


Test mode	Channel	Peak Excursion Ratio (dB)		Limit (dB)	Result
		Chain0	Chain1		
802.11a	Low	0.47	/	13	PASS
	Middle	0.18	/	13	PASS
	High	0.33	/	13	PASS
802.11n20	Low	0.24	0.92	13	PASS
	Middle	0.11	0.77	13	PASS
	High	0.53	0.49	13	PASS
802.11n40	Low	0.33	0.22	13	PASS
	High	0.44	0.12	13	PASS
802.11ac20	Low	0.25	0.45	13	PASS
	Middle	0.09	0.79	13	PASS
	High	0.44	0.79	13	PASS
802.11ac40	Low	0.24	0.22	13	PASS
	High	0.45	0.12	13	PASS
802.11ac80	Low	0.62	0.9	13	PASS

802.11a Peak Excursion, Low Channel

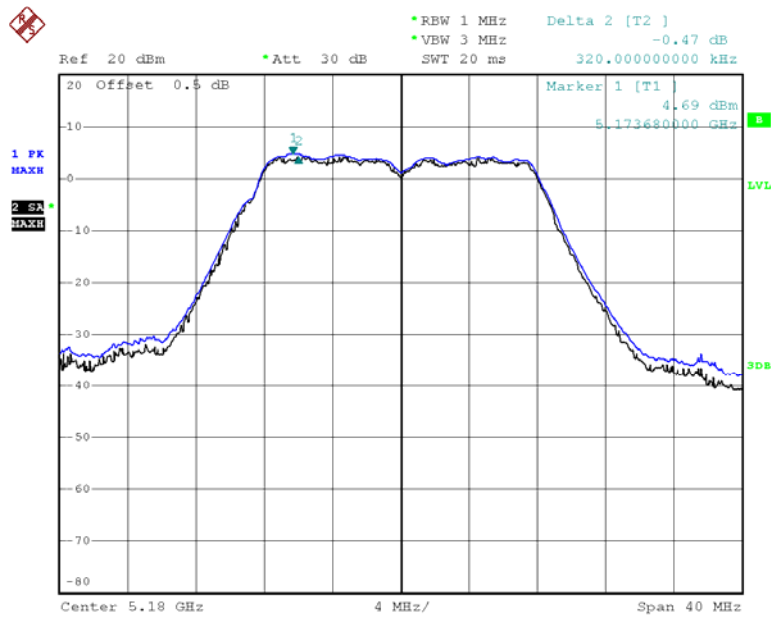


Date: 10.OCT.2013 09:03:40

802.11a Peak Excursion, Middle Channel

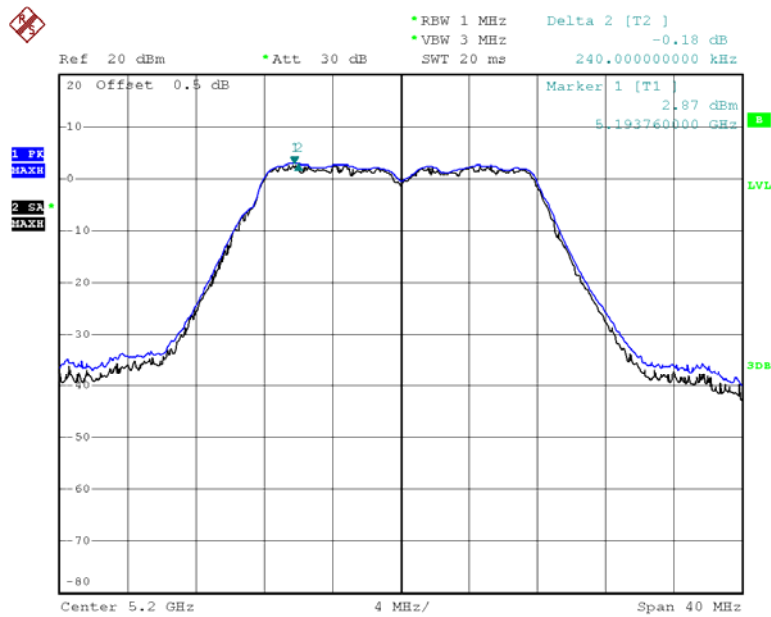


Date: 10.OCT.2013 09:12:06

802.11a Peak Excursion, High Channel

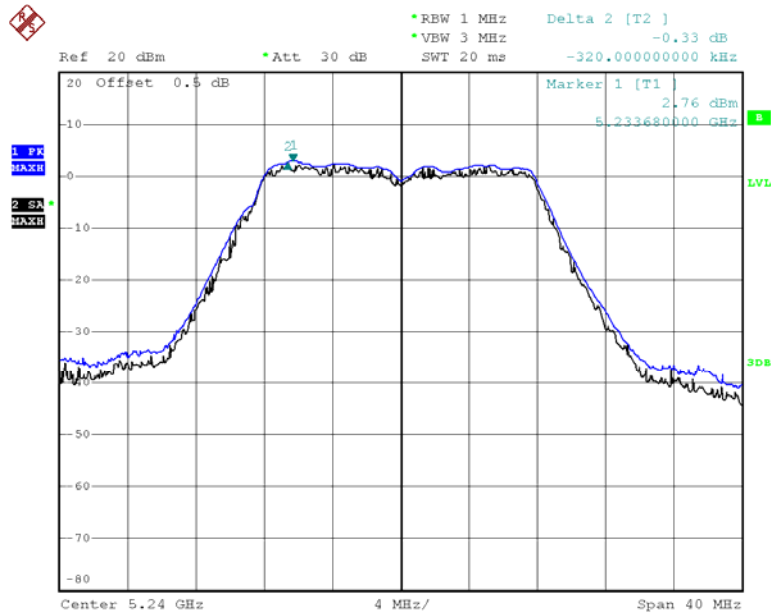


Date: 10.OCT.2013 09:22:39

Chain 0:802.11 n20 Peak Excursion, Low Channel

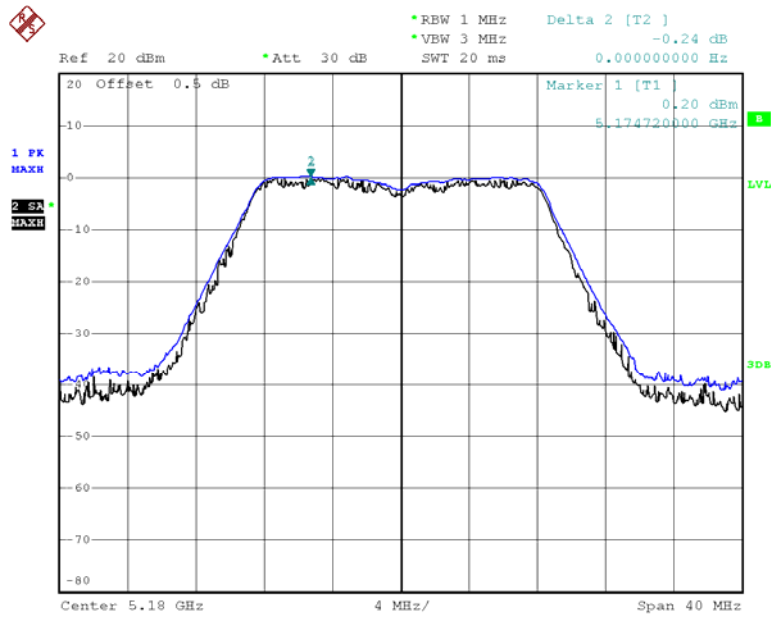


Date: 10.OCT.2013 09:38:21

Chain 0:802.11 n20 Peak Excursion, Middle Channel

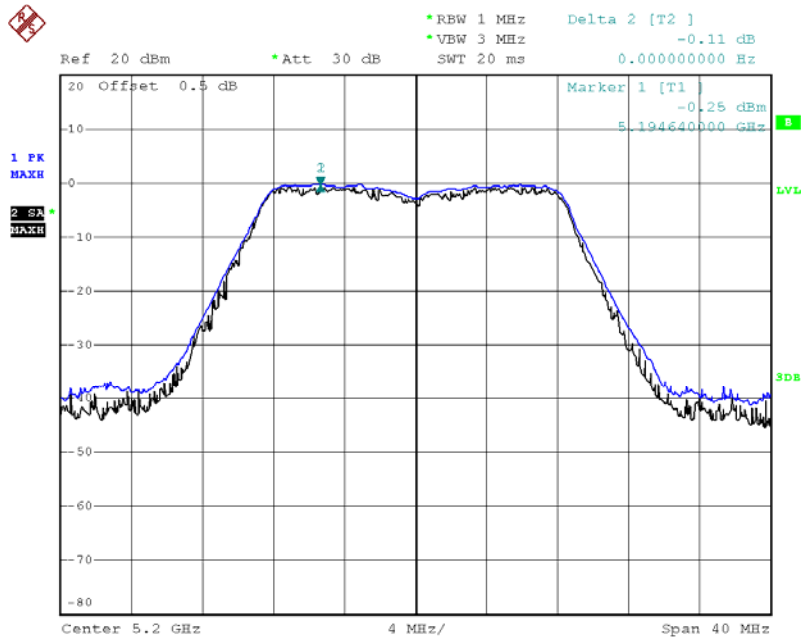


Date: 10.OCT.2013 09:55:11

Chain 0:802.11 n20 Peak Excursion, High Channel

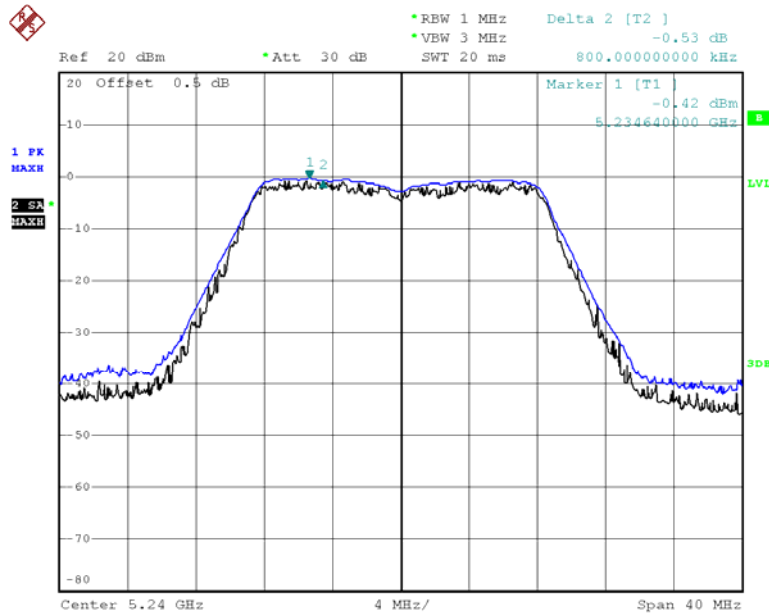


Date: 10.OCT.2013 10:06:19

Chain 1:802.11 n20 Peak Excursion, Low Channel

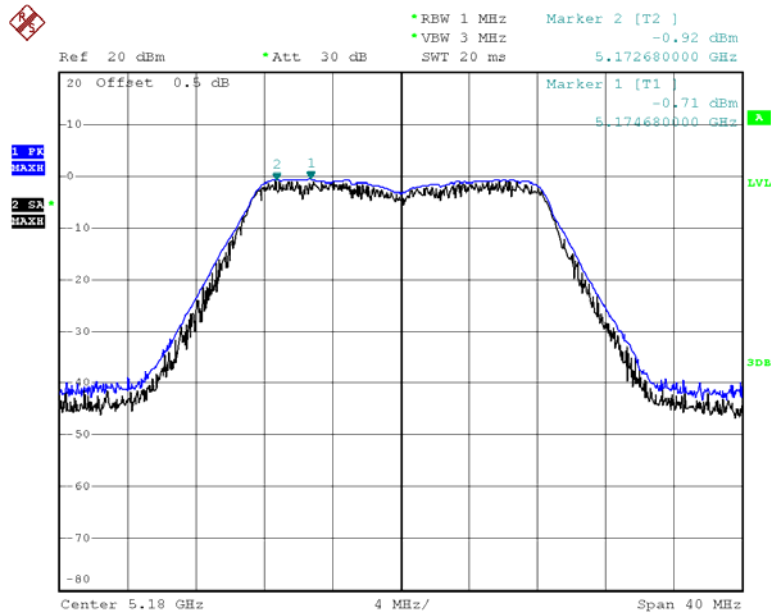


Date: 12.OCT.2013 09:21:22

Chain 1:802.11 n20 Peak Excursion, Middle Channel

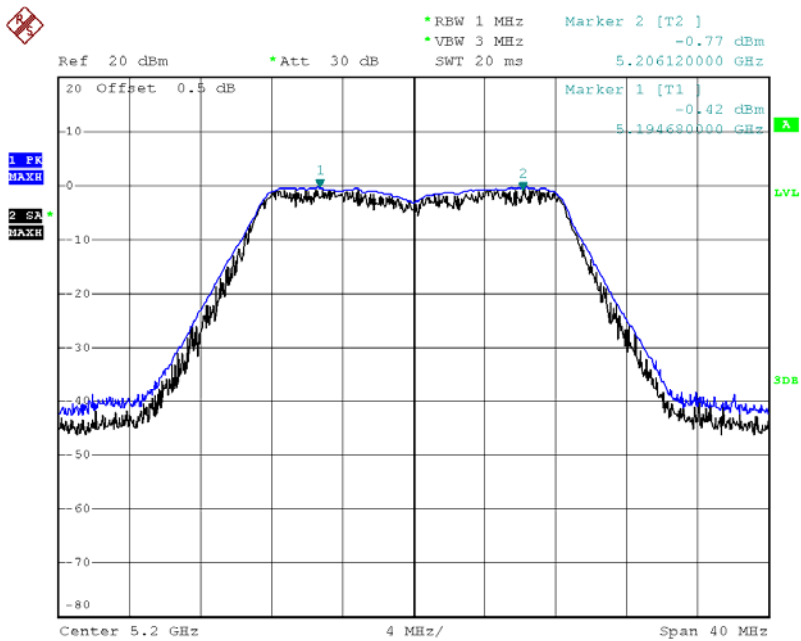


Date: 12.OCT.2013 09:29:00

Chain 1:802.11 n20 Peak Excursion, High Channel

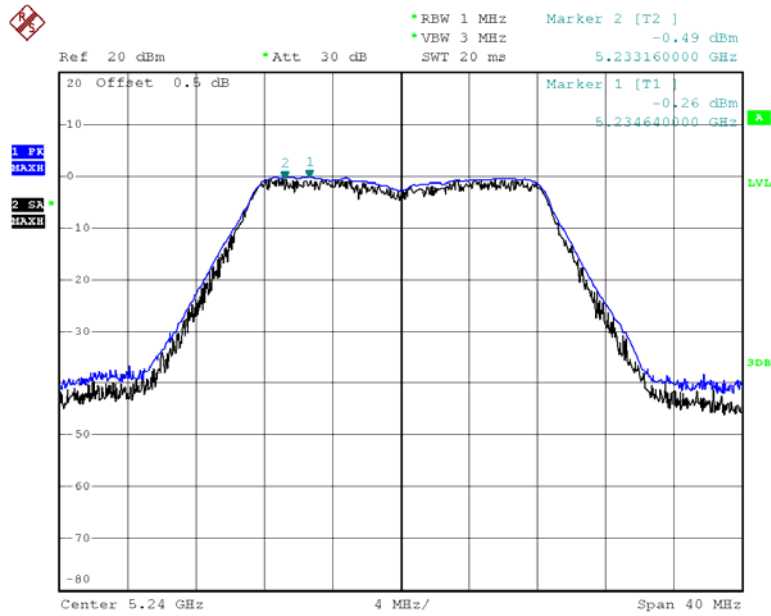


Date: 12.OCT.2013 09:35:35

Chain 0:802.11 n40 Peak Excursion, Low Channel

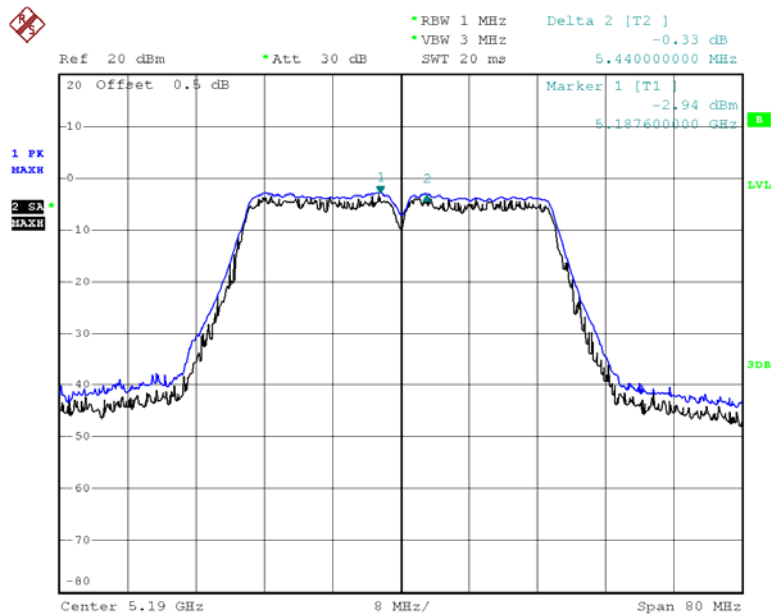


Date: 10.OCT.2013 19:38:57

Chain 0:802.11 n40 Peak Excursion, High Channel

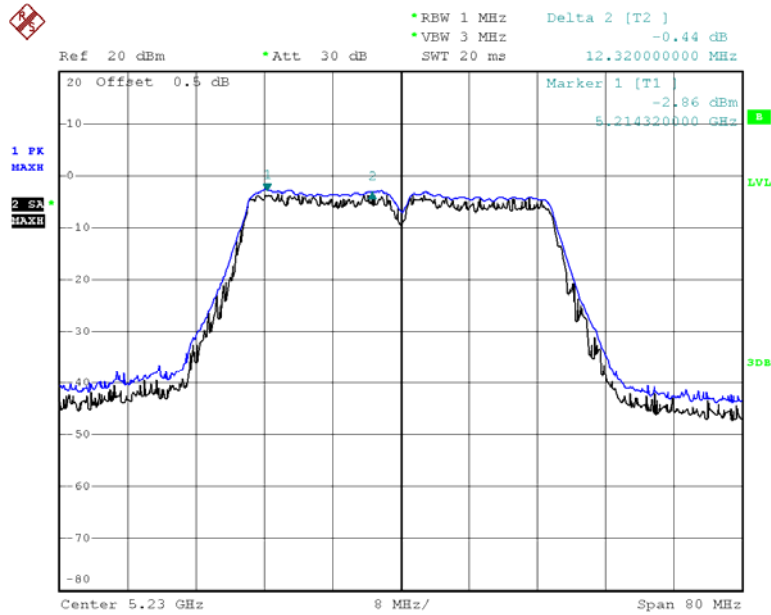


Date: 10.OCT.2013 19:53:58

Chain 1:802.11 n40 Peak Excursion, Low Channel

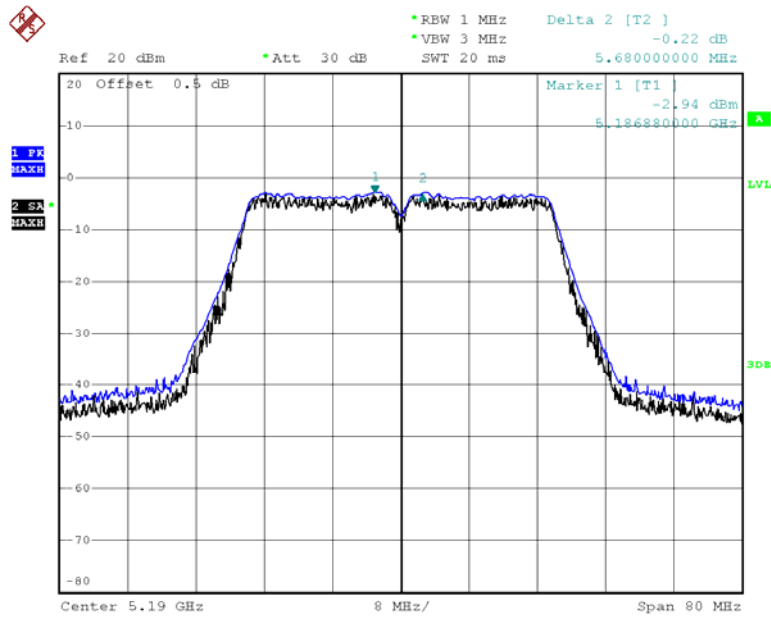


Date: 12.OCT.2013 10:06:13

Chain 1:802.11 n40 Peak Excursion, High Channel

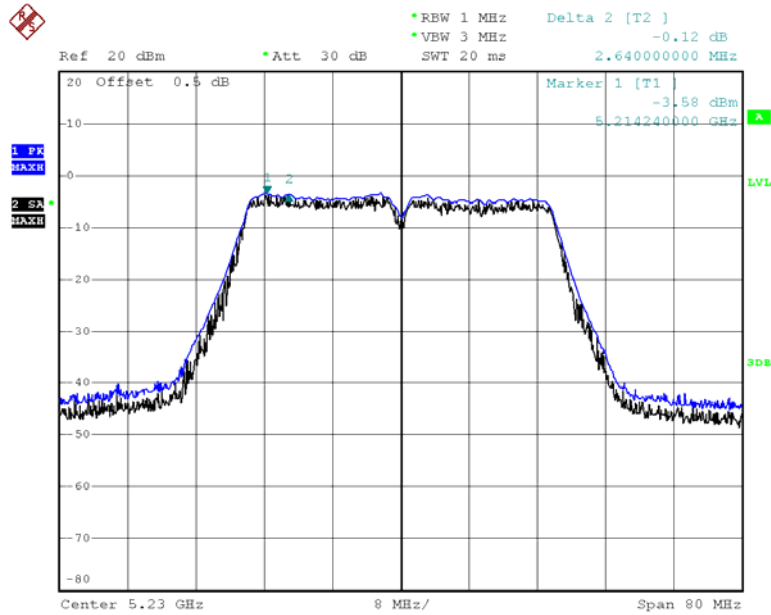


Date: 12.OCT.2013 10:14:01

Chain 0:802.11 ac20 Peak Excursion, Low Channel

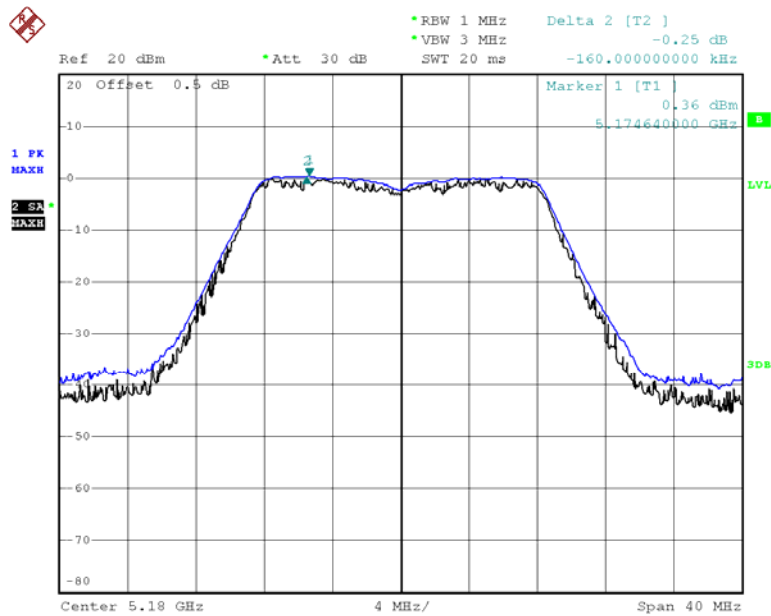


Date: 30.SEP.2013 10:22:55

Chain 0:802.11 ac20 Peak Excursion, Middle Channel

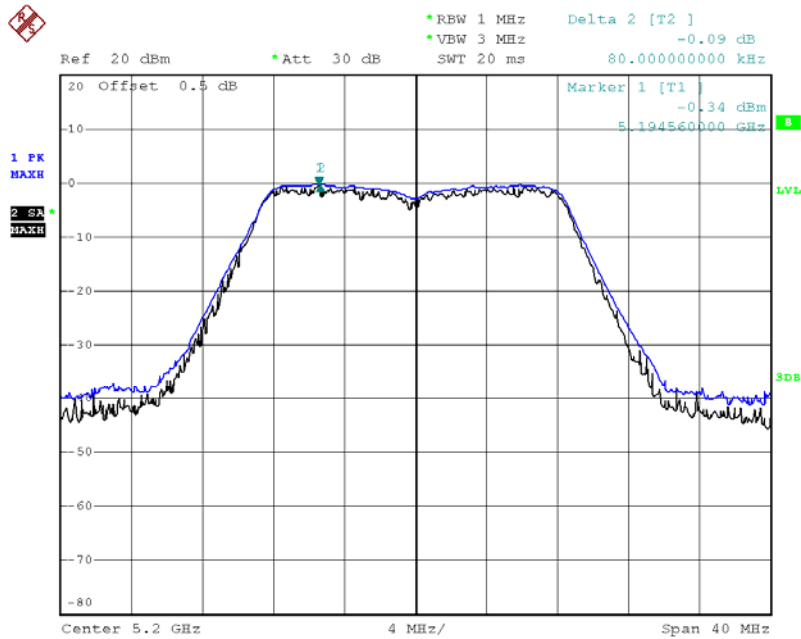


Date: 10.OCT.2013 11:07:21

Chain 0:802.11 ac20 Peak Excursion, High Channel

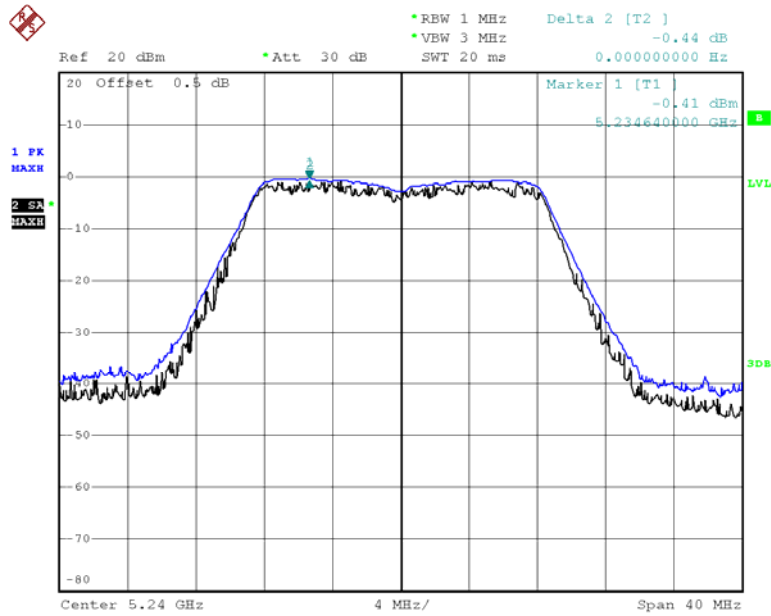


Date: 10.OCT.2013 11:30:18

Chain 1:802.11 ac20 Peak Excursion, Low Channel

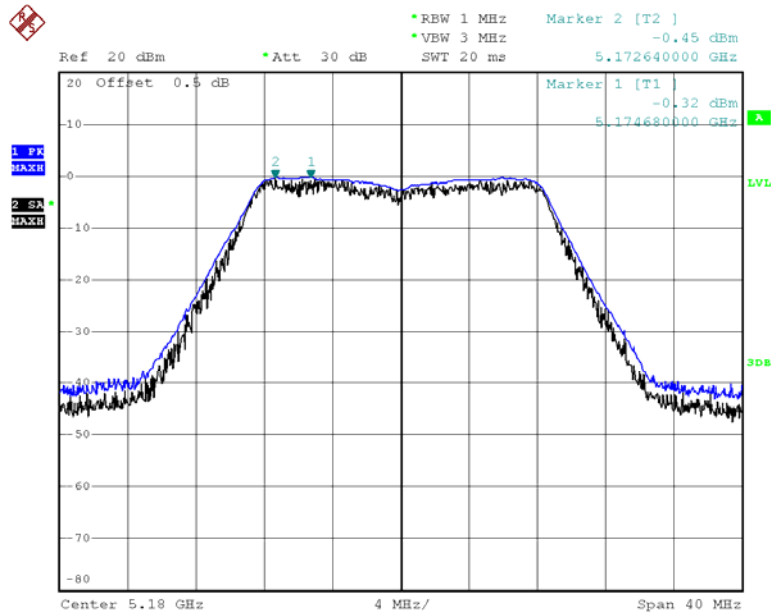


Date: 12.OCT.2013 09:44:19

Chain 1:802.11 ac20 Peak Excursion, Middle Channel

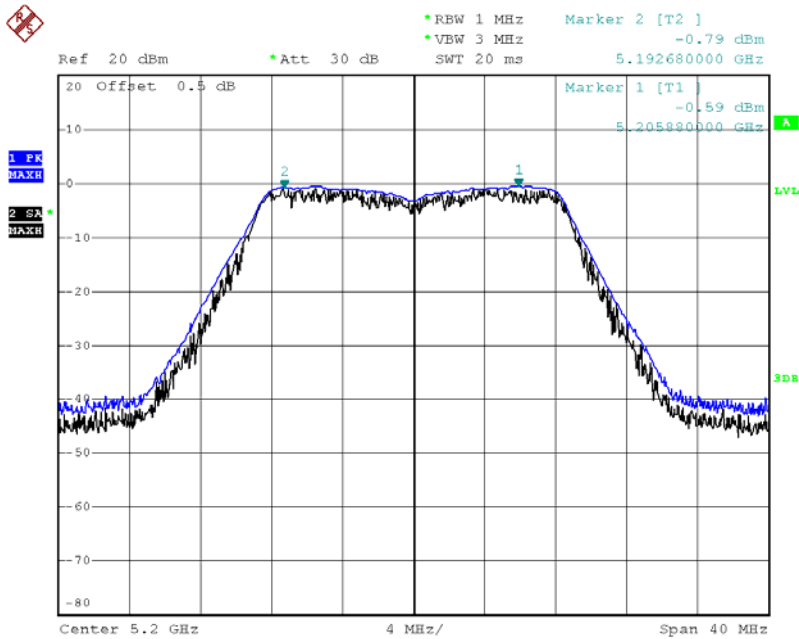


Date: 12.OCT.2013 09:50:09

Chain 1:802.11 ac20 Peak Excursion, High Channel

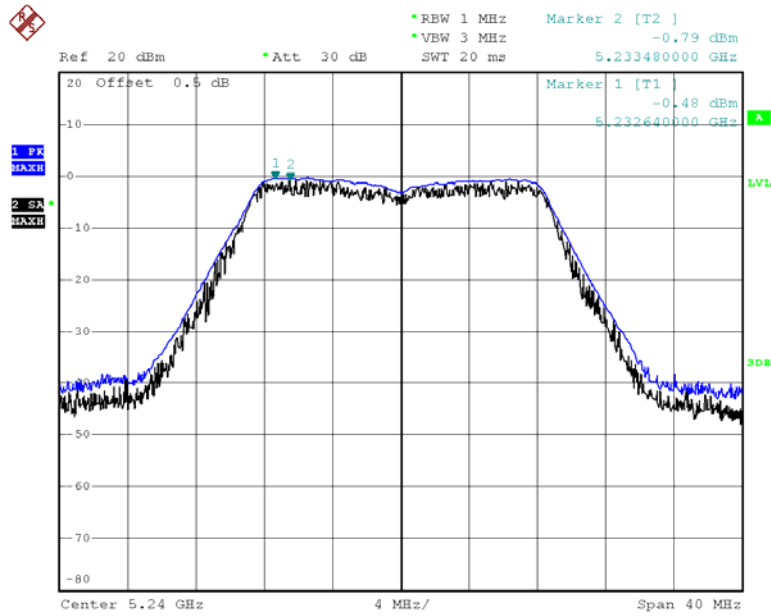


Date: 12.OCT.2013 09:55:59

Chain 0:802.11 ac40 Peak Excursion, Low Channel

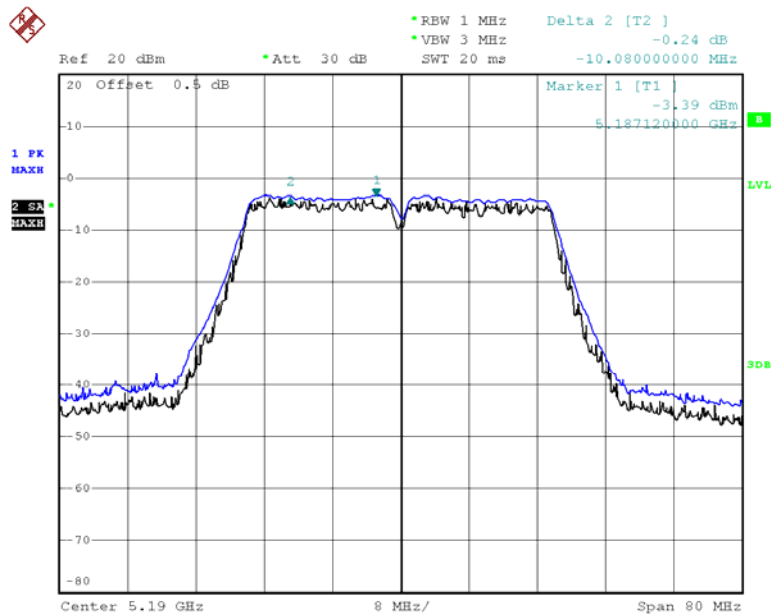


Date: 10.OCT.2013 20:03:14

Chain 0:802.11 ac40 Peak Excursion, High Channel

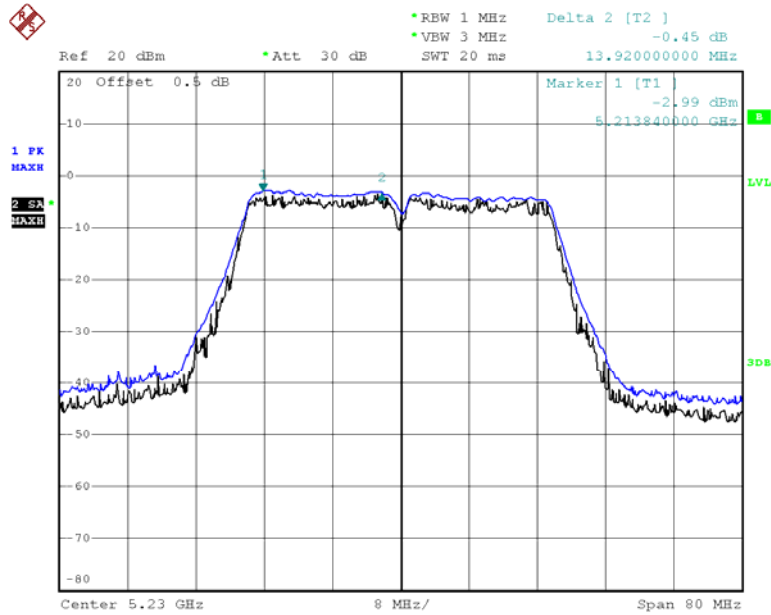


Date: 10.OCT.2013 20:20:42

Chain 1:802.11 ac40 Peak Excursion, Low Channel

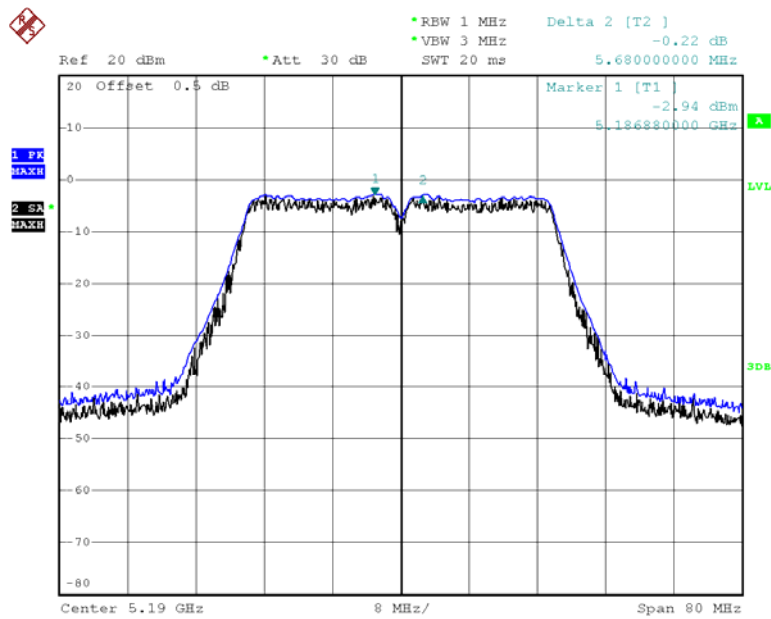


Date: 12.OCT.2013 10:06:13

Chain 1:802.11 ac40 Peak Excursion, High Channel

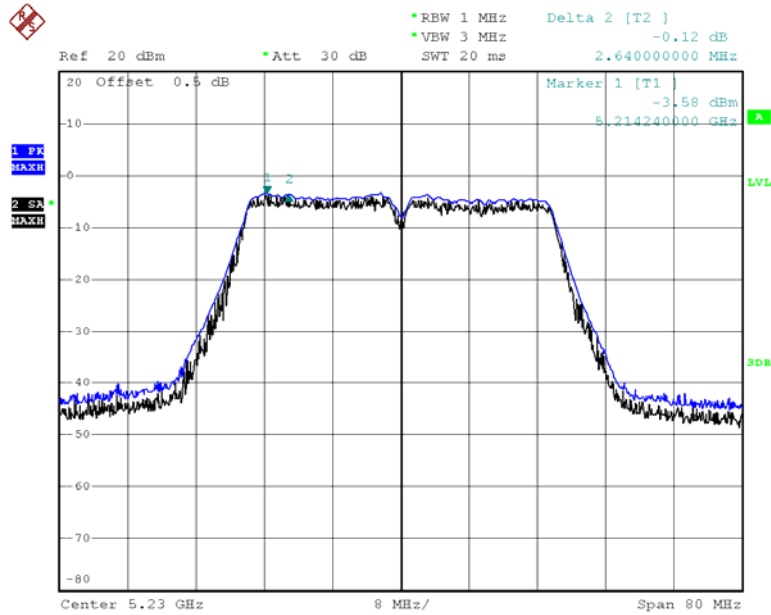


Date: 12.OCT.2013 10:14:01

Chain 0:802.11 ac80 Peak Excursion, Low Channel

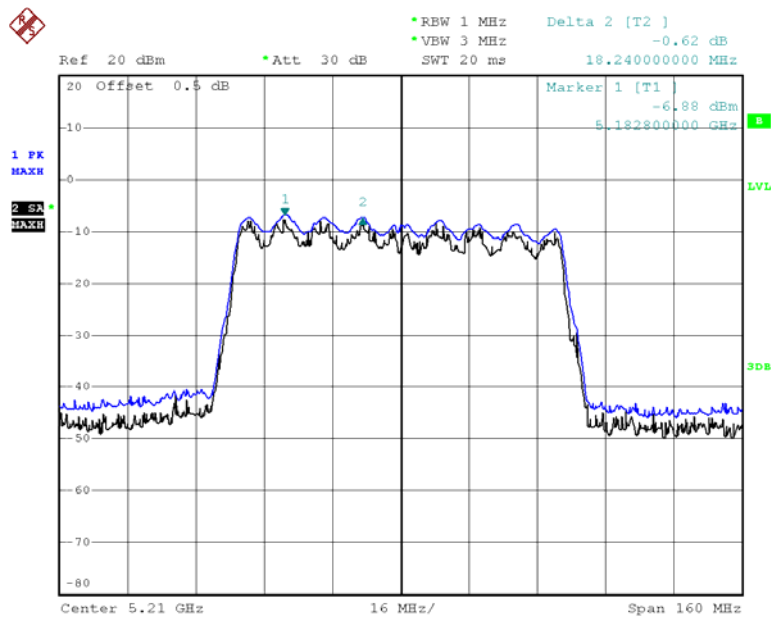

Date: 10.OCT.2013 20:30:26

Chain 1:802.11 ac80 Peak Excursion, Low Channel

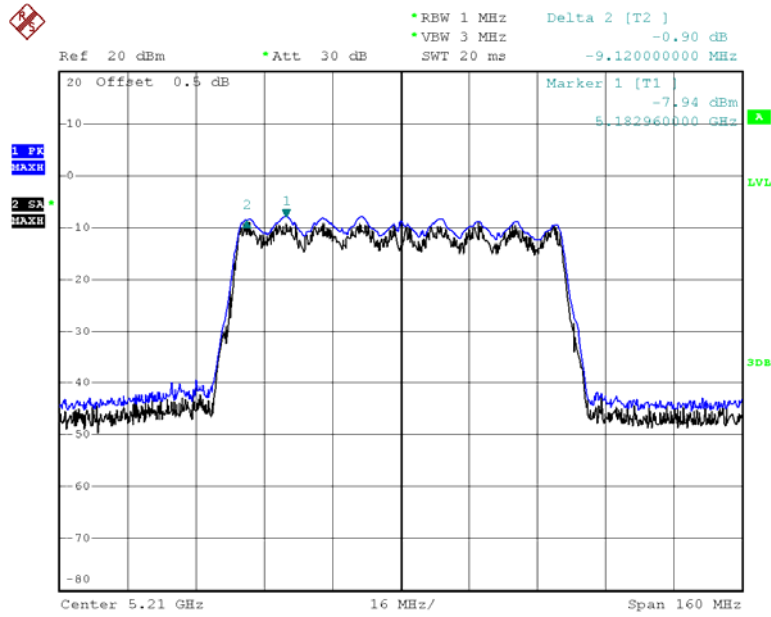

Date: 12.OCT.2013 10:53:24

***** END OF REPORT *****