



Hermon Laboratories Ltd.  
Harakevet Industrial Zone, Binyamina 30500,  
Israel  
Tel. +972-4-6288001  
Fax. +972-4-6288277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B

FOR:  
**SCR Engineers Ltd.**  
**Activity based tag**  
**Model: H-TAG-LD**  
**FCC ID:AMUT01**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT.....	5
6.4	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	7
7.1	Field strength of emissions.....	7
7.2	Band edge emission.....	27
7.3	Antenna requirements.....	31
7.4	Occupied bandwidth test.....	32
8	Emission tests according to 47CFR part 15 subpart B requirements .....	36
8.1	Radiated emission measurements .....	36
9	APPENDIX A Test equipment and ancillaries used for tests.....	43
10	APPENDIX B Measurement uncertainties.....	44
11	APPENDIX C Test laboratory description .....	45
12	APPENDIX D Specification references .....	45
13	APPENDIX E Test equipment correction factors.....	46
14	APPENDIX F Abbreviations and acronyms.....	52



## 1 Applicant information

**Client name:** SCR Engineers Ltd.  
**Address:** 18 Hamelacha street, Industrial zone, P.O.B. 13564, Netanya 42138, Israel  
**Telephone:** +972 73 240 6053  
**Fax:** +972 9865 0703  
**E-mail:** zeevk@scr.co.il  
**Contact name:** Mr. Zeev Kapelnik

## 2 Equipment under test attributes

**Product name:** Activity based tag  
**Product type:** Transceiver  
**Model(s):** H-TAG-LD  
**Serial number:** K1202819  
**Hardware version:** Rev 09.696  
**Software release:** V6  
**Receipt date:** 22-Jul-14

## 3 Manufacturer information

**Manufacturer name:** SCR Engineers Ltd.  
**Address:** 18 Hamelacha street, Industrial zone, P.O.B. 13564, Netanya 42138, Israel  
**Telephone:** +972 73 240 6053  
**Fax:** +972 9865 0703  
**E-Mail:** zeevk@scr.co.il  
**Contact name:** Mr. Zeev Kapelnik

## 4 Test details




**Project ID:** 25954  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 22-Jul-14  
**Test completed:** 04-Aug-14  
**Test specification(s):** FCC 47 CFR Part 15, subpart C, §15.249; subpart B §15.109

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 15.249(a)(d), Field strength of emissions	Pass
Section 15.249(d), Band edge emissions	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Section 15.215(c), Occupied bandwidth	Pass
<b>Unintentional emissions</b>	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.  
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:SCRRAD\_FCC.25954\_H\_rev2.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Chaplik, test engineer	August 4, 2014	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	February 22, 2015	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group manager	February 22, 2015	

## 6 EUT description

### 6.1 General information


The EUT, H-TAG-LD, is an activity based tag, including the RF transceiver operating in 2.4 GHz band. The tag is mounted on a collar on the animal neck, used for the following:

- 1) an identification of animal using RF and/or optical unit;
- 2) to measure various animal parameters, to process and transmit them via RF.

The tag initiates transmission of 3 messages/hour by itself or upon request from ID unit.

The EUT is equipped with an integral printed on PCB antenna and is powered by 3.6 V internal battery.

### 6.2 Test configuration

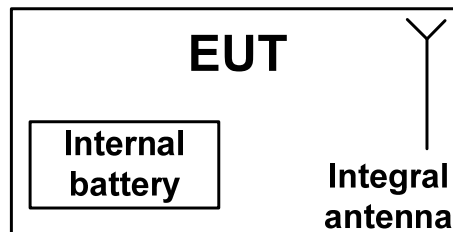

### 6.3 Changes made in EUT

No changes were performed in the EUT.



### 6.4 Transmitter characteristics

<b>Type of equipment</b>					
<b>V</b>	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
<b>Assigned frequency range</b>		2400 – 2483.5 MHz			
<b>Operating frequency range</b>		2405 – 2480 MHz			
<b>RF channel spacing</b>		5 MHz			
<b>Maximum field strength of carrier at 3 m distance</b>		101 dBµV/m (peak), 60.47 dBµV/m (average)			
<b>Is transmitter output power variable?</b>		<b>V</b>	No		
			continuous variable		
			stepped variable with stepsize		dB
			minimum RF power		dBm
		maximum RF power		dBm	
<b>Antenna connection</b>					
unique coupling	standard connector	<b>V</b>	Integral	with temporary RF connector	
				<b>V</b>	without temporary RF connector
<b>Antenna/s technical characteristics</b>					
Type	Manufacturer	Model number		Gain	
Integral	SCR Engineers Ltd.	Printed		1 dBi	
<b>Transmitter aggregate data rate/s</b>		250 kbps			
<b>Type of modulation</b>		QPSK			
<b>Modulating test signal (baseband)</b>		PRBS			
<b>Maximum transmitter duty cycle in normal use</b>		0.001%			
<b>Transmitter power source</b>					
<b>V</b>	Battery	<b>Nominal rated voltage</b>	3.6 V	Battery type	
	DC	<b>Nominal rated voltage</b>			
	AC mains	<b>Nominal rated voltage</b>		Frequency	Hz



<b>Test specification:</b>	<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Field strength of emissions

#### 7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2, Table 7.1.3.

**Table 7.1.1 Radiated fundamental emission limits**

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Peak	Average	Quasi-Peak
2400 – 2483.5	114.0	94.0	NA

**Table 7.1.2 Harmonics limits**

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
2400 – 2483.5	74.0	54.0

**Table 7.1.3 Radiated spurious emissions limits (other than harmonics)**

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			Attenuation below carrier
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S_2} = Lim_{S_1} + 40 \log (S_1/S_2),$$

where S<sub>1</sub> and S<sub>2</sub> – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

**Note:** The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.



<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
		<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band**

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.2.3 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.


**7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz**

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.3 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

**Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz**

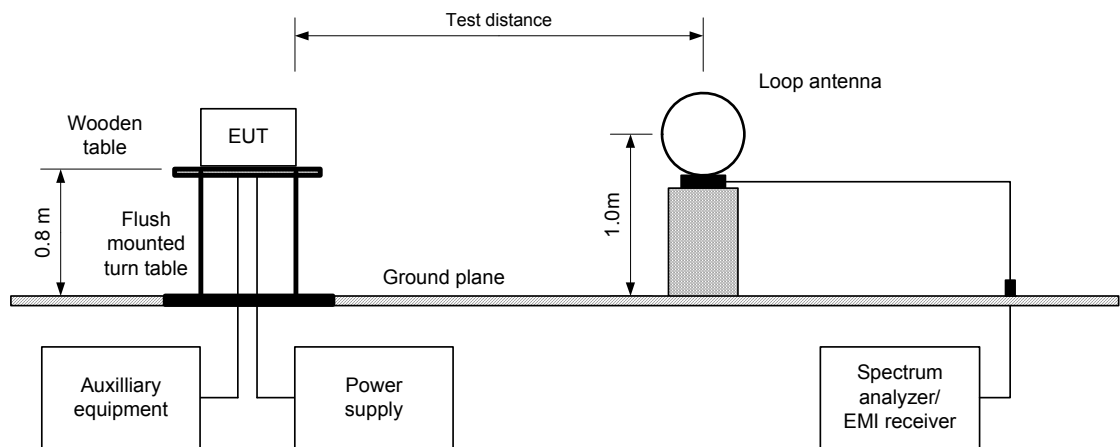






<b>Test specification:</b>	<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

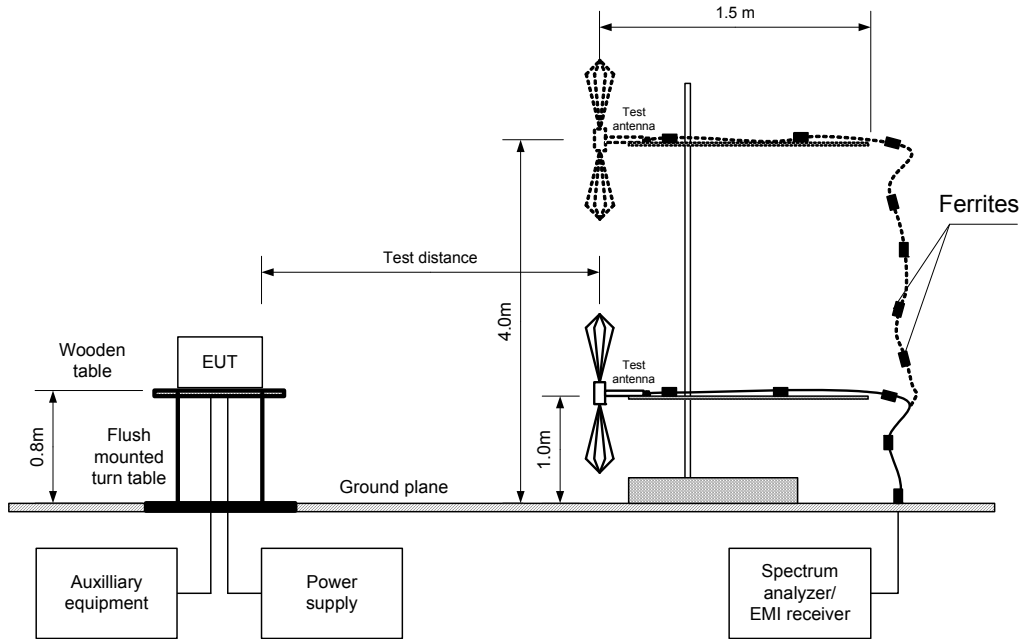



<b>Test specification:</b>	<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Table 7.1.4 Field strength of fundamental emission and spurious emissions**

TEST DISTANCE: 3 m  
 EUT POSITION: Typical  
 MODULATION: QFSK  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 25000 MHz  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 1.0 MHz (above 1000 MHz)  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**		Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
<b>Fundamental emission</b>											
2405	V	1.0	60	97.83	114.00	-16.17	-40.6	57.23	94.00	-36.77	Pass
2445	V	1.4	360	99.76	114.00	-14.24	-40.6	59.16	94.00	-34.84	Pass
2480	V	1.4	250	101.07	114.00	-12.93	-40.6	60.47	94.00	-33.53	Pass
<b>Spurious emissions</b>											
4810	V	1.0	270	59.36	74.00	-14.64	-40.6	18.76	54.00	-35.24	Pass
4890	V	1.0	360	58.68	74.00	-15.32	-40.6	18.08	54.00	-35.92	Pass
4960	V	1.0	360	57.86	74.00	-16.14	-40.6	17.26	54.00	-36.74	Pass

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin, dB = Measured (calculated) value, dB(µV/m) - Limit, dB(µV/m).

**Table 7.1.5 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
0.9333	1000	NA	NA	NA	-40.6

\*- Average factor was calculated as follows  
 for pulse train shorter than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$   
 for pulse train longer than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 0768	HL 1984	HL 2780	HL 3135	HL 3901
HL 4114	HL 4160	HL 4353	HL 4722				

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.1.1 Radiated emission measurements at the low fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Typical (Vertical)

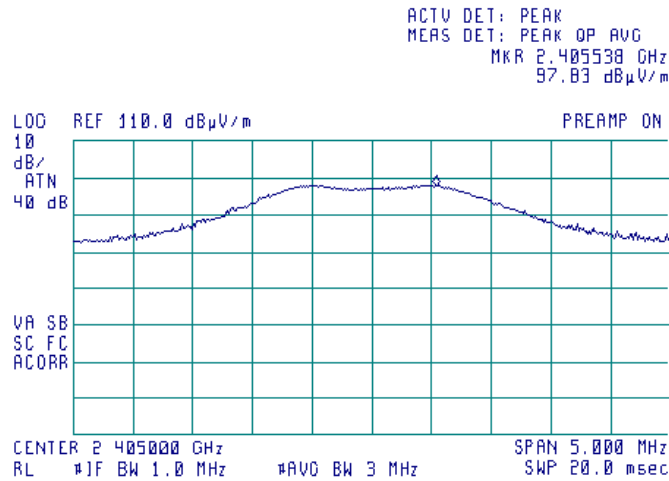

**Plot 7.1.2 Radiated emission measurements at the low fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Typical (Vertical)

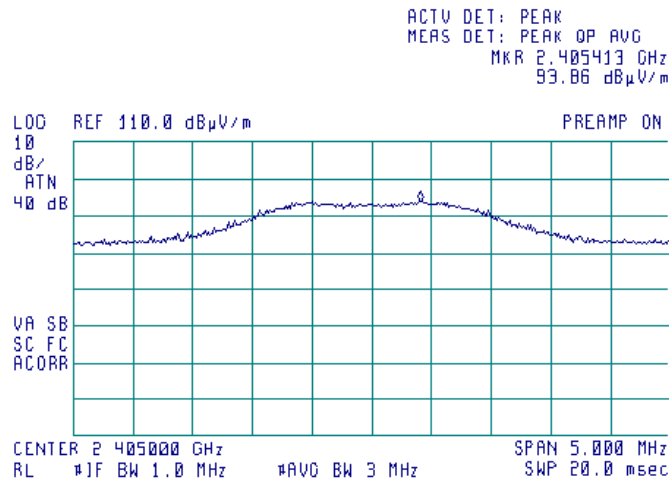




HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.1.3 Radiated emission measurements at the mid fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Typical (Vertical)

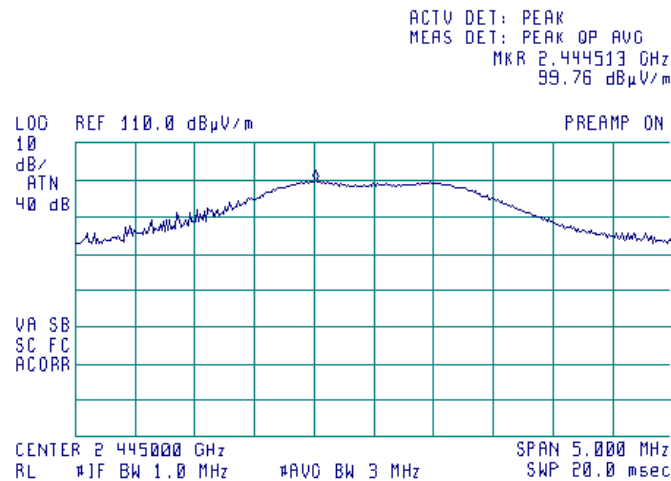

**Plot 7.1.4 Radiated emission measurements at the mid fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Typical (Vertical)

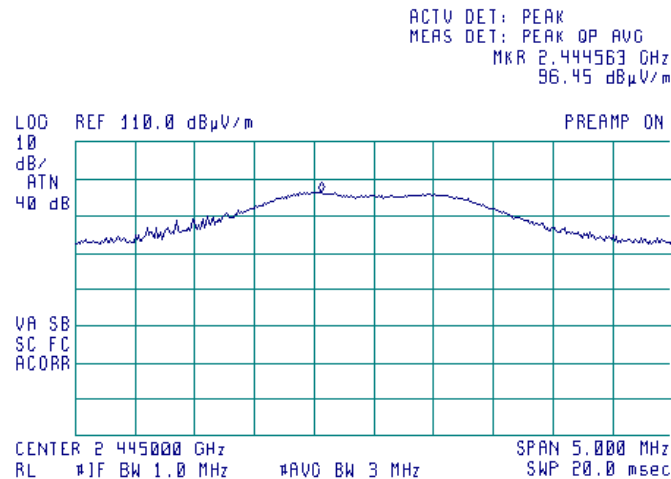




HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 7.1.5 Radiated emission measurements at the high fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Typical (Vertical)

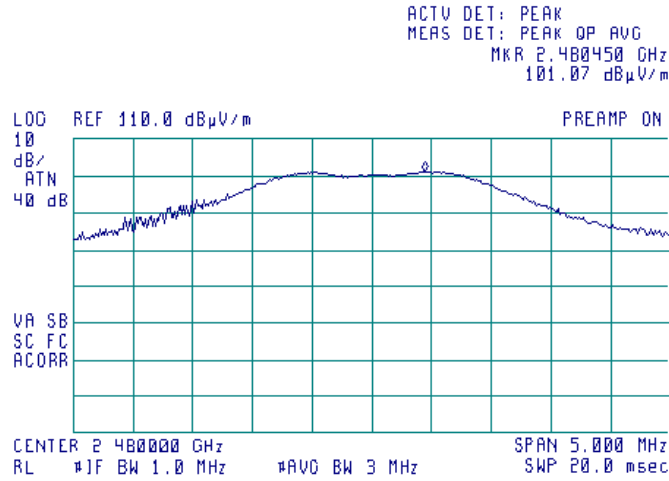

**Plot 7.1.6 Radiated emission measurements at the high fundamental frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Typical (Vertical)

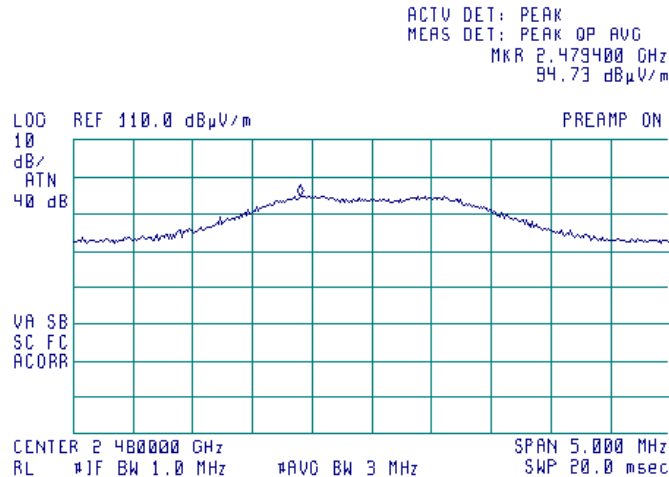



HERMON LABORATORIES


<b>Test specification:</b>	<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Plot 7.1.7 Radiated emission measurements from 9 to 150 kHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Typical (Vertical)  
OPERATING FREQUENCY: Low; mid; high



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 12.6 kHz  
66.46 dBµV/m

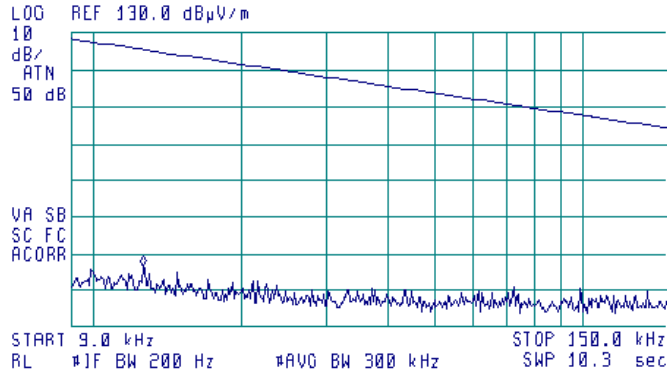


**Plot 7.1.8 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Typical (Vertical)  
OPERATING FREQUENCY: Low; mid; high



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 150 kHz  
50.55 dBµV/m

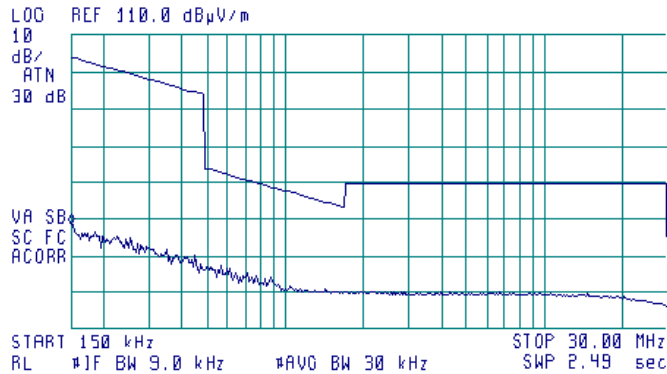




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
		<b>Relative Humidity:</b> 45 %	
		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			

**Plot 7.1.9 Radiated emission measurements from 30 to 1000 MHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Typical (Vertical)  
OPERATING FREQUENCY: Low; Mid; High

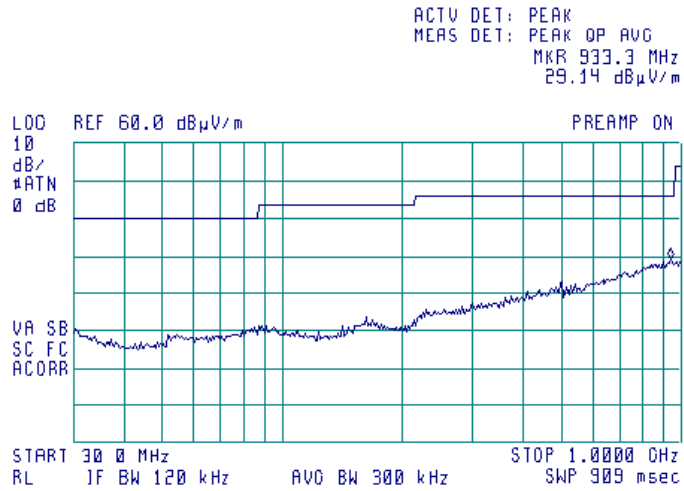




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
<b>Relative Humidity:</b> 45 %		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			
		<b>Verdict: PASS</b>	


Plot 7.1.10 Radiated emission measurements from 1.0 to 2.4 GHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Low

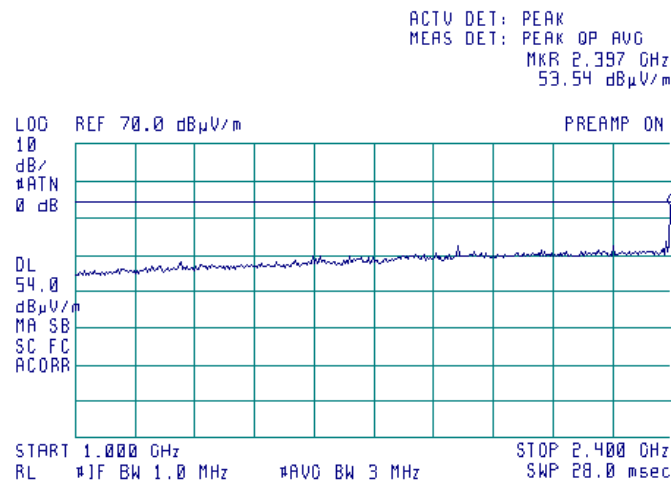

Plot 7.1.11 Radiated emission measurements from 1.0 to 2.4 GHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Mid; High

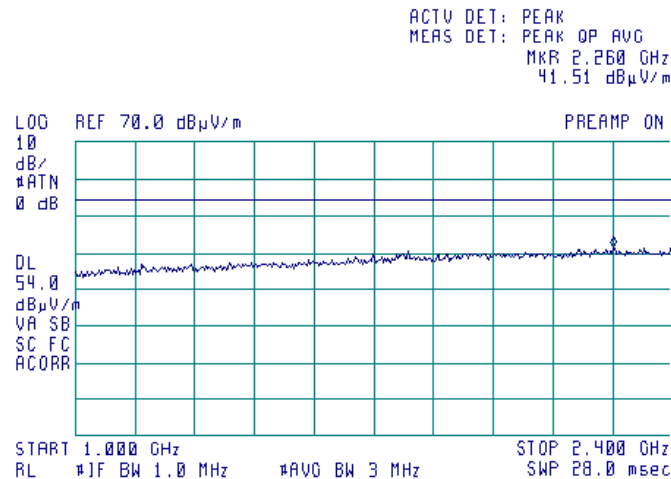






HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
<b>Relative Humidity:</b> 45 %		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			
		<b>Verdict: PASS</b>	


Plot 7.1.12 Radiated emission measurements from 2.4 to 2.4835 GHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Low

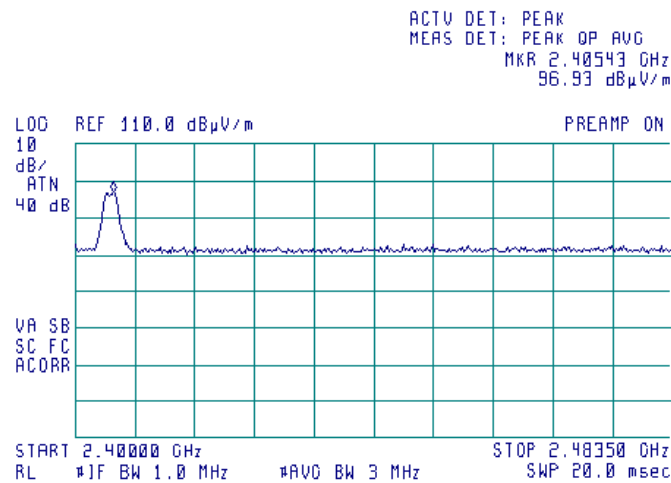

Plot 7.1.13 Radiated emission measurements from 2.4 to 2.4835 GHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Mid

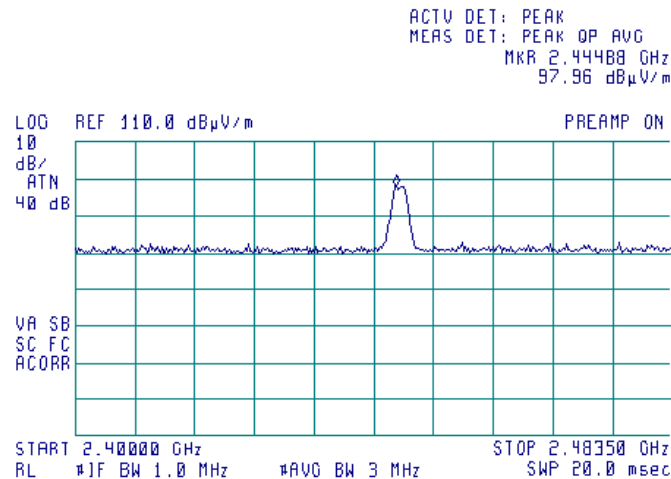




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
<b>Relative Humidity:</b> 45 %		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			


**Plot 7.1.14 Radiated emission measurements from 2.4 to 2.4835 GHz**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: High

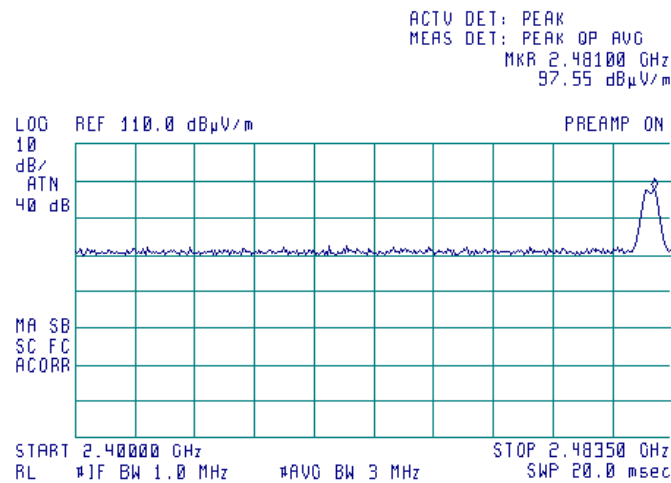

**Plot 7.1.15 Radiated emission measurements from 2.4835 to 2.9 GHz**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Low; Mid;

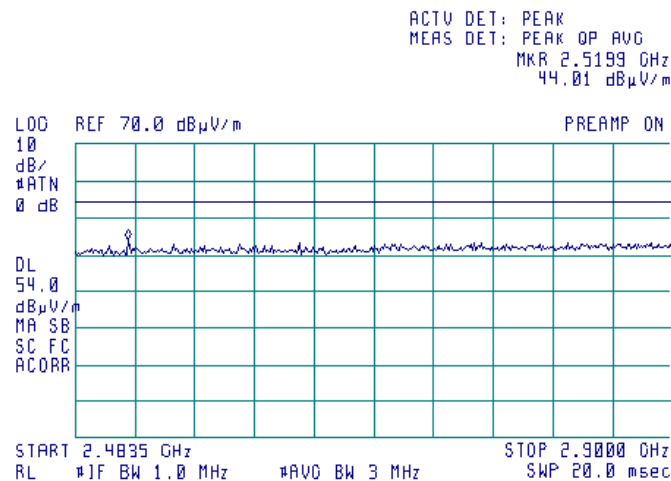




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
<b>Relative Humidity:</b> 45 %		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			
		<b>Verdict: PASS</b>	


**Plot 7.1.16 Radiated emission measurements from 2.4835 to 2.9 GHz**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: High

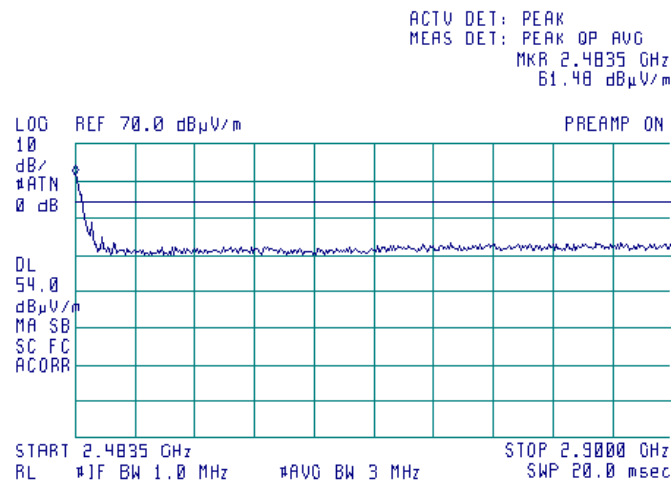

**Plot 7.1.17 Radiated emission measurements from 2.9 to 6.5 MHz**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Low

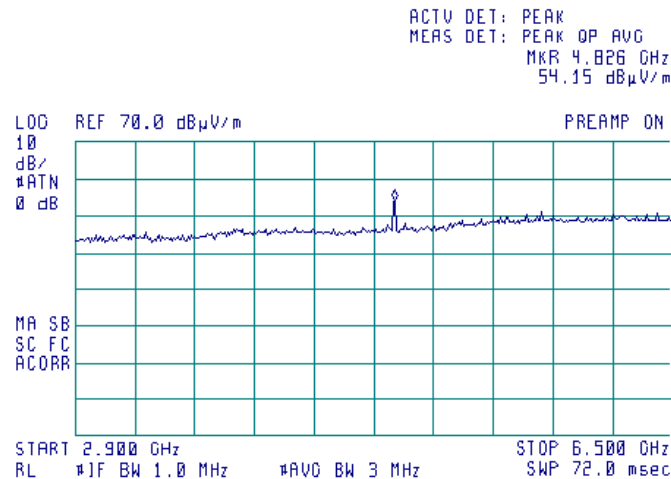




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
<b>Relative Humidity:</b> 45 %		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			
		<b>Verdict: PASS</b>	


Plot 7.1.18 Radiated emission measurements from 2.9 to 6.5 MHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Mid

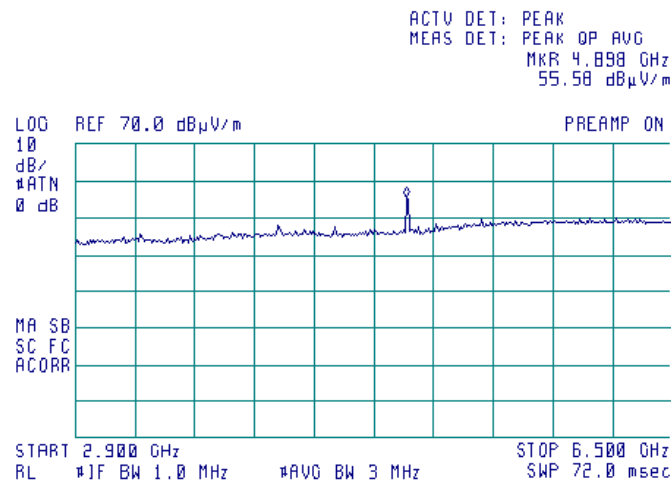

Plot 7.1.19 Radiated emission measurements from 2.9 to 6.5 MHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: High

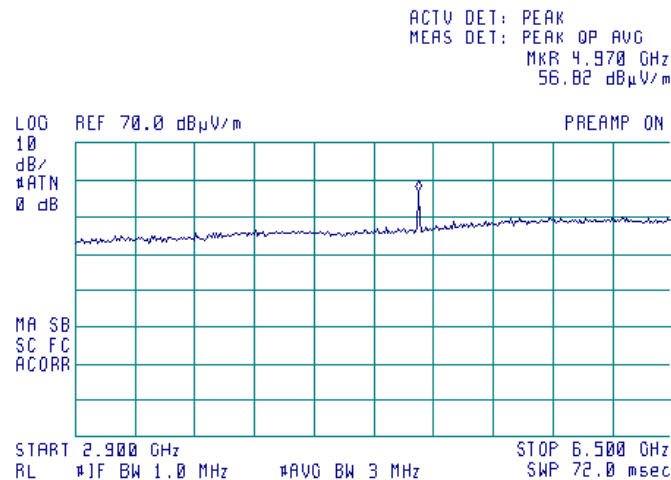




HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa
<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>	


### Plot 7.1.20 Radiated emission measurements from 6.5 to 14.0 GHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Low; Mid; High

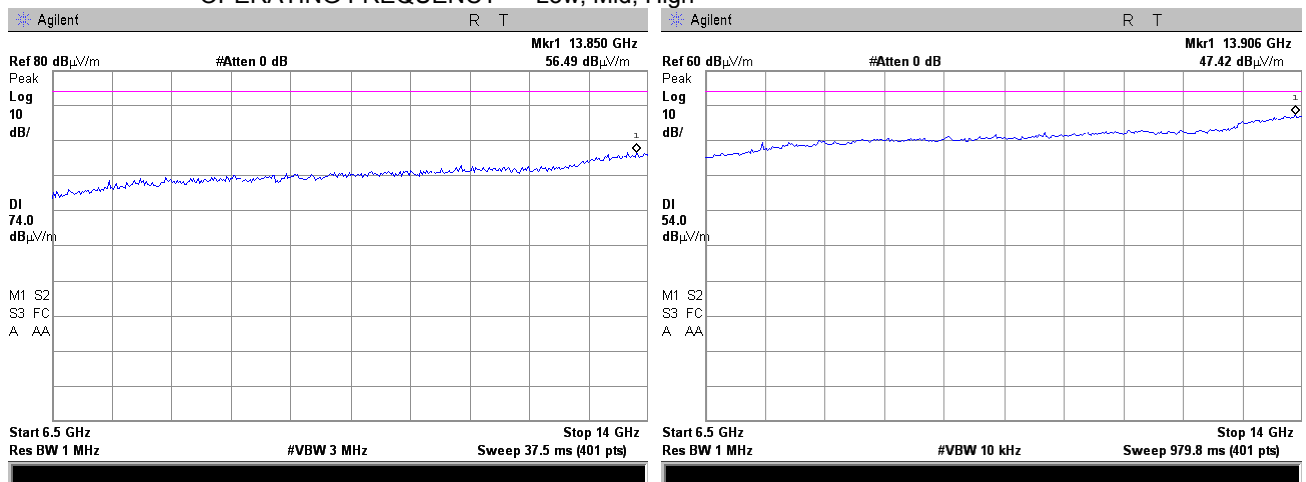

### Plot 7.1.21 Radiated emission measurements from 14.0 to 18.0 GHz

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 EUT POSITION: Typical (Vertical)  
 OPERATING FREQUENCY: Low; Mid; High

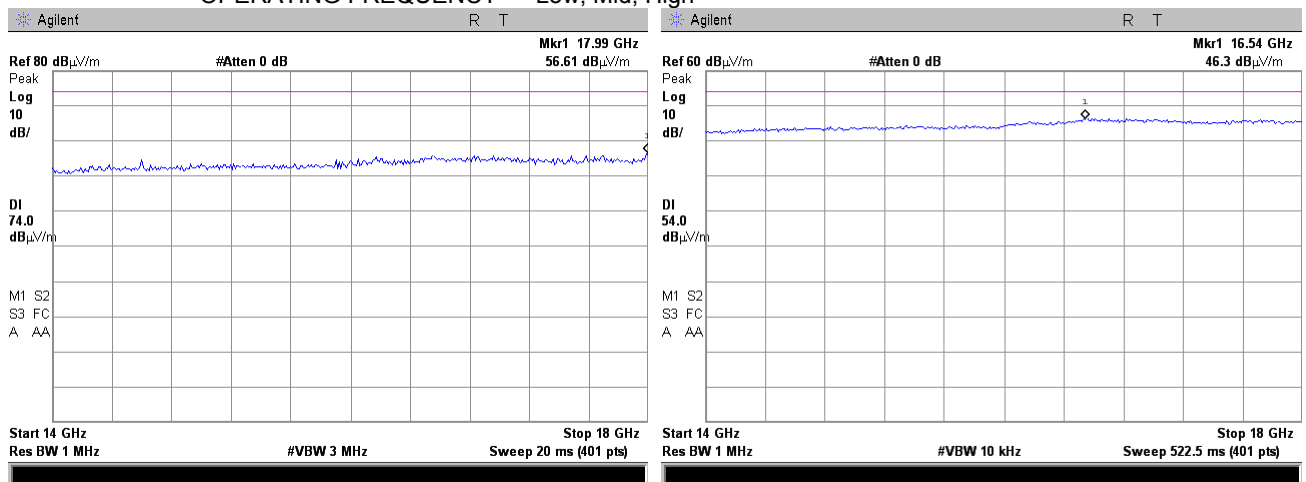





HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Plot 7.1.22 Radiated emission measurements from 18.0 to 25.0 GHz**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Typical (Vertical)  
OPERATING FREQUENCY: Low; Mid; High

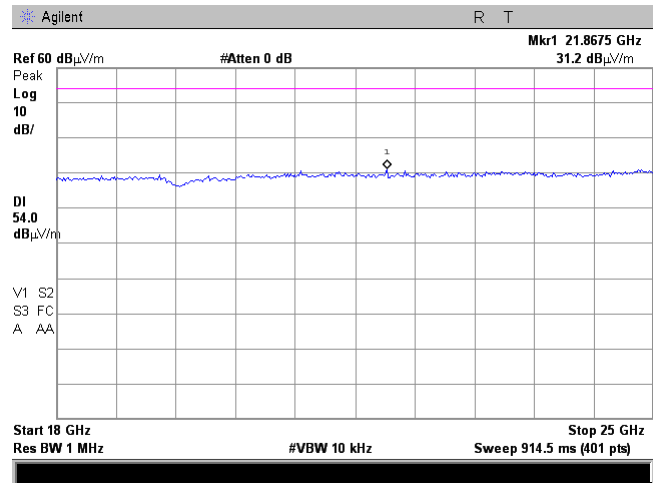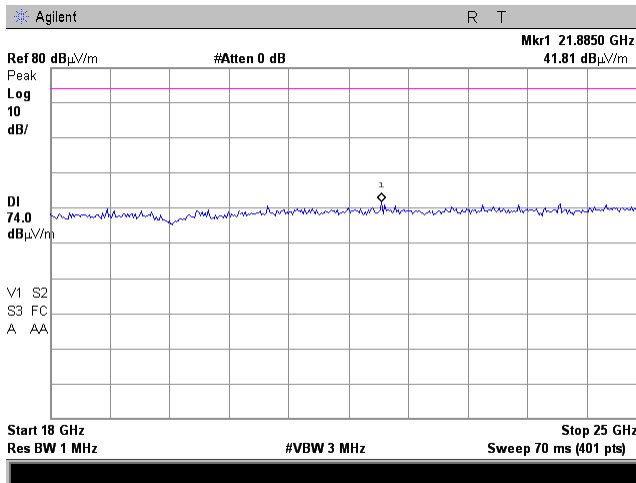




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.1.23 Radiated emission measurements at the second harmonic at low frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 EUT POSITION: Typical (Vertical)

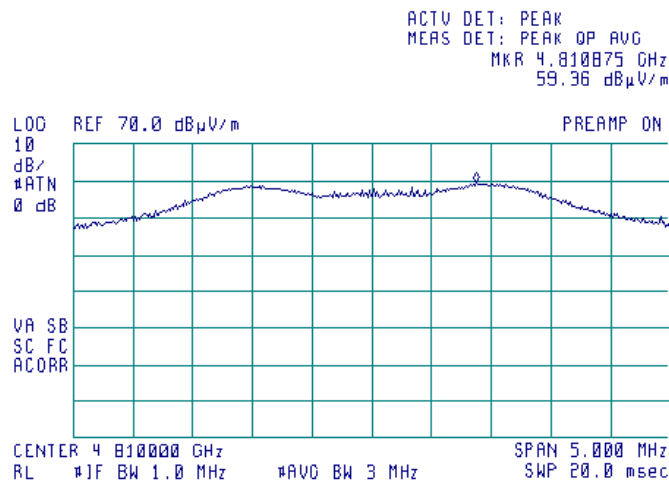

Plot 7.1.24 Radiated emission measurements at the second harmonic at low frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Horizontal  
 EUT POSITION: Typical (Vertical)

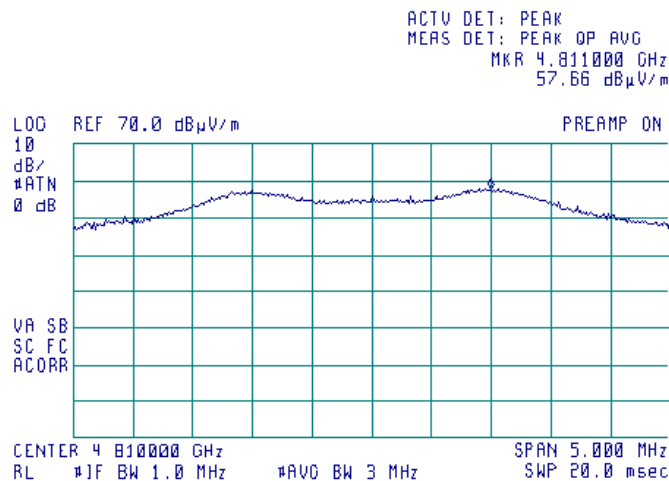




HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.1.25 Radiated emission measurements at the second harmonic at mid frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical  
EUT POSITION: Typical (Vertical)

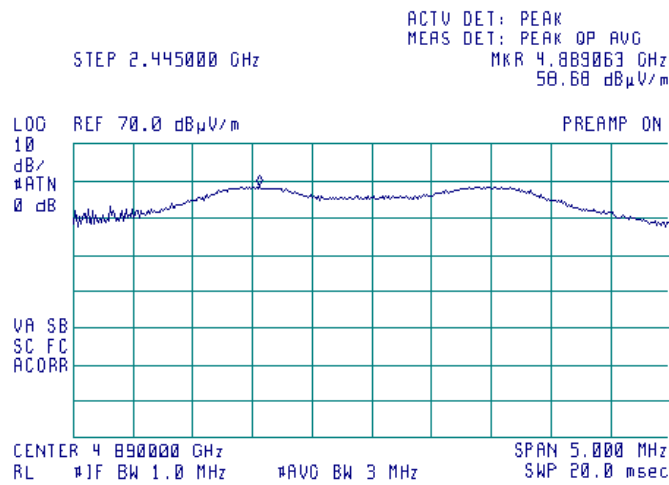

Plot 7.1.26 Radiated emission measurements at the second harmonic at mid frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Typical (Vertical)

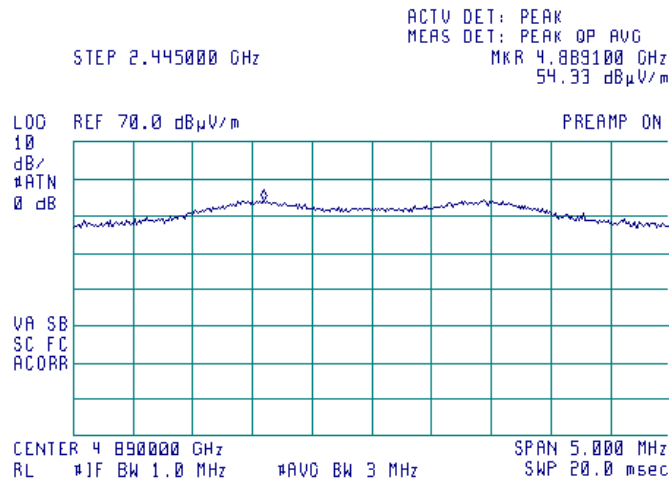






HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


Plot 7.1.27 Radiated emission measurements at the second harmonic at high frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 EUT POSITION: Typical (Vertical)

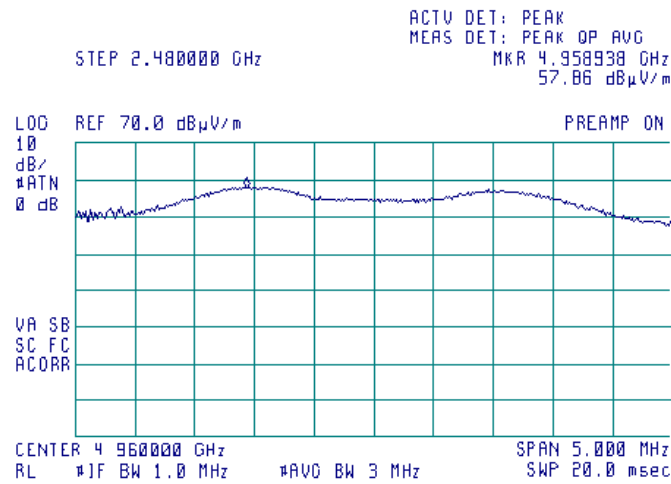

Plot 7.1.28 Radiated emission measurements at the second harmonic at high frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Horizontal  
 EUT POSITION: Typical (Vertical)

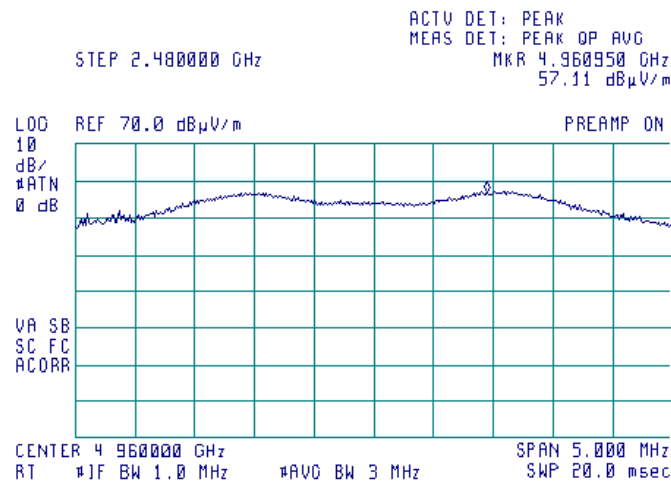





HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		23-Jul-14 - 04-Aug-14	
<b>Temperature:</b> 24.7 °C		<b>Air Pressure:</b> 1006 hPa	
		<b>Relative Humidity:</b> 45 %	
		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			
		<b>Verdict: PASS</b>	

Plot 7.1.29 Transmission pulse duration

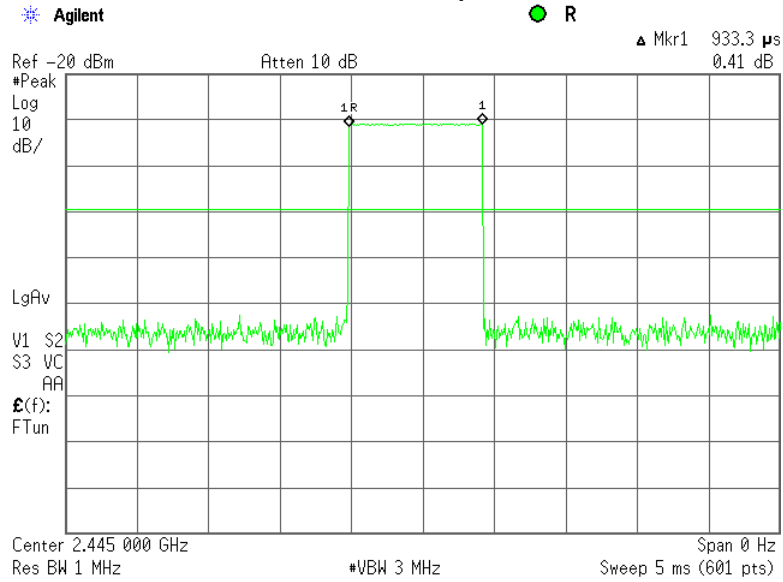

Plot 7.1.30 Transmission pulse period

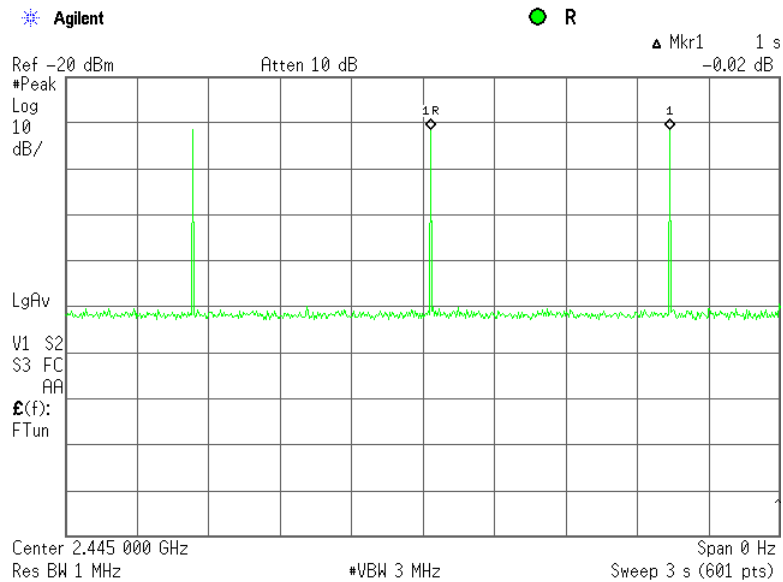



<b>Test specification:</b>	<b>Section 15.249(d)/RSS-210, section A2.9, Band edge emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	24-Jul-14		
<b>Temperature:</b> 25.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 7.2 Band edge emission

### 7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dBµV/m		Attenuation below carrier, dBc
	Peak	Average	
2400-2483.5	74.0	54.0	50

### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.


7.2.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.2.2.4 The test results were recorded in Table 7.2.2 and shown in the associated plots.



<b>Test specification:</b>	<b>Section 15.249(d)/RSS-210, section A2.9, Band edge emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	24-Jul-14		
<b>Temperature:</b> 25.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Figure 7.2.1 Band edge emission measurement set up

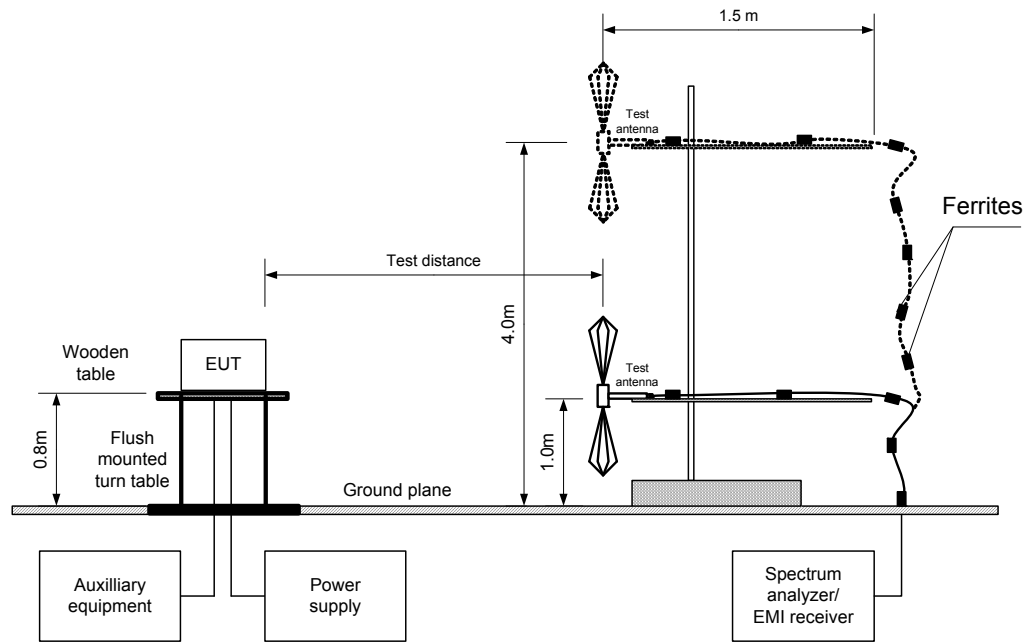



<b>Test specification:</b>		<b>Section 15.249(d)/RSS-210, section A2.9, Band edge emissions</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		24-Jul-14	
<b>Temperature:</b> 25.7 °C		<b>Air Pressure:</b> 1006 hPa	
<b>Remarks:</b>		<b>Relative Humidity:</b> 41 %	
		<b>Power Supply:</b> Battery	
<b>Verdict: PASS</b>			

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 2400-2483.5 MHz  
DETECTOR USED: Peak hold  
RESOLUTION BANDWIDTH: 1 MHz  
VIDEO BANDWIDTH: 3 MHz  
MODULATION: QFSK  
MODULATING SIGNAL: PRBS  
BIT RATE: 250 kbps  
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Modulation envelope		Spurious emission, dBµV/m	Limit, dBµV/m	Margin, dB**	Verdict
Edge	Frequency, MHz*				
Low	2400.0	70.97	74	-3.03	Pass
High	2483.5	72.24	74	-1.76	Pass

\* - Measured frequency beyond which the emission dropped 50 dB below the carrier emission or below the field strength limit whichever was a less stringent

\*\* - Margin = Band edge limit – Band edge spurious

Reference numbers of test equipment used

HL 0521	HL 1984	HL 4353	HL 4722				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.249(d)/RSS-210, section A2.9, Band edge emissions			
<b>Test procedure:</b> ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 24-Jul-14			
<b>Temperature:</b> 25.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Plot 7.2.1 Low band edge emission test result**


TEST SITE: Semi Anechoic Chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical

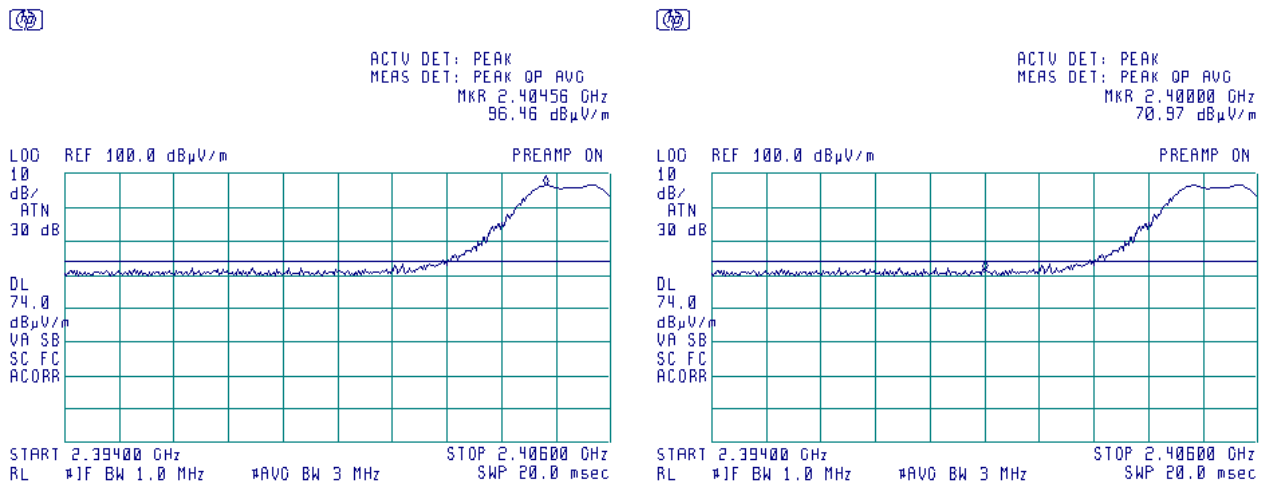

At band edge frequency 2.400 GHz the emission level is 70.97 dBµV/m, below the general spurious emission limit 74 dBµV/m

**Plot 7.2.2 High band edge emission test result**

TEST SITE: Semi Anechoic Chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Vertical

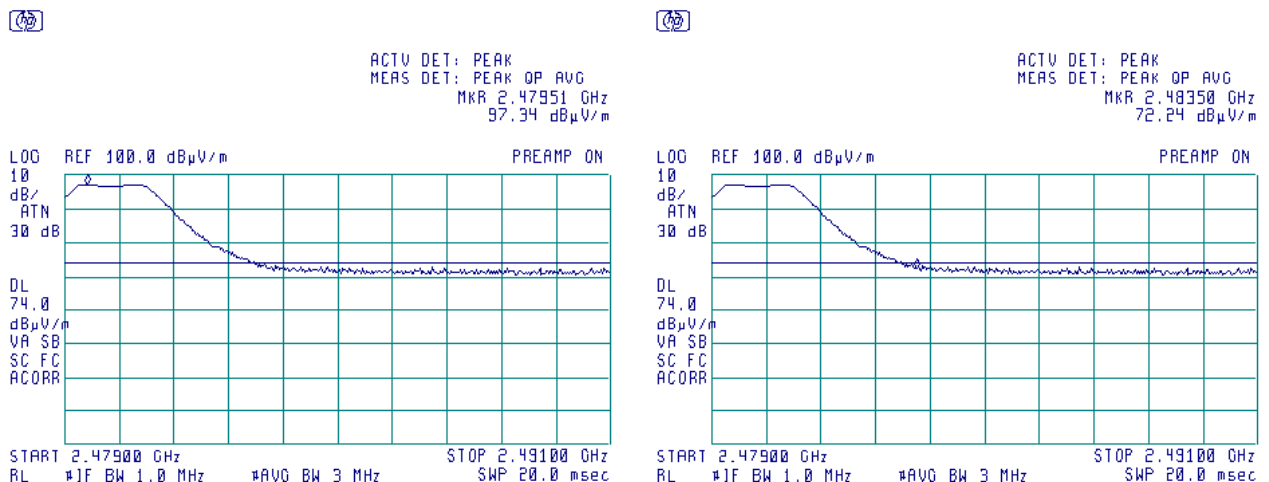

At band edge frequency 2.48350 GHz the emission level is 72.24 dBµV/m, below general surious emission limit 74 dBµV/m



<b>Test specification:</b>	<b>Section 15.203, Antenna requirement</b>		
<b>Test procedure:</b>	Visual inspection / supplier declaration		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	22-Jul-14		
<b>Temperature:</b> 25.3 °C	<b>Air Pressure:</b> 1005 hPa	<b>Relative Humidity:</b> 51 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

### 7.3 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.3.1.

Table 7.3.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.3.1 Antenna assembly

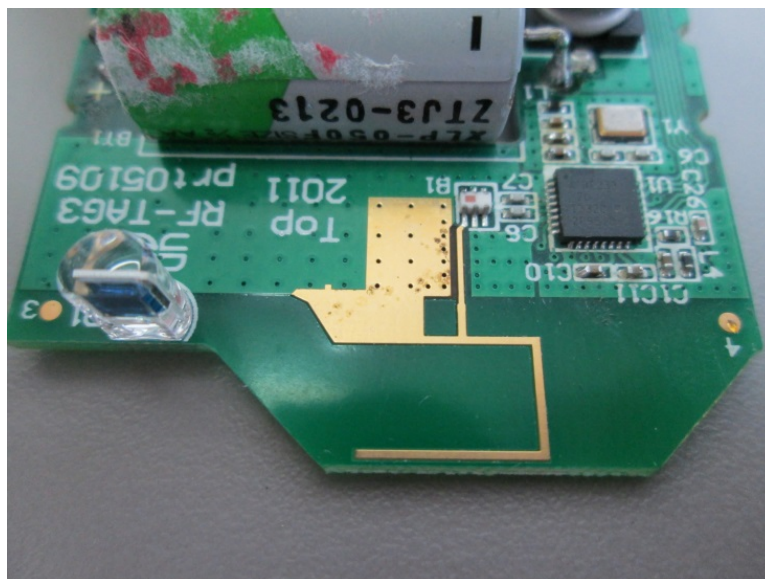



<b>Test specification:</b> Section 15.215(c), Occupied bandwidth	
<b>Test procedure:</b>	ANSI C63.4, Section 13.1.7
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	28-Jul-14
<b>Temperature:</b> 25.4 °C	<b>Air Pressure:</b> 1010 hPa
<b>Relative Humidity:</b> 40 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>	

## 7.4 Occupied bandwidth test

### 7.4.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0
2400 – 2483.5	
5725 – 5875	
24000 – 24250	

\*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

### 7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.4.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and associated plot.

7.4.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.4.1 Occupied bandwidth test setup







<b>Test specification:</b>		<b>Section 15.215(c), Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.7	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		28-Jul-14	
<b>Temperature:</b> 25.4 °C		<b>Air Pressure:</b> 1010 hPa	
<b>Remarks:</b>		<b>Verdict:</b> PASS	
		<b>Relative Humidity:</b> 40 %	
		<b>Power Supply:</b> Battery	

Table 7.4.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND: 2400 – 2483.5 MHz  
DETECTOR USED: Peak hold  
RESOLUTION BANDWIDTH: 100 kHz  
VIDEO BANDWIDTH: 300 kHz  
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc  
MODULATION: QPSK  
MODULATING SIGNAL: Enable

Frequency, MHz	OBW, kHz	Limit	Verdict
2405	2379.6	NA	Pass
2445	2448.8	NA	Pass
2480	2516.4	NA	Pass

Reference numbers of test equipment used


HL 3818								
---------	--	--	--	--	--	--	--	--

Full description is given in Appendix A.




<b>Test specification:</b>		<b>Section 15.215(c), Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.7	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		28-Jul-14	
<b>Temperature: 25.4 °C</b>		<b>Air Pressure: 1010 hPa</b>	
<b>Relative Humidity: 40 %</b>		<b>Power Supply: Battery</b>	
<b>Remarks:</b>			
		<b>Verdict: PASS</b>	

Plot 7.4.1 Occupied bandwidth test result at low frequency

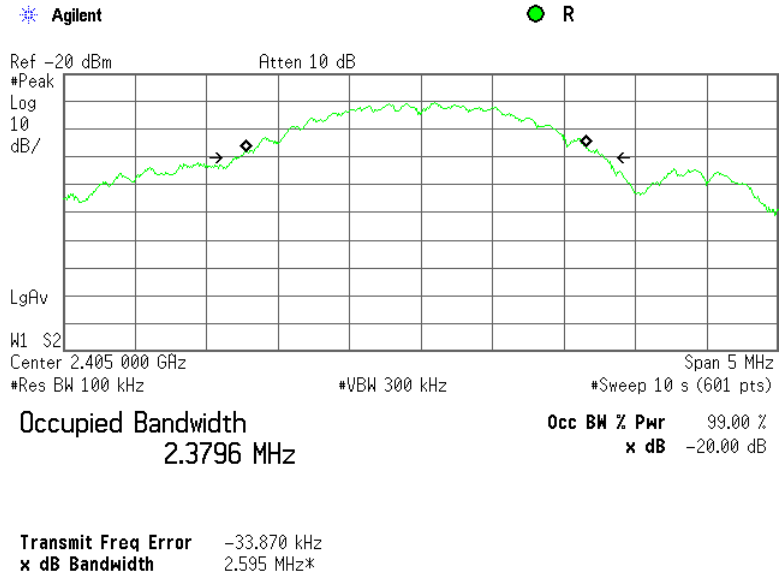

Plot 7.4.2 Occupied bandwidth test result at mid frequency

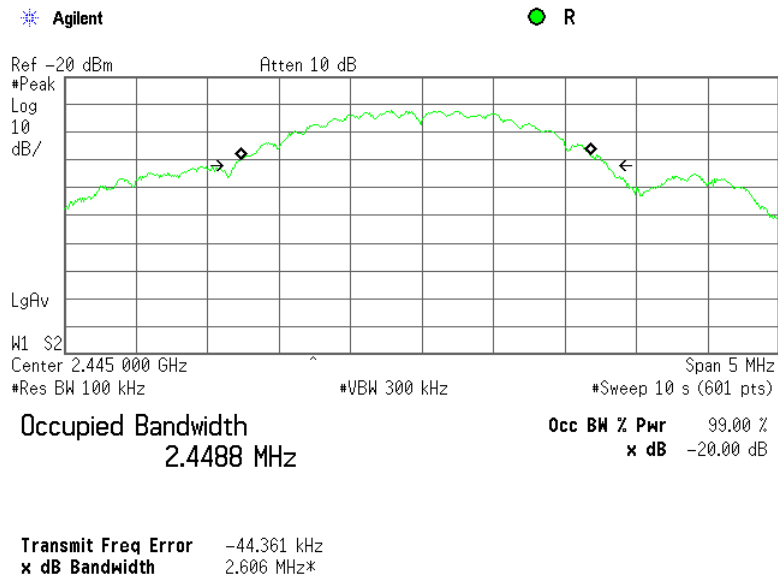




HERMON LABORATORIES

<b>Test specification:</b>		<b>Section 15.215(c), Occupied bandwidth</b>	
<b>Test procedure:</b>		ANSI C63.4, Section 13.1.7	
<b>Test mode:</b>		Compliance	
<b>Date(s):</b>		28-Jul-14	
<b>Temperature:</b> 25.4 °C		<b>Air Pressure:</b> 1010 hPa	
		<b>Relative Humidity:</b> 40 %	
		<b>Power Supply:</b> Battery	
<b>Remarks:</b>			

Plot 7.4.3 Occupied bandwidth test result at high frequency

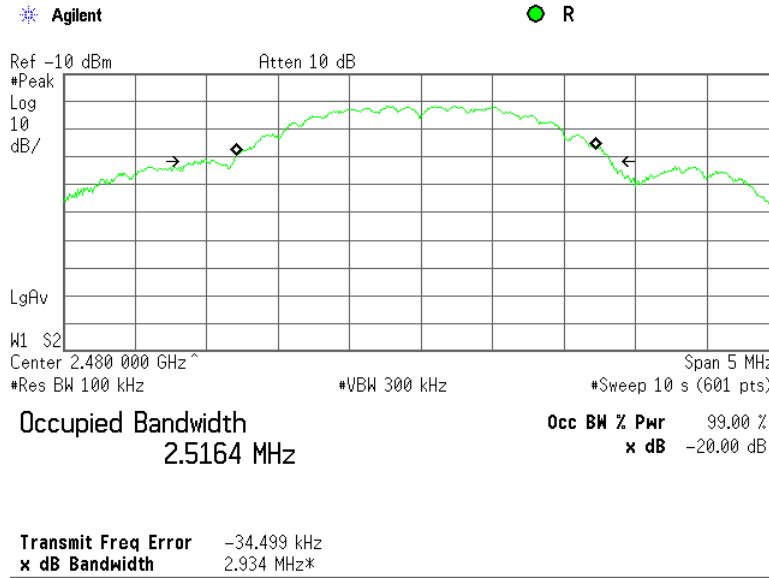



<b>Test specification:</b>	<b>Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

## 8 Emission tests according to 47CFR part 15 subpart B requirements

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

#### 8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.


8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.



<b>Test specification:</b>	<b>Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment



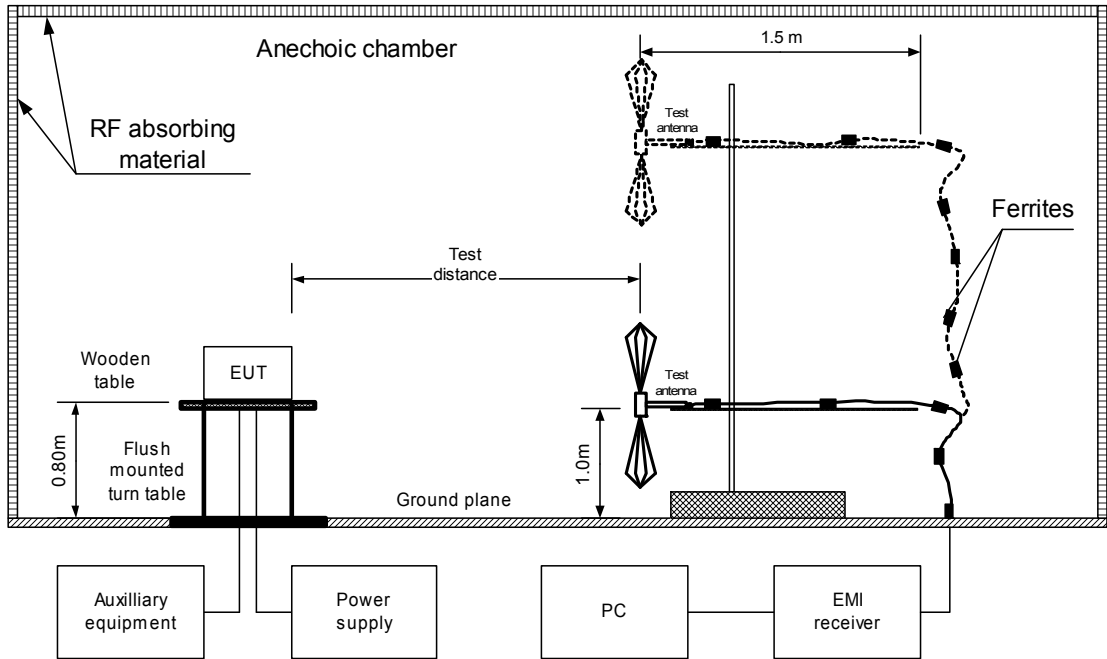




HERMON LABORATORIES

<b>Test specification:</b>	<b>Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

Photograph 8.1.1 Setup for radiated emission measurements

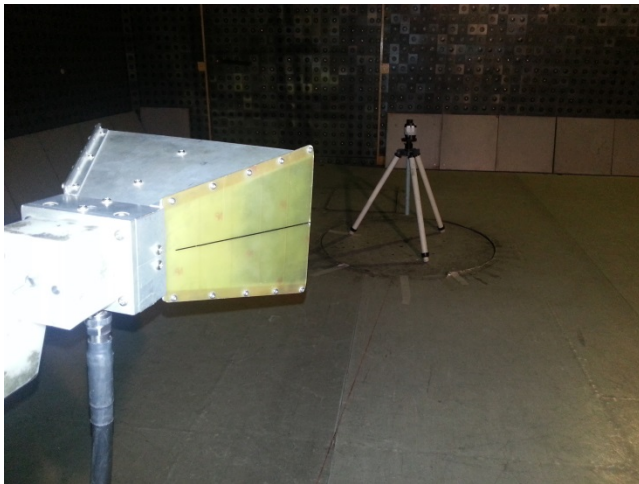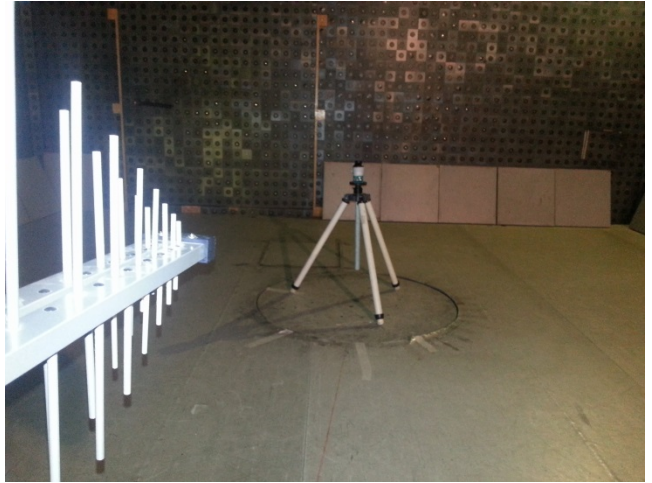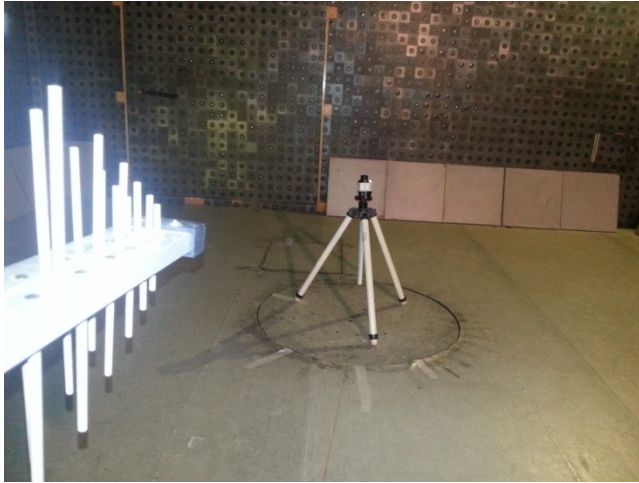



<b>Test specification:</b>	<b>Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			

**Table 8.1.2 Radiated emission test results**

EUT SET UP: TABLE-TOP  
 LIMIT: Class B  
 EUT OPERATING MODE: Receive  
 TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / QUASI-PEAK  
 FREQUENCY RANGE: 30 MHz – 1000 MHz  
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / AVERAGE  
 FREQUENCY RANGE: 1000 MHz – 12500 MHz  
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
2418.0600	45.6	74.0	-28.4	39.2	54.0	-14.8	Vertical	1.0	270	Pass

\*- Margin = Measured emission - specification limit.  
 \*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0521	HL 0604	HL 1984	HL 2780	HL 4160	HL 4353	HL 4722	
---------	---------	---------	---------	---------	---------	---------	--


Full description is given in Appendix A.



<b>Test specification:</b>	<b>Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Jul-14 - 04-Aug-14		
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

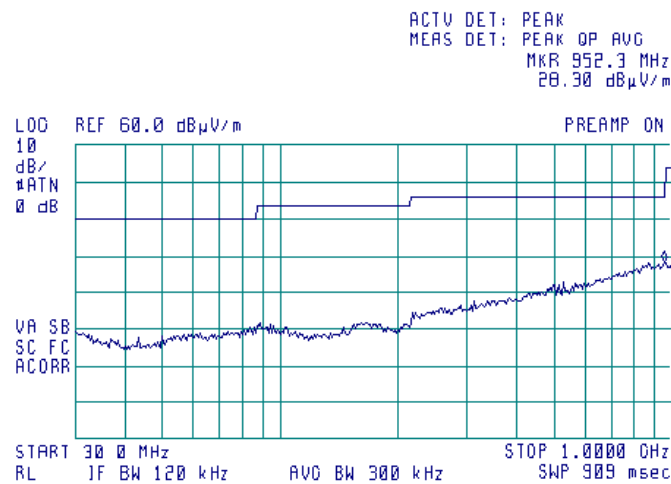

**Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

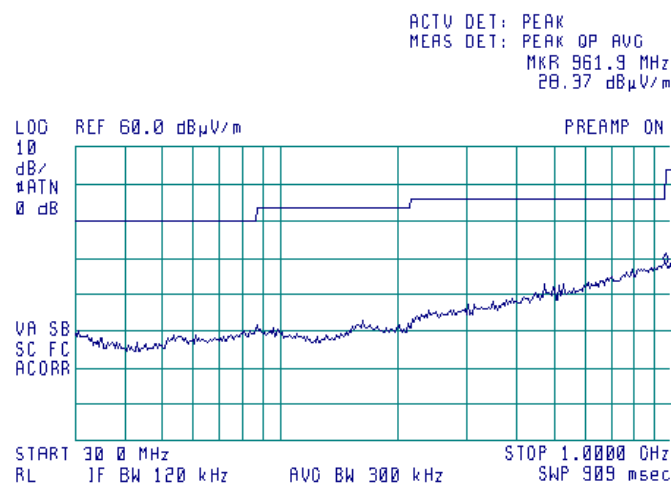






HERMON LABORATORIES

<b>Test specification:</b> Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			


**Plot 8.1.3 Radiated emission measurements in 1000 - 6500 MHz range, vertical antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

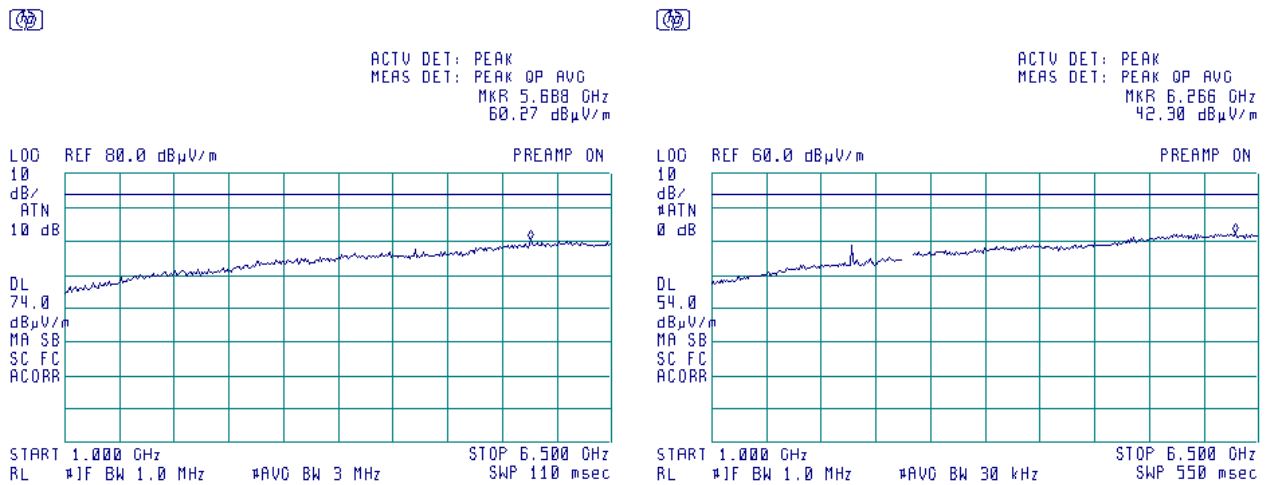

**Plot 8.1.4 Radiated emission measurements in 1000 - 6500 MHz range, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

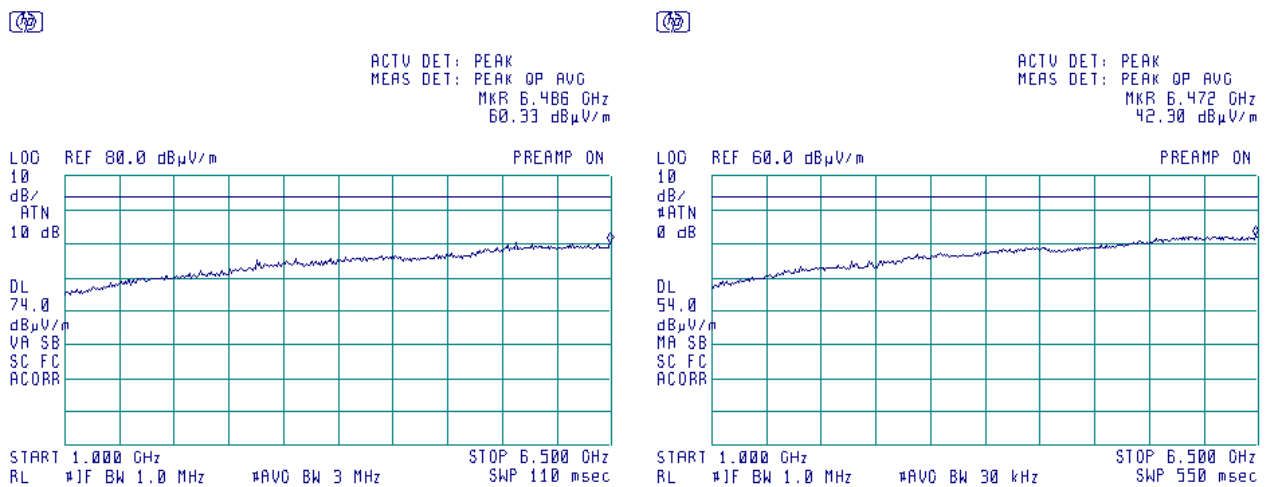





HERMON LABORATORIES

<b>Test specification:</b> Section 15.109/RSS-Gen, section 7.2.3.2, ICES-003, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Jul-14 - 04-Aug-14			
<b>Temperature:</b> 24.7 °C	<b>Air Pressure:</b> 1006 hPa	<b>Relative Humidity:</b> 45 %	<b>Power Supply:</b> Battery
<b>Remarks:</b>			



Plot 8.1.5 Radiated emission measurements in 6500 - 12500 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

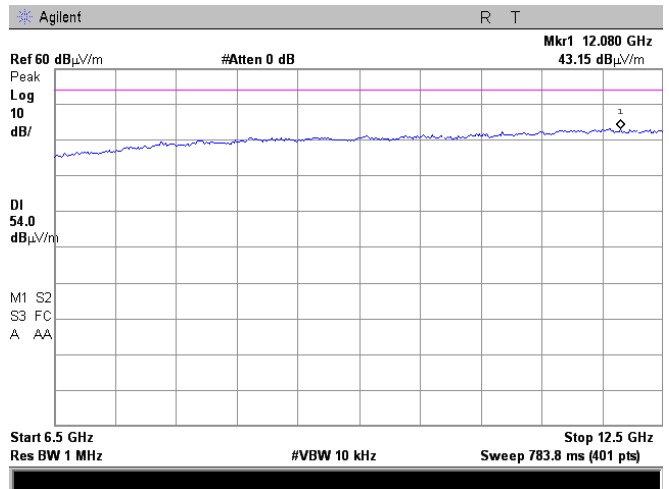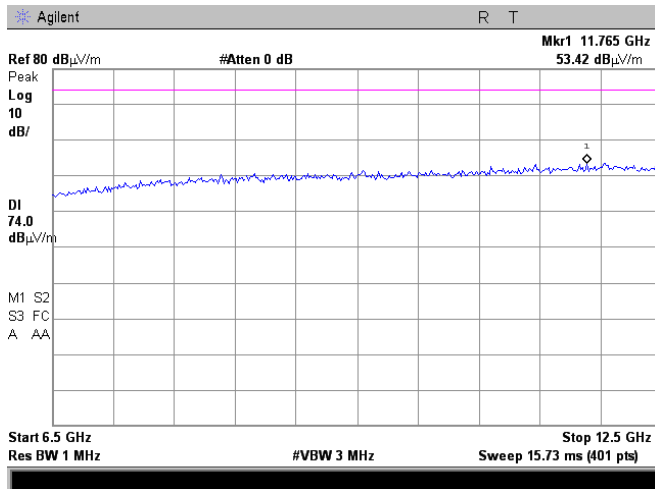

Plot 8.1.6 Radiated emission measurements in 6500 - 12500 MHz range, horizontal antenna polarization

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

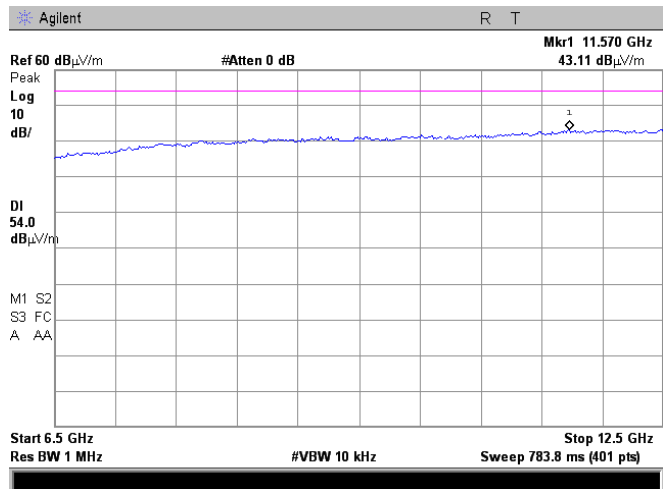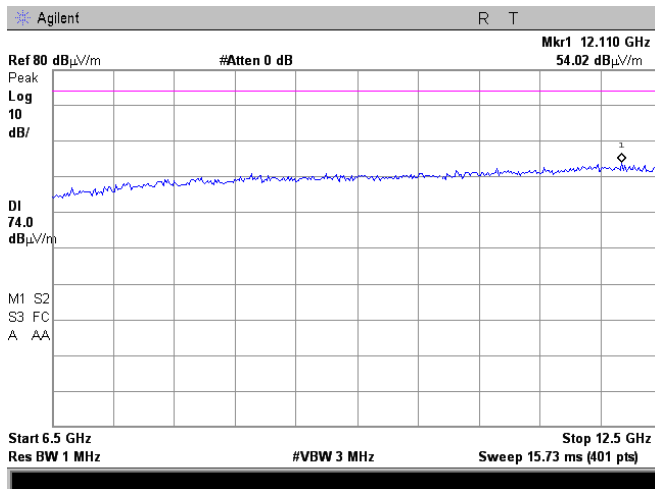

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check*	Due Cal./ Check*
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	21-Jan-14	21-Jan-15
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	22-May-14	22-May-15
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, 25 dB gain	Quinstar Technology	QWH-4200-BA	110	12-Dec-12	12-Dec-15
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	03-Jan-14	03-Jan-15
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	02-Sep-14	02-Sep-15
3135	Passive Probe, 500MHz, 10 MOhm, 11 pF, 10:1, 500V	LeCroy Corporation	PP005A	3135	10-Dec-13	10-Dec-14
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	20-May-14	20-May-15
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	06-Feb-14	06-Feb-15
4114	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz	ETS Lindgren	3117	00123515	27-Dec-13	27-Dec-14
4160	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 94	12-Aug-14	12-Aug-15
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	16-Mar-14	16-Mar-15
4722	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	51228701 001	26-Aug-14	26-Aug-15

\*Note: the calibration was valid at the testing time

## 10 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB
Vertical polarization	Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Occupied bandwidth	$\pm 8.0$ %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



## 11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 12 APPENDIX D Specification references

FCC 47CFR part 15: 2014	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



### 13 APPENDIX E Test equipment correction factors

**Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).

**Antenna factor  
Standard gain horn antenna  
Quinstar Technology  
Model QWH  
Ser.No.112, HL 0768, 0769, 0770, 0771, 0772**

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field strength in dB(μV/m).



**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field strength in dB(μV/m).



**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

<b>Frequency, MHz</b>	<b>Antenna factor, dB(1/m)</b>
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).





**Antenna factor**  
**Double-ridged waveguide horn antenna**  
**ETS Lindgren, Model 3117, serial number: 00123515, HL 4114**

Frequency, MHz	Antenna factor, dB/m		
	Measured	Manufacturer	Deviation
1000	28.0	28.4	-0.4
1500	28.0	27.4	0.6
2000	31.2	30.9	0.3
2500	32.5	33.4	-0.9
3000	32.9	32.6	0.3
3500	32.7	32.8	-0.1
4000	33.1	33.4	-0.3
4500	33.8	33.9	-0.1
5000	33.8	34.1	-0.3
5500	34.4	34.5	-0.1
6000	35.0	35.2	-0.2
6500	35.4	35.5	-0.1
7000	35.7	35.7	0.0
7500	35.9	35.7	0.2
8000	35.8	35.8	0.0
8500	35.9	35.8	0.1
9000	36.3	36.2	0.1
9500	36.6	36.6	0.0
10000	37.1	37.1	0.0
10500	37.6	37.5	0.1
11000	37.9	37.7	0.2
11500	38.5	38.1	0.4
12000	39.2	38.7	0.5
12500	39.0	38.9	0.1
13000	39.1	39.1	0.0
13500	38.9	38.8	0.1
14000	39.0	38.8	0.2
14500	39.6	39.9	-0.3
15000	39.9	39.7	0.2
15500	39.9	40.1	-0.2
16000	40.7	40.8	-0.1
16500	41.3	41.8	-0.5
17000	42.5	42.1	0.4
17500	41.3	41.2	0.1
18000	41.4	40.9	0.5

Antenna factor is to be added to receiver meter reading in dB( $\mu$ V) to convert to field strength in dB( $\mu$ V/meter)



**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244, S/N 51228701 001**  
**HL 4722**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.22	9000	2.93
100	0.30	9500	3.06
300	0.52	10000	3.16
500	0.66	10500	3.20
1000	0.93	11000	3.34
1500	1.15	11500	3.39
2000	1.33	12000	3.48
2500	1.49	12500	3.55
3000	1.64	13000	3.66
3500	1.77	13500	3.75
4000	1.90	14000	3.76
4500	2.03	14500	3.87
5000	2.17	15000	3.98
5500	2.30	15500	4.01
6000	2.39	16000	4.14
6500	2.51	16500	4.15
7000	2.59	17000	4.32
7500	2.67	17500	4.36
8000	2.76	18000	4.38
8500	2.84		



## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
OATS	open area test site
$\Omega$	Ohm
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT