



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B

FOR:
SCR Engineers Ltd.
eSense Ear TAG
Model: AMUT04
FCC ID:AMUT04

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT.....	5
6.4	EUT test positions	6
6.5	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	Field strength of emissions.....	8
7.2	Occupied bandwidth test.....	35
7.3	Band edge emission.....	40
7.4	Antenna requirements.....	45
8	Unintentional emission tests.....	46
8.1	Radiated emission measurements	46
9	APPENDIX A Test equipment and ancillaries used for tests.....	51
10	APPENDIX B Measurement uncertainties.....	52
11	APPENDIX C Test laboratory description	53
12	APPENDIX D Specification references	53
13	APPENDIX E Test equipment correction factors.....	54
14	APPENDIX F Abbreviations and acronyms.....	62

1 Applicant information

Client name: SCR Engineers Ltd.
Address: 18 Hamelacha street, P.O.B. 13564, Netanya 42138, Israel
Telephone: +972 73 240 6053
Fax: +972 9865 0703
E-mail: zeevk@scrdairy.com
Contact name: Mr. Zeev Kapelnik

2 Equipment under test attributes

Product name: eSense Ear TAG
Product type: Transceiver
Model(s): AMUT04
Serial number: QD0000145
Hardware version: 01.02.00
Software release: 110.07.05.06
Receipt date 11-Jul-16

3 Manufacturer information

Manufacturer name: SCR Engineers Ltd.
Address: 18 Hamelacha street, P.O.B. 13564, Netanya 42138, Israel
Telephone: +972 73 240 6053
Fax: +972 9865 0703
E-Mail: zeevk@scrdairy.com
Contact name: Mr. Zeev Kapelnik




4 Test details

Project ID: 28575
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 11-Jul-16
Test completed: 14-Jul-16
Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; subpart B §15.109

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d), Field strength of emissions	Pass
Section 15.249(d), Band edge emissions	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Section 15.215(c), Occupied bandwidth	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. K. Zushchuk, test engineer	July 14, 2016	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 1, 2016	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 16, 2016	


6 EUT description

6.1 General information

The EUT is an activity based tag including the RF transceiver which operates in 2.4 GHz band. The EUT is mounted on animal ear and used for the following:

1. Identification of animal.
 2. Measurement of various animal parameters, processing and transmission them to the base unit (BU500/E).
- The EUT is equipped with an integral printed on PCB antenna and is powered by 3.6 V internal battery.

6.2 Test configuration

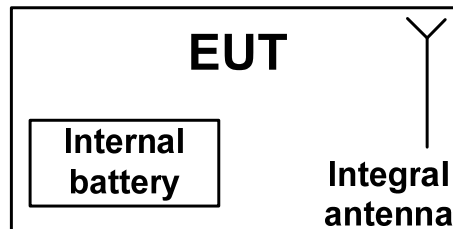


6.3 Changes made in EUT

No changes were performed in the EUT.

6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position

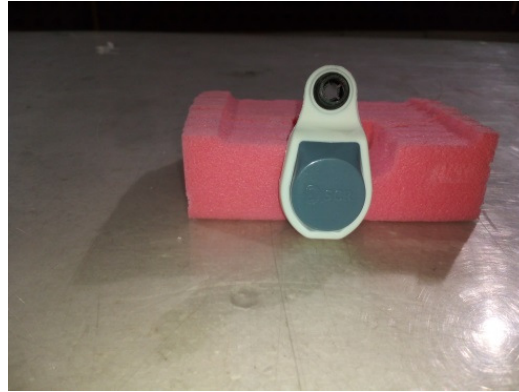

Photograph 6.4.2 EUT in Y-axis orthogonal position



Photograph 6.4.3 EUT in Z-axis orthogonal position





6.5 Transmitter characteristics

Type of equipment				
V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Assigned frequency range		2400 – 2483.5 MHz		
Operating frequency range		2405 – 2480 MHz		
RF channel spacing		5 MHz		
Maximum field strength of carrier at 3 m distance		103.2 dBµV/m (peak), 69.4 dBµV/m (average)		
Is transmitter output power variable?	V	No		
		continuous variable		
		stepped variable with stepsize		dB
		minimum RF power		dBm
		maximum RF power		dBm
Antenna connection				
unique coupling	standard connector	V	Integral	with temporary RF connector
		V		without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer	Model number	Gain	
Integral	SCR Engineers Ltd.	Printed	Max 1.5 dBi	
Transmitter aggregate data rate/s		250 kbps		
Type of modulation		QPSK		
Modulating test signal (baseband)		PRBS		
Transmitter power source				
V	Battery	Nominal rated voltage	3.6 V	Battery type
	DC	Nominal rated voltage		
	AC mains	Nominal rated voltage		Frequency Hz



Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Peak	Average	Quasi-Peak
2400 – 2483.5	114.0	94.0	NA

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
2400 – 2483.5	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			Attenuation below carrier
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.



Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The measurements were performed in three EUT orthogonal positions.

7.1.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.2.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The measurements were performed in three EUT orthogonal positions.

7.1.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.


Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz

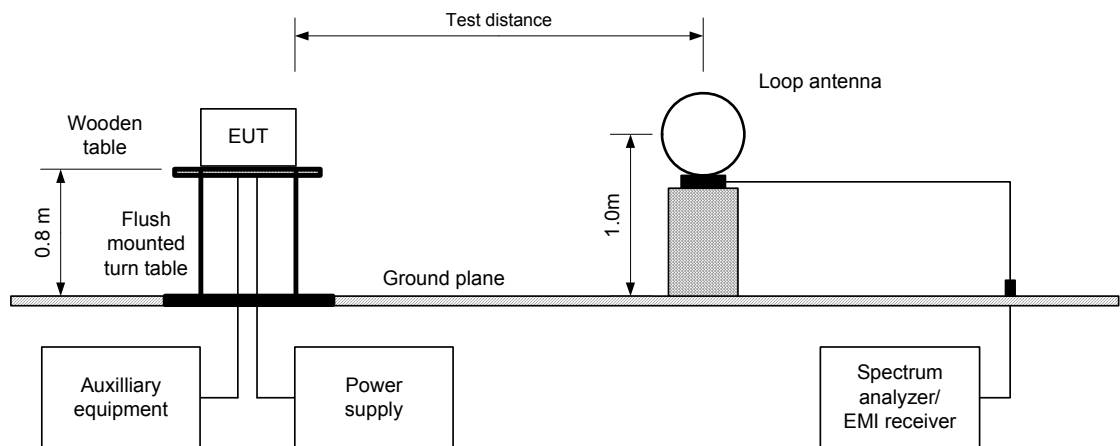



Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

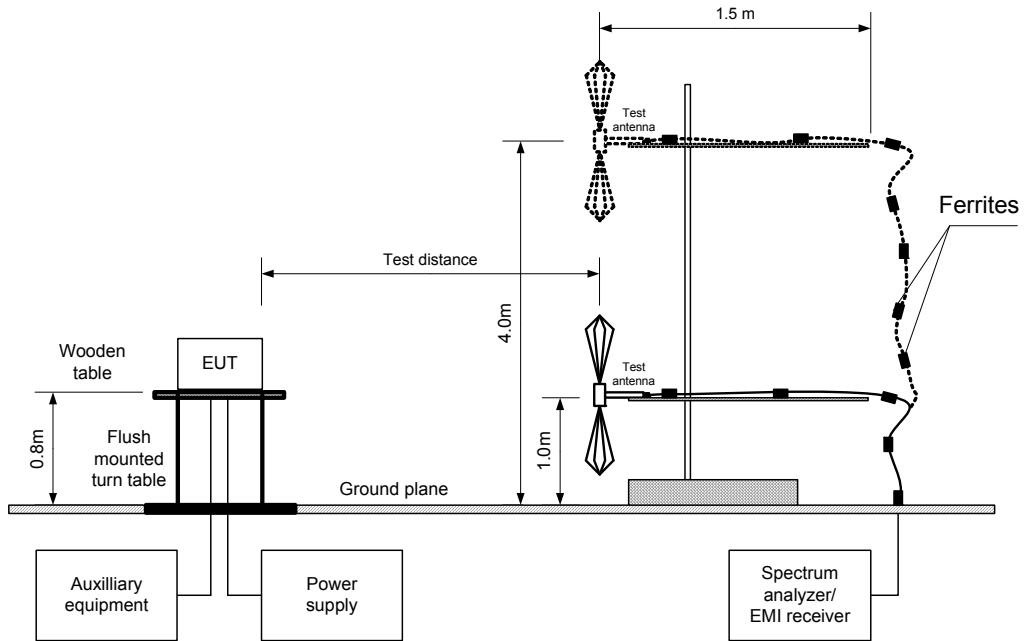



Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE: 3 m
 EUT POSITION: 3 orthogonal (X/Y/Z-axes)
 MODULATION: QPSK
 INVESTIGATED FREQUENCY RANGE: 0.009 – 25000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 1.0 MHz (above 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
2405.50	V	1.8	130	103.18	114.00	-10.82	-33.80	69.38	94.00	-24.62	Pass
2444.60	H	1.4	210	101.55	114.00	-12.45	-33.80	67.75	94.00	-26.25	
2480.30	H	1.3	0	100.86	114.00	-13.14	-33.80	67.06	94.00	-26.94	
Spurious emissions											
No emissions were found											

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m).
 *** Max value was obtained in X-axis orthogonal position.

Table 7.1.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
1.00	49.00	NA	NA	NA	-33.80

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$
 for pulse train longer than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 1984	HL 2780	HL 3818	HL 3901	HL 4278
HL 4353	HL 4932	HL 4956					

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.1 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: X-axis

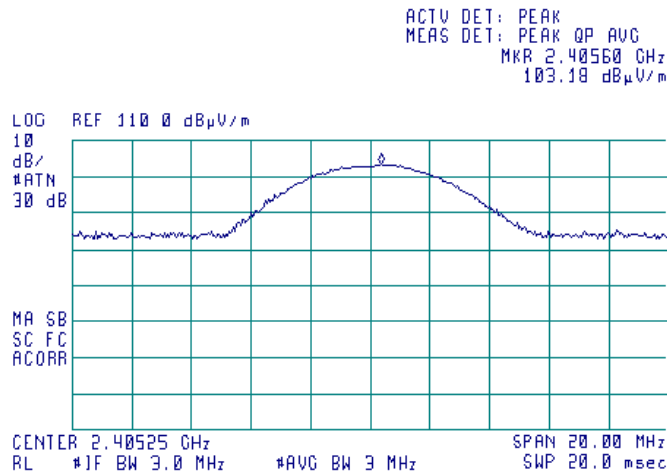

Plot 7.1.2 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: Y-axis

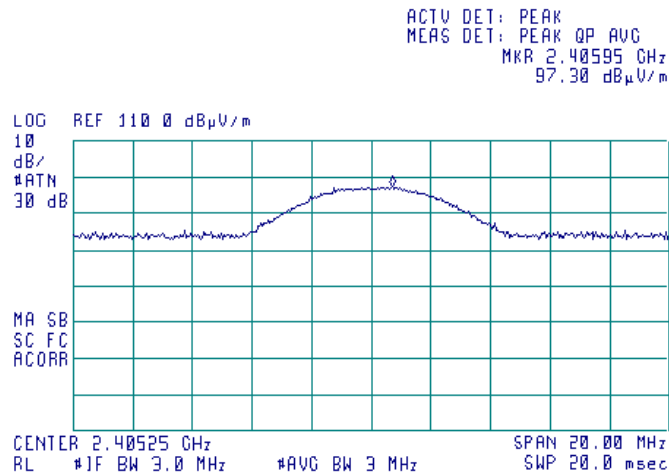




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.3 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: Z-axis

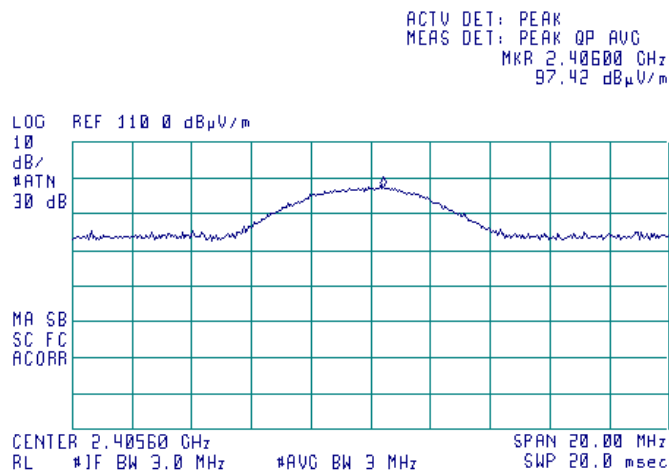

Plot 7.1.4 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: X-axis

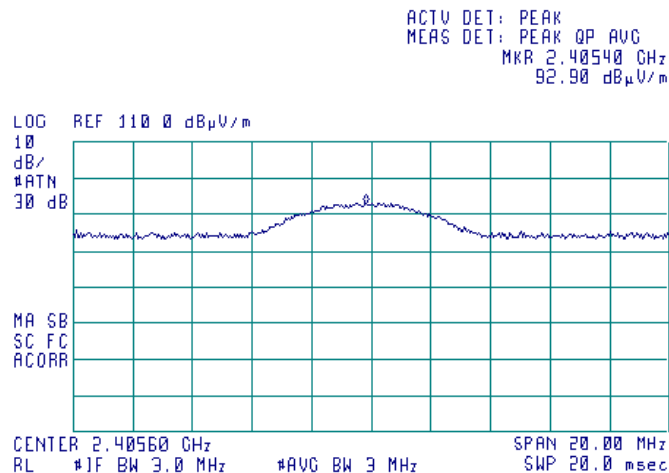




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.5 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: Y-axis

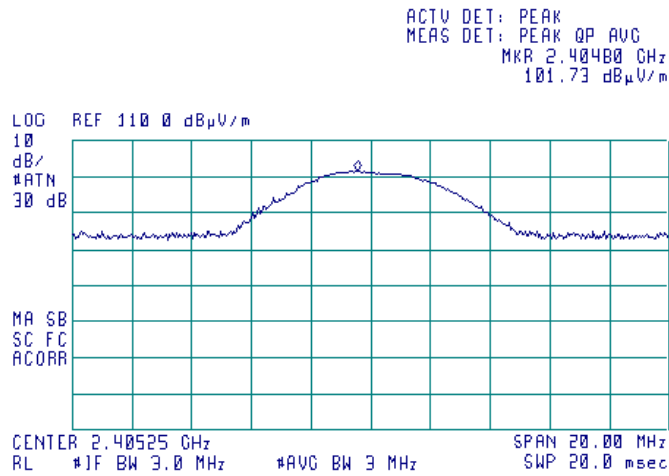

Plot 7.1.6 Radiated emission measurements at the low fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: Z-axis

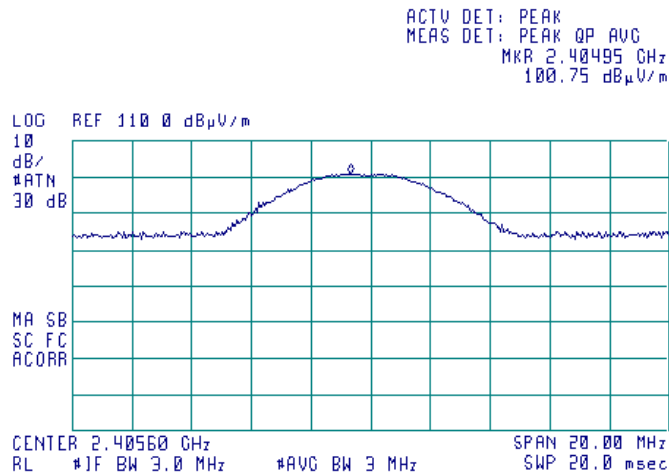




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.7 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: X-axis

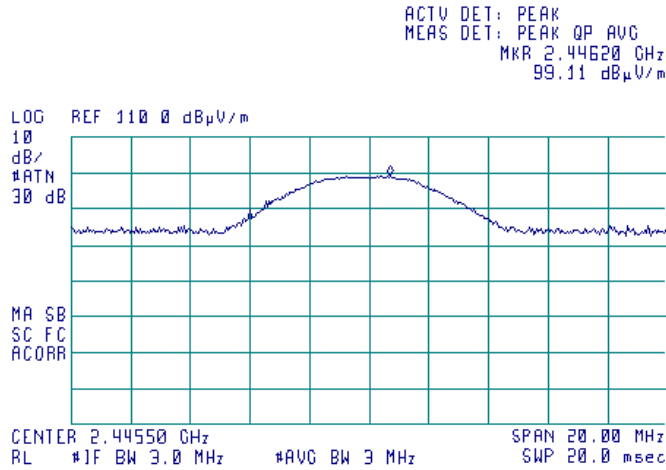

Plot 7.1.8 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: Y-axis

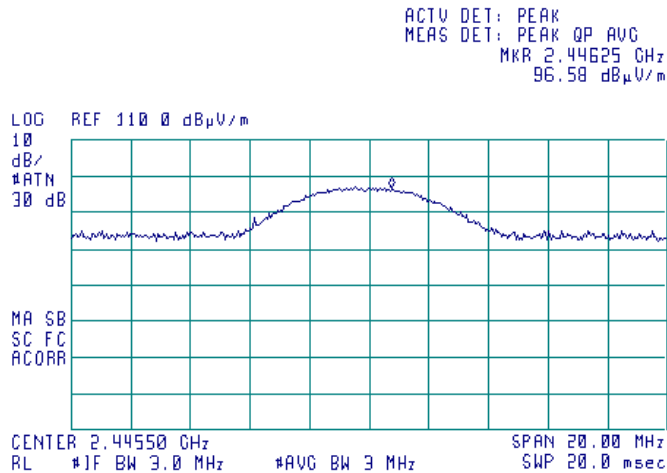




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.9 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: Z-axis

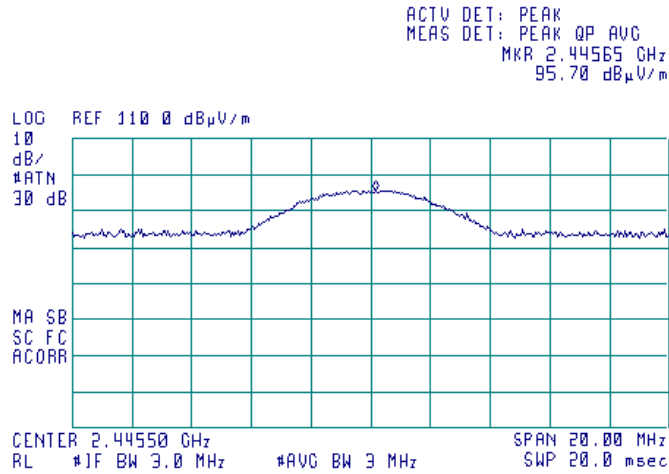

Plot 7.1.10 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: X-axis

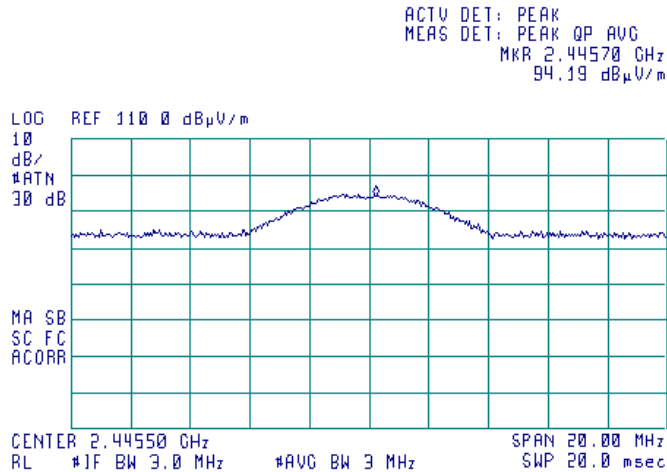




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.11 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: Y-axis

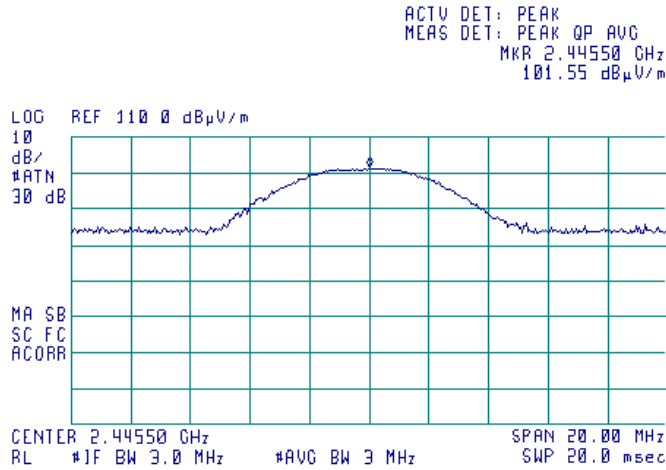

Plot 7.1.12 Radiated emission measurements at the mid fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: Z-axis

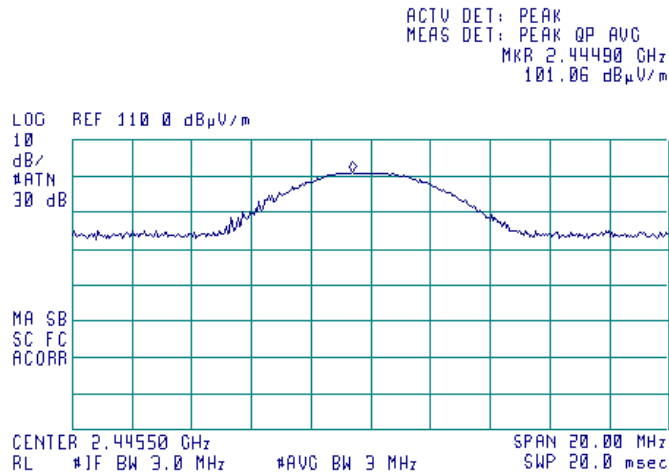




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.13 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: X-axis

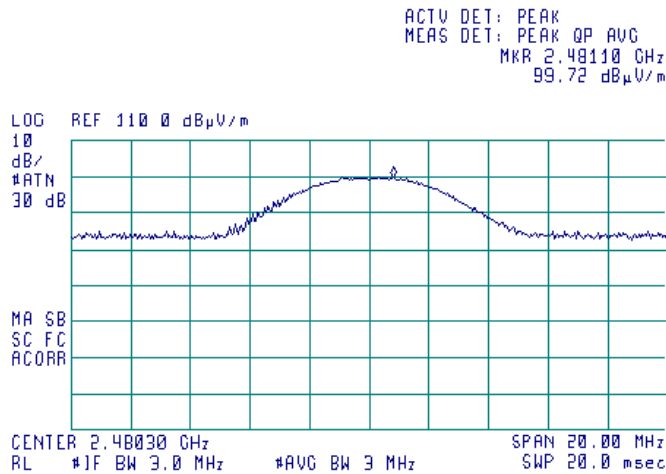

Plot 7.1.14 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: Y-axis

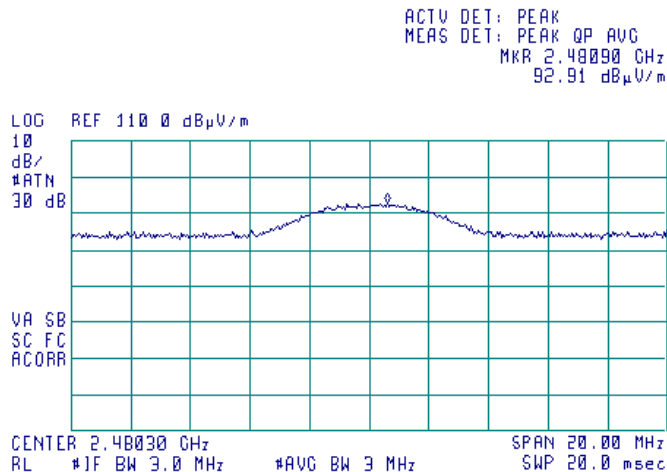




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.15 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT PLANE: Z-axis

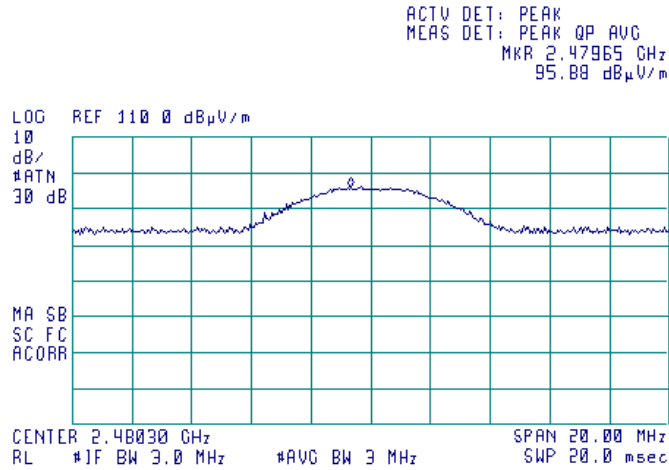

Plot 7.1.16 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT PLANE: X-axis

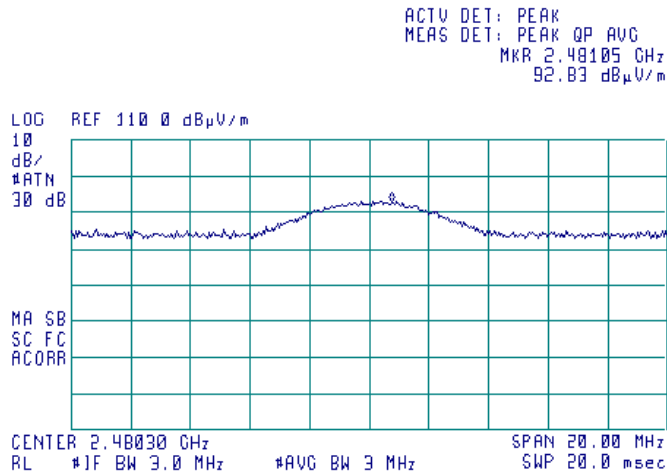




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.17 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT PLANE: Y-axis

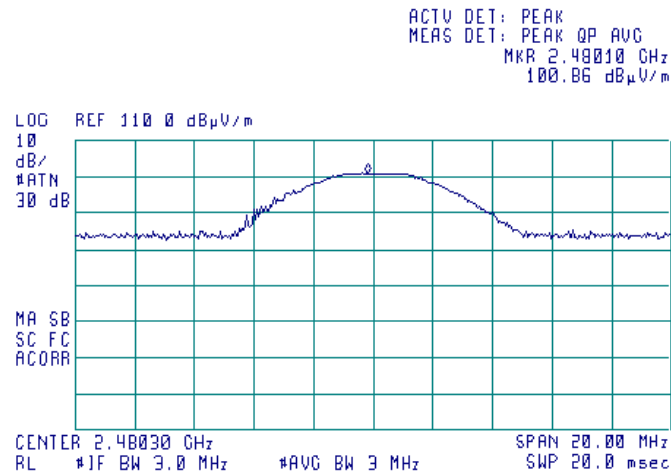

Plot 7.1.18 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT PLANE: Z-axis

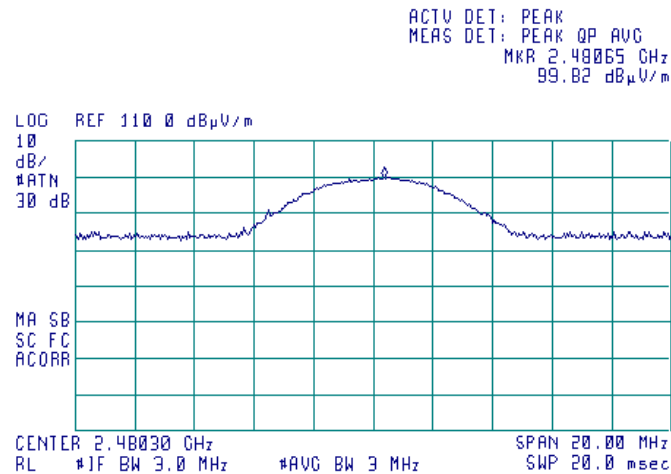



HERMON LABORATORIES


Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Plot 7.1.19 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis
CARRIER FREQUENCY: Low



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 12.1 kHz
65.92 dB μ V/m

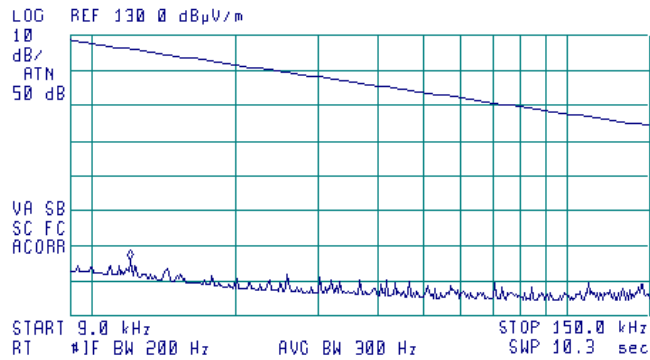


Plot 7.1.20 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis
CARRIER FREQUENCY: Mid



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.8 kHz
65.85 dB μ V/m

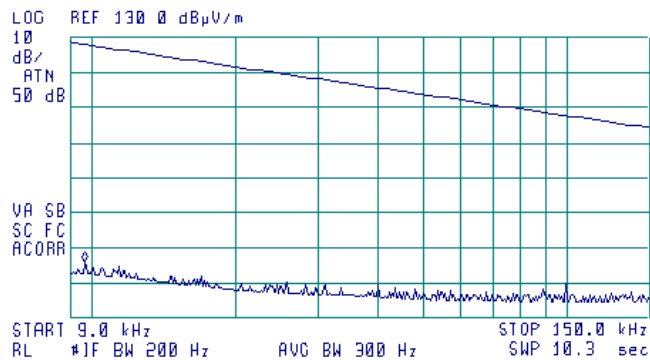




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.21 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-axis
 CARRIER FREQUENCY: High

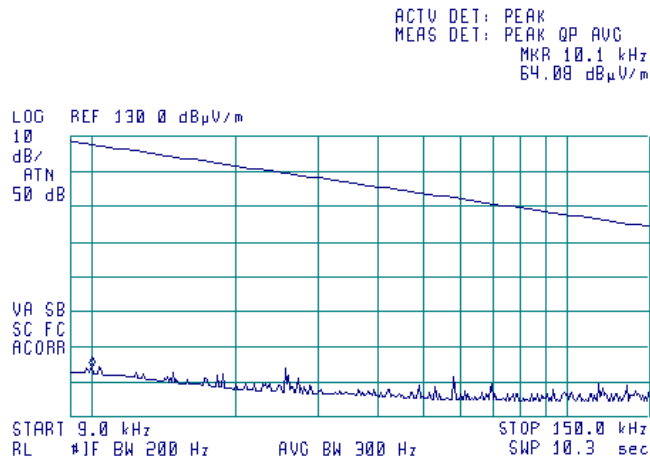

Plot 7.1.22 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-axis
 CARRIER FREQUENCY: Low

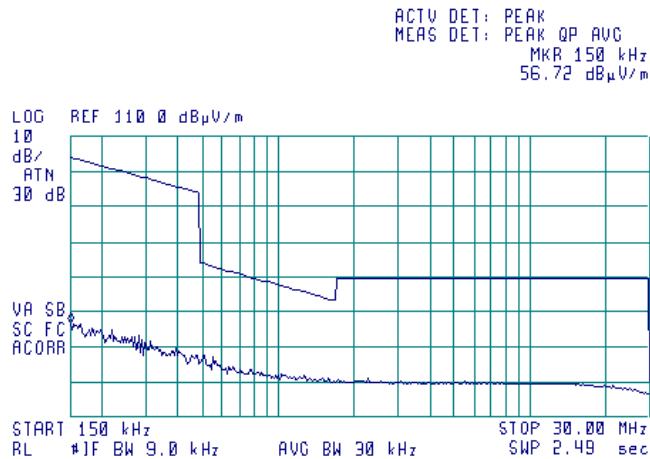




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.23 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-axis
 CARRIER FREQUENCY: Mid

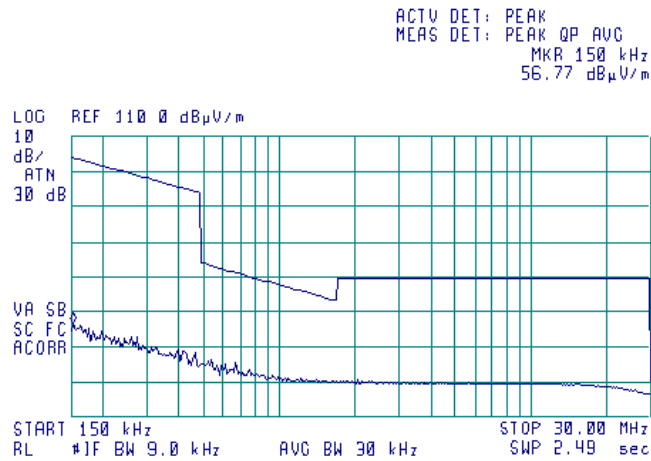

Plot 7.1.24 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-axis
 CARRIER FREQUENCY: High

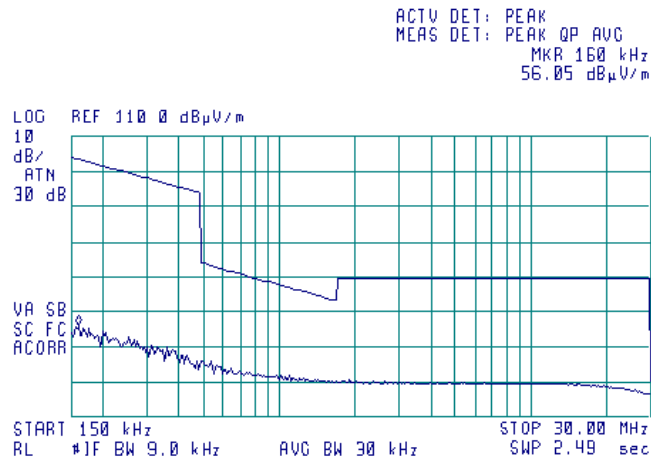




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.25 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
CARRIER FREQUENCY: Low

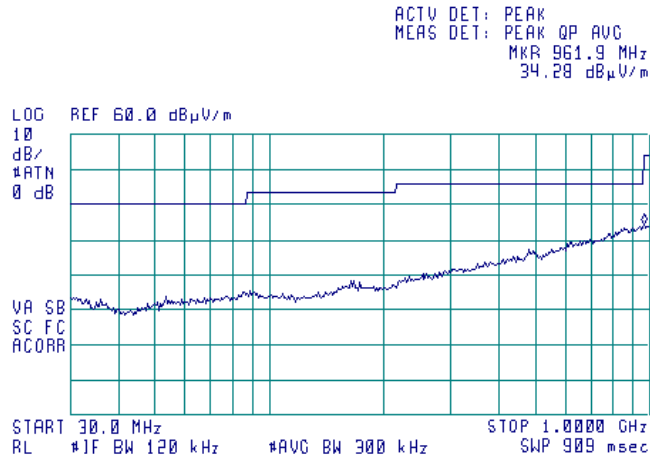

Plot 7.1.26 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
CARRIER FREQUENCY: Mid

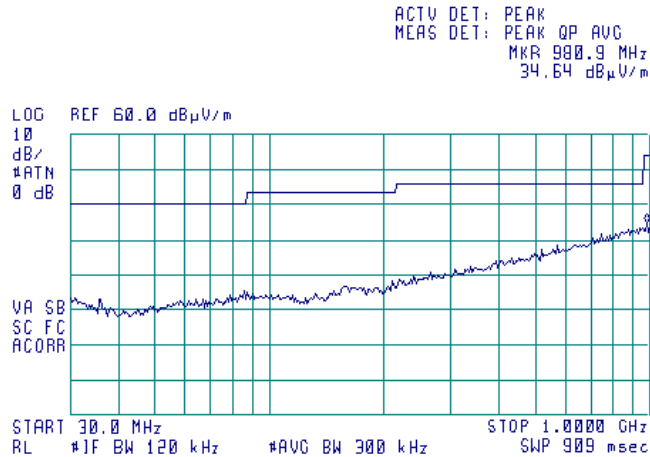




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Plot 7.1.27 Radiated emission measurements from 30 to 1000 MHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	High



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 990.5 MHz
 34.37 dB μ V/m

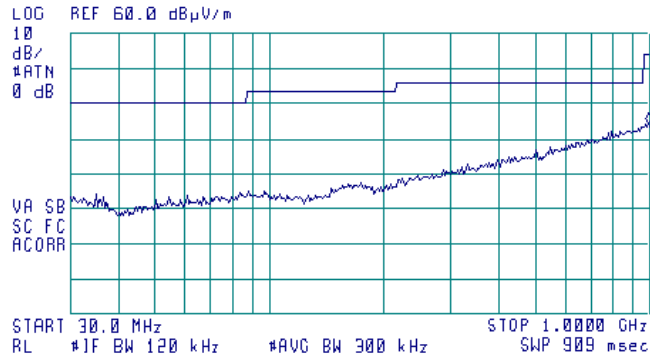





HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			



Plot 7.1.28 Radiated emission measurements from 1.0 to 2.9 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Low

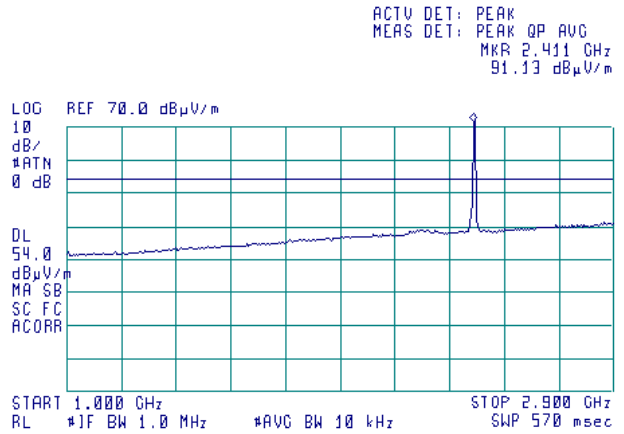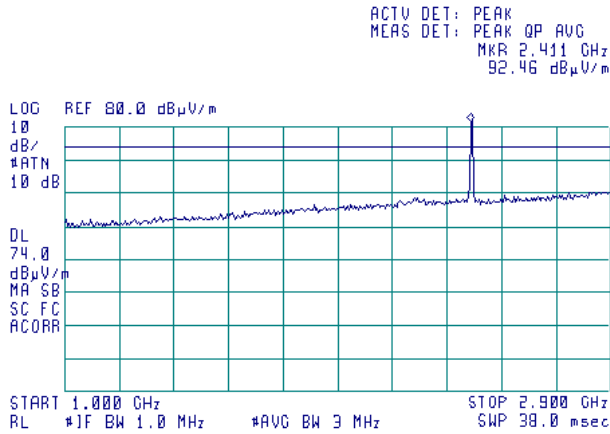

Plot 7.1.29 Radiated emission measurements from 1.0 to 2.9 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Mid

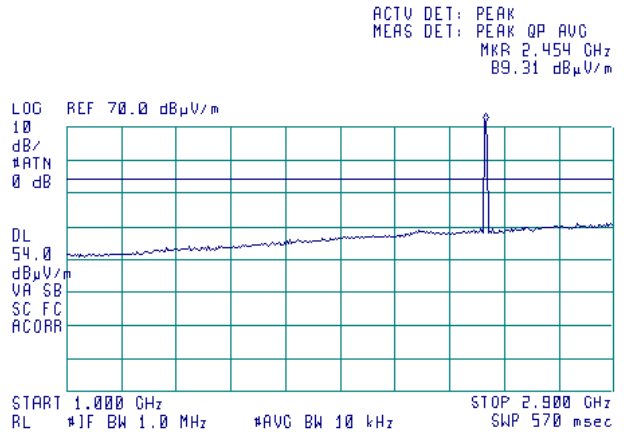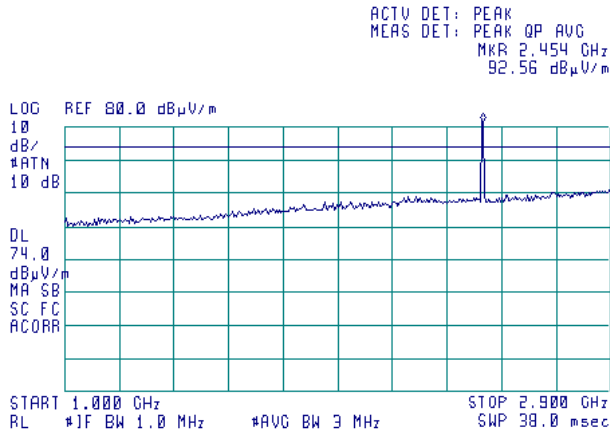





HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			



Plot 7.1.30 Radiated emission measurements from 1.0 to 2.9 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	High

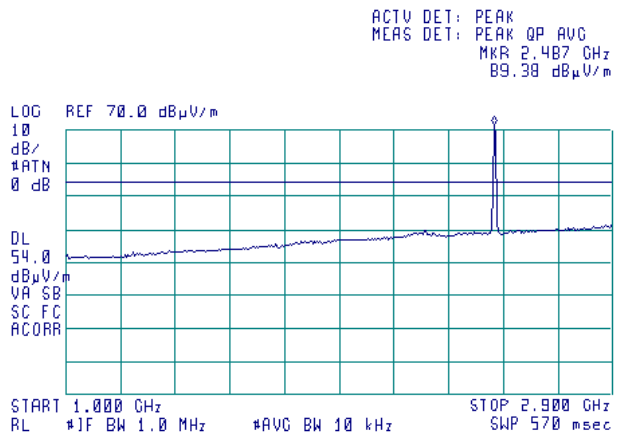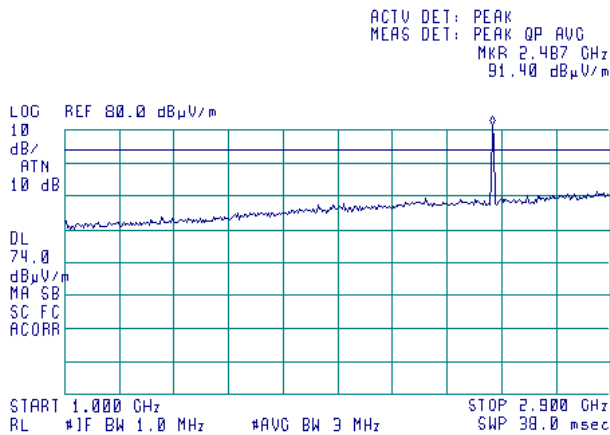

Plot 7.1.31 Radiated emission measurements from 2.9 to 10 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Low

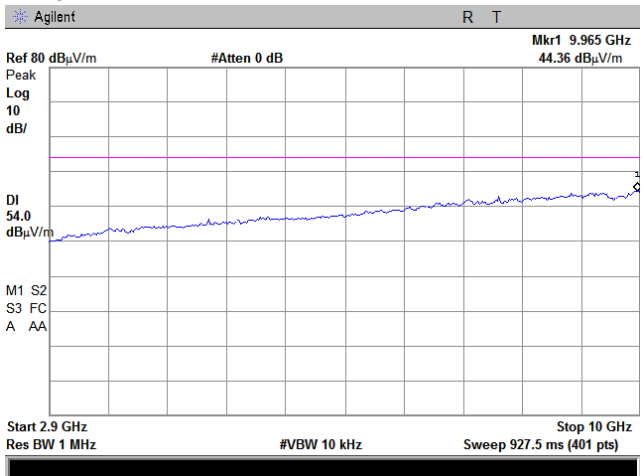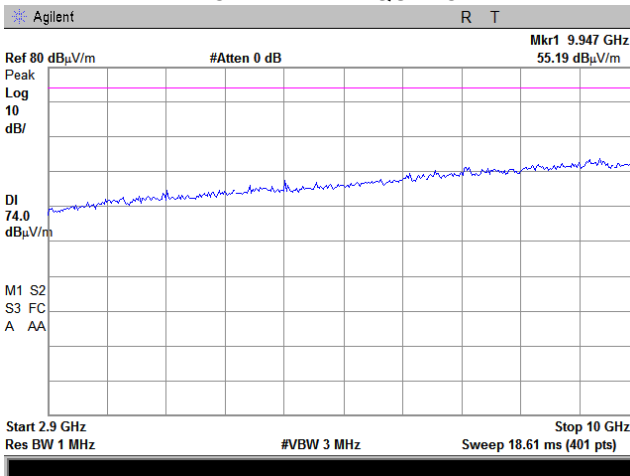




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.32 Radiated emission measurements from 2.9 to 10 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY:	Mid

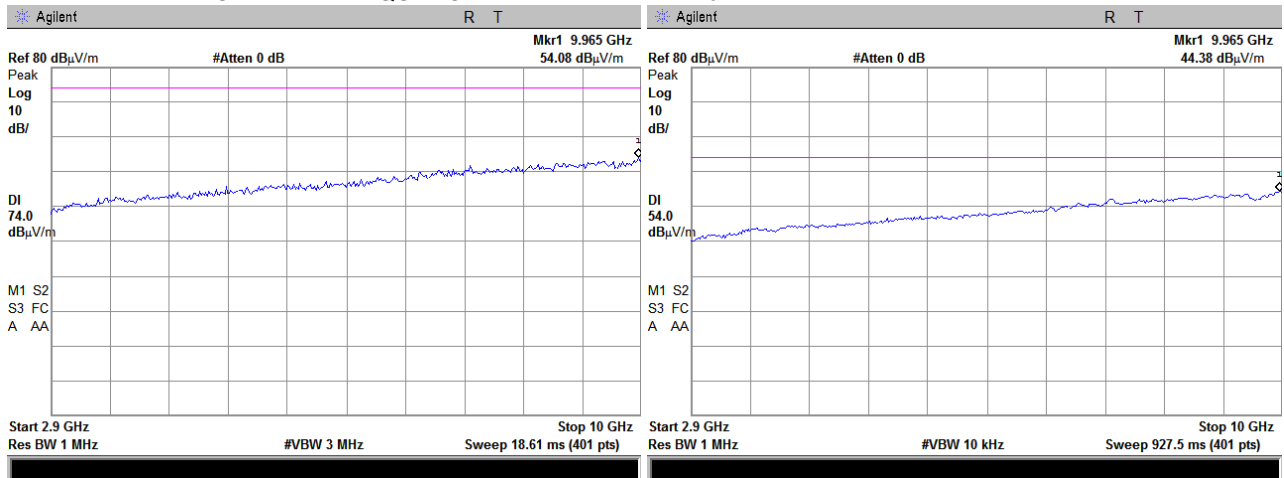

Plot 7.1.33 Radiated emission measurements from 2.9 to 10 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY:	High

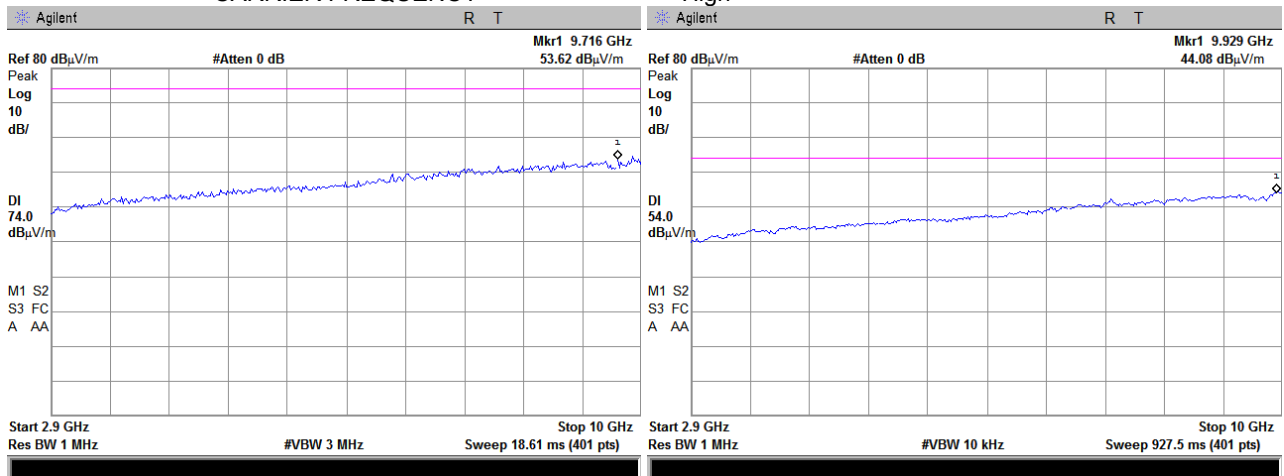




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.34 Radiated emission measurements from 10 to 18 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Low

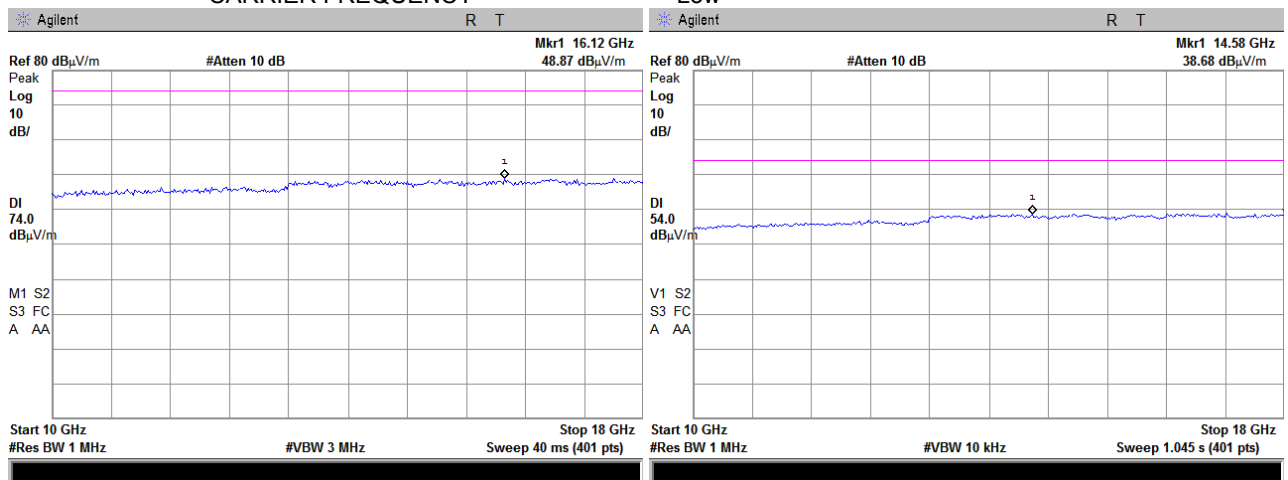

Plot 7.1.35 Radiated emission measurements from 10 to 18 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Mid

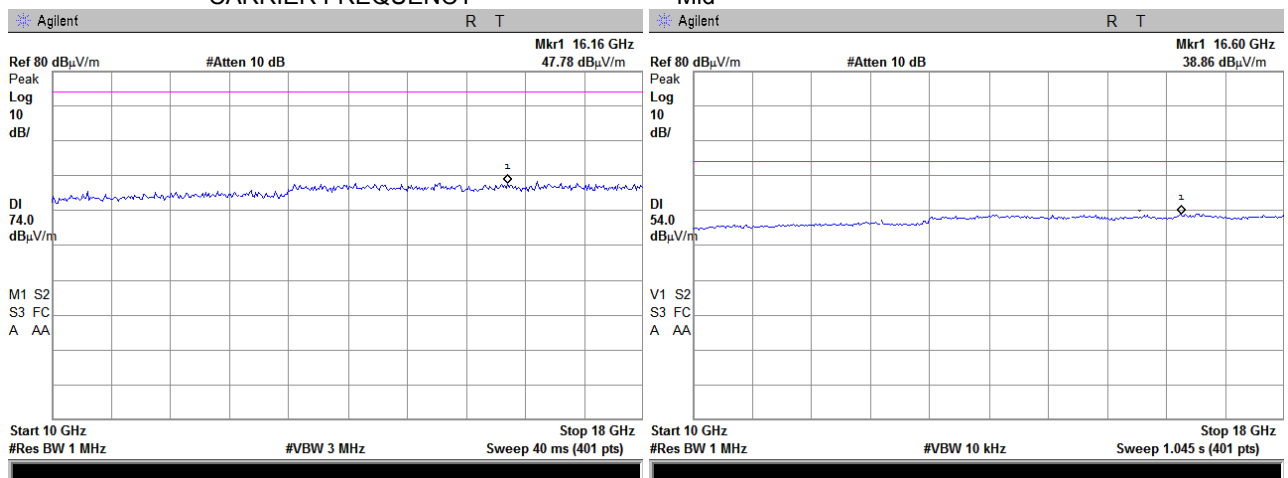




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.36 Radiated emission measurements from 10 to 18 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	High

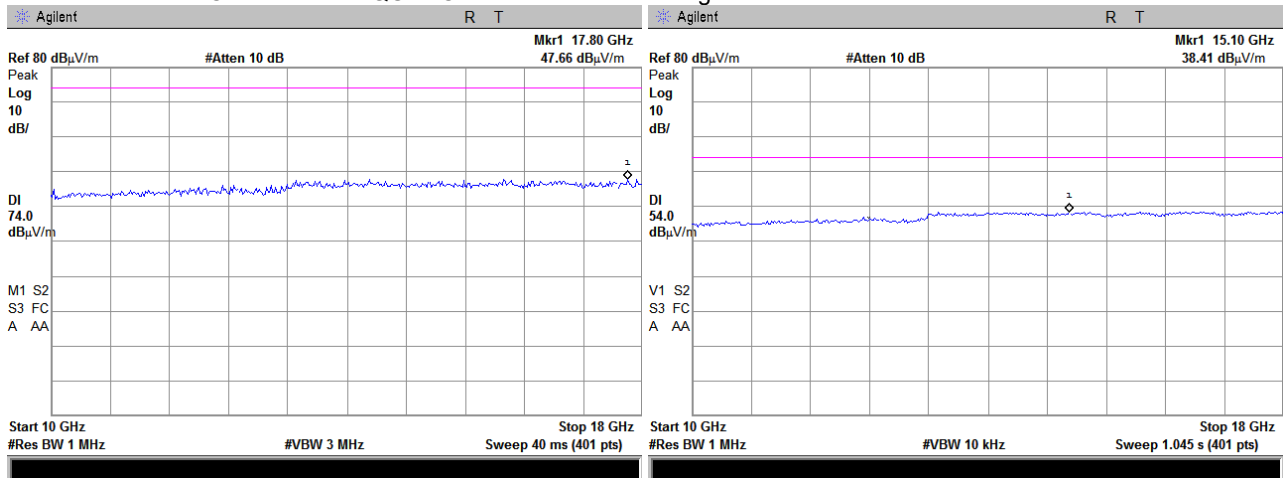

Plot 7.1.37 Radiated emission measurements from 18.0 to 25.0 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Low

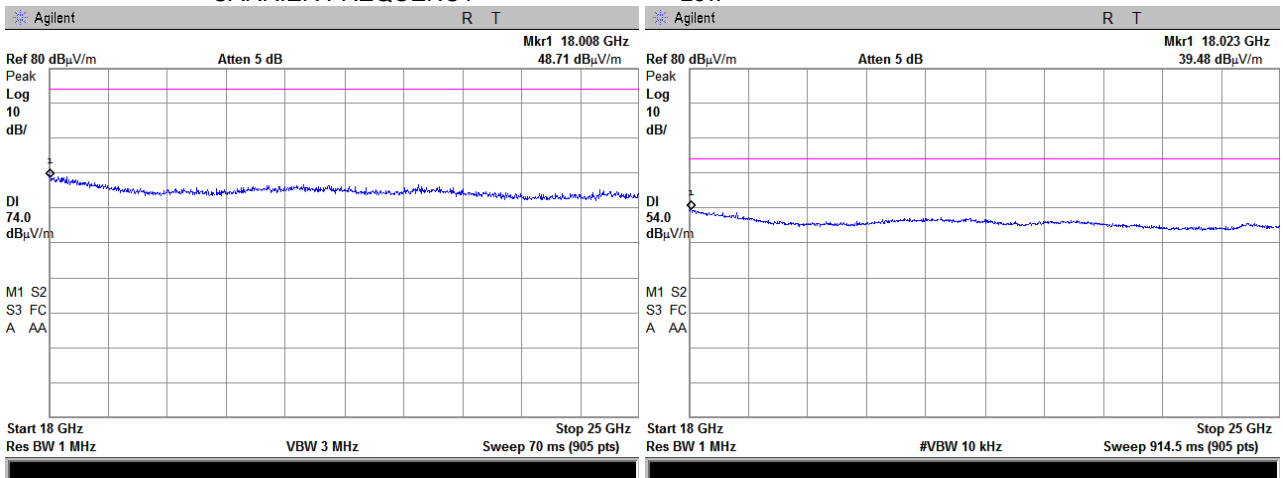




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.38 Radiated emission measurements from 18.0 to 25.0 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	Mid

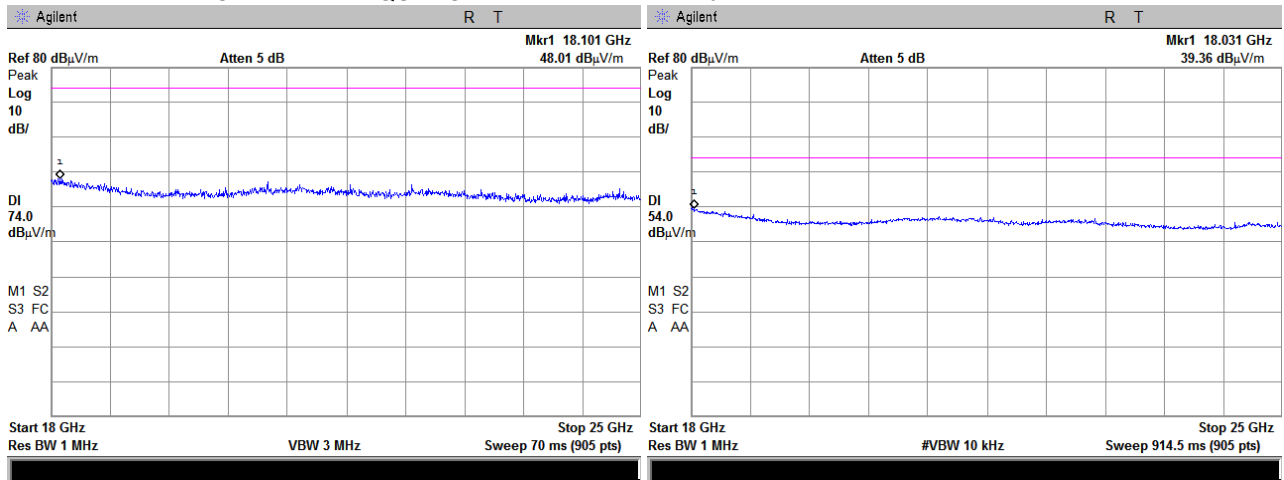

Plot 7.1.39 Radiated emission measurements from 18.0 to 25.0 GHz

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
EUT POSITION:	X-axis
CARRIER FREQUENCY	High

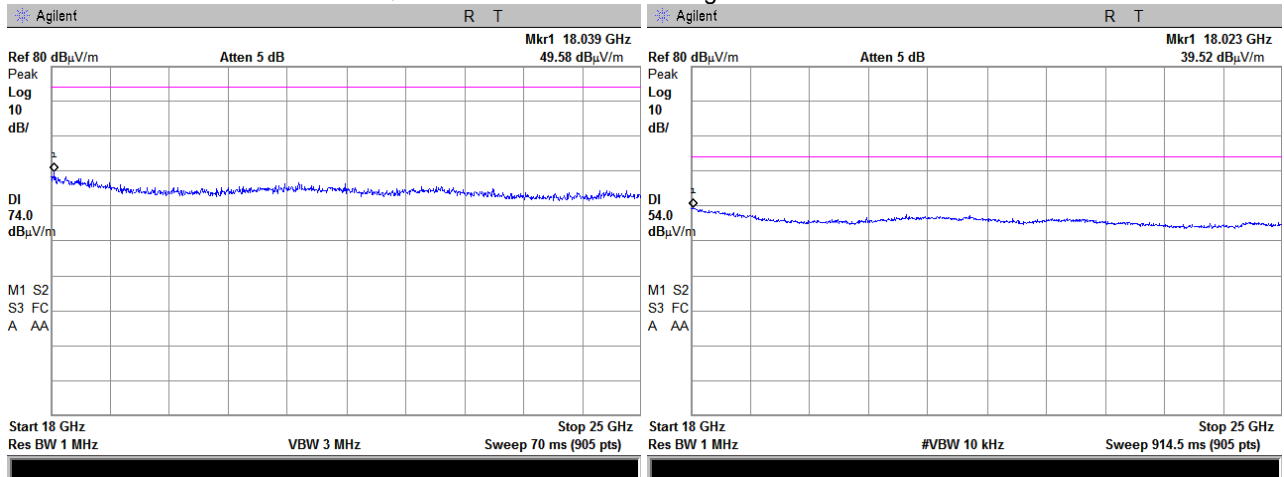





HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Plot 7.1.40 Transmission pulse duration

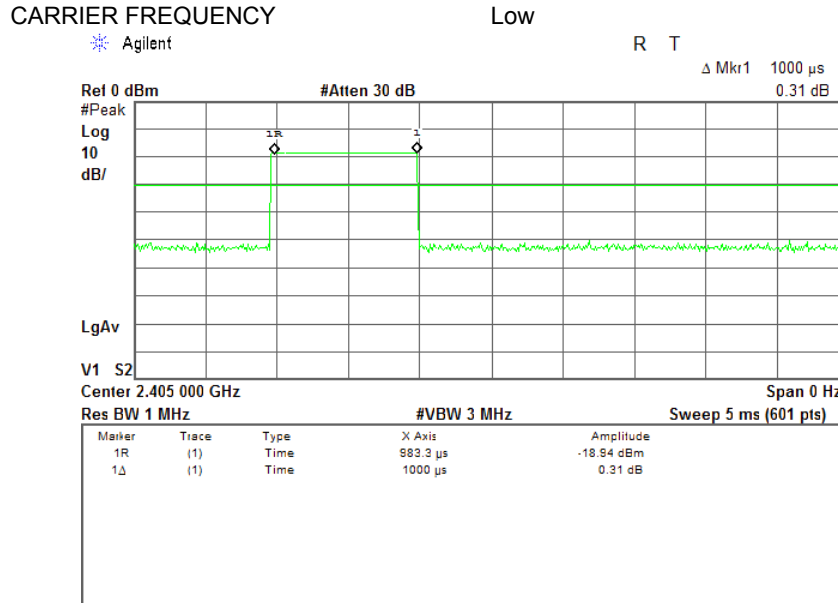


Plot 7.1.41 Transmission pulse period

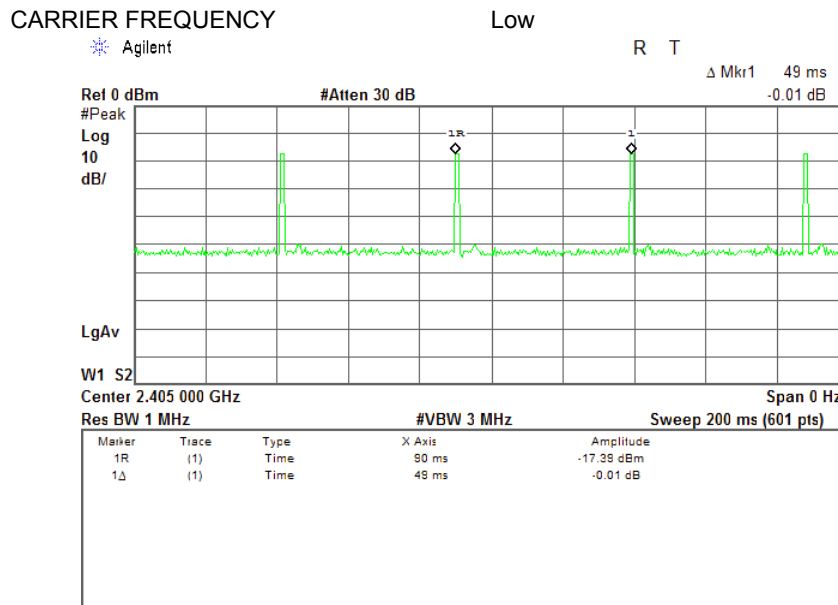




Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Plot 7.1.42 Transmission pulse duration

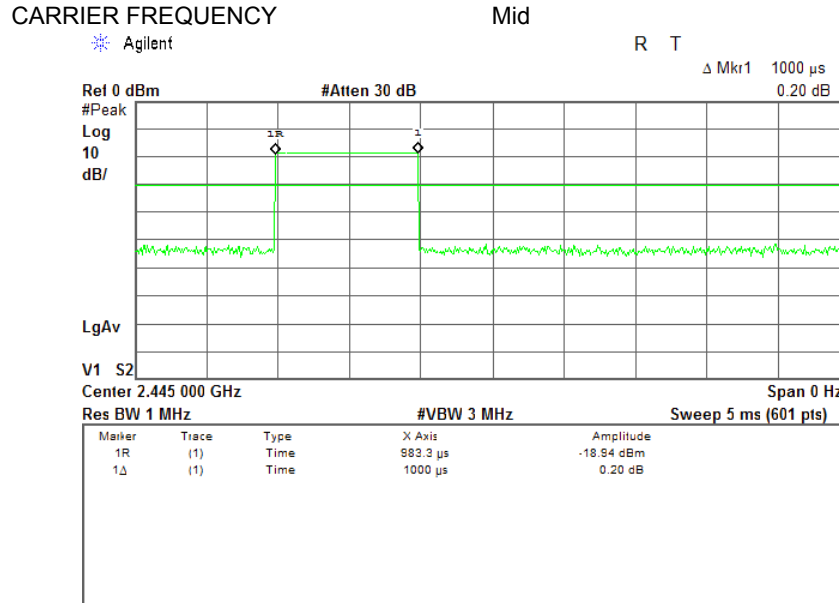

Plot 7.1.43 Transmission pulse period

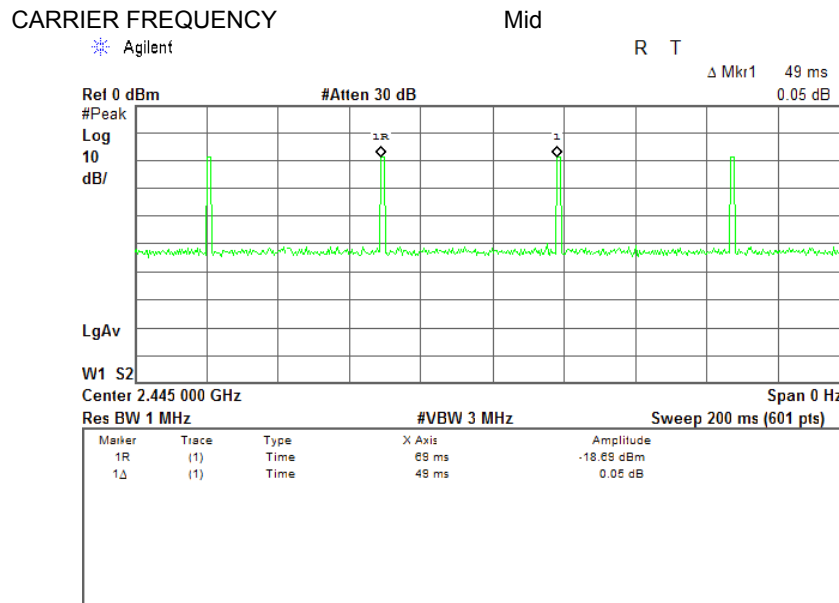




HERMON LABORATORIES

Test specification: Section 15.249(a)(d), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 11-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 7.1.44 Transmission pulse duration

CARRIER FREQUENCY High

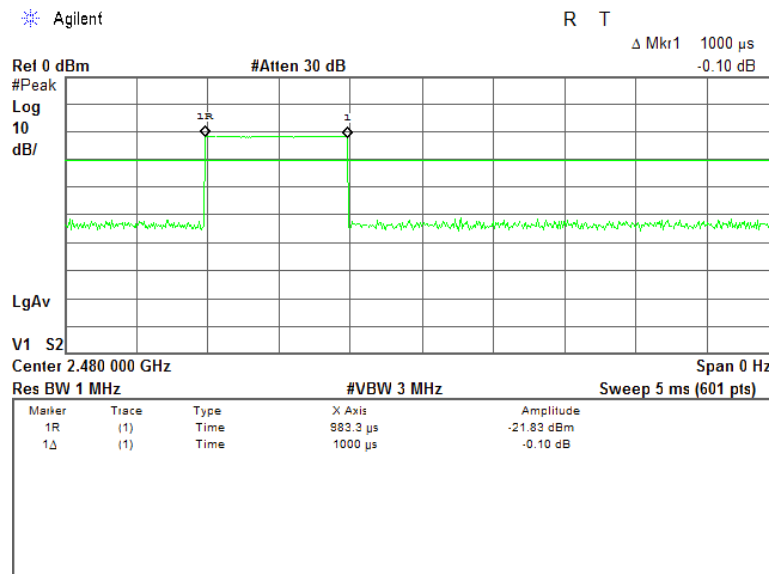

Plot 7.1.45 Transmission pulse period

CARRIER FREQUENCY High

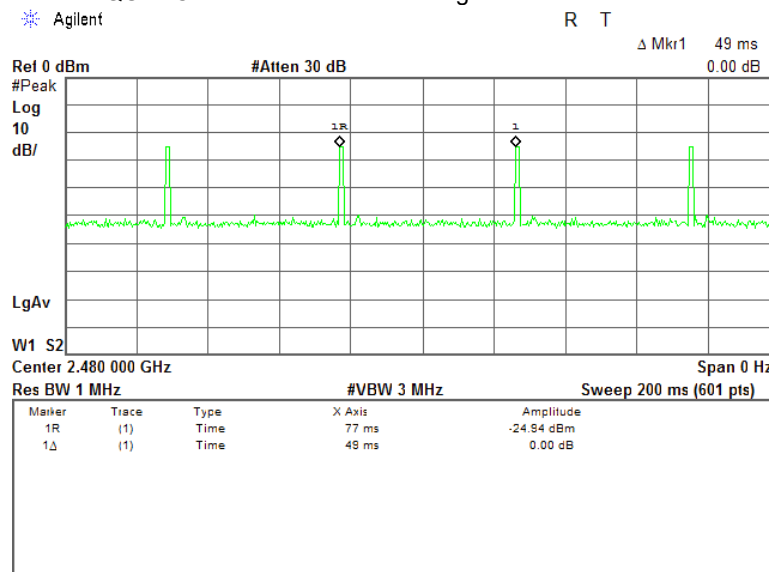



Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1006 hPa	Power: Battery
Remarks:			

7.2 Occupied bandwidth test

7.2.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0
2400 – 2483.5	
5725 – 5875	
24000 – 24250	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.2.2 and associated plot.

7.2.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.2.1 Occupied bandwidth test setup





Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1006 hPa	Power: Battery
Remarks:			

Table 7.2.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND 2400 – 2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: QPSK

Band edge	Cross point frequency, MHz	Frequency drift, kHz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	2403.42	NA	NA	NA	2400.0	Pass
High	2481.35	NA	NA	NA	2483.5	Pass

ASSIGNED FREQUENCY BAND 2400 – 2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100kHz
 VIDEO BANDWIDTH: 300kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: QPSK

Frequency, MHz	OBW, MHz	Limit	Verdict
2405	2632.9	NA	Pass
2445	2630.0	NA	Pass
2480	2593.0	NA	Pass

Reference numbers of test equipment used

HL 3810	HL 3818	HL 4756						
---------	---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1006 hPa	Power: Battery
Remarks:			

Plot 7.2.1 Occupied bandwidth test result at low frequency

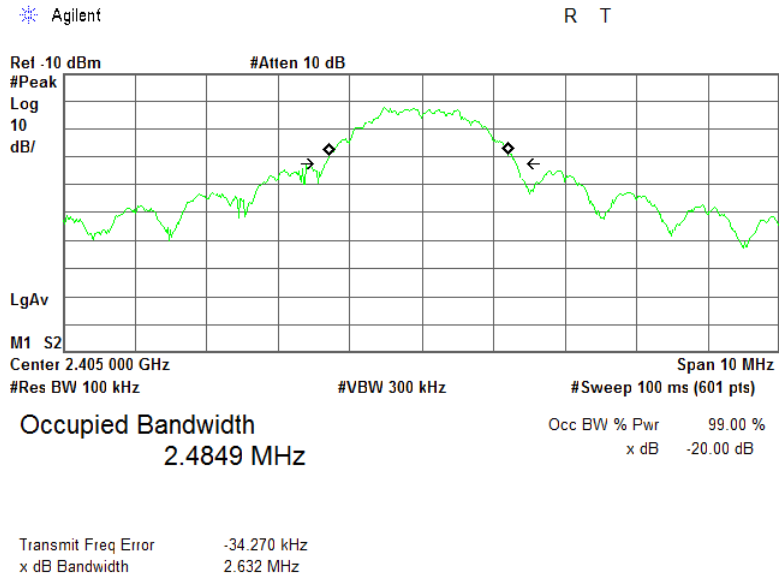

Plot 7.2.2 Low band edge frequency

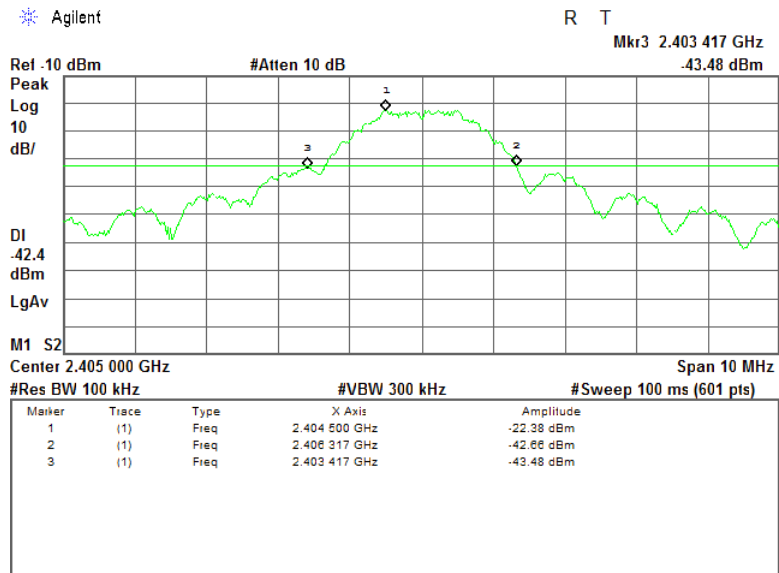




HERMON LABORATORIES

Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1006 hPa	Power: Battery
Remarks:			

Plot 7.2.3 Occupied bandwidth test result at mid frequency

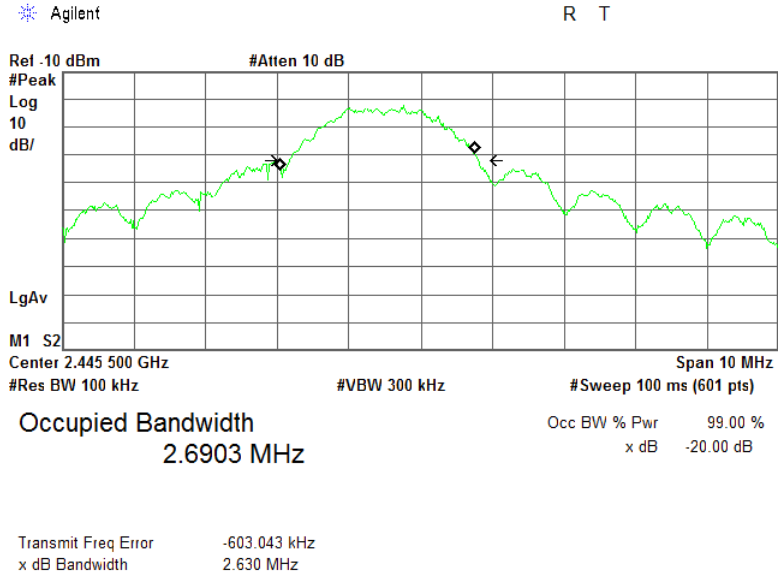





HERMON LABORATORIES

Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance	Verdict: PASS		
Date(s): 14-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1006 hPa	Power: Battery
Remarks:			

Plot 7.2.4 Occupied bandwidth test result at high frequency

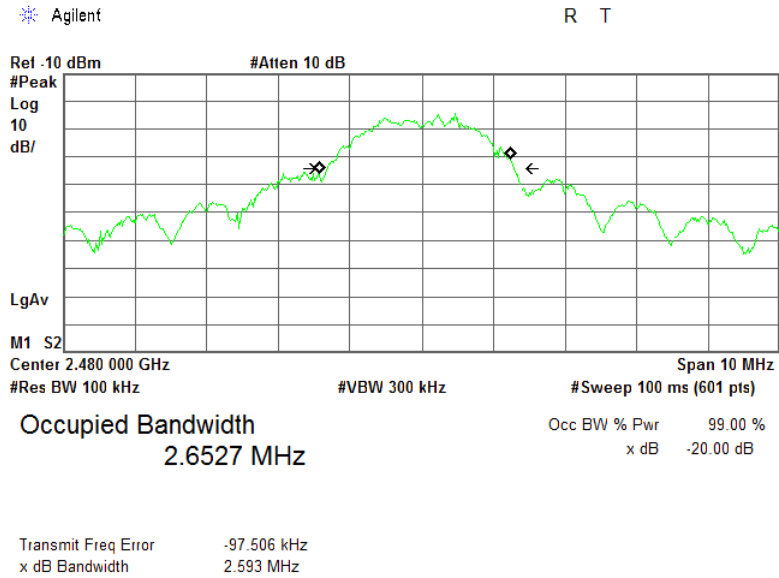

Plot 7.2.5 High band edge frequency

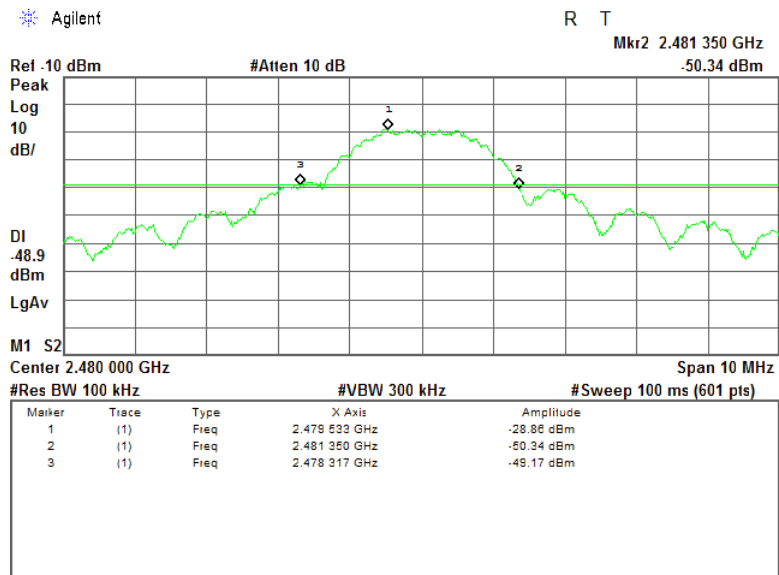



Test specification: Section 15.249(d), Band edge emissions			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 28 °C	Relative Humidity: 45 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

7.3 Band edge emission

7.3.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dBµV/m		Attenuation below carrier, dBc
	Peak	Average	
2400 – 2483.5	74.0	54.0	50

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.


7.3.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.3.2.4 The test results were recorded in Table 7.3.2 and shown in the associated plots.



Test specification: Section 15.249(d), Band edge emissions			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 28 °C	Relative Humidity: 45 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Figure 7.3.1 Band edge emission measurement set up

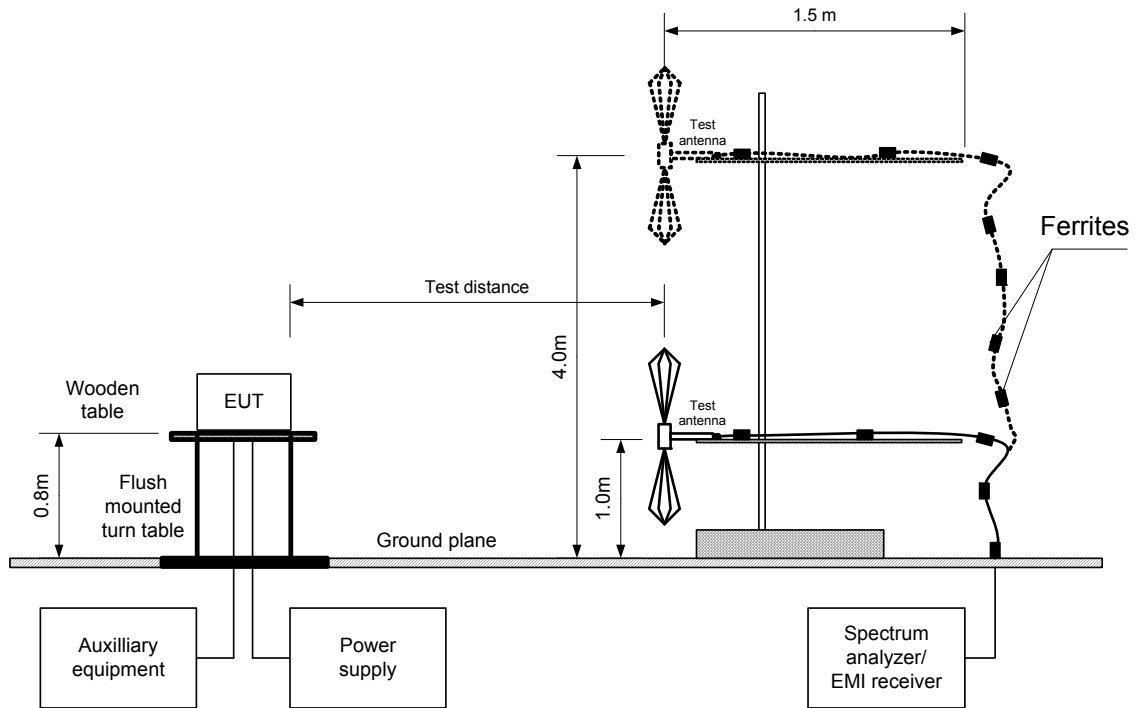



Test specification: Section 15.249(d), Band edge emissions			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 28 °C	Relative Humidity: 45 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Table 7.3.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 2400 – 2483.5MHz
DETECTOR USED: Peak hold
MODULATION: QPSK
BIT RATE: 250 kbps

Modulation envelope		Band edge limit, MHz	Margin, kHz**	Verdict
Edge	Frequency, MHz*			
Low	2402.09	2400.0	2090	Pass
High	2483.14	2483.5	360	Pass

* - Measured frequency beyond which the emission dropped 50 dB below the carrier emission or below the field strength limit whichever was a less stringent

** - Margin = Band edge limit – Band edge frequency

Reference numbers of test equipment used

HL 2432	HL 2780	HL 3901				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification: Section 15.249(d), Band edge emissions	
Test procedure: ANSI C63.10 section 6.10	
Test mode: Compliance	Verdict: PASS
Date(s): 13-Jul-16	
Temperature: 28 °C	Relative Humidity: 45 %
Remarks:	

Plot 7.3.1 Low band edge emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
EUT POSITION: X-axis
ANTENNA POLARIZATION: Vertical

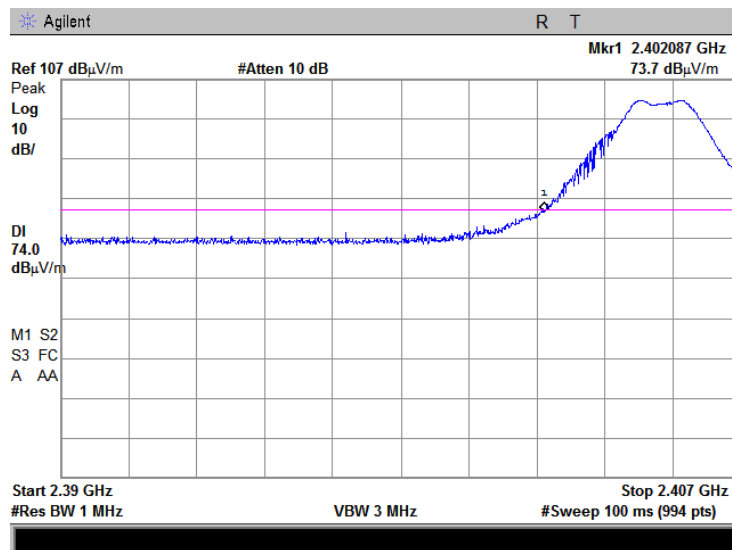

ANTENNA POLARIZATION: Horizontal

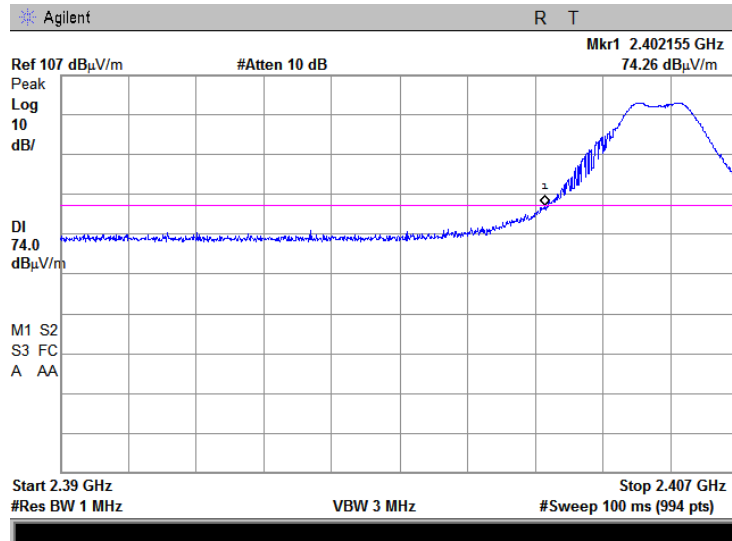




HERMON LABORATORIES


Test specification: Section 15.249(d), Band edge emissions			
Test procedure: ANSI C63.10 section 6.10			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 28 °C	Relative Humidity: 45 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Plot 7.3.2 High band edge emission test result

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis
ANTENNA POLARIZATION: Vertical

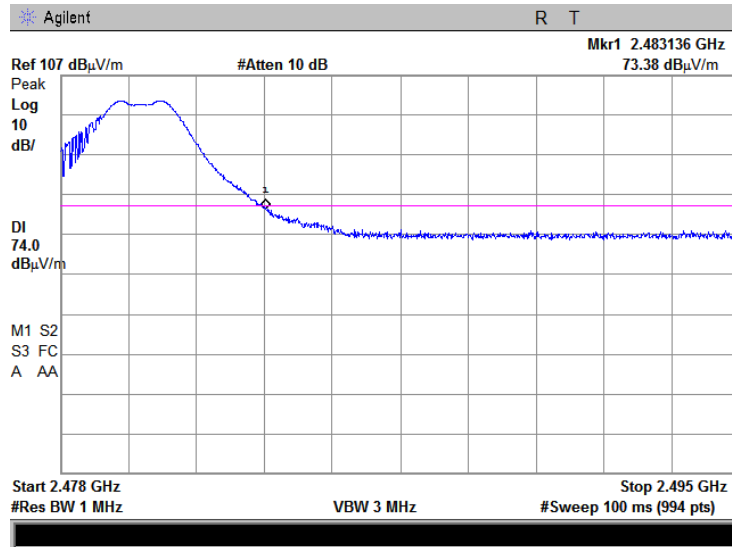

ANTENNA POLARIZATION: Horizontal

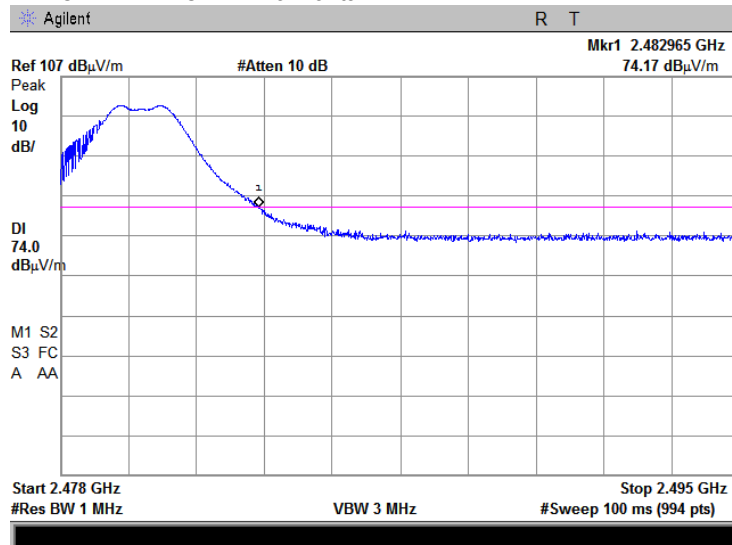



Test specification: Section 15.203, Antenna requirement			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 14-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1006 hPa	Power: Battery
Remarks:			

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly





Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

8 Unintentional emission tests

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.


8.1.2.2 The measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with biconical and log periodic antennas connected to EMI receiver. To find maximum radiation the turntable was rotated 360° , the measuring antenna height was changed, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

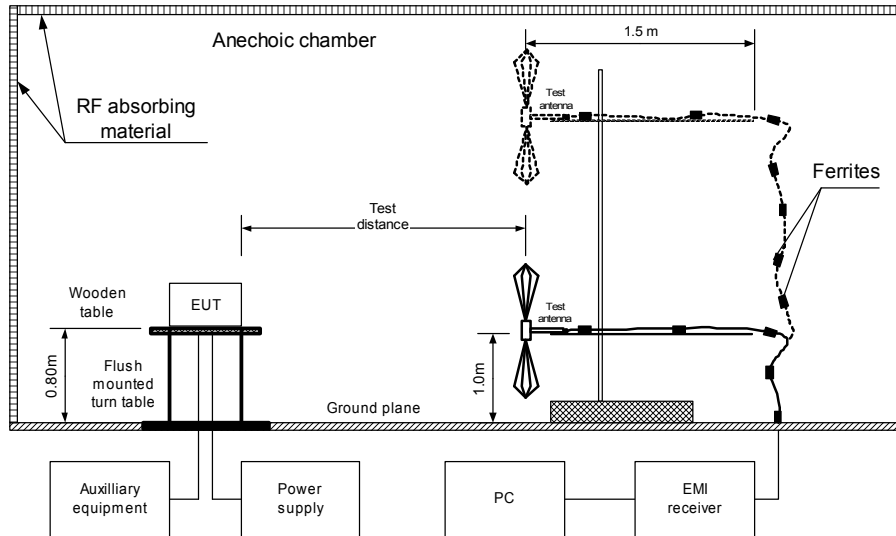

Photograph 8.1.1 Setup for radiated emission measurements





Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
 TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / QUASI-PEAK
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz – 18000 MHz
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 1984	HL 2780	HL 3901	HL 4278	HL 4353	HL 4932
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			



Plot 8.1.1 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

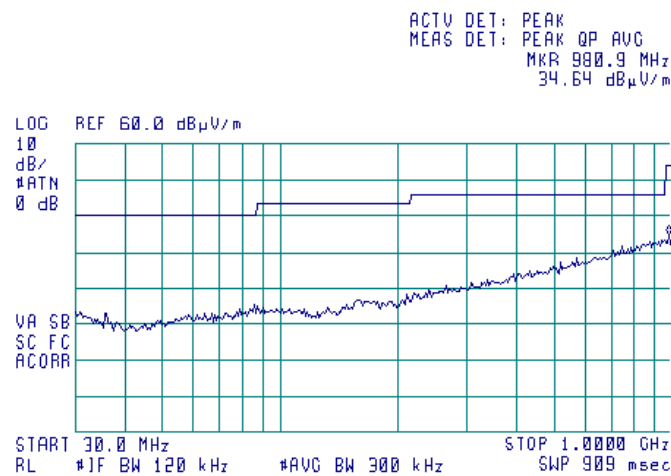

Plot 8.1.2 Radiated emission measurements from 1.0 to 2.9 GHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

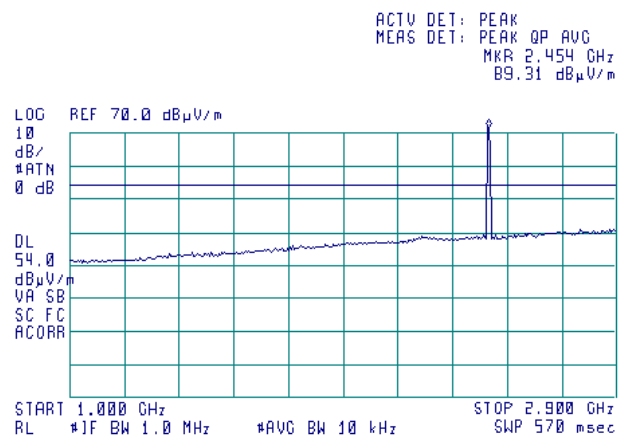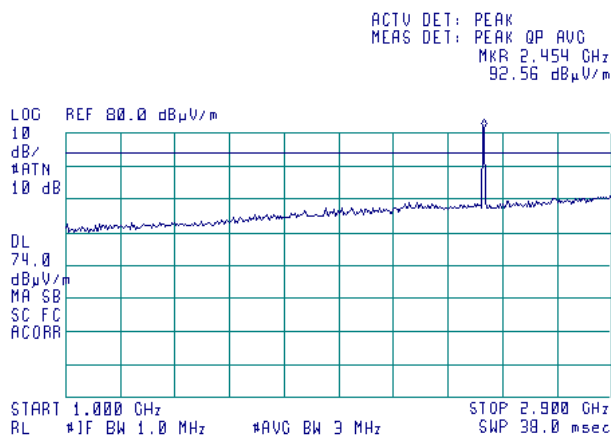


Note: mid carrier frequency is shown



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Jul-16			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1007 hPa	Power: Battery
Remarks:			


Plot 8.1.3 Radiated emission measurements from 2.9 to 10 GHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

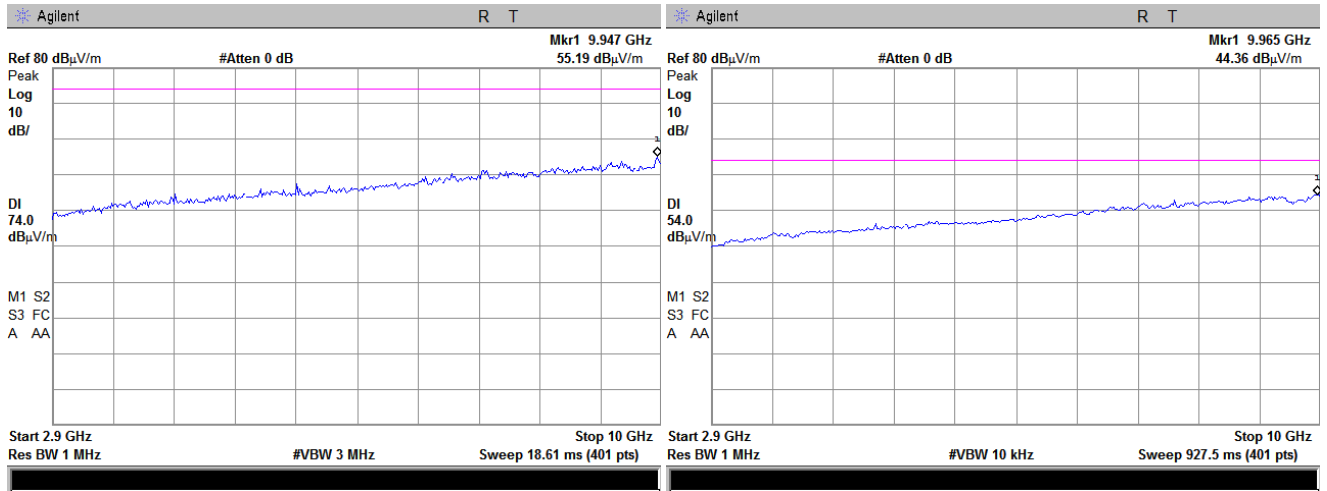

Plot 8.1.4 Radiated emission measurements from 10 to 18 GHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

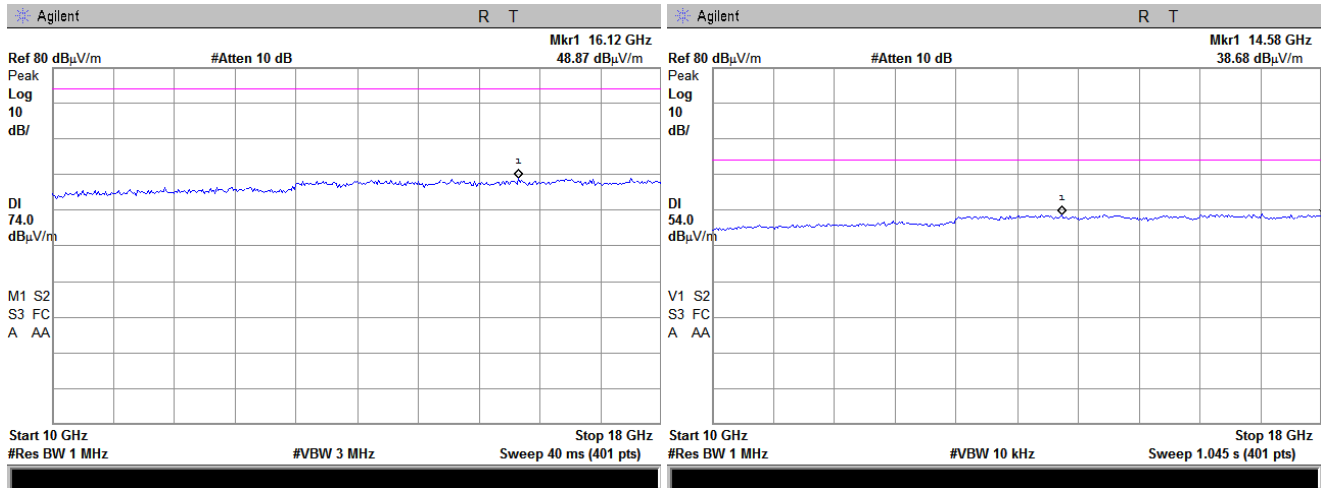

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	28-Mar-16	28-Mar-17
2432	Antenna, Double-Ridged Waveguide Horn 1 to 18 GHz	EMC Test Systems	3115	00027177	28-Mar-16	28-Mar-17
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	08-Sep-15	08-Sep-16
3810	Near-Field Probe Set, Hand held, 6 probes	EMC Test Systems	7405	9706-3927	01-Jan-16	01-Jan-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	15-Feb-16	15-Feb-17
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	22-Nov-15	22-Nov-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4756	Digital Hygrometer / Thermometer, (0 to +50) deg., (20 to 99) %RH	WESTERN Humidor Corporation	Caliber 4	NA	02-Nov-15	02-Nov-16
4932	Microwave preamplifier, 500 MHz to 18 GHz, 40 dB Gain	Com-Power Corporation	PAM-118A	551029	19-Nov-15	19-Nov-16
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	09-Nov-15	09-Nov-16



10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field strength in dB(μV/m).



Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor, HL 4956



Active Horn Antenna Factor Calibration

18 GHz to 40 GHz

Equipment:	ACTIVE HORN ANTENNA
Model:	AHA-840
Serial Number:	105004
Calibration Distance:	3 meter
Polarization:	Horizontal
Calibration Date:	1/26/2015

Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21

Calibration per ANSI C63.5: 2006
Standard Site Method, Equations 1-6 (3-antenna)

Corrected Reading (dBμV/m) = Meter Reading (dBμV) + AFE(dB/m)



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



Cable loss
Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M
APC-15FT-NMNM+, HL 4278

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		



Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT