




TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-31-285-0894 Fax: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR21-SEF0085-A Page (1) of (18)</p>	
--	--	---

1. Client

- Name : Uniden America Corporation
- Address : 6225 N. State highway 161, Suite 300, Irving Texas 75038
- Date of Receipt : 2021-07-01

2. Use of Report : -

3. Name of Product / Model : RADAR DETECTOR / R7

4. Manufacturer / Country of Origin : ATTOWAVE Co., Ltd. / Korea

5. Date of Test : 2021-07-07

6. Location of Test : Permanent Testing Lab On Site Testing
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

7. Test method used : ANSI C63.4:2014, FCC02-211, Class B

8. FCC ID : AMWUA1901

9. Test Results : Refer to the test result in the test report

<p>Affirmation</p>	<p>Tested by  Name : Byunghwan Min (Signature)</p>	<p>Technical Manager  Name : Gunsu Park (Signature)</p>
--------------------	---	---

2021-07-27

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

REPORT REVISION HISTORY

Date	Revision	Page No
2021-07-12	Originally issued	-
2021-07-27	Deleted the testing voltage phrase (Section 4.2) Added the FCC SDoC or FCC ID (Section 4.3) Added the Note ¹⁾ (Section 5.1)	1,2,10,13 Page

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

Contents

1. Applicant information	4
2. Laboratory information.....	5
3. Test system configuration.....	6
3.1 Operation environment.....	6
3.2 Measurement Uncertainty	7
4. Description of EUT	9
4.1 General information.....	9
4.2 Product description.....	10
4.3 Auxiliary equipments	10
4.4 Test configuration	11
4.5 Operating conditions	12
5. Summary of test results	13
5.1 Summary of EMI emission test results	13
6. Test results	14
6.1 Radiated Emission	14

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (4) of (18)



1. Applicant information

Applicant: Uniden America Corporation
Address: 6225 N. State highway 161, Suite 300, Irving Texas 75038

Manufacturer: ATTOWAVE Co., Ltd.
Address: 1005, 10F Leader's Tower, 60-15 Gasan-dong, Gumchun-gu,
Seoul, 153-801 Korea

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (5) of (18)

KCTL

2. Laboratory information

Address

KCTL Inc. (Suwon Lab.)

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311

FCC Site Designation No: KR0040

VCCI Registration No.: R-20080, G-20078, C-20059, T-20056

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

SITE MAP



3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber 10 m (RE)	21.6 °C	39.9 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (7) of (18)



3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted Emission measurement (Confidence level about 95 %, $k = 2$)			
Shielded Room (CE#1)	9 kHz ~ 150 kHz:	3.50 dB	
	150 kHz ~ 30 MHz:	3.06 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz:	3.05 dB	
	150 kHz ~ 30 MHz:	3.06 dB	
Radiated Emission measurement (Confidence level about 95 %, $k = 2$)			
10 m Chamber (4F)	30 MHz ~ 300 MHz	3 m:	5.36 dB
		10 m:	5.34 dB
	300 MHz ~ 1 000 MHz	3 m:	5.46 dB
		10 m:	5.44 dB
	1 GHz ~ 6 GHz	3 m:	6.24 dB
	6 GHz ~ 18 GHz	3 m:	6.60 dB
	18 GHz ~ 30 GHz	3 m:	6.72 dB
30 GHz ~ 40 GHz	3 m:	6.14 dB	
10 m Chamber (2F)	30 MHz ~ 300 MHz	3 m:	4.88 dB
		10 m:	4.86 dB
	300 MHz ~ 1 000 MHz	3 m:	4.94 dB
		10 m:	4.94 dB
1 GHz ~ 6 GHz	3 m:	6.28 dB	

3.3 Measurement Program

These test items were performed by software programs;

Test item	Measurement Program		Used
Conducted Emission	EP5CE_V 5.4.0(TOYO)		<input type="checkbox"/>
Radiated Emission	2F	EP10/RE_Ver 2021.01.000 (TOYO)	<input checked="" type="checkbox"/>
	4F	EP5RE_V 5.11.10(TOYO)	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (9) of (18)

KCTL

4. Description of EUT

4.1 General information

-Radar Frequencies :

10.500 - 10.550 GHz (X Band)

23.900 - 24.250 GHz (K Band)

33.400 - 35.700 GHz (Ka Superwideband)

-Laser Wavelength : 905nm +/-50nm

-Operating Temperature Range : -10C to +70C

-Power Requirements: Operational 12 to 15 volts DC


4.2 Product description

Type of product	RADAR DETECTOR
Model name (Basic)	R7
Model name (Variant)	-
Difference	-
Serial no	-
Testing voltage	DC 12 V
Input rating	DC 12 V ~ DC 15 V
Internal clock frequency	22 MHz
Note	-The following accessory was provided by the manufacturer. 1) Cigar Jack

4.3 Auxiliary equipments

Type	Model / Part #	S/N	Manufacturer	SDoC & FCC ID
Mobile Phone	SM-N950	-	SAMSUNG	A3LSMN950 KOR
DC Power Supply	E3632A	MY40004594	Agilent	-
Headset	Jlab Bombora Over-Ear Headphones with Universal Mic	-	JLAB	-
Rader JIG	-	-	-	-

4.4 Test configuration

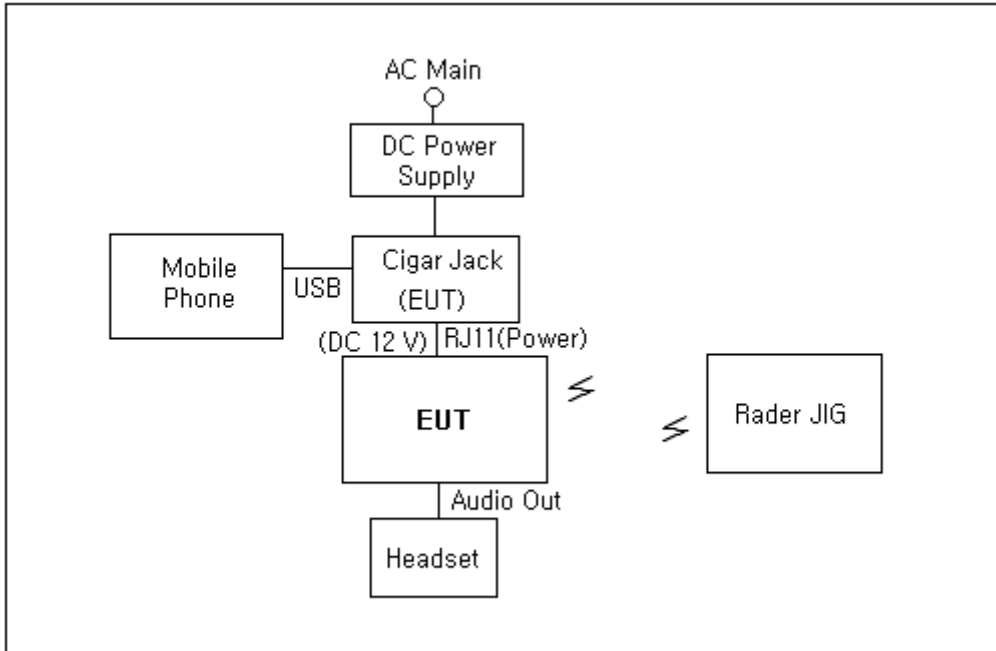

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT	RJ11(Power)	Cigar Jack (EUT)	-	1.5	Unshield
2		Audio Out	Headset	-	2.0	Unshield
3	Cigar Jack (EUT)	Power	DC Power Supply	-	2.0	Unshield
4		USB	Mobile Phone	USB	1.5	Shield

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating					
<p>Test #1</p>	<p>The EUT is linked to user guidance. During the test run, the EUT operates on the following:</p> <table border="1" data-bbox="405 687 1307 884"> <tr> <td>Stand-by mode</td> </tr> <tr> <td>X Band: (10.500 ~ 10.550) GHz</td> </tr> <tr> <td>K Band: (23.900 ~ 24.250) GHz</td> </tr> <tr> <td>Ka Band(Super-wide band): (33.400 ~ 35.700) GHz</td> </tr> <tr> <td>Laser:(950 ± 50) nm</td> </tr> </table>	Stand-by mode	X Band: (10.500 ~ 10.550) GHz	K Band: (23.900 ~ 24.250) GHz	Ka Band(Super-wide band): (33.400 ~ 35.700) GHz	Laser:(950 ± 50) nm
Stand-by mode						
X Band: (10.500 ~ 10.550) GHz						
K Band: (23.900 ~ 24.250) GHz						
Ka Band(Super-wide band): (33.400 ~ 35.700) GHz						
Laser:(950 ± 50) nm						

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
<input type="checkbox"/>	Conducted Emission	ANSI C63.4:2014, Class B FCC Part 15 Subpart B	N/A (Note ¹⁾)
<input checked="" type="checkbox"/>	Radiated Emission	ANSI C63.4:2014, Class B FCC Part 15 Subpart B	Pass

The data collected shows that EUT the complied with technical requirements of above rules part 15.109(h).

Note¹⁾: Report Number: (KR21-SEF0084) for AC line conducted Emissions results of the system

6. Test results

6.1 Radiated Emission

Testing voltage	DC 12 V		
Test facility	10 m Chamber (4F)		
Test distance	3 m		
Date	2021-07-07		
Temperature (°C)	21.6 °C	Humidity (% R.H.)	39.9 % R.H.
Remarks	Pass		

6.1.1 Limits of radiated emission measurement

Frequency [MHz]	Class A at 10 m QP(dB(μ V/m))		Class B at 3 m QP(dB(μ V/m))	
	FCC ¹⁾	ISED (ICES Issue 7)	FCC ¹⁾	ISED (ICES Issue 7)
30-88	39.1	40.0	40.0	40.0
88-216	43.5	43.5	43.5	43.5
216-230	46.4	46.4	46.0	46.0
230-960	46.4	47.0	46.0	47.0
Above 960	49.5	49.5	54.0	54.0

- ¹⁾: Alternative standard: CISPR, Pub. 22

- Test data in this section has been taken against the FCC 15.109(a) or (B) Limit as it is the most stringent limit.

By complying with more restrictive FCC 15.109 Limit compliance with the ICES-003 Issue 7 limit also demonstrated.

6.1.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.1.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Antenna Mast	MA4640-XP-ET	-	Innco Systems	-	<input checked="" type="checkbox"/>
DOUBLE RIDGED HORN ANTENNA	3117	00161083	ETS-LINDGREN	2021.09.23	<input checked="" type="checkbox"/>
Broadband Preamplifier	BBV9718	9718-233	SCHWARZBECK	2021.08.20	<input checked="" type="checkbox"/>
SIGNAL ANALYZER	FSV40	100988	R&S	2021.12.23	<input checked="" type="checkbox"/>

6.1.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB

The result is $30 + 12 + 5 + 6 - 35 = 18 \text{ dB } (\mu\text{V/m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (16) of (18)



6.1.5 Radiated emission measurement result

11.7 GHz ~ 12.2 GHz

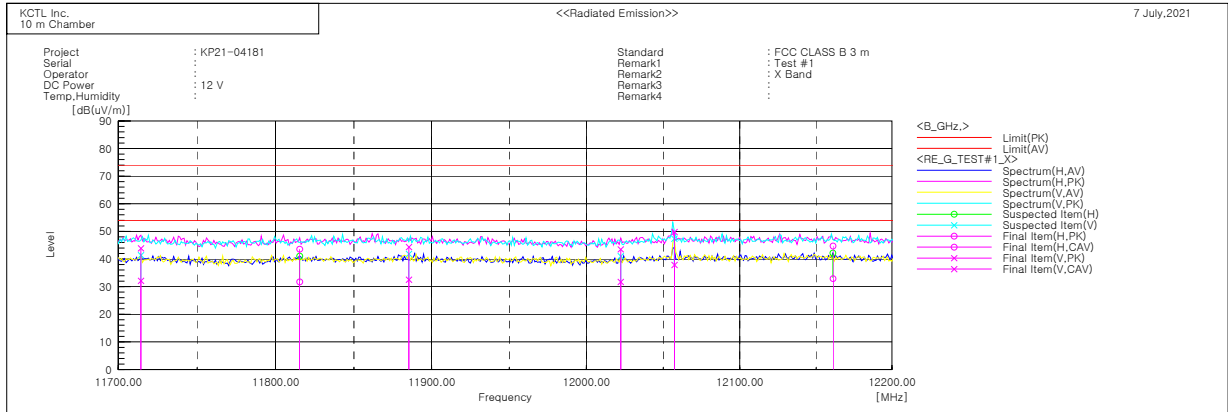

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	11714.320	V	32.1	20.3	11.8	43.9	32.1	74.0	54.0	30.1	21.9	154.0	343.0
2	11815.440	H	32.5	20.6	11.1	43.6	31.7	74.0	54.0	30.4	22.3	264.0	145.0
3	11885.340	V	33.3	21.4	11.1	44.4	32.5	74.0	54.0	29.6	21.5	152.0	357.0
4	12022.290	V	32.3	20.5	11.2	43.5	31.7	74.0	54.0	30.5	22.3	240.0	318.0
5	12057.280	V	37.9	26.0	11.9	49.8	37.9	74.0	54.0	24.2	16.1	231.0	47.0
6	12161.140	H	32.6	20.8	12.1	44.7	32.9	74.0	54.0	29.3	21.1	229.0	165.0


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (17) of (18)



11.7 GHz ~ 12.2 GHz

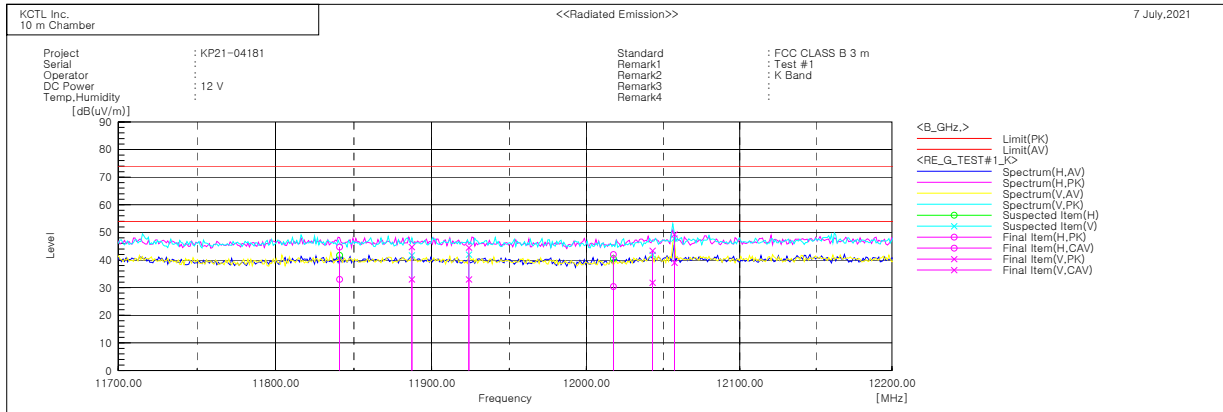

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	11840.930	H	33.7	22.0	11.0	44.7	33.0	74.0	54.0	29.3	21.0	192.0	281.0
2	11887.230	V	33.6	21.9	11.1	44.7	33.0	74.0	54.0	29.3	21.0	299.0	157.0
3	11924.040	V	33.7	22.2	10.8	44.5	33.0	74.0	54.0	29.5	21.0	144.0	11.0
4	12017.520	H	31.0	19.4	11.0	42.0	30.4	74.0	54.0	32.0	23.6	210.0	46.0
5	12043.010	V	31.6	20.0	11.8	43.4	31.8	74.0	54.0	30.6	22.2	286.0	121.0
6	12057.280	V	37.4	27.1	11.9	49.3	39.0	74.0	54.0	24.7	15.0	131.0	176.0


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SEF0085-A
Page (18) of (18)



11.7 GHz ~ 12.2 GHz

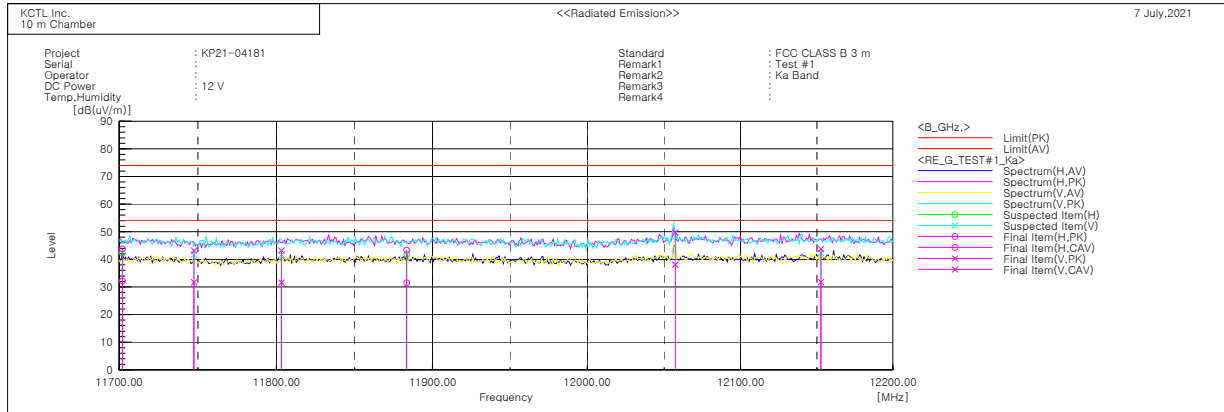

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	11702.040	H	31.9	20.3	11.9	43.8	32.2	74.0	54.0	30.2	21.8	124.0	11.0
2	11747.450	V	32.1	20.6	11.1	43.2	31.7	74.0	54.0	30.8	22.3	175.0	113.0
3	11803.110	V	32.1	20.5	11.1	43.2	31.6	74.0	54.0	30.8	22.4	290.0	348.0
4	11883.430	H	32.2	20.4	11.1	43.3	31.5	74.0	54.0	30.7	22.5	140.0	6.0
5	12057.220	V	37.8	26.2	11.9	49.7	38.1	74.0	54.0	24.3	15.9	175.0	176.0
6	12152.630	V	31.6	19.6	12.2	43.8	31.8	74.0	54.0	30.2	22.2	113.0	230.0