






# TEST REPORT

<b>Eurofins KCTL Co.,Ltd.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-31-285-0894 Fax: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: <b>KR23-SEF0008-A</b> Page (1) of (17)	 <b>eurofins</b>   <b>KCTL</b>
<p><b>1. Client</b></p> <ul style="list-style-type: none"> <li>◦ Name : Uniden America Corporation</li> <li>◦ Address : 6225 N. State highway 161, Suite 300, Irving Texas 75038</li> <li>◦ Date of Receipt : 2022-12-08</li> </ul> <p><b>2. Use of Report</b> : -</p> <p><b>3. Name of Product / Model</b> : RADAR DETECTOR / R9</p> <p><b>4. Manufacturer / Country of Origin</b> : ATTOWAVE Co., Ltd. / Korea</p> <p><b>5. Date of Test</b> : 2022-12-26</p> <p><b>6. Location of Test</b> : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing          (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)</p> <p><b>7. Test method used</b> : ANSI C63.4:2014, FCC 02-211, Class B</p> <p><b>8. FCC ID</b> : AMWUA2301</p> <p><b>9. Test Results</b> : Refer to the test result in the test report</p>		
Affirmation	Tested by  Name : Dawoon Kong (Signature)	Technical Manager  Name : Moonseop Cho (Signature)
2023-02-02		
<b>Eurofins KCTL Co.,Ltd.</b>		
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.		

## REPORT REVISION HISTORY

Date	Revision	Page No
2023-01-10	Originally issued	-
2023-02-02	Change the FCC ID	-

*This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

Note. The report No. KR23-SEF0008 is superseded by the report No. KR23-SEF0008-A.

## General remarks for test reports

### Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:


#### Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

# Contents

<b>1. Applicant information .....</b>	<b>4</b>
<b>2. Laboratory information.....</b>	<b>5</b>
<b>3. Test system configuration.....</b>	<b>6</b>
3.1 Operation environment.....	6
3.2 Measurement Uncertainty .....	7
<b>4. Description of EUT .....</b>	<b>9</b>
4.1 General information.....	9
4.2 Product description.....	10
4.3 Auxiliary equipments .....	10
4.4 Test configuration .....	11
4.5 Operating conditions .....	11
<b>5. Summary of test results .....</b>	<b>12</b>
5.1 Summary of EMI emission test results .....	12
<b>6. Test results .....</b>	<b>13</b>
6.1 Radiated Emission .....	13
<b>7. EUT photographs .....</b>	<b>17</b>

<p><b>Eurofins KCTL Co.,Ltd.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-31-285-0894 Fax: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p>	<p>Report No.: KR23-SEF0008 Page (4) of (17)</p>	<p>   KCTL</p>
---	--	---

## 1. Applicant information

**Applicant:** Uniden America Corporation  
**Address:** 6225 N. State highway 161, Suite 300, Irving Texas 75038

**Manufacturer:** ATTOWAVE Co., Ltd.  
**Address:** 1005, 10F Leader's Tower, 60-15 Gasan-dong, Gumchun-gu,  
Seoul, 153-801 Korea



## 2. Laboratory information

### Address

#### **Eurofins KCTL Co.,Ltd. (Suwon Lab.)**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311


FCC Site Designation No: KR0040

VCCI Registration No.: R-20080, G-20078, C-20059, T-20056

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**

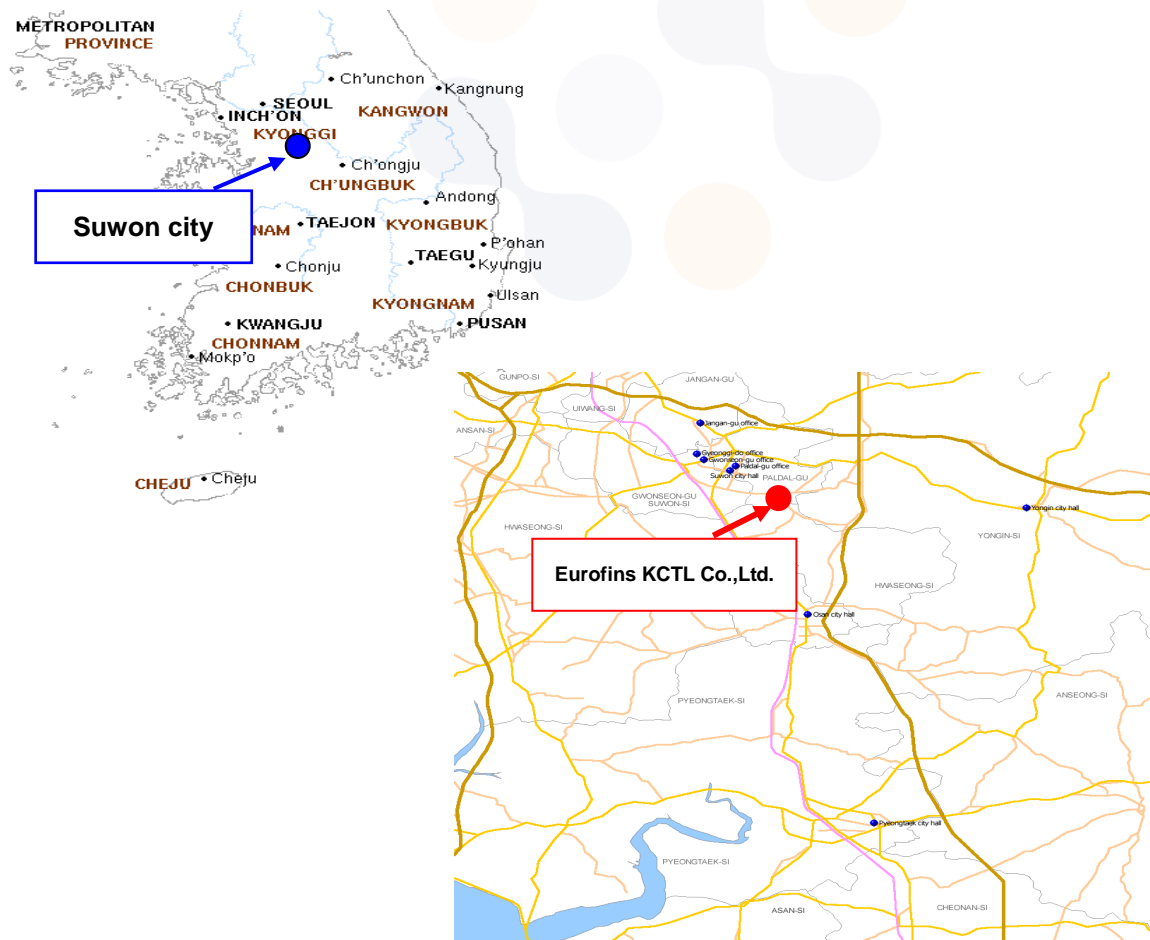

### 3. Test system configuration

#### 3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber 10 m (RE)	22.1 °C	20.3 % R.H.	-

#### Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted Emission measurement (Confidence level about 95 %, $k = 2$ )			
Shielded Room (CE#1)	9 kHz ~ 150 kHz:	3.50 dB	
	150 kHz ~ 30 MHz:	3.06 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz:	3.05 dB	
	150 kHz ~ 30 MHz:	3.06 dB	
Radiated Emission measurement (Confidence level about 95 %, $k = 2$ )			
10 m Chamber (4F)	30 MHz ~ 200 MHz	3 m:	4.98 dB
		10 m:	4.96 dB
	200 MHz ~ 1 000 MHz	3 m:	4.28 dB
		10 m:	4.28 dB
	1 GHz ~ 6 GHz	3 m:	5.08 dB
	6 GHz ~ 18 GHz	3 m:	5.38 dB
	18 GHz ~ 30 GHz	3 m:	5.22 dB
30 GHz ~ 40 GHz	3 m:	4.44 dB	
10 m Chamber (2F)	30 MHz ~ 200 MHz	3 m:	4.50 dB
		10 m:	4.48 dB
	200 MHz ~ 1 000 MHz	3 m:	3.72 dB
		10 m:	3.70 dB
1 GHz ~ 6 GHz	3 m:	5.08 dB	

### 3.3 Measurement Program

These test items were performed by software programs;

Test item	Measurement Program		Used
Conducted Emission	EP5/CE_Ver 5.4.0(TOYO)		<input type="checkbox"/>
Radiated Emission	2F	EP10/RE_Ver 2021.01.000 (TOYO)	<input checked="" type="checkbox"/>
	4F	EP5/RE_Ver 5.11.10(TOYO)	





## 4. Description of EUT

### 4.1 General information

#### Radar

Receiver type : Dual conversion super-heterodyne

Antenna type : Linear polarized, self-contained

Detector type : Scanning frequency discriminator

Frequency operation : X-band; 10.50 ~ 10.55 GHz ( $10.525 \pm 0.025$  GHz)

K-band; 23.90 ~ 24.25 GHz ( $24.075 \pm 0.175$  GHz)

Ka-band (super-wide); 33.40 ~ 35.70 GHz ( $34.550 \pm 1.150$  GHz)

#### General

Operating Temperature Range :  $-10^{\circ}$  C to  $+70^{\circ}$  C

Storage Temperature Range :  $-30^{\circ}$  C to  $+95^{\circ}$  C

Power requirements : 11V to 16V DC, 300 mA, negative ground

Dimensions HxWxL : 31.8 mm x 82.3 mm x 104.5 mm


## 4.2 Product description

Type of product	RADAR DETECTOR
Model name (Basic)	R9
Model name (Variant)	-
Difference	-
Serial no	-
Testing voltage	DC 12 V
Input rating	DC 12 V
Internal clock frequency	22 MHz
Note	--

## 4.3 Auxiliary equipments

Type	Model / Part #	S/N	Manufacturer
RADAR DETECTOR HOST	-	-	-
DC Power Supply	E3632A	KR94907353	Agilent
Rader JIG	-	-	-

#### 4.4 Test configuration

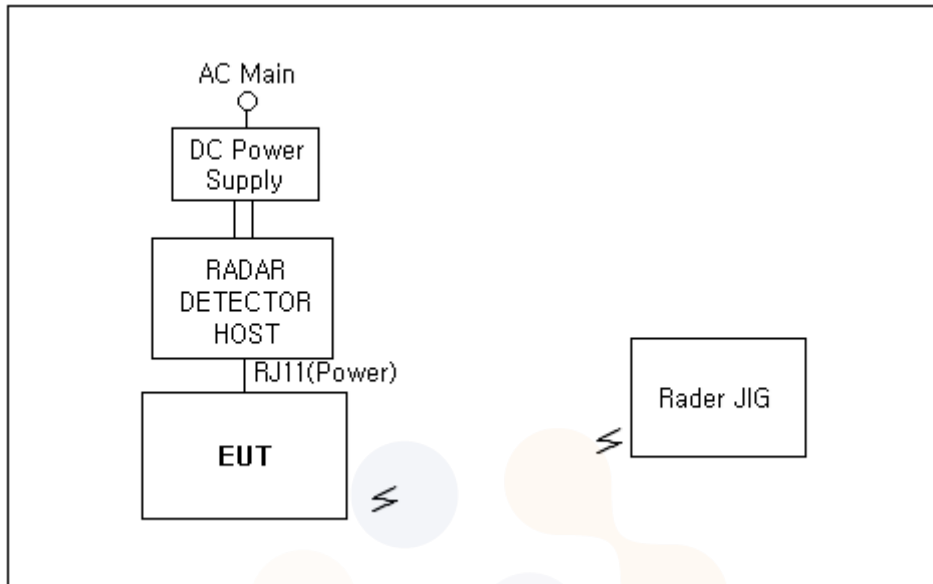

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	<b>EUT</b>	RJ11(Power)	RADAR DETECTOR HOST	-	1.5	Unshield
2	RADAR DETECTOR HOST	Power	DC Power Supply	-	2.0	Unshield

#### 4.5 Operating conditions

The EUT was configured as normal intended use.

Test Mode	Normal operating					
Test #1	The EUT was connected as user's guide. And during the test executed EUT is operating on the following: <table border="1" style="width: 100%;"> <tr> <td>Stand-by mode</td> </tr> <tr> <td>X Band: (10.500 - 10.550) GHz</td> </tr> <tr> <td>K Band: (23.900 - 24.250) GHz</td> </tr> <tr> <td>Ka Band(Super-wide band): (33.400 - 35.700) GHz</td> </tr> <tr> <td>Laser:(905 ± 50) nm</td> </tr> </table>	Stand-by mode	X Band: (10.500 - 10.550) GHz	K Band: (23.900 - 24.250) GHz	Ka Band(Super-wide band): (33.400 - 35.700) GHz	Laser:(905 ± 50) nm
Stand-by mode						
X Band: (10.500 - 10.550) GHz						
K Band: (23.900 - 24.250) GHz						
Ka Band(Super-wide band): (33.400 - 35.700) GHz						
Laser:(905 ± 50) nm						

## 5. Summary of test results

### 5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
<input type="checkbox"/>	Conducted Emission	ANSI C63.4:2014, FCC 02-211 FCC Part 15 Subpart B, Class B	Note <sup>1)</sup>
<input checked="" type="checkbox"/>	Radiated Emission	ANSI C63.4:2014, FCC 02-211 FCC Part 15 Subpart B, Class B	Pass

The data collected shows that EUT the complied with technical requirements of above rules part 15.109(h).

Note <sup>1)</sup>: This test item is not applicable because the product is supplied DC power from vehicular battery.



## 6. Test results

### 6.1 Radiated Emission

Testing voltage	DC 12 V		
Test facility	10 m Chamber (4F)		
Test distance	3 m		
Date	2022-12-26		
Temperature (°C)	22.1 °C	Humidity (% R.H.)	20.3 % R.H.
Remarks	Pass		

#### 6.1.1 Limits of radiated emission measurement

Frequency [MHz]	Class A at 10 m QP(dB(μV/m))		Class B at 3 m QP(dB(μV/m))	
	FCC <sup>1)</sup>	ISED (ICES Issue 7)	FCC <sup>1)</sup>	ISED (ICES Issue 7)
30-88	39.1	40.0	40.0	40.0
88-216	43.5	43.5	43.5	43.5
216-230	46.4	46.4	46.0	46.0
230-960	46.4	47.0	46.0	47.0
Above 960	49.5	49.5	54.0	54.0

- <sup>1)</sup>: Alternative standard: CISPR, Pub. 22

- Test data in this section has been taken against the FCC 15.109(a) or (B) Limit as it is the most stringent limit.

By complying with more restrictive FCC 15.109 Limit compliance with the ICES-003 Issue 7 limit also demonstrated.

#### 6.1.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### 6.1.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESR7	101078	R&S	2023.08.18	<input checked="" type="checkbox"/>
Antenna Mast	MA4640-XP-ET	-	Innco Systems	-	<input checked="" type="checkbox"/>
Turn Table	DT3000-2t	-	Innco Systems	-	<input checked="" type="checkbox"/>
DOUBLE RIDGED HORN ANTENNA	3117	00161083	ETS-LINDGREN	2023.01.21	<input checked="" type="checkbox"/>
AMPLIFIER	BBV9718C	00138	SCHWARZBECK	2023.10.14	<input checked="" type="checkbox"/>

### 6.1.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB


The result is  $30 + 12 + 5 + 6 - 35 = 18 \text{ dB } (\mu\text{V/m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average

### 6.1.6 Radiated emission measurement result


#### 11.7 GHz ~ 12.2 GHz

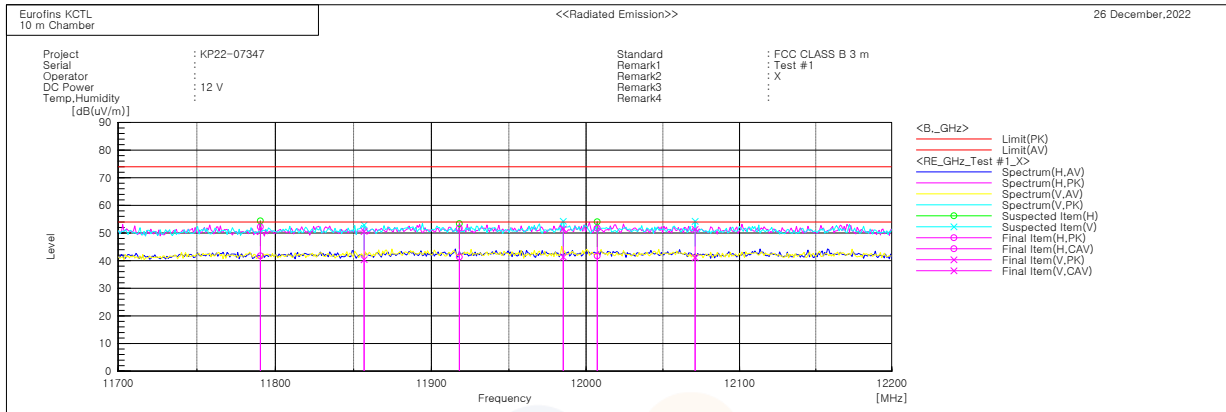

**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	11790.440	H	36.7	26.2	15.5	52.2	41.7	74.0	54.0	21.8	12.3	247.0	254.0
2	11856.740	V	34.9	24.7	15.7	50.6	40.4	74.0	54.0	23.4	13.6	118.0	356.0
3	11917.950	H	35.9	25.5	15.8	51.7	41.3	74.0	54.0	22.3	12.7	324.0	273.0
4	11985.100	V	35.6	25.4	15.9	51.5	41.3	74.0	54.0	22.5	12.7	104.0	320.0
5	12007.200	H	35.7	25.7	16.0	51.7	41.7	74.0	54.0	22.3	12.3	284.0	159.0
6	12070.950	V	35.3	25.1	16.0	51.3	41.1	74.0	54.0	22.7	12.9	161.0	146.0

11.7 GHz ~ 12.2 GHz

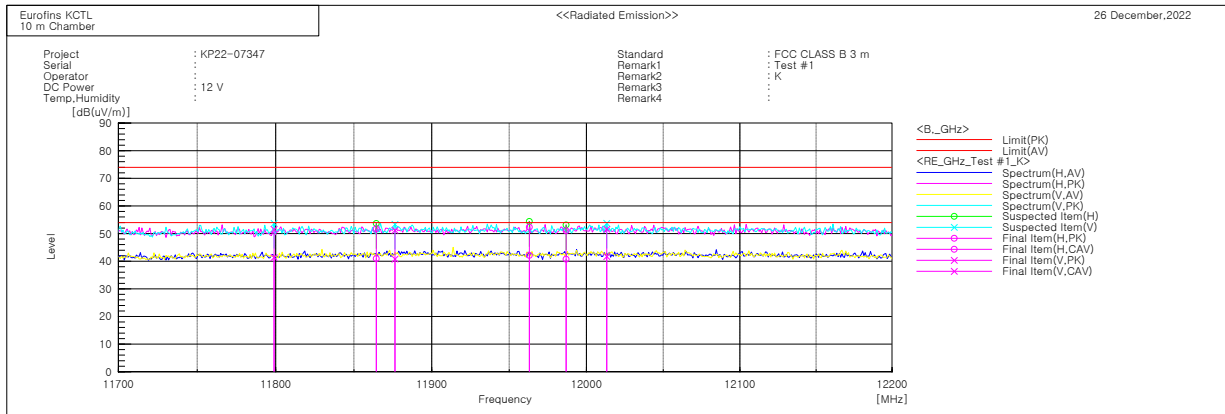

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	11798.940	V	36.0	25.9	15.5	51.5	41.4	74.0	54.0	22.5	12.6	164.0	107.0
2	11864.390	H	36.0	25.2	15.7	51.7	40.9	74.0	54.0	22.3	13.1	281.0	159.0
3	11876.290	V	35.5	25.1	15.7	51.2	40.8	74.0	54.0	22.8	13.2	118.0	29.0
4	11963.000	H	36.4	26.2	15.9	52.3	42.1	74.0	54.0	21.7	11.9	241.0	354.0
5	11986.800	H	35.1	24.8	15.9	51.0	40.7	74.0	54.0	23.0	13.3	318.0	179.0
6	12013.150	V	35.6	25.7	16.0	51.6	41.7	74.0	54.0	22.4	12.3	181.0	95.0




**Eurofins KCTL Co.,Ltd.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
Tel: 82-31-285-0894 Fax: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR23-SEF0008  
Page (17) of (17)



11.7 GHz ~ 12.2 GHz

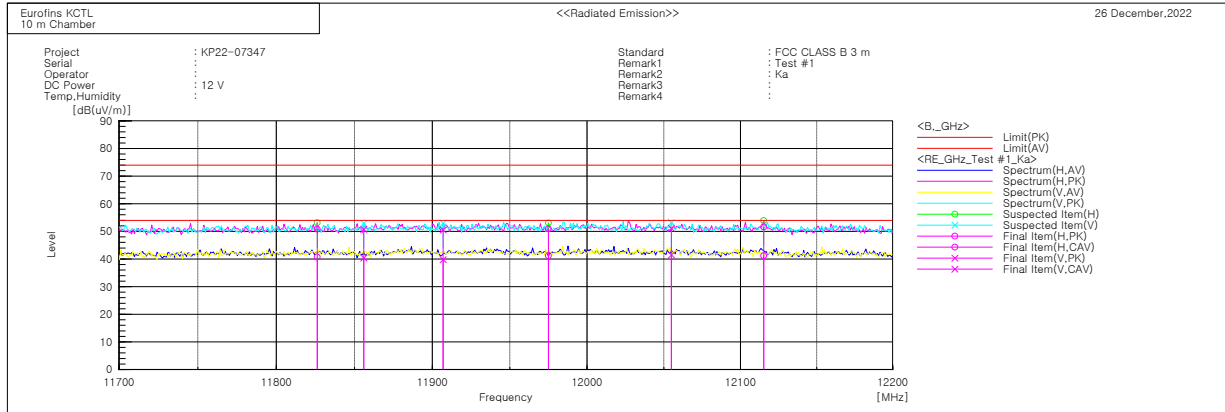

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]
1	11826.140	H	35.2	25.1	15.6	50.8	40.7	74.0	54.0	23.2	13.3	218.0	272.0
2	11855.890	V	35.0	24.7	15.7	50.7	40.4	74.0	54.0	23.3	13.6	211.0	85.0
3	11906.890	V	34.7	24.0	15.8	50.5	39.8	74.0	54.0	23.5	14.2	119.0	125.0
4	11974.900	H	35.0	25.3	15.9	50.9	41.2	74.0	54.0	23.1	12.8	325.0	216.0
5	12054.800	V	35.1	25.5	16.0	51.1	41.5	74.0	54.0	22.9	12.5	142.0	264.0
6	12115.150	H	35.7	25.3	15.9	51.6	41.2	74.0	54.0	22.4	12.8	148.0	349.0