



849 NW State Road 45
Newberry, FL 32669 USA
Phone: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15
SCANNING RECEIVER

Applicant	UNIDEN AMERICA CORPORATION
Address	4700 AMON CARTER BLVD.
	FORT WORTH TEXAS 76155
	USA
FCC ID:	AMWUB362
Model Number	BC355C
Product Description	ANALOG MOBILE SCANNER
Date Sample Received	8/13/2009
Date Tested	8/20/2009
Tested By	Nam Nguyen
Approved By	Mario de Aranzeta
Report Number	1897AUT9TestReport.doc
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



TABLE OF CONTENTS

GENERAL REMARKS.....	3
GENERAL INFORMATION.....	4
TEST EQUIPMENT LIST.....	5
TEST PROCEDURE.....	6
RADIATED SPURIOUS EMISSIONS	7
POWER LINE CONDUCTED INTERFERENCE	10
38 Db REJECTION RADIO	13

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report
☐ not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 8/20/2009

APPLICANT: UNIDEN AMERICA CORPORATION
FCC ID: AMWUB362
REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

GENERAL INFORMATION

The test results relate only to the items tested.	
DUT Description	ANALOG MOBILE SCANNER
FCC ID	AMWUB362
Model Number	BC355C
DUT Power Source	<input checked="" type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Modifications to DUT	None
Test Standards	FCC Part 15, Subpart B, ANSI C63.4-2003

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 2/5/09	2/5/12
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Hygro-Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/13/07	12/13/09
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

TEST PROCEDURE

General: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

Radiation Interference: The test procedure used was ANSI Standard C63.4-2003 using a spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

Formula Of Conversion Factors: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dBuV	+ 10.36 dB/m	+0.40 dB	=30.36 dBuV/m @ 3m

ANSI C63.4-2003 Section 10.1.7 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1mby 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and verticals planes.

If powerline conducted testing was required for this device, the situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI C63.4-2003 with the EUT 40 cm from the vertical ground wall.

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109

Requirements:

Frequency	Limits
30 – 88	40.0 dB μ V/m measured @ 3 meters
80 – 216	43.5 dB μ V/m measured @ 3 meters
216 – 960	46.0 dB μ V/m measured @ 3 meters
Above 960	54.0 dB μ V/m measured @ 3 meters

Test Procedure: The procedure used was ANSI C63.4-2003. The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes.

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
25	405.8	6	V	1.21	15.82	23.03	22.97
25	405.8	7.2	H	1.21	16.16	24.57	21.43
26.9	407.7	6.2	V	1.21	15.85	23.26	22.74
26.9	407.7	8	H	1.21	16.17	25.38	20.62
27.2	408	6.2	V	1.21	15.86	23.27	22.73
27.2	408	6.5	H	1.21	16.18	23.89	22.11
27.7	408.5	7.2	H	1.21	16.19	24.6	21.4
27.7	408.5	7.6	V	1.21	15.87	24.68	21.32
28	408.8	6.1	V	1.21	15.88	23.19	22.81
28	408.8	7.3	H	1.21	16.19	24.7	21.3
29	409.8	7.3	V	1.21	15.9	24.41	21.59
29	409.8	7.5	H	1.21	16.2	24.91	21.09
29.7	410.5	6.3	V	1.21	15.91	23.42	22.58
29.7	410.5	8.1	H	1.21	16.2	25.51	20.49
30	410.8	5.6	V	1.21	15.91	22.72	23.28
30	410.8	7.2	H	1.21	16.2	24.61	21.39
40	420.8	6.8	V	1.22	16.01	24.03	21.97
40	420.8	7.7	H	1.22	16.22	25.14	20.86
50	430.8	8.5	V	1.23	16.12	25.85	20.15

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBμV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBμV/m	Margin dB
50	430.8	11.4	H	1.23	16.52	29.15	16.85
52	432.8	7.6	V	1.23	16.16	24.99	21.01
52	432.8	12.9	H	1.23	16.58	30.71	15.29
54	434.8	7.7	V	1.23	16.2	25.13	20.87
54	434.8	14	H	1.23	16.64	31.87	14.13
108	488.8	5.1	V	1.29	17.65	24.04	21.96
108	488.8	7.1	H	1.29	17.52	25.91	20.09
122.5	503.3	3.1	H	1.31	18.2	22.61	23.39
122.5	503.3	4.5	V	1.31	18.1	23.91	22.09
137	517.8	3.6	H	1.35	18.88	23.83	22.17
137	517.8	4.1	V	1.35	18.34	23.79	22.21
140.5	521.3	3.6	H	1.36	18.85	23.81	22.19
140.5	521.3	4.6	V	1.36	18.22	24.18	21.82
144	524.8	4.8	H	1.37	18.71	24.88	21.12
144	524.8	5.6	V	1.37	18.01	24.98	21.02
146	526.8	4.5	H	1.38	18.63	24.51	21.49
146	526.8	4.8	V	1.38	17.89	24.07	21.93
148	528.8	4.3	H	1.39	18.55	24.24	21.76
148	528.8	4.4	V	1.39	17.77	23.56	22.44
162.5	543.3	4.5	H	1.43	18.4	24.33	21.67
162.5	543.3	5	V	1.43	18.1	24.53	21.47
174	554.8	4.6	H	1.46	18.7	24.76	21.24
174	554.8	5.2	V	1.46	18.1	24.76	21.24
406	786.8	5.5	H	1.87	21.57	28.94	17.06
406	786.8	8.1	V	1.87	20.87	30.84	15.16
413	793.8	5.3	H	1.89	21.6	28.79	17.21
413	793.8	7.7	V	1.89	20.94	30.53	15.47
420	800.8	5.7	H	1.9	21.61	29.21	16.79
420	800.8	8.3	V	1.9	21.01	31.21	14.79
435	815.8	5.2	H	1.91	21.82	28.93	17.07
435	815.8	9.5	V	1.91	21.22	32.63	13.37
450	830.8	4.4	H	1.92	22.13	28.45	17.55
450	830.8	9.3	V	1.92	21.42	32.64	13.36

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBμV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBμV/m	Margin dB
460	840.8	4.9	H	1.92	22.51	29.33	16.67
460	840.8	9.4	V	1.92	21.64	32.96	13.04
470	850.8	4.1	H	1.93	22.62	28.65	17.35
470	850.8	9	V	1.93	22.12	33.05	12.95
491	871.8	4.9	H	1.94	23.05	29.89	16.11
491	871.8	10.7	V	1.94	22.4	35.04	10.96
512	892.8	6.5	H	1.95	23.3	31.75	14.25
512	892.8	11.2	V	1.95	22.63	35.78	10.22
806	425.2	7.4	V	1.23	16.05	24.68	21.32
806	425.2	11.5	H	1.23	16.36	29.09	16.91
815	434.2	8.8	V	1.23	16.18	26.21	19.79
815	434.2	12.8	H	1.23	16.63	30.66	15.34
823.9	443.1	8	V	1.24	16.4	25.64	20.36
823.9	443.1	12.2	H	1.24	16.83	30.27	15.73
849.1	468.3	5.6	V	1.27	17.07	23.94	22.06
849.1	468.3	8.9	H	1.27	17.13	27.3	18.7
859	478.2	5.6	V	1.28	17.26	24.14	21.86
859	478.2	7.7	H	1.28	17.61	26.59	19.41
868.9	488.1	4.4	V	1.29	17.62	23.31	22.69
868.9	488.1	6.7	H	1.29	17.54	25.53	20.47
894.1	513.3	4.5	V	1.34	18.43	24.27	21.73
894.1	513.3	5.1	H	1.34	18.83	25.27	20.73
925.1	544.3	3.7	V	1.43	18.1	23.23	22.77
925.1	544.3	4.8	H	1.43	18.43	24.66	21.34
956	575.2	4.4	H	1.53	18.8	24.73	21.27
956	575.2	4.8	V	1.53	18.36	24.69	21.31
956	370	10.8	H	1.17	15.2	27.17	18.83
956	370	10.9	V	1.17	15.1	27.17	18.83

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBμV)	Average Limits (dBμV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Procedure: ANSI Standard C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Test Data: The attached graphs represent the emissions read for power line conducted. Both lines were observed.

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362


REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 1

NOTES:

UNIDEN AMERICA CORPORATION - FCC ID: AMWUB362
POWERLINE CONDUCTED PLOT - LINE 1

FCC 15.107 Mask Class B

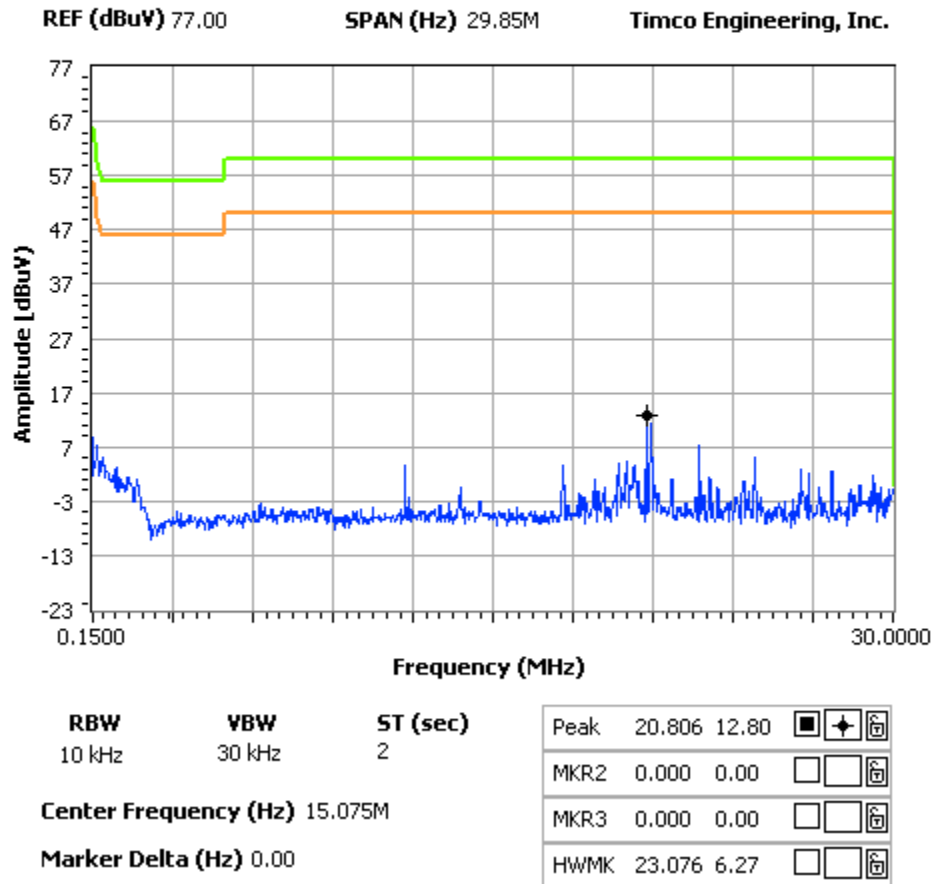

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362


REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2

NOTES:

UNIDEN AMERICA CORPORATION - FCC ID: AMWUB362
POWERLINE CONDUCTED PLOT - LINE 2

FCC 15.107 Mask Class B

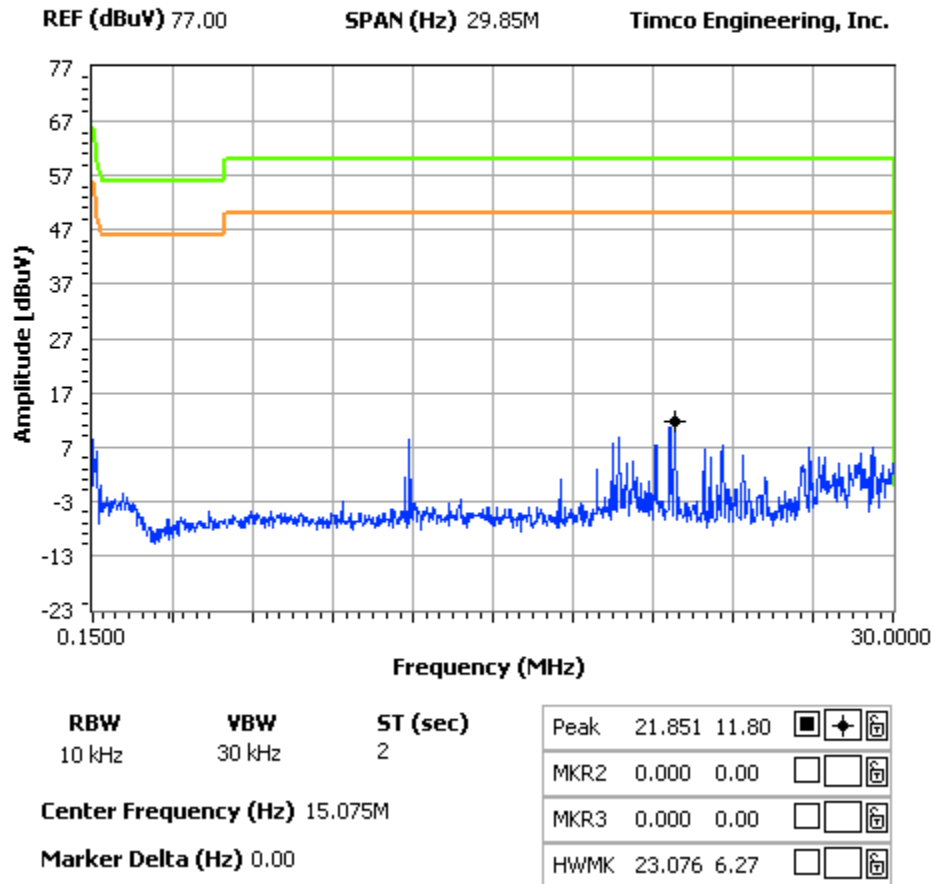

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362


REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc

38 Db REJECTION RADIO

RULES PART NUMBER: 15.121(b)

REQUIREMENTS: 38dB REJECTION RATIO TO SENSITIVITY OF THE RECEIVER.

TEST SET-UP

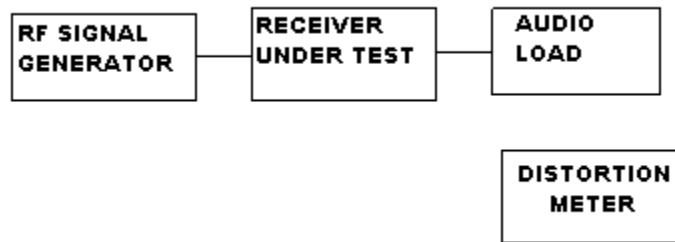

- a. Equipment connected as illustrated
- b. A standard signal was applied to the receiver input terminals.
- c. Receiver output audio output was adjusted for rated output.
- d. The RF Signal generator was adjusted to the lowest level to produce a 12dB SINAD without the audio output dropping more than 3dB. Make note of sensitivity level.
- e. This was done across the different bands to establish a reference level. The reference taken was the worse case sensitivity.
- f. The output of the signal generator was then adjusted to a level of 60dB above the reference level at a frequency of 824.5MHz.
- g. With the level set 60dB above the level measured in step e.
- h. Set squelch on receiver to threshold, the signal level required to open the squelch must be lower than the level measured in step d.
- i. Cause the receiver to scan or step-it through its complete range of frequencies.
- j. If receiver stops or unsquelches on any frequency, record the frequency and then adjust the level until a 12dB SINAD is produced. This level must be greater than 38dB above the level in step e.
- k. Repeat steps f through j for frequencies 836.0, 848.5, 869.1, 881.0, & 893.5MHz.

TEST RESULTS: The UUT meets the 38dB REJECTION RATIO.

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUB362

REPORT #: U\UNIDEN AMW\1897AUT9\1897AUT9TestReport.doc