



849 NW State Road 45  
Newberry, FL 32669 USA  
Ph: 888.472.2424 or 352.472.5500  
Fax: 352.472.2030  
Email: [info@timcoengr.com](mailto:info@timcoengr.com)  
Website: [www.timcoengr.com](http://www.timcoengr.com)

---

**FCC PART 15.249 AND IC RSS-210**  
**TEST REPORT**  
**UNLICENSED INTENTIONAL RADIATOR**

<b>Applicant</b>	UNIDEN AMERICA CORPORATION	
<b>Address</b>	4700 AMON CARTER BLVD.	
	FORT WORTH TEXAS 76155 USA	
<b>FCC ID</b>	AMWUF054	
<b>IC</b>	513C-UF054	
<b>Model Number</b>	BTS200	
<b>Product Description</b>	BLUETOOTH SPEAKER	
<b>Date Sample Received</b>	12/20/2010	
<b>Date Tested</b>	12/30/2010	
<b>Tested By</b>	Joe Scoglio	
<b>Approved By</b>	Mario R. de Aranzeta	
<b>Report Number</b>	2878AT10TestReport.doc	
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01

## TABLE OF CONTENT

GENERAL REMARKS .....	3
GENERAL INFORMATION .....	4
EMC EQUIPMENT LIST.....	5
TEST PROCEDURES.....	6
RADIATION INTERFERENCE .....	7
OCCUPIED BANDWIDTH .....	8
BAND EDGE COMPLIANCE .....	10
DUTY CYCLE .....	14
DUTY CYCLE PLOTS.....	15
POWER LINE CONDUCTED INTERFERENCE .....	17

APPLICANT: UNIDEN AMERICA CORPORATION  
FCC ID: AMWUF054  
IC: 513C-UF054  
REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## **GENERAL REMARKS**

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

### **Summary**

The device under test does:

fulfill the general approval requirements as identified in this test report  
 not fulfill the general approval requirements as identified in this test report

### **Attestations**

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669



### **Authorized Signatory Name:**

Mario de Aranzeta C.E.T.  
Compliance Engineer/ Lab. Supervisor

**Date:** 12/30/2010

APPLICANT: UNIDEN AMERICA CORPORATION  
FCC ID: AMWUF054  
IC: 513C-UF054  
REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## GENERAL INFORMATION

### DUT Specification

The test results relate only to the items tested.		
Applicable Standard	Part 15.249	
DUT Description	BLUETOOTH SPEAKER	
FCC ID	AMWUF054	
Model Number	BTS200	
Operating Frequency	TX: 2402 – 2480 MHz.	RX: Same
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz	
	<input checked="" type="checkbox"/> DC Power	
	<input type="checkbox"/> Battery Operated Exclusively	
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Antenna Connector	FCC Rules require that the antenna connector be unique.	
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.	
Test Conditions	Temperature: 26°C Relative humidity: 50%	
Test Exercise	The DUT was placed in continuous transmit mode of operation.	
Modifications	None	

### Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

**EMC EQUIPMENT LIST**

<b>Device</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal/Char Date</b>	<b>Due Date</b>
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 3/10/10	3/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/11
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUF054

IC: 513C-UF054

REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## TEST PROCEDURES

**Radiation Interference:** ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dB $\mu$ V	+ 10.36 dB	+ 0.5 = 30.86 dB $\mu$ V/m @ 3m

**Power Line Conducted Interference:** The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

**ANSI C63.4-2003 10.1 Measurement Procedures:** The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## RADIATION INTERFERENCE

**Rules Part No.:** 15.249, 15.209

**Requirements:**

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) $\mu$ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu$ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu$ V/m @ 30 meters
30 - 88	40.0 dB $\mu$ V/m @ 3 meters
80 - 216	43.5 dB $\mu$ V/m @ 3 meters
216 - 960	46.0 dB $\mu$ V/m @ 3 meters
Above 960	54.0 dB $\mu$ V/m @ 3 meters
Part 15.249	
Fundamental 902 - 928 MHz	94.0 dB $\mu$ V/m @ 3 meters
Fundamental 2.4 - 2.4835 MHz	94.0 dB $\mu$ V/m @ 3 meters
Harmonics	54.0 dB $\mu$ V/m @ 3 meters

**Test Data:**

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Pol	Coax Loss dB	Correction Factor dB	Duty cycle correction factor	Field Strength dB $\mu$ V/m	Margin dB
2,402.0	2,402.00	60.6	H	3.18	32.25	10.7	85.33	8.67
2,402.0	2,402.00	61.3	V	3.18	32.25	10.7	86.03	7.97
2,402.0	4,804.00	16.0	V	4.90	34.10	10.7	44.30	9.70
2,402.0	4,804.00	16.6	H	4.90	34.10	10.7	44.90	9.10
2,402.0	7,206.00	6.4	H	5.72	36.04	10.7	37.46	16.54
2,402.0	9,608.00	8.1	H	6.78	36.71	10.7	40.89	13.11
2,402.0	9,608.00	8.5	V	6.78	36.71	10.7	41.29	12.71
2,442.0	2,442.00	60.0	H	3.21	32.35	10.7	84.86	9.14
2,442.0	2,442.00	60.8	V	3.21	32.35	10.7	85.66	8.34
2,442.0	4,884.00	17.8	H	4.94	34.10	10.7	46.14	7.86
2,442.0	4,884.00	19.1	V	4.94	34.10	10.7	47.44	6.56
2,480.0	2,480.00	58.3	H	3.24	32.45	10.7	83.29	10.71
2,480.0	2,480.00	60.7	V	3.24	32.45	10.7	85.69	8.31
2,480.0	4,960.00	18.7	H	4.98	34.10	10.7	47.08	6.92
2,480.0	4,960.00	19.0	V	4.98	34.10	10.7	47.38	6.62

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUF054

IC: 513C-UF054


REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## OCCUPIED BANDWIDTH

Rules Part No.: 15.209


**Requirements:** The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

### Test Data:

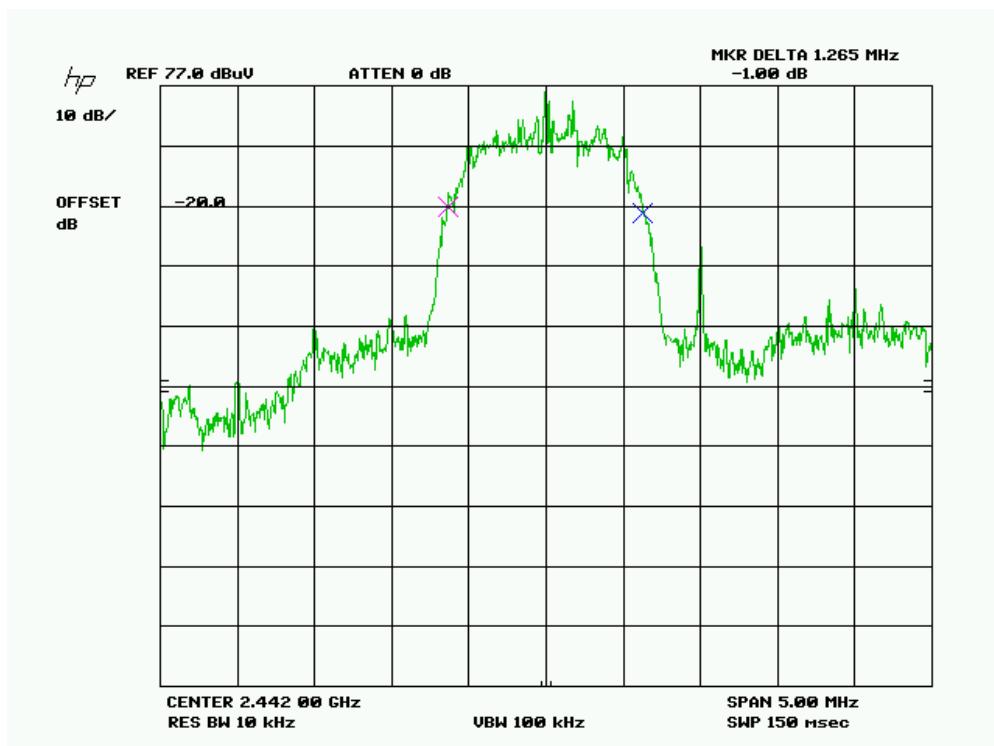


DH 5

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

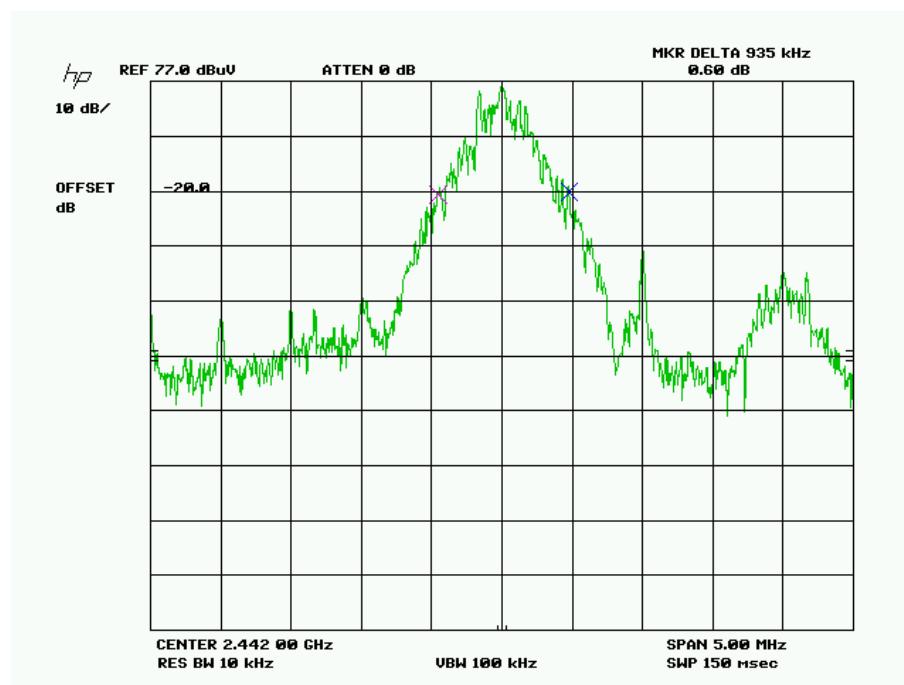

DH 1

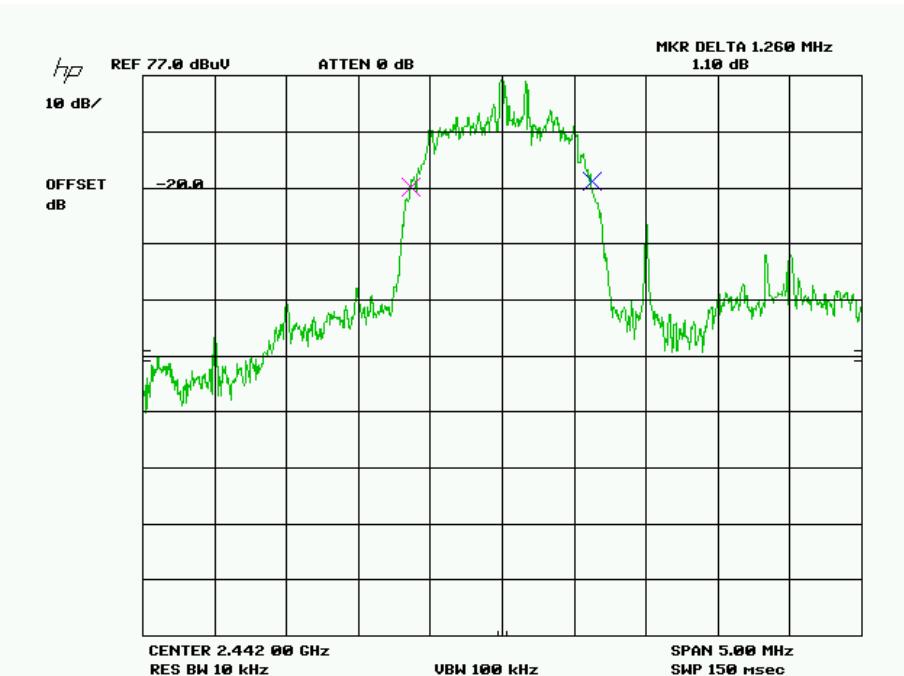

DH 3

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

**BAND EDGE COMPLIANCE**
**Rules Part No.:** 15.249 (d)

**Requirements:** 40 dBc or in the case of restricted bands 54 dB $\mu$ V/m.

**Test Data:**


Peak Plot

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty Cycle Factor	Field Strength dB $\mu$ V/m	Margin dB
2,402.0	2,400.00	28.3	V	3.18	32.24	10.7	53.02	0.98


APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUF054

IC: 513C-UF054

REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## Lower bandedge

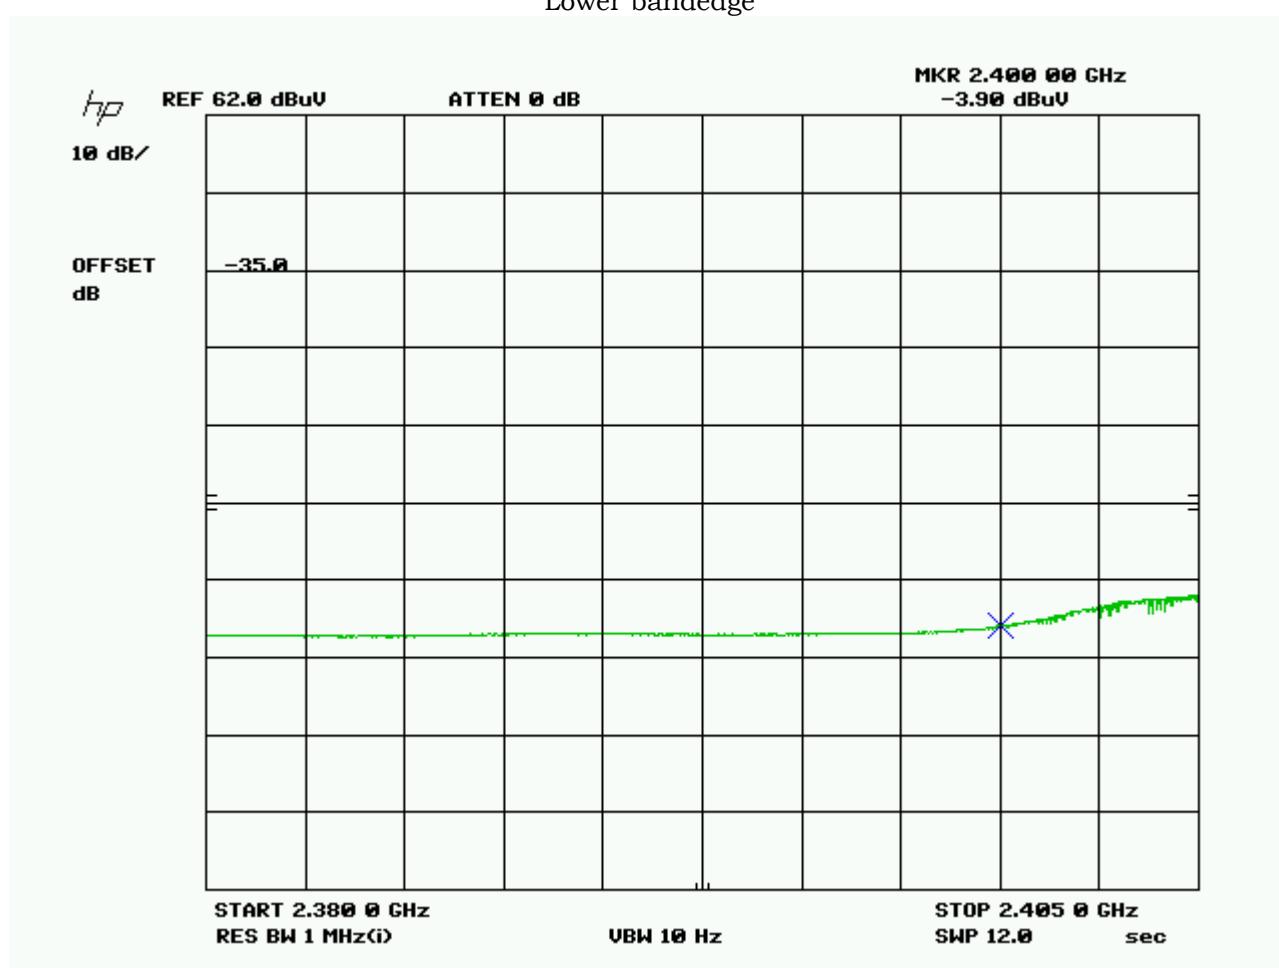


## Average Plot

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty Cycle Factor	Field Strength dB $\mu$ V/m	Margin dB
2,402.0	2,400.00	-3.9	V	3.18	32.24	10.7	20.82	33.18

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

Lower non-adjacent restricted band

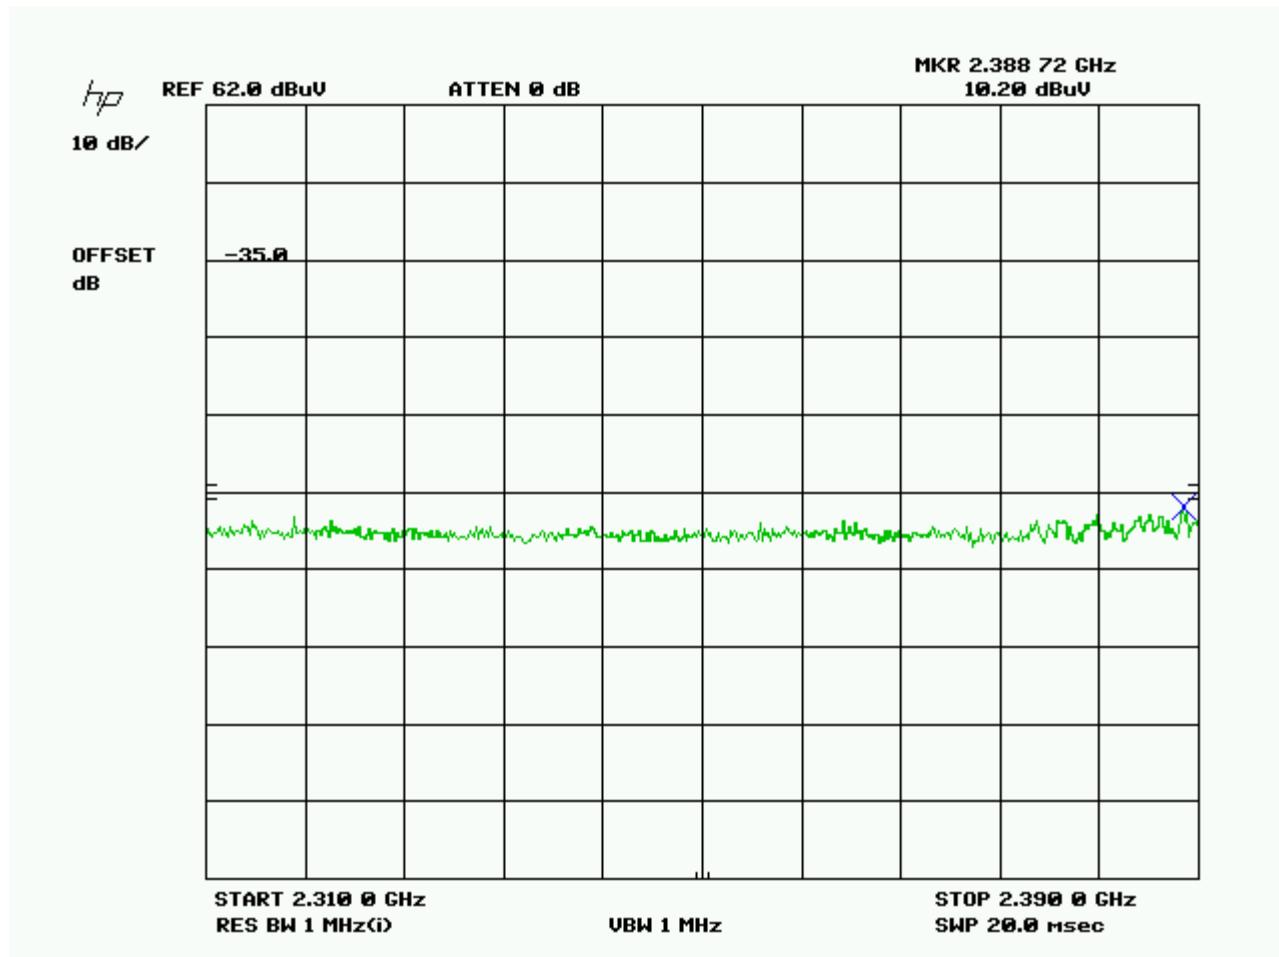

Peak Plot

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Duty Cycle Factor	Field Strength dB $\mu$ V/m	Margin dB
2,402.0	2,388.70	10.2	V	3.17	32.21	10.7	34.88	19.12


APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUF054

IC: 513C-UF054

REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## Upper bandedge

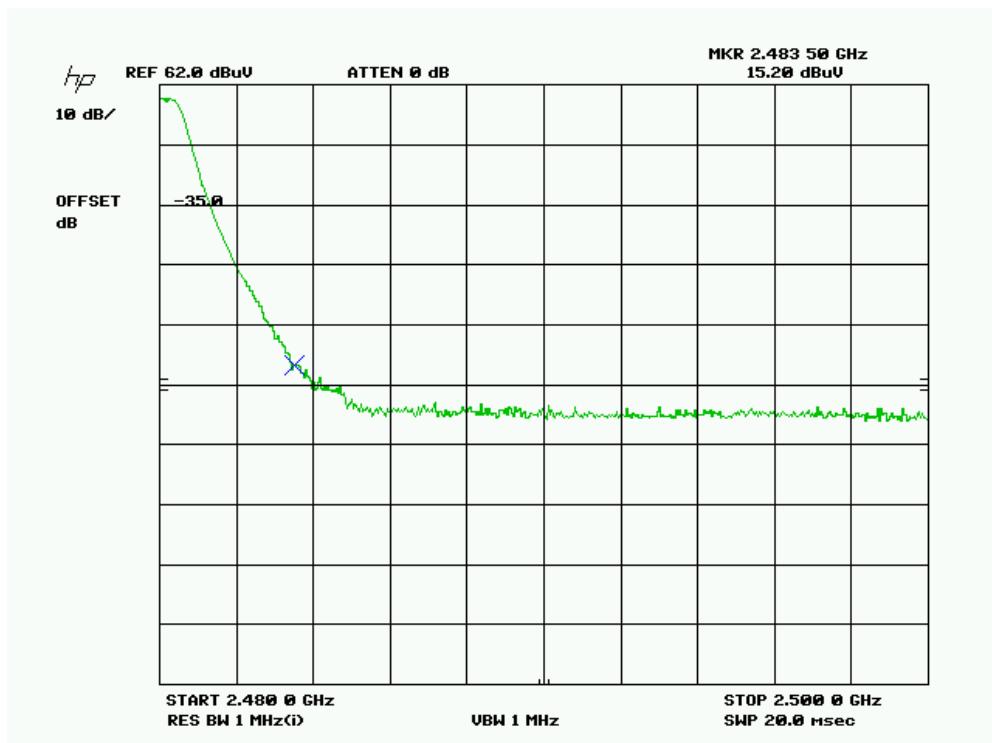

## Peak Plot

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB $\mu$ V	Ant. Pol V/H	Coax Loss dB	Correction Factor dB/m	Duty Cycle factor	Field Strength dB $\mu$ V/m	Margin dB
2,480.0	2,483.50	15.2	V	3.24	32.46	10.7	40.20	13.8

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc



## DUTY CYCLE



**Total # of pulses:** 81 in 100 ms

**Duration of pulse:** .36 ms maximum duration of pulse according to manufacturer.


$20 \times \log ((81 \times .36) / 100) = 20 \times \log (0..36) = 10.7 \text{ dB}$

APPLICANT: UNIDEN AMERICA CORPORATION  
FCC ID: AMWUF054  
IC: 513C-UF054  
REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## DUTY CYCLE PLOTS

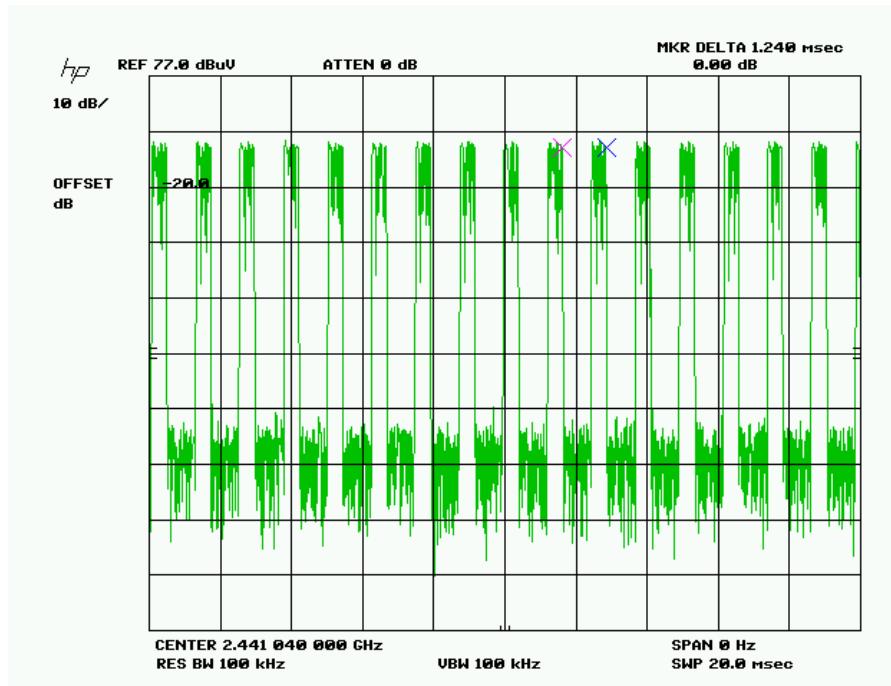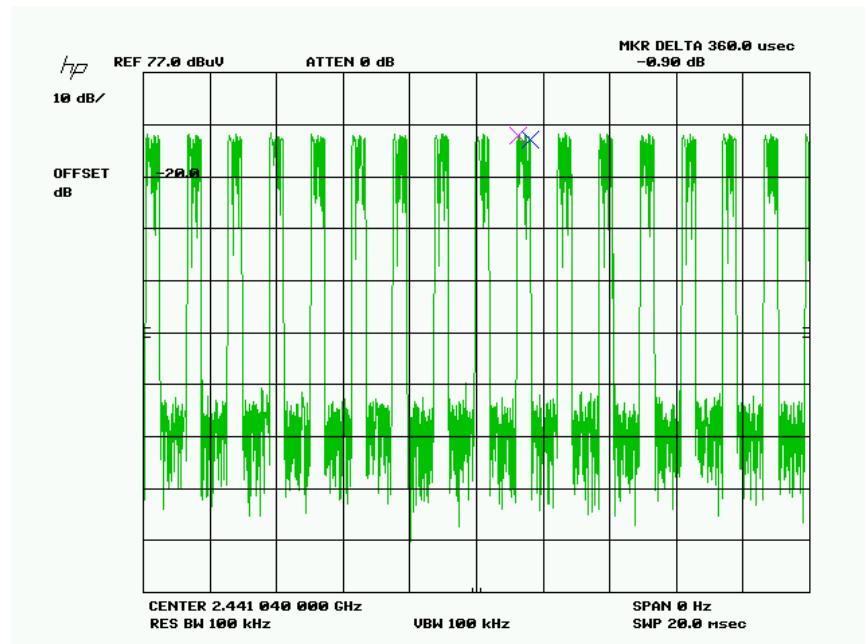

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

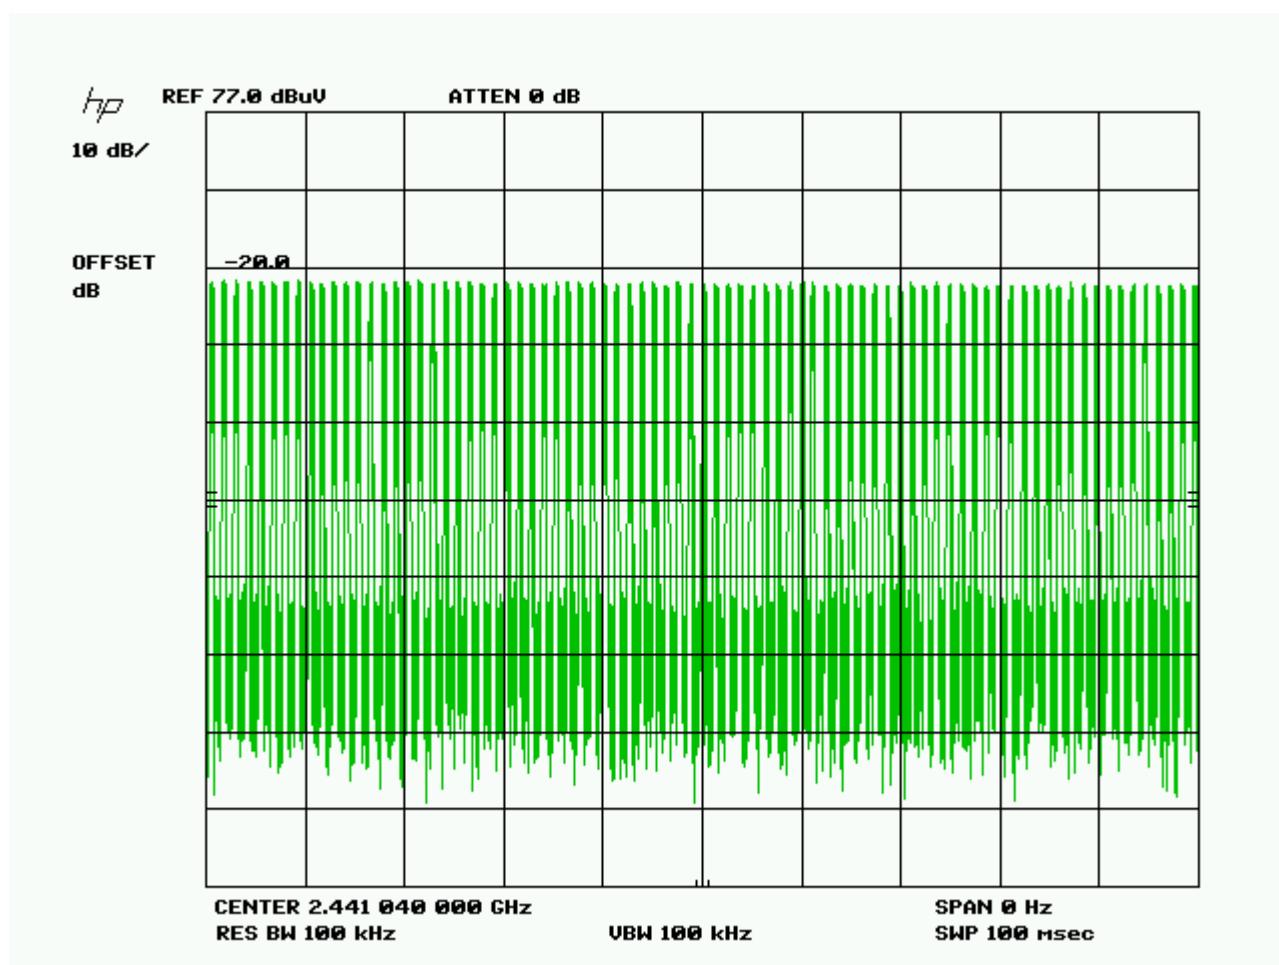

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## POWER LINE CONDUCTED INTERFERENCE

**Rules Part No.:** 15.207

**Requirements:**

Frequency (MHz)	Quasi Peak Limits (dB $\mu$ V)	Average Limits (dB $\mu$ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50


**Test Data:** The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## POWERLINE CONDUCTED PLOT – LINE 1

**NOTES:**

ac line conducted line 1

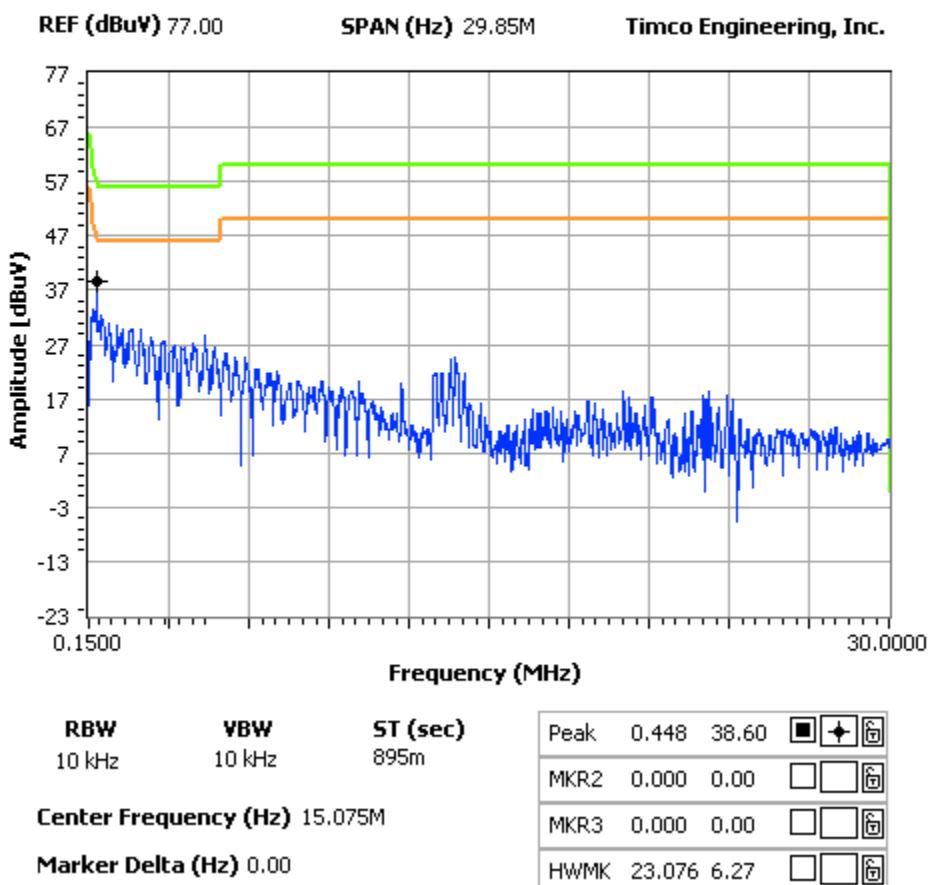
**FCC 15.107 Mask Class B**


APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc

## POWERLINE CONDUCTED PLOT – LINE 2

**NOTES:**

ac line conducted line 2

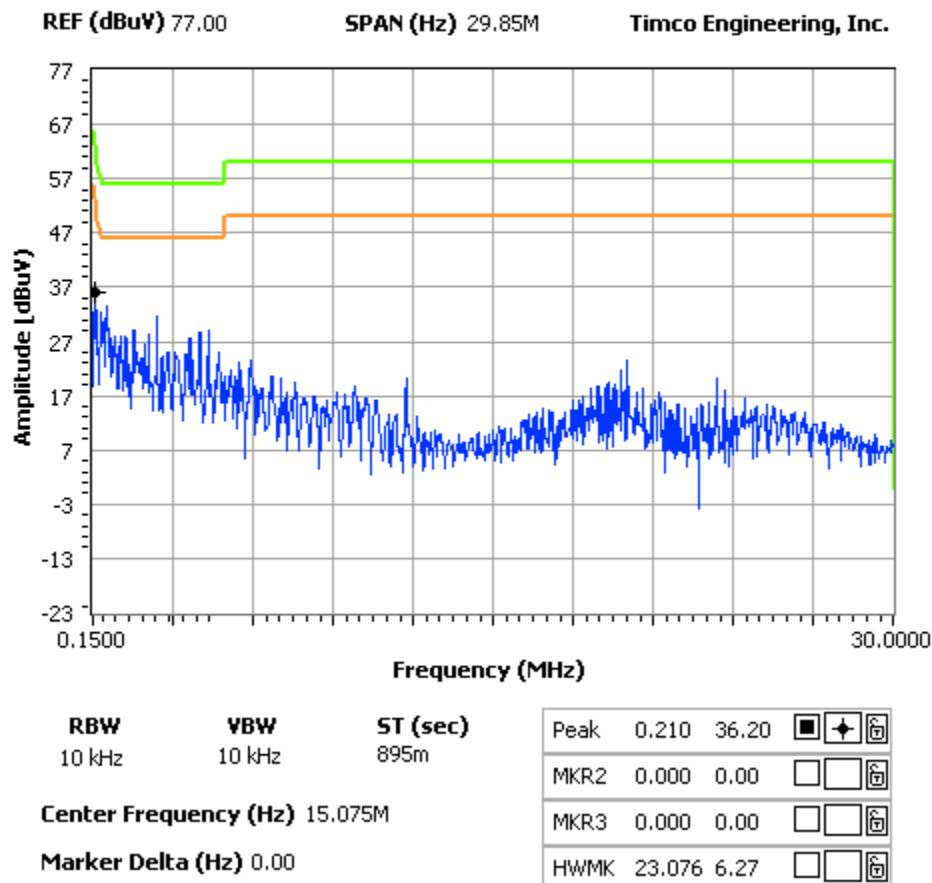**FCC 15.107 Mask Class B**


APPLICANT: UNIDEN AMERICA CORPORATION  
 FCC ID: AMWUF054  
 IC: 513C-UF054  
 REPORT: U\UNIDEN AMW\2878AT10\2878AT10TestReport.doc