

# Test Report

## TEST PROCEDURES AND TEST SITE DESCRIPTION

DATE: 11-6-2007  
FCC ID: AMWUT037  
MODEL: GMR1838  
DESCRIPTION: Handy type 22CH FRS/GMRS Radio

Tested by: Mr. K. Toyoda

Uniden Electronics Products (Shenzhen) Co., Ltd  
Tong Mei Village, Fuk Wing Chen,  
Baoan, Shenzhen, China  
TEL: 86755-2731-5111-7658  
E-mail: TOYO@uniden.co.jp

MEASUREMENT ITEMS	Section No.
1. DC Voltage & Current into Final Device	2.1033(C)(8)
2. RF Output Power	2.1046
3. Modulation Characteristics (Audio Roll-off)	2.1047
4. Modulation Characteristics (Audio Frequency Response)	2.1047
5. Modulation Characteristics (Modulation Limiting)	2.1047 & 95.637(a)
6. Occupied Bandwidth	2.1049(c)(1) & 95.635(b)(1)(3)(7)
7. Spurious & Harmonic Emission at Antenna Terminal	2.1051
8. Field Strength of Spurious/Harmonic Radiation	2.1053 & 95.635(b)(7)
9. Frequency Stability (Temperature)	2.1055
10. Frequency Stability (Voltage)	2.1055

NOTE: List of measurement equipment and test site description are included in this EXHIBIT.

1. DC Voltage & Current into Final Device 2.1033(C)(8)  
-----

To measure the DC Voltage and Current into Final Amplifying Device, the measuring equipment was connected to the actual P.C.Board of the transmitter.

FCC limits: Not specified

Test Results: Refer to test data

2. RF Output Power 2.1046 & 95.639  
-----

The unit was tuned-up in accordance with the alignment procedure stated in the EXHIBIT-6, and was loaded into a 50-ohm resistive termination. The unit was powered through its normally supplied power cable by a DC power supply. Power supply voltage was set to nominal voltage at the power supply terminals with the transmitter off.

The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting. At the end of the third 5 minutes period, the RF output power is measured. During the test, no components of the emission spectrum exceed the limit specified in the applicable rule part for occupied bandwidth or emission limitations.

FCC limits: 0.5 W ERP for FRS and 5W ERP for GMRS

Test Results: Refer to test data

3. Modulation Characteristics (Audio Roll-off) 2.1047  
-----

To measure the audio roll-off filter response, an audio frequency oscillator and AF VTVM were connected to the actual P.C.Board of the transmitter. AF VTVM and an oscilloscope monitored the output of the audio filter. An AF input level was maintained constant at least 10 dB below the saturation level at maximum response frequency. The measurement was made under the above conditions by varying the frequency between 1 kHz and 100 kHz.

FCC limits: 3 kHz - 20 kHz:  $-60 \log_{10} (F/3)$  dB

Test Results: Refer to test data



In this condition, the tone or digital coded signal was then enabled and imposed with 2500Hz audio signal.

FCC limits: a) -25dB (50 - 100% of assigned frequency)  
b) -35dB (100 - 250% of assigned frequency)  
c)  $43 + 10\log_{10}$  (RF output power in Watts) dB  
or 80dB, whichever is lesser attenuation  
for more than 250% of assigned frequency

Test Results: Refer to test data

## 7. Spurious & Harmonic Emission at Antenna Terminal 2.1051

-----

Spurious radiations are the radio frequency voltage or power generated within the equipment and appearing at the equipment's output terminals when properly loaded with its characteristic non-radiating load.

The unit was modulated with a 2500 Hz tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the tenth harmonic of the carrier.

FCC limits:  $43 + 10\log_{10}$  (RF output power in Watts) dB

Test Results: Refer to test data.

## 8. Field Strength of Spurious & Harmonic Radiation 2.1053

-----

### Measurement Procedure & Test Site Description

Field strength measurements of radiated spurious emissions were made on a 3-meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission. The equipment was scanned for radiated emissions in a scheduled enclosure prior to open field testing.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the equipment under test was placed, was rotated a minimum of 360 degree to further increase the reading on the Spectrum Analyzer. This procedure was repeated with the antenna vertically polarized.

FCC limits: 43 + 10log<sub>10</sub> (RF output power in Watts) dB

Test Results: Refer to test data

9. Frequency Stability (Temperature) 2.1055(a)(2)

-----

Frequency measurement was performed at the extremes of throughout the range -20 °C to +50 °C (-30 °C to +50 °C for GMRS) and at intervals of not more than 10 degrees C throughout the range. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to frequency measurement.

The frequency of the unit was measured by extracting a sample of the carrier and measuring its center frequency by equipment having a degree accuracy at least 10 times that of the minimum to be measured.

FCC limits: 0.00025%, 2.5 ppm for FRS  
0.00050%, 5.0 ppm for GMRS

Test Results: Refer to test data

10. Frequency Stability (Voltage) 2.1055(a)(2)

-----

Frequency measurement was performed at the extremes of throughout the range 85% and 115% of the nominal voltage. Extracting a sample of the carrier and measuring its center frequency by equipment having degree accuracy at least 10 times that of the minimum to be measured measured the frequency of the unit.

FCC limits: 0.00025%, 2.5 ppm for FRS  
0.00050%, 5.0 ppm for GMRS

Test Results: Refer to test data

1. RF Output Power & DC Voltage and Current into  
Final Amplifying Device

2.1033(C)(8)

MEASURED FREQUENCY (MHz)	OUTPUT POWER (50 TERMINATED) (Watts)	TX FINAL TRANSISTOR	
		DRAIN VOLTAGE (V)	DRAIN CURRENT (A)
462.5625	1.10	5.2	0.43
467.5625	0.48	5.2	0.28

2. RF Output Power

2.1046

MEASURED FREQUENCY (MHz)	OUTPUT POWER (50 TERMINATED) (Watts)	OUTPUT POWER (ERP) (Watts)
462.5625	1.10	0.75
467.5625	0.48	0.45


Note:

- a) OUTPUT POWER (50 TERMINATED) was measured by opening the enclosure.
- b) ERP was measured based on substitution method using with standard dipole antenna.

3. MODULATION CHARACTERISTICS (AUDIO ROLL-OFF RESPONSE)

2.1047

AUDIO FREQUENCY (kHz)	RESPONSE ATTENUATION (dB)	FCC LIMIT (dB)
2.5	-0.9	--
3	-2.9	0.0
3.5	-5.8	-3.5
4	-9.0	-8.0
5	-14.8	-13.5
7	-23.7	-22.5
10	-33.2	-32.0
15	-46.7	-43.0
20	-59.6	-50.0
30	-61.5	-50.0
50	-61.6	-50.0
70	-61.5	-50.0

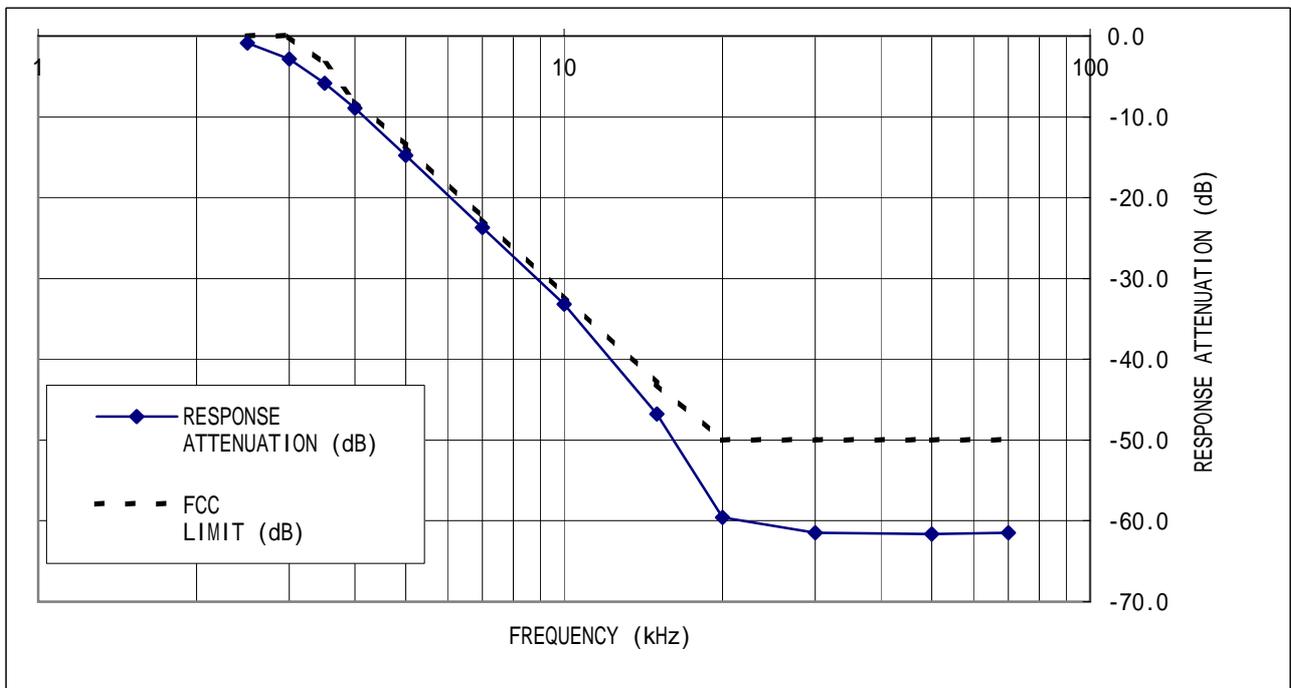


## 4-1. MODULATION CHARACTERISTICS (AUDIO FREQUENCY RESPONSE)

2.1047

GMRS MODE

CARRIER FREQUENCY: 462.5625 MHz

AUDIO FREQUENCY (kHz)	RESPONSE ATTENUATION (dB)
0.1	-43.0
0.2	-39.4
0.3	-31.4
0.5	-5.1
0.7	-2.2
1	0.0
1.5	2.6
2	4.2
2.5	4.8
3	4.0
3.5	2.0
3.9	0.1

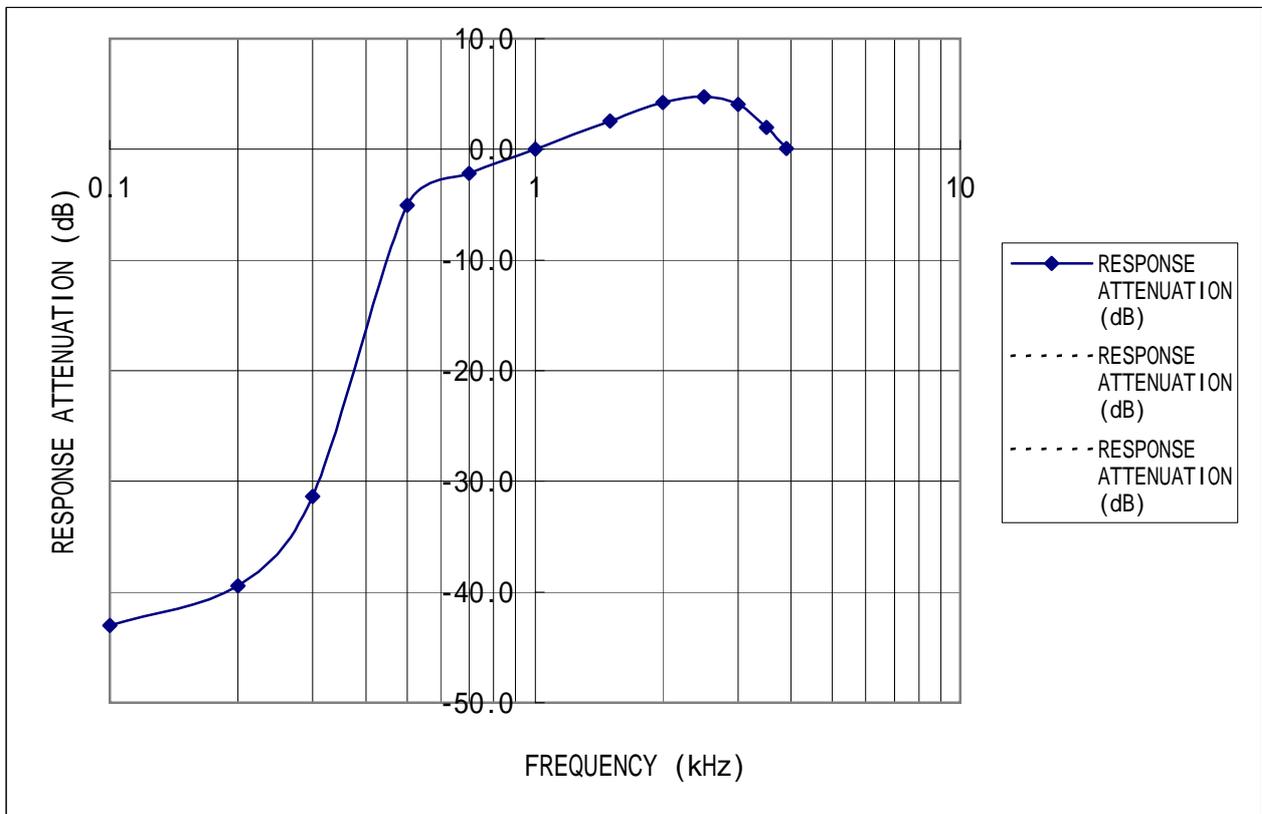


## 4-2. MODULATION CHARACTERISTICS (AUDIO FREQUENCY RESPONSE)

2.1047

FRS MODE

CARRIER FREQUENCY: 467.5625 MHz

AUDIO FREQUENCY (kHz)	RESPONSE ATTENUATION (dB)
0.1	-43.1
0.2	-39.4
0.3	-31.4
0.5	-5.5
0.7	-2.7
1	0.0
1.5	2.8
2	4.4
2.5	4.8
3	4.2
3.5	2.0
3.9	-0.1

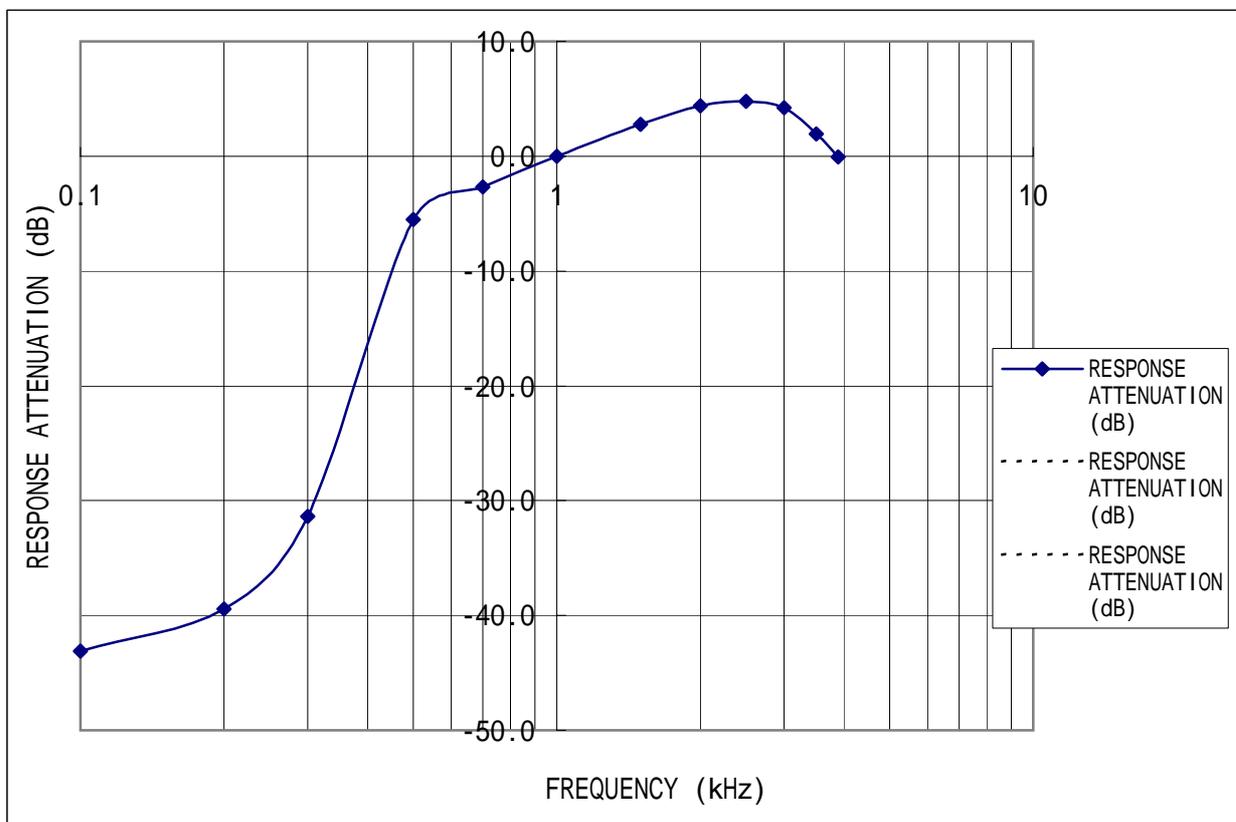

5-1. MODULATION CHARACTERISTICS (MODULATION LIMITING)


2.1047 & 95.637(a)

GMRS MODE

CARRIER FREQUENCY: 462.5625 MHz

MODULATION: AUDIO+CTCSS (167.9Hz)

AUDIO INPUT LEVEL [mV]	DEVIATION (@1.0KHz) [kHz]	DEVIATION (@300Hz) [kHz]	DEVIATION (@3.0KHz) [kHz]	FCC LIMIT [kHz]
1	0.75	0.46	0.87	2.5
5	1.86	0.48	1.61	2.5
10	2.11	0.52	1.64	2.5
20	2.15	0.59	1.65	2.5
30	2.19	0.67	1.65	2.5
40	2.21	0.75	1.65	2.5
50	2.21	0.82	1.64	2.5
60	2.21	0.92	1.63	2.5
70	2.21	1.00	1.62	2.5
80	2.20	1.10	1.62	2.5
90	2.19	1.16	1.62	2.5
100	2.19	1.25	1.62	2.5

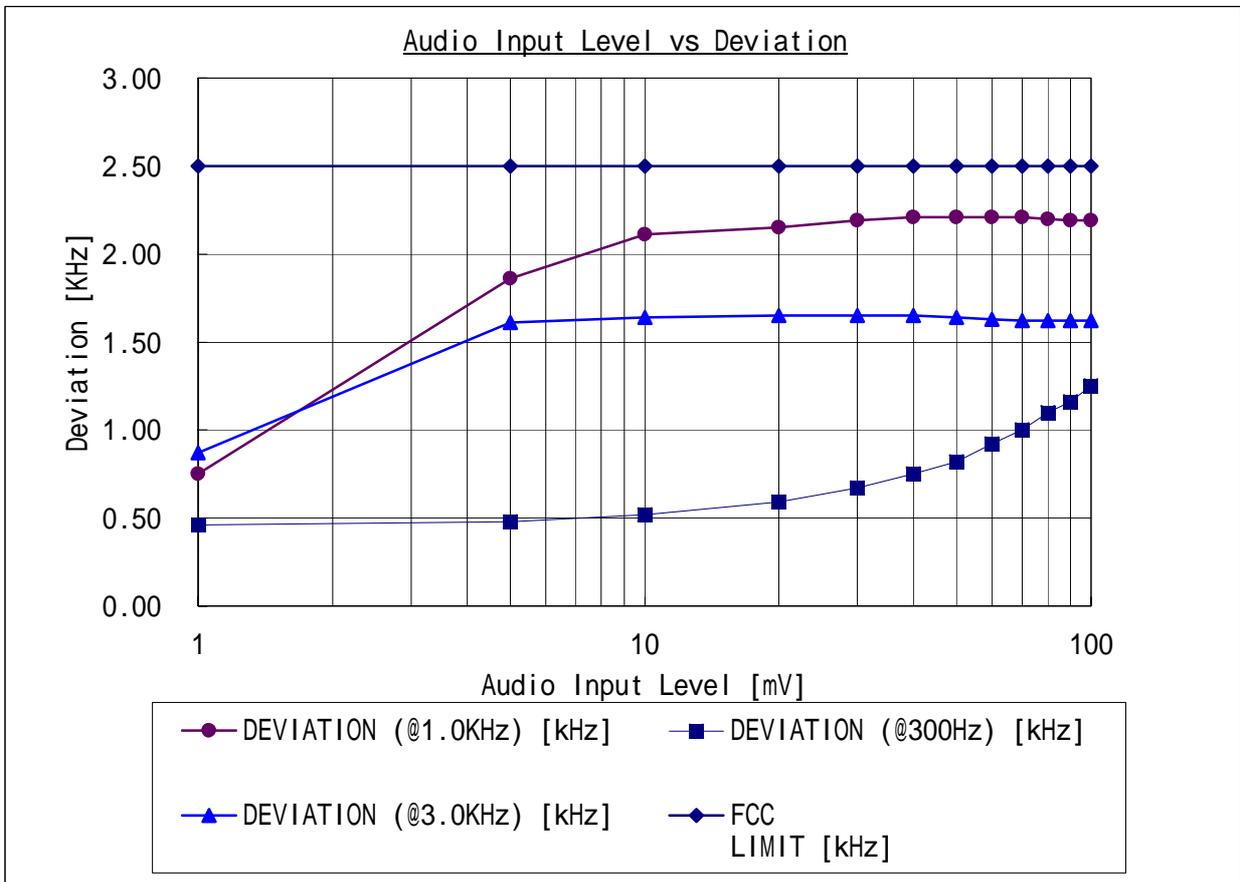

5-2. MODULATION CHARACTERISTICS (MODULATION LIMITING)


2.1047 & 95.637(a)

FRS MODE

CARRIER FREQUENCY: 467.5625 MHz

MODULATION: AUDIO+CTCSS (167.9Hz)


AUDIO INPUT LEVEL [mV]	DEVIATION (@1.0KHz) [kHz]	DEVIATION (@300Hz) [kHz]	DEVIATION (@3.0KHz) [kHz]	FCC LIMIT [kHz]
1	0.74	0.47	0.87	2.5
5	1.88	0.50	1.58	2.5
10	2.14	0.53	1.60	2.5
20	2.18	0.59	1.61	2.5
30	2.23	0.67	1.61	2.5
40	2.23	0.75	1.61	2.5
50	2.25	0.83	1.60	2.5
60	2.25	0.91	1.59	2.5
70	2.25	0.98	1.59	2.5
80	2.24	1.06	1.59	2.5
90	2.24	1.12	1.59	2.5
100	2.24	1.22	1.59	2.5

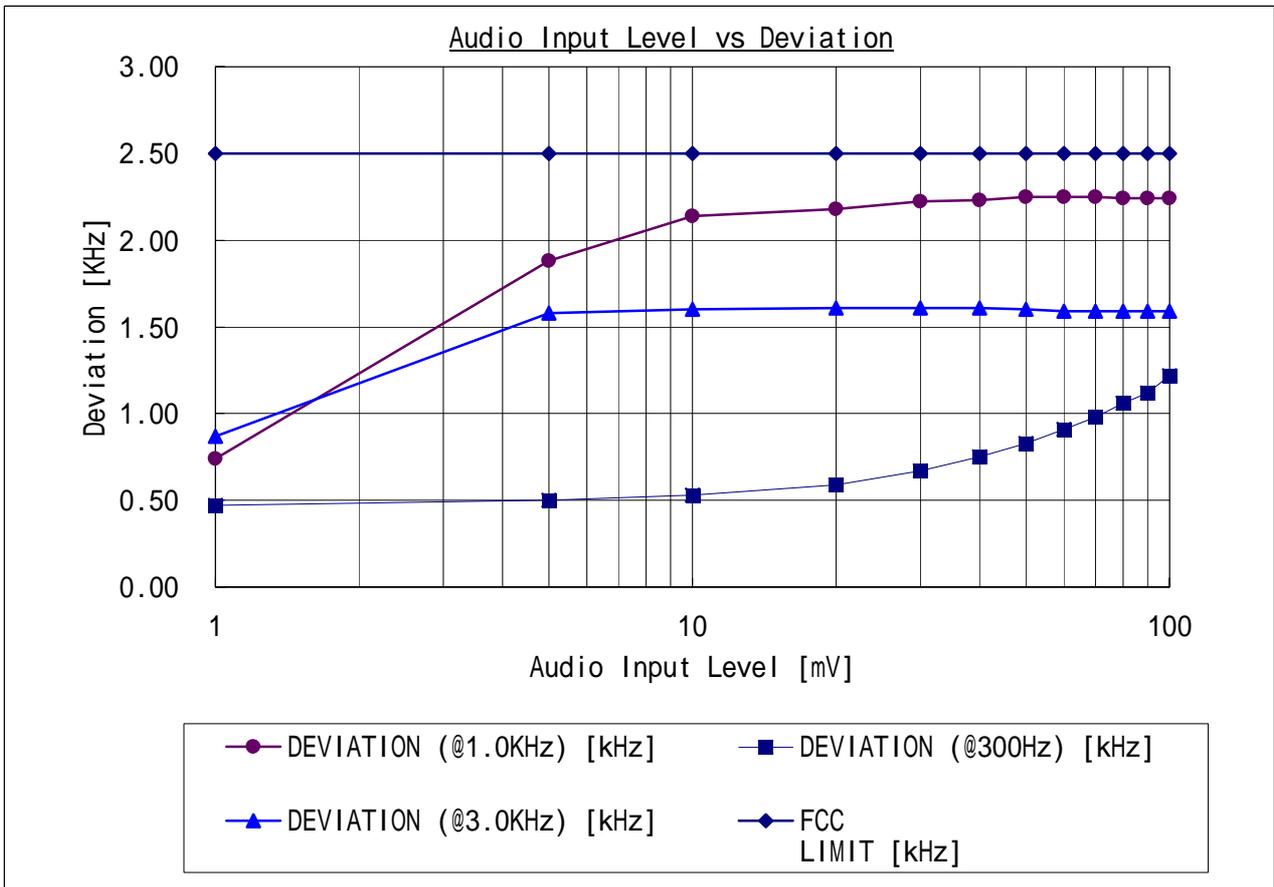


6. OCCUPIED BANDWIDTH

2.1049(c)(1) & 95.635(b)(1)(3)(7)


GMRS

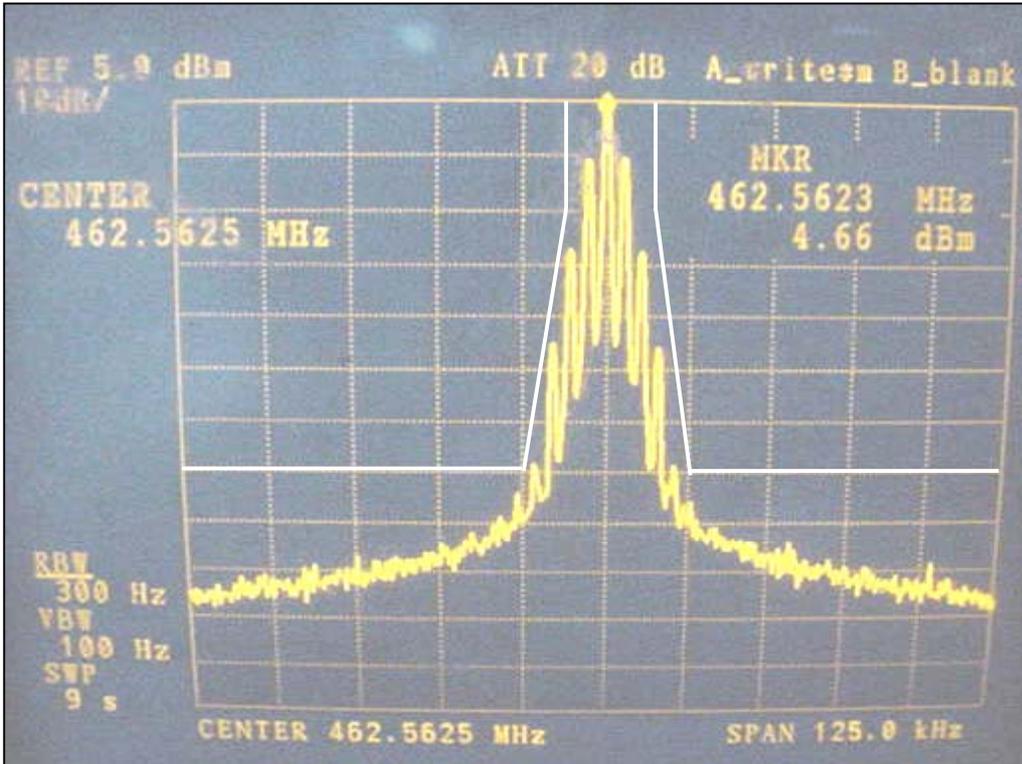


FRS

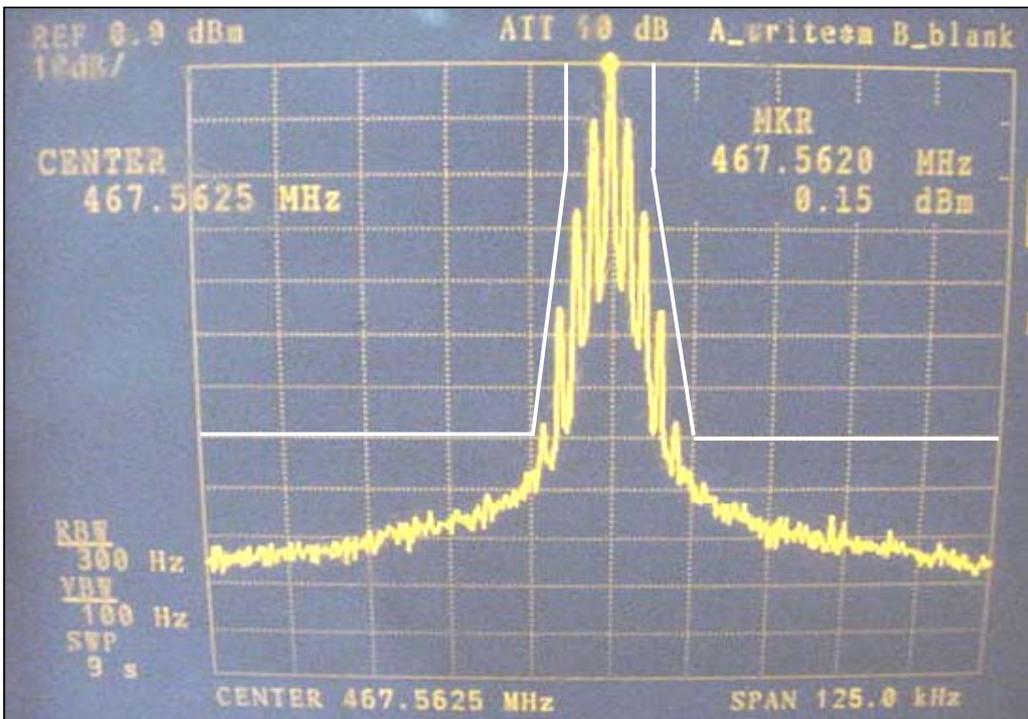


GMRS+CTCSS(167.9Hz)

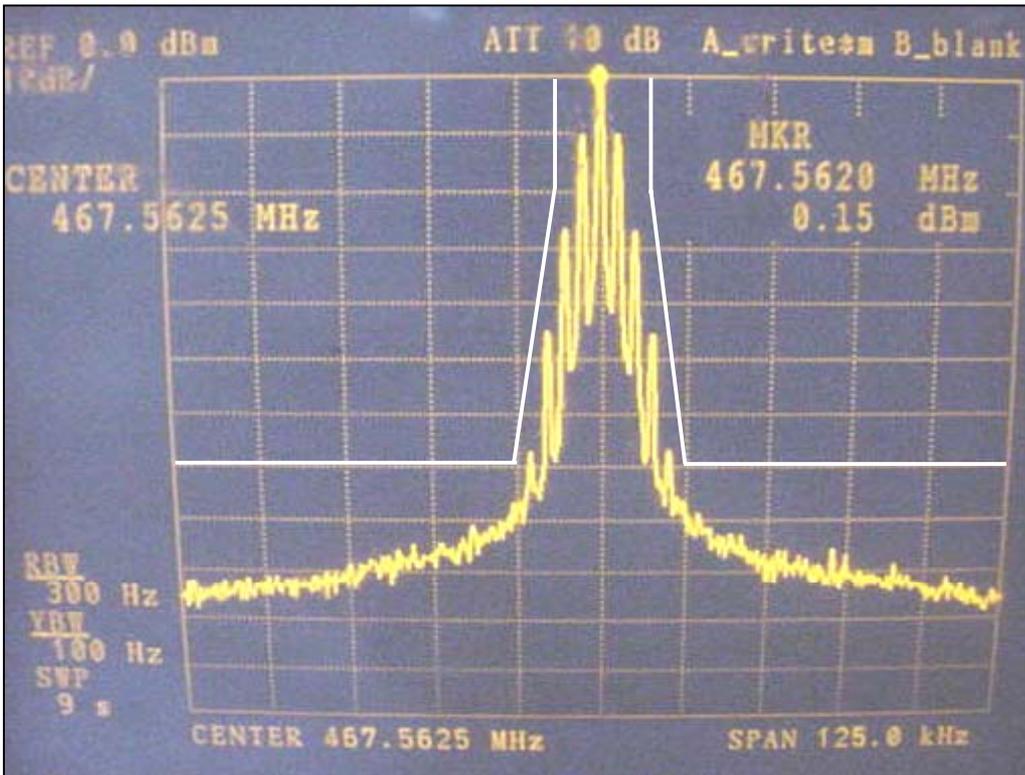


FRS+CTCSS(167.9Hz)

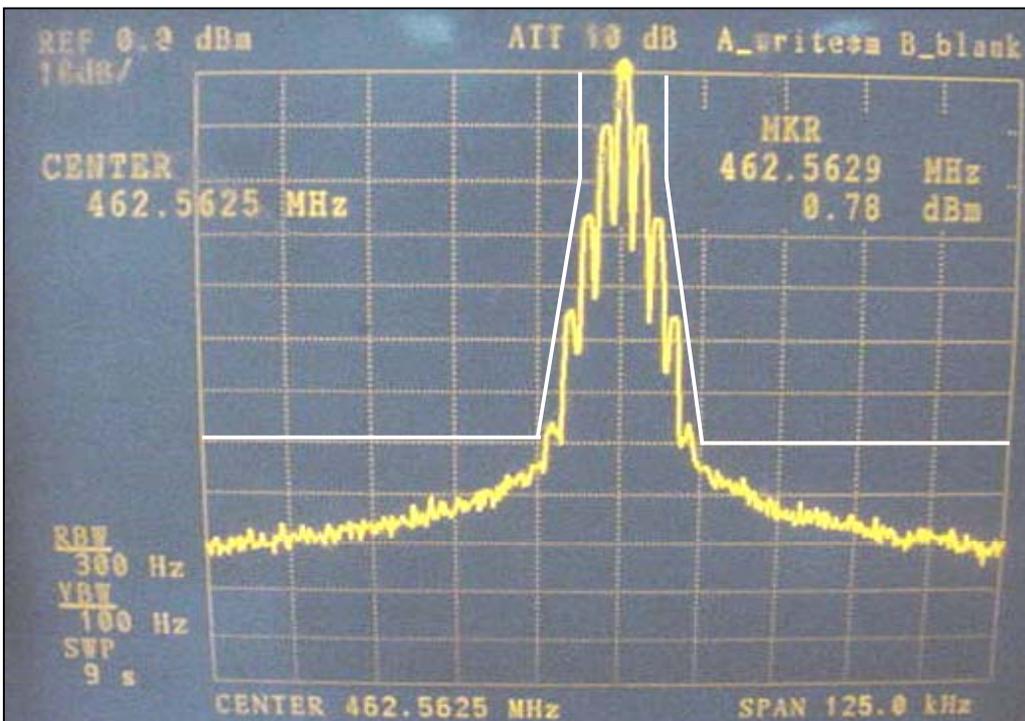

GMRS+DCS(CODE172) :No.66

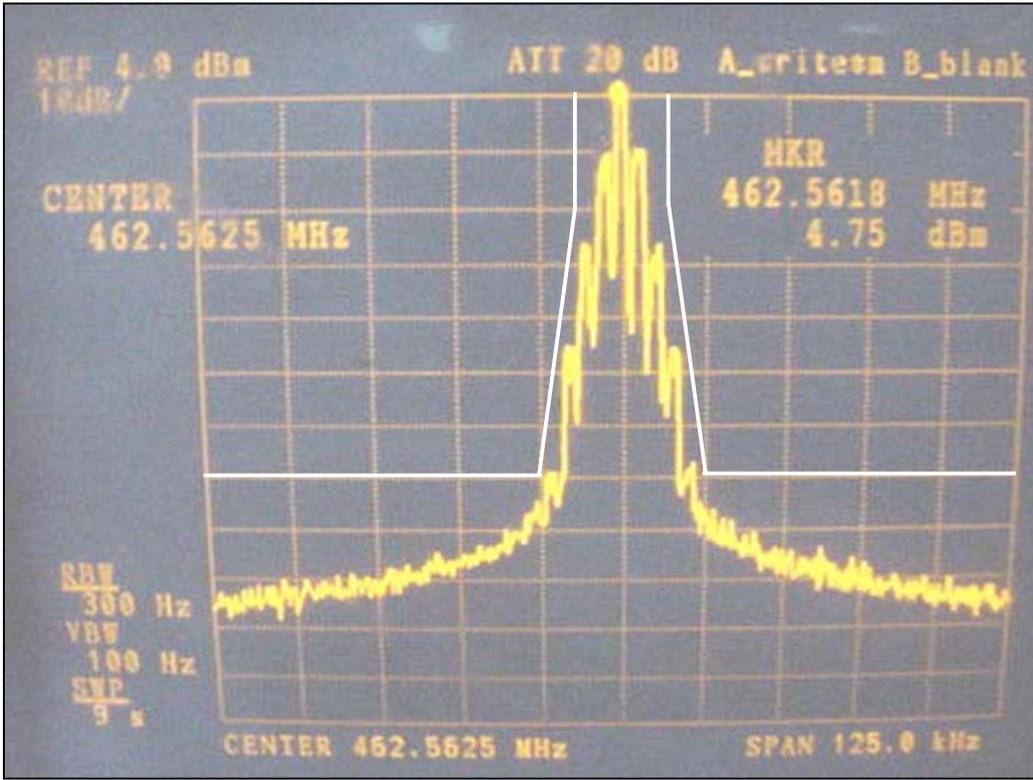

FRS+DCS(CODE172) :No.66

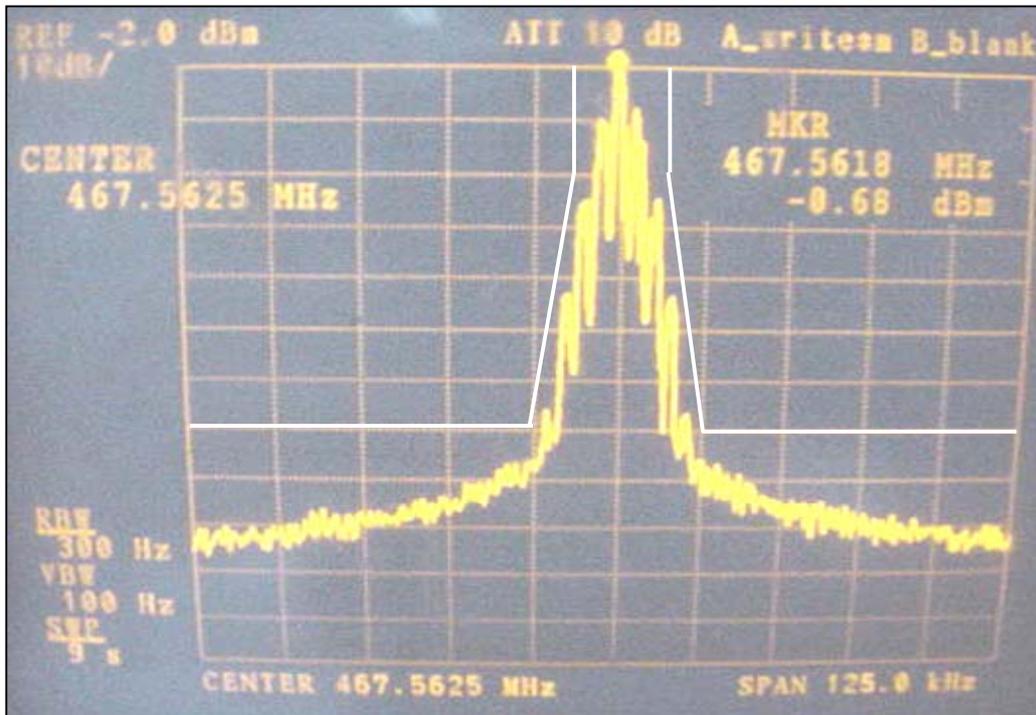

## 7. SPURIOUS &amp; HARMONICS EMISSION AT ANTENNA TERMINAL

2.1051

Harmonics of Carrier	462.5625MHz GMRS [dBc]	467.5625MHz FRS [dBc]
1	-	-
2	73.0	71.0
3	70.1	68.5
4	82.5	81.0
5	78.7	77.8
6	84.7	83.2
7	93.0	91.0
8	98.9	96.5

NOTE: The measurement was performed by opening the enclosure.

## 8-1. FIELD STRENGTH OF SPURIOUS &amp; HARMONICS RADIATION

2.1053 &amp; 95.635(b)(7)

GMRS

TX: 462.5625 MHz

EMISSIONS (MHz)	EUT, PLACED V/H	ANT, POLARITY V/H	ATTENUATION (dBc)	FCC LIMIT (dBc)	MARGIN (dB)
462.5625	V	V	-	-	-
462.5625	V	H	-	-	-
462.5625	H	V	-	-	-
462.5625	H	H	-	-	-
925.1250	V	V	45.7	41.8	3.9
925.1250	V	H	58.3	41.8	16.5
925.1250	H	V	52.2	41.8	10.4
925.1250	H	H	50.9	41.8	9.1
1387.6875	V	V	48.0	41.8	6.2
1387.6875	V	H	62.3	41.8	20.5
1387.6875	H	V	62.8	41.8	21.0
1387.6875	H	H	57.0	41.8	15.2
1850.2500	V	V	59.7	41.8	17.9
1850.2500	V	H	62.2	41.8	20.4
1850.2500	H	V	62.9	41.8	21.1
1850.2500	H	H	62.3	41.8	20.5

## 8-2. FIELD STRENGTH OF SPURIOUS &amp; HARMONICS RADIATION

2.1053 &amp; 95.635(b)(7)

FRS

TX: 467.5625 MHz

EMISSIONS (MHz)	EUT, PLACED V/H	ANT, POLARITY V/H	ATTENUATION (dBc)	FCC LIMIT (dBc)	MARGIN (dB)
467.5625	V	V	-	-	-
467.5625	V	H	-	-	-
467.5625	H	V	-	-	-
467.5625	H	H	-	-	-
935.1250	V	V	43.7	39.5	4.2
935.1250	V	H	56.8	39.5	17.3
935.1250	H	V	47.6	39.5	8.1
935.1250	H	H	49.3	39.5	9.8
1402.6875	V	V	54.3	39.5	14.8
1402.6875	V	H	61.5	39.5	22.0
1402.6875	H	V	60.8	39.5	21.3
1402.6875	H	H	60.8	39.5	21.3
1870.2500	V	V	58.3	39.5	18.8
1870.2500	V	H	56.8	39.5	17.3
1870.2500	H	V	61.1	39.5	21.6
1870.2500	H	H	62.2	39.5	22.7


9-1. FREQUENCY STABILITY (TEMPERATURE RANGE)

2.1055

GMRS MODE

MEASURED FREQUENCY : 462.5625 MHz

TEMPERATURE	FREQ. MHz	TOLERANCE		FCC LIMIT	
		Hz	%	+%	-%
-30	462.562030	-470	-0.0001016	0.00050	-0.00050
-20	462.562320	-180	-0.0000389	0.00025	-0.00025
-10	462.562640	140	0.0000303	0.00025	-0.00025
0	462.562870	370	0.0000800	0.00025	-0.00025
10	462.562780	280	0.0000605	0.00025	-0.00025
20	462.562620	120	0.0000259	0.00025	-0.00025
25	462.562520	20	0.0000043	0.00025	-0.00025
30	462.562450	-50	-0.0000108	0.00025	-0.00025
40	462.562360	-140	-0.0000303	0.00025	-0.00025
50	462.562630	130	0.0000281	0.00025	-0.00025

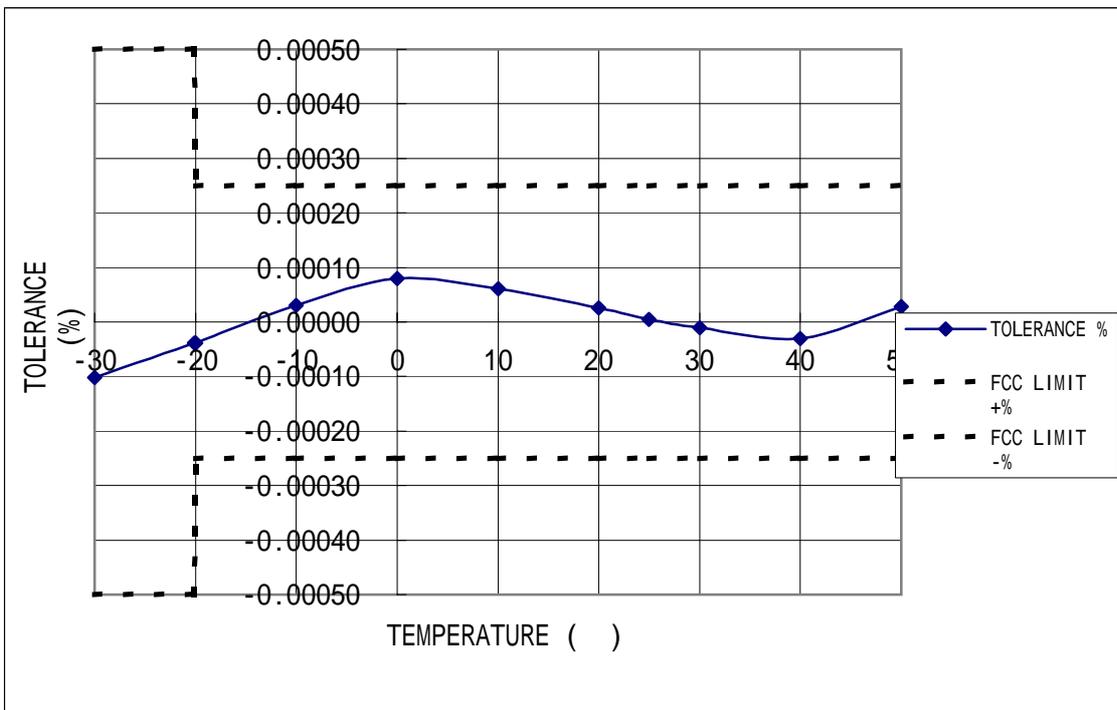


9-2. FREQUENCY STABILITY (TEMPERATURE RANGE)

2.1055

FRS MODE

MEASURED FREQUENCY : 467.5625 MHz

TEMPERATURE	FREQ. MHz	TOLERANCE		FCC LIMIT	
		Hz	%	+%	-%
-30	467.562010	-490	-0.0001048	0.00050	-0.00050
-20	467.562280	-220	-0.0000471	0.00025	-0.00025
-10	467.562590	90	0.0000192	0.00025	-0.00025
0	467.562830	330	0.0000706	0.00025	-0.00025
10	467.562750	250	0.0000535	0.00025	-0.00025
20	467.562600	100	0.0000214	0.00025	-0.00025
25	467.562510	10	0.0000021	0.00025	-0.00025
30	467.562420	-80	-0.0000171	0.00025	-0.00025
40	467.562310	-190	-0.0000406	0.00025	-0.00025
50	467.562600	100	0.0000214	0.00025	-0.00025

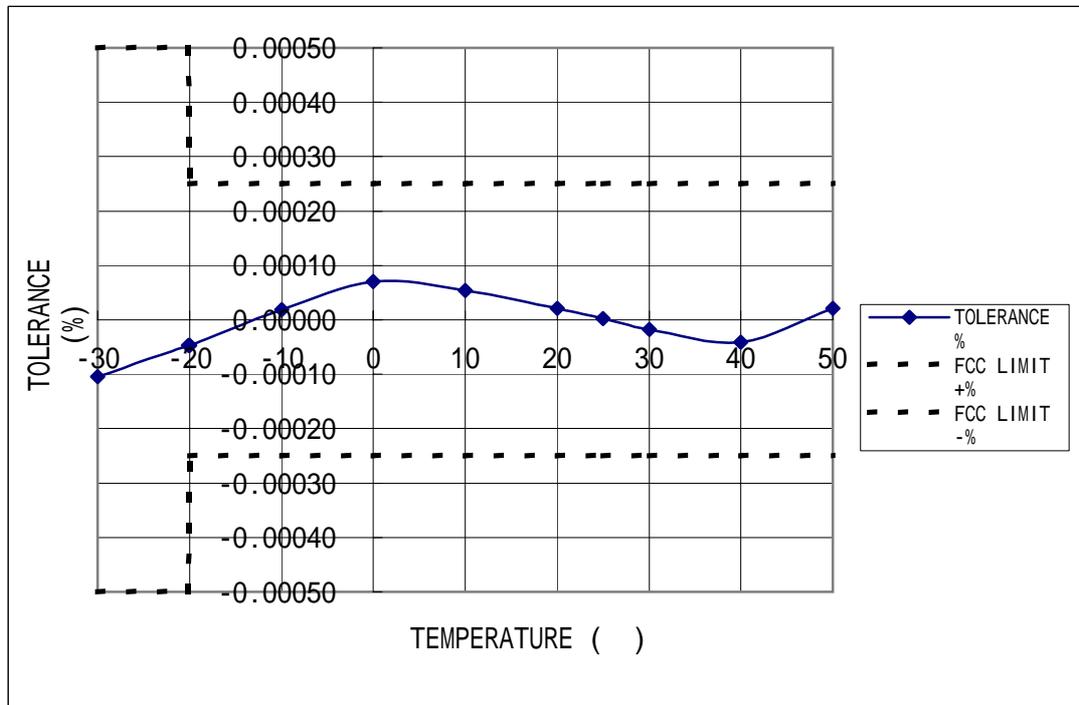

F-VOLT GMRS


10-1. FREQUENCY STABILITY (VOLTAGE RANGE)

2.1055

GMRS MODE

MEASURED FREQUENCY : 462.5625 MHz

VOLTAGE		FREQ.	TOLERANCE		FCC LIMIT	
(V)	(%)	MHz	Hz	%	+ %	- %
3.60	60	462.56249	-10	-0.0000022	0.0005	-0.0005
4.80	80	462.56249	-10	-0.0000022	0.0005	-0.0005
5.10	85	462.56249	-10	-0.0000022	0.0005	-0.0005
5.40	90	462.56249	-10	-0.0000022	0.0005	-0.0005
5.70	95	462.56249	-10	-0.0000022	0.0005	-0.0005
6.00	100	462.56249	-10	-0.0000022	0.0005	-0.0005
6.30	105	462.56249	-10	-0.0000022	0.0005	-0.0005
6.60	110	462.56249	-10	-0.0000022	0.0005	-0.0005
6.70	112	462.56249	-10	-0.0000022	0.0005	-0.0005

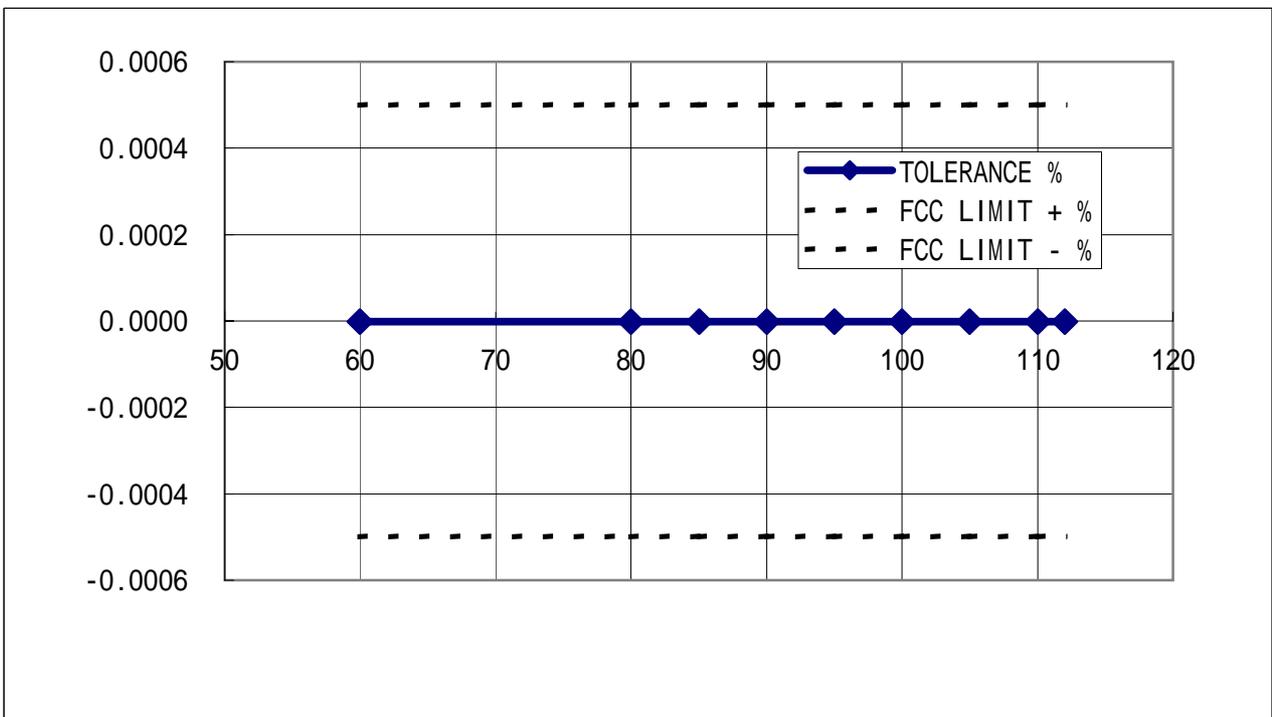

NOTE: BATTERY ENDPOINT --- 3.6V


10-2. FREQUENCY STABILITY (VOLTAGE RANGE)

2.1055

FRS MODE

MEASURED FREQUENCY : 467.5625 MHz

VOLTAGE		FREQ.	TOLERANCE		FCC LIMIT	
(V)	(%)	MHz	Hz	%	+ %	- %
3.60	60	467.56249	-10	-0.0000021	0.00025	-0.00025
4.80	80	467.56249	-10	-0.0000021	0.00025	-0.00025
5.10	85	467.56249	-10	-0.0000021	0.00025	-0.00025
5.40	90	467.56249	-10	-0.0000021	0.00025	-0.00025
5.70	95	467.56249	-10	-0.0000021	0.00025	-0.00025
6.00	100	467.56249	-10	-0.0000021	0.00025	-0.00025
6.30	105	467.56249	-10	-0.0000021	0.00025	-0.00025
6.60	110	467.56249	-10	-0.0000021	0.00025	-0.00025
6.70	112	467.56249	-10	-0.0000021	0.00025	-0.00025

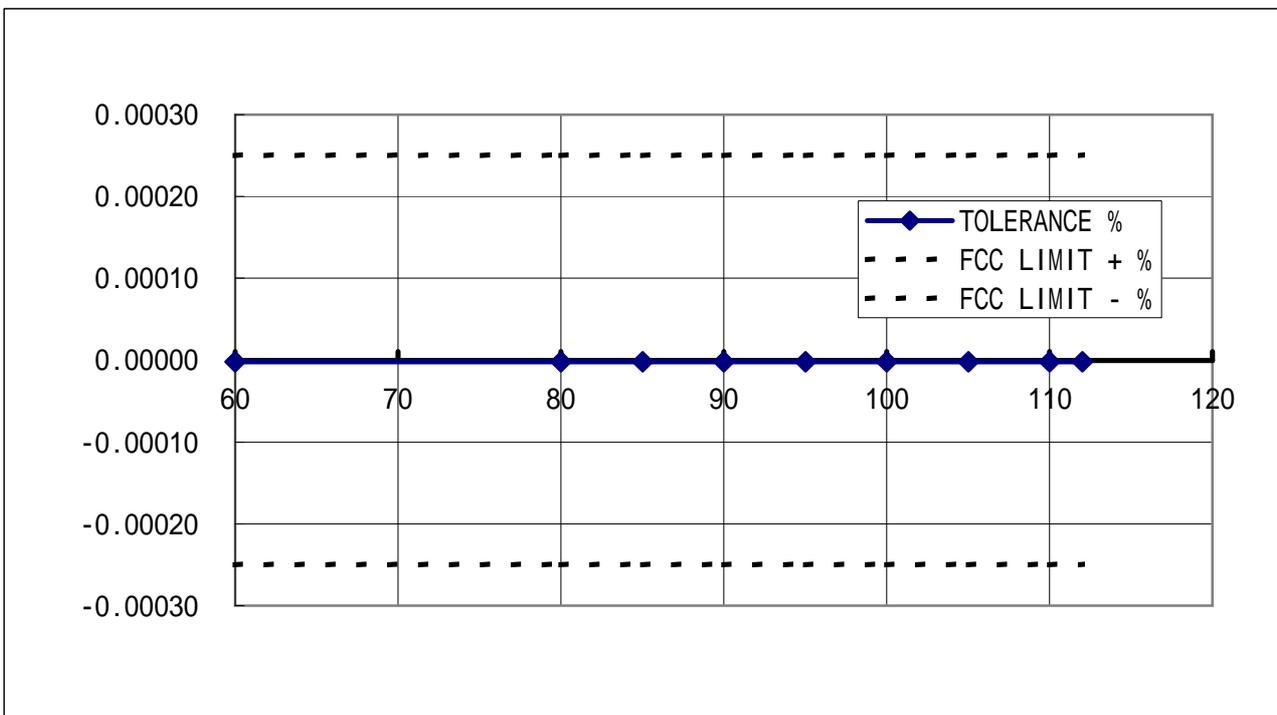

NOTE: BATTERY ENDPOINT --- 3.6V

LIST OF MEASUREMENT EQUIPMENTS

NO	Uniden #	Type of Instrument	Model	Manufacturer	Serial No.	Calibration Organization	Calibration
1	BA-1	ANTENNA	KBA-523	KYORITSU	9100031	--	X
3	EABF-022	ANTENNA	CBL6112B	SCHAFFNER	2908	'--	X
5	EABF-012	ANTENNA	3116	ETS	33925	'--	X
6	EABF-016	ANTENNA	3115	ETS	34771	'--	X
19	EABF-005	DIPOLE ANTENNA	MP534B(1/2)	ANRITSU	6200303778	ANRITSU	2007/6/8
20	EABF-006	DIPOLE ANTENNA	MP534B(2/2)	ANRITSU	6200303778	ANRITSU	2007/6/8
22	EABF-002	DIPOLE ANTENNA	MP651B	ANRITSU	6200315527	ANRITSU	2007/6/8
23	ELA-001	LINE-IMPEDANCE STABLIZATION	KNW-407	KYORITSU	8-1636-3	KYORITSU	2007/4/17
24	ELA-002	LINE-IMPEDANCE STABLIZATION	KNW-407	KYORITSU	8-1640-3	KYORITSU	X
27	EABF-020	MICROWAVE SYSTEM	83051A	AGILENT	MY39500405	--	X
30	EP-094	POWER SUPPLY	87421A	AGILENT	3611A02112	'--	X
37	EAH-019	SPECTRUM ANALYZER	E7405A	AGILENT	MY44211026	Agilent Technologies	2007/3/7
42	'--	Pre-amplifier	AFS4-00100400-13-S4	MITEQ	924303		X
44	'--	Signal Generator	E4438C	AGILENT	MY44260092	Agilent Technologies	2007/7/20