

## GENERAL INFORMATION

General Information in accordance with the Federal Communications Commission Rules and Regulations, Volume II, Part 2.

1. Applicant:

Uniden America Corporation  
Engineering Services Office  
216 John Street, P.O. Box 580  
Lake City, South Carolina 29560  
Mr. James R. Haynes, Vice President

2. Equipment Identification:

FCC ID: AMWUT888  
MODEL : POLARIS

3. Quantity: Quantity Production is planned.

4. Emission Type: 16K0F3E

5. Frequency Range: 156.025 - 157.425 MHz (TX)  
156.025 - 163.275 MHz (RX)

6. Operating Power: 25/1 W

7. Max. Power Rating:

According to the section 80.215 of the FCC Rules.

8. DC voltage and current into Final Amplifying Device:

Refer to test data

9. Solid State Devices: Refer to Parts List/Tune-up Info

10. Circuit & Block Diagrams: Refer to EXHIBITS

11. Instruction Manual: Refer to User Manual

12. Tune-up Procedures: Refer to Parts List/Tune-up Info

13. Circuit Descriptions: Refer to Operational Description

14. Description of Digital Modulation Techniques:

Not Applicable

15. Standard Test Conditions:

The following conditions and procedures were followed during testing of the equipment.

Room Temperature: 23 - 27 Degrees Celsius

Room Humidity: 40 - 60 %

Power Supply Voltage: 13.8 V DC

Note: Prior to testing, the unit is tuned-up according to the manufacturer's alignment procedure.

All presented data will represent the "worst case" parameter being measured.

16. Equipment Identification:

A drawing of the equipment's Identification Label and, its location are as shown in ID Label/Location Info.

17. Photographs:

External photographs of the unit as well as internal photos of the printed circuit boards are found in External Photos and Internal photographs.

# Test Report

## TEST PROCEDURES AND TEST SITE DESCRIPTION

| MEASUREMENT ITEMS                                        | Section No.           |
|----------------------------------------------------------|-----------------------|
| 1. DC Voltage & Current into Final Device                | 2.1033(C)(8)          |
| 2. RF Output Power                                       | 2.1046                |
| 3. Modulation Characteristics (Audio Roll-off)           | 2.1047 & 80.213       |
| 4. Modulation Characteristics (Audio Frequency Response) | 2.1047                |
| 5. Modulation Characteristics (Modulation Limiting)      | 2.1047                |
| 6. Occupied Bandwidth                                    | 2.1049(c)(1) & 80.211 |
| 7. Spurious & Harmonic Emission at Antenna Terminal      | 2.1051                |
| 8. Field Strength of Spurious & Harmonic Radiation       | 2.1053                |
| 9. Frequency Stability (Temperature)                     | 2.1055 & 80.209       |
| 10. Frequency Stability (Voltage)                        | 2.1055 & 80.209       |
| 11. Receiver radiated spurious emissions                 | 80.217(b)             |

NOTE: List of measurement equipment and test site description are included in this EXHIBIT.

1. DC Voltage & Current into Final Device 2.1033(C)(8)  
-----

To measure the DC Voltage and Current into Final Amplifying Device, the measuring equipment was connected to the actual P.C.Board of the transmitter.

FCC limits: Not specified

Test Results: Refer to test data

2. RF Output Power 2.1046  
-----

The unit was tuned-up in accordance with the alignment procedure stated in the EXHIBIT-6, and was loaded into a 50 ohm resistive termination. The unit was powered through its normally supplied power cable by a DC power supply. Power supply voltage was set to nominal voltage at the power supply terminals with the transmitter off.

The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting. At the end of the third 5 minutes period, the RF output power is measured. During the test, no components of the emission spectrum exceed the limit specified in the applicable rule part for occupied bandwidth or emission limitations.

FCC limits: Not specified

Test Results: Refer to test data

3. Modulation Characteristics (Audio Roll-off) 2.1047 & 80.213  
-----

To measure the audio roll-off filter response, an audio frequency oscillator and AF VTVM were connected to the actual P.C.Board of the transmitter. AF VTVM and an oscilloscope monitored the output of the audio filter. An AF input level was maintained constant at least 10 dB below the saturation level at maximum response frequency. The measurement was made under the above conditions by varying the frequency between 1 kHz and 100 kHz.

FCC limits: 3 kHz - 15 kHz:  $-40 \log_{10} (F/3)$  dB  
Above 20kHz : At least -28 dB

Test Results: Refer to test data

#### 4. Modulation Characteristics (Audio Frequency Response) 2.1047

-----

Operate the unit under the standard test conditions and monitor the output with a modulation or a calibrated test receiver. With a 1000 Hz sine wave (applied through a dummy microphone circuit) used as a 0 dB reference, vary the modulating frequency from 300 to 3000 Hz and observe the level necessary to maintain a constant 30% modulation.

FCC limits: 300 - 3000 Hz: 6dB/octave roll-off (+1/-3 dB)

Test Results: Refer to test data

#### 5. Modulation Characteristics (Modulation Limiting) 2.1047

-----

The transmitter shall be adjusted for full rated system deviation, 1000 Hz and reference it as 0dB input. With modulation frequencies of 300, 1000 and 3000 Hz respectively, vary the audio input to a level 20dB above that required at 100 Hz to produce 60% of rated system deviation. This is required for both up to and down modulation. Record the percent of full system deviation obtained as a function of input level.

FCC limits: +/-5 kHz deviation

Test Results: Refer to test data

#### 6. Occupied Bandwidth 2.1049(c)(1) & 80.211

-----

The spectrum of the modulated carrier was monitored by a panoramic method capable of 60dB amplitude range. The unit was modulated with a 2500 Hz audio signal at an input level 16dB above that required for 50% of maximum system deviation.

In case the 100Hz of CTCSS tone or 100 bps of digital coded data modulation is indicated for this transmitter, a representative measurement data for this operation is also presented.

Since the total deviation of the unit is designed as 4.7 kHz Div., the deviation of 2500Hz audio signal was set to 3.7 kHz Div., as the maximum deviation of tone or digital coded signal was continuously set to 1.0 kHz Div.

At first, tone or digital signal was disabled and set the 2500 Hz audio signal to 1.85 kHz deviation (= 50% of 3.7 kHz deviation). Then, the input level of 2500Hz audio signal was increased by 16dB. In this condition, the tone or digital coded signal was then enabled and imposed with 2500Hz audio signal.

FCC limits: a) -25dB (50 - 100% of assigned frequency)  
b) -35dB (100 - 250% of assigned frequency)  
c)  $43 + 10\log_{10}$  (RF output power in Watts) dB  
or 80dB, whichever is lesser attenuation  
for more than 250% of assigned frequency

Test Results: Refer to test data

#### 7. Spurious & Harmonic Emission at Antenna Terminal 2.1051

-----

Spurious radiation are the radio frequency voltage or power generated within the equipment and appearing at the equipment's output terminals when properly loaded with its characteristic non-radiating load.

The unit was modulated with a 2500 Hz tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the tenth harmonic of the carrier.

FCC limits:  $43 + 10\log_{10}$  (RF output power in Watts) dB

Test Results: Refer to test data

#### 8. Field Strength of Spurious & Harmonic Radiation 2.1053

-----

##### Measurement Procedure & Test Site Description

Field strength measurements of radiated spurious emissions were made on a 3-meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission. The equipment was scanned for radiated emissions in a scheduled enclosure prior to open field testing.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the

equipment under test was placed, was rotated a minimum of 360 degree to further increase the reading on the Spectrum Analyzer. This procedure was repeated with the antenna vertically polarized.

FCC limits:  $43 + 10\log_{10}$  (RF output power in Watts) dB

Test Results: Refer to test data

9. Frequency Stability (Temperature) 2.1055 & 80.209  
-----

Frequency measurement was performed at the extremes of throughout the range -20 °C to +50 °C and at intervals of not more than 10 degrees C throughout the range. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to frequency measurement.

The frequency of the unit was measured by extracting a sample of the carrier and measuring its center frequency by equipment having a degree accuracy at least 10 times that of the minimum to be measured.

FCC limits:  $\pm 0.0005\%$

Test Results: Refer to test data

10. Frequency Stability (Voltage) 2.1055 & 80.209  
-----

Frequency measurement was performed at the extremes of throughout the range 85% and 115% of the nominal voltage. The frequency of the unit was measured by extracting a sample of the carrier and measuring its center frequency by equipment having a degree accuracy at least 10 times that of the minimum to be measured.

FCC limits:  $\pm 0.0005\%$

Test Results: Refer to test data

11. Receiver radiated spurious emissions 80.217(b)  
-----

Regarding the electromagnetic field strength at a distance of over sea water of one nautical mile, the value of field strength in the range of visible distance, which will be emitted from  $1/2\lambda$  dipole antenna, results from the combination of the direct field component (free space field) and the ground reflected field component.

Therefore, assuming that the ground is a flat perfect conductor, the maximum value of field strength in cases of varying the antenna high at the test point should be extrapolated to indicate two as large as the value in free space field.

At the actual test site in the range of 10 feet of distance, the following formula can be considered to make up on an average, though it may include a little bit error. And, this fact is surely confirmed at our test site.

Accordingly, the value of field strength measured at the distance of 10 feet (3-meters) away shall be formulated as follows;

$$E_3 = 2 \times E_0 = 2 \times \sqrt{P} \times 1/r \text{ (V/m)} \text{ ----- (1)}$$

where:  $E_3$ : Field strength at the distance of 3 m (V/m)

$E_0$ : Field strength in free space field (V/m)

P : Power into  $1/2\lambda$  dipole antenna (Watts)

r : Distance from test point to dipole antenna (m)

Also, in the surface over seawater, since it can be supposed that the sea surface rather keeps better conductor condition, the above (1).

Therefore, the value of field strength at the distance of one nautical mile (1852 m)  $E_{1852}$  shall be calculated as below;

$$\begin{aligned} E_{1852} &= E_3 \times 14 \times \sqrt{P} / 1852 \\ &= E_3 \times 3 / 1852 \\ &= E_3 / 620 \text{ ----- (2)} \end{aligned}$$

Test Results: Refer to test data



## TEST DATA

| MEASUREMENT ITEMS                                        | Section No.           |
|----------------------------------------------------------|-----------------------|
| 1. DC Voltage & Current into Final Device                | 2.1033(C)(8)          |
| 2. RF Output Power                                       | 2.1046                |
| 3. Modulation Characteristics (Audio Roll-off)           | 2.1047 & 80.213       |
| 4. Modulation Characteristics (Audio Frequency Response) | 2.1047                |
| 5. Modulation Characteristics (Modulation Limiting)      | 2.1047                |
| 6. Occupied Bandwidth                                    | 2.1049(c)(1) & 80.211 |
| 7. Spurious & Harmonic Emission at Antenna Terminal      | 2.1051                |
| 8. Field Strength of Spurious & Harmonic Radiation       | 2.1053                |
| 9. Frequency Stability (Temperature)                     | 2.1055 & 80.209       |
| 10. Frequency Stability (Voltage)                        | 2.1055 & 80.209       |
| 11. Receiver radiated spurious emissions                 | 80.217(b)             |

1. RF Output Power & DC Voltage and Current into  
Final Amplifying Device

2.983(d) (5)

| FULL POWER MODE             |                         | TX FINAL TRANSISTOR      |                          |
|-----------------------------|-------------------------|--------------------------|--------------------------|
| MEASURED FREQUENCY<br>(MHz) | OUTPUT POWER<br>(Watts) | COLLECTOR<br>VOLTAGE (V) | COLLECTOR<br>CURRENT (A) |
| 156.05                      | 24.5                    | 13.2                     | 2.93                     |
| 156.8                       | 24.7                    | 13.2                     | 2.93                     |
| 157.425                     | 24.8                    | 13.2                     | 2.93                     |

| REDUCED POWER MODE          |                         | TX FINAL TRANSISTOR      |                          |
|-----------------------------|-------------------------|--------------------------|--------------------------|
| MEASURED FREQUENCY<br>(MHz) | OUTPUT POWER<br>(Watts) | COLLECTOR<br>VOLTAGE (V) | COLLECTOR<br>CURRENT (A) |
| 156.05                      | 1.15                    | 13.6                     | 0.4                      |
| 156.8                       | 1.13                    | 13.6                     | 0.4                      |
| 157.425                     | 1.11                    | 13.6                     | 0.4                      |

2. CARRIER POWER

2.985


| MEASURED FREQUENCY<br>(MHz) | FULL POWER<br>(Watts) | REDUCED POWER<br>(Watts) |
|-----------------------------|-----------------------|--------------------------|
| 156.05                      | 24.5                  | 1.15                     |
| 156.8                       | 24.7                  | 1.13                     |
| 157.425                     | 24.8                  | 1.11                     |

## 3. MODULATION CHARACTERISTICS (AUDIO ROLL-OFF RESPONSE)

2.987 &amp; 80.213

CARRIER FREQUENCY: 156.80 MHz  
OUTPUT POWER: 24.7 WATTS

| AUDIO<br>FREQUENCY<br>(kHz) | RESPONSE<br>ATTENUATION<br>(dB) | FCC<br>LIMIT<br>(dB) |
|-----------------------------|---------------------------------|----------------------|
| 0.1                         | 0.0                             | --                   |
| 0.2                         | 0.0                             | --                   |
| 0.3                         | 0.0                             | --                   |
| 0.5                         | 0.0                             | --                   |
| 0.7                         | 0.0                             | --                   |
| 1                           | 0.0                             | --                   |
| 1.5                         | 0.0                             | --                   |
| 2                           | 0.0                             | --                   |
| 2.5                         | -0.2                            | --                   |
| 3                           | -1.5                            | 0.0                  |
| 3.5                         | -3.4                            | -2.6                 |
| 4                           | -5.5                            | -5.0                 |
| 5                           | -9.7                            | -8.9                 |
| 7                           | -17.0                           | -14.7                |
| 10                          | -24.7                           | -21.0                |
| 15                          | -30.5                           | -28.0                |
| 20                          | -32.0                           | -28.0                |
| 30                          | -32.5                           | -28.0                |
| 50                          | -32.5                           | -28.0                |
| 70                          | -32.5                           | -28.0                |

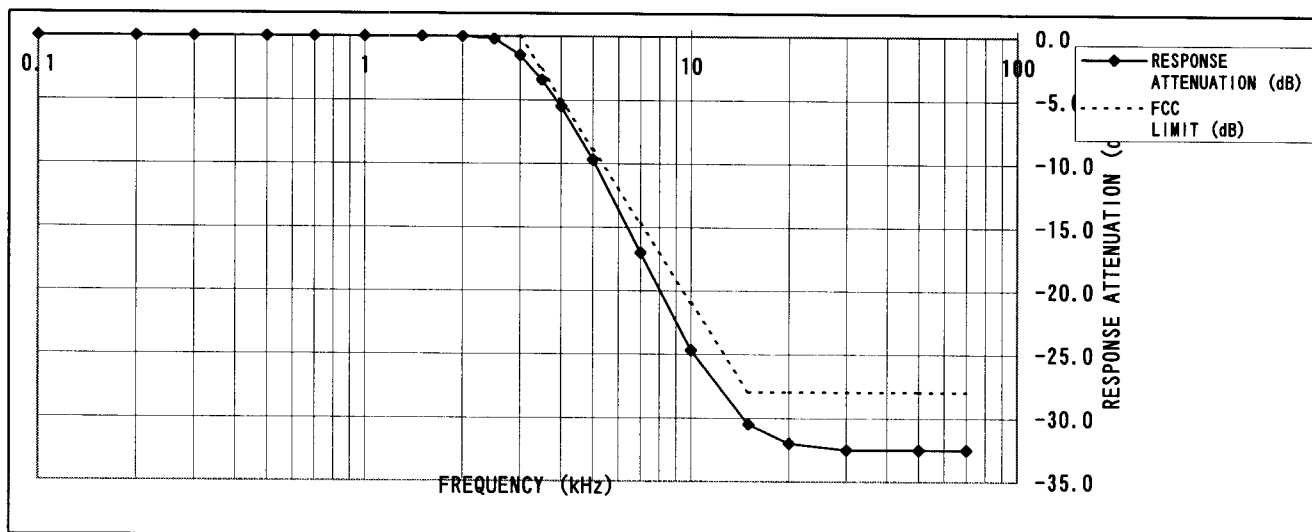


## 4. MODULATION CHARACTERISTICS (AUDIO FREQUENCY RESPONSE)

2.987

CARRIER FREQUENCY: 156.80 MHz  
 OUTPUT POWER: 24.7 WATTS

| AUDIO<br>FREQUENCY<br>(kHz) | RESPONSE<br>ATTENUATION<br>(dB) | FCC<br>LIMIT<br>(dB) |       |
|-----------------------------|---------------------------------|----------------------|-------|
| 0.1                         |                                 |                      |       |
| 0.2                         | -16.3                           |                      |       |
| 0.3                         | -11.3                           | -9.5                 | -13.5 |
| 0.5                         | -6.1                            | -5.0                 | -9    |
| 0.7                         | -3.1                            | -2.0                 | -6    |
| 1                           | 0.0                             | 1.0                  | -3    |
| 1.5                         | 3.2                             | 4.3                  | 0.3   |
| 2                           | 5.3                             | 7.0                  | 3     |
| 2.5                         | 6.0                             | 9.0                  | 5     |
| 3                           | 5.8                             | 10.5                 | 5     |
| 3.5                         | 4.5                             |                      |       |
| 3.9                         |                                 |                      |       |

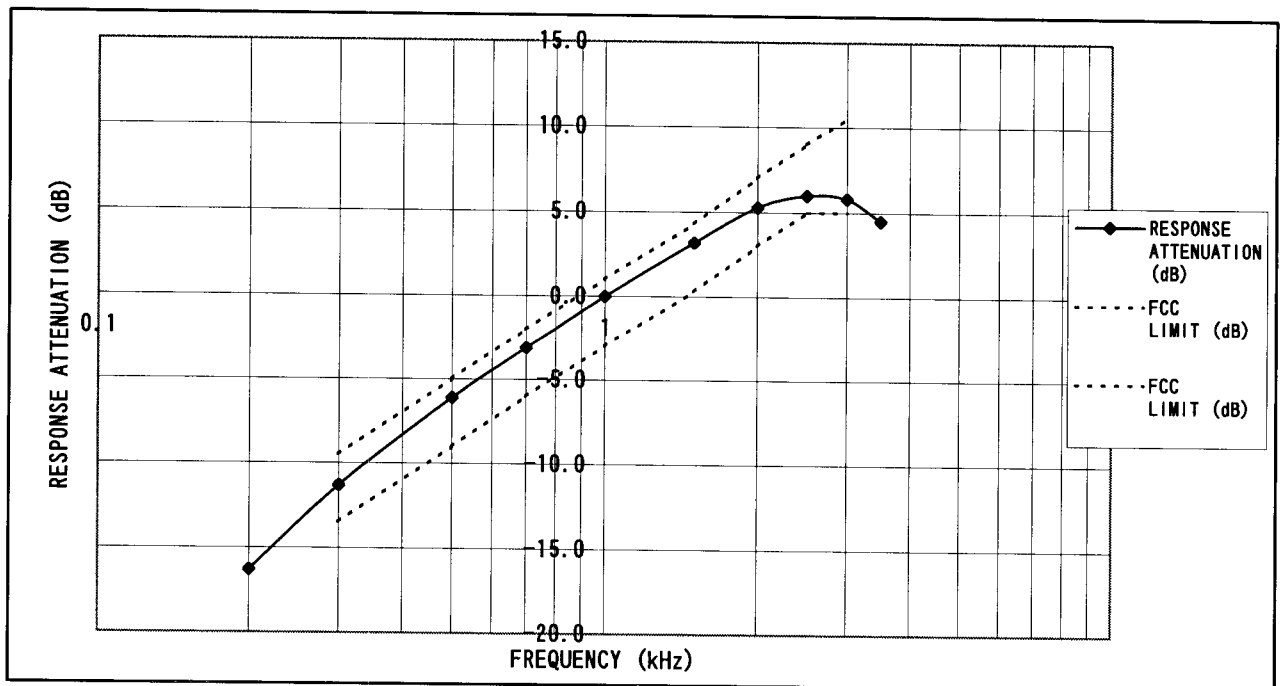


## 5. MODULATION CHARACTERISTICS (MODULATION LIMITING)

2.987


CARRIER FREQUENCY: 156.80 MHz

OUTPUT POWER: 24.7 WATTS


| AUDIO INPUT<br>LEVEL | DEVIATION | FCC<br>LIMIT |
|----------------------|-----------|--------------|
| (mV)                 | (kHz)     | (kHz)        |
| 1                    | 0.3       | 5.0          |
| 2                    | 0.5       | 5.0          |
| 3                    | 0.7       | 5.0          |
| 5                    | 1.1       | 5.0          |
| 7                    | 1.6       | 5.0          |
| 10                   | 2.2       | 5.0          |
| 20                   | 3.6       | 5.0          |
| 30                   | 4.1       | 5.0          |
| 50                   | 4.3       | 5.0          |
| 70                   | 4.4       | 5.0          |
| 100                  | 4.4       | 5.0          |
| 200                  | 4.4       | 5.0          |
| 300                  | 4.4       | 5.0          |
| 500                  | 4.0       | 5.0          |
| 1000                 | 3.9       | 5.0          |

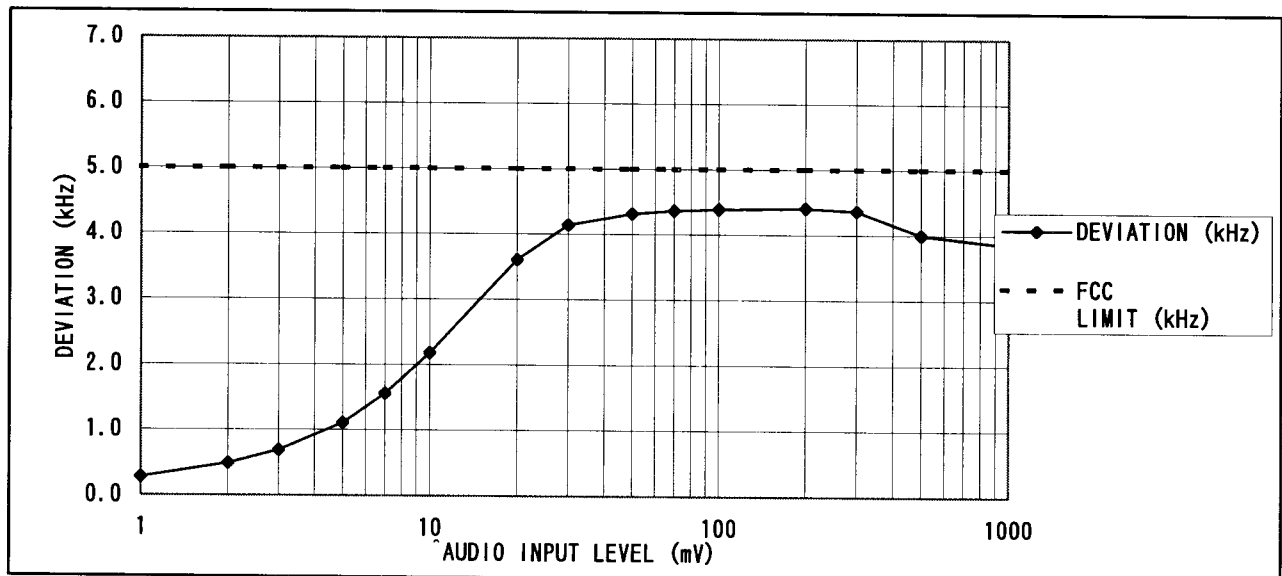


**6. OCCUPIED BANDWIDTH****2.989****See attached graphs.**

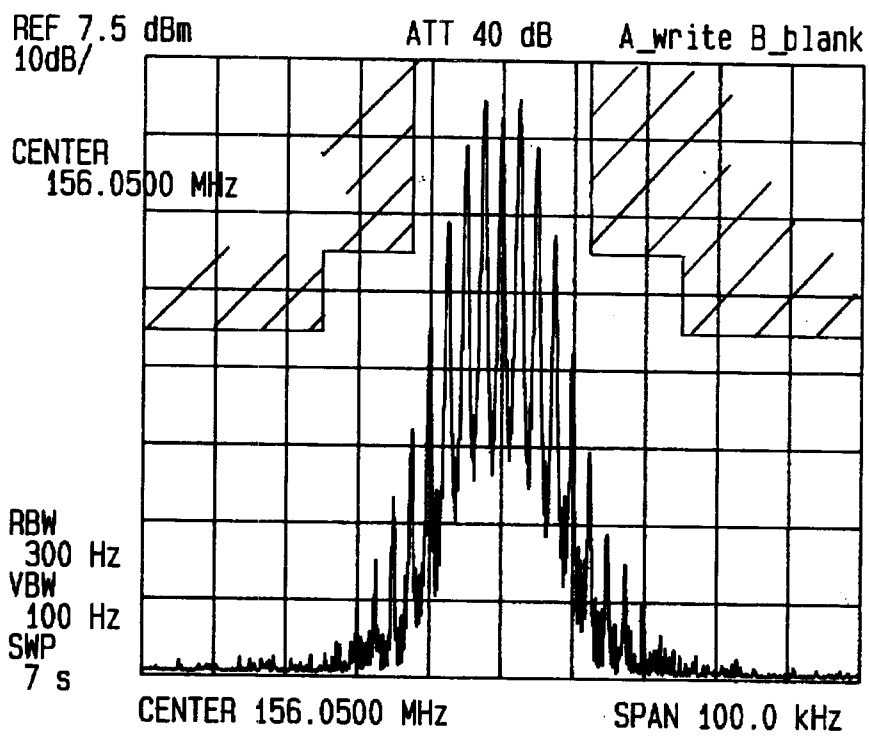


2002, Jun, 19  
UT888ZL  
(POLARIS)  
CH 1  
156.05 MHz  
TX: 24W

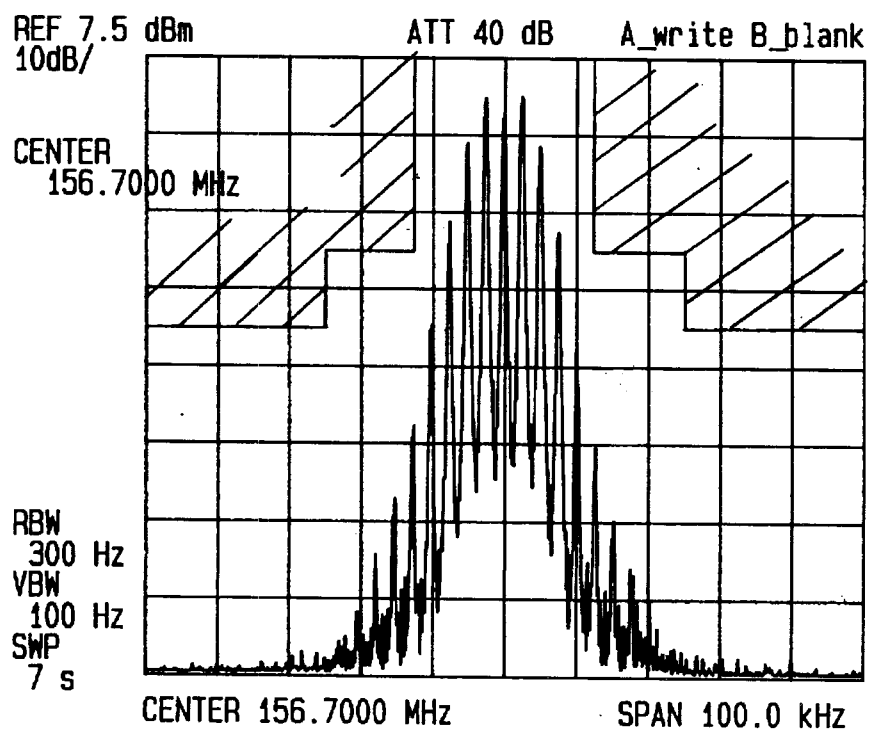

2002, Jun, 19  
UT888ZL  
(POLARIS)  
CH 14  
156.7 MHz  
TX: 24W

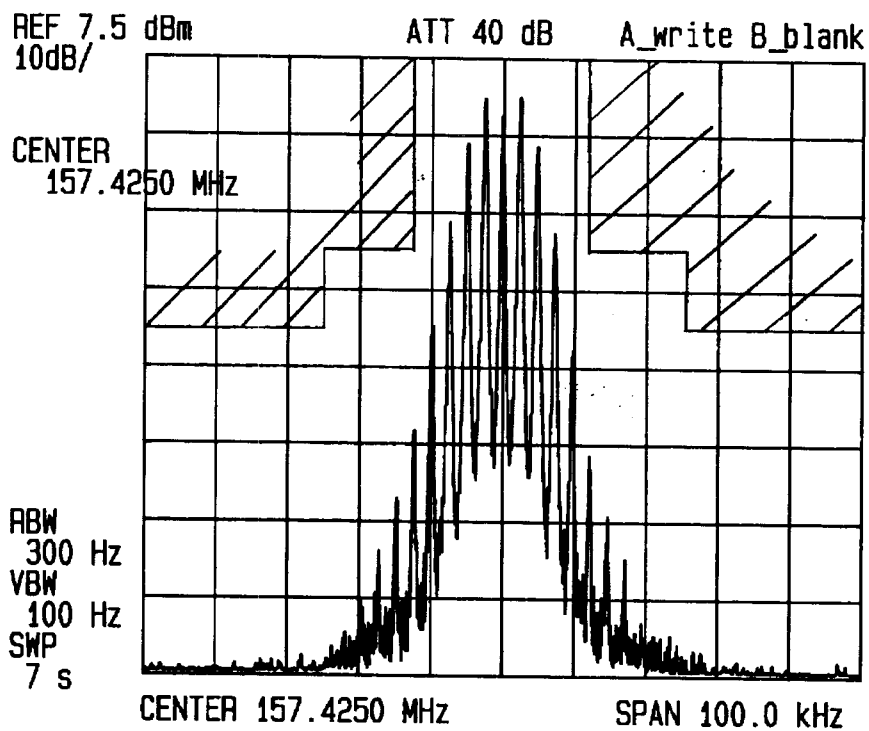


2002, Jun, 19  
UT888ZL  
(POLARIS)  
CH88  
157.425 MHz  
TX: 24 W

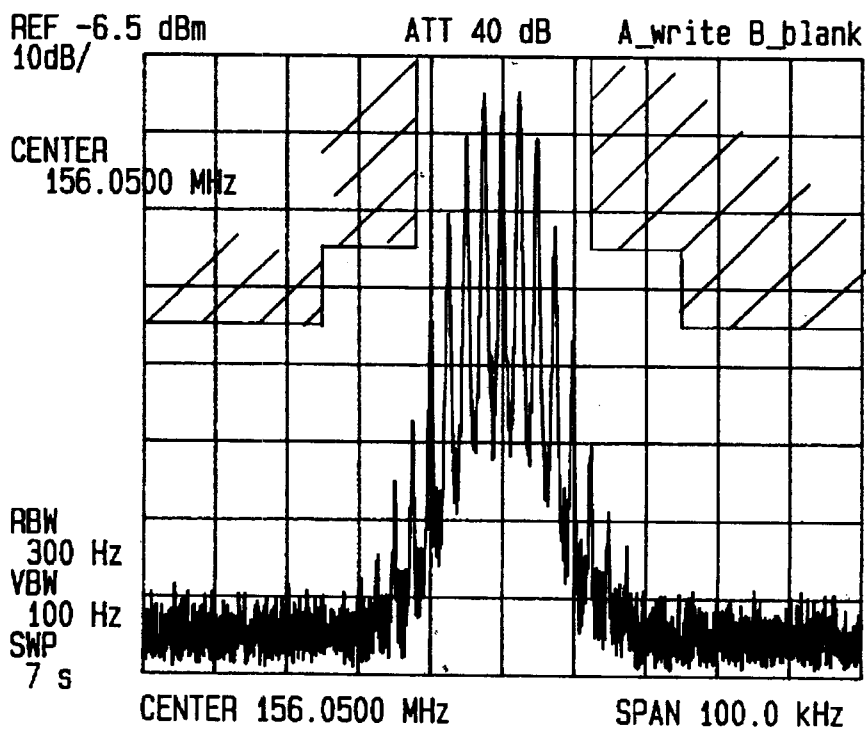

2002, Jun, 19  
UT888ZL  
(POLARIS)  
CH1  
156.05 MHz  
TX: 1 W




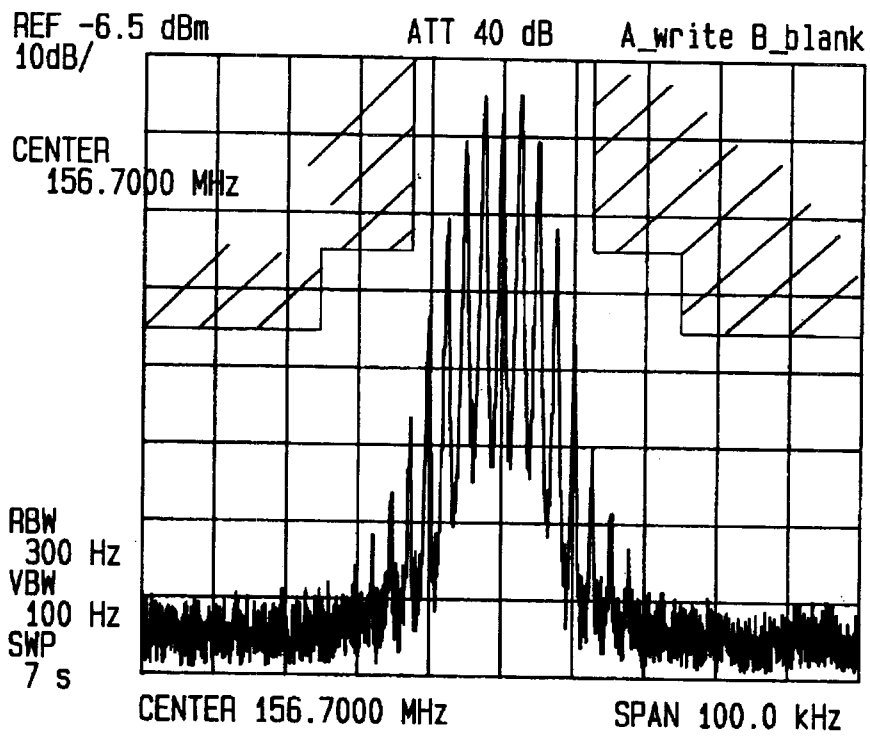

2002, Jun, 19

UT888ZL  
(POLARIS)

CH14  
156.7 MHz  
TX: 1W

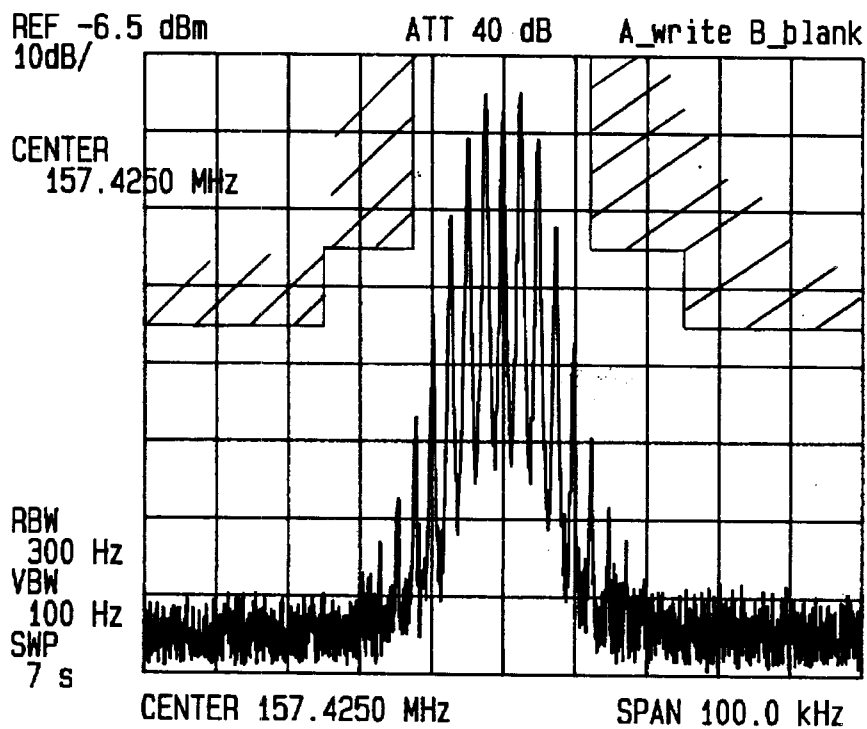

2002, Jun, 19

UT888ZL  
(POLARIS)

CH88  
157.425 MHz  
TX: 1W

## 7. SPURIOUS &amp; HARMONICS EMISSION AT ANTENNA TERMINAL

2.991

## 1) TX

## Full Power

| Harmonics of Carrier | 156.05MHz [dBc] | 156.8MHz [dBc] | 157.425MHz [dBc] |
|----------------------|-----------------|----------------|------------------|
| 1                    | -               | -              | -                |
| 2                    | -73.5           | -73.5          | -74.0            |
| 3                    | -82.0           | -81.0          | -81.0            |
| 4                    | -85.0           | -85.0          | -84.0            |
| 5                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 6                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 7                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 8                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 9                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 10                   | lesst than -90  | lesst than -90 | lesst than -90   |

## Reduced Power

| Harmonics of Carrier | 156.05MHz [dBc] | 156.8MHz [dBc] | 157.425MHz [dBc] |
|----------------------|-----------------|----------------|------------------|
| 1                    | -               | -              | -                |
| 2                    | -61.0           | -61.5          | -62.0            |
| 3                    | -65.0           | -64.5          | -64.0            |
| 4                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 5                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 6                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 7                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 8                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 9                    | lesst than -90  | lesst than -90 | lesst than -90   |
| 10                   | lesst than -90  | lesst than -90 | lesst than -90   |

## 2) RX

| CONDUCTED | 156.05-21.4MHz [dBm] | 156.8-21.4MHz [dBm] | 157.425-21.4MHz [dBm] |
|-----------|----------------------|---------------------|-----------------------|
| 1         | -82.6                | -82.5               | -82.8                 |
| 2         | -83.8                | -84.1               | -84.5                 |
| 3         | -85.7                | -85.4               | -85.5                 |
| 4         | -87.0                | -86.6               | -87.0                 |
| 5         | -88.0                | -88.5               | -87.5                 |
| 6         | lesst than -90       | lesst than -90      | lesst than -90        |
| 7         | lesst than -90       | lesst than -90      | lesst than -90        |
| 8         | lesst than -90       | lesst than -90      | lesst than -90        |
| 9         | lesst than -90       | lesst than -90      | lesst than -90        |
| 10        | lesst than -90       | lesst than -90      | lesst than -90        |

## 8. FIELD STRENGTH OF SPURIOUS &amp; HARMONICS RADIATION

1) Frequency at which tuned: 156.05 MHz

| EMISSIONS<br>(MHz)   | DUT,<br>PLACED<br>V/H | ANT,<br>POLARITY<br>V/H | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|----------------------|-----------------------|-------------------------|---------------------|-------------------|----------------|
| FULL POWER: 24 WATTS |                       |                         |                     |                   |                |
| 312.100              | H                     | H                       | -53.5               | -47               | 6.5            |
| 468.150              | -                     | -                       | -                   | -47               | >20            |
| 624.200              | H                     | H                       | -58.0               | -47               | 11.0           |
| 780.250              | H                     | H                       | -58.0               | -47               | 11.0           |
| 936.300              | -                     | -                       | -                   | -47               | >20            |
| 1092.350             | H                     | H                       | -57.0               | -47               | 10.0           |
| 1248.400             | -                     | -                       | -                   | -47               | >20            |
| 1404.450             | -                     | -                       | -                   | -47               | >20            |

| EMISSIONS<br>(MHz)    | DUT,<br>PLACED<br>V/H | ANT,<br>POLARITY<br>V/H | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|-----------------------|-----------------------|-------------------------|---------------------|-------------------|----------------|
| REDUCED POWER: 1 WATT |                       |                         |                     |                   |                |
| 312.100               | H                     | H                       | -48.5               | -43               | 5.5            |
| 468.150               | H                     | H                       | -61.0               | -43               | 18.0           |
| 624.200               | H                     | H                       | -58.0               | -43               | 15.0           |
| 780.250               | H                     | H                       | -58.0               | -43               | 15.0           |
| 936.300               | -                     | -                       | -                   | -43               | >20            |
| 1092.350              | -                     | -                       | -                   | -43               | >20            |
| 1248.400              | -                     | -                       | -                   | -43               | >20            |
| 1404.450              | -                     | -                       | -                   | -43               | >20            |

2) Frequency at which tuned: 156.80 MHz

| EMISSIONS<br>(MHz)   | DUT,<br>PLACED<br>V/H | ANT,<br>POLARITY<br>V/H | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|----------------------|-----------------------|-------------------------|---------------------|-------------------|----------------|
| FULL POWER: 24 WATTS |                       |                         |                     |                   |                |
| 313.600              | H                     | H                       | -53.0               | -47               | 6.0            |
| 470.400              | -                     | -                       | -                   | -47               | >20            |
| 627.200              | H                     | H                       | -57.5               | -47               | 10.5           |
| 784.000              | H                     | H                       | -57.8               | -47               | 10.8           |
| 940.800              | -                     | -                       | -                   | -47               | >20            |
| 1097.600             | H                     | H                       | -57.0               | -47               | 10.0           |
| 1248.400             | -                     | -                       | -                   | -47               | >20            |
| 1404.450             | -                     | -                       | -                   | -47               | >20            |

| EMISSIONS<br>(MHz)    | DUT,<br>PLACED<br>V/H | ANT,<br>POLARITY<br>V/H | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|-----------------------|-----------------------|-------------------------|---------------------|-------------------|----------------|
| REDUCED POWER: 1 WATT |                       |                         |                     |                   |                |
| 313.600               | H                     | H                       | -48.5               | -43               | 5.5            |
| 470.400               | H                     | H                       | -60.2               | -43               | 17.2           |
| 627.200               | H                     | H                       | -57.8               | -43               | 14.8           |
| 784.000               | H                     | H                       | -57.7               | -43               | 14.7           |
| 940.800               | -                     | -                       | -                   | -43               | >20            |
| 1097.600              | -                     | -                       | -                   | -43               | >20            |
| 1248.400              | -                     | -                       | -                   | -43               | >20            |
| 1404.450              | -                     | -                       | -                   | -43               | >20            |

3) Frequency at which tuned: 157.43 MHz

| EMISSIONS<br>(MHz)   | DUT,<br>PLACED<br>V/H | ANT,<br>POLARITY<br>V/H | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|----------------------|-----------------------|-------------------------|---------------------|-------------------|----------------|
| FULL POWER: 24 WATTS |                       |                         |                     |                   |                |
| 314.850              | H                     | H                       | -53.0               | -47               | 6.0            |
| 472.275              | -                     | -                       | -                   | -47               | >20            |
| 629.700              | H                     | H                       | -57.5               | -47               | 10.5           |
| 787.125              | H                     | H                       | -57.5               | -47               | 10.5           |
| 944.550              | -                     | -                       | -                   | -47               | >20            |
| 1101.975             | H                     | H                       | -57.0               | -47               | 10.0           |
| 1248.400             | -                     | -                       | -                   | -47               | >20            |
| 1404.450             | -                     | -                       | -                   | -47               | >20            |

| EMISSIONS<br>(MHz)    | DUT,<br>PLACED<br>V/H | ANT,<br>POLARITY<br>V/H | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|-----------------------|-----------------------|-------------------------|---------------------|-------------------|----------------|
| REDUCED POWER: 1 WATT |                       |                         |                     |                   |                |
| 314.850               | H                     | H                       | -48.5               | -43               | 5.5            |
| 472.275               | H                     | H                       | -60.0               | -43               | 17.0           |
| 629.700               | H                     | H                       | -57.5               | -43               | 14.5           |
| 787.125               | H                     | H                       | -57.7               | -43               | 14.7           |
| 944.550               | -                     | -                       | -                   | -43               | >20            |
| 1101.975              | -                     | -                       | -                   | -43               | >20            |
| 1248.400              | -                     | -                       | -                   | -43               | >20            |
| 1404.450              | -                     | -                       | -                   | -43               | >20            |


Note: All spurious emissions note reported were attenuated by at least 20 dB below the FCC limit.

## 9. FREQUENCY STABILITY (TEMPERATURE RANGE)

2.995 &amp; 80.209

CENTER FREQUENCY : 156.800 MHz

| TEMPERATURE<br>°C | FREQ.<br>MHz | TOLERANCE |            | FCC LIMIT |        |
|-------------------|--------------|-----------|------------|-----------|--------|
|                   |              | Hz        | %          | +%        | -%     |
| -20               | 156.80033    | 330       | 0.0002105  | 0.001     | -0.001 |
| -10               | 156.80064    | 640       | 0.0004082  | 0.001     | -0.001 |
| 0                 | 156.80085    | 850       | 0.0005421  | 0.001     | -0.001 |
| 10                | 156.800535   | 535       | 0.0003412  | 0.001     | -0.001 |
| 20                | 156.800255   | 255       | 0.0001626  | 0.001     | -0.001 |
| 30                | 156.799845   | -155      | -0.0000989 | 0.001     | -0.001 |
| 40                | 156.79956    | -440      | -0.0002806 | 0.001     | -0.001 |
| 50                | 156.79953    | -470      | -0.0002997 | 0.001     | -0.001 |

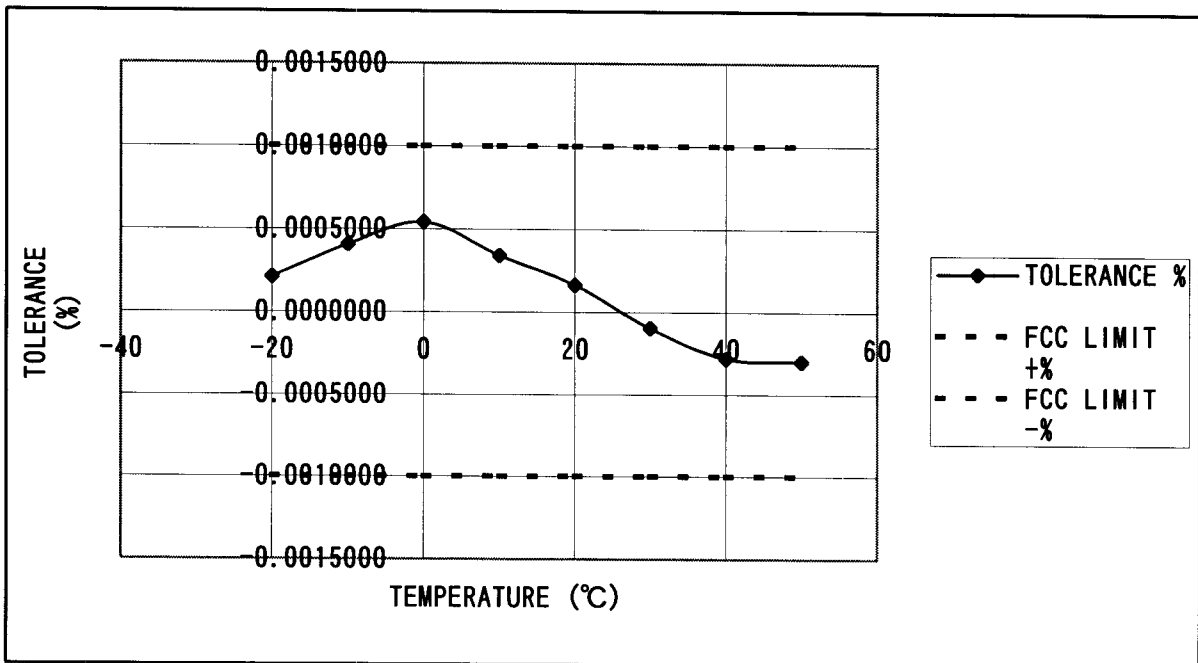


## 10. FREQUENCY STABILITY (VOLTAGE RANGE)

2.995 &amp; 80.209

CENTER FREQUENCY : 156.800 MHz

| VOLTAGE |     | FREQ.    | TOLERANCE |           | FCC LIMIT |        |
|---------|-----|----------|-----------|-----------|-----------|--------|
| (V)     | (%) | MHz      | Hz        | %         | + %       | - %    |
| 11.04   | 80  | 156.8001 | 100       | 0.0000638 |           |        |
| 11.73   | 85  | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |
| 12.42   | 90  | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |
| 13.11   | 95  | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |
| 13.80   | 100 | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |
| 14.49   | 105 | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |
| 15.18   | 110 | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |
| 15.87   | 115 | 156.8001 | 100       | 0.0000638 | 0.001     | -0.001 |

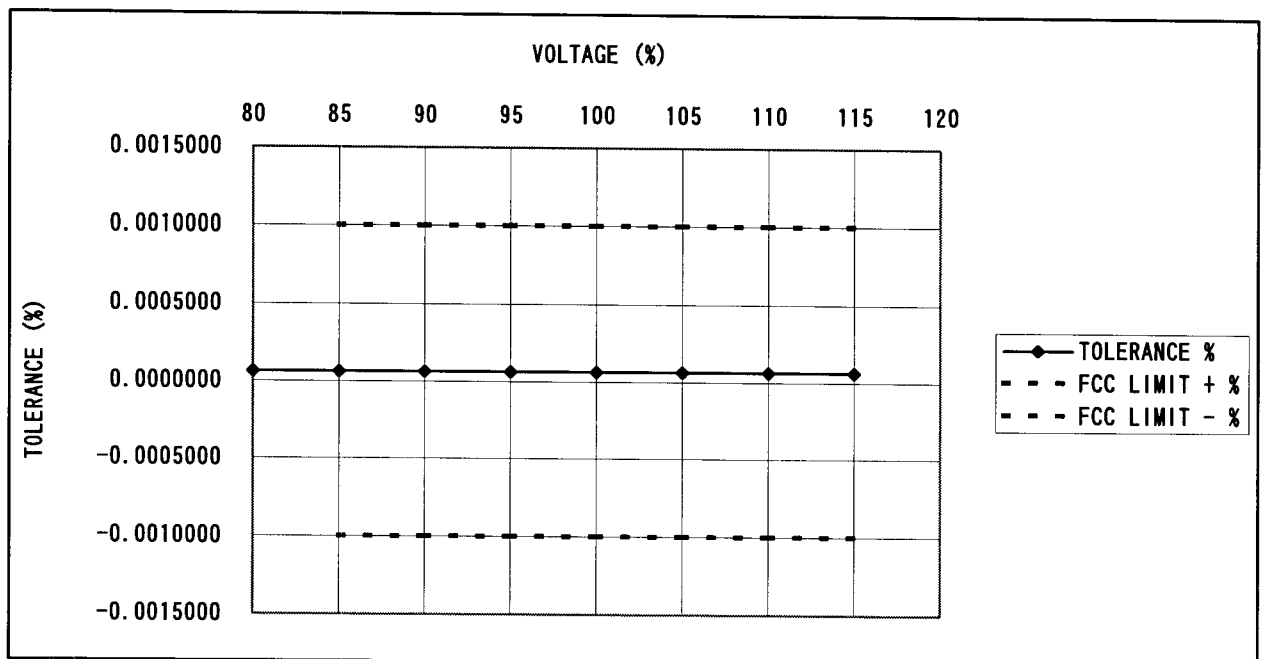

# RX-RADIATION

## 11. FIELD STRENGTH OF SPURIOUS & HARMONICS RADIATION

2.933

| EMISSIONS<br>(MHz)                                                                         | ATTENUATION<br>(dB) | FCC LIMIT<br>(dB) | MARGIN<br>(dB) |
|--------------------------------------------------------------------------------------------|---------------------|-------------------|----------------|
| 1) Frequency at which tuned: 156.050 MHz<br>No emissions exceed 20dB below the FCC limits. |                     |                   |                |
| 2) Frequency at which tuned: 156.700 MHz<br>No emissions exceed 20dB below the FCC limits. |                     |                   |                |
| 3) Frequency at which tuned: 157.425 MHz<br>No emissions exceed 20dB below the FCC limits. |                     |                   |                |

**Note:** All spurious emissions note reported were attenuated  
by at least 20 dB below the FCC limit.

LIST OF MEASUREMENT EQUIPMENTS

| ENG-NO | TEST EQUIPMENT    | TYPE           | MFR       | SERIAL NO. | Last Calibrtation |
|--------|-------------------|----------------|-----------|------------|-------------------|
| 1287   | AMPLIFIER         | AFS30010040020 | MITEQ     | 138315     | N/A               |
| 1294   | ANTENNA (BILOG)   | CBL6112A       | CHASE     | 2350       | N/A               |
| 1602   | ANTENNA (DIPOLE)  | 3120-B1        | EMCO      | 0075       | 16-Jul-00         |
| 1603   | ANTENNA (DIPOLE)  | 3120-B2        | EMCO      | 0076       | 16-Jul-00         |
| 1604   | ANTENNA (DIPOLE)  | 3120-B3        | EMCO      | 0076       | 16-Jul-00         |
| 1560   | ANTENNA (HORN)    | 3115           | EMCO      | 2167       | N/A               |
| 1388   | LISN              | KNW407         | KYOURITSU | 8-833-21   | N/A               |
| 0682   | POWER SUPPLY      | AA300          | TAKASAGO  | 31783013   | N/A               |
| 0857   | SPECTRUM ANALYZER | E7400A         | HP        | US40240145 | 23-Apr-02         |
| 0205   | SPECTRUM ANALYZER | R3265          | ADVANTEST | 25060158   | N/A               |