

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

for

INTENTIONAL RADIATOR

27.145MHZ RC TRANSMITTER

MODEL NO: 91755

BRAND NAME: TYCO RC-FAST GEAR MINI COOPER

FCC ID NO: APB91755-02A2T

REPORT NO: 02U1212-1

ISSUE DATE: MARCH 20, 2002

Prepared for

**MATTEL MT. LAUREL
6000 MIDLANTIC AVENUE
MT. LAUREL, NJ 08054
USA**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE.....	3
2. PRODUCT DESCRIPTION.....	4
3. TEST FACILITY	4
4. MEASUREMENT STANDARDS	4
5. TEST METHODOLOGY	4
6. MEASUREMENT EQUIPMENT USED.....	5
7. POWERLINE RFI LIMIT	5
8. RADIATED EMISSION LIMITS.....	5
9. SYSTEM TEST CONFIGURATION	6
10. EQUIPMENT MODIFICATION.....	7
11. TEST PROCEDURE AND RESULT	7
12. APPENDIX.....	11
EXTERNAL & INTERNAL PHOTOS.....	11
SCHEMATICS.....	14
BLOCK DIAGRAM.....	14
USER MANUAL	14

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MT. LAUREL
6000 MIDLANTIC
MT. LAUREL, NJ 08054
USA

CONTACT PERSON : FRANK WINKLER, SENIOR ELECTRONICS ENGINEER

TELEPHONE NO. : 856-840-1259

EUT DESCRIPTION : 27.145MHz RC TRANSMITTER

MODEL NAME/NUMBER : 91755

BRAND NAME : TYCO RC-FAST GEAR MINI COOPER

SERIAL NUMBER : N/A

FCC ID : APB91755-02A2T

DATE TESTED : MARCH 19, 2002

REPORT NUMBER : 02U1212-1

TYPE OF EQUIPMENT	RADIO CONTROL
EQUIPMENT TYPE	27 MHz TRANSMITTER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15 SUBPART C

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15 SUBPART C. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested By:

Approved & Released For CCS By:


THU CHAN
SENIOR EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES


MIKE HECKROTTE
CHIEF EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. PRODUCT DESCRIPTION

CHASSIS TYPE	Plastic
Fundamental Frequency	27.145 MHz
Power Source	One 9Volt Battery
Transmitting Time	Continuous
Type of antenna	12" Long
Type of Modulation	On Off Keying of a fixed frequency carrier wave
Antenna Requirement	Permanently Attached Wire Whip
Local Osc.	27.145MHz
Describe Intended Use	RC Transmitter for Controlling a Toy Vehicle
Duty Cycle of Transmitter	4 Start Bits @75% Duty Cycle followed by N Data Bits @50% Duty Cycle

3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

4. MEASUREMENT STANDARDS

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. MEASUREMENT EQUIPMENT USED

TEST EQUIPMENTS LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Pre-Amplifier,25 dB	HP0.1 - 1300MHz	8447D (P5)	2944A06550	9/19/02
Antenna, Bicon	Eaton30 - 200MHz	94455-1	1214	8/10/02
Antenna, LP	EMCO200 - 2000MHz	3146	9107-3163	8/10/02
Spectrum Analyzer	HP100Hz - 22GHz	8566B	3014A06685	6/28/02
Spectrum Display	HP	85662A	3026A19146	6/28/02
Quasi-Peak Detector	HP9K - 1GHz	85650A	3145A01654	6/28/02
RF Preselector	HP20Hz - 2GHz	85685A	2817A00756	5/4/02
Antenna Loop (10K-30MHz)	EMCO	6502	9202-2722	2/23/03

7. POWERLINE RFI LIMIT


CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 KHz TO 30MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NOT REQUIRED.

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
OPERATION WITHIN THE BAND 26.96 - 27.28 MHZ	SECTION 15.227

9. SYSTEM TEST CONFIGURATION

The EUT was configured for testing in a typical fashion
(as a customer would normally use it).

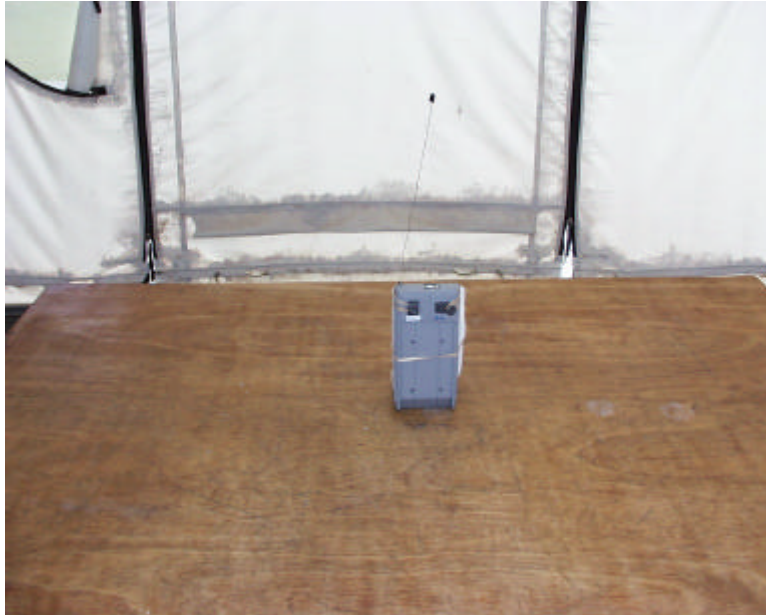

Radiated Open Site Test Set-up

10. EQUIPMENT MODIFICATION

To achieve compliance to FCC Section 15.227 technical limits, the following change(s) were made during compliance testing:


No changes were required in order to achieve compliance to FCC Section 15.227.

11. TEST PROCEDURE AND RESULT

Powerline RFI Limits	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	x
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	x
BATTERY POWER	X	SECTION 15.227	X

11.1 Radiated Emission Test Procedure and Result

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The readings so obtained are recorded in the data listed below.

						Project #: 02U1212-1 Report #: 020319C1 Date & Time: 03/19/02 9:04 AM Test Engr: Thu Chan					
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP											
561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
Company: Mattel Mount Laurel FW											
EUT Description: 27MHz Transmitter (M/N: Mini Cooper (US) #91755)											
Test Configuration : EUT only											
Type of Test: FCC 15.227											
Mode of Operation: Transmitting											

A Site

B Site

C Site


F Site

6 Worst Data

03/19/02

Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
Using loop antenna for below 30MHz measurements:											
27.15	67.10	9.00	0.76	0.00	76.86	100.00	-23.14	3mH	180.00	3.50	P
27.15	53.80	9.00	0.76	0.00	63.56	80.00	-16.44	3mH	180.00	3.50	Av
27.15	74.60	9.00	0.76	0.00	84.36	100.00	-15.64	3mV	180.00	1.00	P
27.15	61.70	9.00	0.76	0.00	71.46	80.00	-8.54	3mV	180.00	1.00	Av
Band edges & 15.209 measurements:											
26.96	28.50	9.00	0.76	0.00	38.26	49.50	-11.24	3mH	180.00	3.50	P
27.27	32.80	9.00	0.76	0.00	42.56	49.50	-6.94	3mH	180.00	3.50	P
26.96	35.50	9.00	0.76	0.00	45.26	49.50	-4.24	3mV	180.00	1.00	P
27.27	38.50	9.00	0.76	0.00	48.26	49.50	-1.24	3mV	180.00	1.00	P
54.29	51.00	9.00	0.89	27.48	33.41	40.00	-6.59	3mV	0.00	1.00	P
81.44	43.00	9.72	1.09	27.40	26.40	40.00	-13.60	3mV	180.00	1.00	P
135.73	39.50	15.16	1.53	27.18	29.01	43.50	-14.49	3mV	180.00	1.00	P
32.93	46.50	11.44	0.79	27.55	31.18	40.00	-8.82	3mV	180.00	1.00	P
33.30	46.50	11.37	0.79	27.55	31.12	40.00	-8.88	3mV	180.00	1.00	P
39.32	49.00	11.81	0.84	27.54	34.11	40.00	-5.89	3mV	180.00	1.00	P
41.32	47.00	12.15	0.85	27.53	32.46	40.00	-7.54	3mV	180.00	1.00	P
65.16	49.00	8.15	0.96	27.44	30.66	40.00	-9.34	3mV	180.00	1.00	P
73.16	49.00	8.46	1.03	27.42	31.07	40.00	-8.93	3mV	180.00	1.00	P
79.36	52.50	9.39	1.08	27.41	35.56	40.00	-4.44	3mV	180.00	1.00	P
121.65	52.00	11.68	1.41	27.25	37.84	43.50	-5.66	3mV	180.00	1.00	P
127.46	48.50	12.76	1.46	27.21	35.51	43.50	-7.99	3mV	180.00	1.00	P
133.64	53.80	14.55	1.51	27.19	42.68	43.50	-0.82	3mV	180.00	1.00	P
133.64	53.00	14.55	1.51	27.19	41.88	43.50	-1.62	3mV	180.00	1.00	QP
161.87	43.00	18.23	1.67	27.08	35.83	43.50	-7.67	3mV	180.00	1.00	P
165.47	41.00	17.91	1.70	27.06	33.55	43.50	-9.95	3mV	180.00	1.00	P
167.67	43.00	17.72	1.72	27.05	35.38	43.50	-8.12	3mV	180.00	1.00	P
171.63	45.00	17.37	1.75	27.04	37.08	43.50	-6.42	3mV	180.00	1.00	P

173.86	46.50	17.17	1.76	27.03	38.41	43.50	-5.09	3mV	180.00	1.00	P
179.65	44.00	16.14	1.77	26.99	34.92	43.50	-8.58	3mV	180.00	1.00	P
185.86	44.00	16.33	1.80	26.95	35.18	43.50	-8.32	3mV	180.00	1.00	P
159.66	43.50	18.40	1.66	27.09	36.46	43.50	-7.04	3mV	180.00	1.00	P
54.30	46.00	10.77	0.89	27.48	30.18	40.00	-9.82	3mH	180.00	3.00	P
81.45	42.00	9.04	1.09	27.40	24.72	40.00	-15.28	3mH	180.00	2.00	P
133.64	38.00	14.10	1.51	27.19	26.43	43.50	-17.07	3mH	180.00	1.00	P
244.32	42.00	13.44	2.16	26.68	30.92	46.00	-15.08	3mV	180.00	1.00	P
271.47	42.00	14.29	2.36	26.65	32.00	46.00	-14.00	3mV	180.00	1.00	P
298.62	42.00	15.03	2.57	26.64	32.96	46.00	-13.04	3mV	180.00	1.00	P
325.75	43.00	15.26	2.69	26.82	34.13	46.00	-11.87	3mV	180.00	1.20	P
352.89	44.00	15.47	2.80	27.02	35.25	46.00	-10.75	3mV	180.00	1.20	P
No other emissions were found up to 1GHz.											
Total data #: 38											
V.2c											

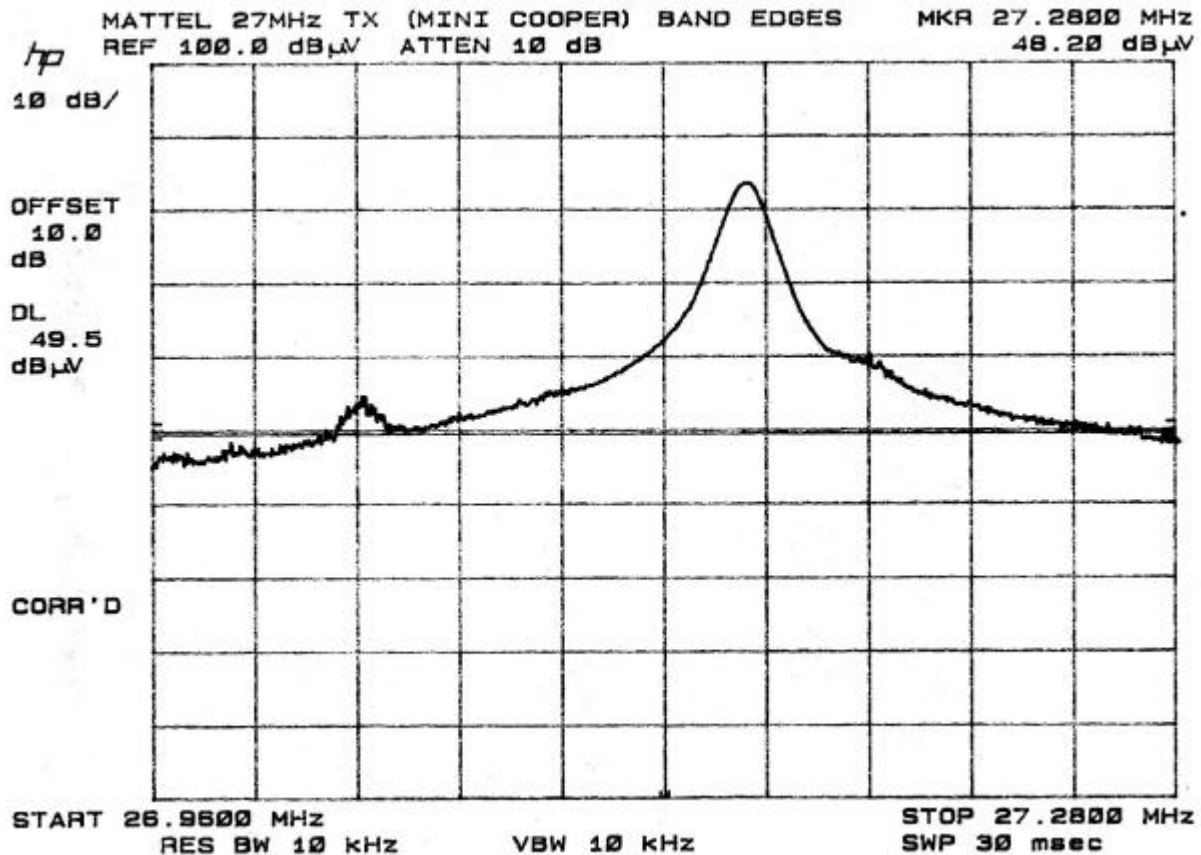


12. Appendix

External & Internal Photos





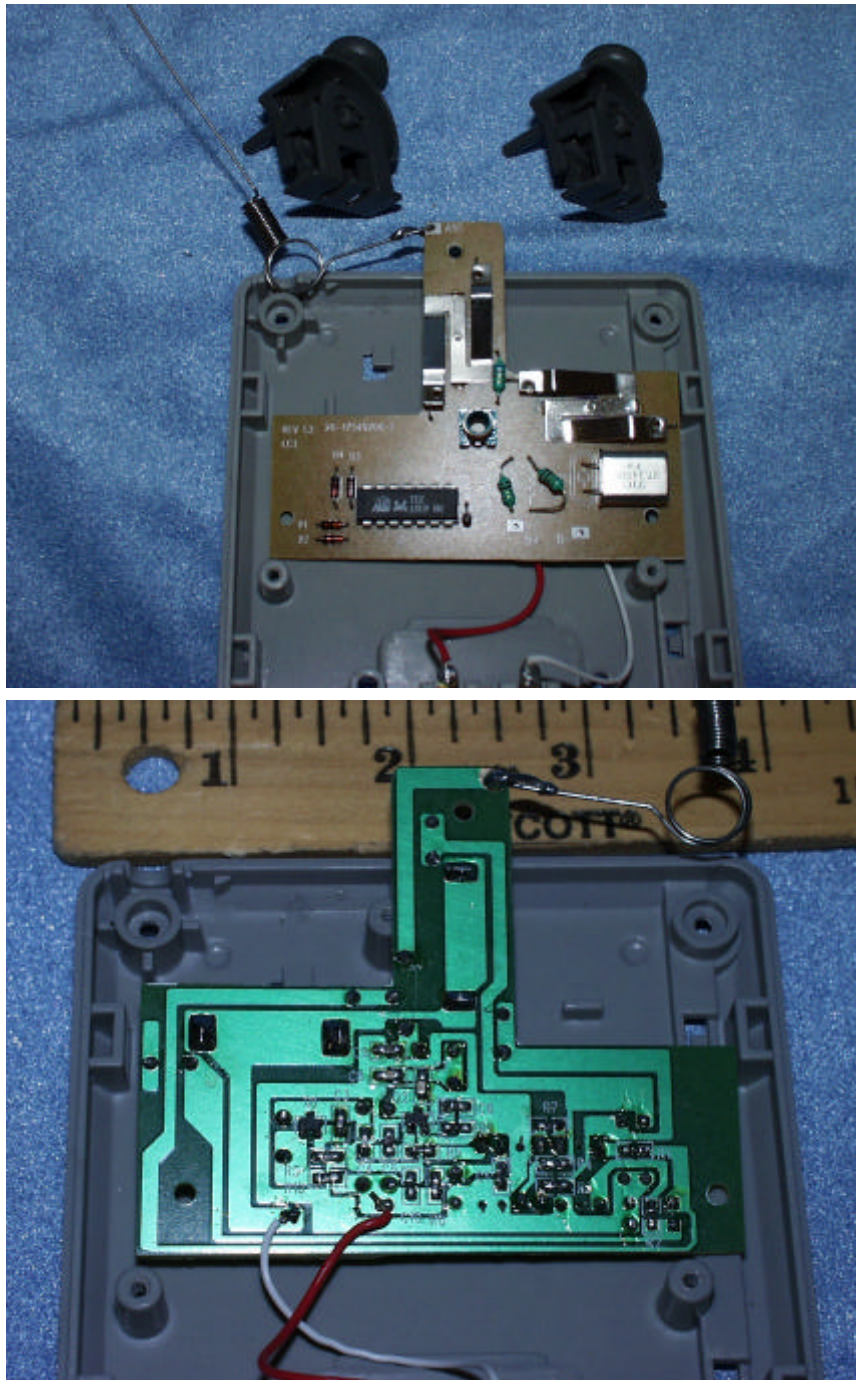

Schematics

Please refer to attached sheets.

Block Diagram

Please refer to attached sheets.

User Manual

Please refer to attached sheets.

END OF REPORT