

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

*for*

**INTENTIONAL RADIATOR**

**27.145MHZ RC TRANSMITTER**

**MODEL NO: 95720**

**BRAND NAME: TYCO R/C – KEY START WHEELIE CYCLE**

**FCC ID NO: APB92647-02A2T**

**REPORT NO: 02U1303-1**

**ISSUE DATE: MAY 3, 2002**

*Prepared for*

**MATTEL MT LAUREL  
6000 MIDLANTIC DRIVE  
MT. LAUREL, NEW JERSEY 08054  
USA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

## TABLE OF CONTENTS

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>3</b>
<b>2. PRODUCT DESCRIPTION.....</b>	<b>4</b>
<b>3. TEST FACILITY.....</b>	<b>4</b>
<b>4. MEASUREMENT STANDARDS .....</b>	<b>4</b>
<b>5. TEST METHODOLOGY .....</b>	<b>4</b>
<b>6. MEASUREMENT EQUIPMENT USED .....</b>	<b>5</b>
<b>7. POWERLINE RFI LIMIT .....</b>	<b>5</b>
<b>8. RADIATED EMISSION LIMITS.....</b>	<b>5</b>
<b>9. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
<b>10. EQUIPMENT MODIFICATION .....</b>	<b>7</b>
<b>11. TEST PROCEDURE AND RESULT .....</b>	<b>7</b>
<b>12. APPENDIX .....</b>	<b>11</b>
EXTERNAL & INTERNAL PHOTOS.....	11
SCHEMATICS.....	14
BLOCK DIAGRAM .....	14
USER MANUAL .....	14

## 1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MT. LAUREL  
6000 MIDLANTIC DRIVE  
MT. LAUREL, NEW JERSEY 08054  
USA

CONTACT PERSON : FRANK WINKLER/SENIOR ELECTRONICS ENGINEER

TELEPHONE NO. : 856-840-1259

EUT DESCRIPTION : 27.145MHz RC TRANSMITTER

MODEL NAME/NUMBER : 95720

BRAND NAME : TYCO R/C – KEYSTART WHEELIE CYCLE

SERIAL NUMBER : N/A

FCC ID : APB92647-02A2T

DATE TESTED : MAY 7, 2002

REPORT NUMBER : 02U1303-1


TYPE OF EQUIPMENT	RADIO CONTROL
EQUIPMENT TYPE	27 MHz TRANSMITTER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15 SUBPART C

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15 SUBPART C. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested By:

  
FRANK IBRAHIM  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

Approved & Released For CCS By:

  
MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. PRODUCT DESCRIPTION

CHASSIS TYPE	Plastic
Fundamental Frequency	27.145 MHz
Power Requirement	9VDC
Power Derived From	9V Battery
Type of Transmission	Data/Continuous
Rated RF Output (mW)	Less than 30uW (average)
Type of Modulation	On Off Keying of a fixed frequency carrier wave
Necessary Channel Bandwidth	3KHz
Emission Designator (ITU)	2K00A1D
Channel Bandwidth & Number of Channels	Single Channel in the 26.96 to 27.28MHz Band
Channel Access Method and Duplex Distance	Not Applicable-Simple Transmission
Duty Cycle of Transmitter	50% Duty Cycle
Antenna Type(s) and Number of Each	~4" long, permanently attached whip antenna
Intended Use	RC transmitter for controlling a toy vehicle
Antenna Requirement	Permanently Affixed
Local Osc.	27.145MHz
Usage	Toy

## 3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27,1994.

## 4. MEASUREMENT STANDARDS

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

## 5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

## 6. MEASUREMENT EQUIPMENT USED

TEST EQUIPMENTS LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Spectrum Analyzer	HP 0.1K - 1.5GHz	8568B	2732A03661	5/10/02
Spectrum Display	HP	85662A	2816A16696	5/10/02
Quasi Peak Adapter	HP9K - 1GHz	85650A	2811A01155	5/10/02
Pre-Amplifier, 25 dB	HP0.1 - 1300MHz	8447D (P5)	2944A06550	8/10/02
Antenna, Bicon	Eaton30 - 200MHz	94455-1	1214	8/2/02
Antenna, LP	EMCO200 - 2000MHz	3146	9107-3163	8/2/02
Active Loop Antenna, (10K - 30MHz)	EMCO	6502	9202-2722	4/20/03

## 7. POWERLINE RFI LIMIT

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 KHz TO 30MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NOT REQUIRED.

## 8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
OPERATION WITHIN THE BAND 26.96 - 27.28 MHZ	SECTION 15.227

## 9. SYSTEM TEST CONFIGURATION

The EUT was configured for testing in a typical fashion (as a customer would normally use it).



Radiated Open Site Test Set-up

## 10. EQUIPMENT MODIFICATION

To achieve compliance to FCC Section 15.227 technical limits, the following change(s) were made during compliance testing:

No changes were required in order to achieve compliance to FCC Section 15.227.

## 11. TEST PROCEDURE AND RESULT

Powerline RFI Limits	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	x
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	x
BATTERY POWER	X	SECTION 15.227	X

### 11.1 Radiated Emission Test Procedure and Result

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The readings so obtained are recorded in the data listed below.



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888

**Project #:** 02U1303-1  
**Report #:** 020507C02  
**Date & Time:** 05/07/02 10:57 AM  
**Test Engr:** Frank Ibrahim

**Company:** Mattel Mount Laurel  
**EUT Description:** 27MHz Transmitter for RC toys, Key Start Wheelie Cycle Model: 97013  
**Test Configuration :** Stand alone EUT  
**Type of Test:** FCC 15.227  
**Mode of Operation:** TX ON at 27.171 MHz

[<< Main Sheet](#)

Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
54.34	39.50	9.43	0.89	27.48	22.34	40.00	-17.66	3mV	0.00	1.00	P
81.50	38.00	7.85	1.09	27.40	19.54	40.00	-20.46	3mV	0.00	1.00	P
135.84	39.60	13.93	1.53	27.18	27.89	43.50	-15.61	3mV	0.00	1.00	P
54.34	39.60	9.42	0.89	27.48	22.44	40.00	-17.56	3mH	0.00	1.00	P
81.50	38.60	7.85	1.09	27.40	20.14	40.00	-19.86	3mH	0.00	1.00	P
135.84	38.90	13.93	1.53	27.18	27.19	43.50	-16.31	3mH	0.00	1.00	P
Total data #: 6 V.2c											



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP


561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888


02U1303-1  
020507C01  
05/07/02 9:51 AM  
Frank Ibrahim

**Company:** Mattel Mount Laurel  
**EUT Description:** 27MHz Transmitter for RC toys, Key Start Wheelie Cycle Model: 97013  
**Test Configuration :** Stand alone EUT  
**Type of Test:** FCC 15.227  
**Mode of Operation:** TX ON at 27.171 MHz

Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
X- Axis, Loop antenna at 90 degrees, Fundamental Freq											
27.17	77.00	5.85	0.76	27.54	56.07	100.00	-43.93	3mV	0.00	1.00	P
27.17	58.90	5.85	0.76	27.54	37.97	80.00	-42.03	3mV	0.00	1.00	Av
No signals found between the Fundamental Freq and 30MHz											
Low Band Edge (Freq: 26.96 MHz), Noise Floor											
26.96	37.80	5.85	0.76	27.54	-23.13	29.54	-52.67	3mV	0.00	1.00	P
High Band Edge (Freq: 27.28MHz), Noise Floor											
27.28	37.90	5.85	0.76	27.54	-23.03	29.54	-52.57	3mV	0.00	1.00	P
Note: -40 dB Distance Factor was applied to signals below 30MHz											




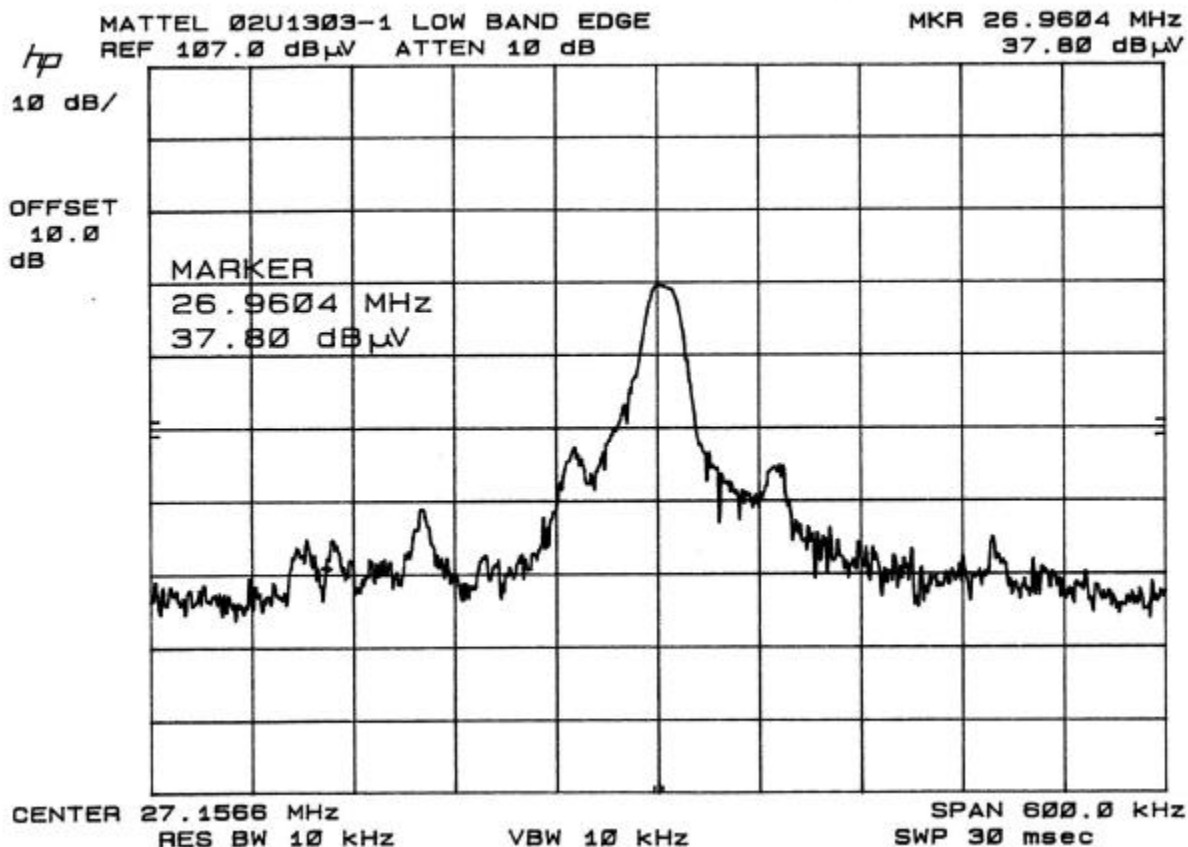


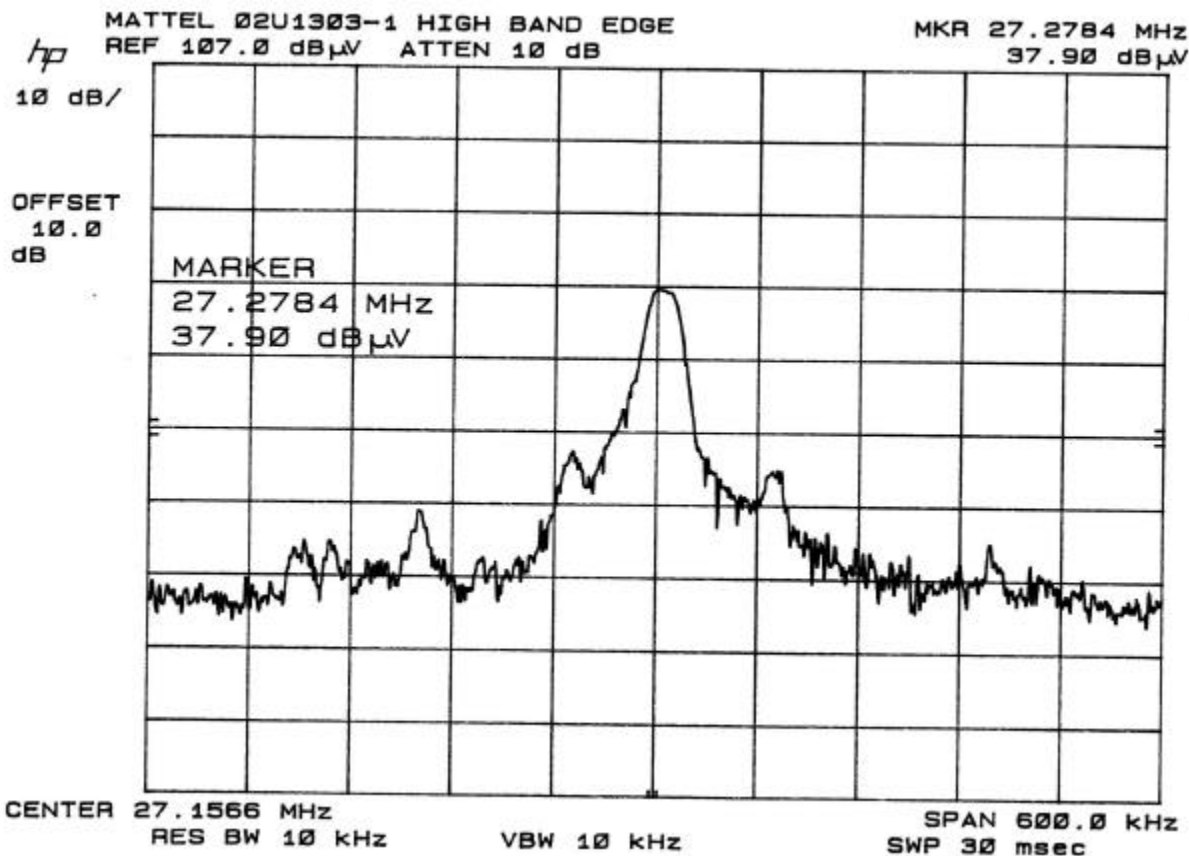


## 12. Appendix

### External & Internal Photos

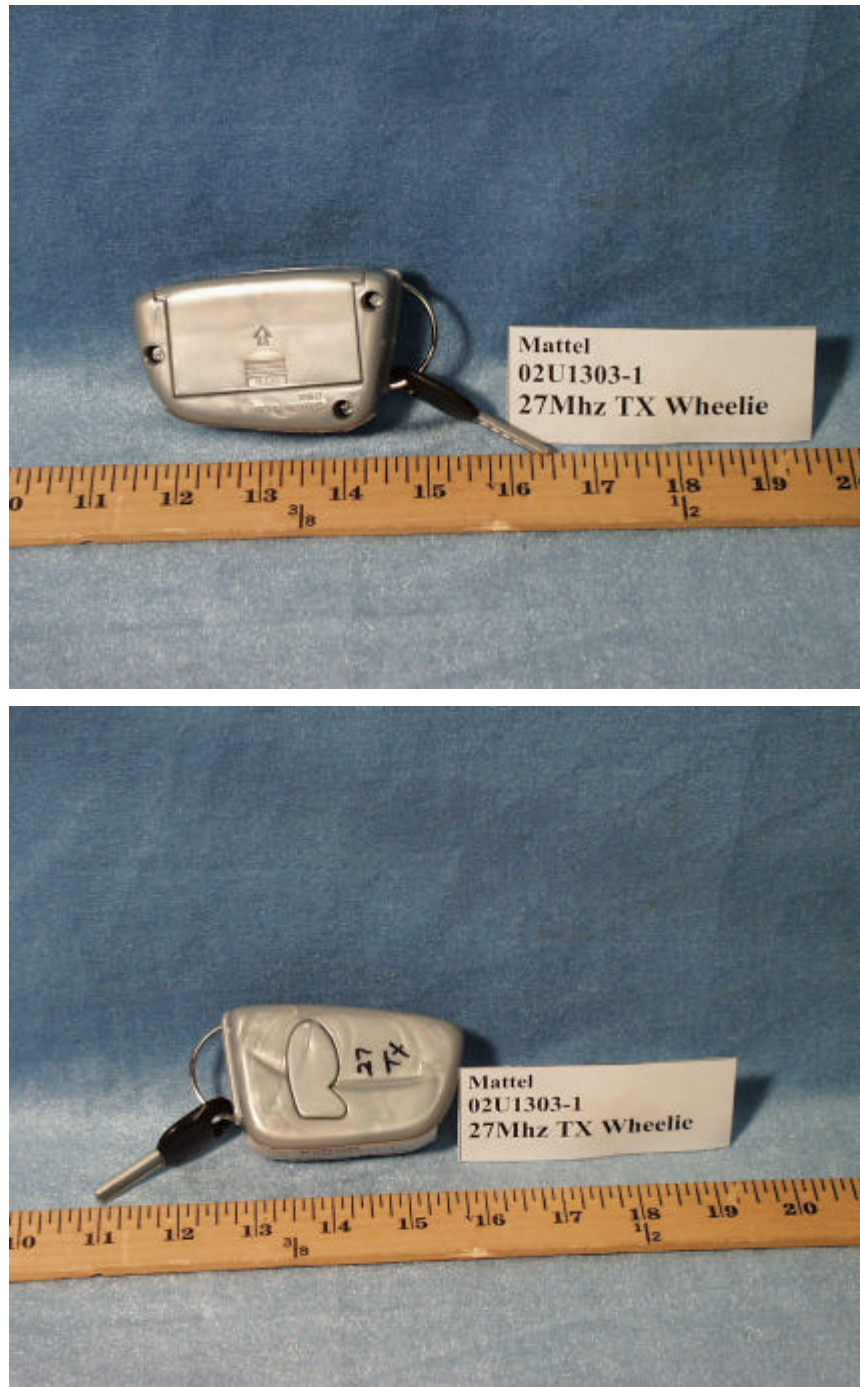

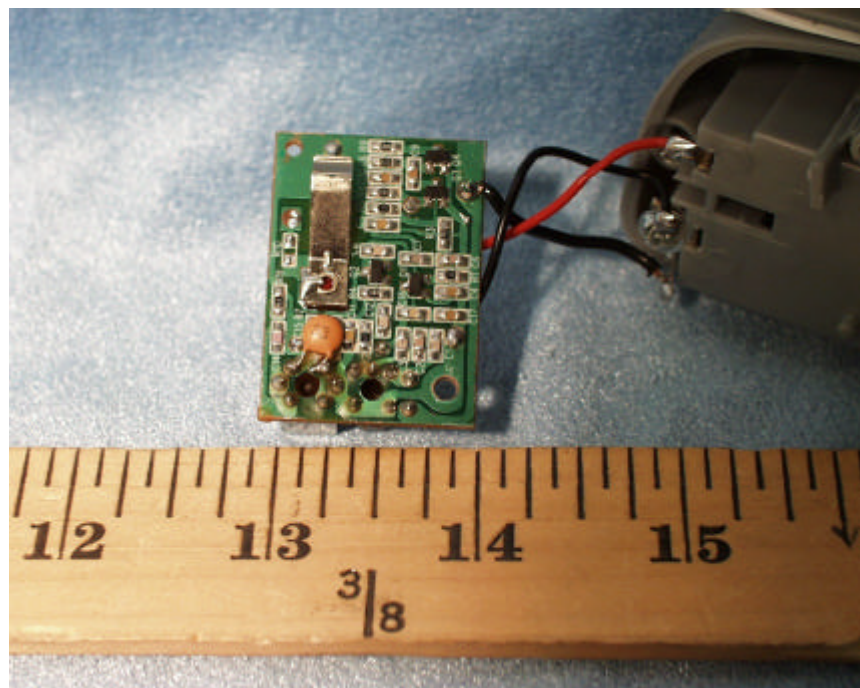



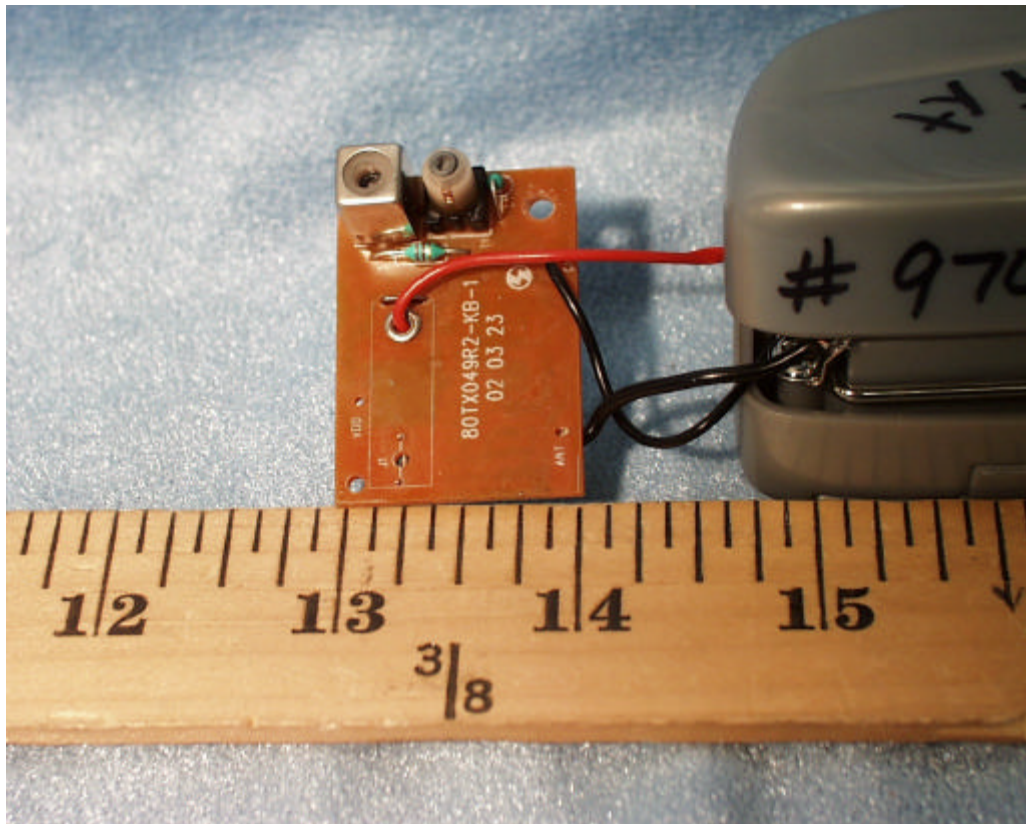

### **Schematics**

Please refer to attached sheets.

### **Block Diagram**

Please refer to attached sheets.

### **User Manual**

Please refer to attached sheets.

**END OF REPORT**