



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std. 1528-2013**

For

Wireless Speaker

Model: BOOMBOX 3 Wi-Fi

FCC ID: APIJBLBB3WIFI

Report Number: 4790526351_FCC_SAR-1

Issue Date: Aug 29, 2022

Prepared for

**Harman International Industries, Inc.
8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech
Development Zone Dongguan, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	8/29/2022	Initial Issue	

Note:

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < IEEE Std. 1528, when <Accuracy Method> decision rule is applied.



Table of Contents

1. Attestation of Test Results	4
2. Test Specification, Methods and Procedures	5
3. Facilities and Accreditation	6
4. SAR Measurement System & Test Equipment	7
4.1. SAR Measurement System	7
4.2. SAR Scan Procedures	8
4.3. Test Equipment	10
5. Measurement Uncertainty	11
6. Device Under Test (DUT) Information	12
6.1. DUT Description	12
6.2. Wireless Technology	12
6.3. Antenna Gain	12
7. Evaluation scenario	13
8. Dielectric Property Measurements & System Check	15
8.1. Dielectric Property Measurements	15
8.2. System Check	16
9. Measured and Reported (Scaled) SAR Results	17
10. Measured SAR Results	18
10.1. SAR Test Results of 2.4GHz Wi-Fi	18
10.2. SAR Test Results of 5GHz Wi-Fi	19
10.3. SAR Test Results of Bluetooth	22
11. Multiple Transmission SAR Analysis	23
11.1. Simultaneous Transmission combination	23
Appendixes	24
4790526351_FCC_SAR_1 App A conducted Power	24
4790526351_FCC_SAR_1 App B Photo	24
4790526351_FCC_SAR_1 App C System Check Plots	24
4790526351_FCC_SAR_1 App D Highest Test Plots	24
4790526351_FCC_SAR_1 App E Cal. Certificates	24



1. Attestation of Test Results

Applicant Name	Harman International Industries, Inc.		
Address	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES		
Manufacturer	Harman International Industries, Inc.		
Address	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES		
EUT Name	Wireless Speaker		
Model	BOOMBOX 3 Wi-Fi		
Sample Status	Normal		
Sample Received Date	Aug 12, 2022		
Date of Tested	Aug 26, 2022		
Applicable Standards	FCC 47 CFR § 2.1093 IEEE Std. 1528-2013 KDB publication		
SAR Limits (W/kg)			
Exposure Category	Peak spatial-average (1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6	4	
The Highest Reported SAR (W/kg)			
RF Exposure Conditions	Equipment Class		
	DTS	NII	DSS
Body (1-g)	0.583	0.688	0.082
Simultaneous Transmission(1-g)	1.276		
Test Results	Pass		
Prepared By: <i>Burt Hu</i> Burt Hu Laboratory Engineer	Reviewed By: <i>Denny Huang</i> Denny Huang Senior Project Engineer	Approved By: <i>Stephen Guo</i> Stephen Guo Laboratory Manager	



2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with IEEE Std.1528-2013, the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance
- 690783 D01 SAR Listings on Grants
- 865664 D01 SAR measurement 100 MHz to 6 GHz
- 865664 D02 RF Exposure Reporting
- 941225 D06 Hotspot Mode




3. Facilities and Accreditation

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi-tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be compliance with A2LA.</p> <p>FCC (FCC Recognized No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>IC (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
Description	All measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi-tech Development Zone, Dongguan, 523808, China

4. SAR Measurement System & Test Equipment

4.1.SAR Measurement System

The DASY8 system used for performing compliance tests consists of the following items:

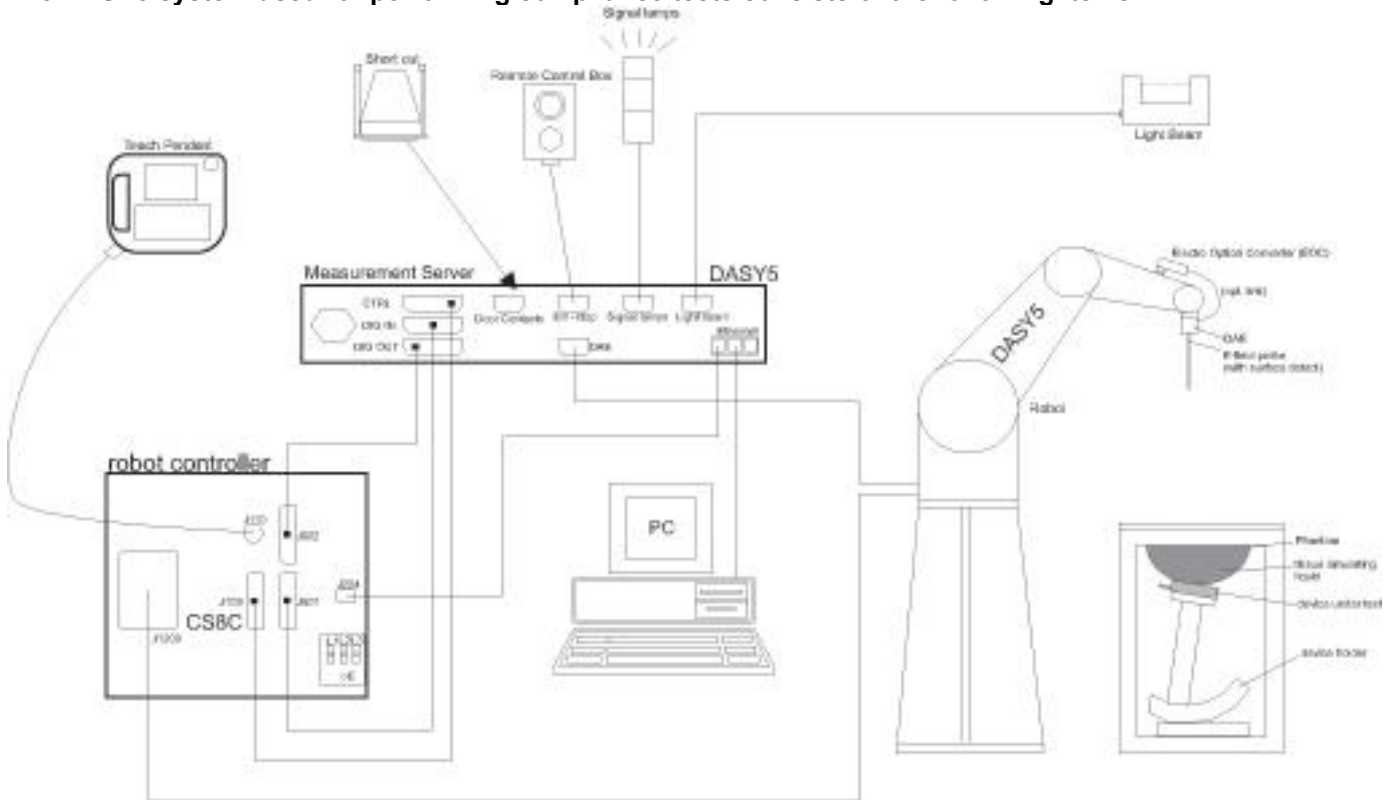

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



4.2.SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in Db) is specified in the standards for compliance testing. For example, a 2 Db range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 Db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in Db from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be greater than the step size in Z-direction.



4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

Name of equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ENA Network Analyzer	Keysight	E5080A	MY55100583	2022.10.29
Dielectric Probe kit	SPEAG	SM DAK 040 SA	1155	NCR
DC power supply	Keysight	E36103A	MY55350020	2022.10.29
Signal Generator	Rohde & Schwarz	SME06	837633\001	2022.10.29
BI-Directional Coupler	WERLATONE	C8060-102	3423	2022.10.29
Peak and Average Power Sensor	Keysight	E9323A	MY55440013	2022.10.29
Peak and Average Power Sensor	Keysight	E9323A	MY55420006	2022.10.29
Dual Channel PK Power Meter	Keysight	N1912A	MY55416024	2022.10.29
Amplifier	CORAD TECHNOLOGY LTD	AMF-4D-00400600-50-30P	1983561	NCR
Dosimetric E-Field Probe	SPEAG	EX3DV4	7733	2023.8.1
Data Acquisition Electronic	SPEAG	DAE4	1739	2023.7.28
Dipole Kit 2450 MHz	SPEAG	D2450V2	977	2024.12.16
Dipole Kit 5 GHz	SPEAG	D5GHzV2	1231	2024.12.15
Software	SPEAG	DASY8	N/A	NCR
Twin Phantom	SPEAG	ELI V8.0	2178	NCR
Thermometer	/	GX-138	150709653	2022.10.29
Thermometer	VICTOR	ITHX-SD-5	18470005	2022.10.29

Note:

1) Per KDB865664D01 v01r04 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std. 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



6. Device Under Test (DUT) Information

6.1.DUT Description

EUT is a portable audio system. EUT supports IEEE802.11b/g/n/a/ac/ax, bluetooth

EUT Dimension Overall (Length x Width x Height): 482.38mm x 200.7 mm x 256.54mm

6.2.Wireless Technology

Wireless technology	Frequency band
bluetooth	2.4 GHz
Wi-Fi	2.4 GHz
Wi-Fi	5 GHz


6.3.Antenna Gain

Antenna type	Band	Gain(dBi)
BT Ant	2.4GHz	2.61
WiFi Ant 1	2.4GHz	2.67
	5 GHz	2.95
WiFi Ant 2	2.4GHz	2.3
	5 GHz	3.14


7. Evaluation scenario

Refer to the diagram inside the device which attached below for the specific details of the antenna-to-edges distances. As per KDB 941225 D06, when the antenna to-edge-distance is greater than 2.5 cm, SAR evaluation is not required for the corresponding position.

Front/back View

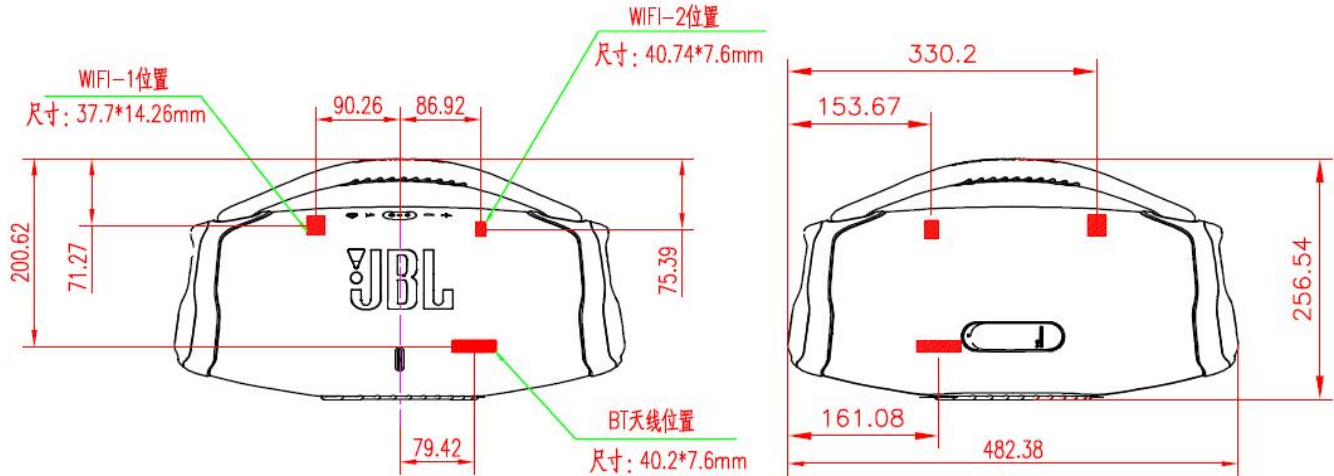


vertical view

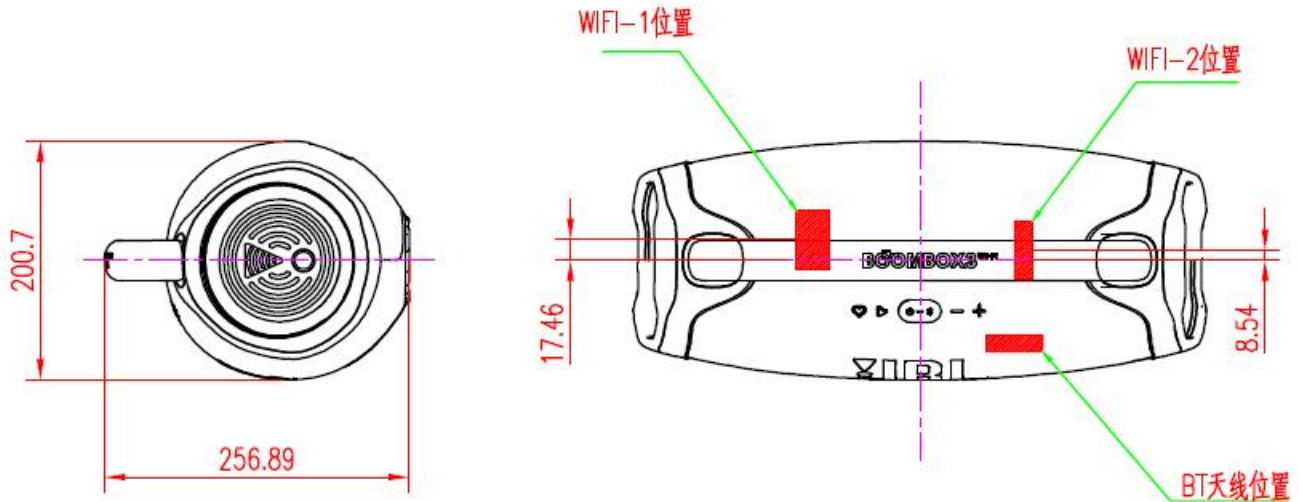

WiFi ANT 1 vertical view

WiFi ANT 2 vertical view

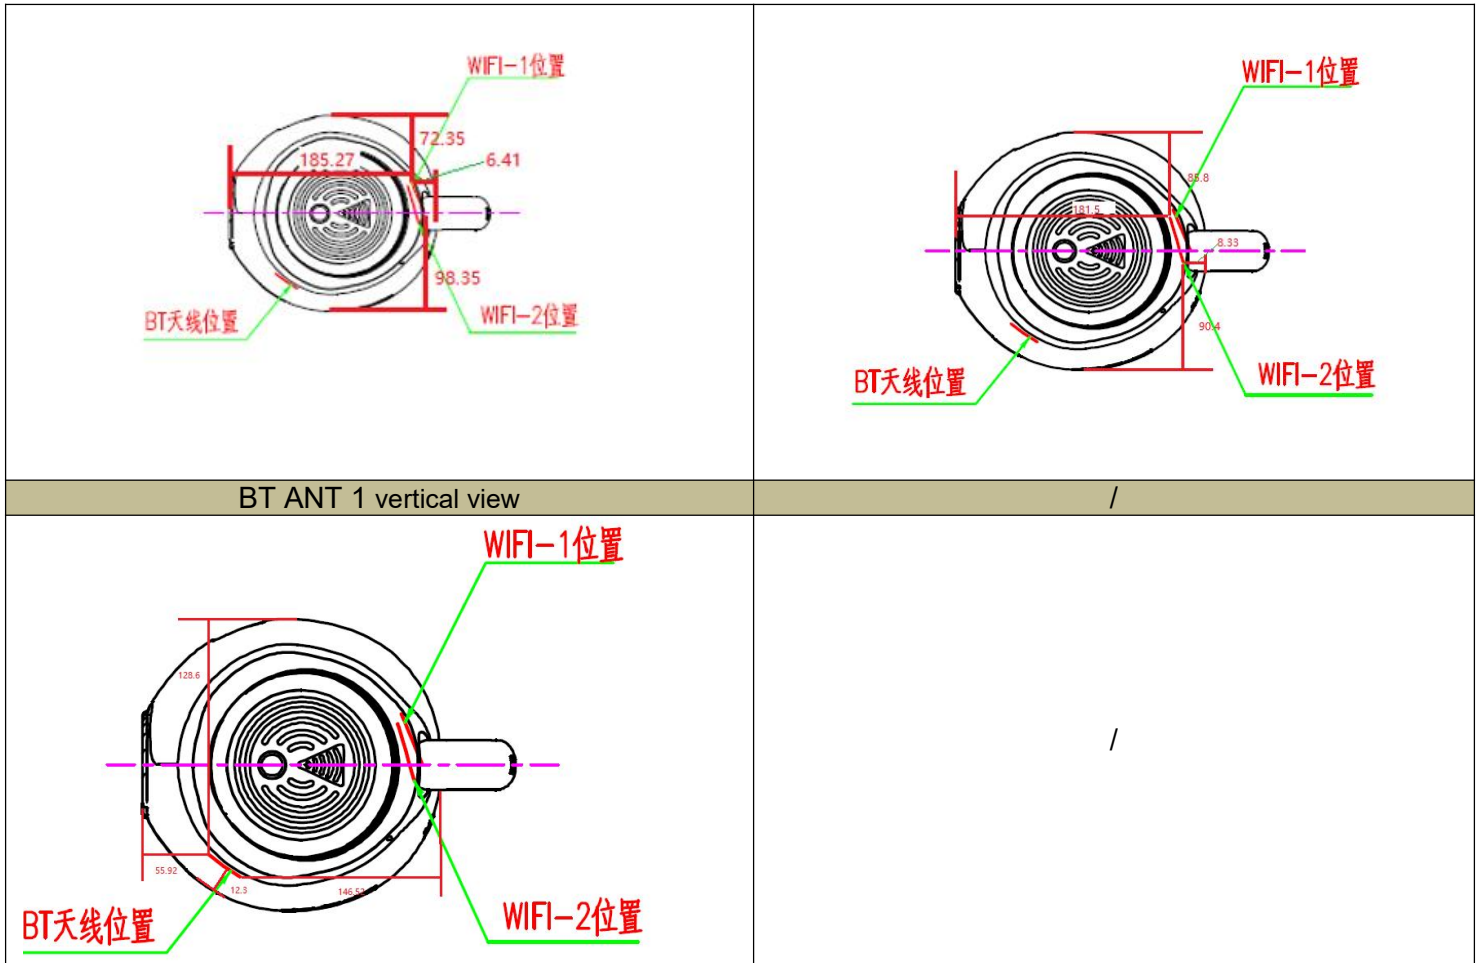

Wi-Fi Ant 1/2	Test Position	antenna to-edge-distance	Test required
	Front Surface	>25mm	No
	Back Surface	>25mm	No
	Left Edge	>25mm	No
	Right Edge	>25mm	No
	Top Edge	<25mm	Yes
	Bottom Edge	>25mm	No

BT Ant	Test Position	antenna to-edge-distance	Test required
	Front Surface	<25mm	Yes
	Back Surface	>25mm	No
	Left Edge	>25mm	No
	Right Edge	>25mm	No
	Top Edge	>25mm	No
	Bottom Edge	>25mm	No



8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series. Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013 Dielectric Property Measurements Results:

Liquid	Freq.	Liquid Parameters				Delta(%)		Limit (%)	Temp. (°C)	Test Date
		Measured		Target		ϵ_r	σ			
		ϵ_r	σ	ϵ_r	σ					
Head 2450	2402	39.35	1.78	39.29	1.76	0.15	1.14	±5	22.3	2022.8.26
	2412	39.31	1.75	39.27	1.77	0.10	-1.13			
	2450	39.52	1.77	39.20	1.80	0.82	-1.67			
	2462	39.44	1.79	39.18	1.81	0.66	-1.10			
	2480	39.25	1.82	39.16	1.83	0.23	-0.55			
Head 5250	5180	36.25	4.72	36.01	4.63	0.67	1.94	±5	22.3	2022.8.26
	5250	36.55	4.68	35.93	4.71	1.73	-0.64			
Head 5600	5580	36.12	4.95	35.55	5.04	1.60	-1.79	±5	22.3	2022.8.26
	5600	36.06	5.01	35.30	5.07	2.15	-1.18			
Head 5750	5750	35.98	5.12	35.36	5.22	1.75	-1.92	±5	22.3	2022.8.26
	5825	35.84	5.11	35.27	5.30	1.62	-3.58			



8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm (above 1GHz) and 15mm (below 1GHz) from dipole center to the simulating liquid surface.
- For area scan, standard grid spacing for head measurements is 15 mm in x- and y- dimension(≤2GHz), 12 mm in x- and y-dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz).
- For zoom scan, Δx_{zoom} , $\Delta y_{zoom} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{zoom} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$.
- Distance between probe sensors and phantom surface was set to 3 mm except for 5 GHz band. For 5GHz band, Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was set to 100 mW or 250 mW depend on the certificate of the dipoles.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

T.S. Liquid	Measured Results		Target (Ref. value)	Delta (%)	Limit (%)	Temp. (°C)	Test Date	
	Zoom Scan (W/kg)	Normalize to 1W (W/kg)						
Head 2450	1-g	13.800	55.20	53.20	3.76	±10	22.3	2022.8.26
	10-g	6.450	25.80	24.20	6.61	±10		
Head 5250	1-g	8.180	81.80	77.90	5.01	±10	22.3	2022.8.26
	10-g	2.360	23.60	22.60	4.42	±10		
Head 5600	1-g	8.690	86.90	80.90	7.42	±10	22.3	2022.8.26
	10-g	2.470	24.70	23.30	6.01	±10		
Head 5750	1-g	7.580	75.80	78.30	-3.19	±10	22.3	2022.8.26
	10-g	2.160	21.60	22.40	-3.57	±10		



9. Measured and Reported (Scaled) SAR Results

As per KDB 447498 D01 sec.4.1.e), When SAR or MPE is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported.

Scaled SAR calculation formula:

Scaled SAR = Tune-up in mW / Conducted power in mW * (100 / Duty cycle (if available)) * SAR value

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

A) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

B) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Per KDB865664 D01 v01r04:

For each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions /configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Note:

The same procedure is applied to extremity SAR evaluation, and the corresponding limitation is 2.5 times of 1-g SAR.



10. Measured SAR Results

10.1. SAR Test Results of 2.4GHz Wi-Fi.

Test Position (Body 5mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value	Power Drift	Duty Cycle (%)	Scaled 1g (W/kg)
			Tune-up	Meas.	1g (W/kg)			
Ant 1								
Top edge	11b	2437	15.00	14.55	0.512	-0.06	99.64	0.570
Top edge	11b	2412	15.00	14.46	0.513	-0.02	99.64	0.583
Top edge	11b	2462	15.00	14.52	0.354	-0.02	99.64	0.397
Ant 2								
Top edge	11b	2462	15.00	14.81	0.162	0.00	99.64	0.170
Top edge	11b	2412	15.00	14.71	0.193	0.01	99.64	0.207
Top edge	11b	2437	15.00	14.59	0.174	-0.01	99.64	0.192

OFDM mode SAR evaluation exclusion analysis(Ant 1)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11b	15.0	0.583	\	\
802.11g	10.0	\	0.184	Excluded
802.11n20	8.0	\	0.116	Excluded
802.11n40	6.5	\	0.082	Excluded
802.11ax20	7.0	\	0.092	Excluded
802.11ax40	6.5	\	0.082	Excluded
802.11ax20RU	10.0	\	0.184	Excluded
802.11ax40RU	10.0	\	0.184	Excluded

Note:

The adjusted SAR of other modes of 802.11 is less than 1.2 W/kg, so the SAR test of other modes of 802.11 is not required.

OFDM mode SAR evaluation exclusion analysis(Ant 2)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11b	15.0	0.207	\	\
802.11g	10.5	\	0.073	Excluded
802.11n20	8.5	\	0.046	Excluded
802.11n40	6.5	\	0.029	Excluded
802.11ax20	7.5	\	0.037	Excluded
802.11ax40	6.5	\	0.029	Excluded
802.11ax20RU	10.0	\	0.065	Excluded
802.11ax40RU	10.0	\	0.065	Excluded

Note:

The adjusted SAR of other modes of 802.11 is less than 1.2 W/kg, so the SAR test of other modes of 802.11 is not required.



10.2.SAR Test Results of 5GHz Wi-Fi.

Test Position (Body 5mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value	Power Drift	Duty Cycle (%)	Scaled 1g (W/kg)
			Tune-up	Meas.	1-g(W/kg)			
Ant 1								
U-NII-1								
Top edge	11A	5180	12.00	11.82	0.329	0.00	97.20	0.353
U-NII-2C								
Top edge	11A	5580	11.50	11.10	0.610	-0.02	97.20	0.688
U-NII-3								
Top edge	11A	5825	11.00	10.48	0.231	-0.02	97.20	0.268
Ant 2								
U-NII-1								
Top edge	11A	5180	12.00	11.65	0.282	0.03	97.20	0.314
U-NII-2C								
Top edge	11A	5580	11.50	11.27	0.542	0.00	97.18	0.588
U-NII-3								
Top edge	11A	5825	11.00	10.46	0.251	0.00	97.20	0.292

Subsequent test configuration SAR evaluation exclusion analysis for U-NII-1 band (Ant 1)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11a	12.0	0.353	\	\
802.11n20	10.5	\	0.250	Excluded
802.11n40	10.0	\	0.223	Excluded
802.11ac20	10.5	\	0.250	Excluded
802.11ac40	10.0	\	0.223	Excluded
802.11ax20	10.5	\	0.250	Excluded
802.11ax40	9.5	\	0.199	Excluded
802.11ac 80M	9.5	\	0.199	Excluded
802.11ax 80M	9.5	\	0.199	Excluded
802.11ax20RU	5.0	\	0.070	Excluded
802.11ax40RU	4.5	\	0.063	Excluded
802.11ax80RU	4.5	\	0.063	Excluded

Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.



Subsequent test configuration SAR evaluation exclusion analysis for U-NII-2C band (Ant 1)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11a	11.5	0.688	\	\
802.11n20	11.0	\	0.613	Excluded
802.11n40	9.5	\	0.434	Excluded
802.11ac20	11.0	\	0.613	Excluded
802.11ac40	9.5	\	0.434	Excluded
802.11ax20	10.5	\	0.546	Excluded
802.11ax40	9.0	\	0.387	Excluded
802.11ac 80M	10.0	\	0.487	Excluded
802.11ax 80M	9.5	\	0.434	Excluded
802.11ax20RU	5.0	\	0.154	Excluded
802.11ax40RU	4.5	\	0.137	Excluded
802.11ax80RU	4.0	\	0.122	Excluded

Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

Subsequent test configuration SAR evaluation exclusion analysis for U-NII-3 band (Ant 1)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11a	11.0	0.268	\	\
802.11n20	9.5	\	0.190	Excluded
802.11n40	9.0	\	0.169	Excluded
802.11ac20	9.5	\	0.190	Excluded
802.11ac40	9.0	\	0.169	Excluded
802.11ax20	9.5	\	0.190	Excluded
802.11ax40	8.5	\	0.151	Excluded
802.11ac 80M	8.5	\	0.151	Excluded
802.11ax 80M	8.0	\	0.134	Excluded
802.11ax20RU	4.0	\	0.053	Excluded
802.11ax40RU	3.0	\	0.042	Excluded
802.11ax80RU	3.5	\	0.048	Excluded

Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.



Subsequent test configuration SAR evaluation exclusion analysis for U-NII-1 band (Ant 2)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11a	12.0	0.314	\	\
802.11n20	10.5	\	0.222	Excluded
802.11n40	10.0	\	0.198	Excluded
802.11ac20	10.5	\	0.222	Excluded
802.11ac40	10.0	\	0.198	Excluded
802.11ax20	10.5	\	0.222	Excluded
802.11ax40	9.5	\	0.177	Excluded
802.11ac 80M	9.5	\	0.177	Excluded
802.11ax 80M	9.5	\	0.177	Excluded
802.11ax20RU	5.0	\	0.063	Excluded
802.11ax40RU	4.5	\	0.056	Excluded
802.11ax80RU	3.5	\	0.044	Excluded

Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

Subsequent test configuration SAR evaluation exclusion analysis for U-NII-2C band (Ant 2)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11a	11.5	0.588	\	\
802.11n20	10.5	\	0.467	Excluded
802.11n40	9.5	\	0.371	Excluded
802.11ac20	11.0	\	0.524	Excluded
802.11ac40	9.5	\	0.371	Excluded
802.11ax20	9.0	\	0.331	Excluded
802.11ax40	9.0	\	0.331	Excluded
802.11ac 80M	10	\	0.416	Excluded
802.11ax 80M	9.0	\	0.331	Excluded
802.11ax20RU	5.0	\	0.132	Excluded
802.11ax40RU	3.5	\	0.093	Excluded
802.11ax80RU	4.0	\	0.105	Excluded

Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.



Subsequent test configuration SAR evaluation exclusion analysis for U-NII-3 band (Ant 2)

Mode	Tune-up (dBm)	Highest Reported SAR (W/kg)	Adjusted SAR (W/kg)	SAR Test
802.11a	11.0	0.292	\	\
802.11n20	9.5	\	0.207	Excluded
802.11n40	9.0	\	0.184	Excluded
802.11ac20	9.5	\	0.207	Excluded
802.11ac40	9.0	\	0.184	Excluded
802.11ax20	9.5	\	0.207	Excluded
802.11ax40	8.5	\	0.164	Excluded
802.11ac 80M	8.5	\	0.164	Excluded
802.11ax 80M	8.0	\	0.146	Excluded
802.11ax20RU	4.0	\	0.058	Excluded
802.11ax40RU	3.0	\	0.046	Excluded
802.11ax80RU	2.0	\	0.037	Excluded

Note:

The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

10.3.SAR Test Results of Bluetooth.

Test Position (Body 5mm)	Test Mode	Channel/Frequency	Power (dBm)		SAR Value	Power Drift	Duty Cycle (%)	Scaled 1g (W/kg)
			Tune-up	Meas.	1g (W/kg)			
Front Surface	3DH5	2402	9.0	8.69	0.037	0.02	57.65	0.069
Front Surface	3DH5	2441	9.0	7.93	0.037	0.00	57.65	0.082
Front Surface	3DH5	2480	9.0	8.31	0.024	-0.01	57.65	0.049



11. Multiple Transmission SAR Analysis

According to FCC OET KDB447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

11.1. Simultaneous Transmission combination.

NO.	Combination
1	Ant1 2.4g Wifi+ Ant2 2.4g Wifi+BT
2	Ant1 5g Wifi+ Ant2 5g Wifi+BT

Test Position	Highest Reported SAR(1g)(W/kg)				
	2.4G Wi-Fi Ant 1	2.4G Wi-Fi Ant 2	5G Wi-Fi Ant 1	5G Wi-Fi Ant 2	Bluetooth
Front surface	0.583	0.207	0.688	0.588	/
Top Edge	/	/	/	/	0.082

Antenna placed vertical					
Test Position	Simultaneous Tx Antenna Combination(W/kg)			Σ SAR 1g (W/kg)	Limit(W/kg)
	2.4 Wi-Fi Ant 1	2.4 Wi-Fi Ant 2	Bluetooth		
Front Surface	/	/	0.082	0.082	1.6
Test Position	Simultaneous Tx Antenna Combination(W/kg)			Σ SAR 1g (W/kg)	Limit(W/kg)
	2.4 Wi-Fi Ant 1	2.4 Wi-Fi Ant 2	Bluetooth		
Top Edge	0.583	0.207	/	0.790	1.6
Test Position	Simultaneous Tx Antenna Combination(W/kg)			Σ SAR 1g (W/kg)	Limit(W/kg)
	5G Wi-Fi Ant 1	5G Wi-Fi Ant 2	Bluetooth		
Front Surface	/	/	0.082	0.082	1.6
Test Position	Simultaneous Tx Antenna Combination(W/kg)			Σ SAR 1g (W/kg)	Limit(W/kg)
	5G Wi-Fi Ant 1	5G Wi-Fi Ant 2	Bluetooth		
Top Edge	0.688	0.588	/	1.276	1.6



Appendixes

Refer to separated files for the following appendixes.

4790526351_FCC_SAR_1 App A conducted Power

4790526351_FCC_SAR_1 App B Photo

4790526351_FCC_SAR_1 App C System Check Plots

4790526351_FCC_SAR_1 App D Highest Test Plots

4790526351_FCC_SAR_1 App E Cal. Certificates

-----End of Report-----