



FCC 47 CFR PART 15 SUBPART C

for

WIRELESS SPEAKER

Model: HARMAN KARDON ONYX

Brand: Harman/Kardon

Test Report Number:

C130503Z01-RP1

Issued Date: June 3, 2013

Issued for

Harman International Industries, Inc

8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C130503Z01-RP1	Initial Issue	ALL	Anna Liu



TABLE OF CONTENTS

1 TEST CERTIFICATION.....	4
2 TEST RESULT SUMMARY.....	5
3 EUT DESCRIPTION.....	6
4 TEST METHODOLOGY	7
4.1. DESCRIPTION OF TEST MODES	7
5 SETUP OF EQUIPMENT UNDER TEST.....	8
5.1. DESCRIPTION OF SUPPORT UNITS.....	8
5.2. CONFIGURATION OF SYSTEM UNDER TEST	8
6 FACILITIES AND ACCREDITATIONS	9
6.1. FACILITIES	9
6.2. ACCREDITATIONS	9
6.3. MEASUREMENT UNCERTAINTY.....	9
7 FCC PART 15.247 REQUIREMENTS.....	10
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT.....	10
7.2. SPURIOUS EMISSIONS MEASUREMENT.....	14
7.3. 6dB BANDWIDTH MEASUREMENT	50
7.4. PEAK OUTPUT POWER	58
7.5. BAND EDGES MEASUREMENT.....	66
7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	84



1 TEST CERTIFICATION

Product	WIRELESS SPEAKER
Model	HARMAN KARDON ONYX
Brand	Harman/Kardon
Tested	May 3~30, 2013
Applicant	Harman International Industries, Inc 8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES
Manufacturer	Harman International Industries, Inc 8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	WIRELESS SPEAKER
Model Number	HARMAN KARDON ONYX
Brand	Harman/Kardon
Model Discrepancy	N/A
Serial Number	C130503Z01-RP1
Received Date	May 3, 2013
Power Supply	DC19V Supplied by the Adapter or DC11.1V Supplied by the Battery
Adapter Model No.	DT19V-3C-DC AC input: 100-240V, 50/60Hz, 1.5A Max. DC output: DC19V, 3.0A AC input cable: Unshielded, 1.0m DC output cable: Shielded, 1.5m
Frequency Range	IEEE 802.11b/g: 2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 15.32dBm IEEE 802.11g mode: 14.96dBm
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels
Antenna Specification	Extern Antenna with 3.0dBi gain (Max)
Channels Spacing	IEEE 802.11b/g : 5MHz

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: APIONYXTC filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Wireless Link Play + Charging	Mode 1
Radiated Emission	Mode 1: TX	Mode 1

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	NOTEBOOK	992F2VG	6297043	N/A	IBM	N/A	Unshielded 2.50m
2.	Wireless Route	TL-WR740N	12714462932	N/A	Tp-Link	N/A	Unshielded 2.50m

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at
**No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town,
Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-624)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
Band Edges		+/-0.182 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	09/20/2012	09/20/2013
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

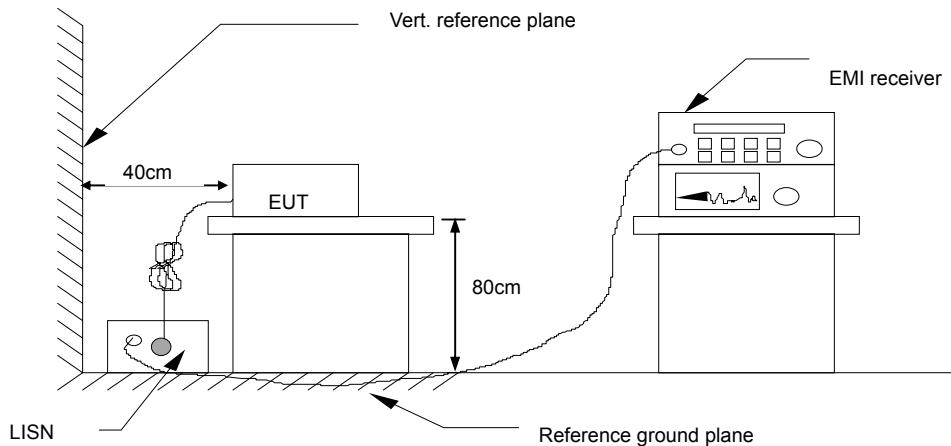

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Model No.	HARMAN KARDON ONYX				RBW,VBW	9 kHz			
Environmental Conditions	22°C, 45% RH				Test Mode	Mode 1			
Tested by	Paul Pan				Line	L1			

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1500	41.89	26.44	9.79	51.68	36.23	65.99	56.00	-14.31	-19.77	Pass	L1
0.3220	38.27	30.85	9.63	47.90	40.48	59.65	49.66	-11.75	-9.18	Pass	L1
0.7260	27.63	15.25	9.68	37.31	24.93	56.00	46.00	-18.69	-21.07	Pass	L1
1.1620	26.11	15.31	9.68	35.79	24.99	56.00	46.00	-20.21	-21.01	Pass	L1
7.8380	24.60	14.61	9.77	34.37	24.38	60.00	50.00	-25.63	-25.62	Pass	L1
15.7940	15.30	2.42	9.92	25.22	12.34	60.00	50.00	-34.78	-37.66	Pass	L1
0.1539	39.04	19.01	9.51	48.55	28.52	65.78	55.79	-17.23	-27.27	Pass	L2
0.3220	37.91	29.29	9.65	47.56	38.94	59.65	49.66	-12.09	-10.72	Pass	L2
0.8020	26.37	14.41	9.68	36.05	24.09	56.00	46.00	-19.95	-21.91	Pass	L2
1.0220	25.60	14.37	9.67	35.27	24.04	56.00	46.00	-20.73	-21.96	Pass	L2
1.4220	24.81	14.21	9.67	34.48	23.88	56.00	46.00	-21.52	-22.12	Pass	L2
7.8180	25.26	15.65	9.78	35.04	25.43	60.00	50.00	-24.96	-24.57	Pass	L2

REMARKS: L1 = Line One (Live Line)

L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.




7.2.4. TEST RESULTS

Test Plot


Antenna 11

IEEE 802.11b mode

CH Low (30MHz ~2.9GHz)

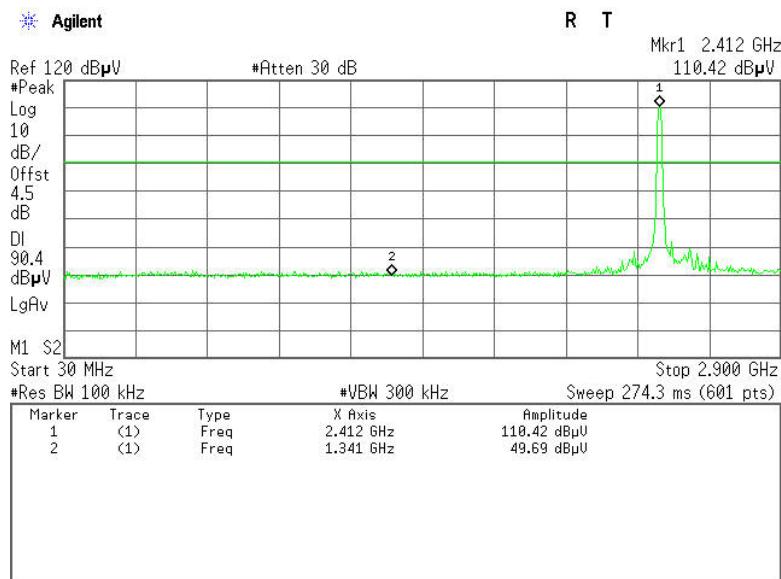


CH Low (2.31GHz ~2.43GHz)

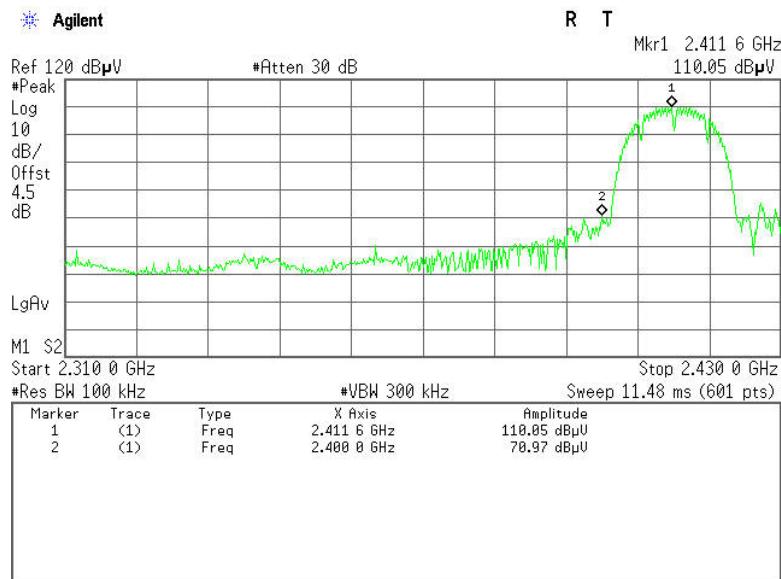




CH Low (2.9GHz ~26.5GHz)

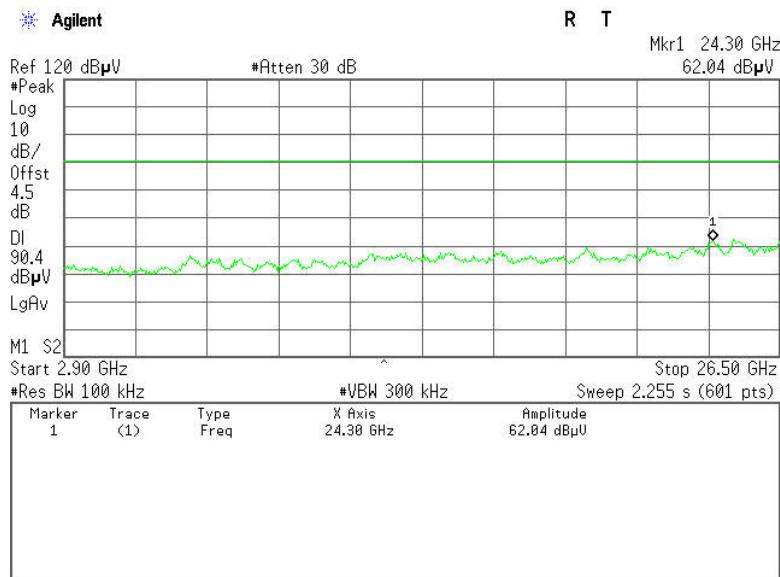


CH Mid (30MHz ~2.9GHz)

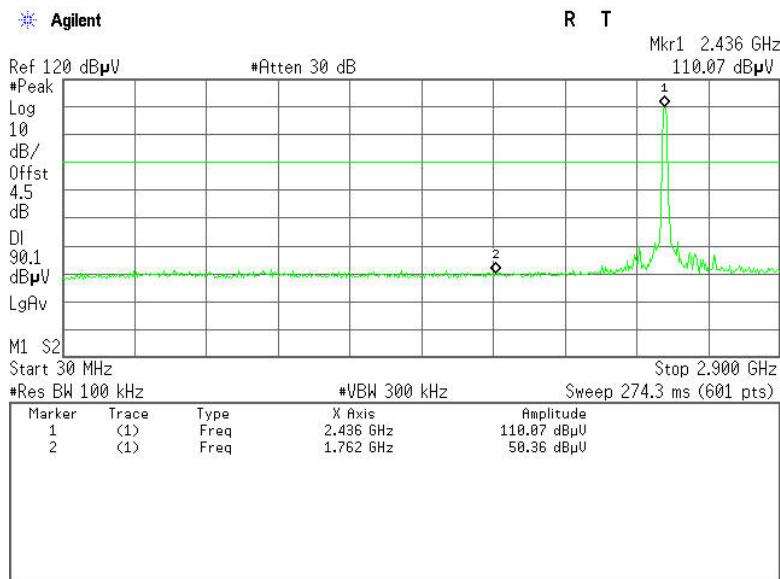




CH Mid (2.9GHz ~26.5GHz)

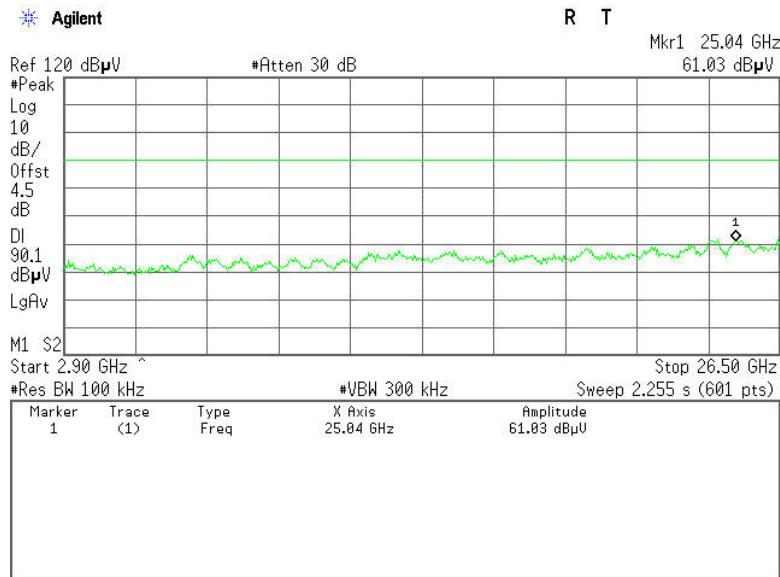


CH High (30MHz ~2.9GHz)

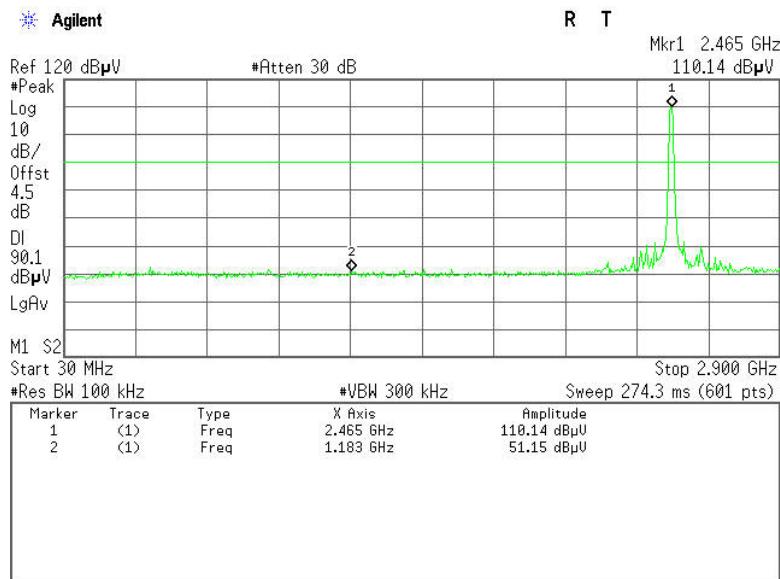




CH High (2.45GHz ~2.5GHz)

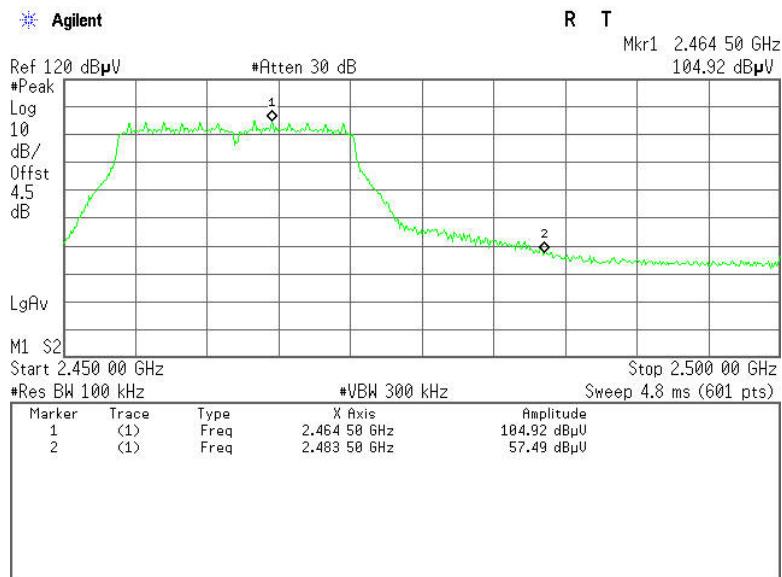


CH High(2.9GHz ~26.5GHz)

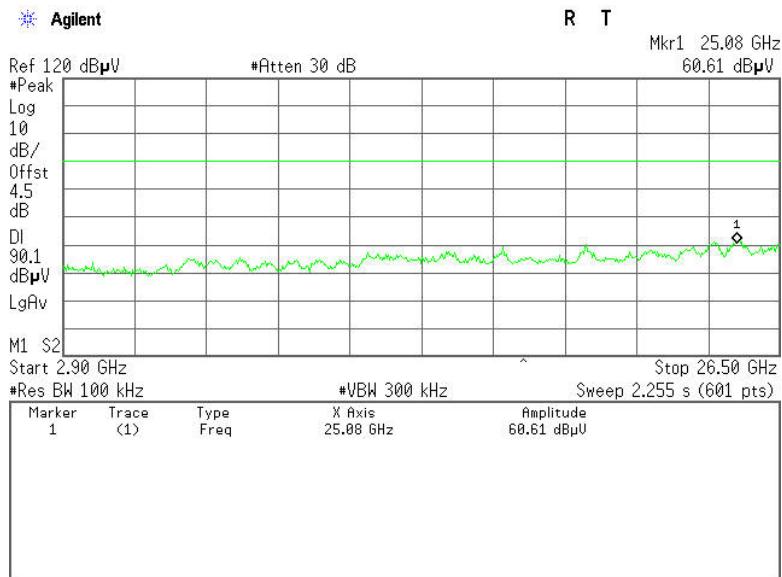




Antenna 10 IEEE 802.11b mode

CH Low (30MHz ~2.9GHz)

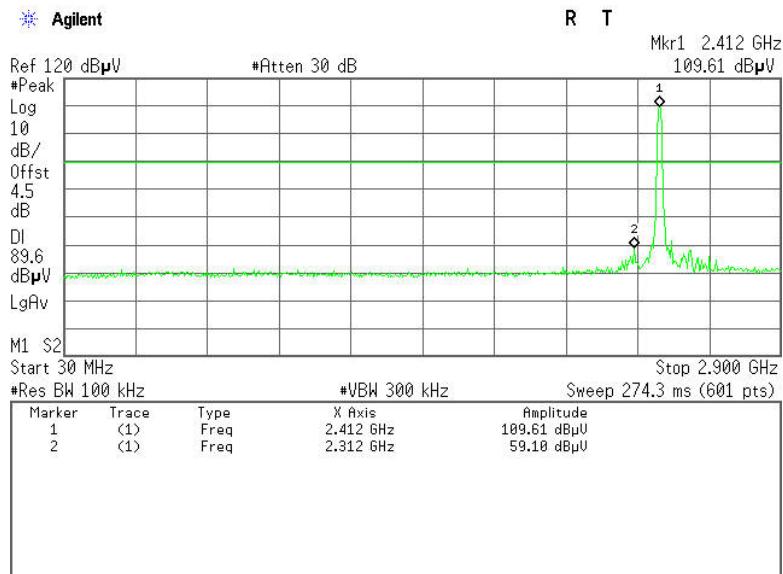


CH Low (2.31GHz ~2.43GHz)

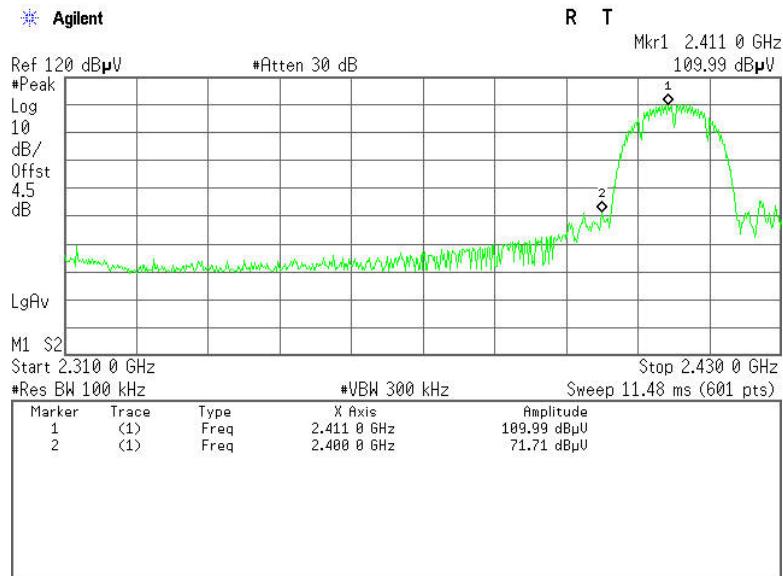




CH Low (2.9GHz ~26.5GHz)

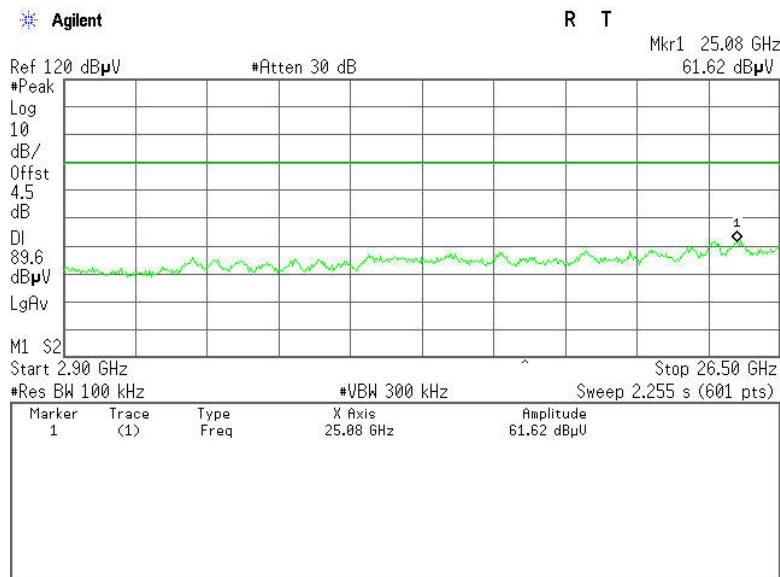


CH Mid (30MHz ~2.9GHz)

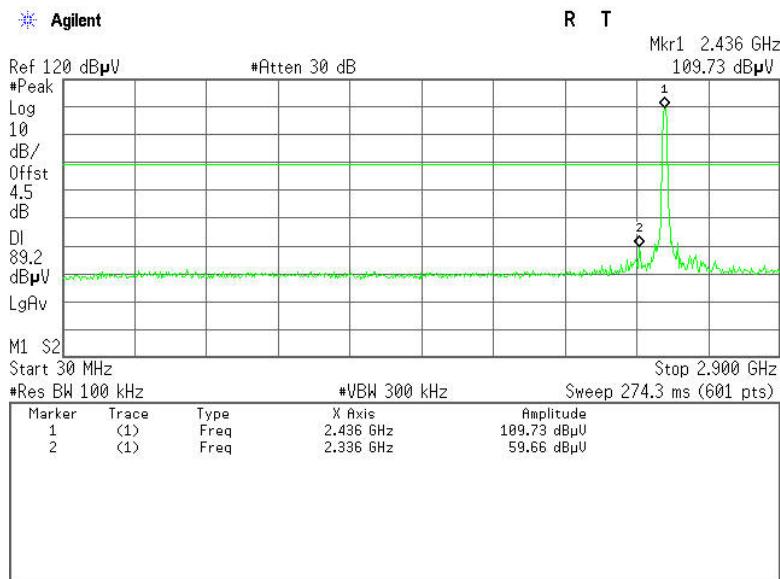




CH Mid (2.9GHz ~26.5GHz)

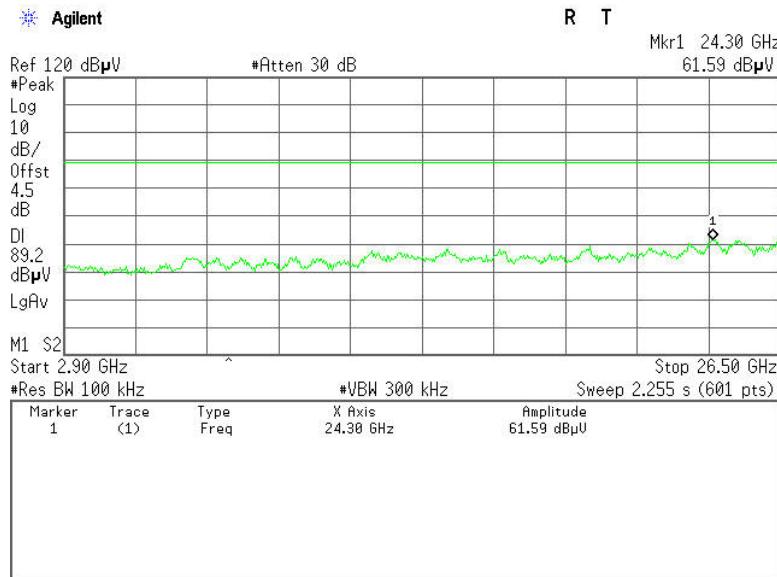


CH High (30MHz ~2.9GHz)

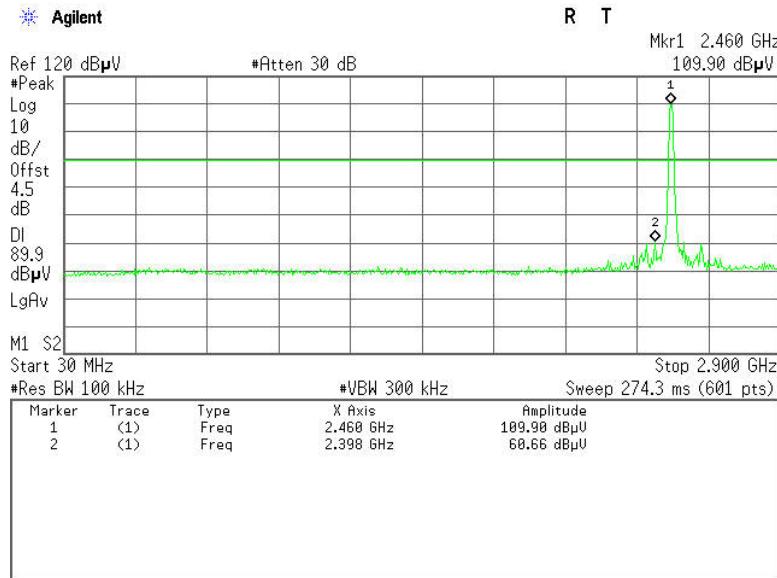




CH High (2.45GHz ~2.5GHz)

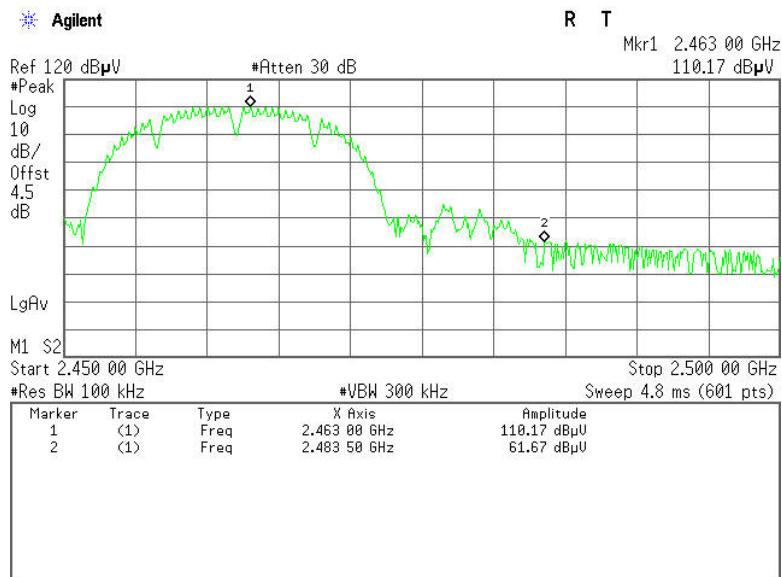


CH High(2.9GHz ~26.5GHz)

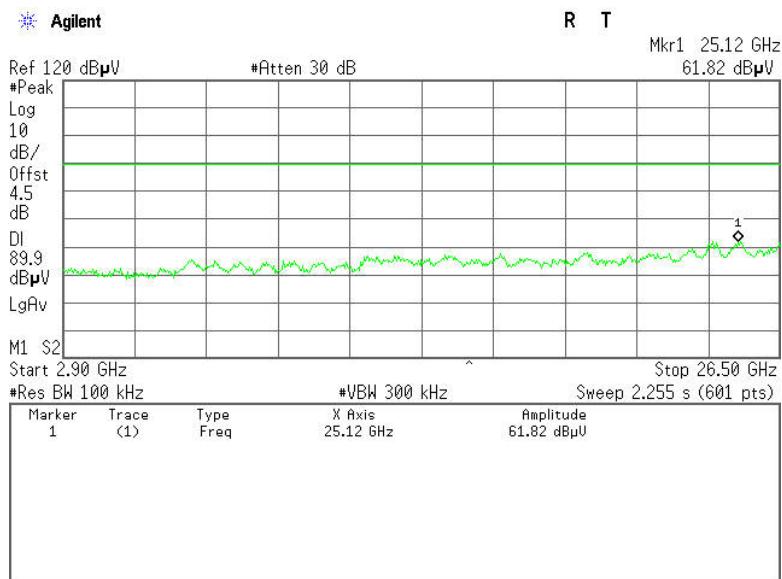




Antenna 11
IEEE 802.11g mode
CH Low (30MHz ~2.9GHz)

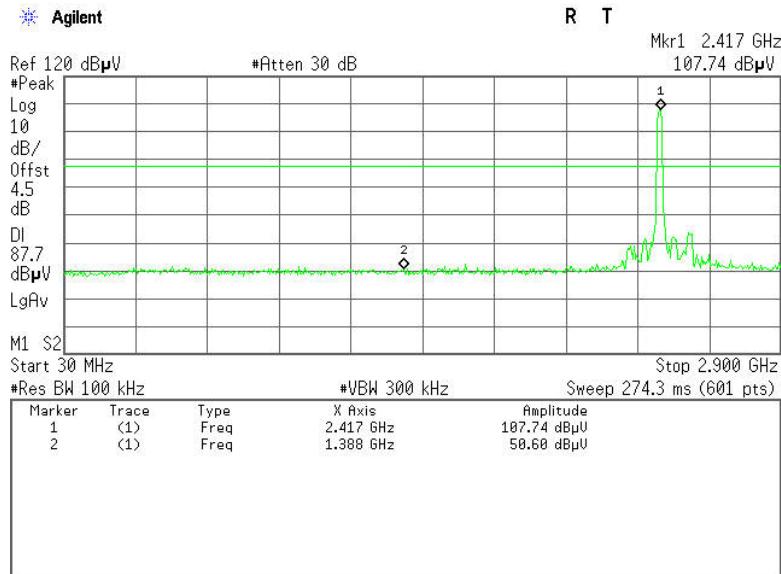


CH Low (2.31GHz ~2.43GHz)

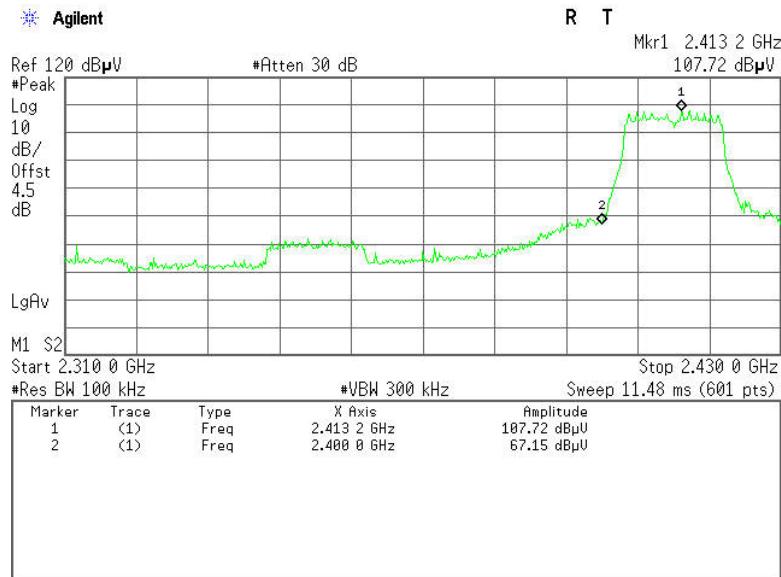




CH Low (2.9GHz ~26.5GHz)

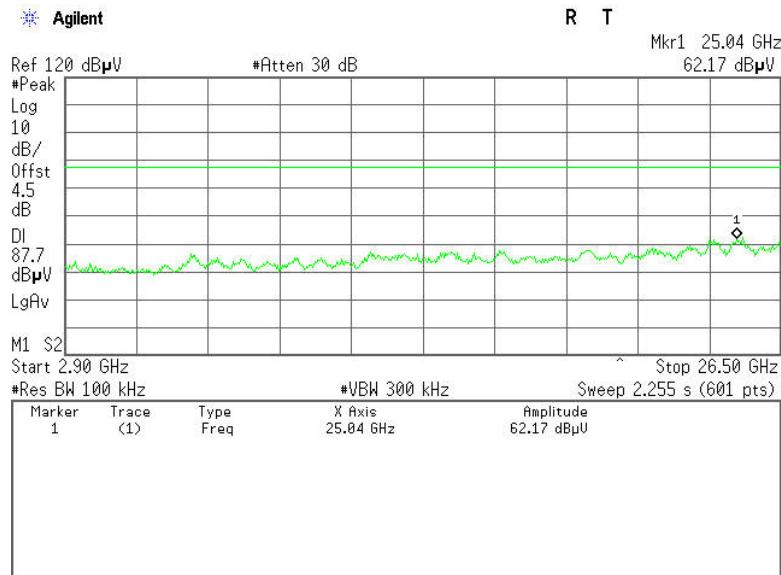


CH Mid (30MHz ~2.9GHz)

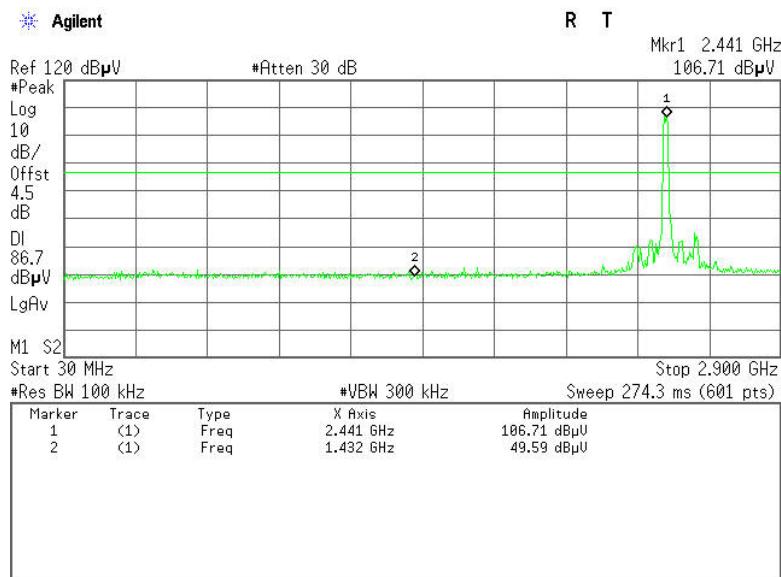




CH Mid (2.9GHz ~26.5GHz)

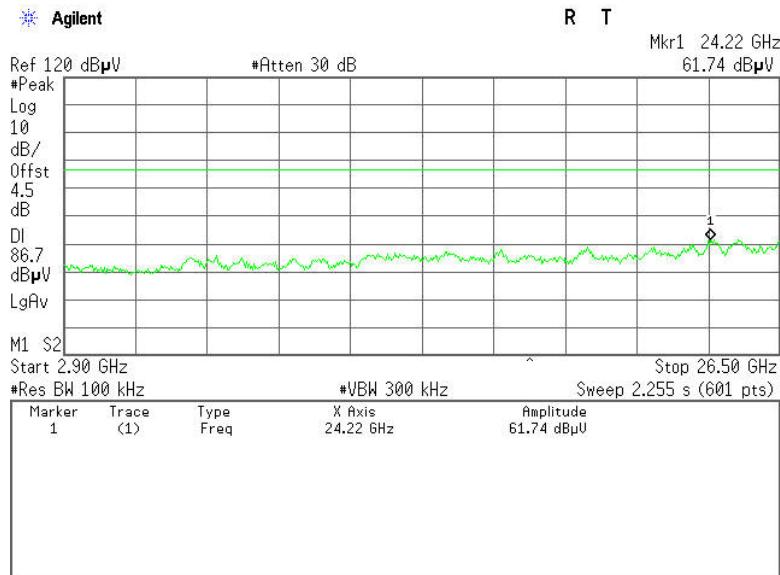


CH High (30MHz ~2.9GHz)

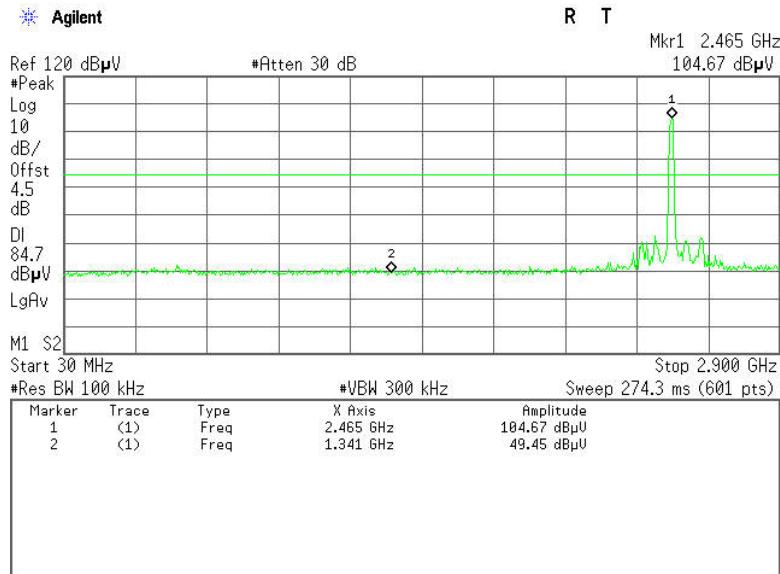




CH High (2.45GHz ~2.5GHz)

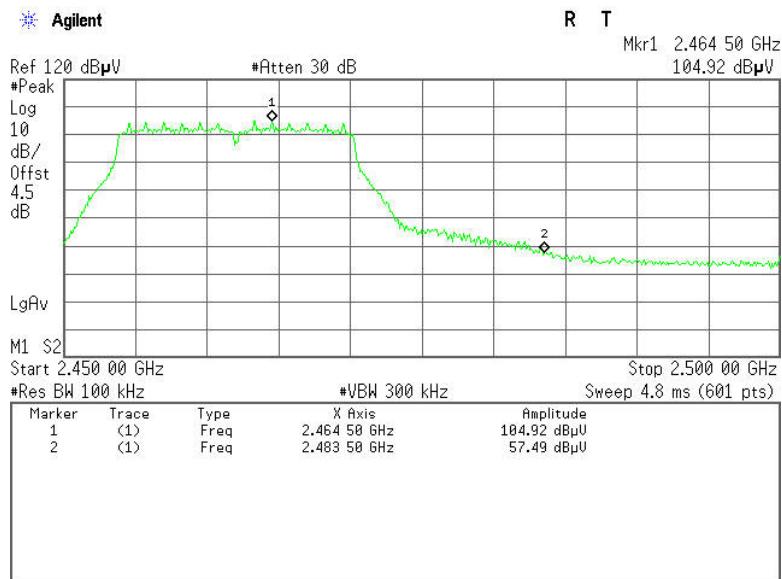


CH High(2.9GHz ~26.5GHz)

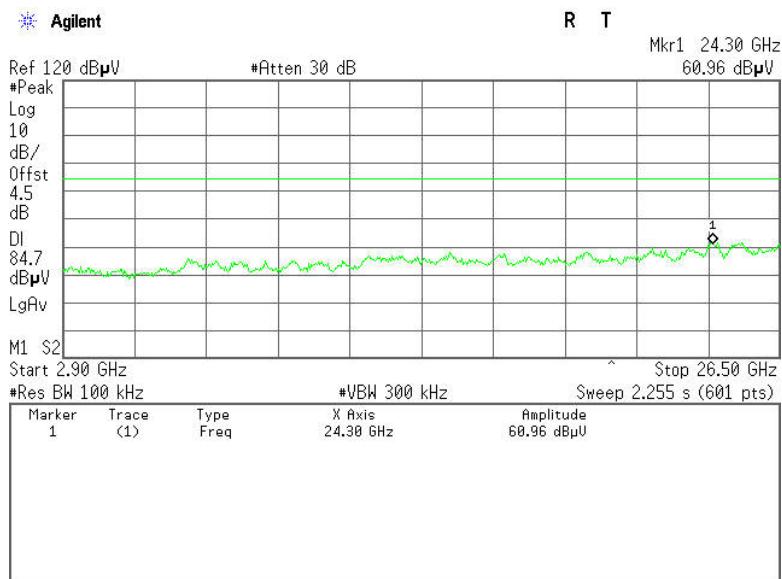




Antenna 10
IEEE 802.11g mode
CH Low (30MHz ~2.9GHz)

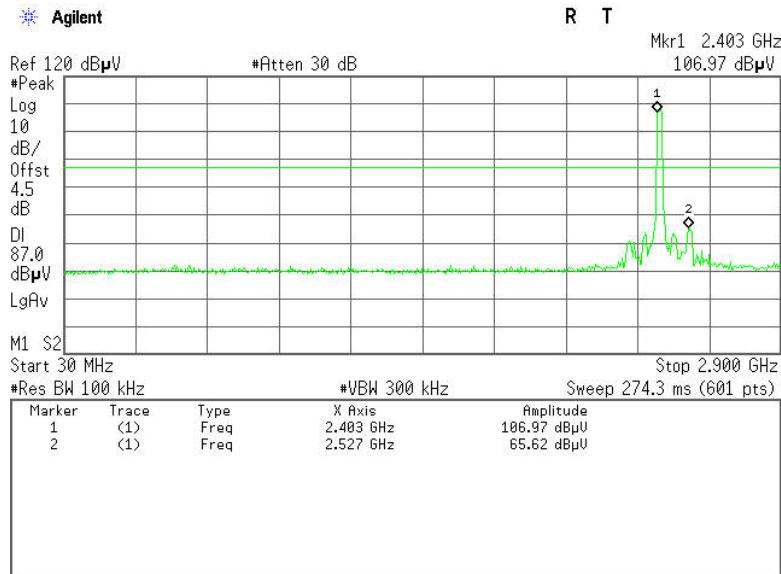


CH Low (2.31GHz ~2.43GHz)

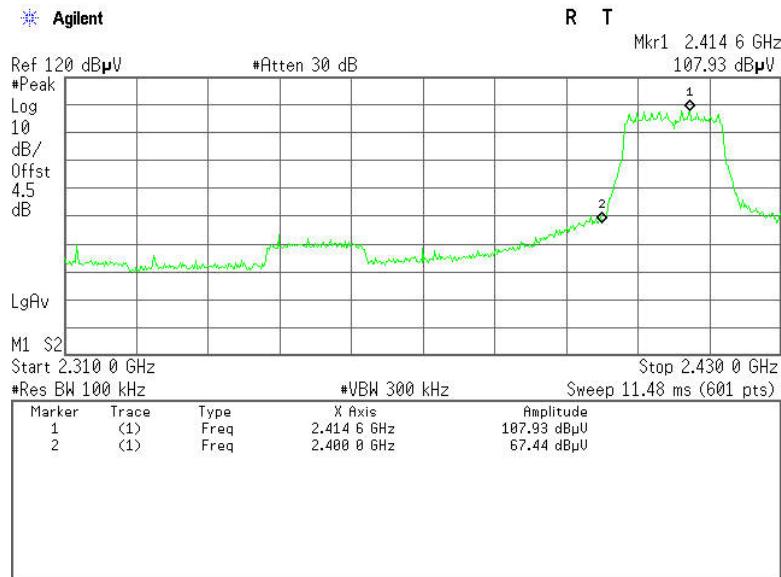




CH Low (2.9GHz ~26.5GHz)

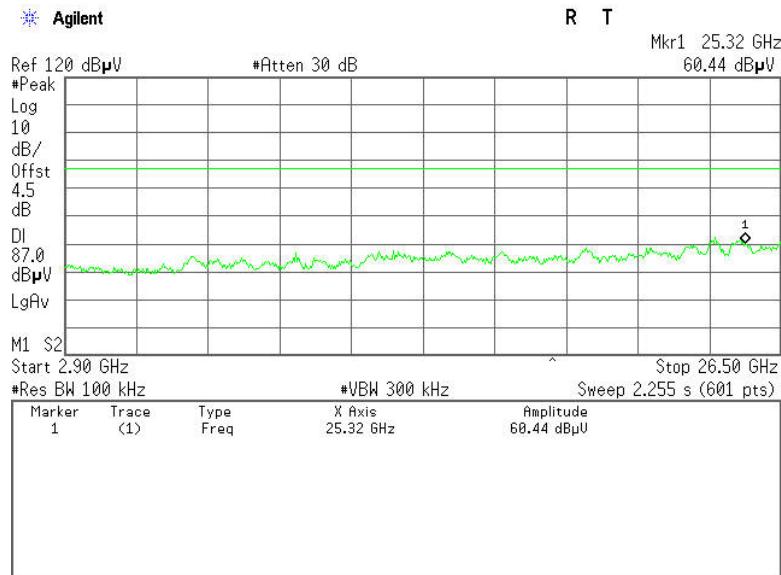


CH Mid (30MHz ~2.9GHz)

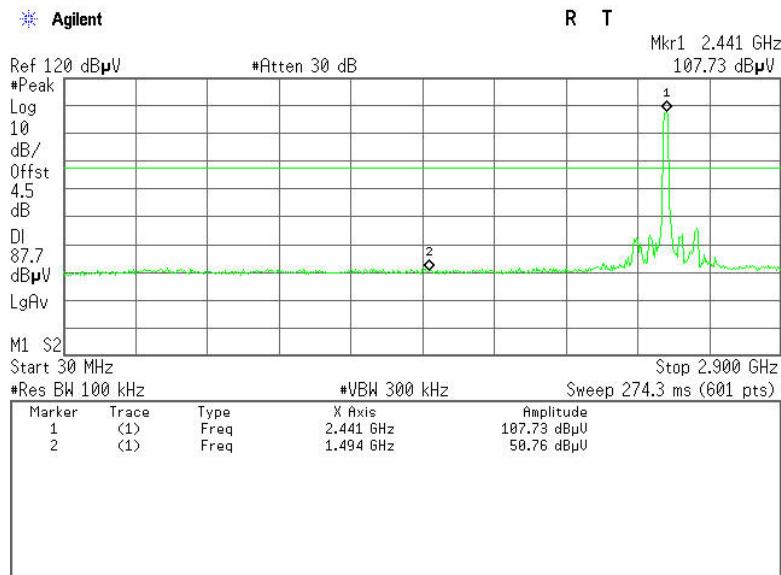




CH Mid (2.9GHz ~26.5GHz)

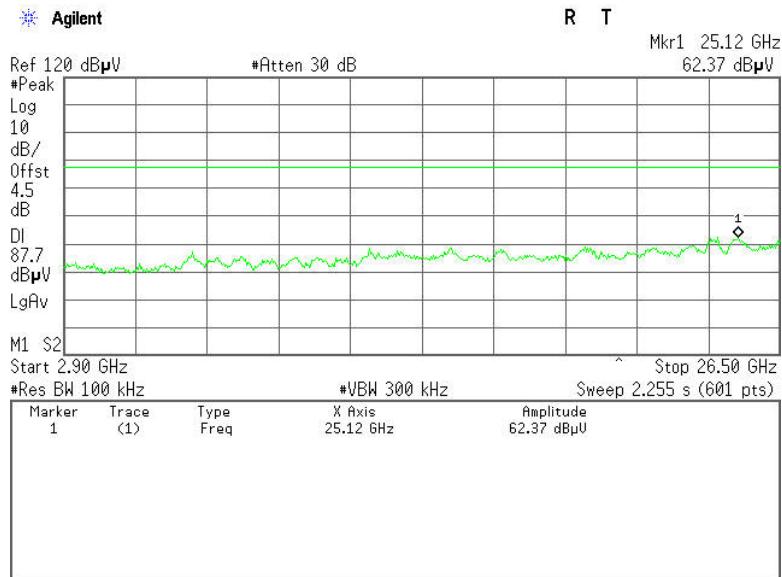


CH High (30MHz ~2.9GHz)

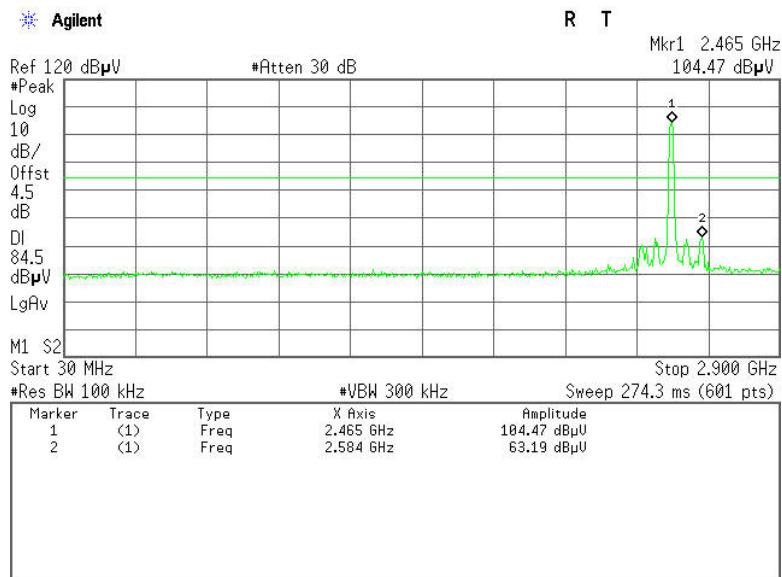




CH High (2.45GHz ~2.5GHz)

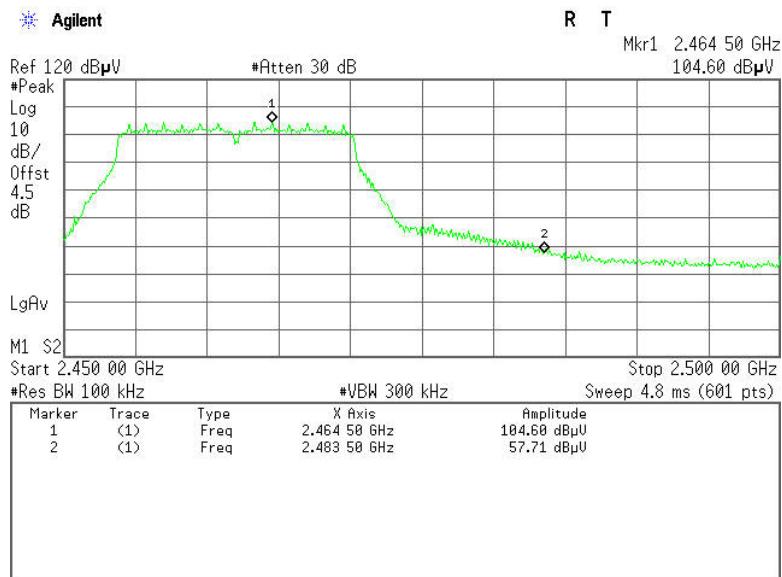

CH High(2.9GHz ~26.5GHz)

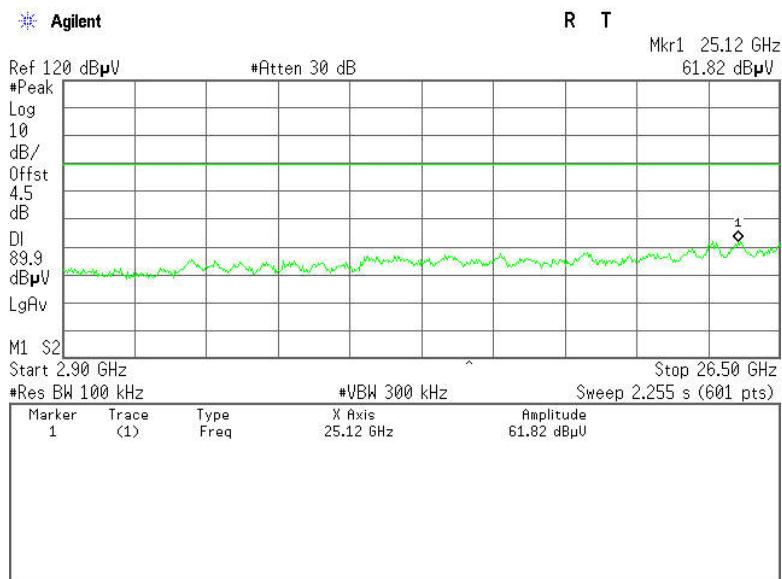



7.2.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB μ V/m) = 20 log Emission level (μ V/m).



7.2.4.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.



7.2.4.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz,VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.


7.2.4.4. TEST SETUP

Below 30MHz

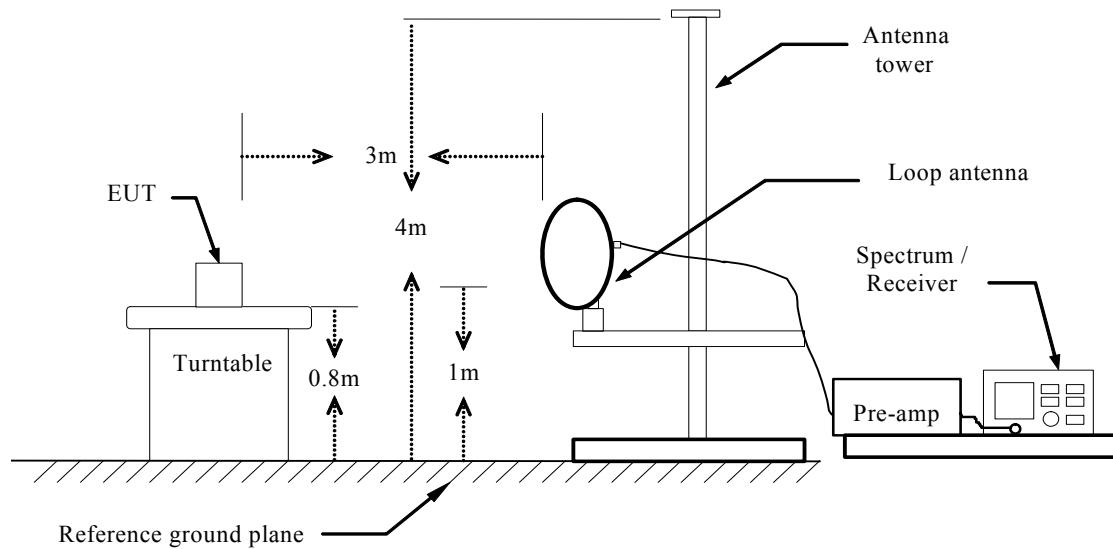

Below 1 GHz

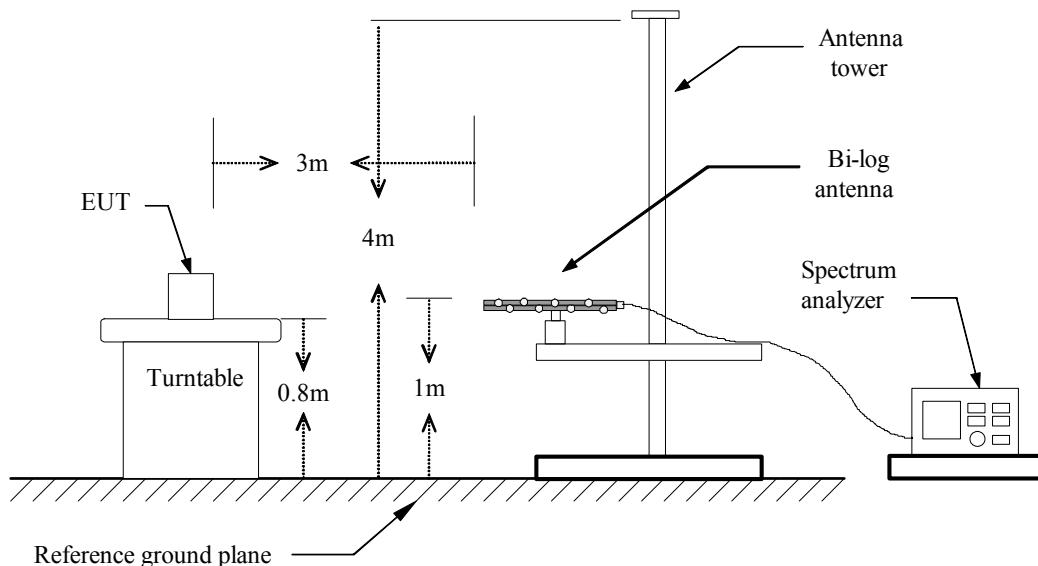

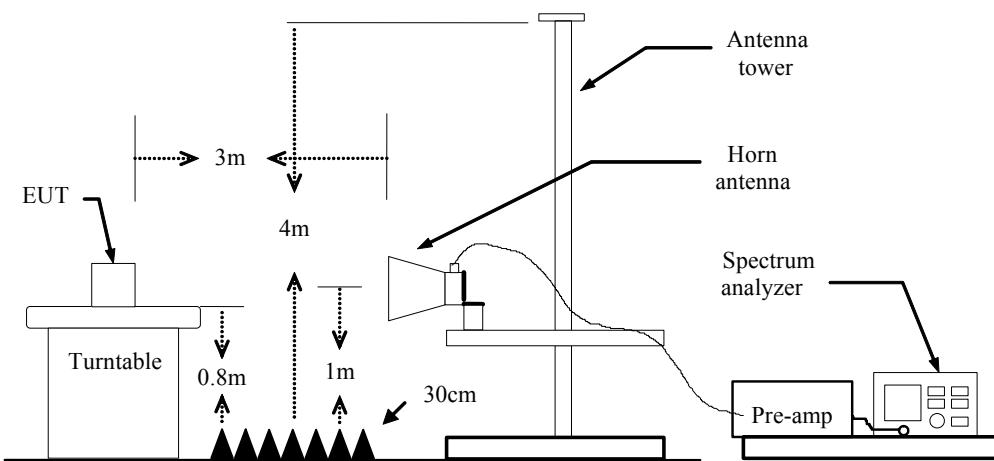Above 1 GHz

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.2.4.5. DATA SAMPLE****Below 1GHz**

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor



7.2.4.6. TEST RESULTS

Below 1 GHz

Test Mode: TX

Test Date: May 30, 2013

Temperature: 24°C

Tested by: Mark Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
228.8500	55.35	-18.23	37.12	46.00	-8.88	V	QP
367.8833	48.18	-16.69	31.49	46.00	-14.51	V	QP
451.9500	50.77	-15.30	35.47	46.00	-10.53	V	QP
720.3167	42.18	-10.81	31.37	46.00	-14.63	V	QP
880.3667	44.86	-9.97	34.89	46.00	-11.11	V	QP
959.5833	43.33	-8.22	35.11	46.00	-10.89	V	QP
143.1666	52.34	-19.07	33.27	43.50	-10.23	H	QP
217.5332	57.37	-17.95	39.42	46.00	-6.58	H	QP
319.3833	54.33	-17.59	36.74	46.00	-9.26	H	QP
472.9667	44.54	-14.65	29.89	46.00	-16.11	H	QP
720.3166	42.86	-10.81	32.05	46.00	-13.95	H	QP
880.3667	42.27	-9.97	32.30	46.00	-13.70	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz).
Reading (dB μ V/m)
Correction Factor (dB)
Limit (dB μ V/m)
Margin (dB)
Antenna Pol e(H/V) = Emission frequency in MHz
= Receiver reading
= Antenna factor + Cable loss – Amplifier gain
= Limit stated in standard
= Measured (dB μ V/m) – Limits (dB μ V/m)
= Current carrying line of reading

**Antenna 11****Above 1 GHz****Operation Mode:** TX / IEEE 802.11b/ CH Low**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1620.7000	59.73	-8.76	50.97	74.00	-23.03	V	peak
1996.1167	55.91	-11.26	44.65	74.00	-29.35	V	peak
3332.6000	47.01	-4.03	42.98	74.00	-31.02	V	peak
3903.2333	45.81	-2.51	43.30	74.00	-30.70	V	peak
4984.4333	45.14	1.25	46.39	74.00	-27.61	V	peak
5630.1500	45.21	2.06	47.27	74.00	-26.73	V	peak
1635.7167	60.45	-8.82	51.63	74.00	-22.37	H	Peak
3272.5333	46.90	-4.06	42.84	74.00	-31.16	H	Peak
4338.7167	44.97	-1.05	43.92	74.00	-30.08	H	Peak
5014.4667	45.09	1.34	46.43	74.00	-27.57	H	Peak
5975.5333	43.66	3.05	46.71	74.00	-27.29	H	Peak
6441.0500	44.97	4.37	49.34	74.00	-24.66	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

**Operation Mode:** TX / IEEE 802.11b/ CH Mid**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1620.7000	58.39	-8.76	49.63	74.00	-24.37	V	Peak
1996.1167	56.40	-11.26	45.14	74.00	-28.86	V	Peak
2822.0333	49.70	-4.95	44.75	74.00	-29.25	V	Peak
3332.6000	48.96	-4.03	44.93	74.00	-29.07	V	Peak
4669.0833	44.84	-0.16	44.68	74.00	-29.32	V	Peak
5089.5500	45.23	1.42	46.65	74.00	-27.35		
1620.7000	58.99	-8.76	50.23	74.00	-23.77	H	Peak
3572.8667	46.75	-3.14	43.61	74.00	-30.39	H	Peak
4443.8333	45.65	-0.74	44.91	74.00	-29.09	H	Peak
5194.6667	44.49	1.54	46.03	74.00	-27.97	H	Peak
5720.2500	44.99	2.44	47.43	74.00	-26.57	H	Peak
6170.7500	44.59	3.60	48.19	74.00	-25.81	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b/ CH High**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1605.6833	58.98	-8.70	50.28	74.00	-23.72	V	Peak
1996.1167	57.50	-11.26	46.24	74.00	-27.76	V	Peak
3527.8167	46.56	-3.37	43.19	74.00	-30.81	V	Peak
4413.8000	44.53	-0.80	43.73	74.00	-30.27	V	Peak
5314.8000	44.43	1.53	45.96	74.00	-28.04	V	Peak
6365.9667	44.87	4.16	49.03	74.00	-24.97	V	Peak
1635.7167	60.02	-8.82	51.20	74.00	-22.80	H	Peak
3197.4500	46.77	-4.09	42.68	74.00	-31.32	H	Peak
3572.8667	46.95	-3.14	43.81	74.00	-30.19	H	Peak
4263.6333	45.60	-1.34	44.26	74.00	-29.74	H	Peak
4954.4000	44.92	1.11	46.03	74.00	-27.97	H	Peak
5750.2833	44.23	2.57	46.80	74.00	-27.20	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: May 30, 2013

Temperature: 24°C Humidity: 52% RH Polarity: Ver. / Hor. Tested by: Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1620.7000	57.13	-8.76	48.37	74.00	-25.63	V	Peak
3332.6000	48.80	-4.03	44.77	74.00	-29.23	V	Peak
3903.2333	46.45	-2.51	43.94	74.00	-30.06	V	Peak
4714.1333	44.95	0.04	44.99	74.00	-29.01	V	Peak
5119.5833	45.66	1.46	47.12	74.00	-26.88	V	Peak
5885.4333	44.22	2.91	47.13	74.00	-26.87	V	Peak
1605.6832	59.70	-8.70	51.00	74.00	-23.00	H	Peak
3332.6000	47.28	-4.03	43.25	74.00	-30.75	H	Peak
4143.5000	45.66	-1.85	43.81	74.00	-30.19	H	Peak
4924.3666	44.98	0.98	45.96	74.00	-28.04	H	Peak
5374.8666	45.28	1.52	46.80	74.00	-27.20	H	Peak
6140.7167	44.76	3.51	48.27	74.00	-25.73	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: May 30, 2013

Temperature: 24°C Humidity: 52% RH Polarity: Ver. / Hor. Tested by: Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1725.8167	54.20	-9.16	45.04	74.00	-28.96	V	Peak
1996.1167	55.71	-11.26	44.45	74.00	-29.55	V	Peak
3317.5833	49.56	-4.04	45.52	74.00	-28.48	V	Peak
4248.6166	45.49	-1.40	44.09	74.00	-29.91	V	Peak
4729.1500	45.98	0.10	46.08	74.00	-27.92	V	Peak
5585.1000	44.76	1.90	46.66	74.00	-27.34	V	Peak
1605.6833	55.44	-8.70	46.74	74.00	-27.26	H	Peak
3212.4666	47.61	-4.08	43.53	74.00	-30.47	H	Peak
3948.2833	46.09	-2.52	43.57	74.00	-30.43	H	Peak
4984.4333	44.94	1.25	46.19	74.00	-27.81	H	Peak
5675.2000	44.69	2.25	46.94	74.00	-27.06	H	Peak
6140.7167	44.67	3.51	48.18	74.00	-25.82	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: May 30, 2013

Temperature: 24°C Humidity: 52% RH Polarity: Ver. / Hor. Tested by: Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1710.8000	60.45	-9.10	51.35	74.00	-22.65	V	Peak
1996.1167	56.51	-11.26	45.25	74.00	-28.75	V	Peak
3317.5833	49.09	-4.04	45.05	74.00	-28.95	V	Peak
4338.7167	44.93	-1.05	43.88	74.00	-30.12	V	Peak
5269.7500	44.81	1.54	46.35	74.00	-27.65	V	Peak
5885.4333	44.58	2.91	47.49	74.00	-26.51	V	Peak
1620.7000	59.79	-8.76	51.03	74.00	-22.97	H	Peak
3798.1167	46.11	-2.49	43.62	74.00	-30.38	H	Peak
4669.0833	44.52	-0.16	44.36	74.00	-29.64	H	Peak
5104.5667	44.99	1.44	46.43	74.00	-27.57	H	Peak
6005.5667	43.88	3.11	46.99	74.00	-27.01	H	Peak
6531.1500	44.25	4.63	48.88	74.00	-25.12	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Antenna 10:****Operation Mode:** TX / IEEE 802.11b/ CH Low**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1720.0000	59.29	-9.14	50.15	74.00	-23.85	V	Peak
3580.0000	47.22	-3.11	44.11	74.00	-29.89	V	Peak
4000.0000	46.75	-2.53	44.22	74.00	-29.78	V	Peak
4465.0000	45.61	-0.70	44.91	74.00	-29.09	V	Peak
5230.0000	45.73	1.55	47.28	74.00	-26.72	V	Peak
5875.0000	45.00	2.90	47.90	74.00	-26.10	V	Peak
1645.0000	57.46	-8.85	48.61	74.00	-25.39	H	Peak
3190.0000	47.23	-4.10	43.13	74.00	-30.87	H	Peak
3790.0000	46.61	-2.52	44.09	74.00	-29.91	H	Peak
4225.0000	45.71	-1.48	44.23	74.00	-29.77	H	Peak
4930.0000	45.46	1.00	46.46	74.00	-27.54	H	Peak
5650.0000	45.02	2.14	47.16	74.00	-26.84	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b/ CH Mid**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1615.0000	59.39	-8.74	50.65	74.00	-23.35	V	Peak
2005.0000	54.93	-11.22	43.71	74.00	-30.29	V	Peak
3325.0000	51.00	-4.03	46.97	74.00	-27.03	V	Peak
4405.0000	45.34	-0.81	44.53	74.00	-29.47	V	Peak
5065.0000	45.38	1.39	46.77	74.00	-27.23	V	Peak
5755.0000	44.88	2.59	47.47	74.00	-26.53	V	Peak
1630.0000	59.50	-8.79	50.71	74.00	-23.29	H	Peak
3655.0000	45.50	-2.87	42.63	74.00	-31.37	H	Peak
4285.0000	45.24	-1.26	43.98	74.00	-30.02	H	Peak
5065.0000	45.13	1.39	46.52	74.00	-27.48	H	Peak
5890.0000	44.67	2.92	47.59	74.00	-26.41	H	Peak
6280.0000	44.26	3.92	48.18	74.00	-25.82	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b/ CH High**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1996.1167	55.55	-11.26	44.29	74.00	-29.71	V	Peak
2807.0167	47.03	-5.01	42.02	74.00	-31.98	V	Peak
3572.8667	46.14	-3.14	43.00	74.00	-31.00	V	Peak
4173.5333	45.68	-1.71	43.97	74.00	-30.03	V	Peak
4789.2167	44.66	0.36	45.02	74.00	-28.98	V	Peak
5630.1500	45.67	2.06	47.73	74.00	-26.27	V	Peak
1365.4167	54.78	-7.99	46.79	74.00	-27.21	H	Peak
1635.7167	56.95	-8.82	48.13	74.00	-25.87	H	Peak
3122.3667	47.25	-4.15	43.10	74.00	-30.90	H	Peak
3888.2167	47.17	-2.51	44.66	74.00	-29.34	H	Peak
4714.1333	45.74	0.04	45.78	74.00	-28.22	H	Peak
5254.7333	45.12	1.54	46.66	74.00	-27.34	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1620.7000	58.74	-8.76	49.98	74.00	-24.02	V	Peak
3332.6000	46.98	-4.03	42.95	74.00	-31.05	V	Peak
3903.2333	45.83	-2.51	43.32	74.00	-30.68	V	Peak
4488.8833	44.91	-0.66	44.25	74.00	-29.75	V	Peak
4969.4167	44.87	1.18	46.05	74.00	-27.95	V	Peak
5750.2833	45.66	2.57	48.23	74.00	-25.77	V	Peak
<hr/>							
1635.7167	62.78	-8.82	53.96	74.00	-20.04	H	Peak
1635.7167	59.78	-8.82	50.96	54.00	-3.04	H	AVG
3302.5666	46.97	-4.04	42.93	74.00	-31.07	H	Peak
3903.2332	45.67	-2.51	43.16	74.00	-30.84	H	Peak
5014.4666	44.81	1.34	46.15	74.00	-27.85	H	Peak
5765.3000	44.72	2.63	47.35	74.00	-26.65	H	Peak
6245.8333	45.18	3.82	49.00	74.00	-25.00	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** May 30, 2013**Temperature:** 24°C **Humidity:** 52% RH **Polarity:** Ver. / Hor. **Tested by:** Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1650.7332	57.21	-8.87	48.34	74.00	-25.66	V	Peak
3317.5833	46.77	-4.04	42.73	74.00	-31.27	V	Peak
3993.3333	46.47	-2.53	43.94	74.00	-30.06	V	Peak
4338.7167	45.44	-1.05	44.39	74.00	-29.61	V	Peak
5269.7500	44.38	1.54	45.92	74.00	-28.08	V	Peak
6290.8833	44.69	3.95	48.64	74.00	-25.36	V	Peak
<hr/>							
1605.6833	56.82	-8.70	48.12	74.00	-25.88	H	Peak
3257.5167	46.94	-4.06	42.88	74.00	-31.12	H	Peak
3452.7333	46.93	-3.74	43.19	74.00	-30.81	H	Peak
3993.3333	46.28	-2.53	43.75	74.00	-30.25	H	Peak
4563.9667	45.57	-0.52	45.05	74.00	-28.95	H	Peak
4984.4333	45.12	1.25	46.37	74.00	-27.63	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: May 30, 2013

Temperature: 24°C Humidity: 52% RH Polarity: Ver. / Hor. Tested by: Mark Li

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1620.7000	56.83	-8.76	48.07	74.00	-25.93	V	Peak
3332.6000	47.20	-4.03	43.17	74.00	-30.83	V	Peak
4248.6166	46.19	-1.40	44.79	74.00	-29.21	V	Peak
5029.4833	45.09	1.35	46.44	74.00	-27.56	V	Peak
5464.9667	45.49	1.65	47.14	74.00	-26.86	V	Peak
6245.8333	44.47	3.82	48.29	74.00	-25.71	V	Peak
1500.5667	50.93	-8.26	42.67	74.00	-31.33	H	Peak
3723.0333	46.21	-2.69	43.52	74.00	-30.48	H	Peak
4443.8333	46.00	-0.74	45.26	74.00	-28.74	H	Peak
4939.3833	45.14	1.04	46.18	74.00	-27.82	H	Peak
5765.3000	44.77	2.63	47.40	74.00	-26.60	H	Peak
6501.1166	45.38	4.54	49.92	74.00	-24.08	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1-5 % of the emission bandwidth (EBW), VBW = $\geq 3 \times$ RBW, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

7.3.4. TEST SETUP

