

SPECIFICATION



深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd.

国光 PB-120WG 天线组件

GGEC PB-120 WG Antenna assembly

产品规格书

Product Specification

客户 connection	国光 GGEC	频段 frequency range	2400 ~ 2500MHz
项目名称 entry name	PB-120WG	版本 edition	V03
物料编号 Material No	1P-B120WG-058	颜色 Color	黑色 Black
客户料号 Customer Item Number	EAN00417		
R F 设计 R F Design	胡鹏 Peng.Hu	结构设计 Structural Design	周锐斌 Ruibin.Zhou
品质经理 Quality Manager	杨进 Jin.Yang	技术总监 Technical Director	张磊 Lei.Zhang
日期 Date	2024-6-7		

客户确认:

Customer confirmation:

装配是否符合贵司要求: OK NGWhether the assembly meets your company's requirements: OK NG

深圳市大显科技有限公司

Shenzhen DaXian Technology Co., Ltd.

深圳市龙岗区布吉镇吉华路 513 号上水径村(国防培训基地
对面) 达成工业园综合楼 7 楼

TEL:0755-28576002

FAX:0755-84276383

Buji Town, Longgang District, Shenzhen, China Jihua Road 513,
Shangshuijing Village (opposite the national defense
training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

上海分部: 上海市张江高科技园区集成电路产业区龙东大道
3000 号 8 号楼 201 室

TEL:021-61630552

FAX:755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry
Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

索引 Indexes

一、项目说明 Project Description.....	4
二、 BT 天线 antenna.....	4
1、 规格 specifications.....	4
1.1 电气规格标准 Electrical specifications and standards.....	5
1.1.1 电性能指标 Electrical performance index.....	5
1.1.2 天线位置布局 Antenna Location Layout.....	5
1.2 结构规格标准 Structural specifications and standards.....	6
1.2.1 天线组成 Antenna composition..	6
2、测试环境 testing environment.....	6
3、测试 test.	7
3.1 驻波(VSWR)的测试 Test of standing wave (VSWR).....	7
3.1.1 测试连接 Test connection.....	7
3.2 效率、功率 (TRP)、灵敏度 (TIS) 的测试 Testing of efficiency, power (TRP), sensitivity (TIS).....	7
3.2.1 测试的场地 Test site.....	7
3.2.2 测试的仪表 Tested Instruments.....	7
3.2.3 测试数据 test data.....	7-8
4、VSWR 参数图 Parameter diagram.....	8
5、无源场型图 Passive field pattern diagram.....	9
6、有源场型图 Active field pattern diagram.....	10-11
7、OTA 无源/有源测试场景 OTA passive/active testing scenarios.....	12
8、户外拉距测试 Outdoor Pull distance test.....	13
9、哈曼衰减实验室测试场景 Harman attenuation laboratory testing scenario.....	14
10、结论 conclusion.....	14
三、工程图 schedule drawing.....	15

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

一 项目说明 Project Description


客户名: Customer Name:	国光 GGEC
整机类型: Type of complete machine:	音箱 loudspeaker box
天线频段: Antenna band:	2400 ~ 2500MHz
天线形式: Antenna form:	FPC+同轴线+线材海绵 FPC+coaxial line+wire sponge
馈电形式: Feed form:	焊接 weld
馈脚数量: Number of feed legs:	两个 Two
硬件版本: Hardware version:	/

二 BT 天线组件 Antenna assembly

1 规格 specifications

本报告主要提供 PB-120 项目天线的各项电气和结构性能参数的测试状况。下图为大显设计的天线图片。

This report mainly provides the testing status of various electrical and structural performance parameters of the antenna for the PB-120 project. The following image shows an antenna with a large display design.



整机外观图

Whole machine appearance chart

天线外观图

antenna appearing diagram

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

1.2 结构规格标准 Structural specifications and standards

1.2.1 天线组成 Antenna composition

天线主要是由 FPC+同轴线+线材海绵 组成。

The antenna is mainly composed of FPC+coaxial line+wire sponge.

2. 测试设备 The Equipment of Active Test

Satimo 3D Chamber 6×4×4(m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



图 2

Figure 2

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

3 测试 test

3.1 驻波(VSWR)的测试 Test of standing wave (VSWR)

3.1.1 测试连接: VSWR 测试装置依次连接为: R&S ZVL 网络分析仪 → 测试线 → 测试治

Test connection: The VSWR test device is sequentially connected as follows: R&S ZVL network analyzer → test line → test fixture

实测(附图)Actual measurement (attached drawing)

3.2 增益及效率、功率 (TRP)、灵敏度 (TIS) 的测试

Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 测试的场地 Test site:

大显微波暗室。测试频率范围为 400MHz—6GHz, 静区范围为 50cm 圆周, 反射率小于-50 dB。

Large display microwave anechoic chamber. The test frequency range is 400MHz - 6GHz, the static zone range is 50cm circumferential, and the reflectivity is less than -50dB.

3.2.2 测试的仪表 Tested Instruments:

R&S ZVL 网络分析仪、Agilent8960 E5515C、标准喇叭天线、法国 SATIMO-SG24SYSTEM 系统、打印机等。

R&S ZVL network analyzer, Agilent 8960 E5515C, standard horn antenna, French SATIMO-SG24SYSTEM system, printer, etc.

3.2.3 测试数据 : 在微波暗室中, 测试的功率和灵敏度相关的数值如下表

Test data: In a microwave anechoic chamber, the values related to the power and sensitivity tested are shown in the table bel

OTA 有源测试 OTA active testing

BAND	CH	TRP	TIS
BT	0	9.53	-91.2
	39	9.7	-91.39
	78	9.65	-91.18


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

无源效率&增益 Passive efficiency&gain:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	50.84	-2.94	1.78
2410	50.36	-2.98	1.6
2420	50.46	-2.97	2
2430	50.25	-2.99	1.52
2440	51.3	-2.9	1.56
2450	51.65	-2.87	2.16
2460	52.93	-2.76	1.43
2470	52.69	-2.78	1.82
2480	52.52	-2.8	2.02
2490	51.48	-2.88	1.69
2500	51.89	-2.85	1.58

4、VSWR 参数图 VSWR parameter diagram

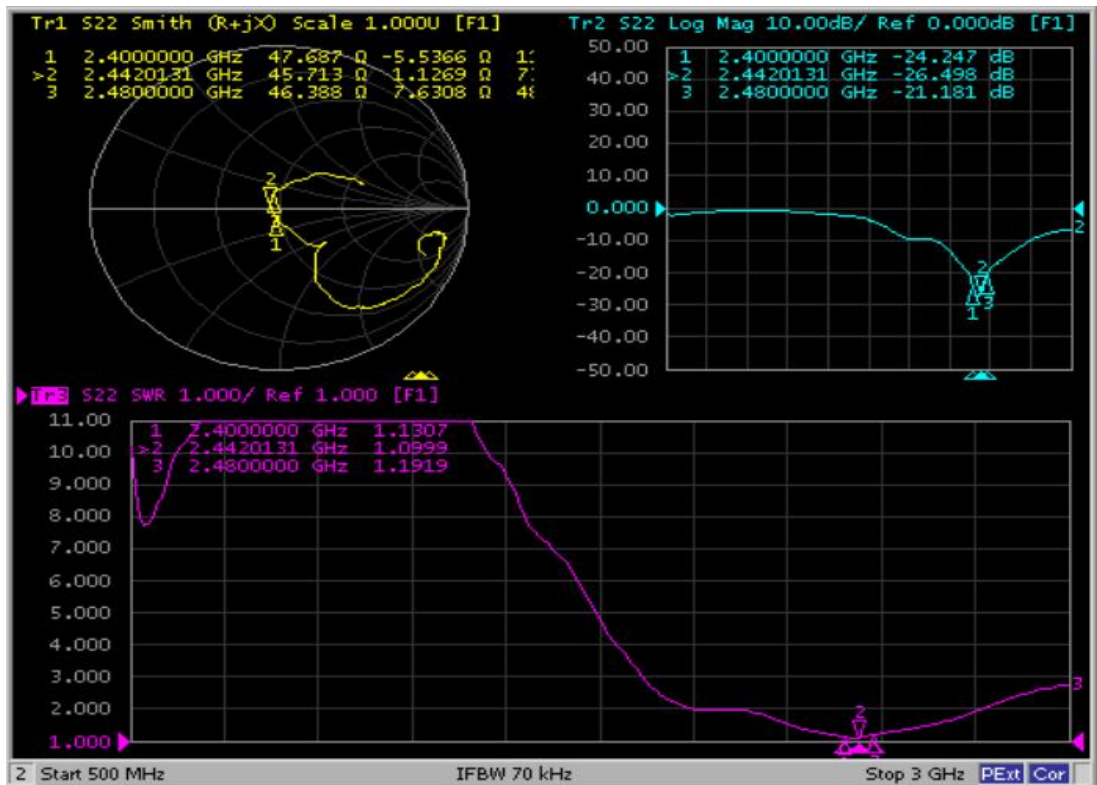

www.Topant.com.cn


Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd


5、无源效率场型图-2450MHz

Passive efficiency field pattern diagram - 2450MHz


2450.0MHz H+V, Eff:51.6%

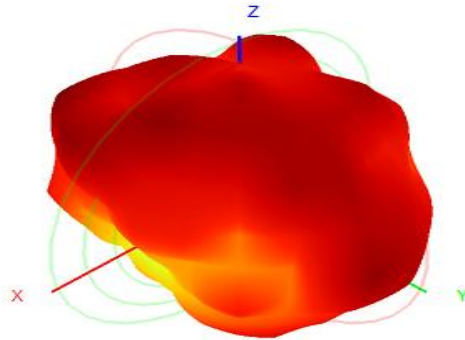


Back View

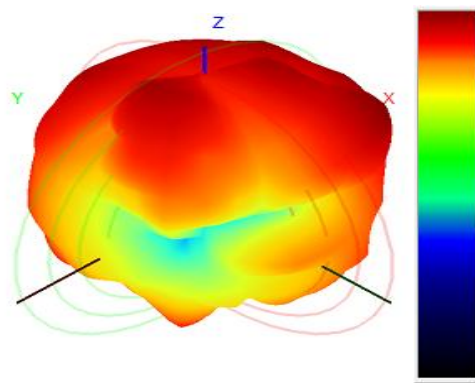


2450.0MHz Total(E1-XZ), Max= 2.16dBi

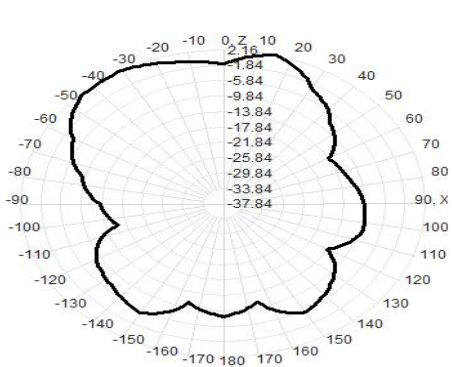

2450.0MHz Total(E2-YZ), Max= 1.52dBi

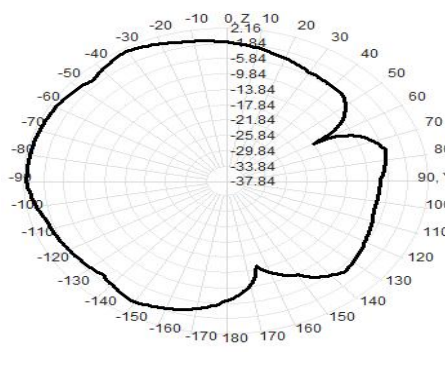

Total(H-XY), Max= 1.52dBi, CirD=23.26

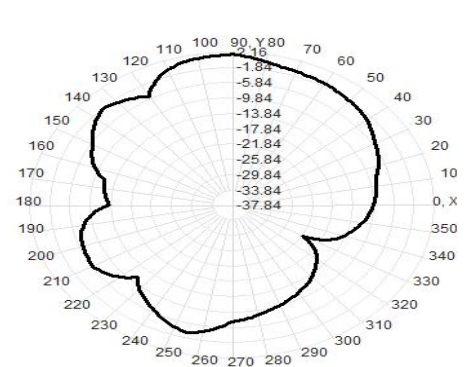


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd




6、有源场型图-2450MHz Active field pattern diagram-2450MHz TRP:

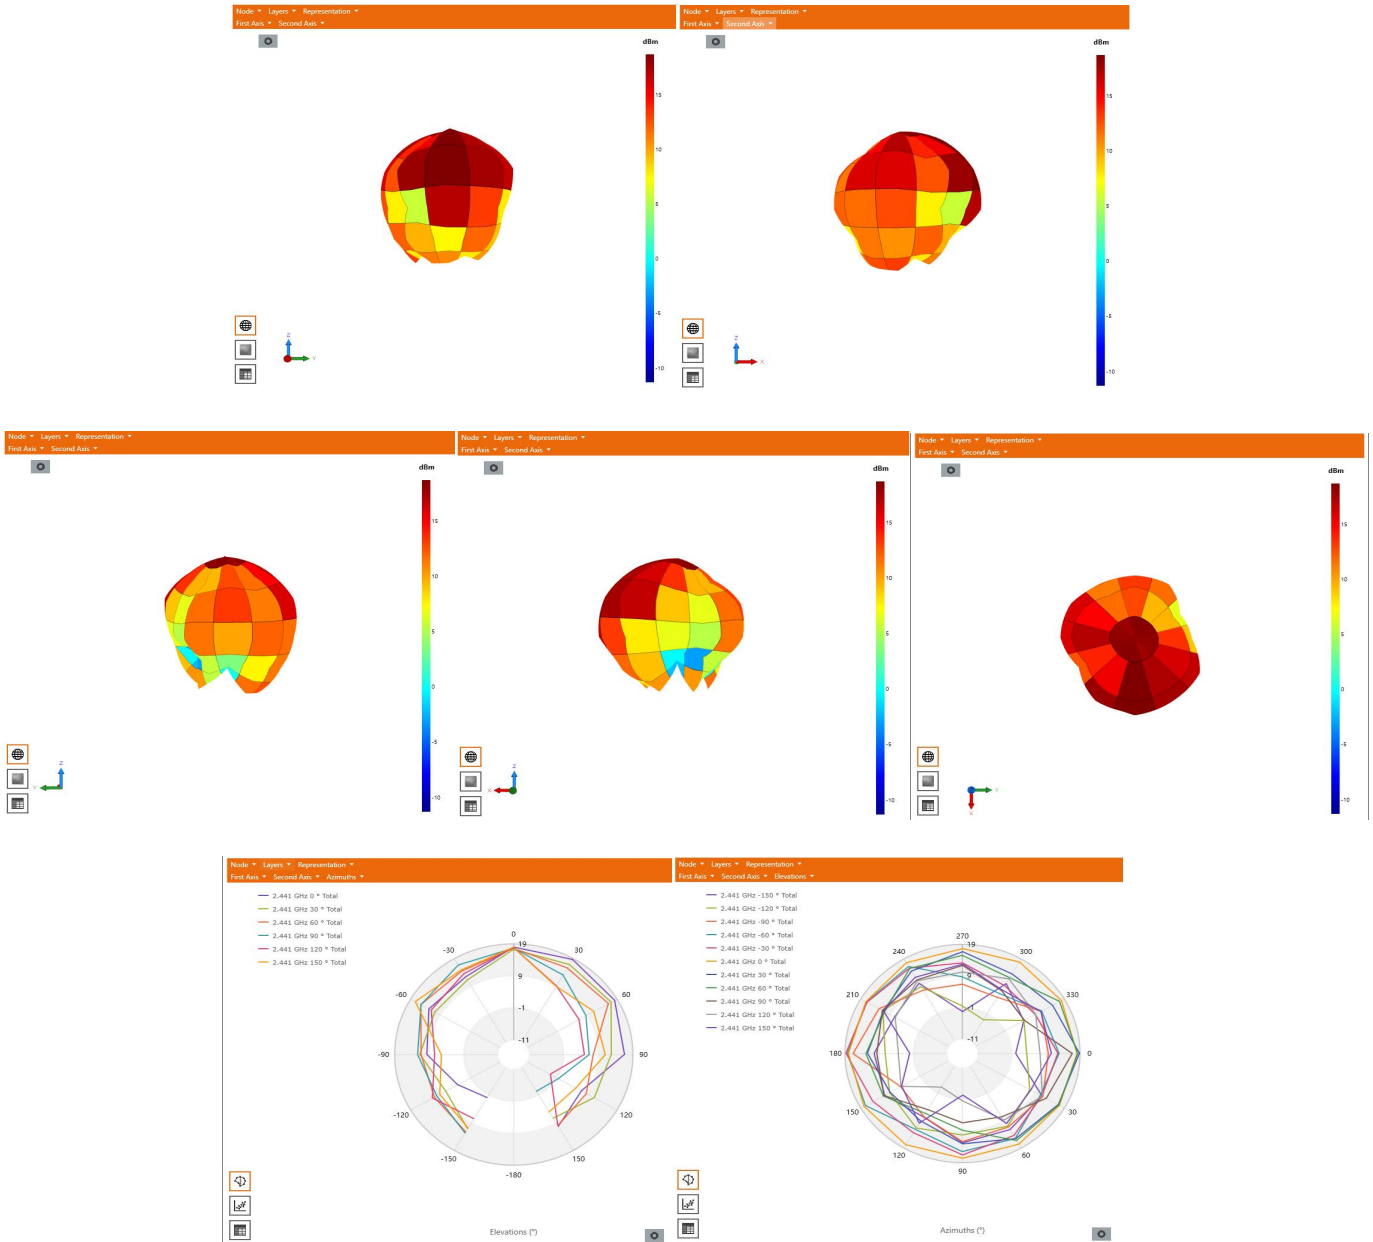

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

TIS:

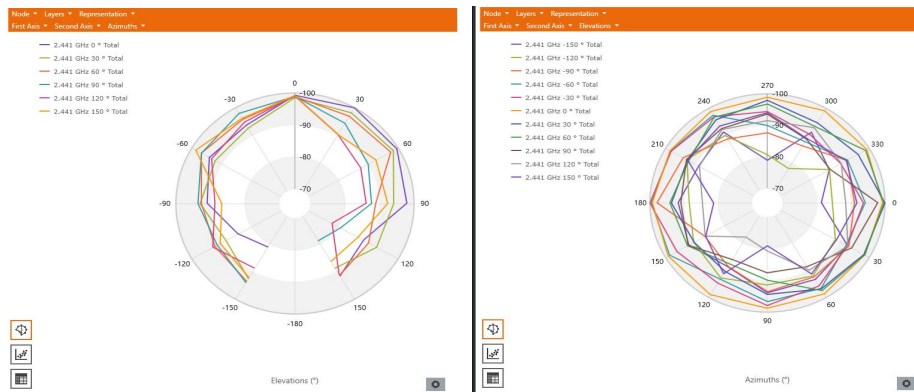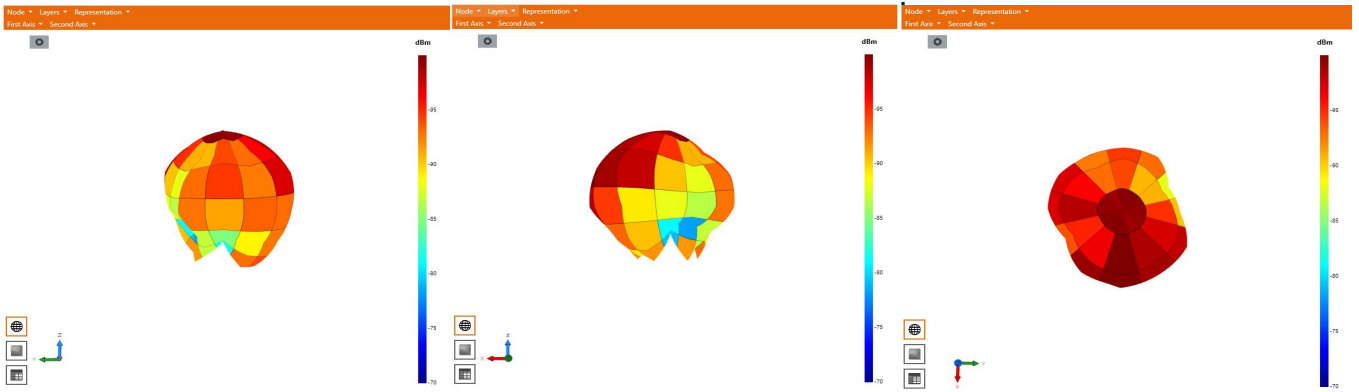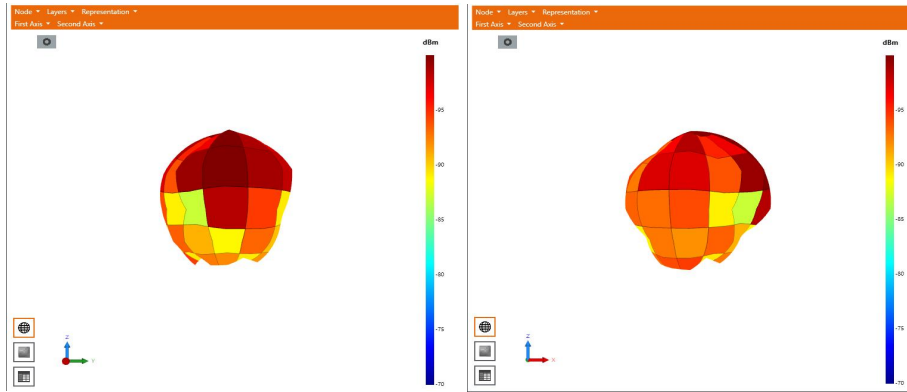

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

8、户外拉距测试 Outdoor pull distance test

单机测试-V1.7.0 软件			
白色 1#	米	黑色 1#	米
0°	100+	0°	100+
45°	100+	45°	100+
90°	100+	90°	100+
180°	100+	180°	100+
270°	100+	270°	100+
315°	100+	315°	100+

TWS 组队测试-V1.7.0 软件

白色 1#主机/白色 2#副机											
主机 0°	米	主机 45°	米	主机 90°	米	主机 180°	米	主机 270°	米	主机 315°	米
副机 0°	80+	副机 0°	80+	副机 0°	80+	副机 0°	80+	副机 0°	80+	副机 0°	80+
副机 45°	80+	副机 45°	80+	副机 45°	80+	副机 45°	80+	副机 45°	80+	副机 45°	80+
副机 90°	80+	副机 90°	80+	副机 90°	80+	副机 90°	80+	副机 90°	80+	副机 90°	80+
副机 180°	80+	副机 180°	80+	副机 180°	80+	副机 180°	80+	副机 180°	80+	副机 180°	80+
副机 270°	80+	副机 270°	80+	副机 270°	80+	副机 270°	80+	副机 270°	80+	副机 270°	80+
副机 315°	80+	副机 315°	80+	副机 315°	80+	副机 315°	80+	副机 315°	80+	副机 315°	80+

白色机器-Auracast 测试-V1.7.0 软件

白色 1#主机/白色 2#副机											
主机 0°	米	主机 45°	米	主机 90°	米	主机 180°	米	主机 270°	米	主机 315°	米
副机 0°	44	副机 0°	46	副机 0°	50	副机 0°	40	副机 0°	50	副机 0°	40
副机 45°	48	副机 45°	49	副机 45°	51	副机 45°	46	副机 45°	53	副机 45°	46
副机 90°	67	副机 90°	68	副机 90°	70	副机 90°	65	副机 90°	69	副机 90°	65
副机 180°	45	副机 180°	43	副机 180°	53	副机 180°	44	副机 180°	51	副机 180°	44
副机 270°	65	副机 270°	66	副机 270°	70	副机 270°	63	副机 270°	68	副机 270°	56
副机 315°	42	副机 315°	48	副机 315°	46	副机 315°	39	副机 315°	45	副机 315°	39

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd