

Variant FCC Test Report

(PART 22)

Report No.: RF171206E01B

FCC ID: NKRM18Q2

Test Model: M18Q2FG-1, M14Q2FG-1

Series Model: M18Q2F, M14Q2F, M18Q2, M14Q2, M18Q2G, M14Q2G, M18Q2FG, M14Q2FG (Refer to item 3.1 for the more details)

Received Date: Mar. 26, 2018

Test Date: Apr. 16, 2018 ~ Apr. 18, 2018

Issued Date: Apr. 30, 2018

Applicant: Wistron NeWeb Corporation

Address: 20 Park Ave. II, Hsinchu Science Park, Hsichu 308, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	12
3.2.1 Description of Support Units.....	12
3.3 Test Mode Applicability and Tested Channel Detail	13
3.4 EUT Operating Conditions	15
3.5 General Description of Applied Standards.....	15
4 Test Types and Results.....	16
4.1 Output Power Measurement.....	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures.....	16
4.1.3 Test Setup.....	17
4.1.4 Test Results	18
4.2 Frequency Stability Measurement	26
4.2.1 Limits of Frequency Stability Measurement.....	26
4.2.2 Test Procedure	26
4.2.3 Test Setup.....	26
4.2.4 Test Results	27
4.3 Occupied Bandwidth Measurement.....	37
4.3.1 Test Procedure	37
4.3.2 Test Setup.....	37
4.3.3 Test Result	37
4.4 Band Edge Measurement	43
4.4.1 Limits of Band Edge Measurement	43
4.4.2 Test Setup.....	43
4.4.3 Test Procedures.....	43
4.4.4 Test Results	44
4.5 Peak to Average Ratio	52
4.5.1 Limits of Peak to Average Ratio Measurement	52
4.5.2 Test Setup.....	52
4.5.3 Test Procedures.....	52
4.5.4 Test Results	52
4.6 Conducted Spurious Emissions.....	58
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	58
4.6.2 Test Setup.....	58
4.6.3 Test Procedure	58
4.6.4 Test Results	59
4.7 Radiated Emission Measurement.....	69
4.7.1 Limits of Radiated Emission Measurement	69
4.7.2 Test Procedure	69
4.7.3 Deviation from Test Standard	69
4.7.4 Test Setup.....	70
4.7.5 Test Results	71
5 Pictures of Test Arrangements.....	95
Appendix – Information on the Testing Laboratories	96

Release Control Record

Issue No.	Description	Date Issued
RF171206E01B	Original Release	Apr. 30, 2018

1 Certificate of Conformity

Product: LGA Module

Brand: Wistron NeWeb Corporation

Test Model: M18Q2FG-1, M14Q2FG-1

Series Model: M18Q2F, M14Q2F, M18Q2, M14Q2, M18Q2G, M14Q2G, M18Q2FG, M14Q2FG
(Refer to item 3.1 for the more details)

Sample Status: Engineering Sample

Applicant: Wistron NeWeb Corporation

Test Date: Apr. 16, 2018 ~ Apr. 18, 2018

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date: Apr. 30, 2018

Gina Liu / Specialist

Approved by :



Date: Apr. 30, 2018

Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
---	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -38.22 dB at 1673.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2017	Dec. 13, 2018
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	MDC9331N-20	0724	Jun. 21, 2016	Jun. 20, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018
Splitters / Combiners WOKEN	WDIV-4R4029	0002	Feb. 09, 2018	Feb. 07, 2019

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The IC Site Registration No. is IC7450F-10.

3 General Information

3.1 General Description of EUT

Product	LGA Module	
Brand	Wistron NeWeb Corporation	
Test Model	M18Q2FG-1, M14Q2FG-1	
Series Model	M18Q2F, M14Q2F, M18Q2, M14Q2, M18Q2G, M14Q2G, M18Q2FG, M14Q2FG	
Model Difference	Refer to Note	
Status of EUT	Engineering Sample	
Power Supply Rating	5.0 Vdc (host equipment)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
Max. ERP Power	WCDMA	105.68 mW
	LTE 5 (Channel Bandwidth: 1.4 MHz)	90.41 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	83.95 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	84.92 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	91.83 mW
Emission Designator	WCDMA	4M15F9W
	LTE 5 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE 5 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE 5 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE 5 (Channel Bandwidth: 10 MHz)	8M96W7D
Antenna Type	Dipole Antenna with -3.5 dBi gain	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. This report is issued as a supplementary report to Sporton report no. FG622601A and FG622601B. The differences compared with original report are changing FW and HW (Refer to Hardware Change Notes letter); therefore the EUT is re-tested in this report.
2. All models are listed as below.

No.	Model name	Description of change	Support Spec.			
			LTE	UMTS	GPS	APGS
1	M18Q2F	FW: M18Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	-	-
2	M14Q2F	FW: M14Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	-	-
3	M18Q2	FW: M18Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	-	-
4	M14Q2	FW: M14Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	-	-
5	M18Q2G	FW: M18Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	supported	supported
6	M14Q2G	FW: M14Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	supported	supported
7	M18Q2FG	FW: M18Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
8	M14Q2FG	FW: M14Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
9	M18Q2FG-1	FW: M18Q2_v16.01 HW: v2.1 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
10	M14Q2FG-1	FW: M14Q2_v16.01 HW: v2.1 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
11	M18Q2F	FW: M18Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	-	-
12	M14Q2F	FW: M14Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	-	-
13	M18Q2	FW: M18Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	-	-
14	M14Q2	FW: M14Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	-	-
15	M18Q2G	FW: M18Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	supported	supported
16	M14Q2G	FW: M14Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	supported	supported


No.	Model name	Description of change	Support Spec.			
			LTE	UMTS	GPS	APGS
17	M18Q2FG	FW: M18Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
18	M14Q2FG	FW: M14Q2_v12.09 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
19	M18Q2FG-1	FW: M18Q2_v12.09 HW: v2.1 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
20	M14Q2FG-1	FW: M14Q2_v12.09 HW: v2.1 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
21	M18Q2F	FW: M18Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	-	-
22	M14Q2F	FW: M14Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	-	-
23	M18Q2	FW: M18Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	-	-
24	M14Q2	FW: M14Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	-	-
25	M18Q2G	FW: M18Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	supported	supported
26	M14Q2G	FW: M14Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	supported	supported
27	M18Q2FG	FW: M18Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
28	M14Q2FG	FW: M14Q2_v12.10 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
29	M18Q2FG-1	FW: M18Q2_v12.10 HW: v2.1 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
30	M14Q2FG-1	FW: M14Q2_v12.10 HW: v2.1 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
31	M18Q2F	FW: M18Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	-	-
32	M14Q2F	FW: M14Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	-	-
33	M18Q2	FW: M18Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	-	-
34	M14Q2	FW: M14Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	-	-

No.	Model name	Description of change	Support Spec.			
			LTE	UMTS	GPS	APGS
35	M18Q2G	FW: M18Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/12	-	supported	supported
36	M14Q2G	FW: M14Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/12	-	supported	supported
37	M18Q2FG	FW: M18Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
38	M14Q2FG	FW: M14Q2_v16.01 HW: v1.0 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported
39	M18Q2FG-1	FW: M18Q2_v16.01 HW: v2.0 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 4 LTE B2/4/5/12	UMTS B2/5	supported	supported
40	M14Q2FG-1	FW: M14Q2_v16.01 HW: v2.0 MCP 4Gb NAND Flash+2Gb LPDDR2	Cat 1 LTE B2/4/5/12	UMTS B2/5	supported	supported


3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

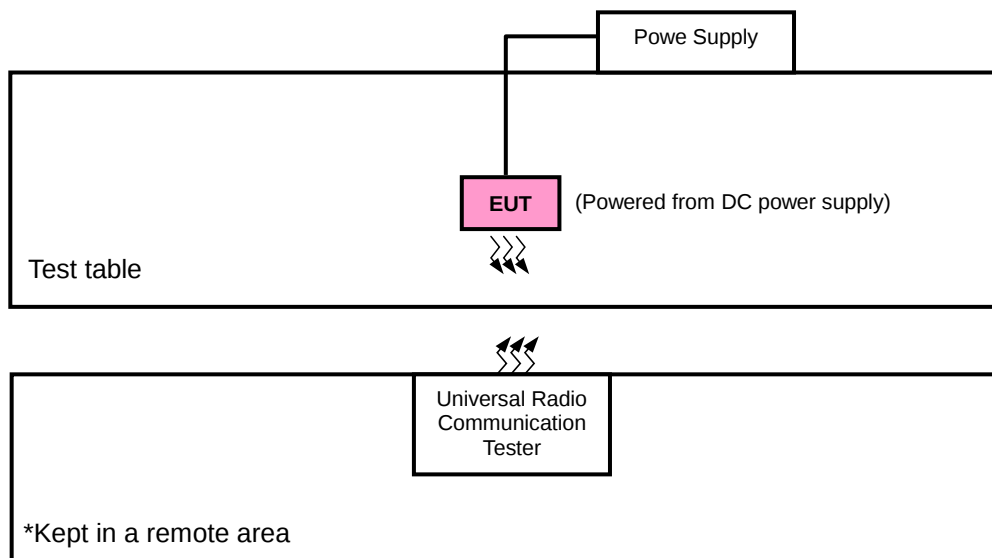

<E.R.P. Test>

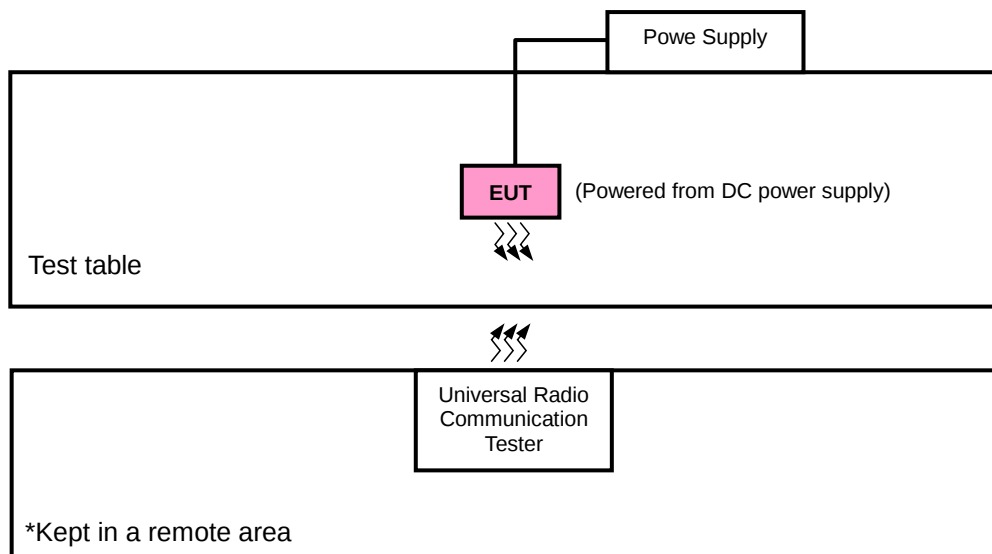

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
WCDMA	X-plane	Z-axis
LTE Band 5	X-plane	Z-axis

EUT Configure Mode	Test Model
A	M18Q2FG-1
B	M14Q2FG-1

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
A, B	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
A, B	Frequency Stability	4132 to 4233	4132, 4233	WCDMA
A, B	Occupied Bandwidth	4132 to 4233	4132, 4182, 4233	WCDMA
A, B	Band Edge	4132 to 4233	4132, 4233	WCDMA
A, B	Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA
A, B	Conducted Emission	4132 to 4233	4132, 4182, 4233	WCDMA
A, B	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
A, B	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset		
A, B	Frequency Stability	20407 to 20643	20407, 20643	1.4 MHz	QPSK	1 RB / 2 RB Offset		
		20415 to 20635	20415, 20635	3 MHz	QPSK	1 RB / 7 RB Offset		
		20425 to 20625	20425, 20625	5 MHz	QPSK	1 RB / 12 RB Offset		
		20450 to 20600	20450, 20600	10 MHz	QPSK	1 RB / 24 RB Offset		
A	Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
B		20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK 16QAM	50 RB / 0 RB Offset 25 RB / 25 RB Offset		
A, B	Band Edge	20407 to 20643	20407	1.4MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			20643	1.4MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		20415 to 20635	20415	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			20635	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		20425 to 20625	20425	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			20625	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20450 to 20600	20450	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			20600	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		A	Peak to Average Ratio	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
				20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
				20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
				20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
B	20407 to 20643	20407, 20525, 20643		1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
	20415 to 20635	20415, 20525, 20635		3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
	20425 to 20625	20425, 20525, 20625		5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
	20450 to 20600	20450, 20525, 20600		10 MHz	QPSK 16QAM	50 RB / 0 RB Offset 25 RB / 25 RB Offset		
A, B	Conducted Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 2 RB Offset		
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK	1 RB / 7 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 12 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 24 RB Offset		
A, B	Radiated Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 2 RB Offset		
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 12 RB Offset		
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 24 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	5 Vdc	Karl Lee
Frequency Stability	25 deg. C, 65 % RH	5 Vdc	Han Wu
Occupied Bandwidth	25 deg. C, 65 % RH	5 Vdc	Han Wu
Band Edge	25 deg. C, 65 % RH	5 Vdc	Han Wu
Peak to Average Ratio	25 deg. C, 65 % RH	5 Vdc	Han Wu
Conducted Emission	25 deg. C, 65 % RH	5 Vdc	Han Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

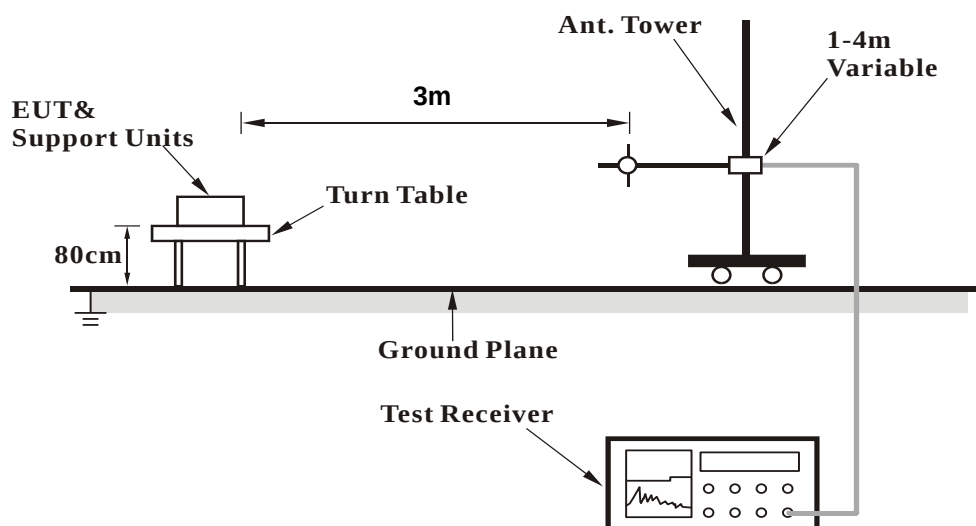


<Radiated Emission above 1 GHz>

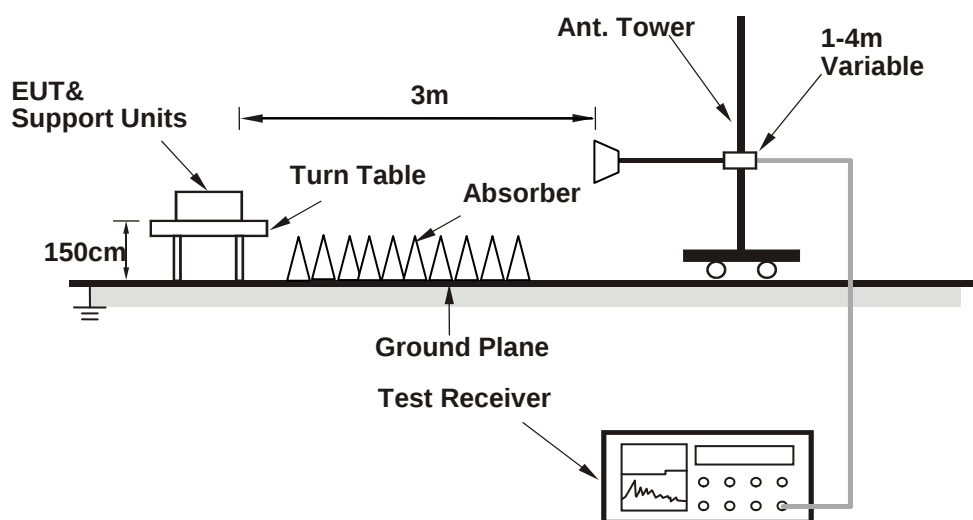

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Mode A

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	24.38	24.39	24.43
HSDPA Subtest-1	23.03	23.07	23.10
HSDPA Subtest-2	23.16	23.18	23.18
HSDPA Subtest-3	22.65	22.63	22.68
HSDPA Subtest-4	22.66	22.64	22.65
HSUPA Subtest-1	22.61	22.60	22.64
HSUPA Subtest-2	21.44	21.44	21.48
HSUPA Subtest-3	21.55	21.61	21.59
HSUPA Subtest-4	21.30	21.32	21.35
HSUPA Subtest-5	23.13	23.14	23.20

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20407	Mid Ch 20525	High Ch 20643		Low Ch 20407	Mid Ch 20525	High Ch 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	22.76	22.98	22.58	0	21.92	21.99	21.64	1
	1	2	22.73	22.92	22.56	0	21.78	21.82	21.48	1
	1	5	22.51	22.75	22.23	0	21.49	21.79	21.22	1
	3	0	22.62	22.81	22.40	0	21.57	21.72	21.37	1
	3	1	22.36	22.62	22.08	0	21.35	21.67	21.07	1
	3	3	22.47	22.69	22.26	0	21.46	21.63	21.16	1
	6	0	21.69	21.90	21.40	1	20.82	20.80	20.35	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20415	Mid Ch 20525	High Ch 20635		Low Ch 20415	Mid Ch 20525	High Ch 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	23.10	23.26	22.94	0	22.05	22.21	21.84	1
	1	7	23.07	23.13	22.81	0	21.95	22.12	21.70	1
	1	14	22.90	23.11	22.64	0	21.71	21.91	21.57	1
	8	0	21.98	22.18	21.84	1	20.97	21.06	20.71	2
	8	3	21.68	22.01	21.60	1	20.73	20.86	20.47	2
	8	7	21.63	21.86	21.53	1	20.74	20.97	20.28	2
	15	0	21.87	22.13	21.75	1	20.95	21.13	20.69	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20425	Mid Ch 20525	High Ch 20625		Low Ch 20425	Mid Ch 20525	High Ch 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	23.28	23.39	23.01	0	22.15	22.43	21.95	1
	1	12	23.06	23.33	22.83	0	22.15	22.17	21.82	1
	1	24	22.93	23.14	22.72	0	21.87	21.97	21.72	1
	12	0	22.11	22.25	21.88	1	21.04	21.18	20.83	2
	12	6	21.92	22.09	21.63	1	20.91	21.10	20.60	2
	12	13	21.80	22.04	21.55	1	20.76	20.98	20.52	2
	25	0	22.13	22.22	21.87	1	21.09	21.18	20.79	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20450	Mid Ch 20525	High Ch 20600		Low Ch 20450	Mid Ch 20525	High Ch 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	23.49	23.67	23.28	0	22.30	22.46	22.13	1
	1	24	23.36	23.58	23.15	0	22.17	22.34	21.96	1
	1	49	23.19	23.37	23.04	0	22.16	22.17	21.73	1
	25	0	22.38	22.58	22.13	1	21.11	21.18	20.85	2
	25	12	22.20	22.38	21.93	1	20.97	21.19	20.73	2
	25	25	22.09	22.30	21.80	1	20.96	21.14	20.60	2
	50	0	22.39	22.54	22.18	1	21.24	21.25	20.92	2

Mode B

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	24.15	24.14	24.22
HSDPA Subtest-1	22.87	22.90	22.95
HSDPA Subtest-2	22.94	22.93	22.98
HSDPA Subtest-3	22.46	22.45	22.55
HSDPA Subtest-4	22.48	22.49	22.56
HSUPA Subtest-1	22.49	22.48	22.53
HSUPA Subtest-2	21.38	21.41	21.51
HSUPA Subtest-3	21.71	21.73	21.77
HSUPA Subtest-4	21.94	21.95	21.98
HSUPA Subtest-5	23.01	23.04	23.11

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20407	Mid Ch 20525	High Ch 20643		Low Ch 20407	Mid Ch 20525	High Ch 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	23.06	22.96	23.25	0	21.86	21.98	22.29	1
	1	2	22.82	22.90	23.05	0	21.83	21.79	22.05	1
	1	5	22.70	22.78	22.85	0	21.65	21.61	21.78	1
	3	0	22.73	22.78	22.94	0	21.68	21.62	21.87	1
	3	1	22.60	22.67	22.76	0	21.47	21.43	21.60	1
	3	3	22.58	22.65	22.82	0	21.48	21.60	21.77	1
	6	0	21.94	21.87	22.01	1	20.83	20.87	20.88	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20415	Mid Ch 20525	High Ch 20635		Low Ch 20415	Mid Ch 20525	High Ch 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	23.41	23.27	23.53	0	22.28	22.25	22.55	1
	1	7	23.27	23.19	23.44	0	22.25	22.14	22.35	1
	1	14	23.15	22.95	23.24	0	22.08	22.03	22.17	1
	8	0	22.27	22.21	22.45	1	21.16	21.08	21.31	2
	8	3	22.05	21.98	22.14	1	20.99	20.95	21.09	2
	8	7	21.97	21.88	21.99	1	20.88	20.87	21.07	2
	15	0	22.33	22.26	22.46	1	21.12	21.10	21.36	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20425	Mid Ch 20525	High Ch 20625		Low Ch 20425	Mid Ch 20525	High Ch 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	23.53	23.48	23.65	0	22.45	22.40	22.60	1
	1	12	23.42	23.34	23.53	0	22.37	22.30	22.49	1
	1	24	23.15	23.07	23.23	0	22.16	22.10	22.35	1
	12	0	22.33	22.32	22.47	1	21.33	21.23	21.37	2
	12	6	22.12	22.15	22.31	1	21.08	21.04	21.27	2
	12	13	22.10	22.04	22.21	1	21.09	20.96	21.18	2
	25	0	22.33	22.31	22.53	1	21.25	21.36	21.49	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20450	Mid Ch 20525	High Ch 20600		Low Ch 20450	Mid Ch 20525	High Ch 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	23.63	23.59	23.77	0	22.55	22.53	22.69	1
	1	24	23.52	23.43	23.61	0	22.44	22.40	22.59	1
	1	49	23.31	23.31	23.45	0	22.18	22.35	22.38	1
	25	0	22.48	22.47	22.63	1	21.27	21.35	21.66	2
	25	12	22.30	22.26	22.41	1	21.26	21.29	21.49	2
	25	25	22.20	22.24	22.35	1	21.09	21.22	21.33	2
	50	0	22.48	22.47	22.63	1				2

ERP Power (dBm)

Mode A

WCDMA							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	4132	826.4	-9.23	31.208	19.83	96.12	H
	4182	836.4	-9.28	31.3	19.87	97.05	
	4233	846.6	-9.22	31.222	19.85	96.65	
	4132	826.4	-15.26	31.504	14.09	25.67	V
	4182	836.4	-14.92	31.117	14.05	25.39	
	4233	846.6	-15.75	31.922	14.02	25.25	

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20407	824.7	-10.37	31.208	18.69	73.93	H
	20525	836.5	-10.45	31.3	18.70	74.13	
	20643	848.3	-10.41	31.222	18.66	73.49	
	20407	824.7	-16.33	31.504	13.02	20.06	V
	20525	836.5	-15.99	31.117	12.98	19.85	
	20643	848.3	-16.72	31.922	13.05	20.19	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	20407	824.7	-11.36	31.208	17.70	58.86	H
	20525	836.5	-11.42	31.3	17.73	59.29	
	20643	848.3	-11.36	31.222	17.71	59.05	
	20407	824.7	-17.31	31.504	12.04	16.01	V
	20525	836.5	-16.92	31.117	12.05	16.02	
	20643	848.3	-17.71	31.922	12.06	16.08	

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20415	825.5	-10.34	31.208	18.72	74.44	H
	20525	836.5	-10.45	31.3	18.70	74.13	
	20635	847.5	-10.39	31.222	18.68	73.82	
	20415	825.5	-16.25	31.504	13.10	20.44	V
	20525	836.5	-15.92	31.117	13.05	20.17	
	20635	847.5	-16.74	31.922	13.03	20.10	
Channel Bandwidth: 3 MHz / 16QAM							
X	20415	825.5	-11.36	31.208	17.70	58.86	H
	20525	836.5	-11.48	31.3	17.67	58.48	
	20635	847.5	-11.40	31.222	17.67	58.51	
	20415	825.5	-17.29	31.504	12.06	16.08	V
	20525	836.5	-16.95	31.117	12.02	15.91	
	20635	847.5	-17.71	31.922	12.06	16.08	

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20425	826.5	-10.41	31.208	18.65	73.25	H
	20525	836.5	-10.48	31.3	18.67	73.62	
	20625	846.5	-10.42	31.222	18.65	73.32	
	20425	826.5	-16.33	31.504	13.02	20.06	V
	20525	836.5	-15.92	31.117	13.05	20.17	
	20625	846.5	-16.76	31.922	13.01	20.01	
Channel Bandwidth: 5 MHz / 16QAM							
X	20425	826.5	-11.37	31.208	17.69	58.72	H
	20525	836.5	-11.42	31.3	17.73	59.29	
	20625	846.5	-11.39	31.222	17.68	58.64	
	20425	826.5	-17.33	31.504	12.02	15.94	V
	20525	836.5	-16.96	31.117	12.01	15.87	
	20625	846.5	-17.72	31.922	12.05	16.04	

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20450	829.0	-10.36	31.208	18.70	74.10	H
	20525	836.5	-10.41	31.3	18.74	74.82	
	20600	844.0	-10.39	31.222	18.68	73.82	
	20450	829.0	-16.35	31.504	13.00	19.97	V
	20525	836.5	-15.92	31.117	13.05	20.17	
	20600	844.0	-16.73	31.922	13.04	20.15	
Channel Bandwidth: 10 MHz / 16QAM							
X	20425	826.5	-11.32	31.208	17.74	59.40	H
	20525	836.5	-11.36	31.3	17.79	60.12	
	20625	846.5	-11.35	31.222	17.72	59.18	
	20425	826.5	-17.24	31.504	12.11	16.27	V
	20525	836.5	-16.94	31.117	12.03	15.95	
	20625	846.5	-17.72	31.922	12.05	16.04	

Mode B

WCDMA							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	4132	826.4	-8.93	31.208	20.13	102.99	H
	4182	836.4	-8.91	31.3	20.24	105.68	
	4233	846.6	-8.86	31.222	20.21	105.00	
	4132	826.4	-15.33	31.504	14.02	25.26	V
	4182	836.4	-14.91	31.117	14.06	25.45	
	4233	846.6	-15.72	31.922	14.05	25.42	

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20407	824.7	-9.99	31.208	19.07	80.69	H
	20525	836.5	-9.78	31.3	19.37	86.50	
	20643	848.3	-9.51	31.222	19.56	90.41	
	20407	824.7	-15.86	31.504	13.49	22.36	V
	20525	836.5	-15.52	31.117	13.45	22.12	
	20643	848.3	-15.91	31.922	13.86	24.33	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	20407	824.7	-10.85	31.208	18.21	66.19	H
	20525	836.5	-10.95	31.3	18.20	66.07	
	20643	848.3	-10.87	31.222	18.20	66.10	
	20407	824.7	-16.69	31.504	12.66	18.47	V
	20525	836.5	-16.14	31.117	12.83	19.17	
	20643	848.3	-16.85	31.922	12.92	19.60	

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20415	825.5	-9.88	31.208	19.18	82.76	H
	20525	836.5	-9.91	31.3	19.24	83.95	
	20635	847.5	-10.21	31.222	18.86	76.95	
	20415	825.5	-15.78	31.504	13.57	22.77	V
	20525	836.5	-15.63	31.117	13.34	21.56	
	20635	847.5	-15.81	31.922	13.96	24.90	
Channel Bandwidth: 3 MHz / 16QAM							
X	20415	825.5	-10.88	31.208	18.18	65.74	H
	20525	836.5	-10.84	31.3	18.31	67.76	
	20635	847.5	-10.76	31.222	18.31	67.80	
	20415	825.5	-16.94	31.504	12.41	17.43	V
	20525	836.5	-16.25	31.117	12.72	18.69	
	20635	847.5	-16.87	31.922	12.90	19.51	

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20425	826.5	-10.14	31.208	18.92	77.95	H
	20525	836.5	-9.86	31.3	19.29	84.92	
	20625	846.5	-10.21	31.222	18.86	76.95	
	20425	826.5	-15.84	31.504	13.51	22.46	V
	20525	836.5	-15.21	31.117	13.76	23.75	
	20625	846.5	-15.93	31.922	13.84	24.22	
Channel Bandwidth: 5 MHz / 16QAM							
X	20425	826.5	-10.58	31.208	18.48	70.44	H
	20525	836.5	-10.63	31.3	18.52	71.12	
	20625	846.5	-10.78	31.222	18.29	67.48	
	20425	826.5	-16.51	31.504	12.84	19.25	V
	20525	836.5	-16.78	31.117	12.19	16.55	
	20625	846.5	-16.84	31.922	12.93	19.64	

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20450	829.0	-9.81	31.208	19.25	84.10	H
	20525	836.5	-9.52	31.3	19.63	91.83	
	20600	844.0	-10.05	31.222	19.02	79.84	
	20450	829.0	-15.85	31.504	13.50	22.41	V
	20525	836.5	-15.26	31.117	13.71	23.48	
	20600	844.0	-15.88	31.922	13.89	24.50	
Channel Bandwidth: 10 MHz / 16QAM							
X	20425	826.5	-11.21	31.208	17.85	60.93	H
	20525	836.5	-10.89	31.3	18.26	66.99	
	20625	846.5	-10.58	31.222	18.49	70.66	
	20425	826.5	-16.95	31.504	12.40	17.39	V
	20525	836.5	-16.35	31.117	12.62	18.27	
	20625	846.5	-16.99	31.922	12.78	18.98	

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

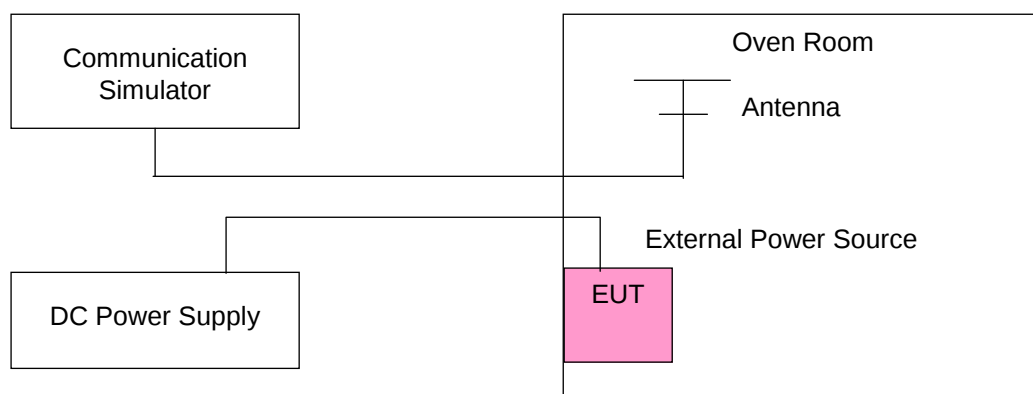

4.2.4 Test Results

Mode A

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	826.400002	0.003	846.600003	0.003	2.5
5	826.400003	0.003	846.600003	0.004	2.5
12	826.400001	0.002	846.600002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.400003	0.003	846.600003	0.003	2.5
-20	826.400002	0.002	846.600003	0.004	2.5
-10	826.400003	0.003	846.600001	0.001	2.5
0	826.400002	0.002	846.600002	0.003	2.5
10	826.400003	0.003	846.600002	0.002	2.5
20	826.399999	-0.002	846.599996	-0.004	2.5
30	826.399997	-0.003	846.599996	-0.004	2.5
40	826.399998	-0.002	846.599997	-0.004	2.5
50	826.399997	-0.004	846.599997	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	824.700003	0.004	848.300003	0.003	2.5
5	824.700003	0.003	848.300004	0.004	2.5
12	824.700001	0.002	848.300001	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	824.700004	0.005	848.300003	0.003	2.5
-20	824.700004	0.005	848.300004	0.004	2.5
-10	824.700002	0.002	848.300004	0.004	2.5
0	824.700003	0.004	848.300003	0.003	2.5
10	824.700004	0.004	848.300004	0.004	2.5
20	824.699997	-0.003	848.299999	-0.001	2.5
30	824.699996	-0.005	848.299998	-0.003	2.5
40	824.699999	-0.001	848.299997	-0.004	2.5
50	824.699998	-0.002	848.299997	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	825.500003	0.004	847.500003	0.003	2.5
5	825.500004	0.004	847.500003	0.004	2.5
12	825.500001	0.002	847.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	825.500001	0.001	847.500001	0.002	2.5
-20	825.500004	0.005	847.500002	0.002	2.5
-10	825.500003	0.004	847.500002	0.003	2.5
0	825.500003	0.004	847.500003	0.004	2.5
10	825.500003	0.003	847.500001	0.001	2.5
20	825.499998	-0.003	847.499997	-0.003	2.5
30	825.499996	-0.004	847.499998	-0.002	2.5
40	825.499999	-0.001	847.499997	-0.004	2.5
50	825.499997	-0.004	847.499999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	826.500003	0.003	846.500002	0.002	2.5
5	826.500003	0.003	846.500004	0.004	2.5
12	826.500001	0.001	846.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.500004	0.004	846.500001	0.002	2.5
-20	826.500003	0.004	846.500003	0.003	2.5
-10	826.500002	0.003	846.500004	0.004	2.5
0	826.500004	0.004	846.500001	0.001	2.5
10	826.500002	0.003	846.500001	0.001	2.5
20	826.499998	-0.002	846.499997	-0.004	2.5
30	826.499997	-0.004	846.499999	-0.002	2.5
40	826.499996	-0.005	846.499999	-0.001	2.5
50	826.499998	-0.003	846.499996	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	829.000001	0.001	844.000002	0.002	2.5
5	829.000003	0.004	844.000003	0.004	2.5
12	829.000003	0.003	844.000003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	829.000003	0.004	844.000001	0.002	2.5
-20	829.000003	0.003	844.000002	0.002	2.5
-10	829.000002	0.002	844.000003	0.004	2.5
0	829.000003	0.003	844.000002	0.003	2.5
10	829.000003	0.004	844.000004	0.004	2.5
20	828.999996	-0.004	843.999997	-0.003	2.5
30	828.999998	-0.003	843.999998	-0.002	2.5
40	828.999996	-0.005	843.999998	-0.003	2.5
50	828.999997	-0.004	843.999997	-0.003	2.5

Mode B

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	826.400003	0.003	846.600003	0.003	2.5
5	826.400003	0.004	846.600002	0.002	2.5
12	826.400002	0.003	846.600002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.400004	0.005	846.600004	0.004	2.5
-20	826.400002	0.002	846.600002	0.002	2.5
-10	826.400002	0.003	846.600001	0.001	2.5
0	826.400001	0.002	846.600002	0.002	2.5
10	826.400002	0.003	846.600003	0.003	2.5
20	826.399996	-0.004	846.599998	-0.002	2.5
30	826.399999	-0.002	846.599997	-0.003	2.5
40	826.399996	-0.005	846.599997	-0.003	2.5
50	826.399999	-0.002	846.599998	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	824.700002	0.002	848.300001	0.002	2.5
5	824.700002	0.003	848.300002	0.003	2.5
12	824.700001	0.002	848.300002	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	824.700003	0.003	848.300004	0.004	2.5
-20	824.700001	0.001	848.300002	0.003	2.5
-10	824.700003	0.003	848.300002	0.002	2.5
0	824.700002	0.002	848.300002	0.002	2.5
10	824.700002	0.002	848.300003	0.004	2.5
20	824.699997	-0.004	848.299998	-0.003	2.5
30	824.699996	-0.005	848.299999	-0.002	2.5
40	824.699997	-0.004	848.299996	-0.005	2.5
50	824.699998	-0.002	848.299998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	825.500002	0.002	847.500001	0.001	2.5
5	825.500002	0.002	847.500002	0.002	2.5
12	825.500003	0.003	847.500003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	825.500003	0.003	847.500002	0.002	2.5
-20	825.500002	0.003	847.500001	0.002	2.5
-10	825.500002	0.003	847.500002	0.002	2.5
0	825.500002	0.003	847.500003	0.004	2.5
10	825.500004	0.004	847.500002	0.002	2.5
20	825.499997	-0.004	847.499999	-0.001	2.5
30	825.499998	-0.002	847.499998	-0.003	2.5
40	825.499998	-0.002	847.499998	-0.002	2.5
50	825.499999	-0.001	847.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	826.500003	0.003	846.500004	0.004	2.5
5	826.500003	0.003	846.500004	0.004	2.5
12	826.500002	0.003	846.500004	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.500003	0.003	846.500003	0.003	2.5
-20	826.500002	0.002	846.500003	0.004	2.5
-10	826.500002	0.002	846.500001	0.002	2.5
0	826.500002	0.003	846.500001	0.002	2.5
10	826.500003	0.004	846.500002	0.002	2.5
20	826.499998	-0.002	846.499997	-0.004	2.5
30	826.499998	-0.003	846.499998	-0.002	2.5
40	826.499996	-0.004	846.499999	-0.001	2.5
50	826.499996	-0.004	846.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
8	829.000003	0.003	844.000003	0.003	2.5
5	829.000004	0.004	844.000002	0.002	2.5
12	829.000003	0.004	844.000002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 5 Vdc to 12 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	829.000004	0.004	844.000004	0.005	2.5
-20	829.000002	0.002	844.000002	0.003	2.5
-10	829.000003	0.004	844.000002	0.003	2.5
0	829.000004	0.004	844.000002	0.002	2.5
10	829.000004	0.004	844.000003	0.003	2.5
20	828.999998	-0.003	843.999997	-0.004	2.5
30	828.999997	-0.004	843.999997	-0.003	2.5
40	828.999998	-0.002	843.999997	-0.004	2.5
50	828.999998	-0.002	843.999996	-0.005	2.5

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.3.2 Test Setup

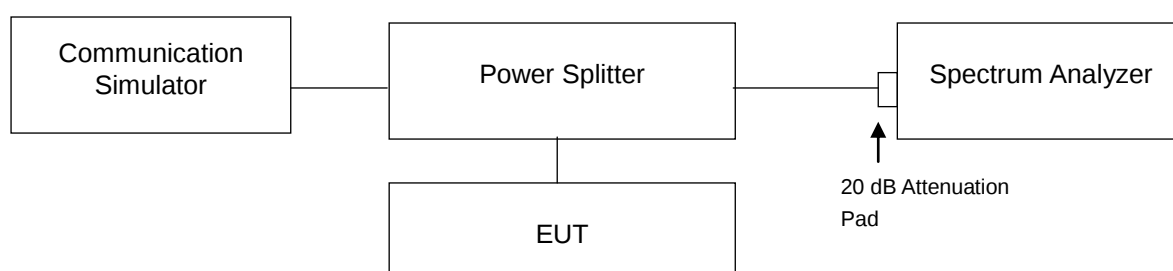


4.3.3 Test Result

Mode A


Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
		WCDMA
1013	824.70	4.14
384	836.52	4.14
777	848.31	4.15

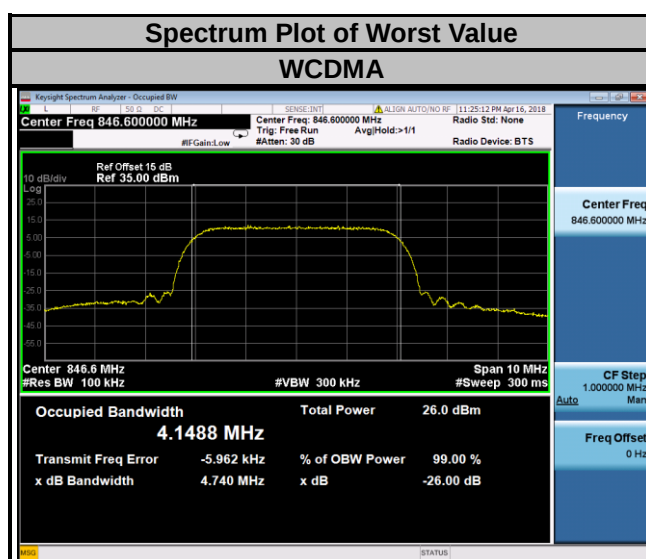

LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	1.09	1.09	20415	825.5	2.70	2.70
20525	836.5	1.09	1.09	20525	836.5	2.70	2.70
20643	848.3	1.09	1.09	20635	847.5	2.70	2.70

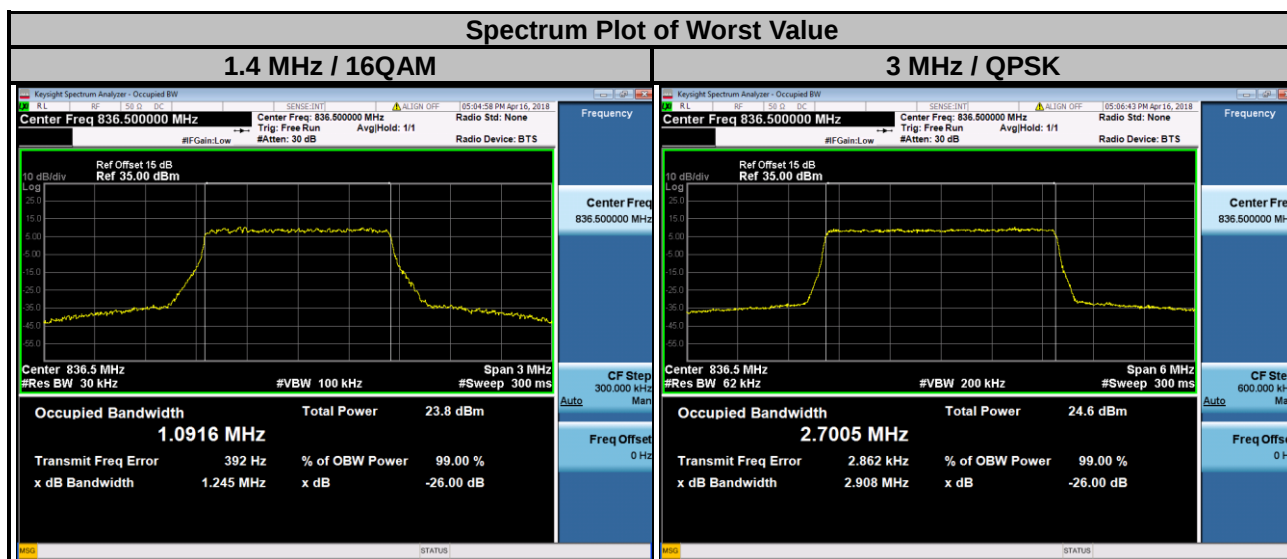


LTE Band 5							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.49	4.49	20450	829.0	8.96	8.96
20525	836.5	4.49	4.49	20525	836.5	8.95	8.96
20625	846.5	4.49	4.49	20600	844.0	8.95	8.96

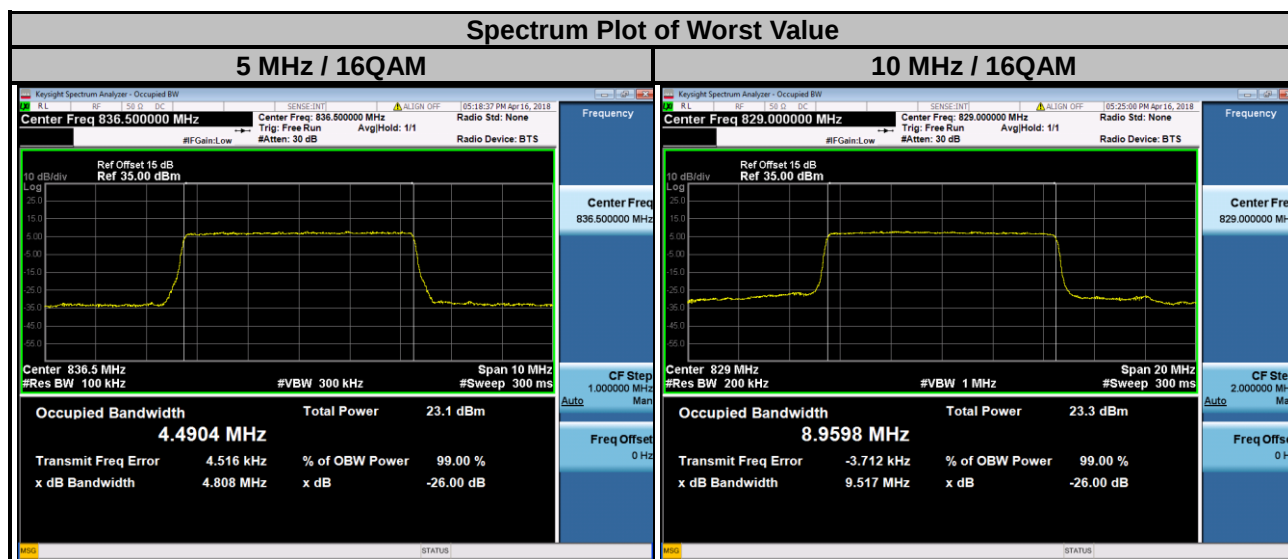


Mode B


Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
		WCDMA
1013	824.70	4.14
384	836.52	4.14
777	848.31	4.15

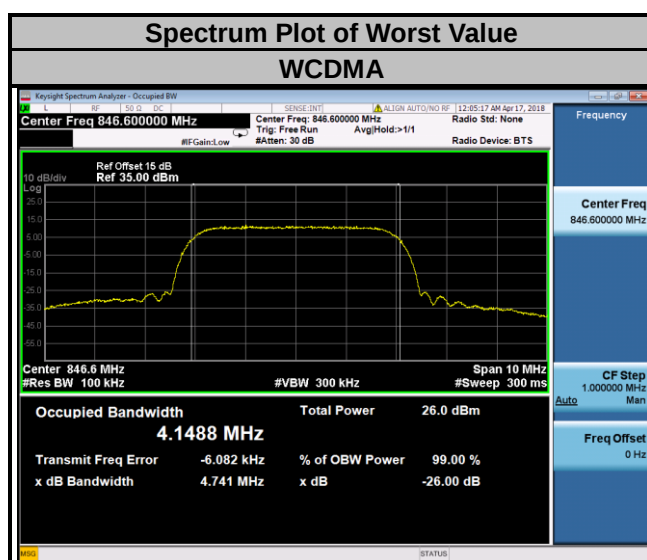

LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	1.09	1.09	20415	825.5	2.70	2.70
20525	836.5	1.09	1.09	20525	836.5	2.70	2.70
20643	848.3	1.09	1.09	20635	847.5	2.70	2.70

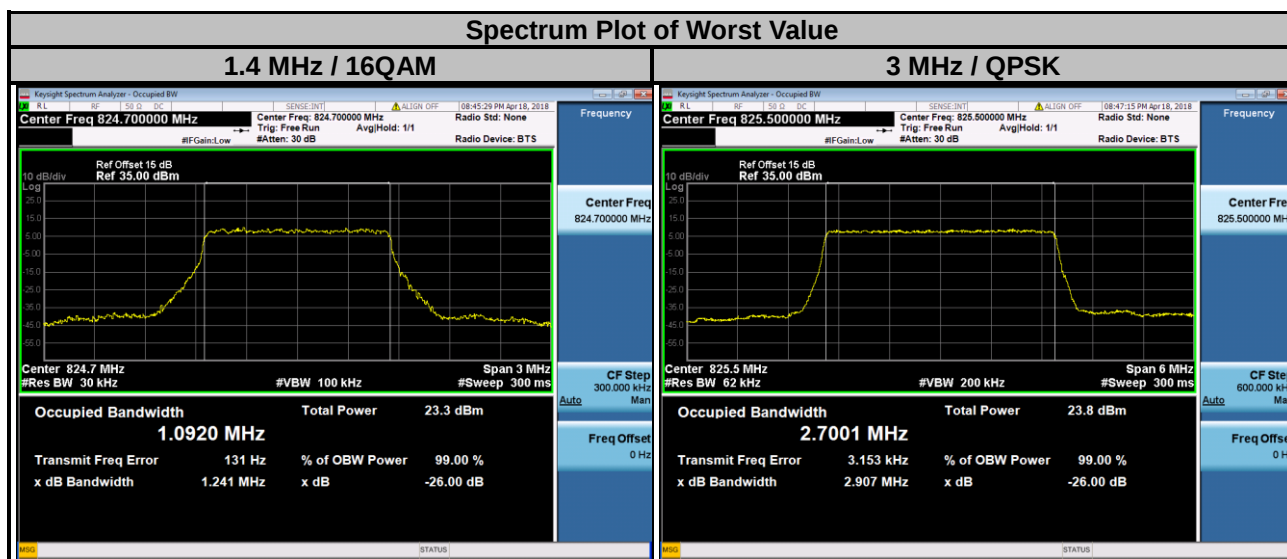

LTE Band 5							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.49	4.49	20450	829.0	8.96	4.57
20525	836.5	4.49	4.49	20525	836.5	8.95	4.56
20625	846.5	4.49	4.49	20600	844.0	8.95	4.57

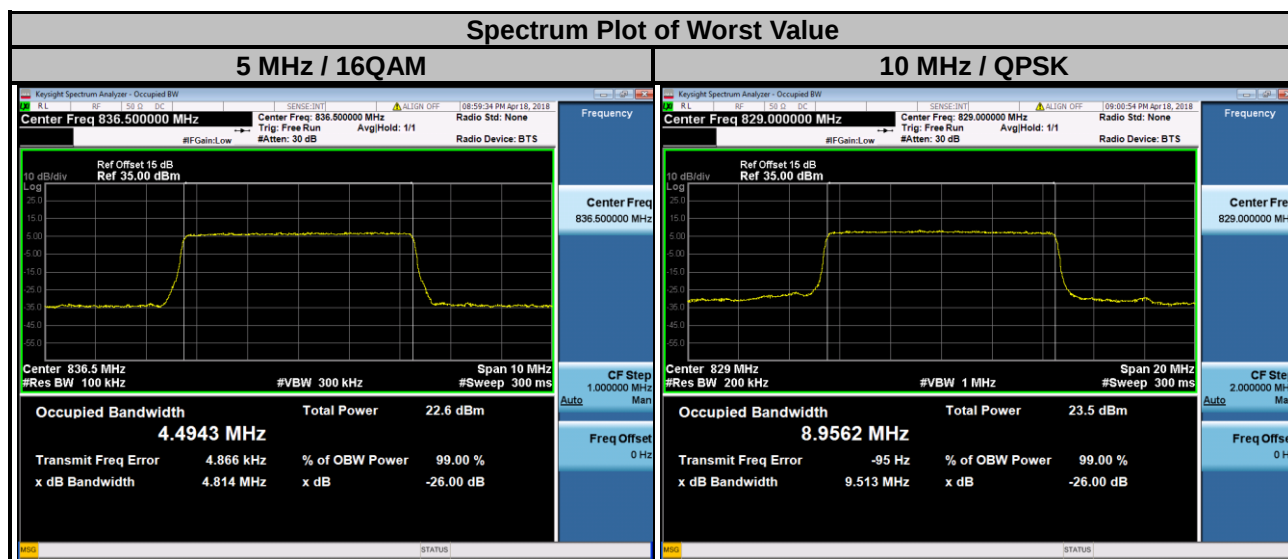


4.4 Band Edge Measurement

4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 Test Setup


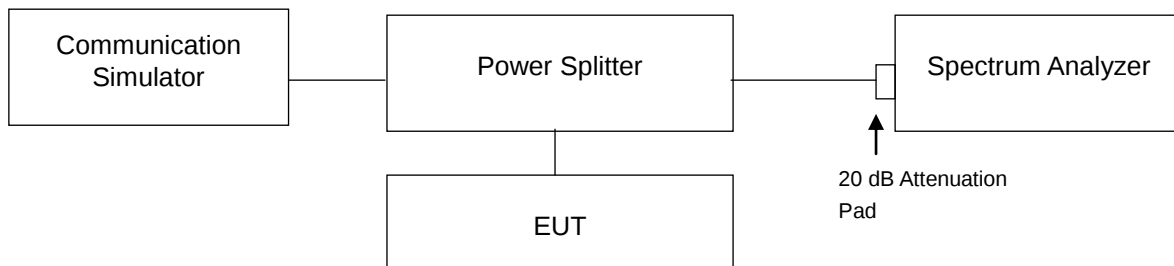



4.4.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 10 MHz).
- Record the max trace plot into the test report.


4.4.4 Test Results

Mode A

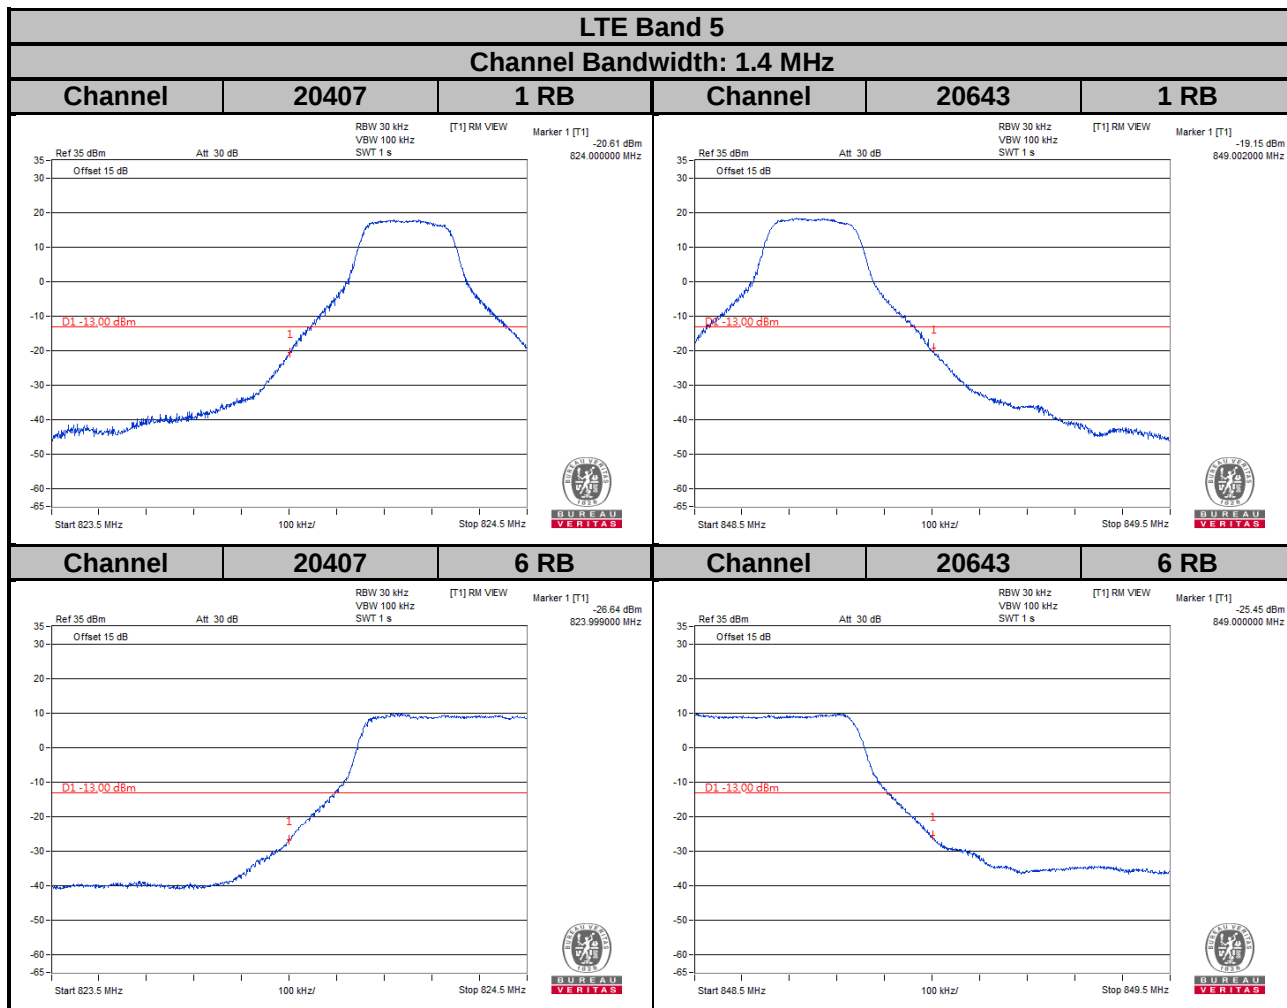
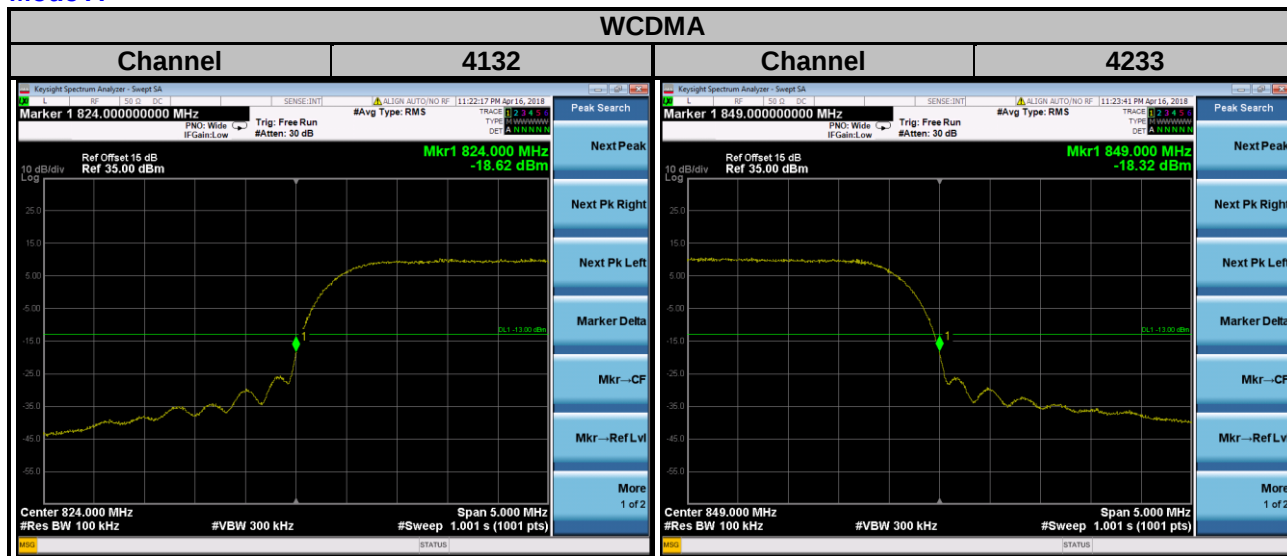


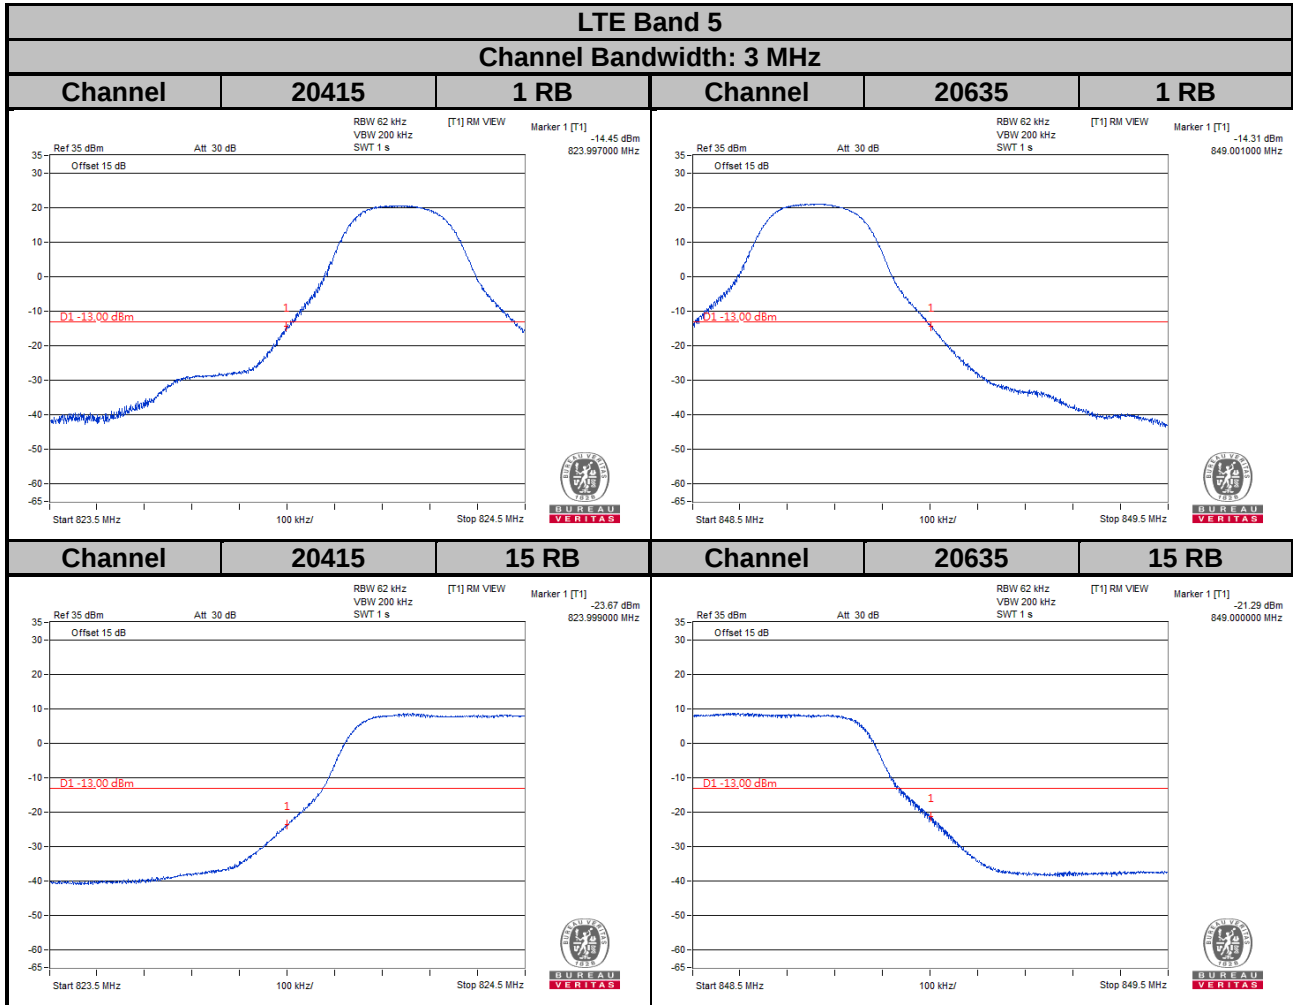


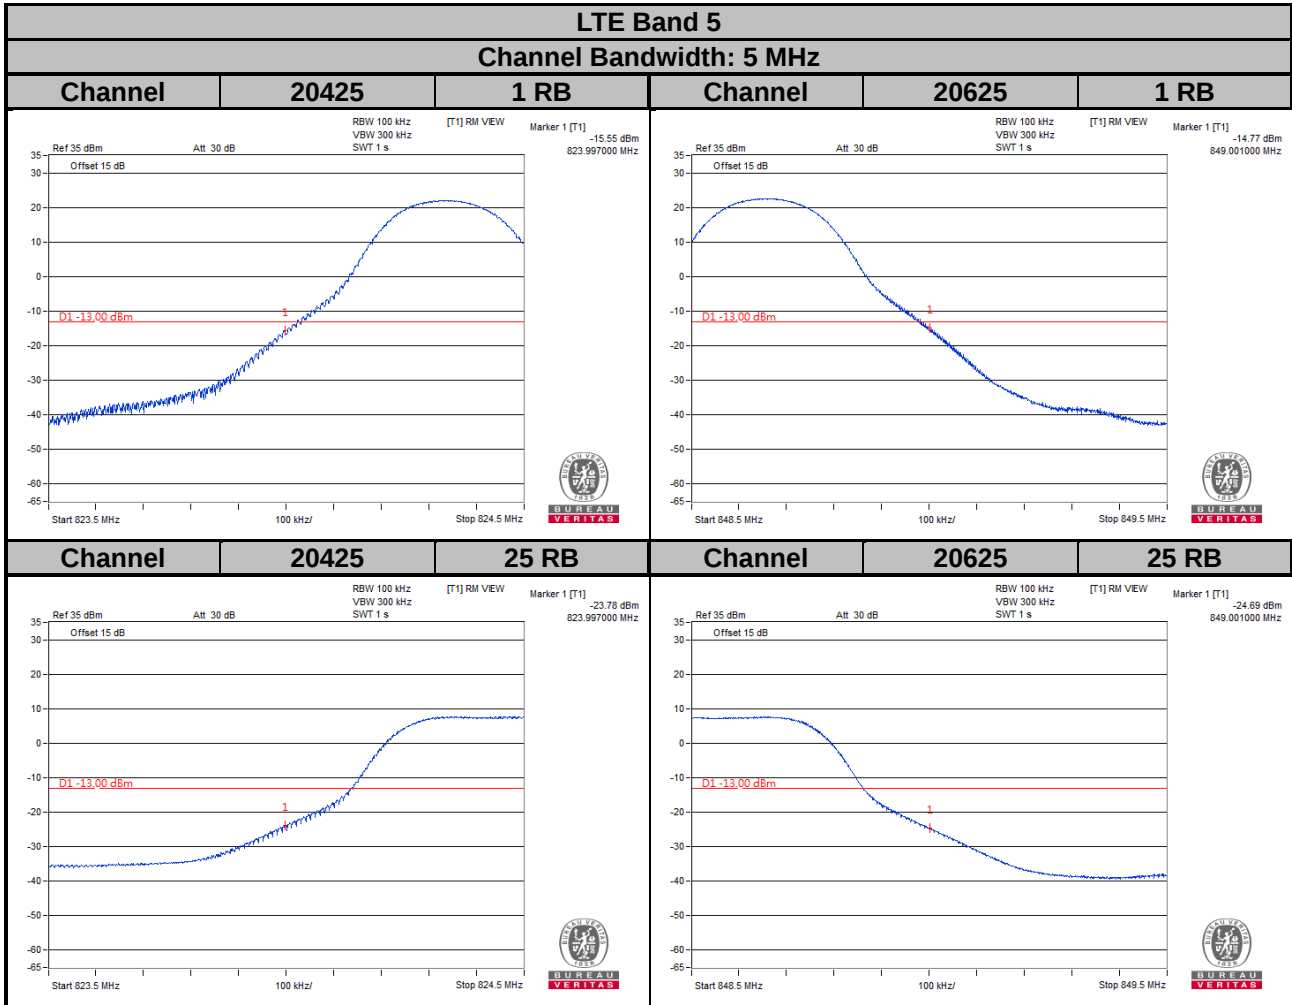


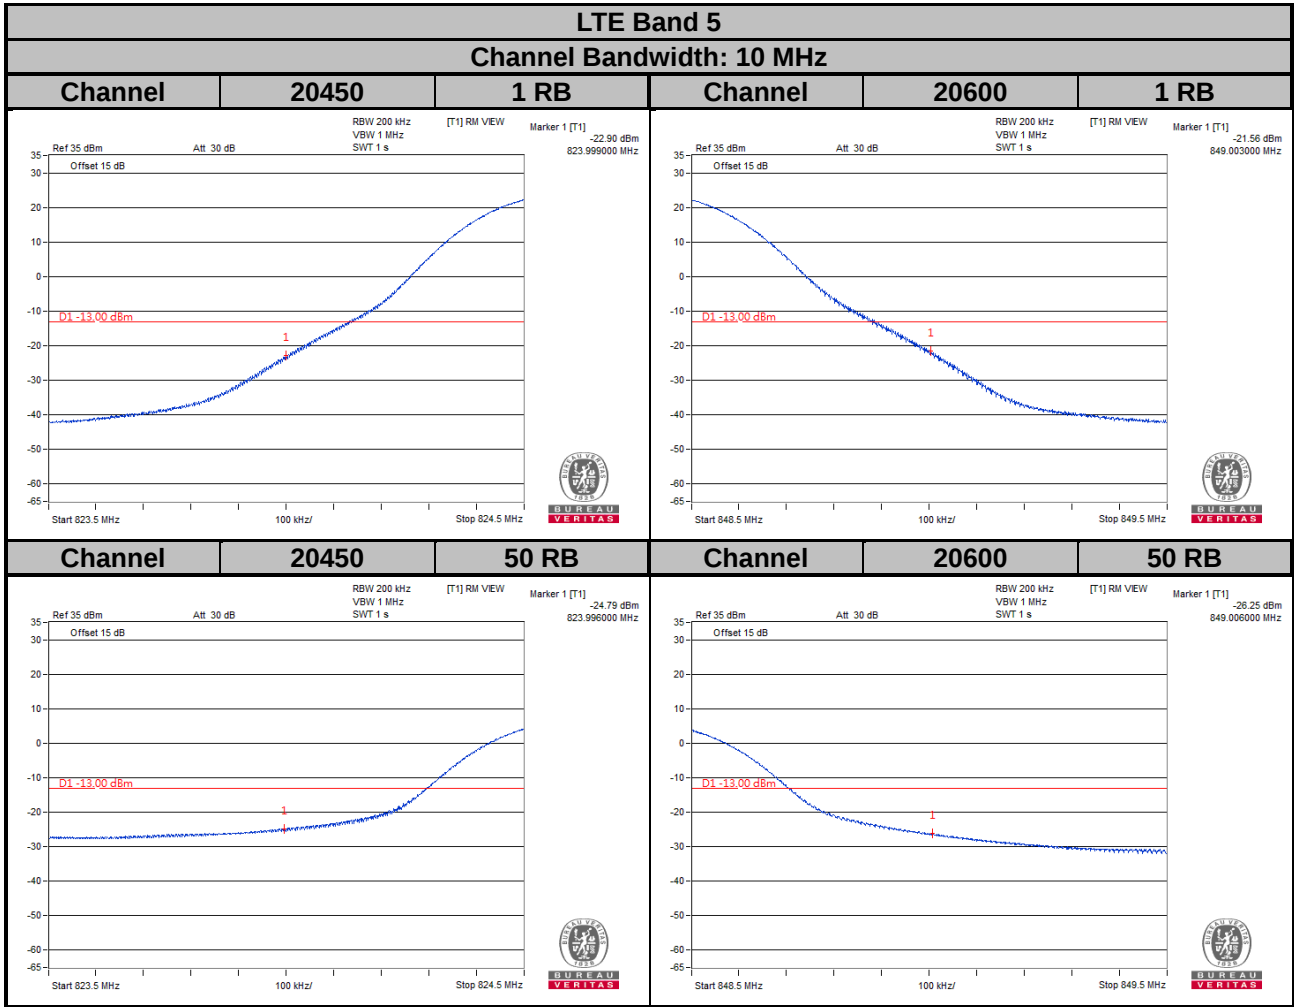


Mode B

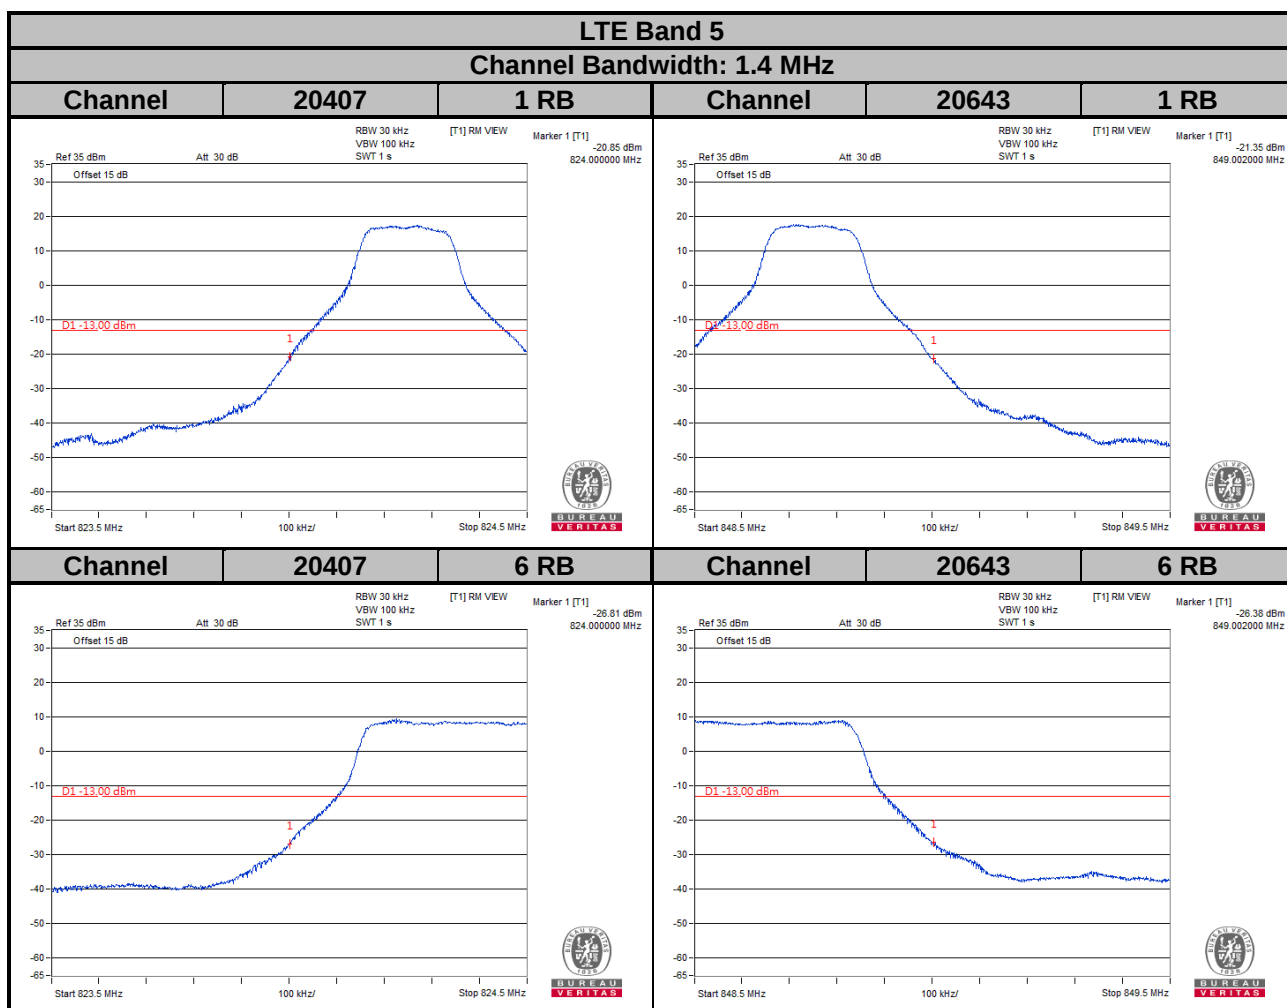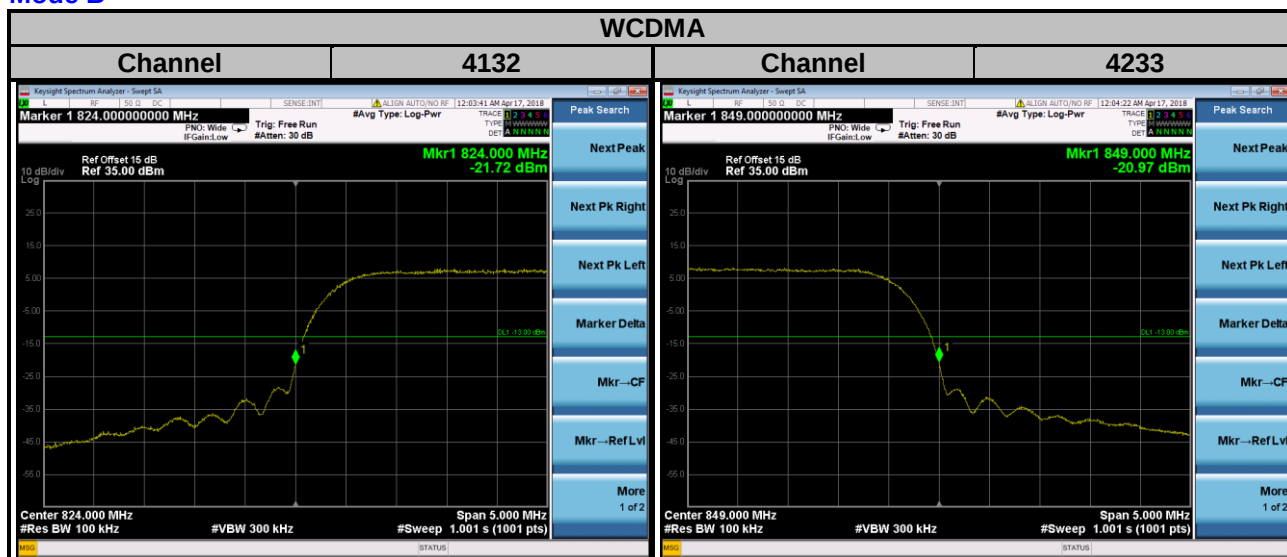

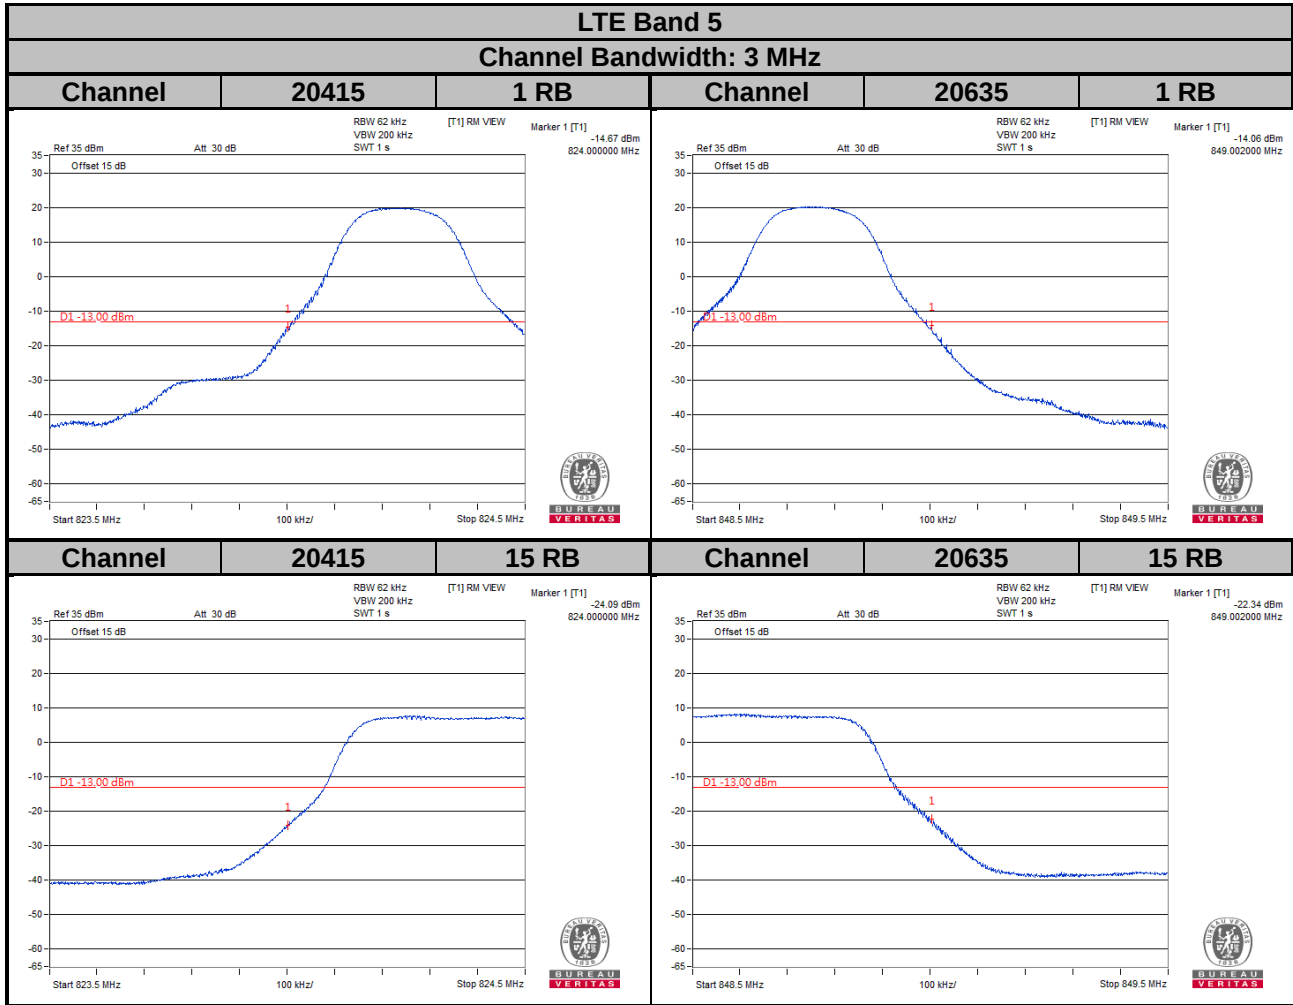

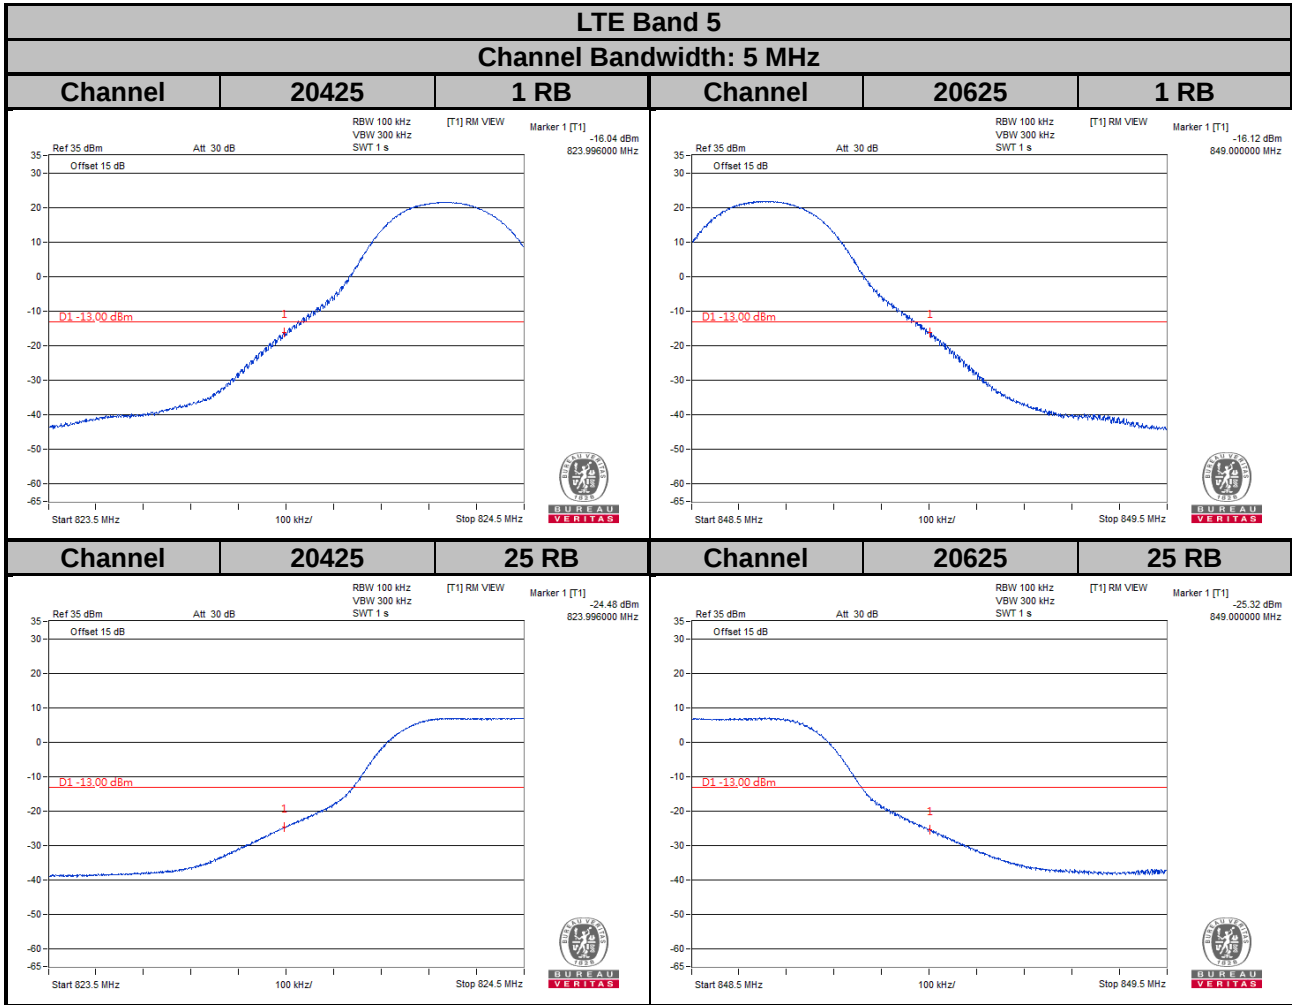

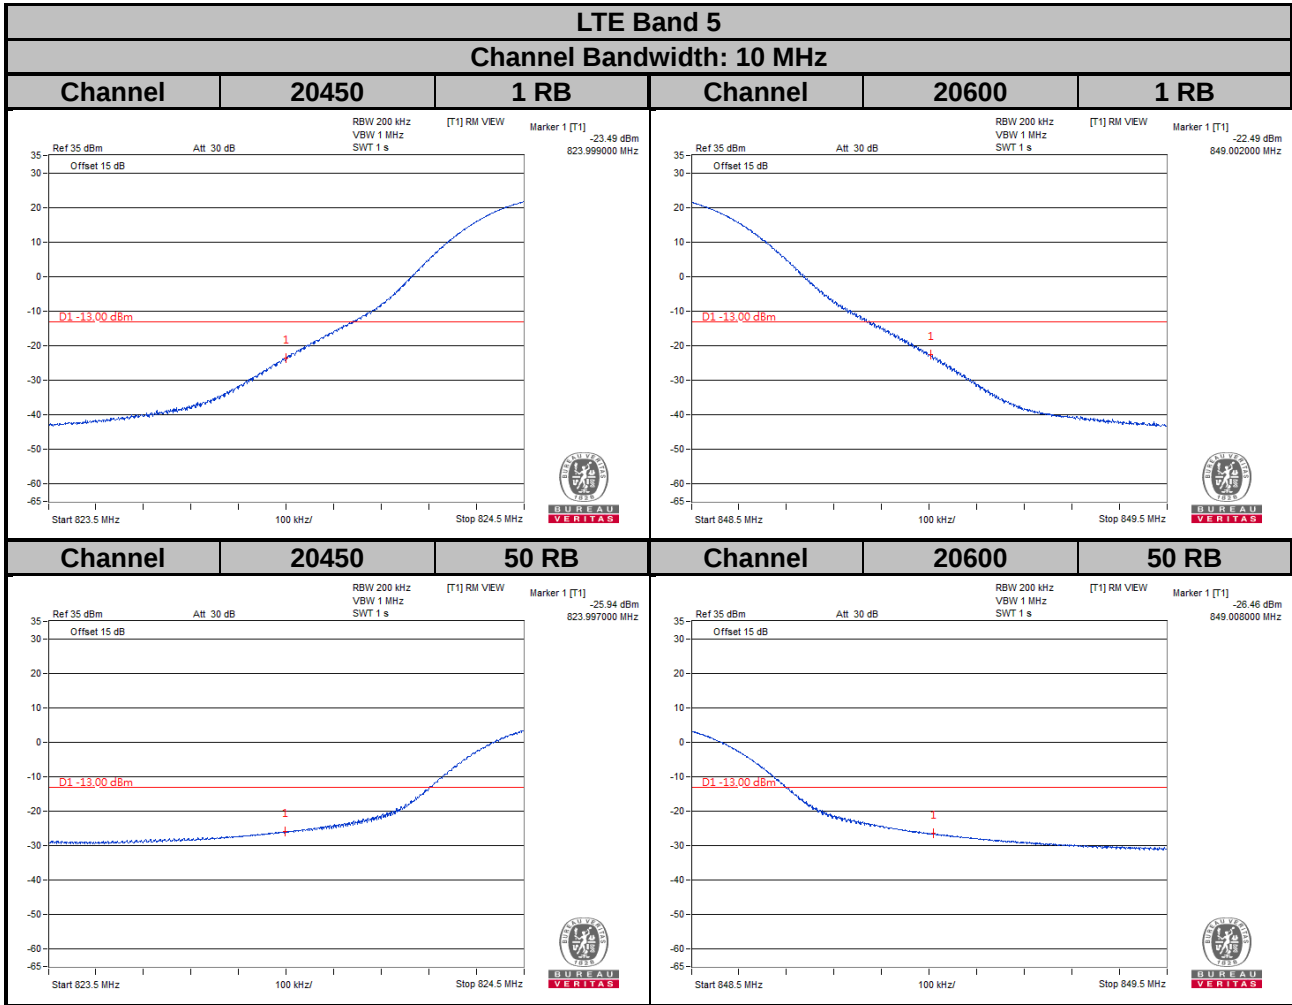


4.5 Peak to Average Ratio

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.5.2 Test Setup

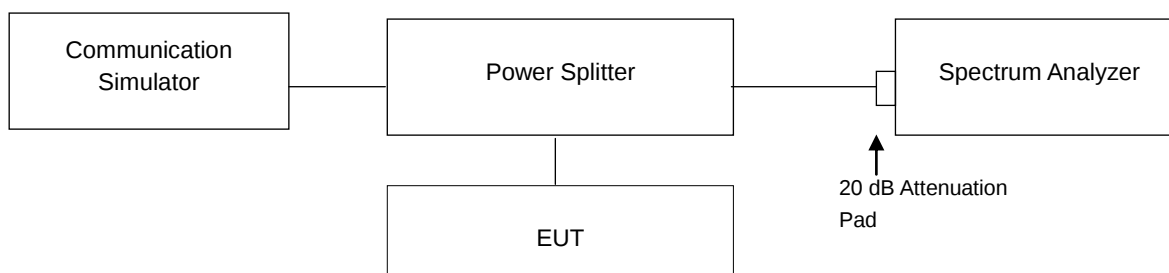


4.5.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.


4.5.4 Test Results

Mode A


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
4132	826.4	2.93
4182	836.4	3.01
4233	846.6	2.88

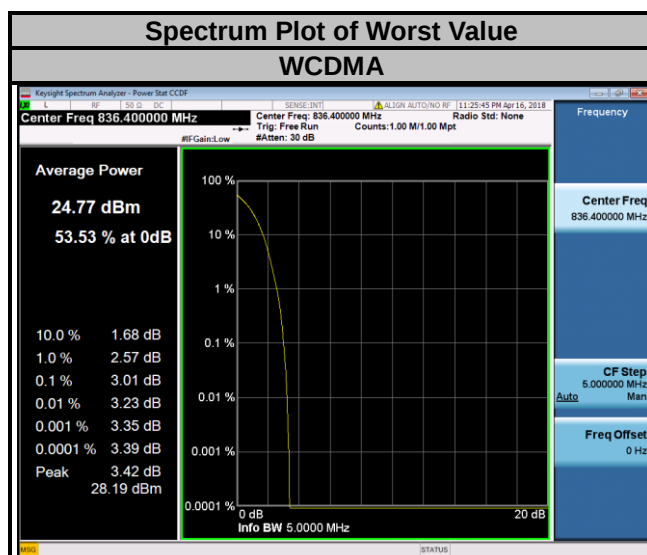

LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	4.38	5.16	20415	825.5	4.38	5.24
20525	836.5	4.73	5.48	20525	836.5	4.83	5.62
20643	848.3	4.02	5.00	20635	847.5	4.27	5.13

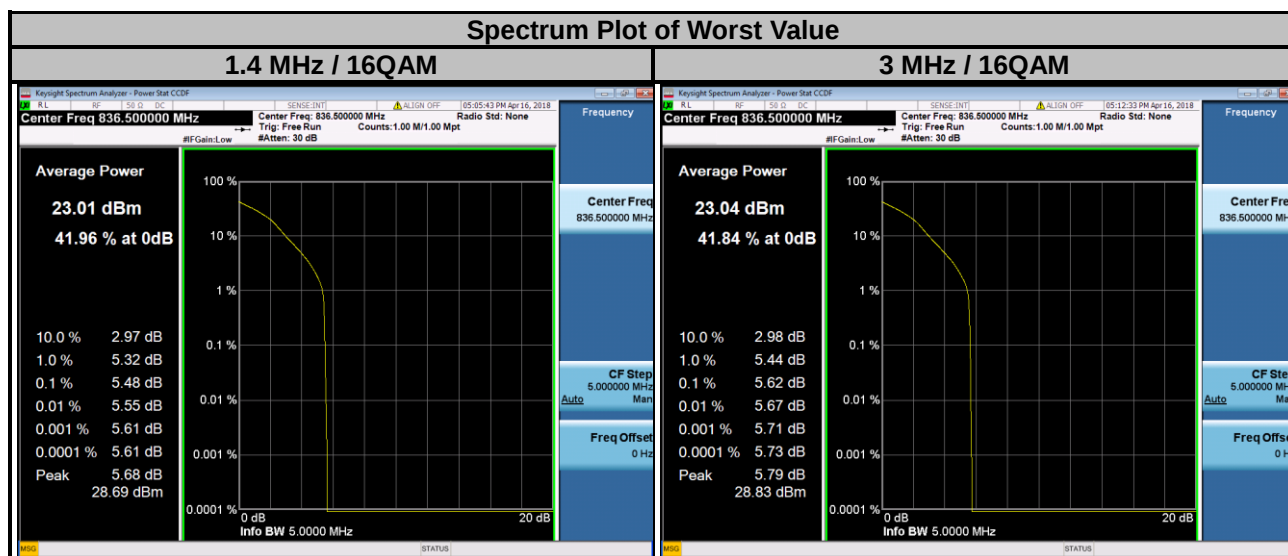


LTE Band 5							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.43	5.18	20450	829.0	4.36	5.18
20525	836.5	4.89	5.71	20525	836.5	4.88	5.71
20625	846.5	4.26	5.12	20600	844.0	4.20	5.10

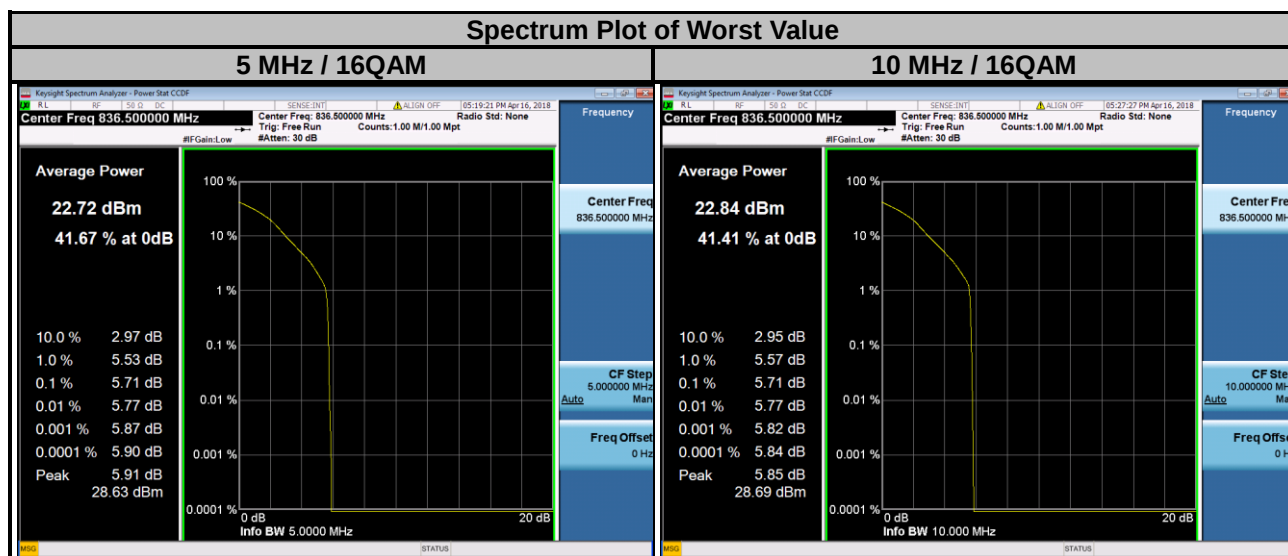


Mode B


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
4132	826.4	2.95
4182	836.4	3.08
4233	846.6	2.86

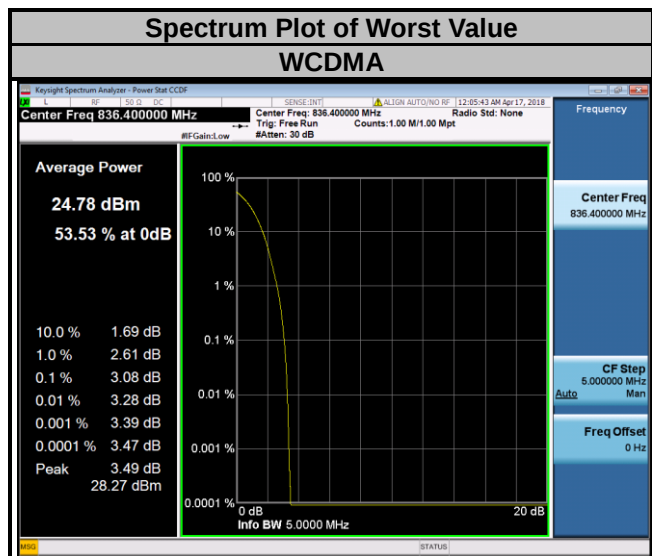

LTE Band 5							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	4.27	5.08	20415	825.5	4.26	5.20
20525	836.5	4.63	5.44	20525	836.5	4.78	5.64
20643	848.3	4.14	5.02	20635	847.5	4.26	5.08

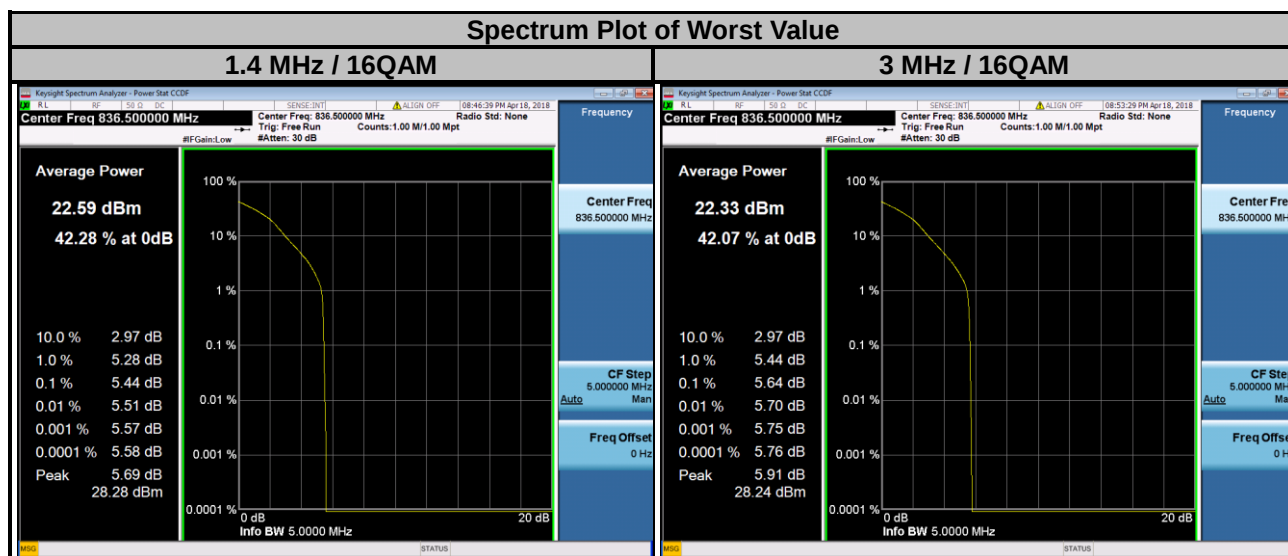

LTE Band 5							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.26	5.08	20450	829.0	4.20	5.02
20525	836.5	4.82	5.59	20525	836.5	4.85	5.55
20625	846.5	4.12	4.94	20600	844.0	4.02	4.87

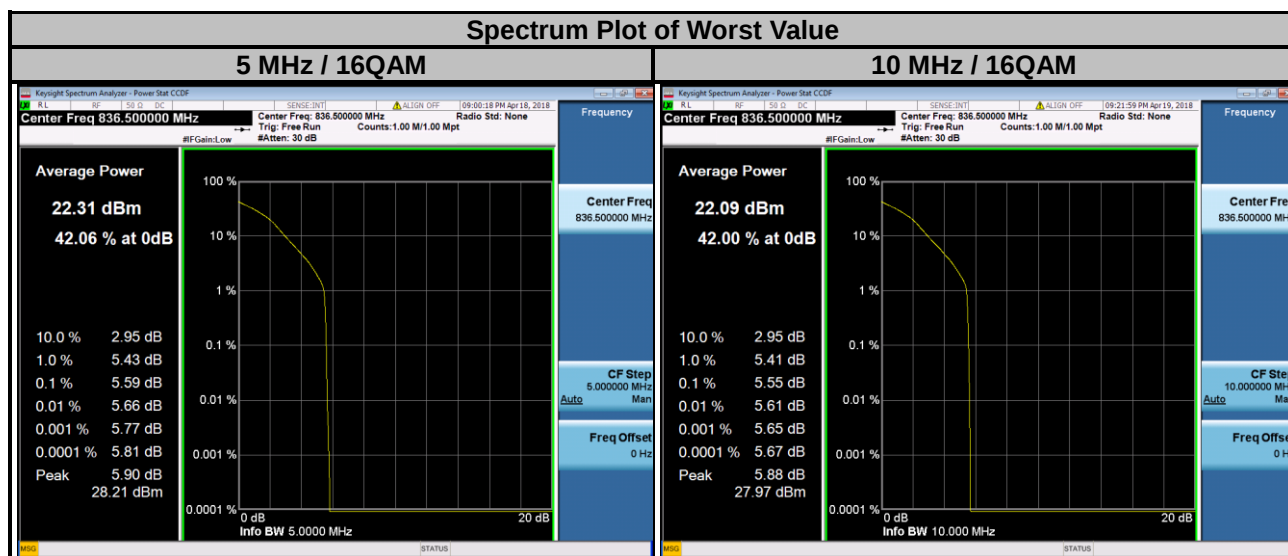


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

4.6.2 Test Setup

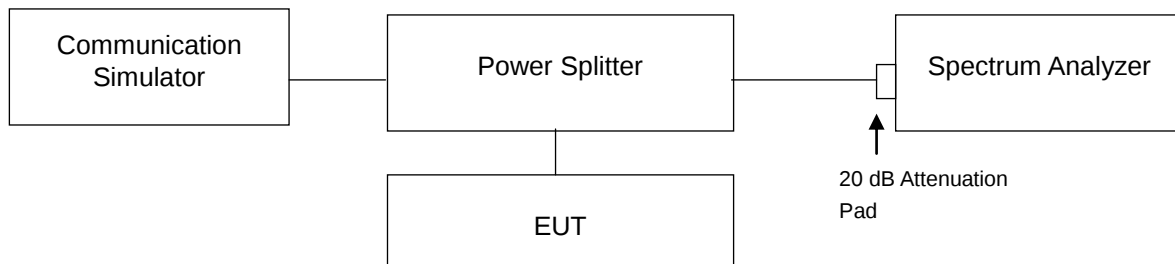


4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 10 GHz. 20 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.6.4 Test Results

Mode A

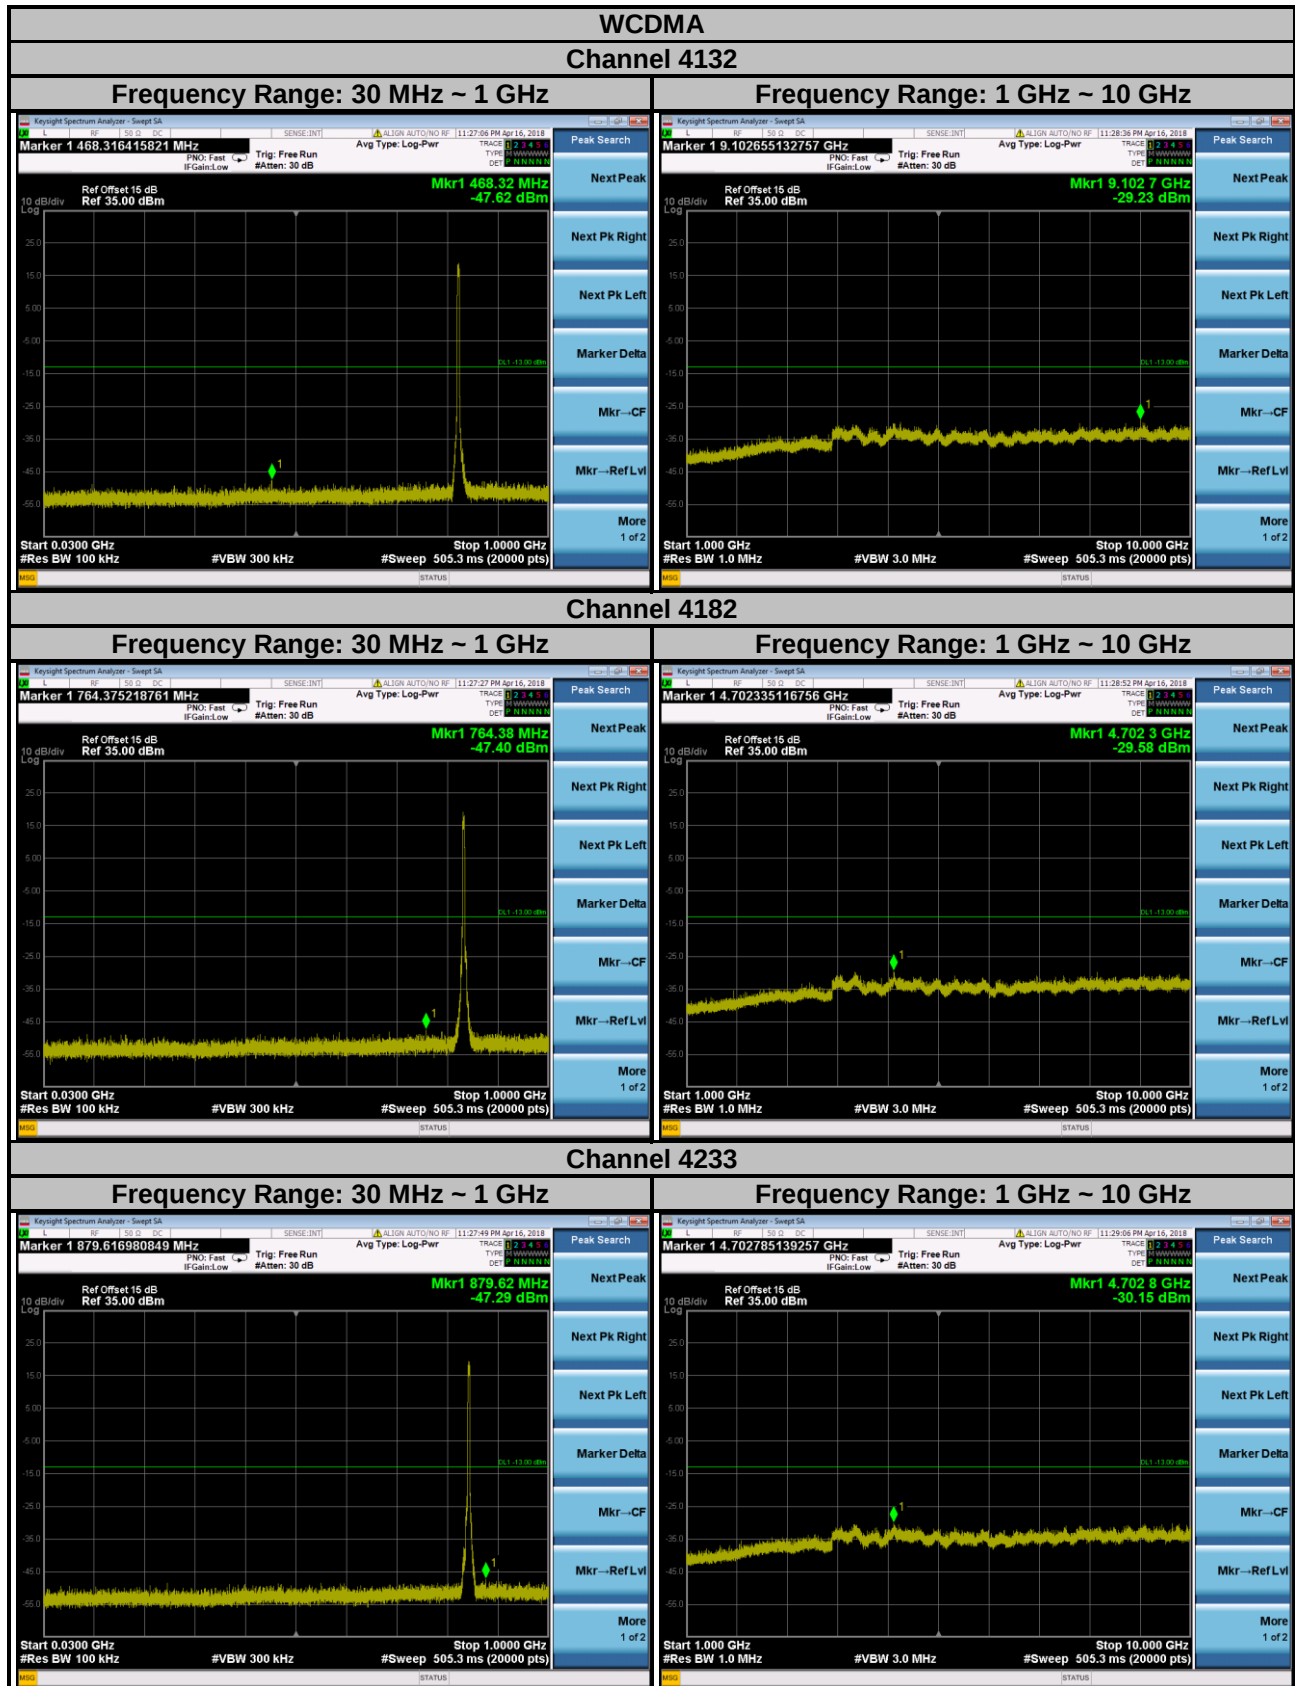


LTE Band 5


Channel Bandwidth: 1.4 MHz

Channel 20407

Frequency Range: 30 MHz ~ 1 GHz

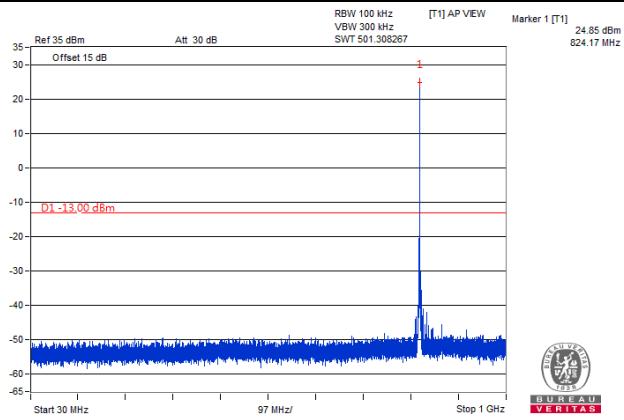


Frequency Range: 1 GHz ~ 10 GHz

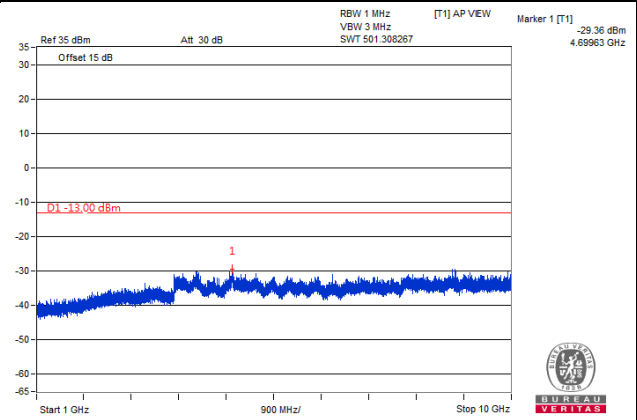


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

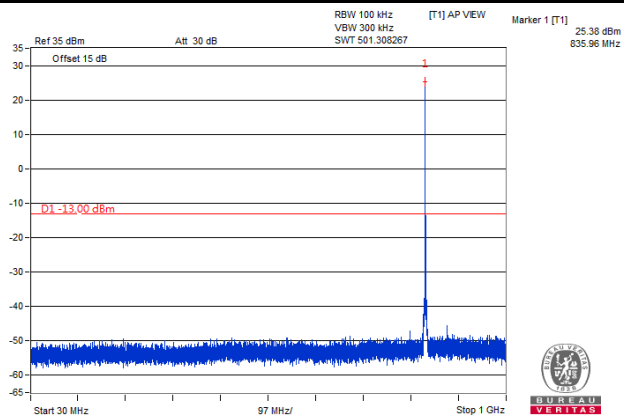


Frequency Range: 1 GHz ~ 10 GHz

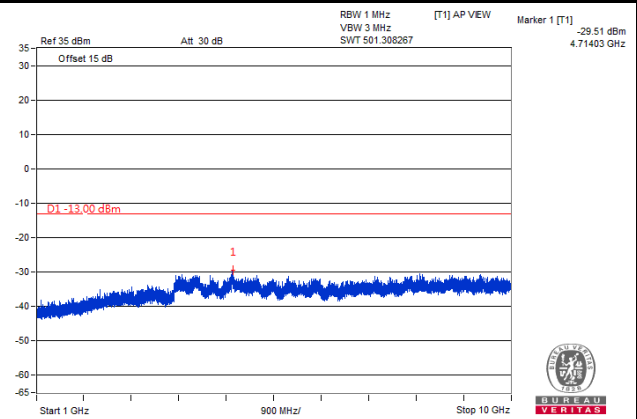


Channel 20643

Frequency Range: 30 MHz ~ 1 GHz

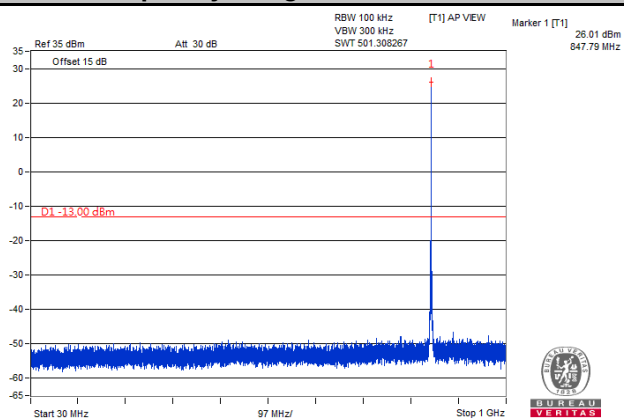

Frequency Range: 1 GHz ~ 10 GHz

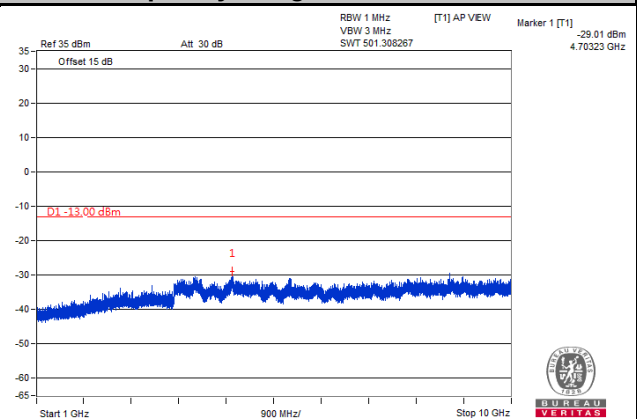


LTE Band 5


Channel Bandwidth: 3 MHz

Channel 20415

Frequency Range: 30 MHz ~ 1 GHz

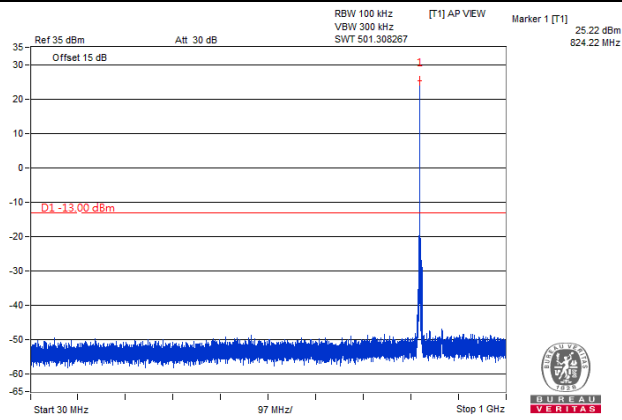


Frequency Range: 1 GHz ~ 10 GHz

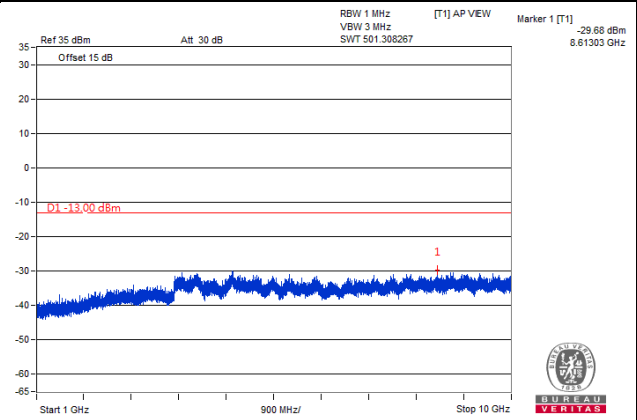


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

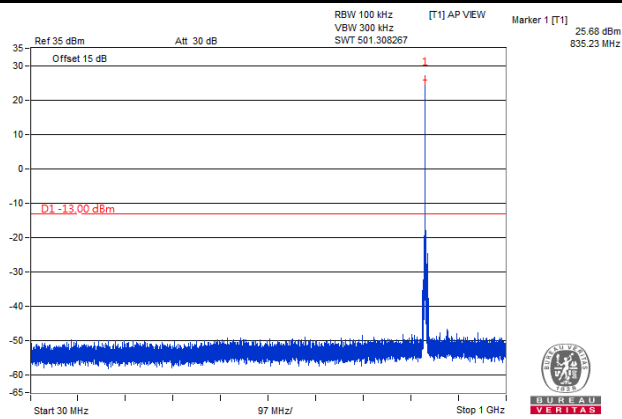


Frequency Range: 1 GHz ~ 10 GHz

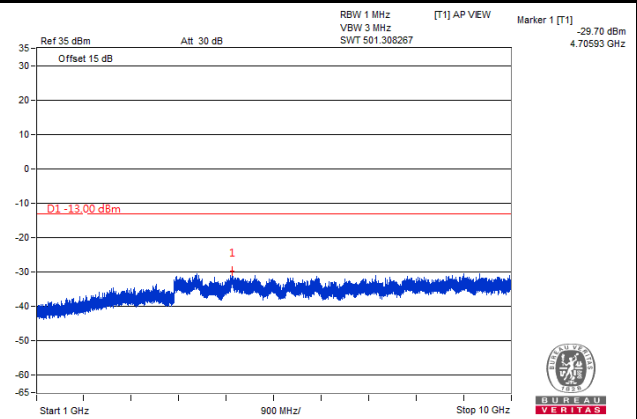


Channel 20635


Frequency Range: 30 MHz ~ 1 GHz

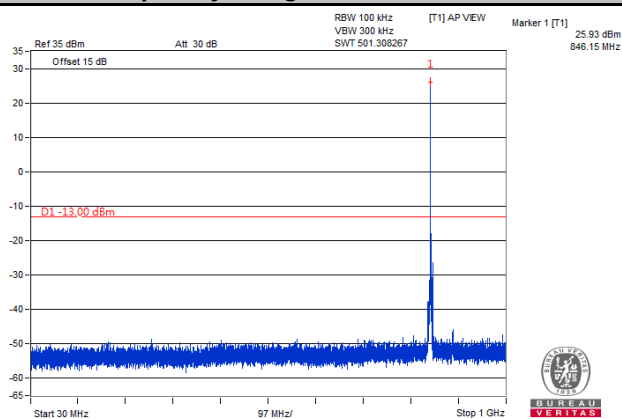


Frequency Range: 1 GHz ~ 10 GHz

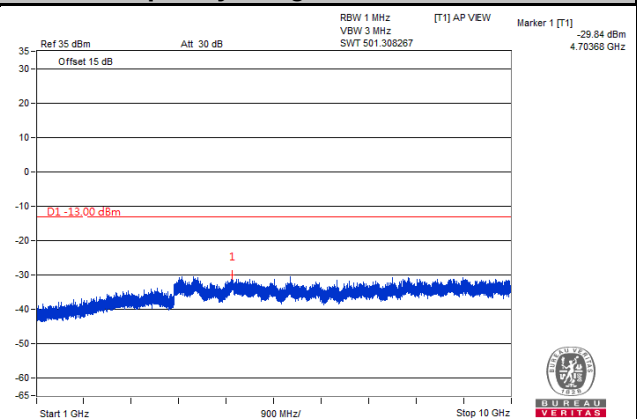


LTE Band 5
Channel Bandwidth: 5 MHz
Channel 20425

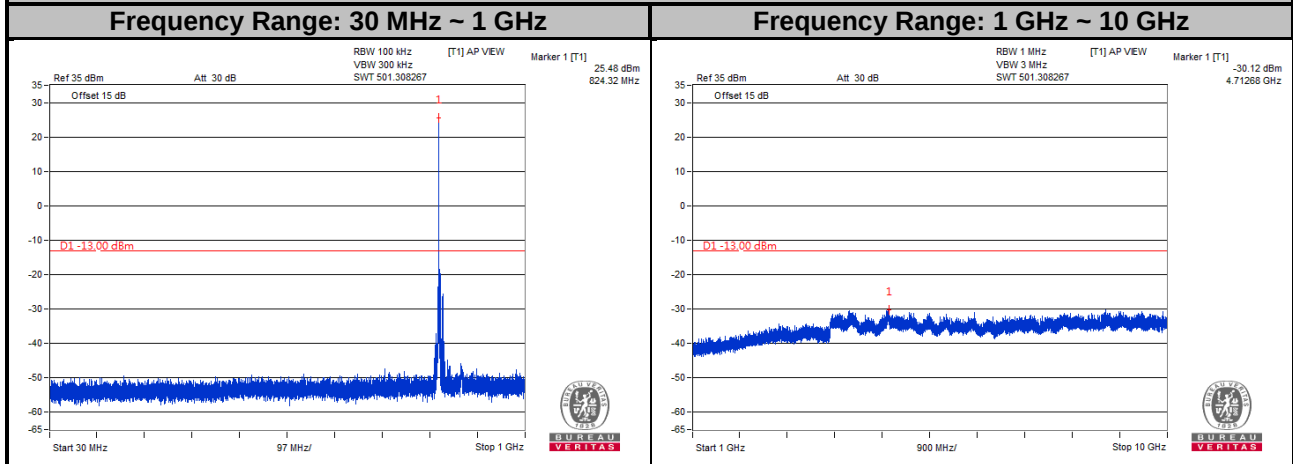

Channel 20525

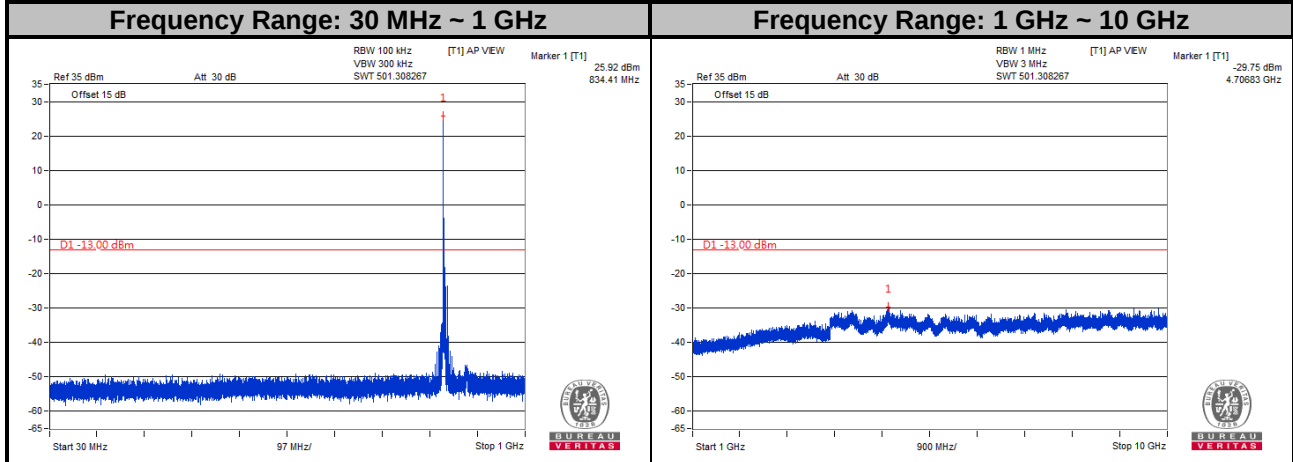

Channel 20625

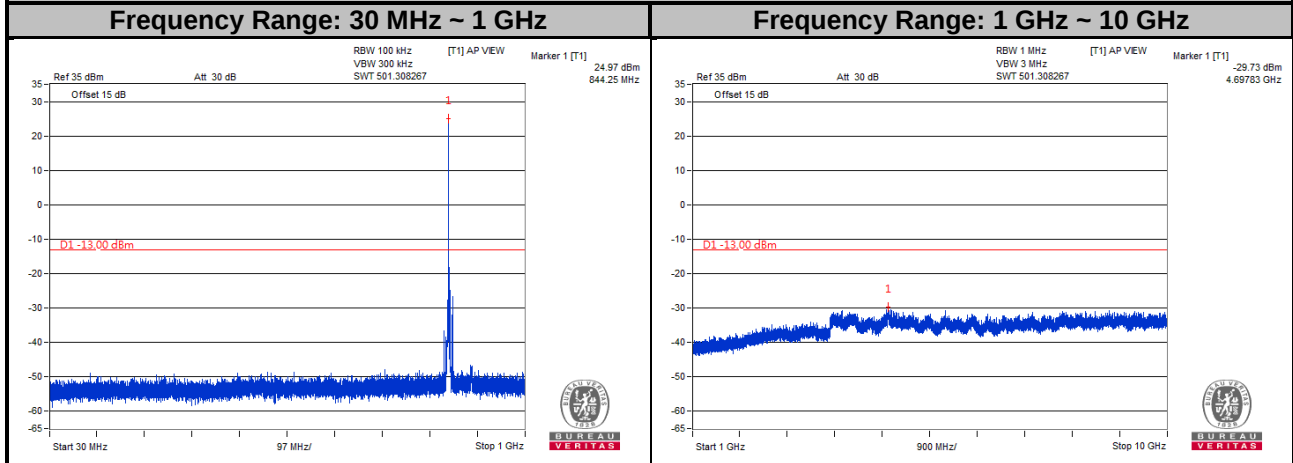


LTE Band 5


Channel Bandwidth: 10 MHz

Channel 20450

Frequency Range: 30 MHz ~ 1 GHz

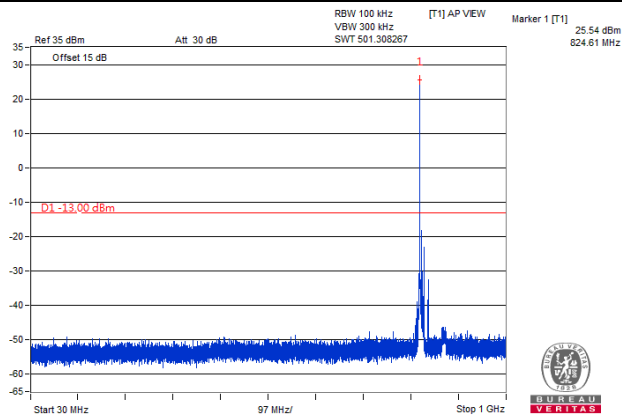


Frequency Range: 1 GHz ~ 10 GHz

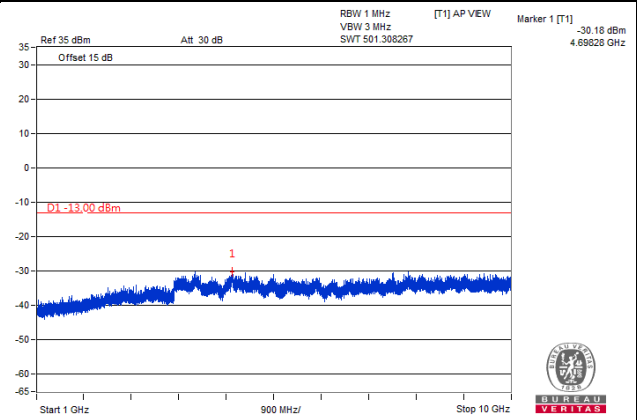


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

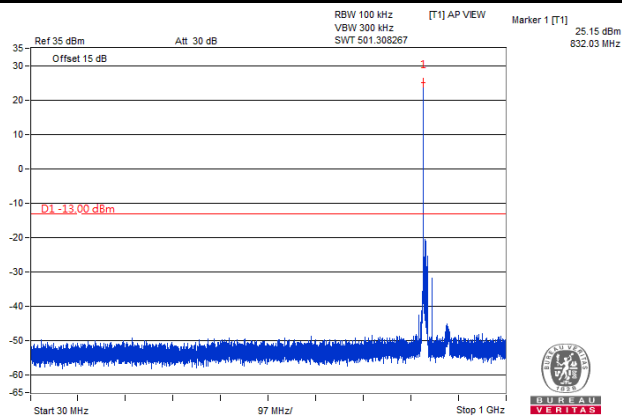


Frequency Range: 1 GHz ~ 10 GHz

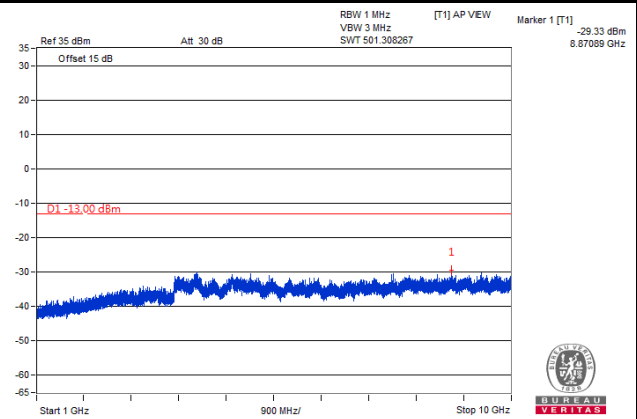


Channel 20600

Frequency Range: 30 MHz ~ 1 GHz

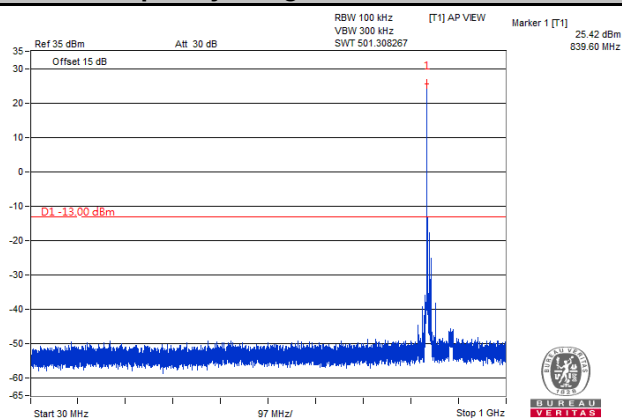

Frequency Range: 1 GHz ~ 10 GHz

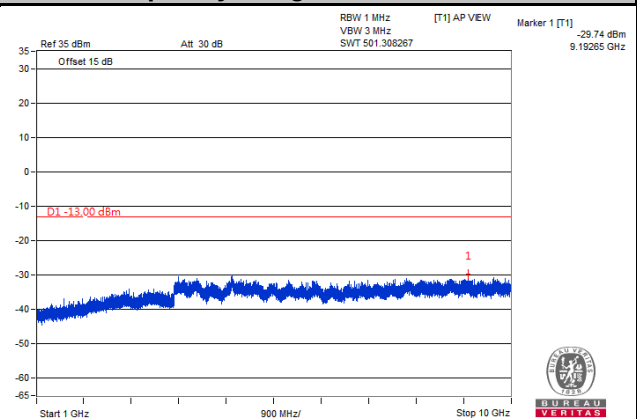

Mode B




LTE Band 5


Channel Bandwidth: 1.4 MHz

Channel 20407

Frequency Range: 30 MHz ~ 1 GHz

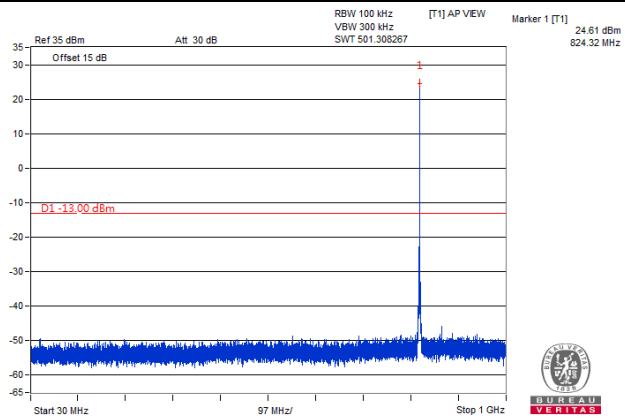


Frequency Range: 1 GHz ~ 10 GHz

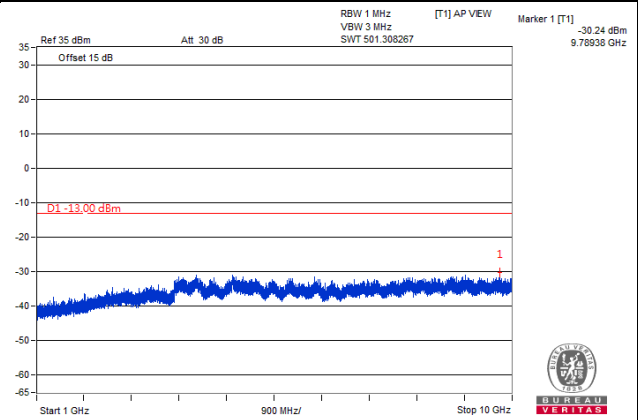


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

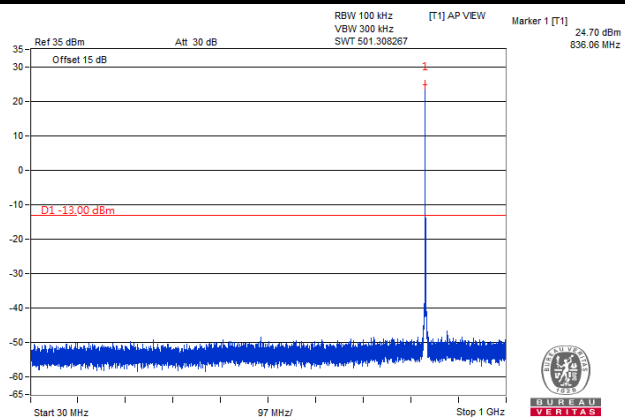


Frequency Range: 1 GHz ~ 10 GHz

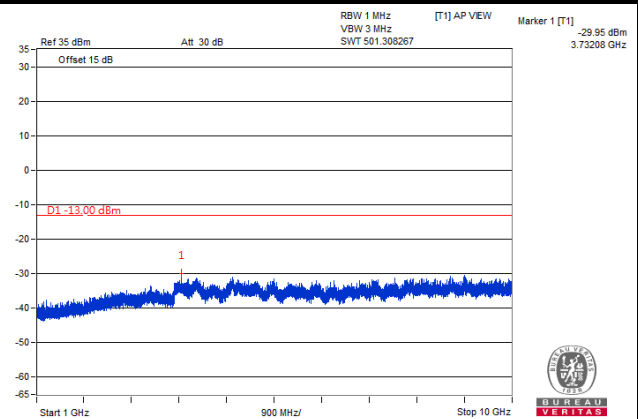


Channel 20643

Frequency Range: 30 MHz ~ 1 GHz

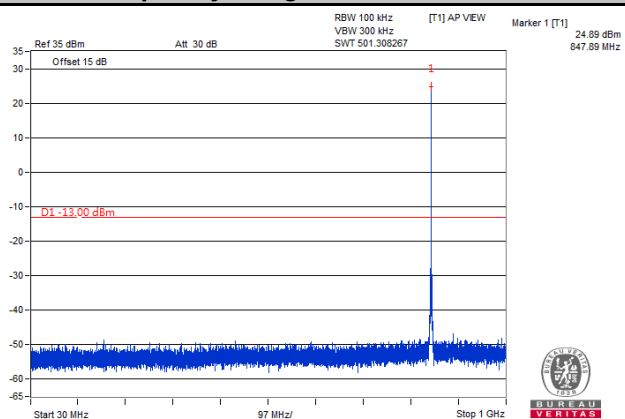

Frequency Range: 1 GHz ~ 10 GHz

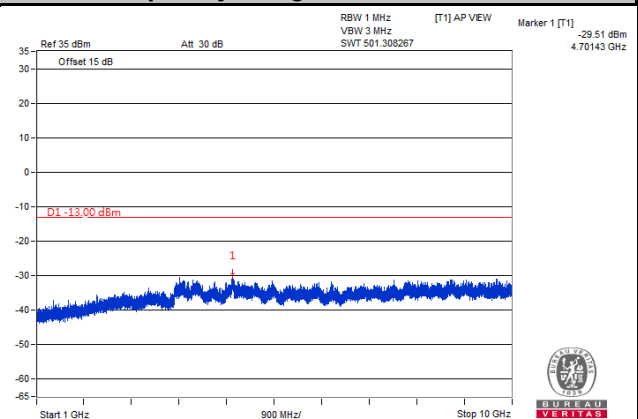


LTE Band 5


Channel Bandwidth: 3 MHz

Channel 20415

Frequency Range: 30 MHz ~ 1 GHz

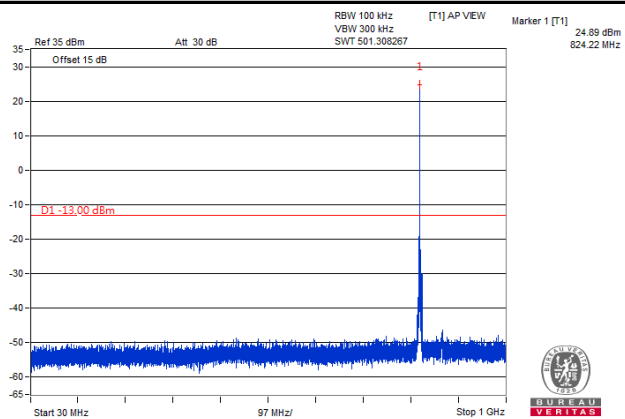


Frequency Range: 1 GHz ~ 10 GHz

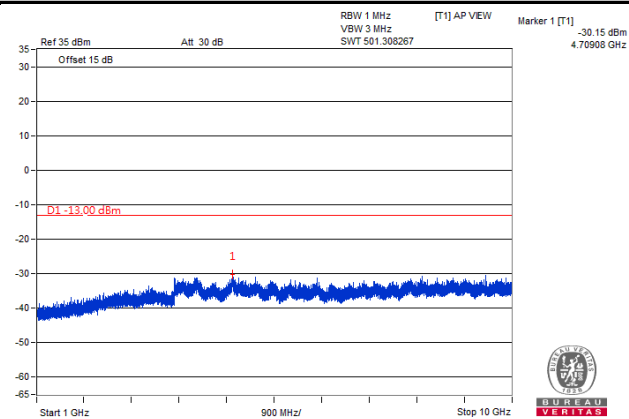


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

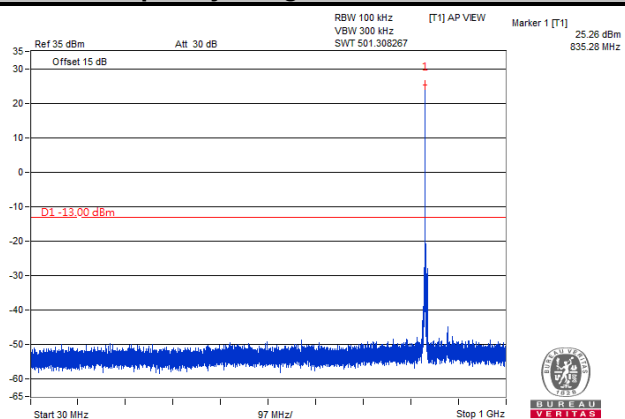


Frequency Range: 1 GHz ~ 10 GHz

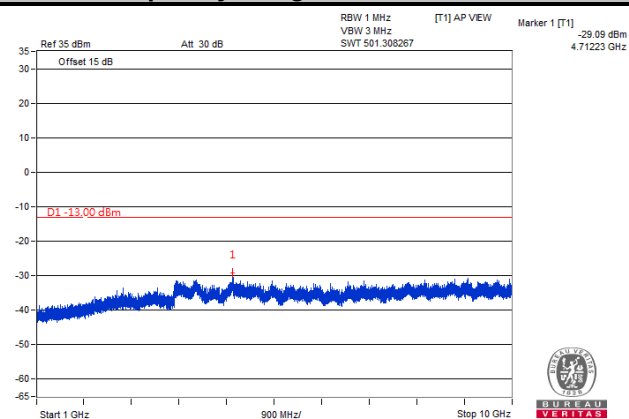


Channel 20635

Frequency Range: 30 MHz ~ 1 GHz

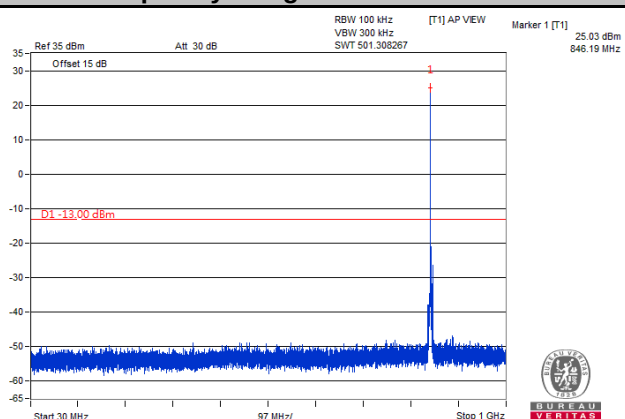

Frequency Range: 1 GHz ~ 10 GHz

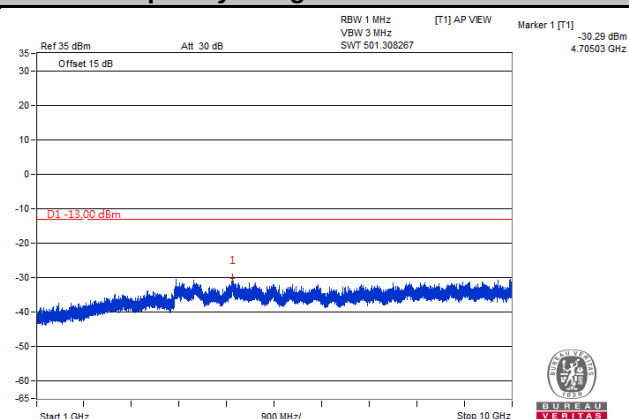


LTE Band 5


Channel Bandwidth: 5 MHz

Channel 20425

Frequency Range: 30 MHz ~ 1 GHz

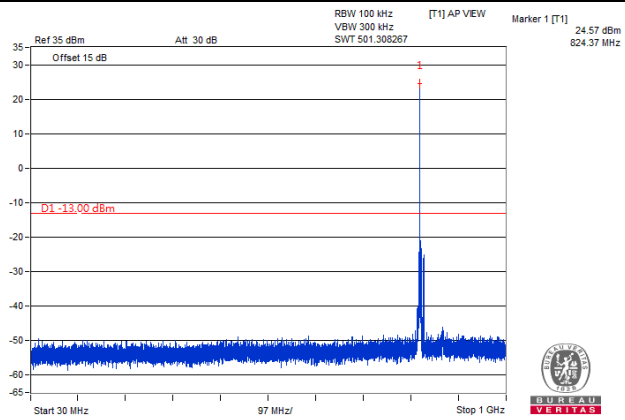


Frequency Range: 1 GHz ~ 10 GHz

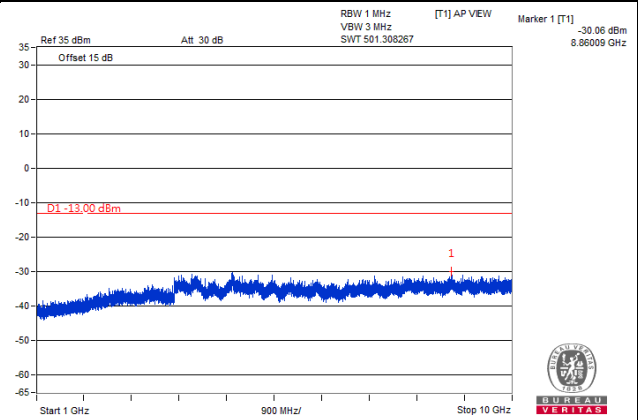


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

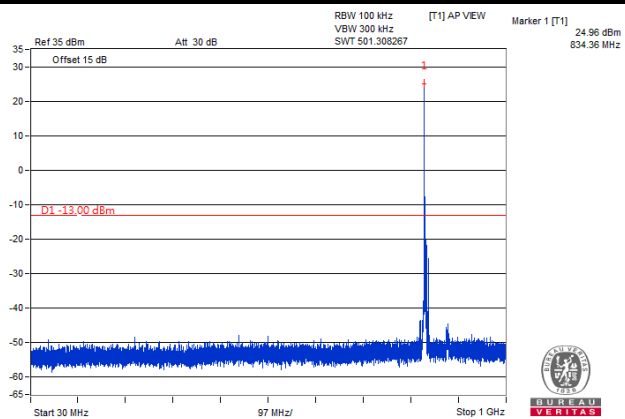


Frequency Range: 1 GHz ~ 10 GHz

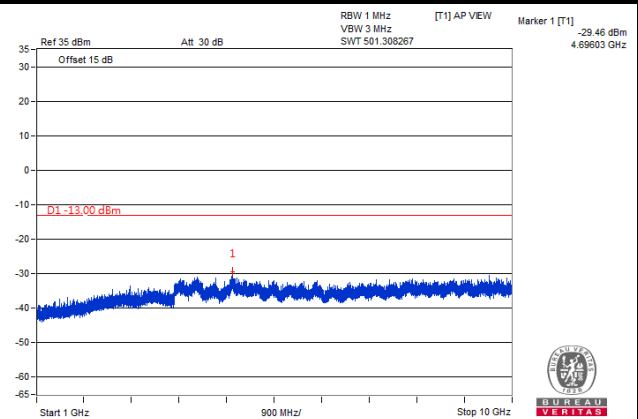


Channel 20625

Frequency Range: 30 MHz ~ 1 GHz

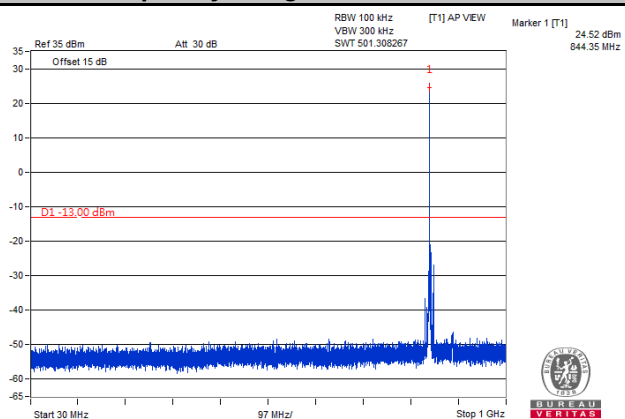

Frequency Range: 1 GHz ~ 10 GHz

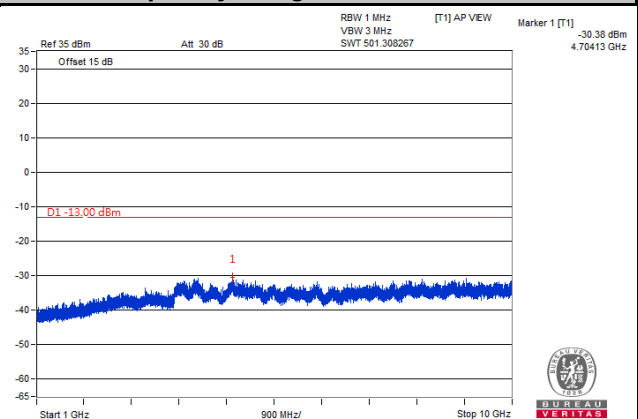


LTE Band 5


Channel Bandwidth: 10 MHz

Channel 20450

Frequency Range: 30 MHz ~ 1 GHz

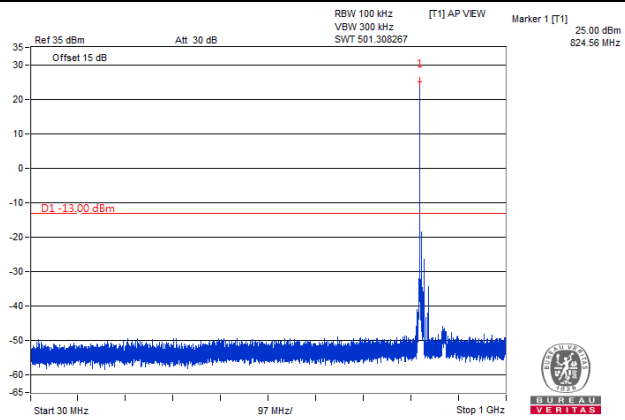


Frequency Range: 1 GHz ~ 10 GHz

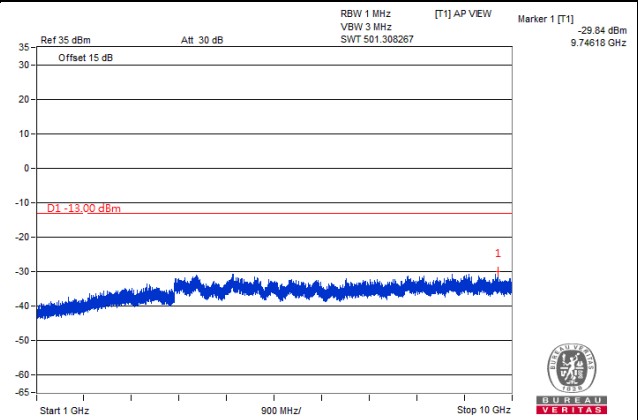


Channel 20525

Frequency Range: 30 MHz ~ 1 GHz

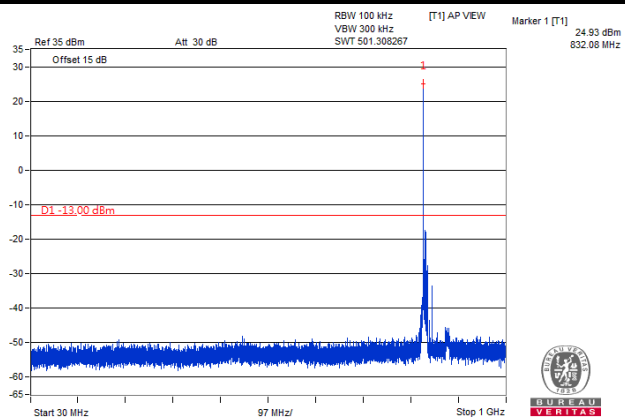


Frequency Range: 1 GHz ~ 10 GHz

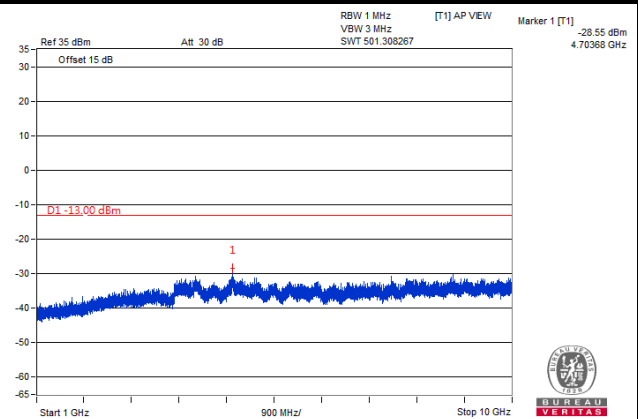


Channel 20600

Frequency Range: 30 MHz ~ 1 GHz

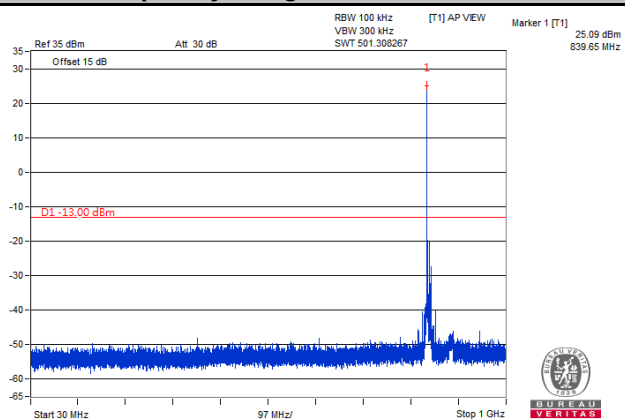

Frequency Range: 1 GHz ~ 10 GHz

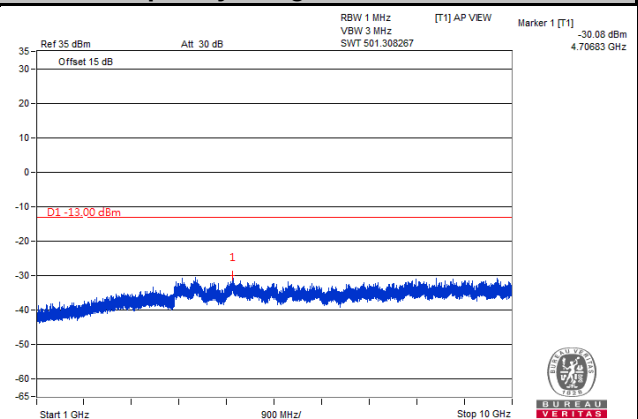

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.7.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15 dBi.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.7.3 Deviation from Test Standard


No deviation.

4.7.4 Test Setup

<Radiated Emission below or equal 1 GHz>

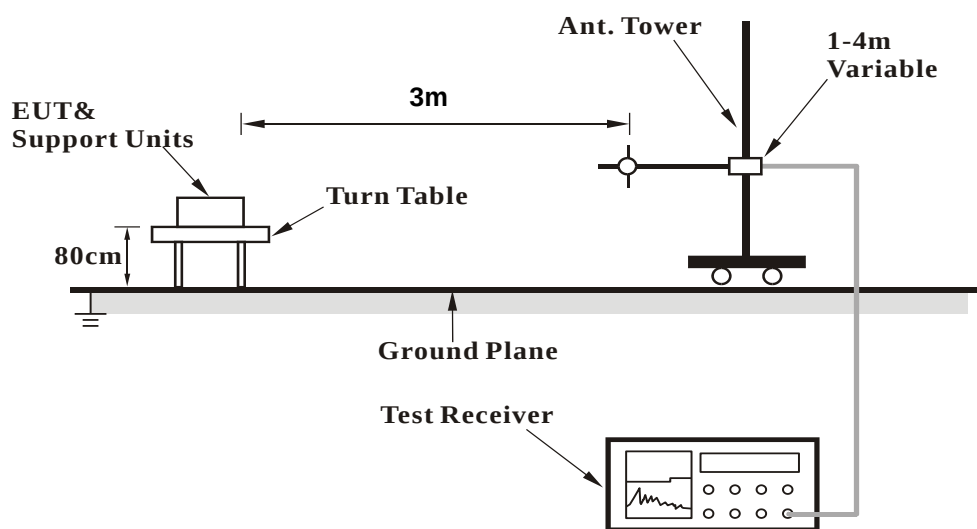

<Radiated Emission above 1 GHz>

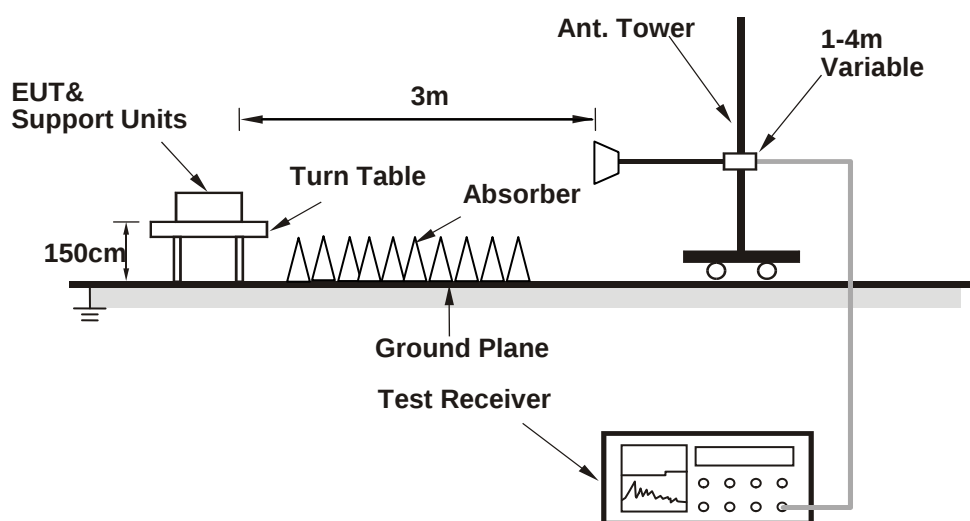

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

Mode A

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

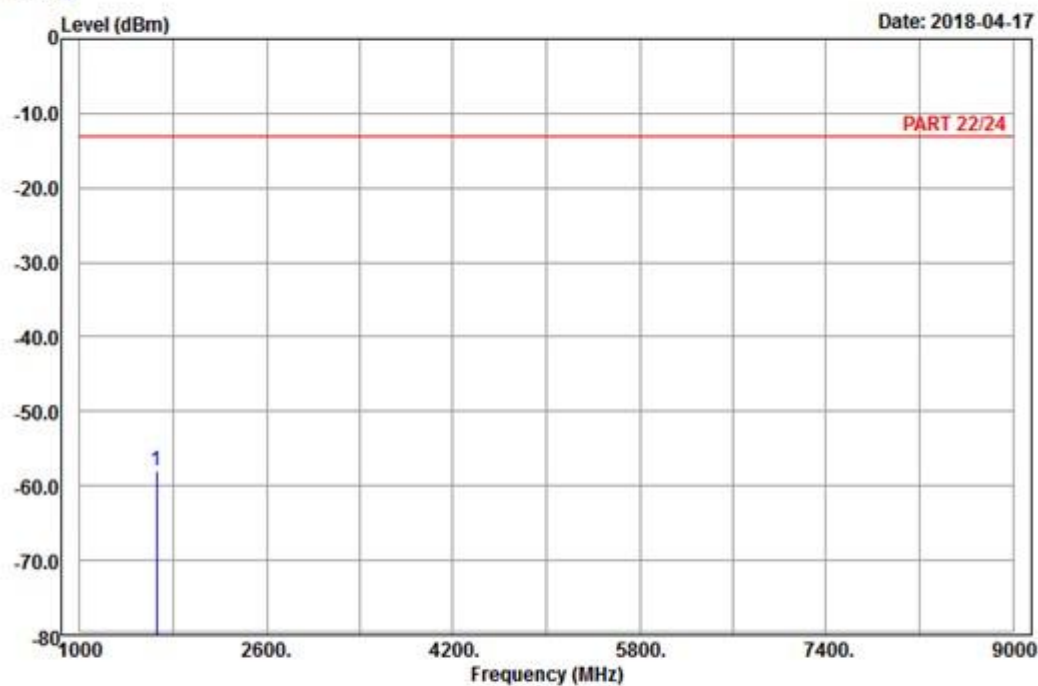

Site : 966 chamber 1

Condition: PART 22/24 Horizontal

Remark : Band V_Link_CH4132

Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.20	-57.94	-65.85	-13.00	-44.94	7.91	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

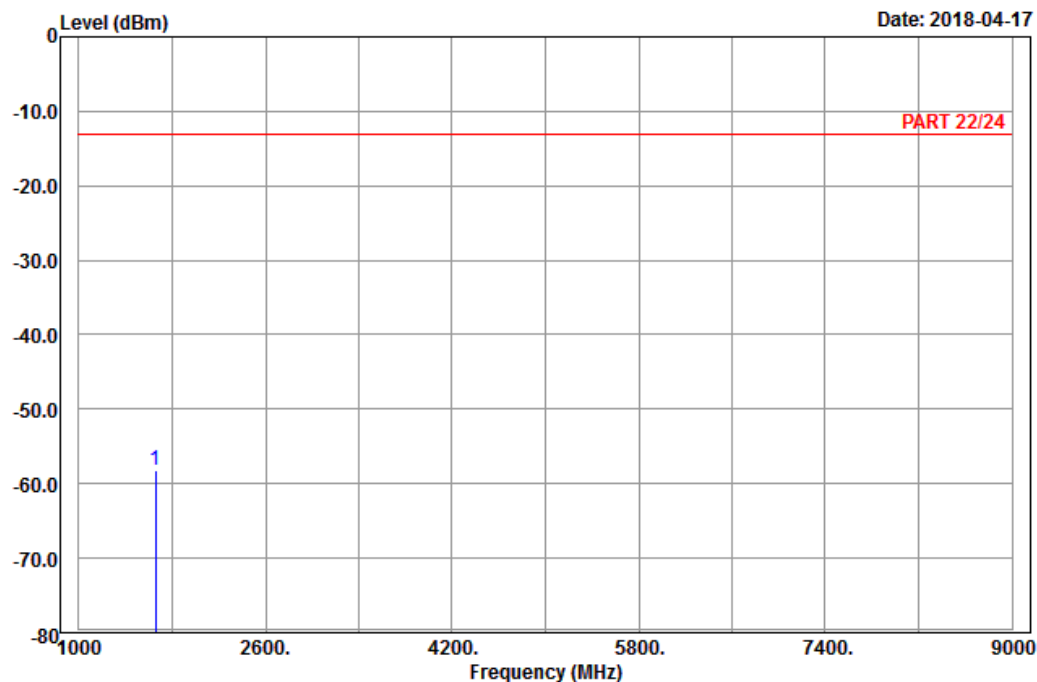

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4132
 Tested by: Karl Lee

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1 pp 1658.20	-58.12	-66.03	-13.00	-45.12	7.91	Peak	


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

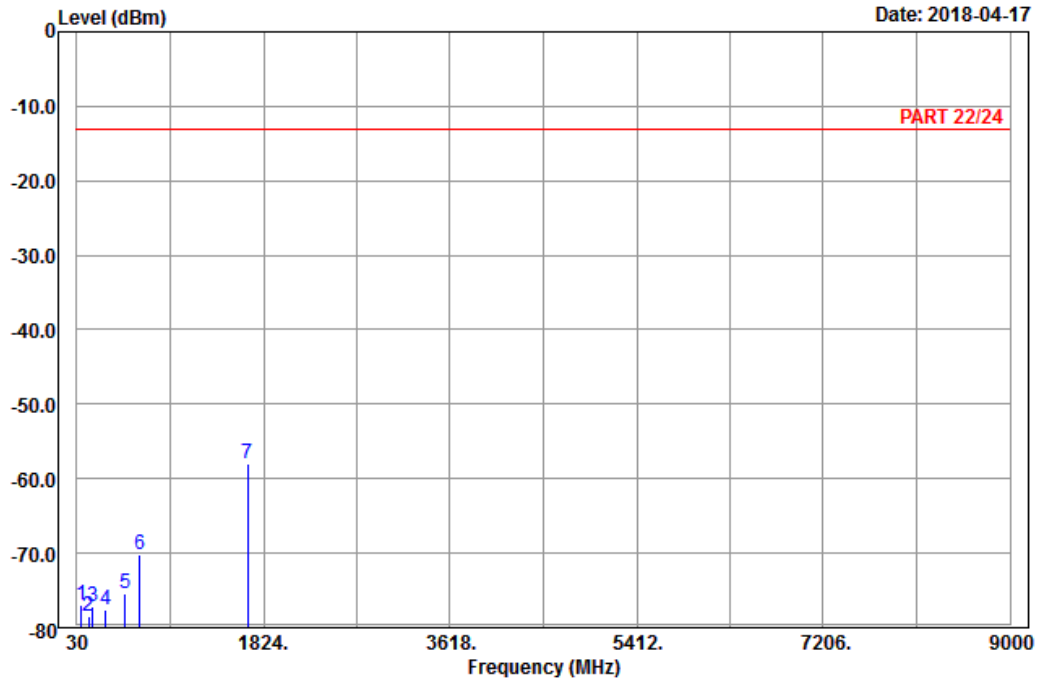

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : Band V_Link_CH4182
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	74.82	-77.00	-64.73	-13.00	-64.00	-12.27	Peak
2	143.94	-78.51	-70.72	-13.00	-65.51	-7.79	Peak
3	182.28	-77.23	-71.62	-13.00	-64.23	-5.61	Peak
4	309.80	-77.51	-71.66	-13.00	-64.51	-5.85	Peak
5	492.50	-75.43	-70.37	-13.00	-62.43	-5.06	Peak
6	633.90	-70.13	-70.17	-13.00	-57.13	0.04	Peak
7 pp	1672.80	-58.04	-65.95	-13.00	-45.04	7.91	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-04-17

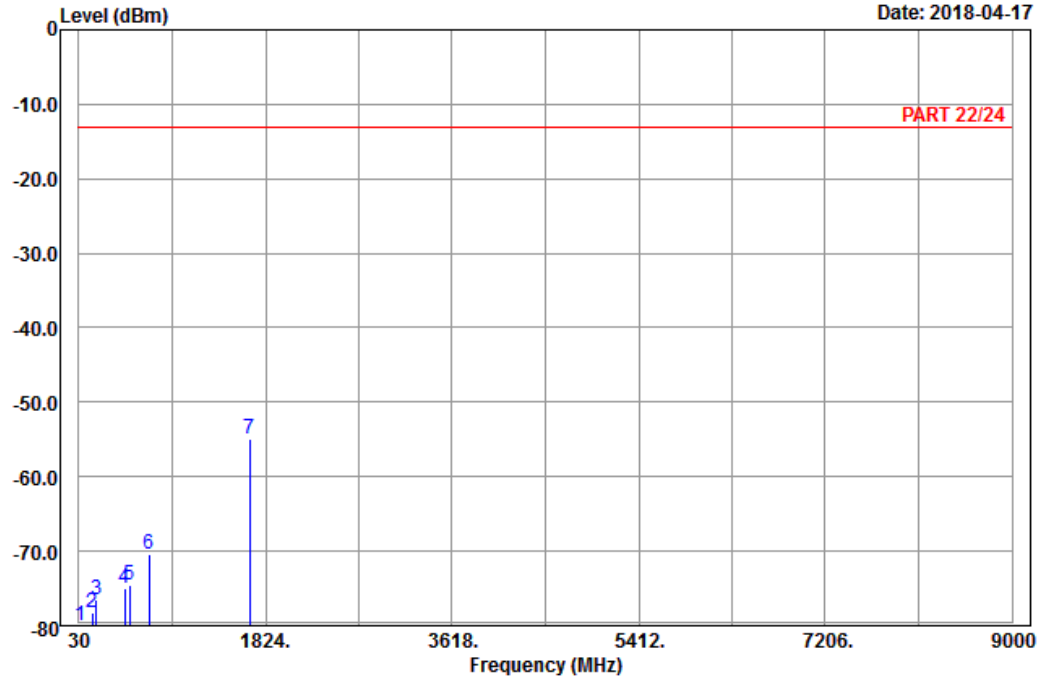

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : Band V_Link_CH4182
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.61	-79.99	-69.59	-13.00	-66.99	-10.40	Peak
2	159.33	-78.23	-70.53	-13.00	-65.23	-7.70	Peak
3	199.83	-76.55	-70.37	-13.00	-63.55	-6.18	Peak
4	468.70	-75.04	-70.67	-13.00	-62.04	-4.37	Peak
5	516.30	-74.47	-70.32	-13.00	-61.47	-4.15	Peak
6	701.10	-70.34	-69.94	-13.00	-57.34	-0.40	Peak
7 pp	1672.80	-55.01	-62.92	-13.00	-42.01	7.91	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

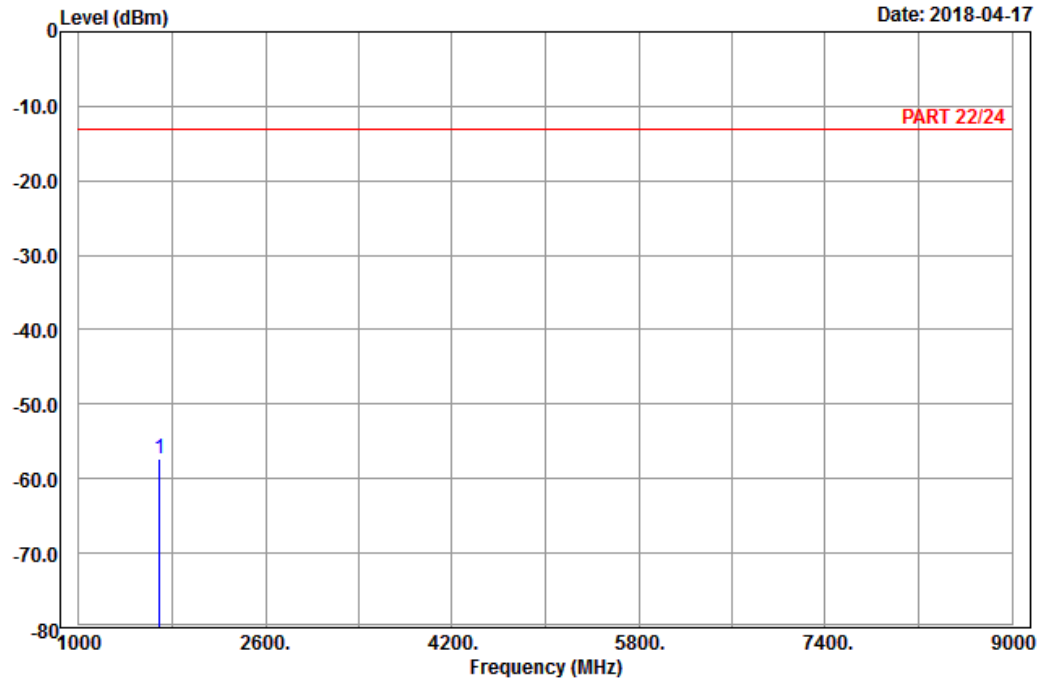

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : Band V_Link_CH4233
Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1693.20	-57.34	-65.48	-13.00	-44.34	8.14	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

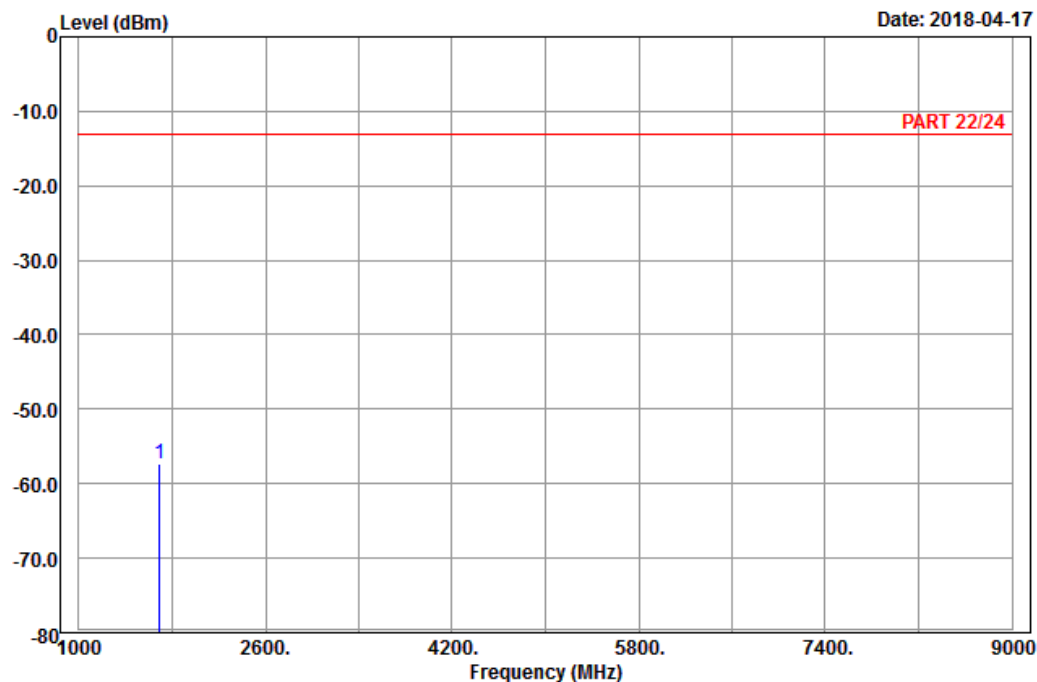

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4233
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1693.20	-57.41	-65.55	-13.00	-44.41	8.14	Peak


LTE Band 5
Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

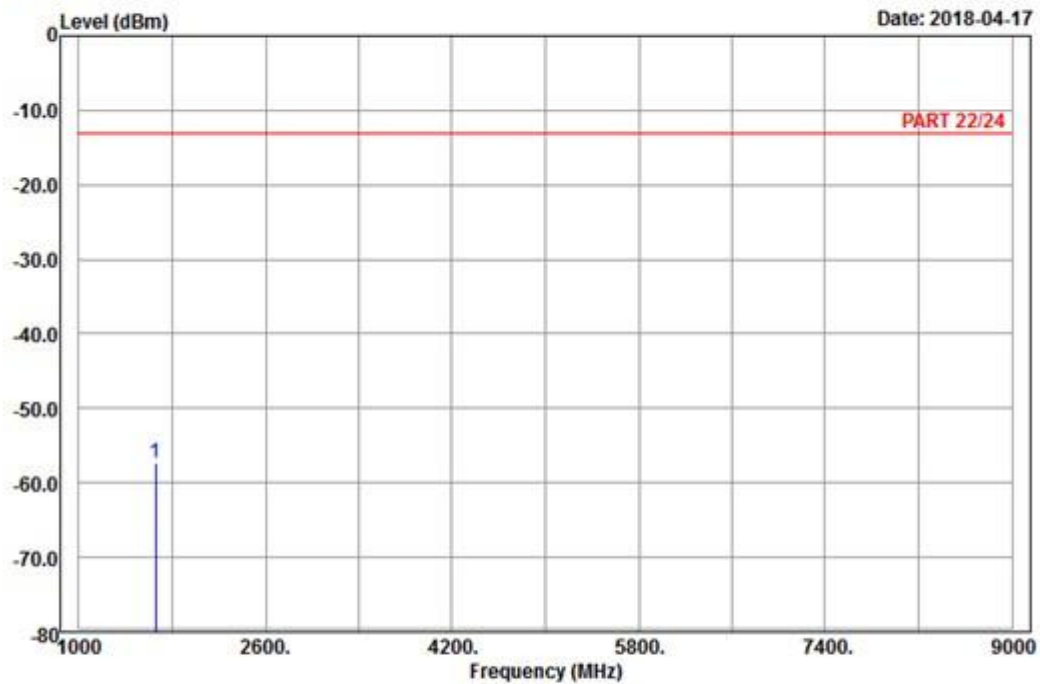

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 5_Link_CH20450
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.00	-57.33	-65.24	-13.00	-44.33	7.91	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-04-17

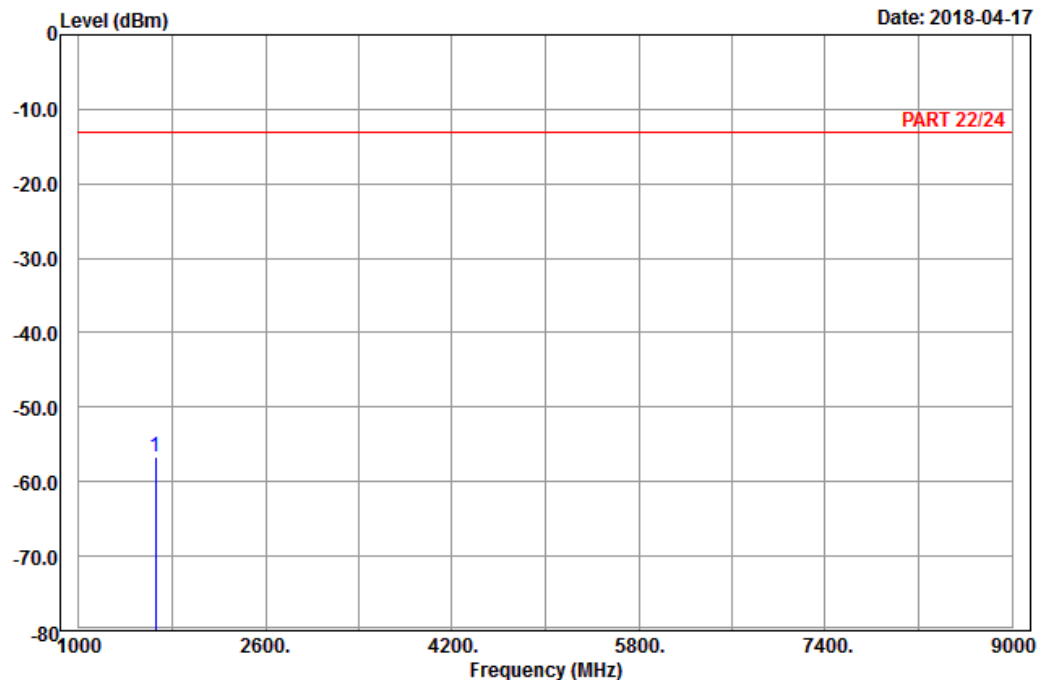

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 5_Link_CH20450
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.00	-56.64	-64.55	-13.00	-43.64	7.91	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

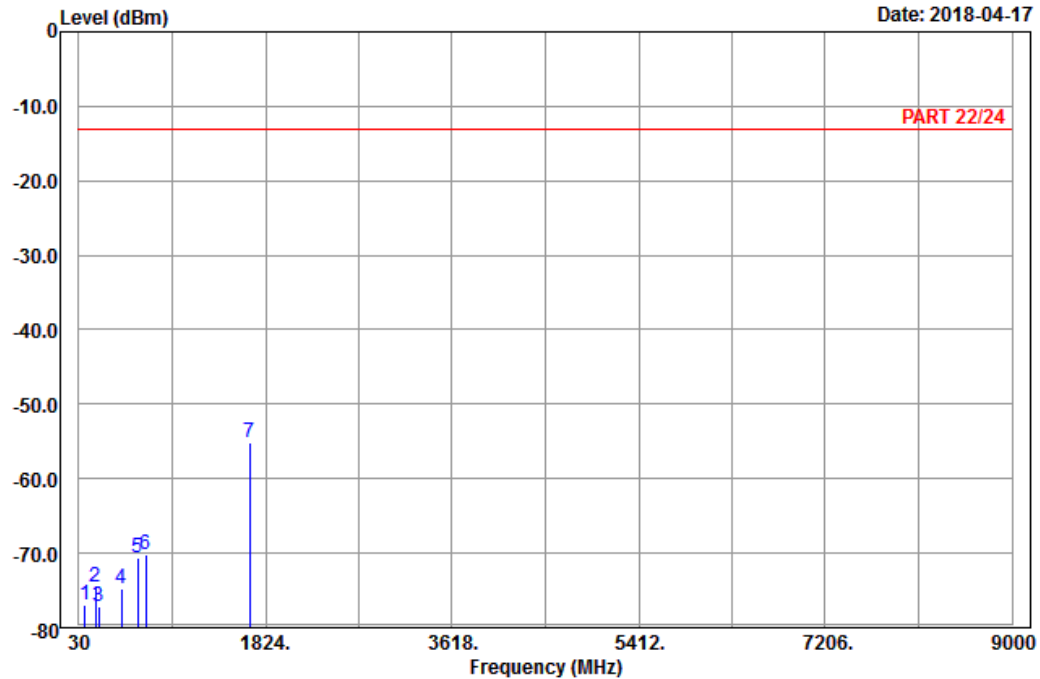

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	89.13	-77.03	-66.25	-13.00	-64.03	-10.78	Peak
2	187.95	-74.65	-68.95	-13.00	-61.65	-5.70	Peak
3	220.89	-77.18	-71.28	-13.00	-64.18	-5.90	Peak
4	437.20	-74.79	-71.22	-13.00	-61.79	-3.57	Peak
5	594.00	-70.63	-70.78	-13.00	-57.63	0.15	Peak
6	671.00	-70.09	-69.85	-13.00	-57.09	-0.24	Peak
7 pp	1673.00	-55.22	-63.13	-13.00	-42.22	7.91	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-04-17

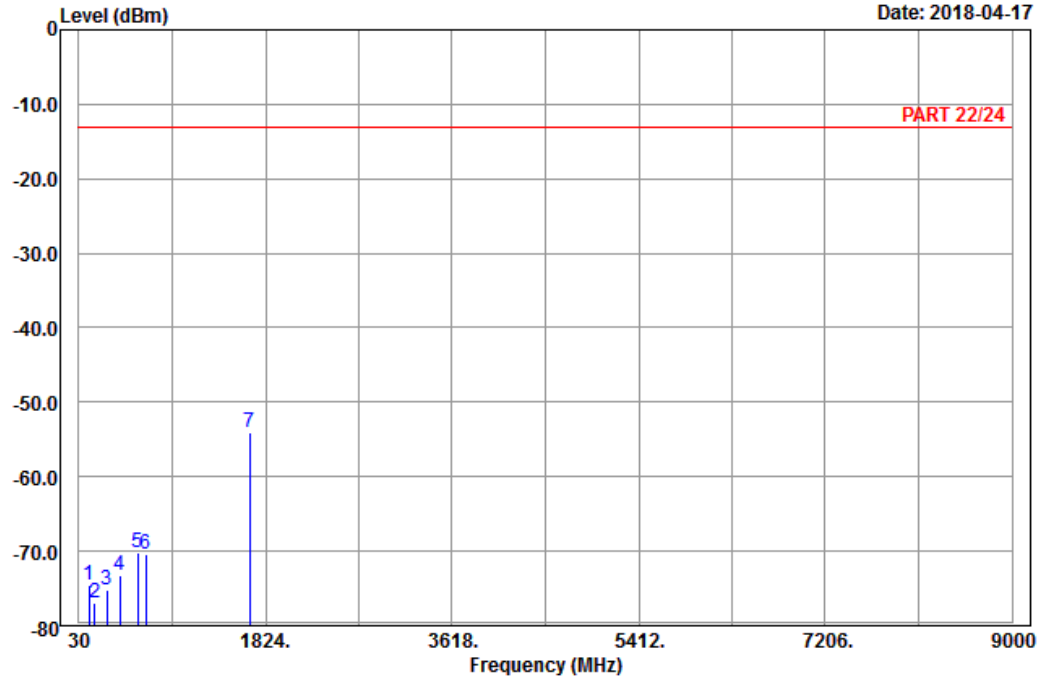

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 5_Link_CH20525
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	128.01	-74.51	-66.74	-13.00	-61.51	-7.77	Peak
2	182.01	-76.91	-71.30	-13.00	-63.91	-5.61	Peak
3	300.00	-75.29	-69.33	-13.00	-62.29	-5.96	Peak
4	422.50	-73.20	-69.95	-13.00	-60.20	-3.25	Peak
5	596.80	-70.23	-70.50	-13.00	-57.23	0.27	Peak
6	672.40	-70.32	-70.08	-13.00	-57.32	-0.24	Peak
7 pp	1673.00	-54.14	-62.05	-13.00	-41.14	7.91	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

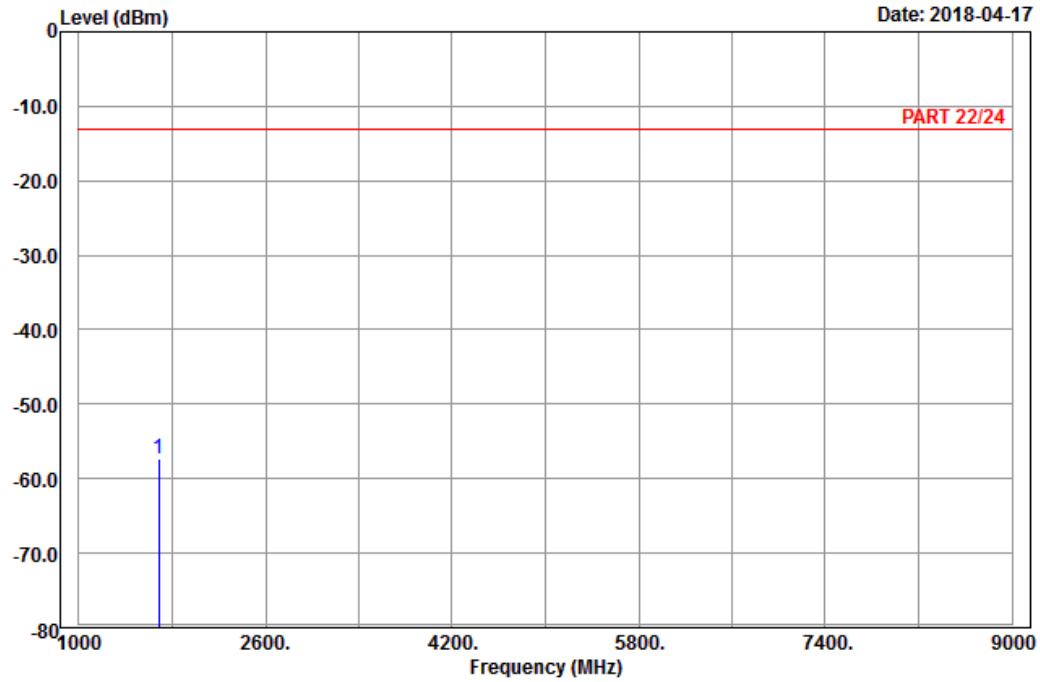

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 5_Link_CH20600
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1688.00	-57.32	-65.34	-13.00	-44.32	8.02	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2018-04-17

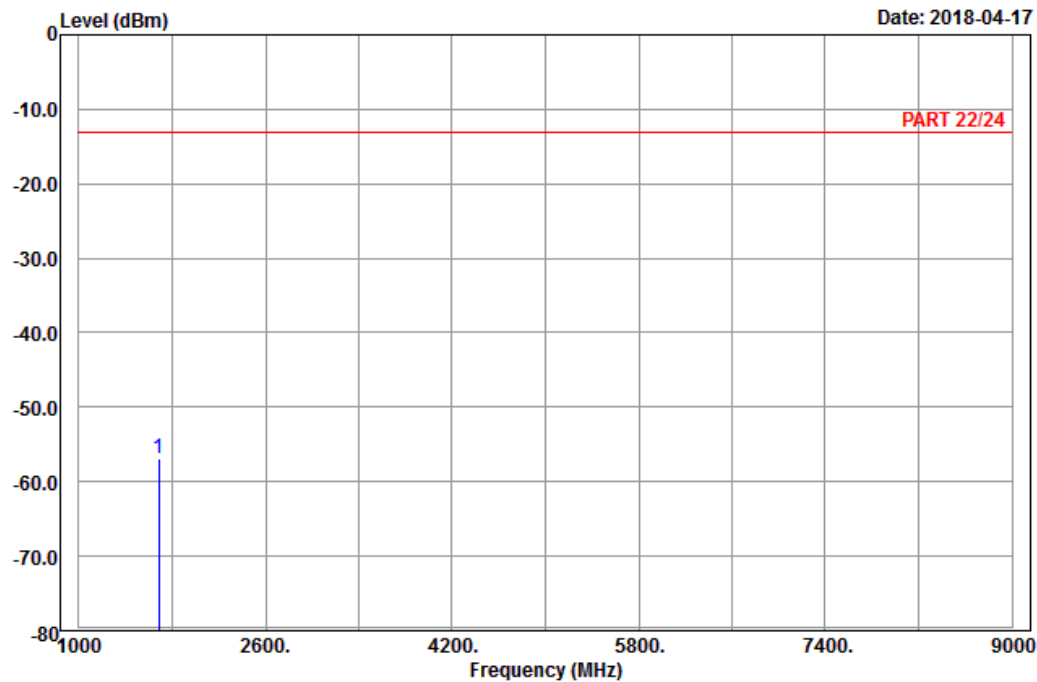

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 5_Link_CH20600
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1688.00	-56.97	-64.99	-13.00	-43.97	8.02	Peak

Mode B
WCDMA:
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2018-04-17

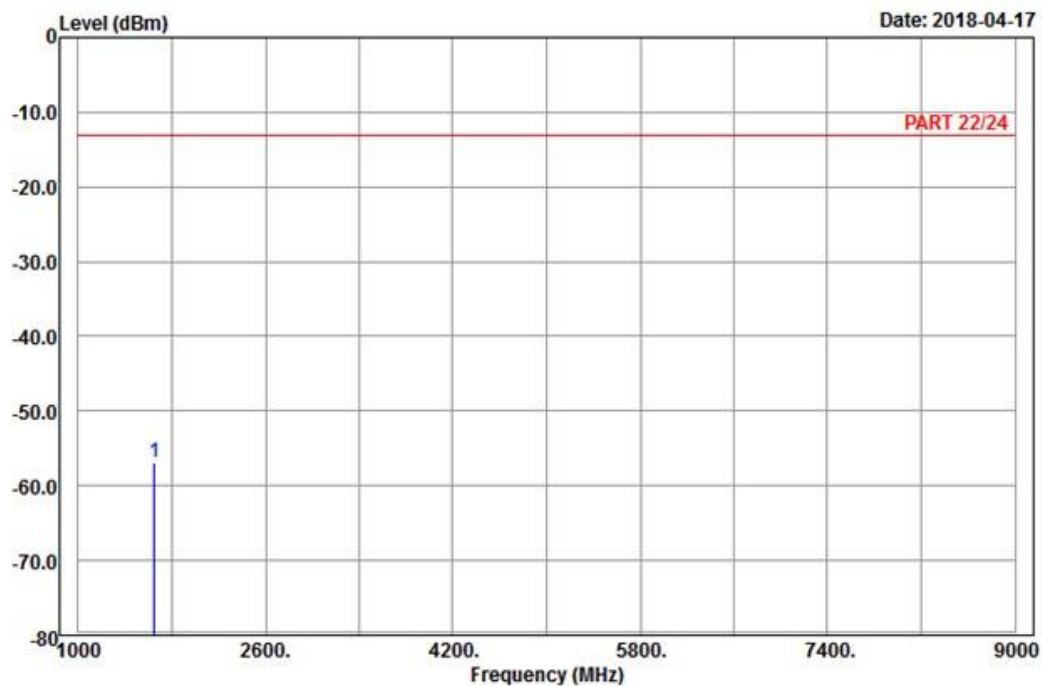

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : Band V_Link_CH4132
Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1652.80	-56.92	-64.65	-13.00	-43.92	7.73	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

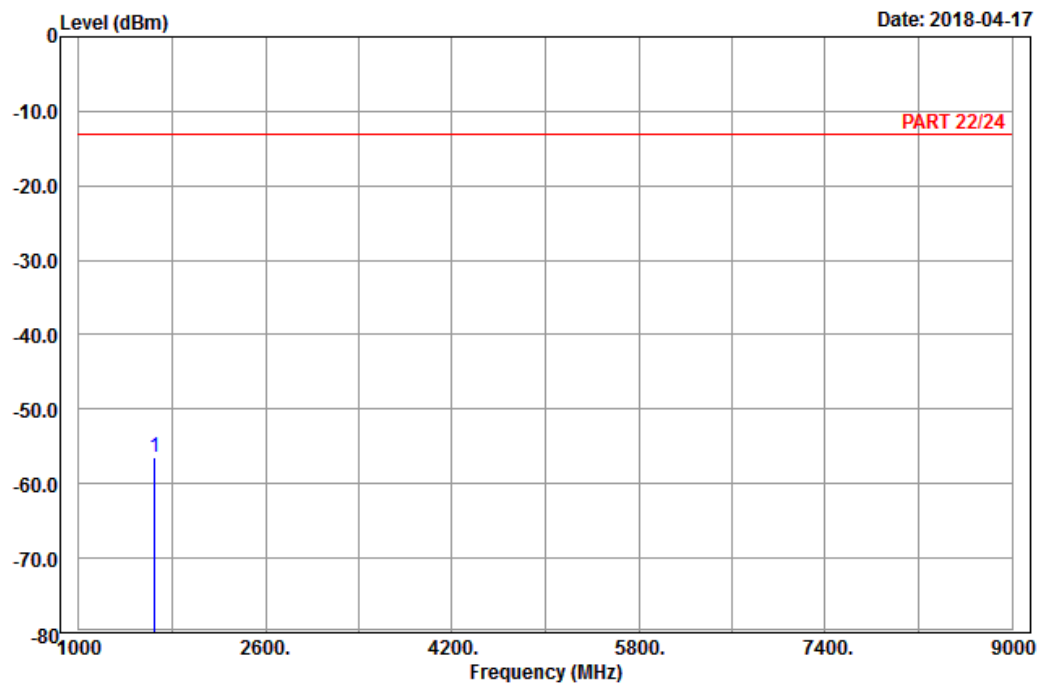

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4132
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1652.80	-56.37	-64.10	-13.00	-43.37	7.73	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

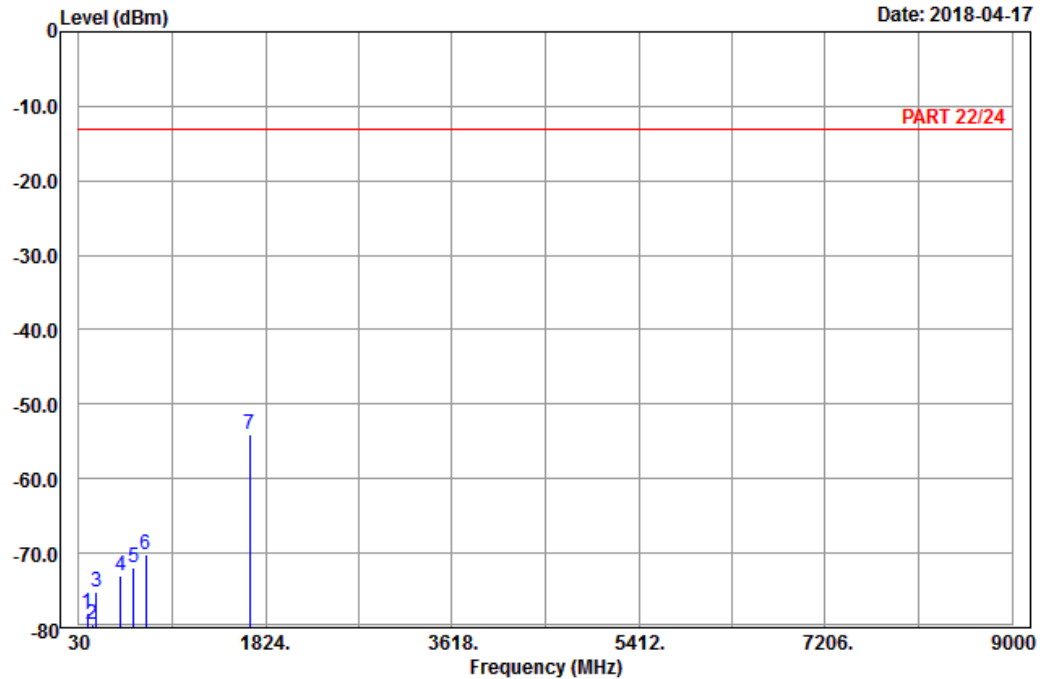

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : Band V_Link_CH4182
Tested by: Karl Lee

		Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	109.92	-78.14	-69.19	-13.00	-65.14	-8.95	Peak
2	160.95	-79.49	-71.92	-13.00	-66.49	-7.57	Peak
3	197.94	-75.13	-69.04	-13.00	-62.13	-6.09	Peak
4	433.00	-73.12	-69.66	-13.00	-60.12	-3.46	Peak
5	554.10	-71.90	-70.40	-13.00	-58.90	-1.50	Peak
6	670.30	-70.16	-69.93	-13.00	-57.16	-0.23	Peak
7 pp	1672.80	-54.14	-62.05	-13.00	-41.14	7.91	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-04-17

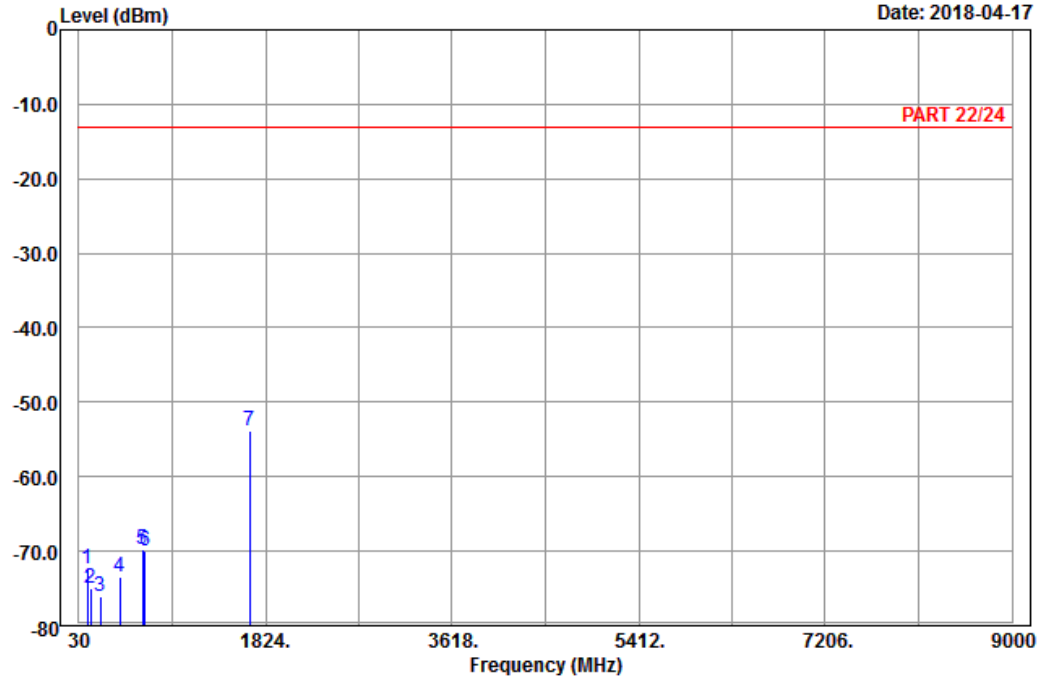

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : Band V_Link_CH4182
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	112.35	-72.46	-63.70	-13.00	-59.46	-8.76	Peak
2	141.51	-74.93	-67.19	-13.00	-61.93	-7.74	Peak
3	234.93	-76.12	-70.40	-13.00	-63.12	-5.72	Peak
4	421.80	-73.39	-70.16	-13.00	-60.39	-3.23	Peak
5	639.50	-69.86	-69.85	-13.00	-56.86	-0.01	Peak
6	667.50	-70.03	-69.81	-13.00	-57.03	-0.22	Peak
7 pp	1672.80	-53.82	-61.73	-13.00	-40.82	7.91	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

Date: 2018-04-17

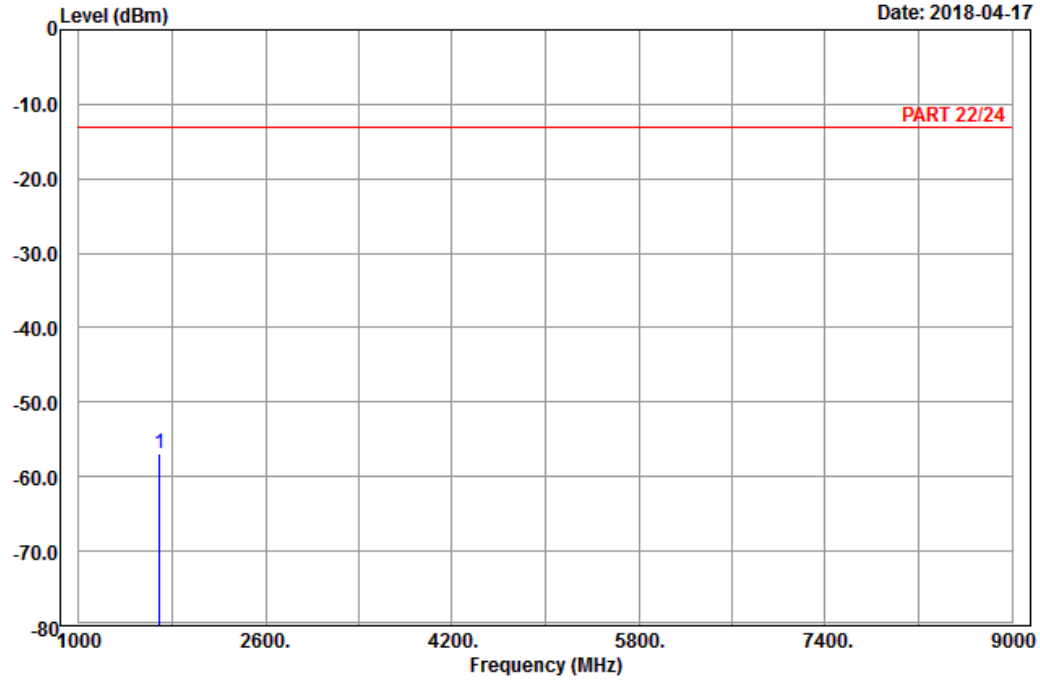

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : Band V_Link_CH4233
Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1693.20	-56.97	-65.11	-13.00	-43.97	8.14	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

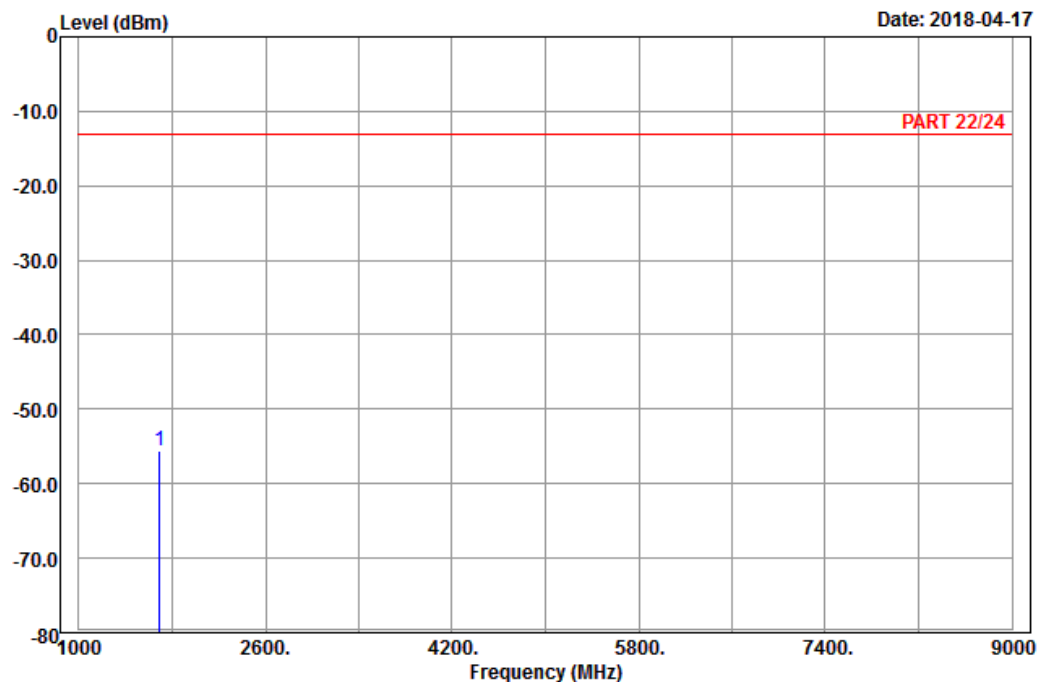

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band V_Link_CH4233
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1693.20	-55.64	-63.78	-13.00	-42.64	8.14	Peak

LTE Band 5
Channel Bandwidth: 10 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2018-04-17

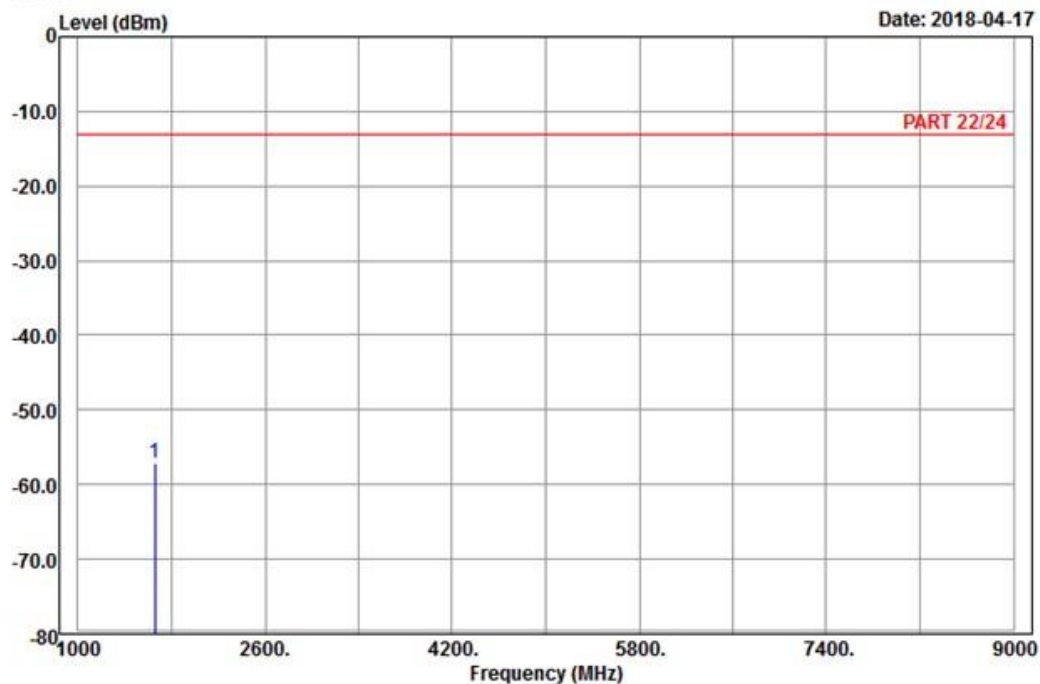

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 5_Link_CH20450
Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.00	-57.07	-64.98	-13.00	-44.07	7.91	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

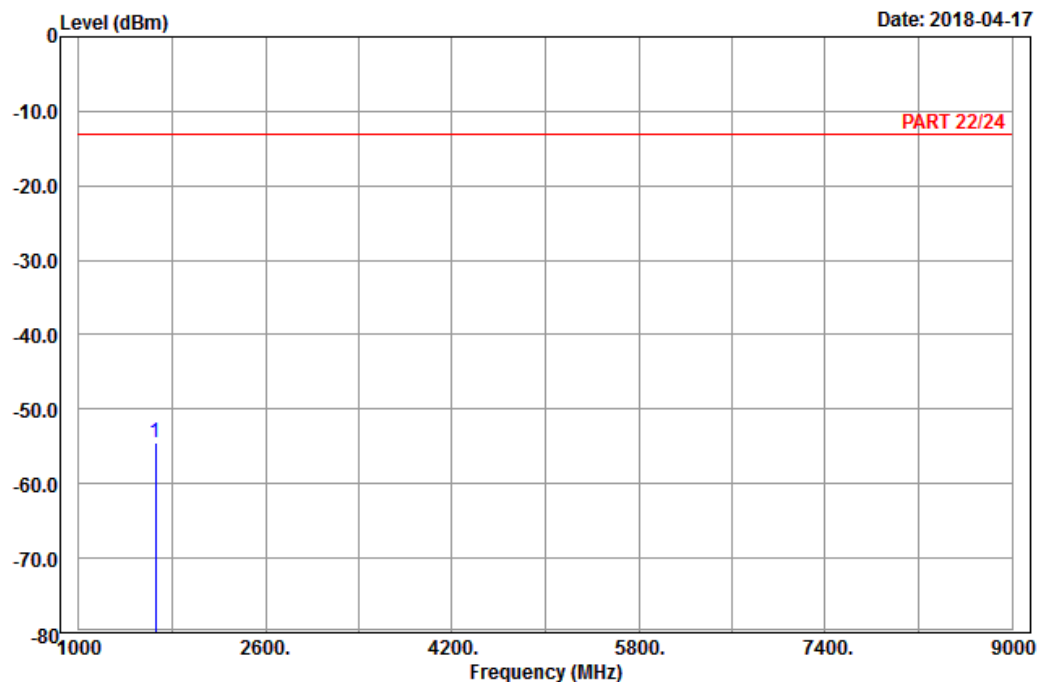

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20450
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.00	-54.55	-62.46	-13.00	-41.55	7.91	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

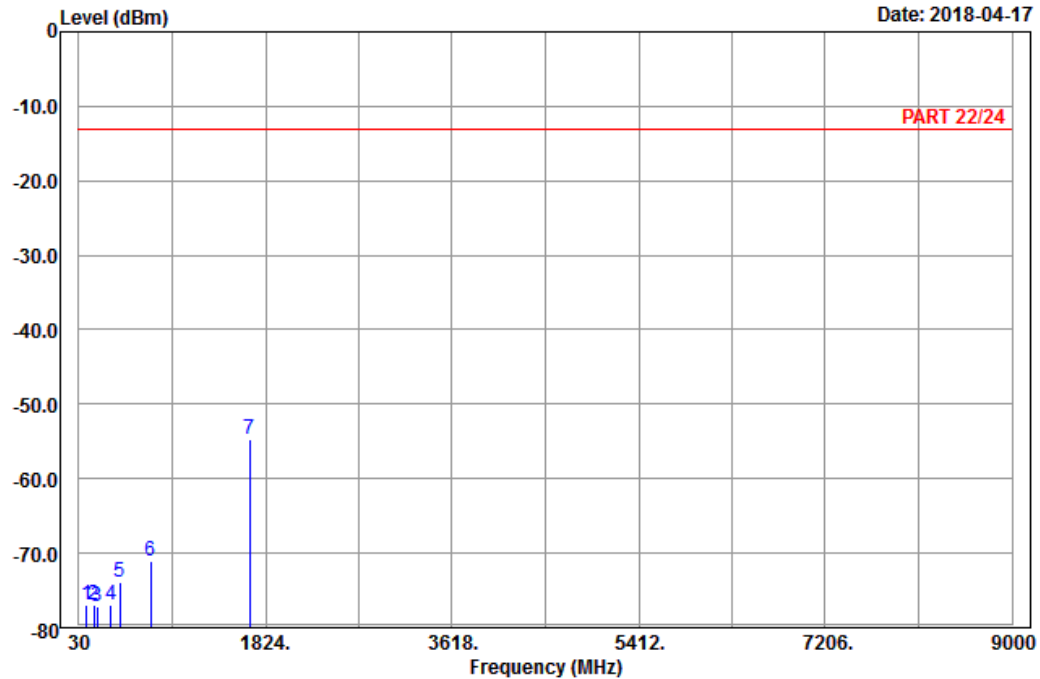

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 5_Link_CH20525
 Tested by: Karl Lee

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	102.36	-76.93	-67.16	-13.00	-63.93	-9.77	Peak
2	174.72	-76.95	-70.76	-13.00	-63.95	-6.19	Peak
3	201.72	-77.09	-70.93	-13.00	-64.09	-6.16	Peak
4	336.40	-77.04	-71.51	-13.00	-64.04	-5.53	Peak
5	426.00	-73.99	-70.68	-13.00	-60.99	-3.31	Peak
6	720.00	-71.00	-70.26	-13.00	-58.00	-0.74	Peak
7 pp	1673.00	-54.82	-62.73	-13.00	-41.82	7.91	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

Date: 2018-04-17

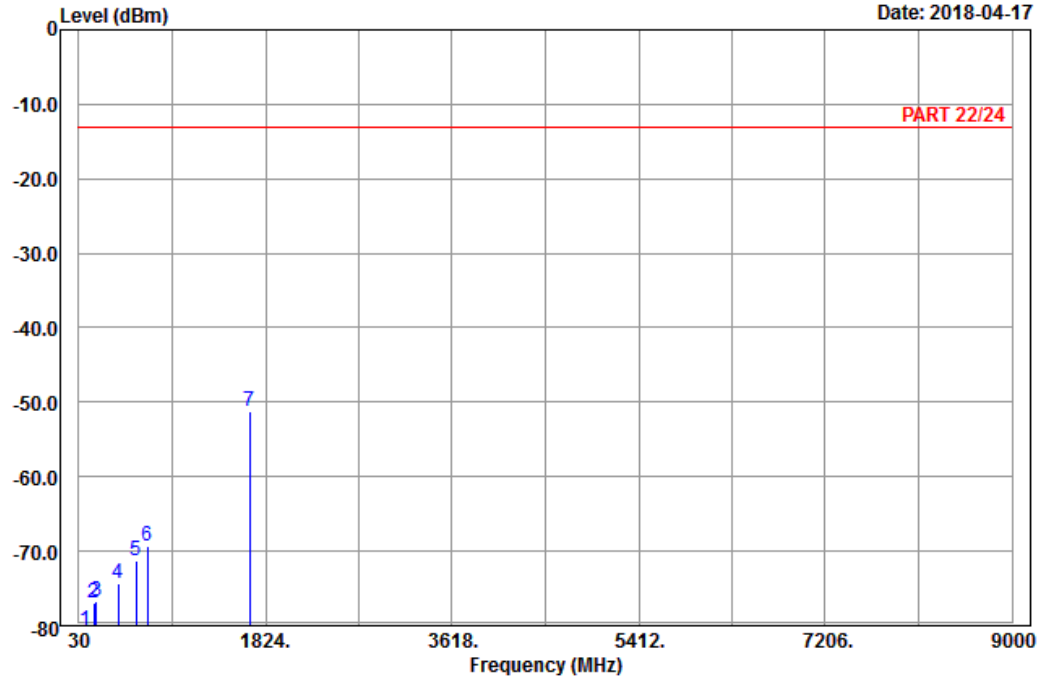

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 5_Link_CH20525
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	93.99	-80.67	-70.22	-13.00	-67.67	-10.45	Peak
2	171.21	-76.95	-70.45	-13.00	-63.95	-6.50	Peak
3	199.02	-76.62	-70.48	-13.00	-63.62	-6.14	Peak
4	407.10	-74.33	-71.42	-13.00	-61.33	-2.91	Peak
5	581.40	-71.21	-70.83	-13.00	-58.21	-0.38	Peak
6	686.40	-69.42	-69.11	-13.00	-56.42	-0.31	Peak
7 pp	1673.00	-51.22	-59.13	-13.00	-38.22	7.91	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

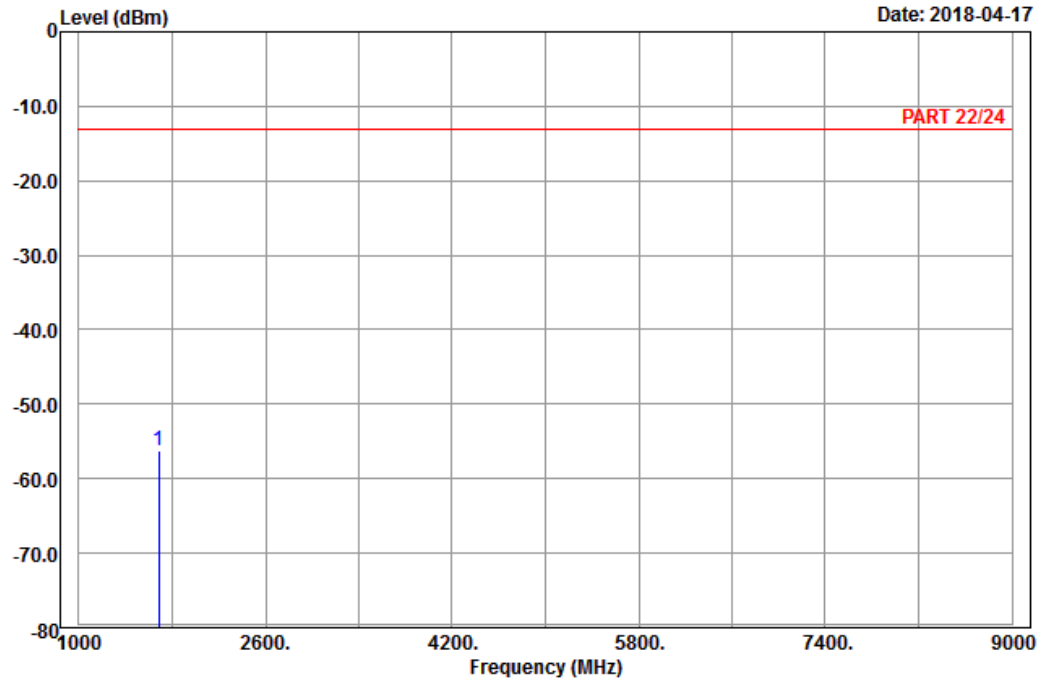

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 5_Link_CH20600
Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1688.00	-56.14	-64.16	-13.00	-43.14	8.02	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

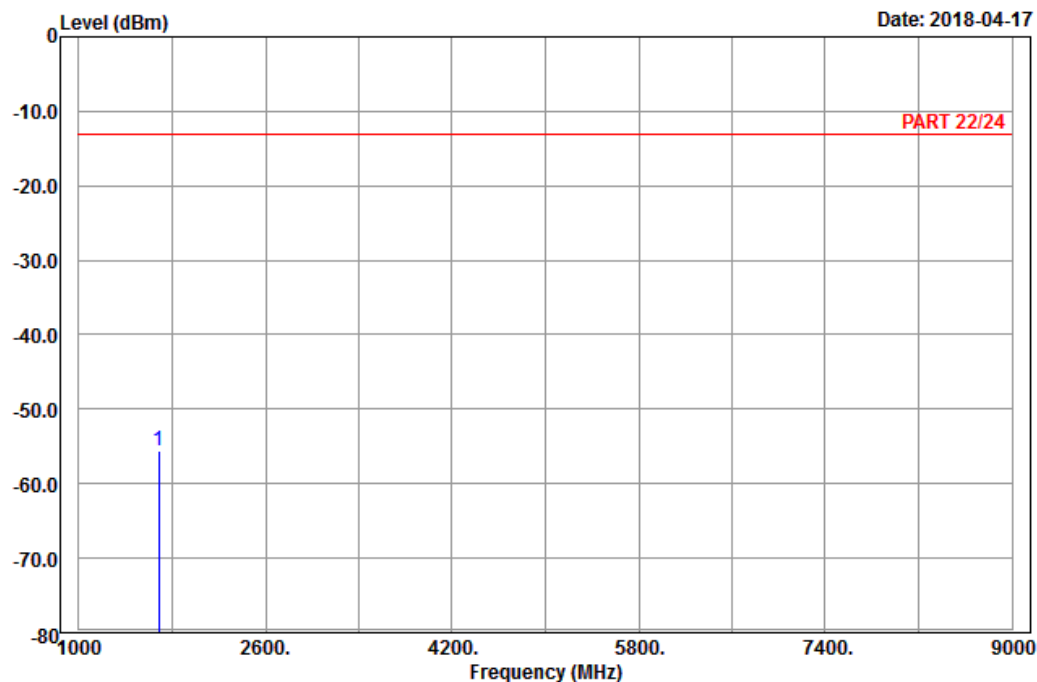

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 5_Link_CH20600
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1688.00	-55.67	-63.69	-13.00	-42.67	8.02	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---