



JQA Application No. : KL80050684R
Model No. : 550SH
FCC ID : APYHRO00047

Regulation : CFR 47 FCC Rules Part 24
Issue Date : February 15, 2006

Page 1 of 7

Attachment A
Occupied Bandwidth Measurement
PCS1900

Test Date: February 10, 2006
Temp.: 18 °C ; Humi.: 37 %


CH No.	Transmitting Frequency(MHz)	26dB Bandwidth	99% Bandwidth	Data Page
512	1850.200	319.0 kHz	244.5 kHz	Page 2
661	1880.000	317.9 kHz	242.5 kHz	Page 3
810	1909.800	318.9 kHz	242.6 kHz	Page 4

Note) The point shown on "_____" is the Maximum Margin Point.

Tester : Shigeru Kinoshita


Occupied Bandwidth Measurement

Transmitting Frequency : 1850.200MHz (512 ch)

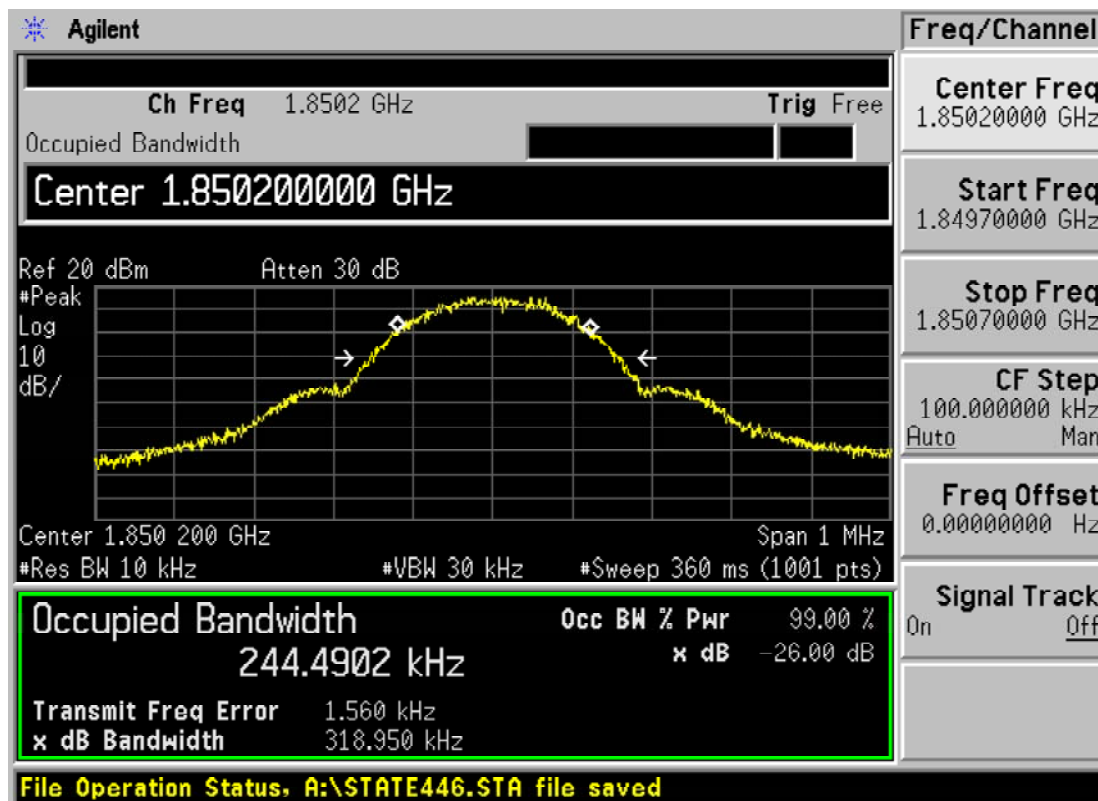

Occupied Bandwidth Measurement

Transmitting Frequency : 1880.000MHz (661 ch)

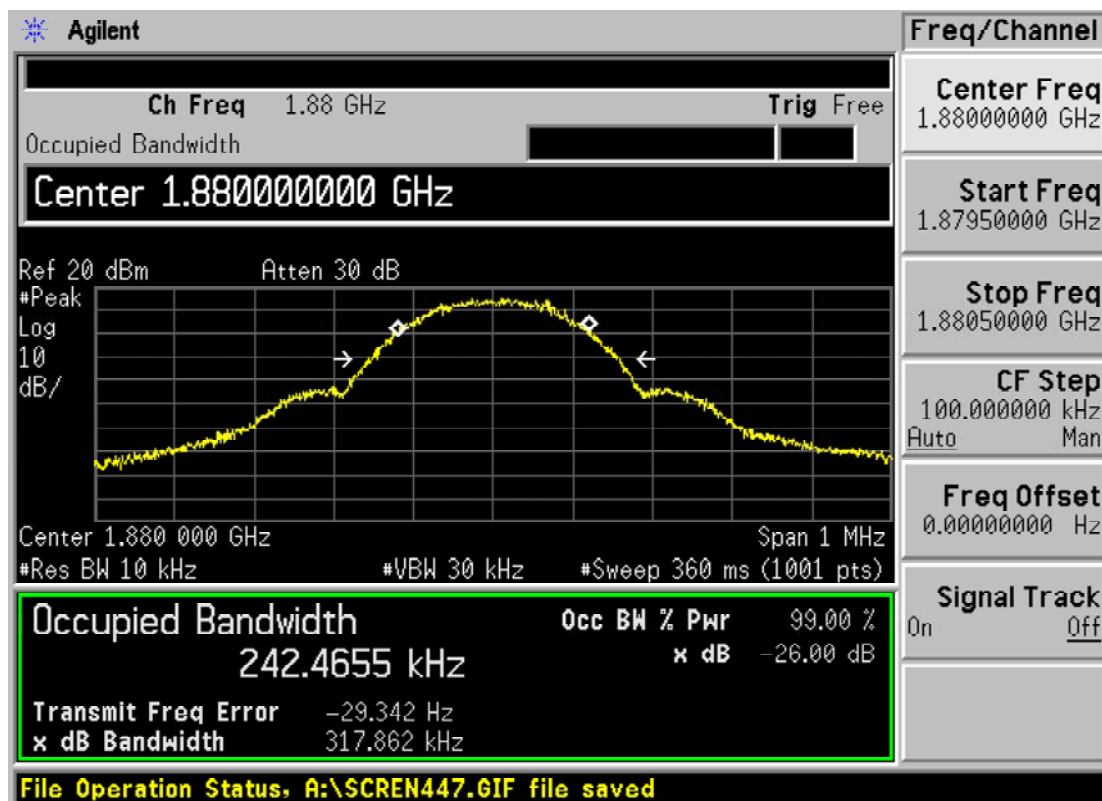

Occupied Bandwidth Measurement

Transmitting Frequency : 1909.800MHz (810 ch)



Band-Edge Emission Measurement PCS1900

Test Date: February 10, 2006
Temp.: 18 °C ; Humi.: 37 %

1) Low Band-Edge Measurement

CH	Transmitting Frequency(MHz)	Band-Edge Frequency(MHz)	Band-Edge Level[dBc]	Data Page
512	1850.200	1850.000	-42.1	Page 6

2) High Band-Edge Measurement

CH	Transmitting Frequency(MHz)	Band-Edge Frequency(MHz)	Band-Edge Level[dBc]	Data Page
810	1909.800	1910.000	-43.1	Page 7


Note) The point shown on " _____ " is the Maximum Point.

Tester : Shigeru Kinoshita

Band-Edge Emission Measurement

Transmitting Frequency : 1850.200MHz (512 ch)

Band-Edge Frequency : 1850.000 MHz

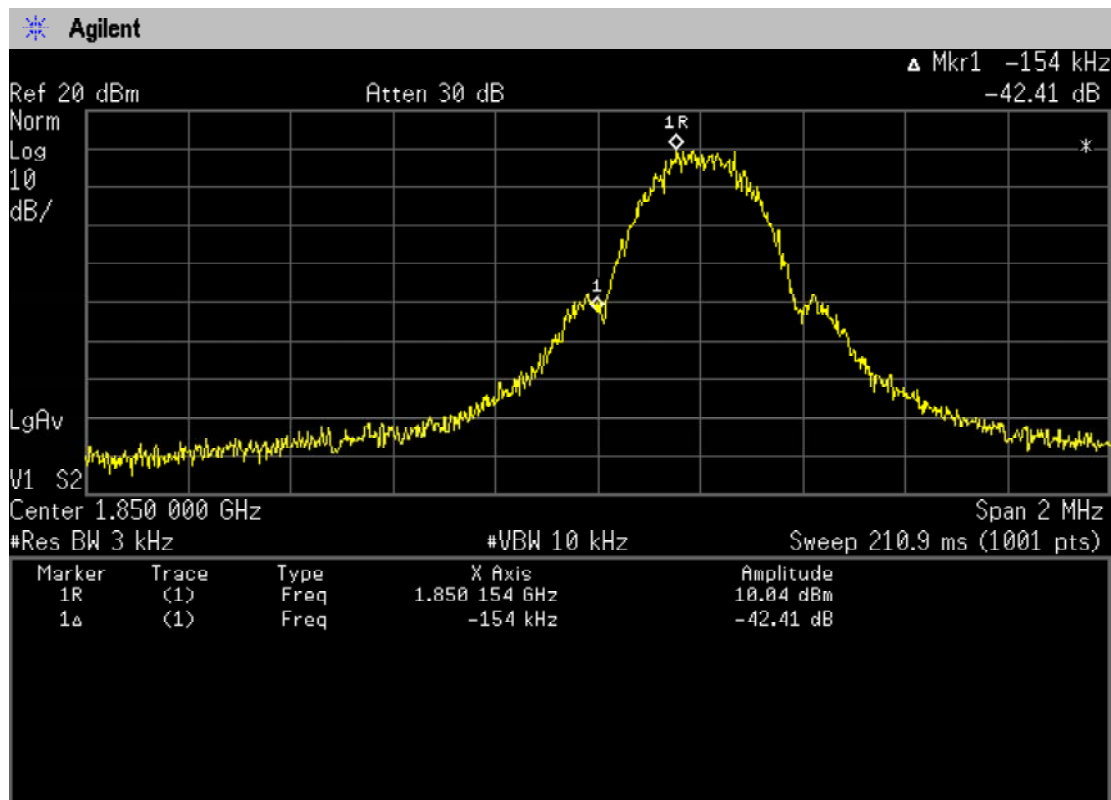

Band-Edge Emission Measurement

Transmitting Frequency : 1909.800MHz (810 ch)

Band-Edge Frequency : 1910.000 MHz

