

## TEST REPORT (SAR EVALUATION)

**Applicant** : Sharp Corporation, Communication Systems Division  
**Address** : 2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, Japan

**Products** : Cellular Phone  
**Model No.** : SH-07E  
**Serial No.** : 004401114755545  
**FCC ID** : APYHRO00190

**Test Standard** : FCC/OET Bulletin 65 Supplement C (Edition 01-01)

**Test Results** : **Passed**

**Date of Test** : April 22, 2013 ~ May 3, 2013



A handwritten signature in black ink, likely belonging to Kousei Shibata.

Kousei Shibata  
Manager  
Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan, National Institute of Information and Communications Technology (NICT) of Japan , and Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zürich, Switzerland.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS**

	<b>Page</b>
1 Description of the Device Under Test (DUT).....	3
2 Summary of Test Results .....	4
3 Test Procedure .....	5
4 Test Location.....	5
5 Recognition of Test Laboratory.....	5
6 Measurement System Diagram .....	6
7 System Components .....	7
8 Measurement Process.....	11
9 Measurement Uncertainties .....	12
10 Test Arrangement.....	14
11 Tissue Verification.....	16
12 System Validation.....	20
13 RF Output Power Measurements.....	22
14 SAR Measurements .....	30
15 Test Setup Photographs .....	53
16 Test Instruments .....	58
17 Appendix.....	59

## 1 Description of the Device Under Test (DUT)

1. Manufacturer : Sharp Corporation, Communication Systems Division  
2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, Japan
2. Products : Cellular Phone
3. Model No. : SH-07E
4. Serial No. : 004401114755545
5. Product Type : Pre-production
6. Date of Manufacture : April, 2013
7. Transmitting Frequency : 826.4 MHz – 846.6 MHz (WCDMA Band V)  
824.2 MHz – 848.8 MHz (GSM 850)  
1850.2 MHz – 1909.8 MHz (PCS 1900)  
2402 MHz – 2480 MHz (Bluetooth)  
2412 MHz – 2462 MHz (WLAN 802.11b/g/n)  
5150 MHz – 5250 MHz (WLAN 802.11a/n/ac, W52)  
5250 MHz – 5350 MHz (WLAN 802.11a/n/ac, W53)  
5470 MHz – 5725 MHz (WLAN 802.11a/n/ac, W56)
8. Battery Option : Lithium-ion Battery Pack SH42 (2100mAh)
9. Power Rating : 4.0VDC
10. EUT Grounding : None
11. Device Category : Portable Device (§2.1093)
12. Exposure Category : General Population/Uncontrolled Exposure
13. FCC Rule Part(s) : 24(E), 15.247, 15.407
14. EUT Authorization : Certification
15. Received Date of DUT : April 19, 2013

## 2 Summary of Test Results

Applied Standard : FCC/OET Bulletin 65 Supplement C (Edition 01-01)

Evaluating Compliance with FCC Guidelines for Human Exposure to Radio-frequency Electromagnetic Fields

*Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions*

Band	Test Configuration	Reported 1 g SAR (W/kg)	Limit (W/kg)
WCDMA Band V	Head	0.58	1.6
	Body & Hotspot	0.83	
GSM 850	Head	0.62	
	Body & Hotspot	0.96	
PCS 1900	Head	0.67	
	Body & Hotspot	0.78	
WLAN 2.4 GHz	Head	0.17	
	Body & Hotspot	< 0.10	
WLAN 5.2 GHz	Head	0.10	
	Body	< 0.10	
WLAN 5.3 GHz	Head	0.12	
	Body	< 0.10	
WLAN 5.6 GHz	Head	0.17	
	Body	0.10	
Simultaneous transmission condition		1.06	

The test results are **passed** for exposure limits specified in ANSI/IEEE Std. C95.1-1991.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch



Yasuhisa Sakai  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch

### 3 Test Procedure

The tests documented in this report were performed in accordance with FCC/OET Bulletin 65 Supplement C (Edition 01-01), IEEE Std.1528–2003 and the following KDB Procedures.

# 248227 D01 SAR meas for 802 11 a b g v01r02  
# 447498 D01 General RF Exposure Guidance v05  
# 648474 D04 SAR Handsets Multi Xmitter and Ant v01  
# 865664 D01 SAR measurement 100 MHz to 6 GHz v01  
# 865664 D02 SAR Reporting v01  
# 941225 D01 SAR test for 3G devices v02  
# 941225 D02 Guidance PBA for 3GPP R6 HSPA v02r01  
# 941225 D03 SAR Test Reduction GSM GPRS EDGE v01  
# 941225 D06 Hot Spot SAR v01

### 4 Test Location

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.


VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2014)  
VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)  
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-A1-E-6006  
(Expiry date : September 14, 2013)  
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2016)

## 6 Measurement System Diagram


These measurements are performed using the DASY4 automated dosimetric assessment system (manufactured by Schmid & Partner Engineering AG (SPEAG) in Zürich, Switzerland). It consists of high precision robotics system, cell controller system, DASY4 measurement server, personal computer with DASY4 software, data acquisition electronic (DAE) circuit, the Electro-optical converter (EOC), near-field probe, and the twin SAM phantom containing the equivalent tissue. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).

The Robot is connected to the cell controller to allow software manipulation of the robot. The DAE is connected to the EOC. The DAE performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server.

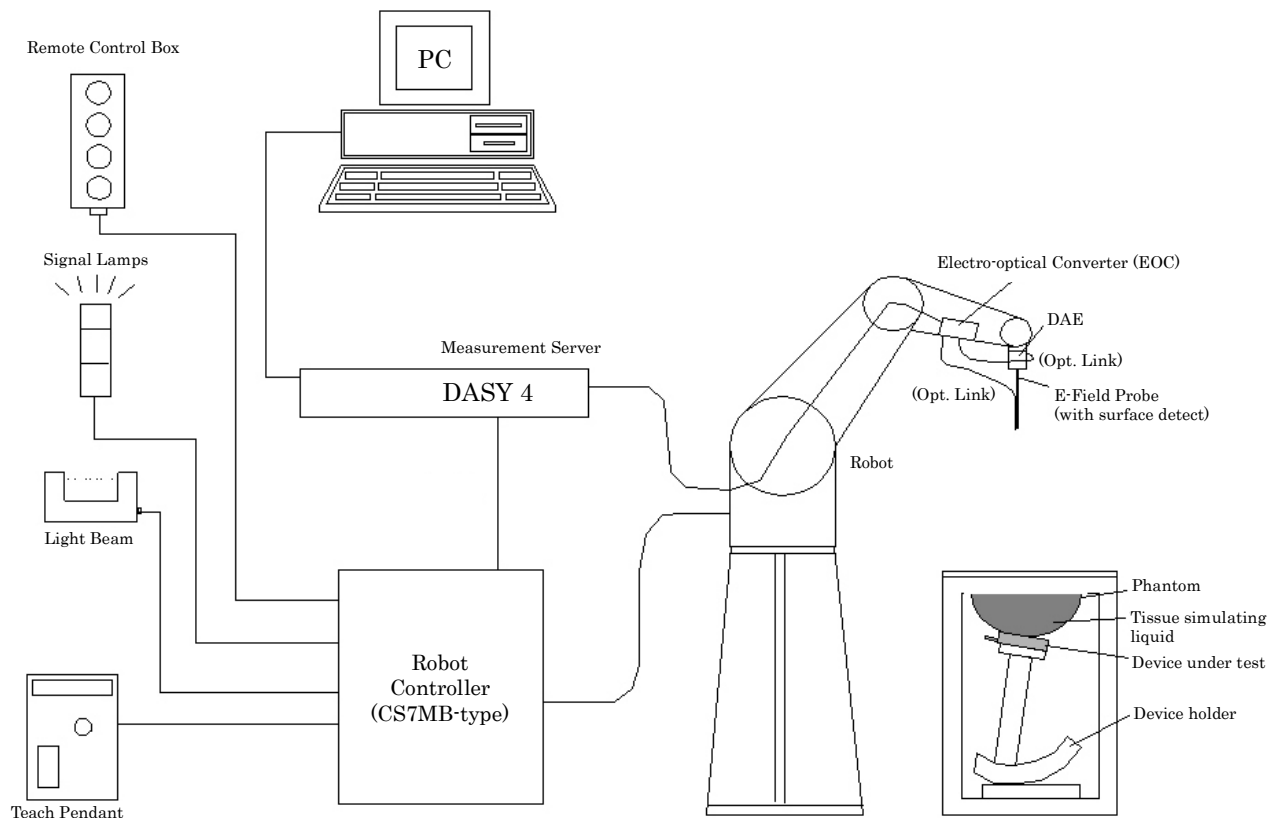

## 7 System Components

### 7.1 Probe Specification ET3DV6

Construction	: Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	: In air from 10 MHz to 2.3 GHz In head tissue simulating liquid (HSL) and muscle tissue simulating liquid 835 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 900 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 1450 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 1750 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 1900 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 1950 MHz (accuracy $\pm 12.0\%$ ; $k=2$ )	
Frequency	: 10 MHz to 2.3 GHz Linearity: $\pm 0.2$ dB (30 MHz to 2.3 GHz)	
Directivity	: $\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)	
Dynamic Range	: $5 \mu\text{W/g}$ to $>100 \text{ mW/g}$ ; Linearity: $\pm 0.2$ dB	
Surface Detection	: $\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions	: Overall length 337 mm Tip length 16 mm Body diameter 12 mm Tip diameter 6.8 mm Distance from probe tip to dipole centers 2.7 mm	

## 7.2 Probe Specification EX3DV4

Construction	: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	: In air from 10 MHz to 6 GHz In head tissue simulating liquid (HSL) and muscle tissue simulating liquid 2450 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 2600 MHz (accuracy $\pm 12.0\%$ ; $k=2$ ) 5200 MHz (accuracy $\pm 13.1\%$ ; $k=2$ ) 5300 MHz (accuracy $\pm 13.1\%$ ; $k=2$ ) 5500 MHz (accuracy $\pm 13.1\%$ ; $k=2$ ) 5600 MHz (accuracy $\pm 13.1\%$ ; $k=2$ ) 5800 MHz (accuracy $\pm 13.1\%$ ; $k=2$ )
Frequency	: 10 MHz to 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	: $\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	: $10 \mu\text{W/g}$ to $>100 \text{ mW/g}$ ; Linearity: $\pm 0.2$ dB (noise: typically $< 1 \mu\text{W/g}$ )
Dimensions	: Overall length    337 mm Tip length        20 mm Body diameter    12 mm Tip diameter     2.5 mm Distance from probe tip to dipole centers    1 mm





### 7.3 Twin SAM Phantom


The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.



Shell Thickness :  $2 \pm 0.2$  mm; Center ear point:  $6 \pm 0.2$  mm  
Filling Volume : Volume Approx. 25 liters  
Dimensions :  $810 \times 1000 \times 500$  mm (H  $\times$  L  $\times$  W)

### 7.4 ELI4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

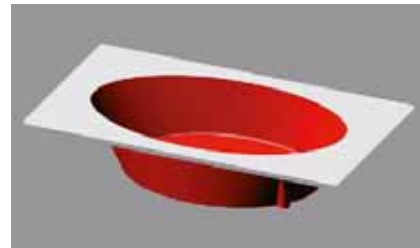

Shell Thickness :  $2 \pm 0.2$  mm (sagging: <1%)  
Filling Volume : Volume Approx. 30 liters  
Dimensions : Major ellipse axis : 600 mm  
                  Minor axis : 400 mm


## 7.5 Mounting Device for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat point).



## 7.6 Laptop Extensions Kit for Mounting Device

Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.



## 7.7 Typical Composition of Ingredients for Liquid Tissue

Ingredients (% by weight)	Frequency (MHz)					
	835		1900		2450	
	Head	Body	Head	Body	Head	Body
Water	41.45	52.40	54.90	40.40	62.70	73.20
Salt (NaCl)	1.45	1.40	0.18	0.50	0.50	0.04
Sugar	56.00	45.00	0.00	58.00	0.00	0.00
HEC	1.00	1.00	0.00	1.00	0.00	0.00
Bactericide	0.10	0.10	0.00	0.10	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	36.80	0.00
DGBE	0.00	0.00	44.92	0.00	0.00	26.70

Salt : 99+% Pure Sodium Chloride      Sugar : 98+% Pure Sucrose

Water : De-ionized, 16 MΩ<sup>+</sup> resistivity      HEC : Hydroxyethyl Cellulose

DGBE : 99+% Di (ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure) : Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

The composition of ingredients is according to FCC/OET Bulletin 65 Supplement C.

## 8 Measurement Process

### Step 1 : Power Reference Measurement

The power reference job measures the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method. The minimum distance of probe sensors to surface set to 4 mm for an ET3DV6 probe, or 2 mm for EX3DV4 probe. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2 : Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. If only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maxima within 2 dB of the maximum SAR value are detected, the number of zoom scans has to be increased accordingly.

### Step 3 : Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The zoom scan measures points specified in standards within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

### Step 4 : Z Scan

The Z scan measures points along a vertical straight line. The line runs along the Z axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

### Step 5 : Power Drift Measurement

The power drift measurement measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The power drift measurement gives the field difference in dB from the reading conducted within the last power reference measurement. The power reference measurement and power drift measurement are for monitoring the power drift of the device under test in the batch process.

## 9 Measurement Uncertainties

### 9.1 300 MHz to 3 GHz

Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	$c_i$ (1g)	$c_i$ (10g)	Std. Unc. (± %)		$v_i$
						1g	10g	
<b>Measurement System</b>								
Probe calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemispherical isotropy	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary effect	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System detection limits	1.0	R	√3	1	1	0.6	0.6	∞
Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
Response time	0.8	R	√3	1	1	0.5	0.5	∞
Integration time	2.6	R	√3	1	1	1.5	1.5	∞
RF ambient conditions – noise	3.0	R	√3	1	1	1.7	1.7	∞
RF ambient conditions – reflections	3.0	R	√3	1	1	1.7	1.7	∞
Probe positioner mechanical tolerance	0.4	R	√3	1	1	0.2	0.2	∞
Probe positioning with respect to phantom shell	2.9	R	√3	1	1	1.7	1.7	∞
Extrapolation, interpolation and integration algorithms for max. SAR evaluation	1.0	R	√3	1	1	0.6	0.6	∞
<b>Test Sample Related</b>								
Test sample positioning	3.4	N	1	1	1	3.4	3.4	23
Device holder uncertainty	2.9	N	1	1	1	2.9	2.9	5
Output power variation – SAR drift measurement	5.0	R	√3	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>								
Phantom uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid conductivity – deviation from target	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – measurement uncertainty	3.2	N	1	0.64	0.43	2.0	1.4	5
Liquid Permittivity – deviation from target	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – measurement uncertainty	3.0	N	1	0.6	0.49	1.8	1.5	5
<b>Combined Standard Uncertainty</b>		RSS				11.0	10.8	
<b>Expanded Uncertainty (95% Confidence Interval)</b>		k=2				<b>22.1</b>	<b>21.5</b>	
NOTES 1. Tol. : tolerance in influence quantity 2. Prob. Dist. : probability distributions 3. N, R : normal, rectangular 4. Div. : divisor used to obtain standard uncertainty 5. $c_i$ : sensitivity coefficient 6. Std. Unc. : standard uncertainty 7. Measurement uncertainties are according to IEEE Std. 1528 and IEC 62209-1.								


## 9.2 3 GHz to 6 GHz

Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	$c_i$ (1g)	$c_i$ (10g)	Std. Unc. (± %)		$v_i$
						1g	10g	
<b>Measurement System</b>								
Probe calibration	6.6	N	1	1	1	6.6	6.6	∞
Axial isotropy	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemispherical isotropy	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary effect	2.0	R	√3	1	1	1.2	1.2	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System detection limits	1.0	R	√3	1	1	0.6	0.6	∞
Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
Response time	0.8	R	√3	1	1	0.5	0.5	∞
Integration time	2.6	R	√3	1	1	1.5	1.5	∞
RF ambient conditions – noise	3.0	R	√3	1	1	1.7	1.7	∞
RF ambient conditions – reflections	3.0	R	√3	1	1	1.7	1.7	∞
Probe positioner mechanical tolerance	0.8	R	√3	1	1	0.5	0.5	∞
Probe positioning with respect to phantom shell	9.9	R	√3	1	1	5.7	5.7	∞
Extrapolation, interpolation and integration algorithms for max. SAR evaluation	4.0	R	√3	1	1	2.3	2.3	∞
<b>Test Sample Related</b>								
Test sample positioning	3.4	N	1	1	1	3.4	3.4	23
Device holder uncertainty	2.9	N	1	1	1	2.9	2.9	5
Output power variation – SAR drift measurement	5.0	R	√3	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>								
Phantom uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid conductivity – deviation from target	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – measurement uncertainty	3.2	N	1	0.64	0.43	2.0	1.4	5
Liquid Permittivity – deviation from target	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – measurement uncertainty	3.0	N	1	0.6	0.49	1.8	1.5	5
<b>Combined Standard Uncertainty</b>		RSS				12.8	12.6	
<b>Expanded Uncertainty (95% Confidence Interval)</b>		k=2				<b>25.7</b>	<b>25.2</b>	
NOTES 1. Tol. : tolerance in influence quantity 2. Prob. Dist. : probability distributions 3. N, R : normal, rectangular 4. Div. : divisor used to obtain standard uncertainty 5. $c_i$ : sensitivity coefficient 6. Std. Unc. : standard uncertainty 7. Measurement uncertainties are according to IEEE Std. 1528 and IEC 62209-1.								

## 10 Test Arrangement

### 10.1 Cheek-Touch Position

1. Position the device with the vertical center line of the body of the device and the horizontal line crossing the center of the ear piece in a plane parallel to the sagittal plane of the phantom.
2. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the center of the ear piece with the line RE-LE.
3. Translate the mobile phone box towards the phantom with the ear piece aligned with the line RE-LE until the phone touches the ear.
4. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

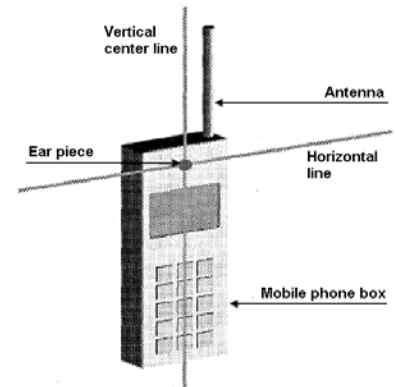


### 10.2 Ear-Tilt Position

1. Position the device in the "Cheek-Touch Position".
2. While maintaining the device in the reference plane and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




### 10.3 Body-worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. Both the physical spacing to the body of the user as dictated by the accessory and the materials used in an accessory affect the SAR produced by the transmitting device. For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do.

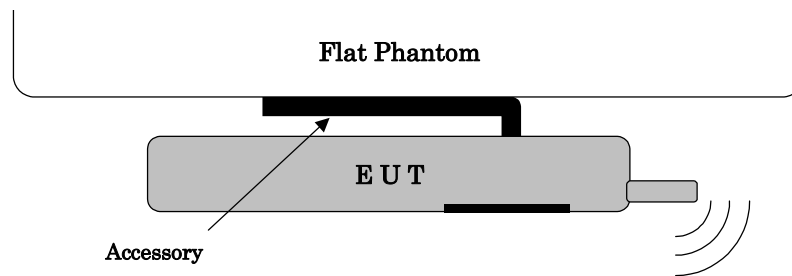

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

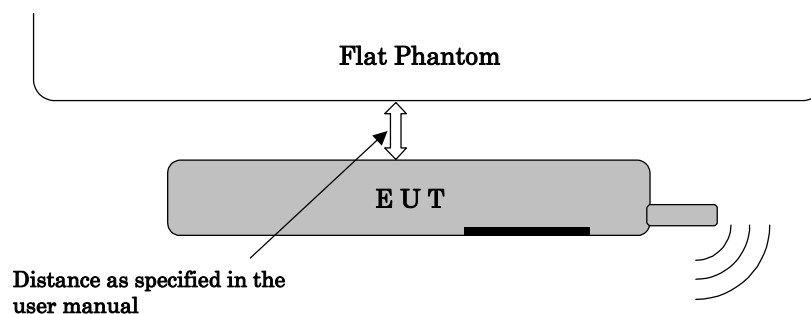

Lap-held device (e.g. laptop computer)

SAR is tested for a lap-held position with the bottom of the computer in direct contact against a flat phantom.


## 11 Tissue Verification

### 11.1 Tissue Verification Measurement Condition

The tissue dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use, or earlier if dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The temperature of the tissue-equivalent medium used during measurement must be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

It is verified by using the dielectric probe and the network analyzer.

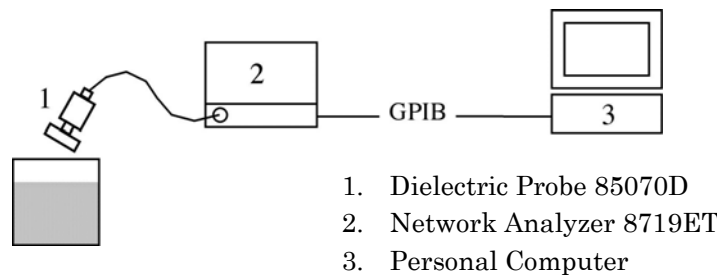

### 11.2 Tissue Dielectric Properties

The tissue dielectric properties are specified in FCC/OET Bulletin 65 Supplement C.

Target Frequency [MHz]	Head		Body	
	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

For tissue dielectric properties at other frequencies within the range, a linear interpolation method shall be used.



### 11.3 Tissue Verification Results

Tissue dielectric parameters are measured at the low, middle and high frequency of each operating frequency range of the test device.

Date	Liquid	Frequency [MHz]	Parameters	Target	Measured	Deviation [%]	Limit [%]
4/22/2013	Head	820	Permittivity ( $\epsilon_r$ )	41.6	41.45	-0.36	$\pm 5$
			Conductivity ( $\sigma$ )	0.90	0.872	-3.11	$\pm 5$
		835	Permittivity ( $\epsilon_r$ )	41.5	41.34	-0.39	$\pm 5$
			Conductivity ( $\sigma$ )	0.90	0.887	-1.44	$\pm 5$
		850	Permittivity ( $\epsilon_r$ )	41.5	41.18	-0.77	$\pm 5$
			Conductivity ( $\sigma$ )	0.92	0.901	-2.07	$\pm 5$
4/23/2013	Body	820	Permittivity ( $\epsilon_r$ )	55.3	54.58	-1.30	$\pm 5$
			Conductivity ( $\sigma$ )	0.97	0.957	-1.34	$\pm 5$
		835	Permittivity ( $\epsilon_r$ )	55.2	54.52	-1.23	$\pm 5$
			Conductivity ( $\sigma$ )	0.97	0.969	-0.10	$\pm 5$
		850	Permittivity ( $\epsilon_r$ )	55.2	54.44	-1.38	$\pm 5$
			Conductivity ( $\sigma$ )	0.99	0.985	-0.51	$\pm 5$
4/24/2013	Body	1850	Permittivity ( $\epsilon_r$ )	53.3	53.39	+0.17	$\pm 5$
			Conductivity ( $\sigma$ )	1.52	1.486	-2.24	$\pm 5$
		1880	Permittivity ( $\epsilon_r$ )	53.3	53.32	+0.04	$\pm 5$
			Conductivity ( $\sigma$ )	1.52	1.518	-0.13	$\pm 5$
		1900	Permittivity ( $\epsilon_r$ )	53.3	53.27	-0.06	$\pm 5$
			Conductivity ( $\sigma$ )	1.52	1.540	+1.32	$\pm 5$
4/25/2013	Head	1850	Permittivity ( $\epsilon_r$ )	53.3	53.32	+0.04	$\pm 5$
			Conductivity ( $\sigma$ )	1.52	1.551	+1.97	$\pm 5$
		1880	Permittivity ( $\epsilon_r$ )	40.0	39.75	-0.63	$\pm 5$
			Conductivity ( $\sigma$ )	1.40	1.385	-1.07	$\pm 5$
		1900	Permittivity ( $\epsilon_r$ )	40.0	39.61	-0.98	$\pm 5$
			Conductivity ( $\sigma$ )	1.40	1.419	+1.36	$\pm 5$
4/30/2013	Body	1910	Permittivity ( $\epsilon_r$ )	40.0	39.54	-1.15	$\pm 5$
			Conductivity ( $\sigma$ )	1.40	1.436	+2.57	$\pm 5$
		2410	Permittivity ( $\epsilon_r$ )	40.0	39.58	-1.05	$\pm 5$
			Conductivity ( $\sigma$ )	1.40	1.445	+3.21	$\pm 5$
		2435	Permittivity ( $\epsilon_r$ )	52.8	52.36	-0.83	$\pm 5$
			Conductivity ( $\sigma$ )	1.91	1.903	-0.37	$\pm 5$
4/30/2013	Body	2435	Permittivity ( $\epsilon_r$ )	52.7	52.27	-0.82	$\pm 5$
			Conductivity ( $\sigma$ )	1.94	1.937	-0.15	$\pm 5$
		2450	Permittivity ( $\epsilon_r$ )	52.7	52.22	-0.91	$\pm 5$
			Conductivity ( $\sigma$ )	1.95	1.957	+0.36	$\pm 5$
		2475	Permittivity ( $\epsilon_r$ )	52.7	52.13	-1.08	$\pm 5$
			Conductivity ( $\sigma$ )	1.99	1.991	+0.05	$\pm 5$

**Tissue Verification Results (continued)**

Date	Liquid	Frequency [MHz]	Parameters	Target	Measured	Deviation [%]	Limit [%]
5/1/2013	Head	2410	Permittivity ( $\epsilon_r$ )	39.3	38.83	-1.20	$\pm 5$
			Conductivity ( $\sigma$ )	1.76	1.782	+1.25	$\pm 5$
		2435	Permittivity ( $\epsilon_r$ )	39.2	38.74	-1.17	$\pm 5$
			Conductivity ( $\sigma$ )	1.79	1.812	+1.23	$\pm 5$
		2450	Permittivity ( $\epsilon_r$ )	39.2	38.67	-1.35	$\pm 5$
			Conductivity ( $\sigma$ )	1.80	1.829	+1.61	$\pm 5$
5/2/2013	Head	2475	Permittivity ( $\epsilon_r$ )	39.2	38.57	-1.61	$\pm 5$
			Conductivity ( $\sigma$ )	1.83	1.859	+1.58	$\pm 5$
		5180	Permittivity ( $\epsilon_r$ )	36.0	36.38	+1.06	$\pm 5$
			Conductivity ( $\sigma$ )	4.63	4.670	+0.86	$\pm 5$
		5200	Permittivity ( $\epsilon_r$ )	36.0	36.34	+0.94	$\pm 5$
			Conductivity ( $\sigma$ )	4.66	4.690	+0.64	$\pm 5$
5/2/2013	Head	5240	Permittivity ( $\epsilon_r$ )	35.9	36.25	+0.97	$\pm 5$
			Conductivity ( $\sigma$ )	4.70	4.730	+0.64	$\pm 5$
		5260	Permittivity ( $\epsilon_r$ )	35.9	36.20	+0.84	$\pm 5$
			Conductivity ( $\sigma$ )	4.72	4.753	+0.70	$\pm 5$
		5300	Permittivity ( $\epsilon_r$ )	35.9	36.15	+0.70	$\pm 5$
			Conductivity ( $\sigma$ )	4.76	4.796	+0.76	$\pm 5$
5/2/2013	Head	5320	Permittivity ( $\epsilon_r$ )	35.8	36.12	+0.89	$\pm 5$
			Conductivity ( $\sigma$ )	4.78	4.816	+0.75	$\pm 5$
		5500	Permittivity ( $\epsilon_r$ )	35.6	35.80	+0.56	$\pm 5$
			Conductivity ( $\sigma$ )	4.96	5.015	+1.11	$\pm 5$
		5520	Permittivity ( $\epsilon_r$ )	35.6	35.77	+0.48	$\pm 5$
			Conductivity ( $\sigma$ )	4.98	5.038	+1.16	$\pm 5$
		5560	Permittivity ( $\epsilon_r$ )	35.6	35.72	+0.34	$\pm 5$
			Conductivity ( $\sigma$ )	5.02	5.083	+1.25	$\pm 5$
		5600	Permittivity ( $\epsilon_r$ )	35.5	35.66	+0.45	$\pm 5$
			Conductivity ( $\sigma$ )	5.07	5.128	+1.14	$\pm 5$
		5640	Permittivity ( $\epsilon_r$ )	35.5	35.60	+0.28	$\pm 5$
			Conductivity ( $\sigma$ )	5.11	5.174	+1.25	$\pm 5$
		5680	Permittivity ( $\epsilon_r$ )	35.4	35.53	+0.37	$\pm 5$
			Conductivity ( $\sigma$ )	5.15	5.219	+1.34	$\pm 5$
		5700	Permittivity ( $\epsilon_r$ )	35.4	35.50	+0.28	$\pm 5$
			Conductivity ( $\sigma$ )	5.17	5.242	+1.39	$\pm 5$

**Tissue Verification Results (continued)**


Date	Liquid	Frequency [MHz]	Parameters	Target	Measured	Deviation [%]	Limit [%]
5/3/2013	Body	5180	Permittivity ( $\epsilon_r$ )	49.0	48.75	-0.51	$\pm 5$
			Conductivity ( $\sigma$ )	5.28	5.267	-0.25	$\pm 5$
		5200	Permittivity ( $\epsilon_r$ )	49.0	48.71	-0.59	$\pm 5$
			Conductivity ( $\sigma$ )	5.30	5.289	-0.21	$\pm 5$
		5240	Permittivity ( $\epsilon_r$ )	49.0	48.64	-0.73	$\pm 5$
			Conductivity ( $\sigma$ )	5.35	5.345	-0.09	$\pm 5$
5/3/2013	Body	5260	Permittivity ( $\epsilon_r$ )	48.9	48.57	-0.67	$\pm 5$
			Conductivity ( $\sigma$ )	5.37	5.373	+0.06	$\pm 5$
		5300	Permittivity ( $\epsilon_r$ )	48.9	48.50	-0.82	$\pm 5$
			Conductivity ( $\sigma$ )	5.42	5.421	+0.02	$\pm 5$
		5320	Permittivity ( $\epsilon_r$ )	48.9	48.46	-0.90	$\pm 5$
			Conductivity ( $\sigma$ )	5.44	5.449	+0.17	$\pm 5$
5/3/2013	Body	5500	Permittivity ( $\epsilon_r$ )	48.6	48.09	-1.05	$\pm 5$
			Conductivity ( $\sigma$ )	5.65	5.688	+0.67	$\pm 5$
		5520	Permittivity ( $\epsilon_r$ )	48.6	48.04	-1.15	$\pm 5$
			Conductivity ( $\sigma$ )	5.67	5.719	+0.86	$\pm 5$
		5560	Permittivity ( $\epsilon_r$ )	48.5	47.99	-1.05	$\pm 5$
			Conductivity ( $\sigma$ )	5.72	5.769	+0.86	$\pm 5$
		5600	Permittivity ( $\epsilon_r$ )	48.5	47.92	-1.20	$\pm 5$
			Conductivity ( $\sigma$ )	5.77	5.823	+0.92	$\pm 5$
		5640	Permittivity ( $\epsilon_r$ )	48.4	47.85	-1.14	$\pm 5$
			Conductivity ( $\sigma$ )	5.81	5.879	+1.19	$\pm 5$
		5680	Permittivity ( $\epsilon_r$ )	48.4	47.78	-1.28	$\pm 5$
			Conductivity ( $\sigma$ )	5.86	5.934	+1.26	$\pm 5$
		5700	Permittivity ( $\epsilon_r$ )	48.3	47.75	-1.14	$\pm 5$
			Conductivity ( $\sigma$ )	5.88	5.962	+1.39	$\pm 5$

## 12 System Validation

### 12.1 System Validation Measurement Condition

The power meter PM1 (including Attenuator) measures the forward power at the location of the validation dipole connector. The signal generator is adjusted for 250 mW at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

The dipole antenna is matched to be used near flat phantom filled with tissue simulating solution. A specific distance holder is used in the positioning of the antenna to ensure correct spacing between the phantom and the dipole.

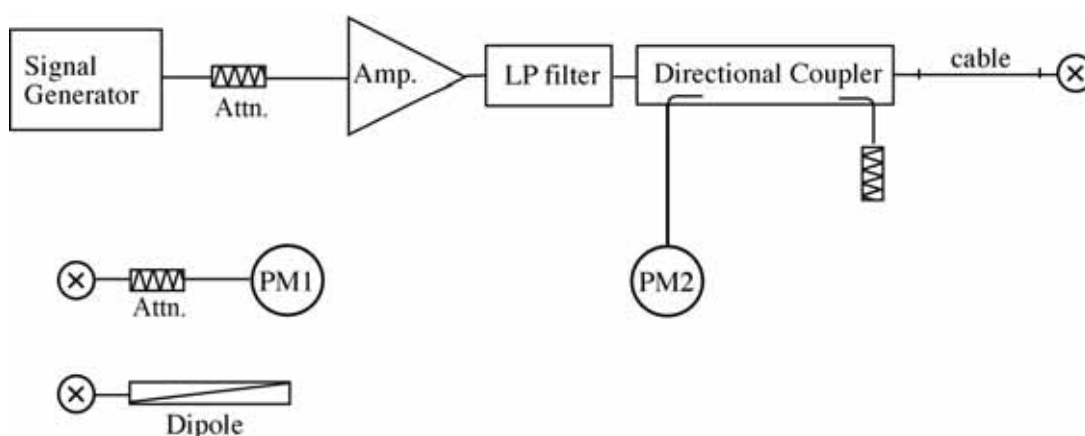

### 12.2 Target SAR Values for System Validation

The target SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole		Cal. Date	Frequency [MHz]	Target SAR Values [W/kg]		
Type	Serial			1g/10g	Head	Body
D835V2	4d081	8/8/2012	835	1g	9.35	9.46
				10g	6.12	6.25
D1900V2	5d112	8/14/2012	1900	1g	39.6	40.5
				10g	20.9	21.5
D2450V2	714	11/7/2012	2450	1g	53.1	50.5
				10g	24.7	23.5
D5GHzV2	1111	9/18/2012	5200	1g	77.7	75.3
				10g	22.3	21.0
			5500	1g	82.4	79.1
				10g	23.4	22.0
			5800	1g	76.0	74.4
				10g	21.7	20.6

### 12.3 System Validation Results

The SAR measured with a system validation dipole, using the required tissue-equivalent medium at the test frequency, must be within 10 % of the manufacturer calibrated dipole SAR target.

Date	System Dipole		Liquid	Measured SAR [W/kg] (Normalized to 1 W)		Target	Deviation [%]	Limit [%]
	Type	Serial						
4/22/2013	D835V2	4d081	Head	1 g	9.28	9.35	-0.75	± 10
				10 g	6.08	6.12	-0.65	± 10
4/23/2013	D835V2	4d081	Body	1 g	9.36	9.46	-1.06	± 10
				10 g	6.20	6.25	-0.80	± 10
4/24/2013	D1900V2	5d112	Body	1 g	38.92	40.5	-3.90	± 10
				10 g	20.84	21.5	-3.07	± 10
4/25/2013	D1900V2	5d112	Head	1 g	39.56	39.6	-0.10	± 10
				10 g	20.88	20.9	-0.10	± 10
4/30/2013	D2450V2	714	Body	1 g	50.80	50.5	+0.59	± 10
				10 g	23.96	23.5	+1.96	± 10
5/1/2013	D2450V2	714	Head	1 g	49.60	53.1	-6.59	± 10
				10 g	22.60	24.7	-8.50	± 10
5/2/2013	D5GHzV2 (5.2GHz)	1111	Head	1 g	78.40	77.7	+0.90	± 10
				10 g	22.44	22.3	+0.63	± 10
5/2/2013	D5GHzV2 (5.5GHz)	1111	Head	1 g	82.80	82.4	+0.49	± 10
				10 g	23.40	23.4	+0.00	± 10
5/3/2013	D5GHzV2 (5.2GHz)	1111	Body	1 g	73.20	75.3	-2.79	± 10
				10 g	20.64	21.0	-1.71	± 10
5/3/2013	D5GHzV2 (5.5GHz)	1111	Body	1 g	75.20	79.1	-4.93	± 10
				10 g	20.80	22.0	-5.45	± 10

## 13 RF Output Power Measurements

### 13.1 WCDMA Band V

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification.

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester “Anritsu, MT8820C” was used to program the DUT.

#### *3GPP Release 99 WCDMA Settings*

Settings	Release 99	
Loopback Mode	Mode 1	OFF
Channel Coding	12.2k / 64k / 144k / 384kbps RMC	Voice AMR
TPC Bit Pattern	All 1	
Power Tolerance (dB)	+1.7/-3.7	

#### *3GPP Release 5 HSDPA Settings*

Settings	Release 5 HSDPA			
Sub-test	1	2	3	4
Loopback Mode	Mode 1			
Channel Coding	Fixed Reference Channel (QPSK)			
TPC Algorithm	2			
TPC Bit Pattern	All 1			
Beta C	2	11	15	15
Beta D	15	15	8	4
MPR (dB)	0	0	0.5	0.5
Power Tolerance (dB)	+1.7/-3.7	+1.7/-3.7	+2.7/-3.7	+3.7/-3.7

#### *3GPP Release 6 HSPA Settings*

Settings	Release 6 HSPA				
Sub-test	1	2	3	4	5
Loopback Mode	Mode 1				
Channel Coding	E-DCH RF Test with TTI 10ms (QPSK)				
TPC Algorithm	2				1
TPC Bit Pattern	Inner Loop Power Control				All 1
Beta C	10	6	15	2	15
Beta D	15	15	9	15	0
Absolute Grant Value	20	12	15	17	12
MPR (dB)	0	2	1	2	0
Power Tolerance (dB)	+1.7/-6.7	+3.7/-5.2	+2.7/-5.2	+3.7/-5.2	+1.7/-3.7

***Conducted power measurement results***

Mode		Conducted Average Power (dBm)		
		4132 ch (826.4 MHz)	4182 ch (836.4 MHz)	4233 ch (846.6 MHz)
12.2 kbps RMC		23.07	23.06	22.97
64 kbps RMC		23.09	23.11	22.97
144 kbps RMC		23.05	23.11	22.95
384 kbps RMC		23.05	23.09	22.95
Voice AMR		23.03	23.06	22.94
R5 HSDPA	Sub-test 1	22.99	23.03	22.89
	Sub-test 2	22.99	23.02	22.89
	Sub-test 3	22.47	22.51	22.46
	Sub-test 4	22.56	22.50	22.44
R6 HSPA	Sub-test 1	22.16	22.24	22.66
	Sub-test 2	20.74	20.67	20.67
	Sub-test 3	21.46	21.74	21.87
	Sub-test 4	20.85	20.83	20.83
	Sub-test 5	22.92	22.91	22.87

Note(s):

1. KDB 941225 D01 – SAR in voice and data modes is measured using a 12.2 kbps RMC. SAR in voice AMR configurations and for other spreading codes are not required when the maximum average output of each channel is less than ¼ dB higher than that measured in 12.2 kbps RMC.
2. KDB 941225 D01 – Body SAR for HSPA (HSDPA/HSUPA) is not required when the maximum average output with HSPA active is less than ¼ dB higher than that measured without HSPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is ≤ 75% of the SAR limit.
3. KDB 941225 D01 – Head SAR for HSPA (VoIP applicable) is not required when the maximum average output with HSPA active is less than ¼ dB higher than that measured without HSPA using 12.2 kbps RMC.
4. KDB 941225 D02 – The maximum power reduction (MPR) on the order of 0, 2, 1, 2, 0 dB are expected for the subtests specified in R6 HSPA. Conducted power measurement results are set within 24 dBm +/- expected power tolerance.

## 13.2 GSM 850

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester “Anritsu, MT8820C” was used to program the DUT.

### *GSM/GPRS Settings*

Settings	Mode	Parameter
General Settings	Band Indicator	GSM 850
	Power Control Level	5 (33 dBm)
GPRS Specific Settings	Connection Type	Test Mode A
	Multi Slot Class	12 (4 down / 4 up / 5 sum)
	Coding Scheme	CS1 (GMSK)

### *Conducted power measurement results*

Mode		Conducted Power (dBm)		
		128 ch (824.2 MHz)	189 ch (836.4 MHz)	251 ch (848.8 MHz)
GSM	Burst Avg.	31.98	32.04	31.91
	Frame Avg.	22.95	23.01	22.88
GPRS (1 slot)	Burst Avg.	31.98	32.04	31.91
	Frame Avg.	22.95	23.01	22.88
GPRS (2 slot)	Burst Avg.	29.51	29.59	29.40
	Frame Avg.	23.49	23.57	23.38
GPRS (3 slot)	Burst Avg.	28.43	28.29	27.87
	Frame Avg.	24.17	24.03	23.61
GPRS (4 slot)	Burst Avg.	<b>27.41</b>	27.09	27.23
	Frame Avg.	<b>24.40</b>	24.08	24.22

Note(s):

KDB 941225 D03 – The worst-case configuration for SAR testing is determined to be as follows.

1. Body : GPRS mode with 4 time slots, based on the output power above
2. Head : Same mode as Body SAR testing (VoIP applicable using GPRS multi-slot)



### 13.3 PCS 1900

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester was used to program the DUT.

#### *GSM/GPRS Settings*

Settings	Mode	Parameter
General Settings	Band Indicator	PCS 1900
	Power Control Level	0 (30 dBm)
GPRS Specific Settings	Connection Type	Test Mode A
	Multi Slot Class	12 (4 down / 4 up / 5 sum)
	Coding Scheme	CS1 (GMSK)

#### *Conducted power measurement results*

Mode		Conducted Power (dBm)		
		512 ch (1850.2 MHz)	661 ch (1880.0 MHz)	810 ch (1909.8 MHz)
GSM	Burst Avg.	28.90	28.93	28.92
	Frame Avg.	19.87	19.90	19.89
GPRS (1 slot)	Burst Avg.	28.90	28.93	28.92
	Frame Avg.	19.87	19.90	19.89
GPRS (2 slot)	Burst Avg.	26.80	26.82	26.73
	Frame Avg.	20.78	20.80	20.71
GPRS (3 slot)	Burst Avg.	25.49	25.30	25.43
	Frame Avg.	21.23	21.04	21.17
GPRS (4 slot)	Burst Avg.	24.43	<b>24.49</b>	24.42
	Frame Avg.	21.42	<b>21.48</b>	21.41

Note(s):

KDB 941225 D03 – The worst-case configuration for SAR testing is determined to be as follows.

1. Body : GPRS mode with 4 time slots, based on the output power above
2. Head : Same mode as Body SAR testing (VoIP applicable using GPRS multi-slot)

### 13.4 WLAN 2.4 GHz

To setup the desire channel frequency and the maximum output power, RF test mode prepared by the manufacturer was used to program the DUT.

#### *Conducted power measurement results*

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
2.4 GHz	802.11b	1	2412	11.71
		6	2437	12.01
		11	2462	11.67
	802.11g	1	2412	11.19
		6	2437	11.43
		11	2462	11.18
	802.11n [HT20]	1	2412	11.26
		6	2437	11.41
		11	2462	11.24

Note(s):

KDB 248227 D01 – SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.

### 13.5 WLAN 5 GHz

To setup the desire channel frequency and the maximum output power, RF test mode prepared by the manufacturer was used to program the DUT.

#### *Conducted power measurement results (W52)*

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
5.2 GHz	802.11a	36	5180	12.18
		40	5200	12.17
		44	5220	12.06
		48	5240	11.97
	802.11n [HT20]	36	5180	12.25
		44	5220	12.06
		48	5240	11.93
	802.11n [HT40]	38	5190	12.03
		46	5230	11.95
	802.11ac [VHT80]	42	5210	12.05

Note(s):

KDB 248227 D01 – SAR is not required for 802.11n/ac channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11a channels.

#### *Conducted power measurement results (W53)*

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
5.3 GHz	802.11a	52	5260	12.41
		56	5280	12.42
		60	5300	12.38
		64	5320	12.25
	802.11n [HT20]	52	5260	12.48
		60	5300	12.24
		64	5320	12.28
	802.11n [HT40]	54	5270	12.43
		62	5310	12.30
	802.11ac [VHT80]	58	5290	12.38

Note(s):

KDB 248227 D01 – SAR is not required for 802.11n/ac channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11a channels.

**Conducted power measurement results (W56)**

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
5.6 GHz	802.11a	100	5500	12.07
		104	5520	12.05
		108	5540	11.73
		112	5560	11.95
		116	5580	11.87
		120	5600	Not supported
		124	5620	Not supported
		128	5640	Not supported
		132	5660	11.61
		136	5680	11.38
		140	5700	11.45
	802.11n [HT20]	100	5500	11.95
		116	5580	11.80
		140	5700	11.31
	802.11n [HT40]	102	5510	12.04
		110	5550	11.79
		134	5670	11.57
	802.11ac [VHT80]	106	5530	12.07

Note(s):

KDB 248227 D01 – SAR is not required for 802.11n/ac channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11a channels.

### 13.6 Bluetooth

For the Bluetooth operation, the client supplied a special driving program to program the DUT to continually transmit the specified maximum power.

Modulation type : Frequency Hopping Spread Spectrum (FHSS)  
 Transmitting Frequency : 2402 MHz (0 ch) – 2480 MHz (78 ch)  
 RF Output Power : Max. 2.5 mW (Class 2)

### 13.7 Standalone SAR Test Exclusion Considerations (KDB 447498 D01)

The 1 g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq 50$  mm are determined by;

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$ , where

- $f_{\text{(GHz)}}$  is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.
- When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied.

Band	Frequency (MHz)	Max. Power		Test Position	Distance (mm)	Threshold	Test Exclusion
		(dBm)	(mW)				
WLAN 2.4 GHz	2412	13.0	20.0	Head	$< 5$	6.2	NO
				Body	10	3.1	NO
WLAN 5 GHz	5180	13.5	22.4	Head	$< 5$	10.2	NO
				Body	10	5.1	NO
Bluetooth	2441	4.0	2.5	Head	$< 5$	0.8	YES
				Body	10	0.4	YES

## 14 SAR Measurements

### 14.1 WCDMA Band V

#### 14.1.1 Head

R99 12.2kbps RMC – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	4132	826.4					1
	4182	836.4	24.2	23.06	0.449	0.584	
	4233	846.6					1
Left Tilted	4132	826.4					1
	4182	836.4	24.2	23.06	0.232	0.302	
	4233	846.6					1
Right Touched	4132	826.4					1
	4182	836.4	24.2	23.06	0.426	0.554	
	4233	846.6					1
Right Tilted	4132	826.4					1
	4182	836.4	24.2	23.06	0.241	0.313	
	4233	846.6					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:							
<ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							

#### 14.1.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

R99 12.2kbps RMC – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	4132	826.4					3
	4182	836.4					3
	4233	846.6					3
Bottom Edge	4132	826.4					1
	4182	836.4	24.2	23.06	0.070	<b>0.091</b>	
	4233	846.6					1
Left Edge	4132	826.4					1
	4182	836.4	24.2	23.06	0.356	<b>0.463</b>	
	4233	846.6					1
Right Edge	4132	826.4					1
	4182	836.4	24.2	23.06	0.296	<b>0.385</b>	
	4233	846.6					1
Front Side	4132	826.4					1
	4182	836.4	24.2	23.06	0.486	<b>0.632</b>	
	4233	846.6					1
Rear Side	4132	826.4	24.2	23.07	0.577	<b>0.748</b>	
	4182	836.4	24.2	23.06	0.630	<b>0.819</b>	
	4233	846.6	24.2	22.97	0.627	<b>0.832</b>	
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>• ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul> 2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset. 3. KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.							

## 14.2 GSM 850

### 14.2.1 Head

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	128	824.2					1
	189	836.4	28.4	27.09	0.457	0.618	
	251	848.8					1
Left Tilted	128	824.2					1
	189	836.4	28.4	27.09	0.257	0.347	
	251	848.8					1
Right Touched	128	824.2					1
	189	836.4	28.4	27.09	0.417	0.564	
	251	848.8					1
Right Tilted	128	824.2					1
	189	836.4	28.4	27.09	0.233	0.315	
	251	848.8					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:							
<ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							



#### 14.2.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	128	824.2					3
	189	836.4					3
	251	848.8					3
Bottom Edge	128	824.2					1
	189	836.4	28.4	27.09	0.081	<b>0.110</b>	
	251	848.8					1
Left Edge	128	824.2					1
	189	836.4	28.4	27.09	0.367	<b>0.496</b>	
	251	848.8					1
Right Edge	128	824.2					1
	189	836.4	28.4	27.09	0.276	<b>0.373</b>	
	251	848.8					1
Front Side	128	824.2					1
	189	836.4	28.4	27.09	0.495	<b>0.669</b>	
	251	848.8					1
Rear Side	128	824.2	28.4	27.41	0.703	<b>0.883</b>	
	189	836.4	28.4	27.09	0.663	<b>0.896</b>	
	251	848.8	28.4	27.23	0.733	<b>0.960</b>	
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>• ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul> 2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset. 3. KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.							

### 14.3 PCS 1900

#### 14.3.1 Head

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	512	1850.2					1
	661	1880.0	25.4	24.49	0.410	<b>0.506</b>	
	810	1909.8					1
Left Tilted	512	1850.2					1
	661	1880.0	25.4	24.49	0.086	<b>0.106</b>	
	810	1909.8					1
Right Touched	512	1850.2					1
	661	1880.0	25.4	24.49	0.541	<b>0.667</b>	
	810	1909.8					1
Right Tilted	512	1850.2					1
	661	1880.0	25.4	24.49	0.083	<b>0.102</b>	
	810	1909.8					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							

### 14.3.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	512	1850.2					3
	661	1880.0					3
	810	1909.8					3
Bottom Edge	512	1850.2					1
	661	1880.0	25.4	24.49	0.388	<b>0.478</b>	
	810	1909.8					1
Left Edge	512	1850.2					1
	661	1880.0	25.4	24.49	0.093	<b>0.115</b>	
	810	1909.8					1
Right Edge	512	1850.2					1
	661	1880.0	25.4	24.49	0.238	<b>0.293</b>	
	810	1909.8					1
Front Side	512	1850.2					1
	661	1880.0	25.4	24.49	0.441	<b>0.544</b>	
	810	1909.8					1
Rear Side	512	1850.2					1
	661	1880.0	25.4	24.49	0.633	<b>0.781</b>	
	810	1909.8					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>• ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul> 2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset. 3. KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.							

## 14.4 WLAN 2.4 GHz

### 14.4.1 Head

802.11b (1 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	1	2412					1
	6	2437	13.0	12.01	0.085	<b>0.107</b>	
	11	2462					1
Left Tilted	1	2412					1
	6	2437	13.0	12.01	0.071	<b>0.089</b>	
	11	2462					1
Right Touched	1	2412					1
	6	2437	13.0	12.01	0.137	<b>0.172</b>	
	11	2462					1
Right Tilted	1	2412					1
	6	2437	13.0	12.01	0.089	<b>0.112</b>	
	11	2462					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							

#### 14.4.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

802.11b (1 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	1	2412					1
	6	2437	13.0	12.01	0.022	<b>0.027</b>	
	11	2462					1
Bottom Edge	1	2412					3
	6	2437					3
	11	2462					3
Left Edge	1	2412					1
	6	2437	13.0	12.01	0.036	<b>0.045</b>	
	11	2462					1
Right Edge	1	2412					3
	6	2437					3
	11	2462					3
Front Side	1	2412					1
	6	2437	13.0	12.01	0.023	<b>0.029</b>	
	11	2462					1
Rear Side	1	2412					1
	6	2437	13.0	12.01	0.034	<b>0.043</b>	
	11	2462					1
NOTE(S) : 1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>• ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul> 2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset. 3. KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.							

## 14.5 WLAN 5.2 GHz

### 14.5.1 Head

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	36	5180	13.5	12.18	0.040	<b>0.054</b>	
	48	5240					1
Left Tilted	36	5180	13.5	12.18	0.034	<b>0.046</b>	
	48	5240					1
Right Touched	36	5180	13.5	12.18	0.073	<b>0.099</b>	
	48	5240					1
Right Tilted	36	5180	13.5	12.18	0.058	<b>0.079</b>	
	48	5240					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:							
<ul style="list-style-type: none"> <li>≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul>							

### 14.5.2 Body w/ 1.0 cm (body-worn accessory mode)

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Front Side	36	5180	13.5	12.18	0.015	<b>0.020</b>	
	48	5240					1
Rear Side	36	5180	13.5	12.18	0.055	<b>0.075</b>	
	48	5240					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:							
<ul style="list-style-type: none"> <li>≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul>							
2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.							

## 14.6 WLAN 5.3 GHz

### 14.6.1 Head

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	56	5280	13.5	12.42	0.047	<b>0.060</b>	
	64	5320					1
Left Tilted	56	5280	13.5	12.42	0.048	<b>0.062</b>	
	64	5320					1
Right Touched	56	5280	13.5	12.42	0.092	<b>0.118</b>	
	64	5320					1
Right Tilted	56	5280	13.5	12.42	0.077	<b>0.099</b>	
	64	5320					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:							
<ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							

### 14.6.2 Body w/ 1.0 cm (body-worn accessory mode)

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Front Side	56	5280	13.5	12.42	0.019	<b>0.024</b>	
	64	5320					1
Rear Side	56	5280	13.5	12.42	0.062	<b>0.080</b>	
	64	5320					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:							
<ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							
2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2$ W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.							

## 14.7 WLAN 5.6 GHz

### 14.7.1 Head

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	100	5500	13.5	12.07	0.083	<b>0.115</b>	
	116	5580					1
	124	5620					2
	136	5680					1
Left Tilted	100	5500	13.5	12.07	0.078	<b>0.108</b>	
	116	5580					1
	124	5620					2
	136	5680					1
Right Touched	100	5500	13.5	12.07	0.119	<b>0.165</b>	
	116	5580					1
	124	5620					2
	136	5680					1
Right Tilted	100	5500	13.5	12.07	0.091	<b>0.126</b>	
	116	5580					1
	124	5620					2
	136	5680					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>• <math>\leq 0.8</math> W/kg when the transmission band is <math>\leq 100</math> MHz</li> <li>• <math>\leq 0.6</math> W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>• <math>\leq 0.4</math> W/kg when the transmission band is <math>\geq 200</math> MHz</li> </ul>							
2. KDB 443999 D01 – Transmissions in the 5600 to 5650 MHz band are disabled.							



#### 14.7.2 Body w/ 1.0 cm (body-worn accessory mode)

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Front Side	100	5500	13.5	12.07	0.026	0.036	
	116	5580					1
	124	5620					3
	136	5680					1
Rear Side	100	5500	13.5	12.07	0.074	0.103	
	116	5580					1
	124	5620					3
	136	5680					1
NOTE(S) :							
1. KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is: <ul style="list-style-type: none"> <li>≤ 0.8 W/kg when the transmission band is ≤ 100 MHz</li> <li>≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz</li> <li>≤ 0.4 W/kg when the transmission band is ≥ 200 MHz</li> </ul> 2. KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset. 3. KDB 443999 D01 – Transmissions in the 5600 to 5650 MHz band are disabled.							

## 14.8 Simultaneous Transmission SAR Analysis (KDB 447498 D01)

### 14.8.1 Simultaneous Transmission

WWAN can transmit simultaneously with WLAN/Bluetooth.

WLAN in 2.4 GHz and 5 GHz bands cannot transmit simultaneously with Bluetooth.

No.	Conditions	Head	Body	Hotspot
1	WCDMA Band V + WLAN 2.4 GHz	YES	YES	YES
2	GSM 850 + WLAN 2.4 GHz	YES	YES	YES
3	PCS 1900 + WLAN 2.4 GHz	YES	YES	YES
4	WCDMA Band V + WLAN 5 GHz	YES	YES	NO
5	GSM 850 + WLAN 5 GHz	YES	YES	NO
6	PCS 1900 + WLAN 5 GHz	YES	YES	NO
7	WCDMA Band V + Bluetooth	YES	YES	NO
8	GSM 850 + Bluetooth	YES	YES	NO
9	PCS 1900 + Bluetooth	YES	YES	NO

The device is capable of personal hotspot mode with WLAN in 2.4 GHz band.

However, the 5 GHz bands do not support hotspot mode.

### 14.8.2 Antenna Separation Distances

WWAN to WLAN/Bluetooth : 104 mm

### 14.8.3 Standalone SAR Estimation

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f_{\text{(GHz)}} / 7.5}] \text{ W/kg for 1 g SAR, test separation distances} \leq 50 \text{ mm}$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied.

Band	Frequency (MHz)	Max. Power		Test Position	Distance (mm)	Estimated SAR (W/kg)
		(dBm)	(mW)			
Bluetooth	2441	4.0	2.5	Head	< 5	0.104
				Body	10	0.052

#### 14.8.4 Sum of the SAR for WWAN + WLAN 2.4 GHz

##### 14.8.4.1 Head

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		WLAN 2.4 GHz	
Left Touched	WCDMA Band V	0.584	0.107	<b>0.691</b>
	GSM 850	0.618	0.107	<b>0.725</b>
	PCS1900	0.506	0.107	<b>0.613</b>
Left Tilted	WCDMA Band V	0.302	0.089	<b>0.391</b>
	GSM 850	0.347	0.089	<b>0.436</b>
	PCS1900	0.106	0.089	<b>0.195</b>
Right Touched	WCDMA Band V	0.554	0.172	<b>0.726</b>
	GSM 850	0.564	0.172	<b>0.736</b>
	PCS1900	0.667	0.172	<b>0.839</b>
Right Tilted	WCDMA Band V	0.313	0.112	<b>0.425</b>
	GSM 850	0.315	0.112	<b>0.427</b>
	PCS1900	0.102	0.112	<b>0.214</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.4.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 2.4 GHz	
Top Edge	WCDMA Band V	N/A	0.027	N/A
	GSM 850	N/A	0.027	N/A
	PCS1900	N/A	0.027	N/A
Bottom Edge	WCDMA Band V	0.091	N/A	N/A
	GSM 850	0.110	N/A	N/A
	PCS1900	0.478	N/A	N/A
Left Edge	WCDMA Band V	0.463	0.045	0.508
	GSM 850	0.496	0.045	0.541
	PCS1900	0.115	0.045	0.160
Right Edge	WCDMA Band V	0.385	N/A	N/A
	GSM 850	0.373	N/A	N/A
	PCS1900	0.293	N/A	N/A
Front Side	WCDMA Band V	0.632	0.029	0.661
	GSM 850	0.669	0.029	0.698
	PCS1900	0.544	0.029	0.573
Rear Side	WCDMA Band V	0.832	0.043	0.875
	GSM 850	0.960	0.043	1.003
	PCS1900	0.781	0.043	0.824

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.5 Sum of the SAR for WWAN + WLAN 5.2 GHz

##### 14.8.5.1 Head

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.2 GHz	
Left Touched	WCDMA Band V	0.584	0.054	<b>0.638</b>
	GSM 850	0.618	0.054	<b>0.672</b>
	PCS1900	0.506	0.054	<b>0.560</b>
Left Tilted	WCDMA Band V	0.302	0.046	<b>0.348</b>
	GSM 850	0.347	0.046	<b>0.393</b>
	PCS1900	0.106	0.046	<b>0.152</b>
Right Touched	WCDMA Band V	0.554	0.099	<b>0.653</b>
	GSM 850	0.564	0.099	<b>0.663</b>
	PCS1900	0.667	0.099	<b>0.766</b>
Right Tilted	WCDMA Band V	0.313	0.079	<b>0.392</b>
	GSM 850	0.315	0.079	<b>0.394</b>
	PCS1900	0.102	0.079	<b>0.181</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.5.2 Body w/ 1.0 cm (body-worn accessory mode)

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		WLAN 5.2 GHz	
Front Side	WCDMA Band V	0.632	0.020	<b>0.652</b>
	GSM 850	0.669	0.020	<b>0.689</b>
	PCS1900	0.544	0.020	<b>0.564</b>
Rear Side	WCDMA Band V	0.832	0.075	<b>0.907</b>
	GSM 850	0.960	0.075	<b>1.035</b>
	PCS1900	0.781	0.075	<b>0.856</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.6 Sum of the SAR for WWAN + WLAN 5.3 GHz

##### 14.8.6.1 Head

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		WLAN 5.3 GHz	
Left Touched	WCDMA Band V	0.584	0.060	<b>0.644</b>
	GSM 850	0.618	0.060	<b>0.678</b>
	PCS1900	0.506	0.060	<b>0.566</b>
Left Tilted	WCDMA Band V	0.302	0.062	<b>0.364</b>
	GSM 850	0.347	0.062	<b>0.409</b>
	PCS1900	0.106	0.062	<b>0.168</b>
Right Touched	WCDMA Band V	0.554	0.118	<b>0.672</b>
	GSM 850	0.564	0.118	<b>0.682</b>
	PCS1900	0.667	0.118	<b>0.785</b>
Right Tilted	WCDMA Band V	0.313	0.099	<b>0.412</b>
	GSM 850	0.315	0.099	<b>0.414</b>
	PCS1900	0.102	0.099	<b>0.201</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.6.2 Body w/ 1.0 cm (body-worn accessory mode)

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		WLAN 5.3 GHz	
Front Side	WCDMA Band V	0.632	0.024	<b>0.656</b>
	GSM 850	0.669	0.024	<b>0.693</b>
	PCS1900	0.544	0.024	<b>0.568</b>
Rear Side	WCDMA Band V	0.832	0.080	<b>0.912</b>
	GSM 850	0.960	0.080	<b>1.040</b>
	PCS1900	0.781	0.080	<b>0.861</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.



#### 14.8.7 Sum of the SAR for WWAN + WLAN 5.6 GHz

##### 14.8.7.1 Head

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		WLAN 5.6 GHz	
Left Touched	WCDMA Band V	0.584	0.115	<b>0.699</b>
	GSM 850	0.618	0.115	<b>0.733</b>
	PCS1900	0.506	0.115	<b>0.621</b>
Left Tilted	WCDMA Band V	0.302	0.108	<b>0.410</b>
	GSM 850	0.347	0.108	<b>0.455</b>
	PCS1900	0.106	0.108	<b>0.214</b>
Right Touched	WCDMA Band V	0.554	0.165	<b>0.719</b>
	GSM 850	0.564	0.165	<b>0.729</b>
	PCS1900	0.667	0.165	<b>0.832</b>
Right Tilted	WCDMA Band V	0.313	0.126	<b>0.439</b>
	GSM 850	0.315	0.126	<b>0.441</b>
	PCS1900	0.102	0.126	<b>0.228</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.7.2 Body w/ 1.0 cm (body-worn accessory mode)

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		WLAN 5.6 GHz	
Front Side	WCDMA Band V	0.632	0.036	<b>0.668</b>
	GSM 850	0.669	0.036	<b>0.705</b>
	PCS1900	0.544	0.036	<b>0.580</b>
Rear Side	WCDMA Band V	0.832	0.103	<b>0.935</b>
	GSM 850	0.960	0.103	<b>1.063</b>
	PCS1900	0.781	0.103	<b>0.884</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.8.8 Sum of the SAR for WWAN + Bluetooth

##### 14.8.8.1 Head

##### Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		Bluetooth	
Left Touched	WCDMA Band V	0.584	0.104	<b>0.688</b>
	GSM 850	0.618	0.104	<b>0.722</b>
	PCS1900	0.506	0.104	<b>0.610</b>
Left Tilted	WCDMA Band V	0.302	0.104	<b>0.406</b>
	GSM 850	0.347	0.104	<b>0.451</b>
	PCS1900	0.106	0.104	<b>0.210</b>
Right Touched	WCDMA Band V	0.554	0.104	<b>0.658</b>
	GSM 850	0.564	0.104	<b>0.668</b>
	PCS1900	0.667	0.104	<b>0.771</b>
Right Tilted	WCDMA Band V	0.313	0.104	<b>0.417</b>
	GSM 850	0.315	0.104	<b>0.419</b>
	PCS1900	0.102	0.104	<b>0.206</b>

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

**14.8.8.2 Body w/ 1.0 cm (body-worn accessory mode)****Sum of the SAR with Measured Values**

Test Position	Highest 1 g SAR (W/kg)			$\Sigma$ 1 g SAR (W/kg)
	WWAN		Bluetooth	
Front Side	WCDMA Band V	0.632	0.052	<b>0.684</b>
	GSM 850	0.669	0.052	<b>0.721</b>
	PCS1900	0.544	0.052	<b>0.596</b>
Rear Side	WCDMA Band V	0.832	0.052	<b>0.884</b>
	GSM 850	0.960	0.052	<b>1.012</b>
	PCS1900	0.781	0.052	<b>0.833</b>

**SAR to Peak Location Separation Ratio (SPLSR)**

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

## 16 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
E-Field Probe	ET3DV6	SPEAG	S-2	2012/8	1 Year
E-Field Probe	EX3DV4	SPEAG	S-17	2012/9	1 Year
DAE	DAE4	SPEAG	S-3	2012/11	1 Year
Robot	RX60L	SPEAG	S-7	-----	N/A
Probe Alignment Unit	LB1RX60L	SPEAG	S-13	-----	N/A
Network Analyzer	8719ET	Agilent	B-53	2012/9	1 Year
Dielectric Probe Kit	85070D	Agilent	B-54	-----	N/A
835MHz Dipole	D835V2	SPEAG	S-23	2012/8	1 Year
1900MHz Dipole	D1900V2	SPEAG	S-25	2012/8	1 Year
2450MHz Dipole	D2450V2	SPEAG	S-6	2012/11	1 Year
5GHz Dipole	D5GHzV2	SPEAG	S-31	2012/9	1 Year
Signal Generator	MG3681A	Anritsu	B-3	2012/9	1 Year
Signal Generator	MG3710A	Anritsu	B-41	2012/9	1 Year
RF Power Amplifier	A0840-3833-R	R&K	A-34	-----	N/A
RF Power Amplifier	CGA020M602-2633R	R&K	A-51	-----	N/A
Directional Coupler	4226-20	narda	D-87	-----	N/A
Low Pass Filter	LSM1000-4BA	LARK	D-90	2012/11	1 Year
Low Pass Filter	LSM2200-4BA	LARK	D-91	2012/11	1 Year
Low Pass Filter	LSM2700-3BA	LARK	D-92	2012/11	1 Year
Radio Communication Analyzer	MT8820C	Anritsu	B-5	2013/2	1 Year
Power Meter	E4417A	Agilent	B-51	2012/6	1 Year
Power Sensor	E9323A	Agilent	B-59	2012/6	1 Year
Power Meter	N1911A	Agilent	B-63	2012/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2012/7	1 Year
Attenuator	54A-10	Weinschel	D-28	2012/9	1 Year
Attenuator	2-20	Weinschel	D-36	2012/9	1 Year

**17 Appendix**

<b>Exhibit</b>	<b>Contents</b>	<b>No. of page(s)</b>
1	System Validation Plots	10
2-1	SAR Test Plots (WCDMA Band V)	13
2-2	SAR Test Plots (GSM 850)	13
2-3	SAR Test Plots (PCS 1900)	11
2-4	SAR Test Plots (WLAN 2.4 GHz)	10
2-5	SAR Test Plots (WLAN 5 GHz)	24
3-1	Dosimetric E-Field Probe – ET3DV6, S/N: 1679	11
3-2	Dosimetric E-Field Probe – EX3DV4, S/N: 3808	11
4-1	System Validation Dipole – D835V2, S/N: 4d081	8
4-2	System Validation Dipole – D1900V2, S/N: 5d112	8
4-3	System Validation Dipole – D2450V2, S/N: 714	8
4-4	System Validation Dipole – D5GHzV2, S/N: 1111	13