

**#01\_GSM850\_GPRS (4 Tx slots)\_Right Cheek\_Ch128**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL\_850\_190809 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 40.855$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 824.2 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.147 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.38 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.171 W/kg

**SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.147 W/kg

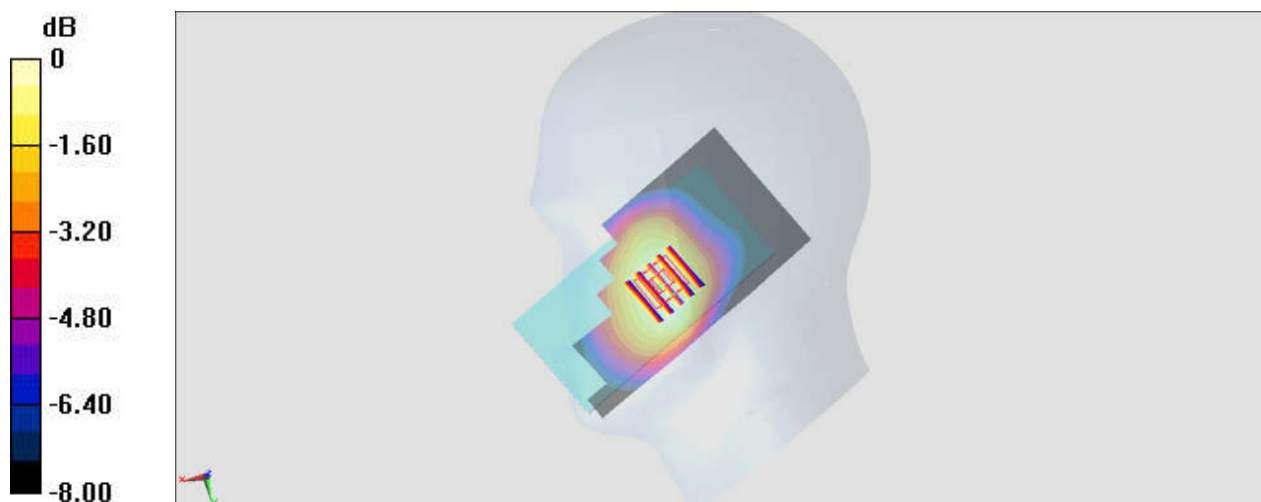

0 dB = 0.147 W/kg = -8.33 dBW/kg

## #02\_GSM1900\_GPRS (4 Tx slots)\_Left Tilted\_Ch512

Communication System: PCS ; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_190810 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 39.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.17, 5.17, 5.17) @ 1850.2 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0414 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.496 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0410 W/kg

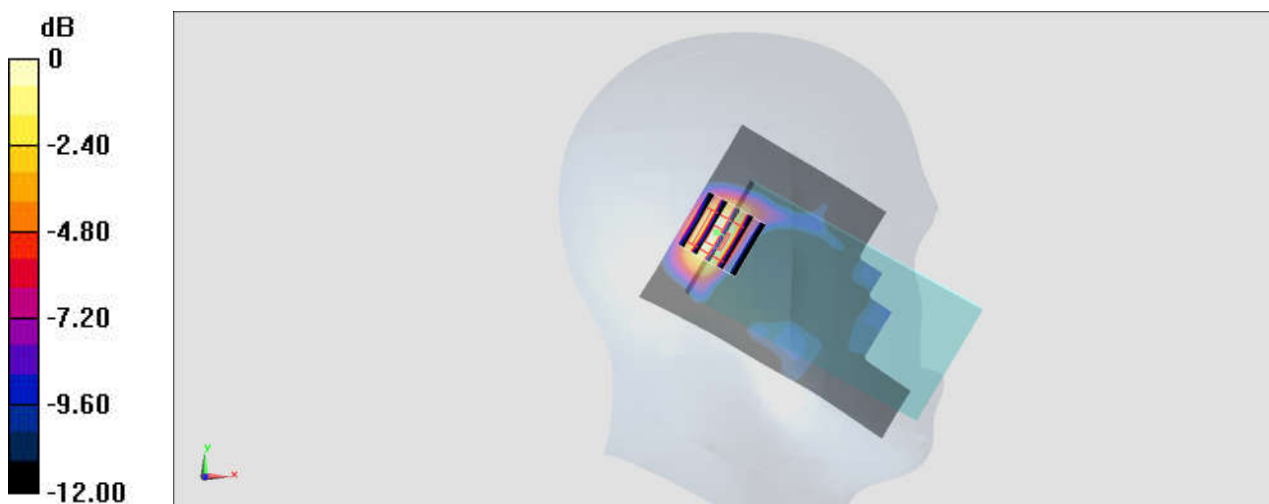

0 dB = 0.0410 W/kg = -13.87 dBW/kg

### #03\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
 Medium: HSL\_850\_190809 Medium parameters used :  $f = 826.4$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 826.4 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.108 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 11.54 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 0.125 W/kg  
**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.079 W/kg**  
 Maximum value of SAR (measured) = 0.109 W/kg

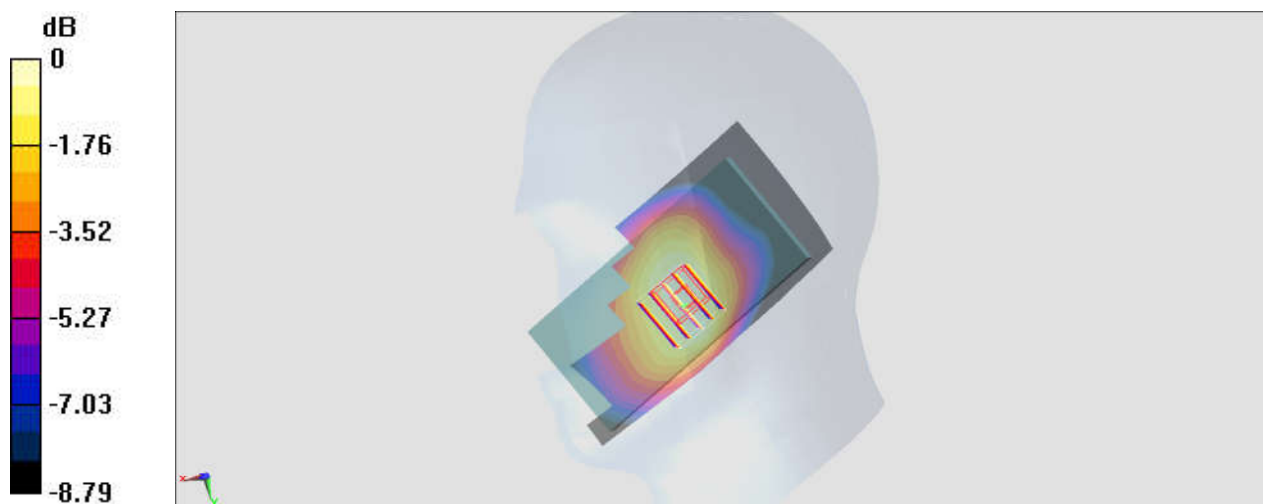

0 dB = 0.109 W/kg = -9.63 dBW/kg

### #04\_LTE Band 5\_10M\_QPSK\_1\_25\_Right Cheek\_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_190809 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.879$  S/m;  $\epsilon_r = 40.703$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 836.5 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0945 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.59 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.108 W/kg  
**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.069 W/kg**  
Maximum value of SAR (measured) = 0.0949 W/kg

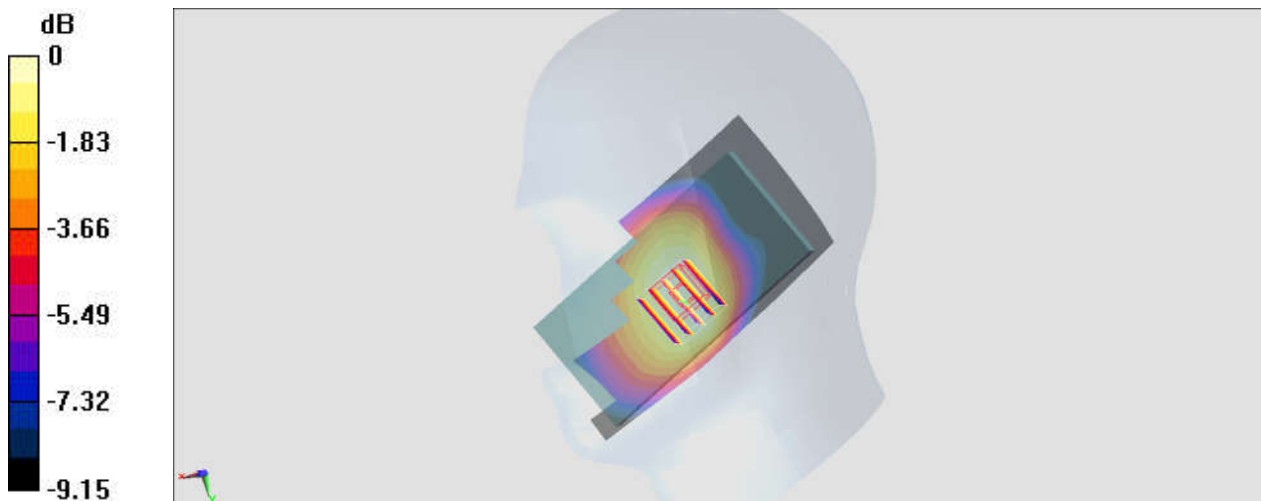

0 dB = 0.0949 W/kg = -10.23 dBW/kg

### #05\_LTE Band 12\_10M\_QPSK\_1\_0\_Right Cheek\_Ch23095


Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_190810 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 41.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.56, 6.56, 6.56) @ 707.5 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0509 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.853 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 0.0570 W/kg  
**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.039 W/kg**  
Maximum value of SAR (measured) = 0.0521 W/kg

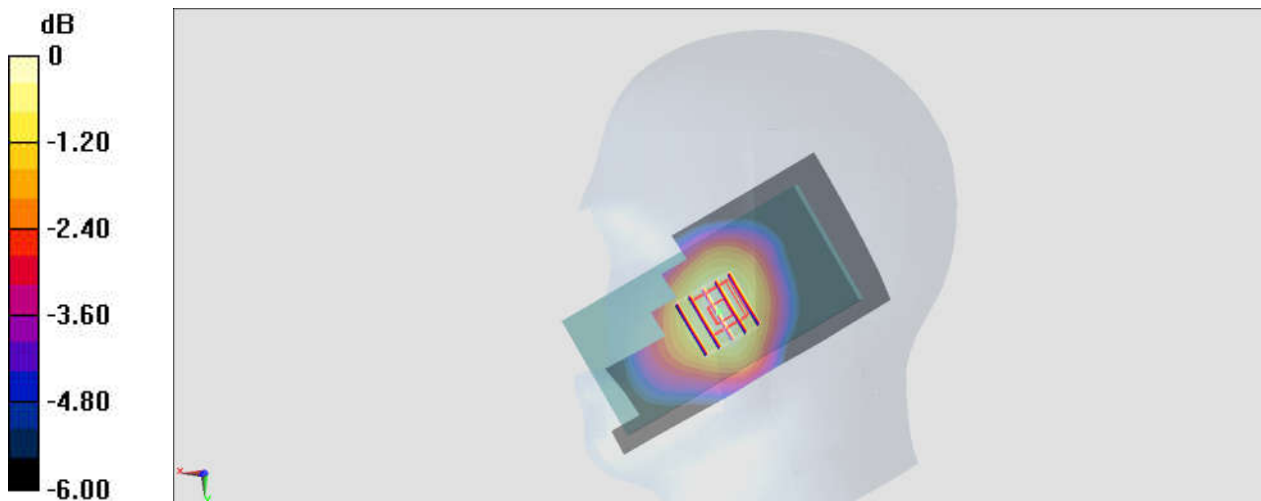

0 dB = 0.0521 W/kg = -12.83 dBW/kg

**#06\_WLAN2.4GHz\_802.11b 1Mbps\_Right Cheek\_Ch6**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium: HSL\_2450\_190812 Medium parameters used :  $f = 2437$  MHz;  $\sigma = 1.812$  S/m;  $\epsilon_r = 39.415$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.11, 7.11, 7.11) @ 2437 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.662 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.76 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.869 W/kg

**SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 0.632 W/kg

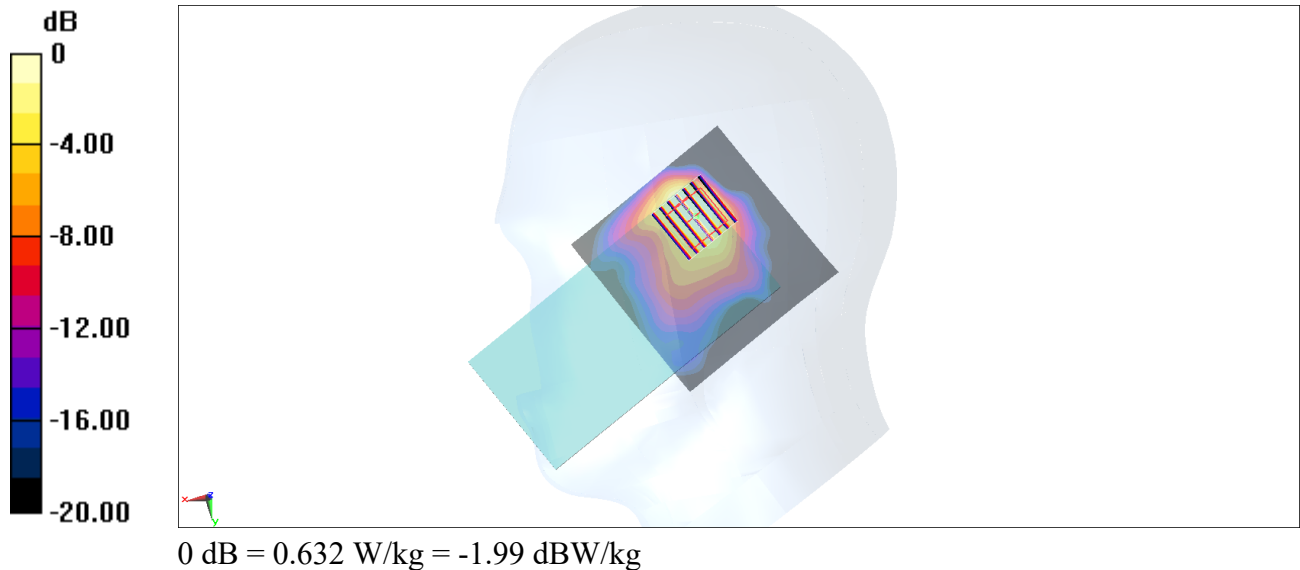

## #07\_WLAN5GHz\_802.11n-HT40 MCS0\_Right Cheek\_Ch62

Communication System: 802.11n; Frequency: 5310 MHz; Duty Cycle: 1:1.108

Medium: HSL\_5G\_190812 Medium parameters used:  $f = 5310$  MHz;  $\sigma = 4.703$  S/m;  $\epsilon_r = 35.797$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.77, 4.77, 4.77) @ 5310 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.111 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.10 W/kg

**SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 1.97 W/kg

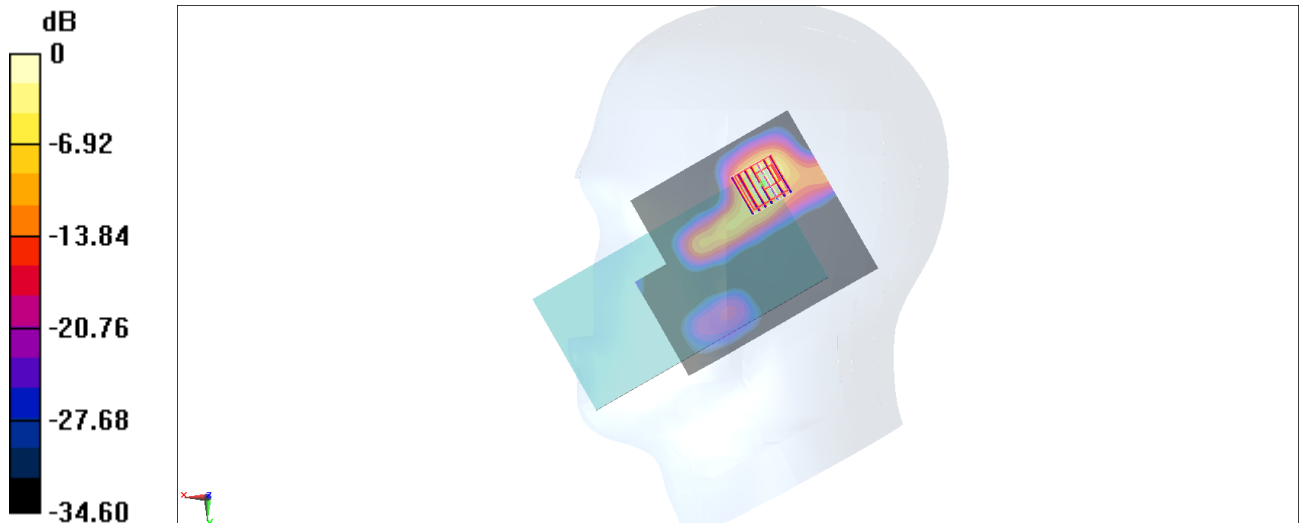

0 dB = 1.97 W/kg = 2.94 dBW/kg

**#08\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Cheek\_Ch106**

Communication System: 802.11ac; Frequency: 5530 MHz; Duty Cycle: 1:1.168

Medium: HSL\_5G\_190812 Medium parameters used:  $f = 5530$  MHz;  $\sigma = 4.914$  S/m;  $\epsilon_r = 35.486$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.2, 4.2, 4.2) @ 5530 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.782 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.312 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 1.77 W/kg

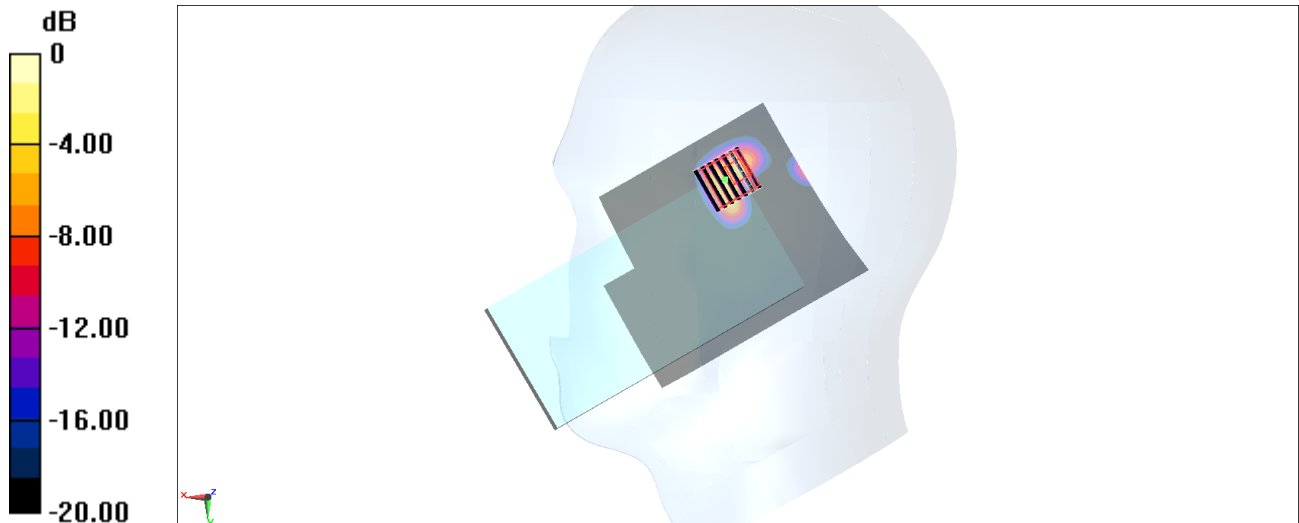

0 dB = 1.77 W/kg = 2.48 dBW/kg



## #09\_Bluetooth\_1Mbps\_Right Tilted\_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium: HSL\_2450\_190812 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.84$  S/m;  $\epsilon_r = 39.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.11, 7.11, 7.11) @ 2441 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.196 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.207 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.167 W/kg

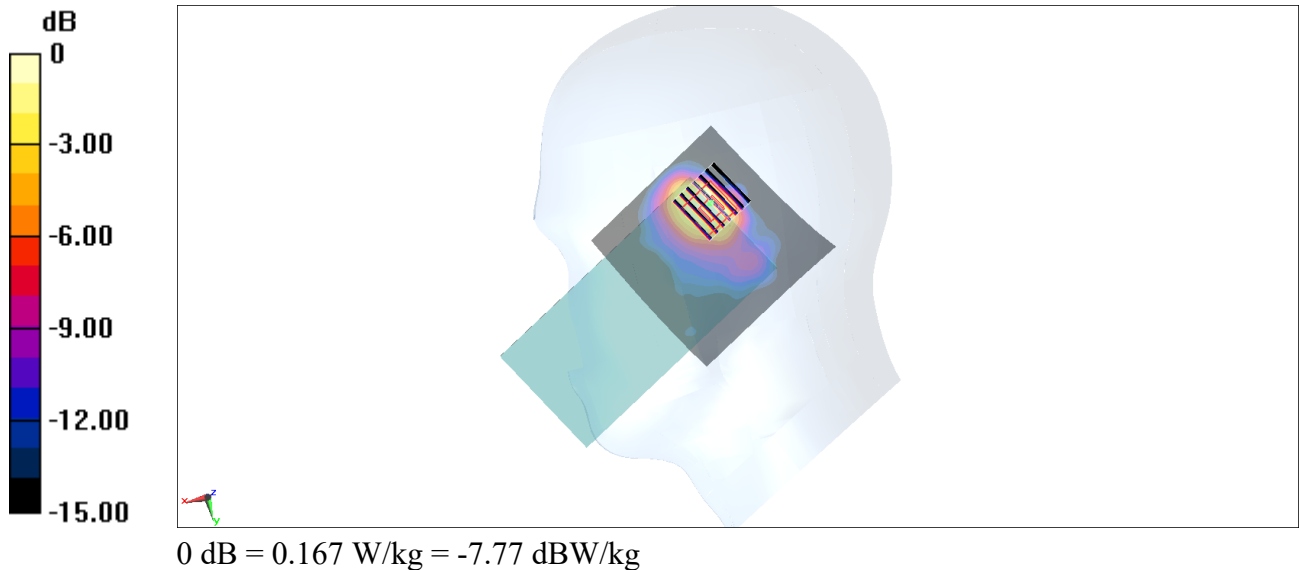

### #10\_GSM850\_GPRS (4 Tx slots)\_Front\_10mm\_Ch128


Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_850\_190809 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 40.855$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 824.2 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.218 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.16 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.252 W/kg  
**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.159 W/kg**  
Maximum value of SAR (measured) = 0.224 W/kg

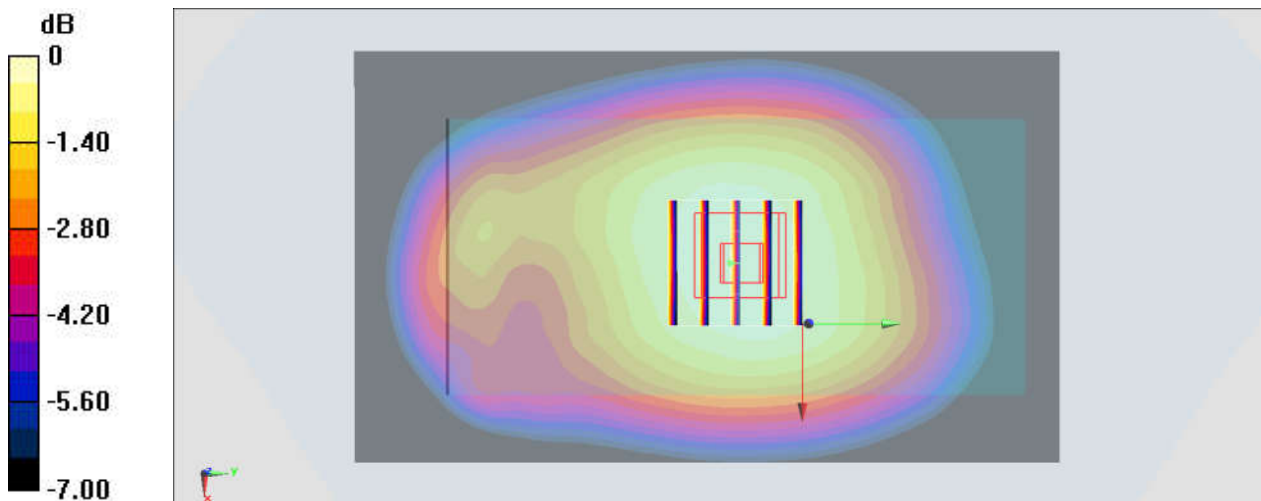

0 dB = 0.224 W/kg = -6.50 dBW/kg

### #11\_GSM1900\_GPRS (4 Tx slots)\_Bottom Side\_10mm\_Ch512


Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900\_190810 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 39.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.17, 5.17, 5.17) @ 1850.2 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.581 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.64 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 0.783 W/kg  
**SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.233 W/kg**  
Maximum value of SAR (measured) = 0.565 W/kg

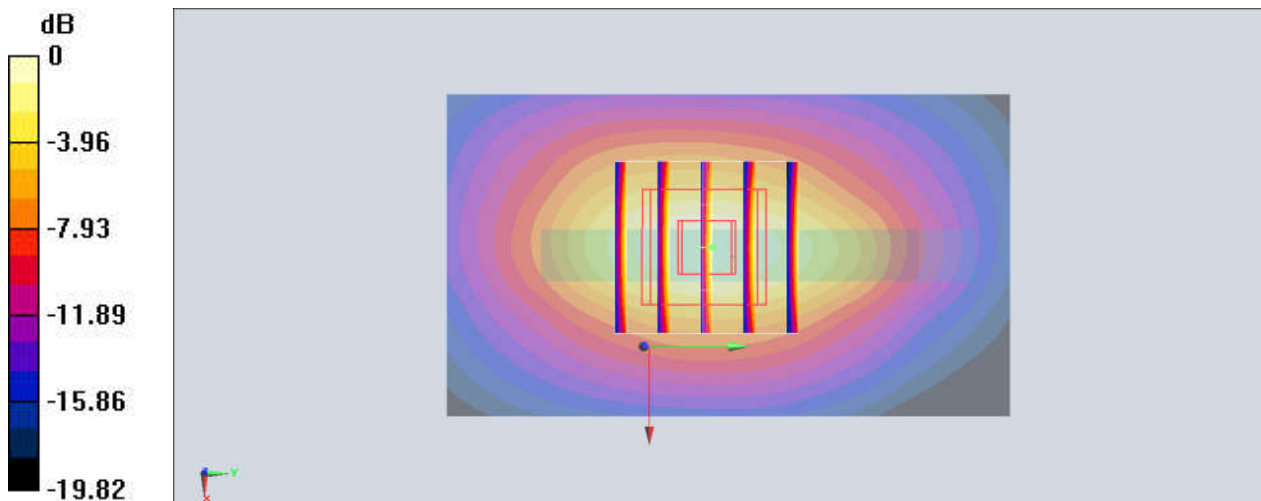

0 dB = 0.565 W/kg = -2.48 dBW/kg

### #12\_WCDMA V\_RMC 12.2Kbps\_Front\_10mm\_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_190809 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 826.4 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.154 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.48 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.174 W/kg  
**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.110 W/kg**  
Maximum value of SAR (measured) = 0.154 W/kg

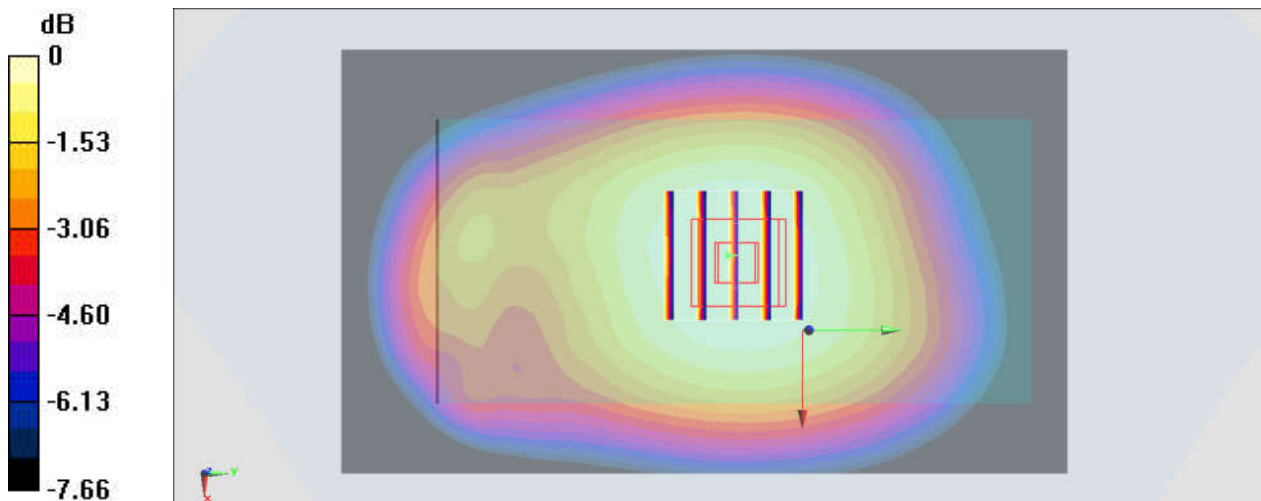

0 dB = 0.154 W/kg = -8.12 dBW/kg

### #13\_LTE Band 5\_10M\_QPSK\_1\_25\_Right Side\_10mm\_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_190809 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.879$  S/m;  $\epsilon_r = 40.703$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 836.5 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x11x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.192 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.09 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.238 W/kg  
**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.113 W/kg**  
Maximum value of SAR (measured) = 0.191 W/kg

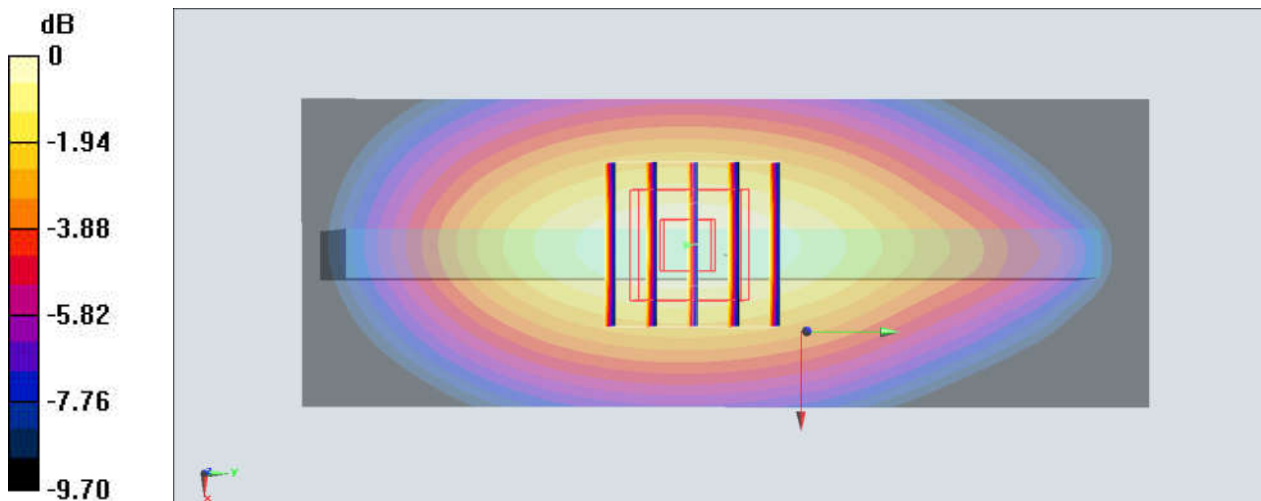

0 dB = 0.191 W/kg = -7.19 dBW/kg

### #14\_LTE Band 12\_10M\_QPSK\_1\_0\_Right Side\_10mm\_Ch23095


Communication System: LTE ; Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium: HSL\_750\_190810 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 41.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.56, 6.56, 6.56) @ 707.5 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x11x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.114 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.807 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 0.137 W/kg  
**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.070 W/kg**  
Maximum value of SAR (measured) = 0.113 W/kg

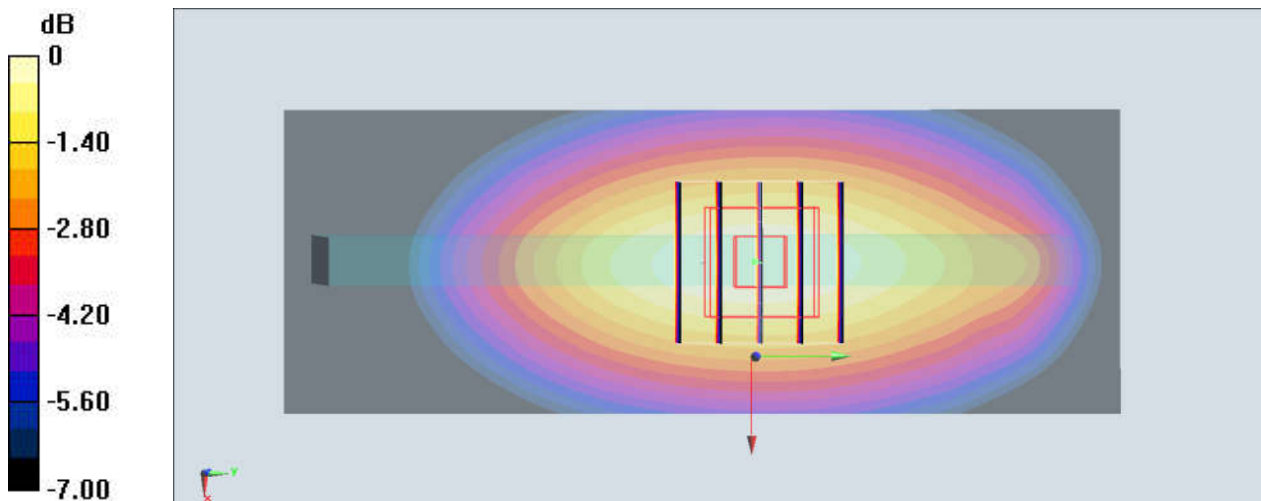

0 dB = 0.113 W/kg = -9.47 dBW/kg

## #15\_WLAN2.4GHz\_802.11b 1Mbps\_Front\_10mm\_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium: HSL\_2450\_190812 Medium parameters used :  $f = 2437$  MHz;  $\sigma = 1.812$  S/m;  $\epsilon_r = 39.415$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.11, 7.11, 7.11) @ 2437 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.121 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.631 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.149 W/kg

**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.116 W/kg

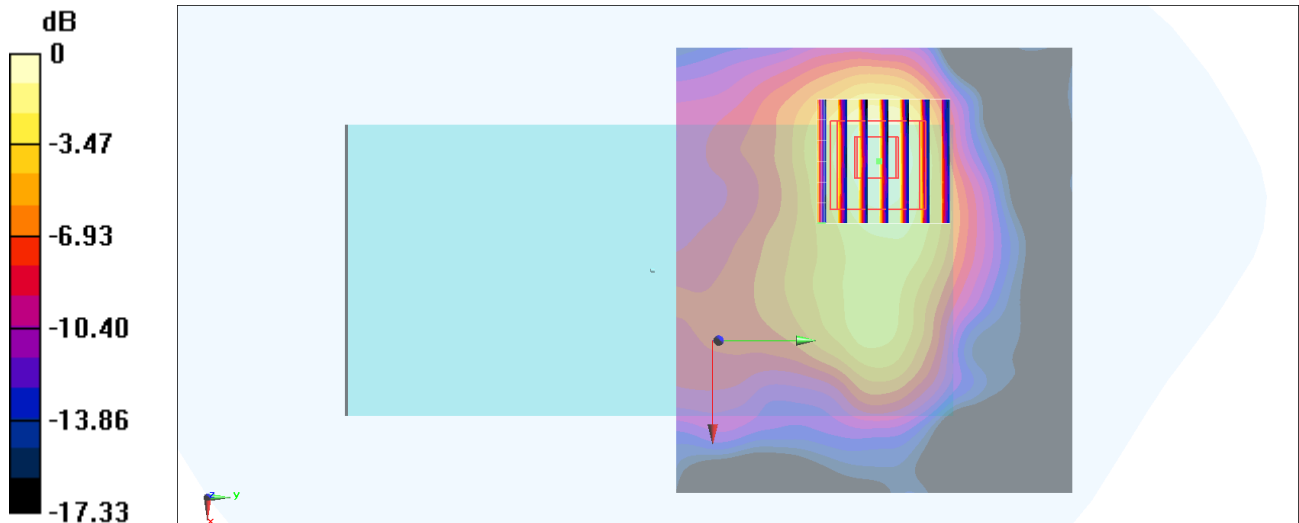

0 dB = 0.116 W/kg = -9.36 dBW/kg

### #16\_GSM850\_GPRS (4 Tx slots)\_Front\_10mm\_Ch128


Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_850\_190809 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 40.855$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 824.2 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.218 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.16 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.252 W/kg  
**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.159 W/kg**  
Maximum value of SAR (measured) = 0.224 W/kg

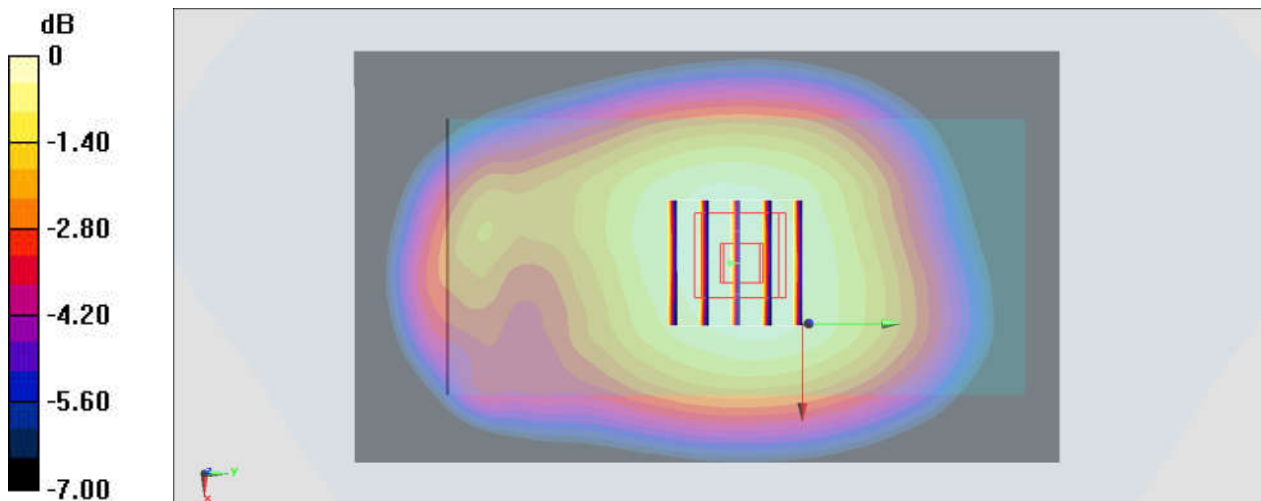

0 dB = 0.224 W/kg = -6.50 dBW/kg



### #17\_GSM1900\_GPRS (4 Tx slots)\_Front\_10mm\_Ch512


Communication System: PCS ; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900\_190810 Medium parameters used :  $f = 1850.2$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 39.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.17, 5.17, 5.17) @ 1850.2 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.312 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.182 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 0.429 W/kg  
**SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.134 W/kg**  
Maximum value of SAR (measured) = 0.311 W/kg

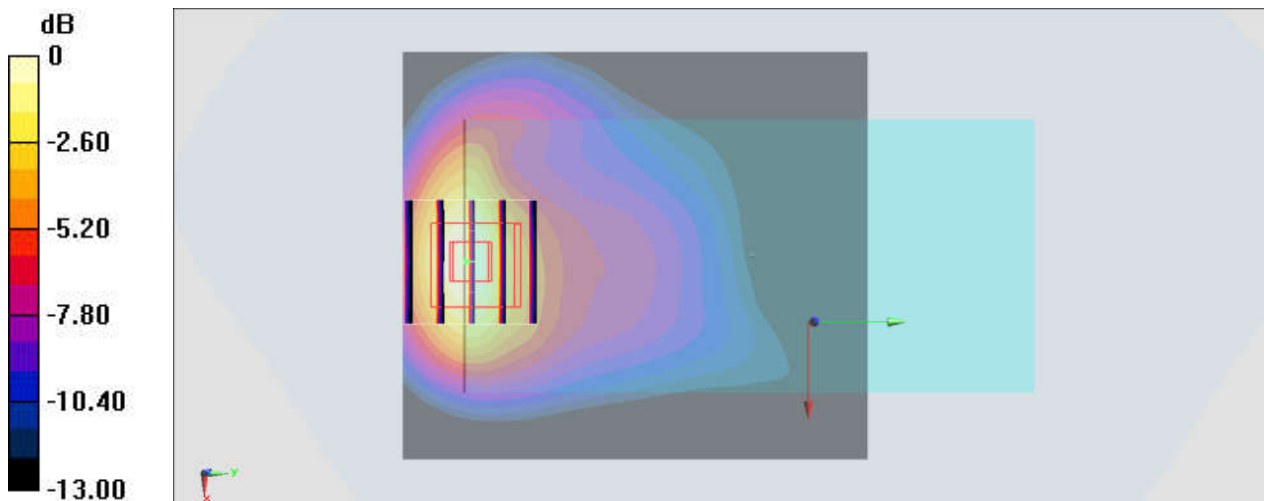

0 dB = 0.311 W/kg = -5.07 dBW/kg

### #18\_WCDMA V\_RMC 12.2Kbps\_Front\_10mm\_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_190809 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 826.4 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.154 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.48 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.174 W/kg  
**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.110 W/kg**  
Maximum value of SAR (measured) = 0.154 W/kg

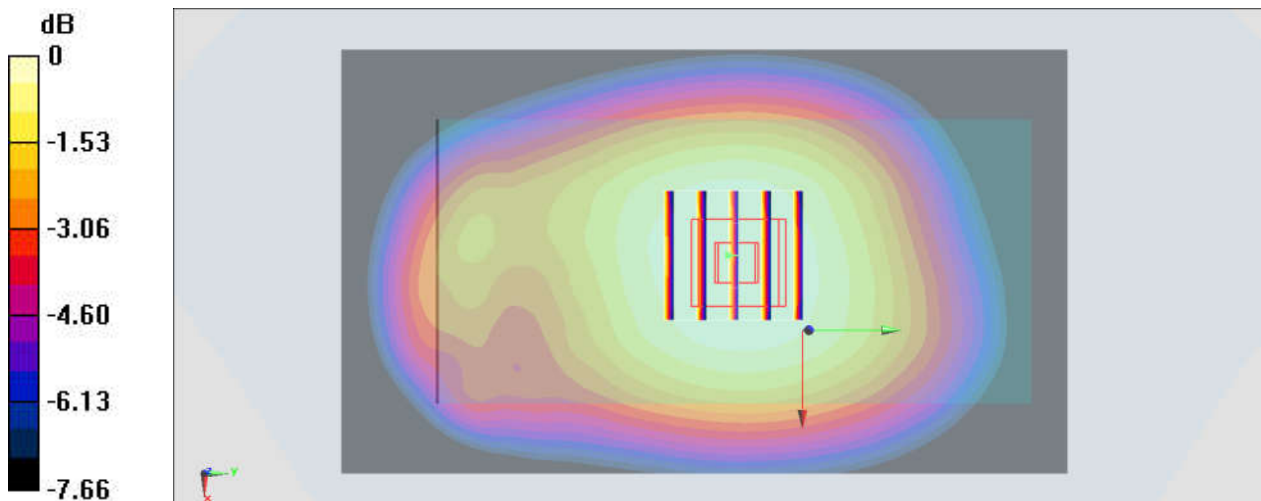

0 dB = 0.154 W/kg = -8.12 dBW/kg

**#19\_LTE Band 5\_10M\_QPSK\_1\_25\_Front\_10mm\_Ch20525**

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190809 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.879$  S/m;  $\epsilon_r = 40.703$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.39, 6.39, 6.39) @ 836.5 MHz; Calibrated: 2018/9/24

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2018/9/19

- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431

- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.115 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.57 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

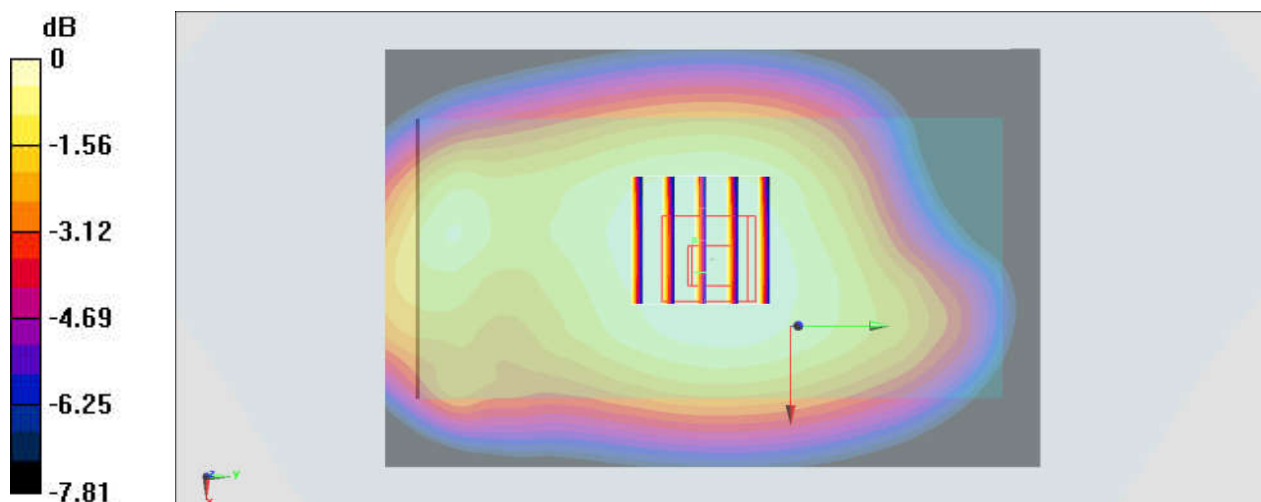

0 dB = 0.115 W/kg = -9.39 dBW/kg

### #20\_LTE Band 12\_10M\_QPSK\_1\_0\_Front\_10mm\_Ch23095


Communication System: LTE ; Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium: HSL\_750\_190810 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.85$  S/m;  $\epsilon_r = 41.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.56, 6.56, 6.56) @ 707.5 MHz; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0902 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.29 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.100 W/kg  
**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.066 W/kg**  
Maximum value of SAR (measured) = 0.0903 W/kg

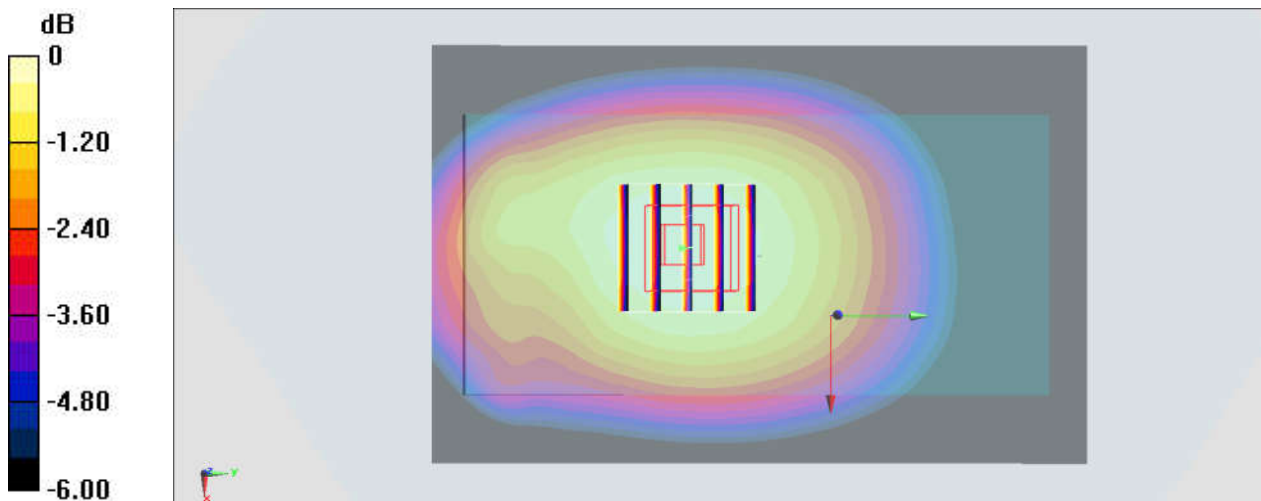

0 dB = 0.0903 W/kg = -10.44 dBW/kg

**#21\_WLAN2.4GHz\_802.11b 1Mbps\_Front\_10mm\_Ch6**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium: HSL\_2450\_190812 Medium parameters used :  $f = 2437$  MHz;  $\sigma = 1.812$  S/m;  $\epsilon_r = 39.415$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.11, 7.11, 7.11) @ 2437 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.121 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.631 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.149 W/kg

**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.116 W/kg

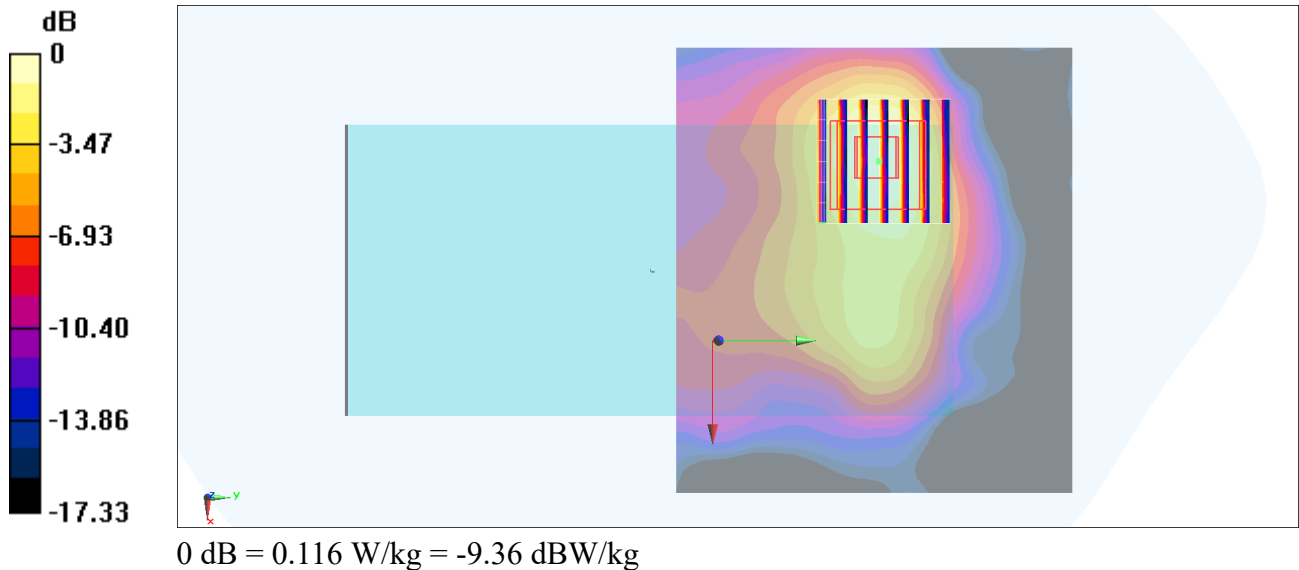

## #22\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Front\_10mm\_Ch58

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.168

Medium: HSL\_5G\_190812 Medium parameters used:  $f = 5290$  MHz;  $\sigma = 4.686$  S/m;  $\epsilon_r = 35.826$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.77, 4.77, 4.77) @ 5290 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (121x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.218 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.231 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.417 W/kg

**SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.279 W/kg

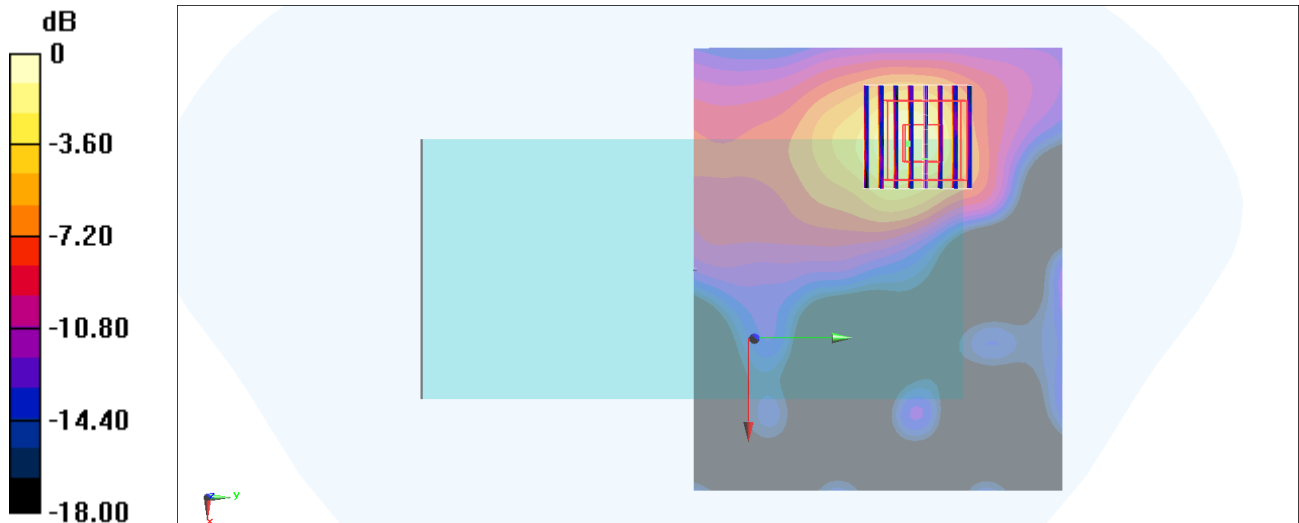

0 dB = 0.279 W/kg = -5.54 dBW/kg

**#23\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Front\_10mm\_Ch106**

Communication System: 802.11ac; Frequency: 5530 MHz; Duty Cycle: 1:1.168

Medium: HSL\_5G\_190812 Medium parameters used:  $f = 5530$  MHz;  $\sigma = 4.914$  S/m;  $\epsilon_r = 35.486$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.2, 4.2, 4.2) @ 5530 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (121x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.132 W/kg

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.324 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.350 W/kg

**SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

