

Report No.: FG900422-06A



# FCC RADIO TEST REPORT

FCC ID : APYHRO00283 Equipment : Wireless router

Applicant : SHARP CORPORATION

1 Takumi-cho, Sakai-ku, Sakai City, Osaka,

Japan 590-8522

Manufacturer : SHARP CORPORATION

2-13-1, HACHIHONMATSU-IIDA,

HIGASHI-HIROSHIMA-SHI, HIROSHIMA

PREFECTURE 739-0192, JAPAN

Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Dec. 10, 2019 and testing was started from Dec. 18, 2019 and completed on Feb. 05, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Lunis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## **Table of Contents**

Report No.: FG9O0422-06A

His	story o	f this test reportf	3
Su	mmary	y of Test Result	4
1	Gene	ral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Testing Location	5
	1.4	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Test Mode	
	2.2	Connection Diagram of Test System	7
	2.3	Support Unit used in test configuration	
	2.4	Measurement Results Explanation Example	8
	2.5	Frequency List of Low/Middle/High Channels	
3	Cond	lucted Test Result	
	3.1	Measuring Instruments	9
	3.2	Conducted Output Power and ERP/EIRP	10
	3.3	Peak-to-Average Ratio	
	3.4	99% Occupied Bandwidth and 26dB Bandwidth Measurement	12
	3.5	Conducted Band Edge	
	3.6	Conducted Spurious Emission	
	3.7	Frequency Stability	
4	Radia	ated Test Items	
	4.1	Measuring Instruments	16
	4.2	Test Setup	16
	4.3	Test Result of Radiated Test	
	4.4	Field Strength of Spurious Radiation Measurement	
5	List o	of Measuring Equipment	
6		rtainty of Evaluation	
Ар		x A. Test Results of Conducted Test	
Αp	pendi	x B. Test Results of ERP/EIRP and Radiated Test	
•	•	x C. Test Setup Photographs	
, ,,	P 21.1417	. a a.	

TEL: 886-3-327-3456 Page Number : 2 of 19 FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020 : 01

## History of this test report

Report No.: FG9O0422-06A

Version	Description	Issued Date
01	Initial issue of report	Feb. 10, 2020

TEL: 886-3-327-3456 Page Number : 3 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## **Summary of Test Result**

Report No.: FG900422-06A

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
	§2.1046	Conducted Output Power		
	§22.913 (a)(2)	Effective Radiated Power (WCDMA Band V)	_	
3.2	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)	Pass	-
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	Under limit 16.82 dB at 3426.000 MHz

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang Report Producer: Ruby Zou

TEL: 886-3-327-3456 Page Number : 4 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## 1 General Description

## 1.1 Product Feature of Equipment Under Test

WCDMA/LTE, and Wi-Fi 2.4GHz 802.11b/g/n/ax.

Product Specification subjective to this standard				
	WWAN <ant.1>: PIFA Antenna</ant.1>			
Antenna Type	<ant.2>: Coupling type (LDS) Antenna WLAN</ant.2>			
	<ant.1>: Loop Antenna <ant.2>: Loop Antenna</ant.2></ant.1>			

Report No.: FG900422-06A

#### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978			
Test Site No.	Sporton Site No. TH03-HY			
Test Engineer	Louis Chung			
Temperature	<b>23</b> .6~24.1°ℂ			
Relative Humidity	51.3-58.2%			

**Note:** The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
rest site No.	03CH11-HY
Test Engineer	Cookie Ku, Fu Chen, and Troye Hsieh
Temperature	18.7~26.5℃
Relative Humidity	40.8~70%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

TEL: 886-3-327-3456 Page Number : 5 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FG900422-06A

- + ANSI C63.26-2015
- ANSI / TIA-603-E
- 47 CFR Part 2, 22(H), 24(E), 27(L)
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

#### Remark:

- **1.** All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 886-3-327-3456 Page Number : 6 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## 2 Test Configuration of Equipment Under Test

#### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Report No.: FG900422-06A

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for AWS Band, Y Plane for Celluar Band, and Z Plane for PCS Band) were recorded in this report.

Radiated emissions were investigated as following frequency range:


- 1. 30 MHz to 9000 MHz for WCDMA Band V
- 30 MHz to 18000 MHz for WCDMA Band IV
- 3. 30 MHz to 19100 MHz for WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes							
Band	Radiated TCs	Conducted TCs					
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					

## 2.2 Connection Diagram of Test System

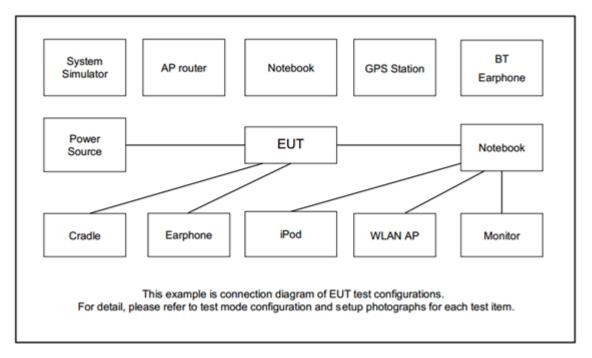

TEL: 886-3-327-3456 Page Number : 7 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	N/A	N/A	N/A	IN/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

Report No.: FG900422-06A

## 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

#### Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.2 + 10 = 14.2 (dB)

## 2.5 Frequency List of Low/Middle/High Channels

Frequency List						
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest		
WCDMA	Channel	4132	4182	4233		
Band V	Frequency	826.4	836.4	846.6		
WCDMA	Channel	9262	9400	9538		
Band II	Frequency	1852.4	1880.0	1907.6		
WCDMA	Channel	1312	1413	1513		
Band IV	Frequency	1712.4	1732.6	1752.6		

TEL: 886-3-327-3456 Page Number : 8 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020


### 3 Conducted Test Result

## 3.1 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.1.1 Test Setup

#### 3.1.2 Conducted Output Power




Report No.: FG9O0422-06A

# 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

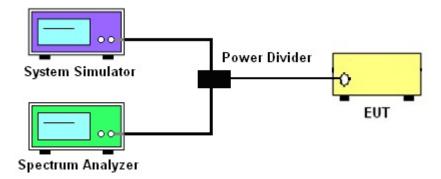

#### 3.1.4 Frequency Stability

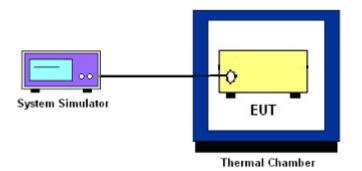

#### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 9 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 3.2 Conducted Output Power and ERP/EIRP

#### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG900422-06A

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$ , ERP = EIRP - 2.15, where

 $P_T$  = transmitter output power in dBm

 $G_T$  = gain of the transmitting antenna in dBi

 $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

TEL: 886-3-327-3456 Page Number : 10 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. Set EUT to transmit at maximum output power.
- 3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.

Report No.: FG900422-06A

- 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

TEL: 886-3-327-3456 Page Number : 11 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG900422-06A

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
   The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEL: 886-3-327-3456 Page Number : 12 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 3.5 Conducted Band Edge

#### 3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG900422-06A

#### 3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The band edges of low and high channels for the highest RF powers were measured.
- 4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 5. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 13 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 3.6 Conducted Spurious Emission

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG900422-06A

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 14 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 3.7 Frequency Stability

#### 3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

Report No.: FG900422-06A

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 15 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020


### 4 Radiated Test Items

## 4.1 Measuring Instruments

See list of measuring instruments of this test report.


## 4.2 Test Setup

#### For radiated test from 30MHz to 1GHz

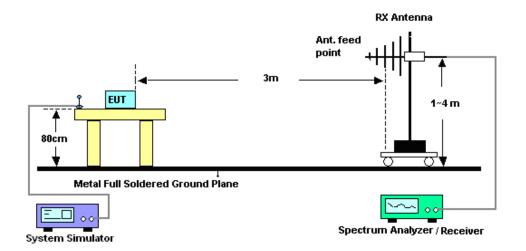

Report No.: FG9O0422-06A

#### For radiated test above 1GHz

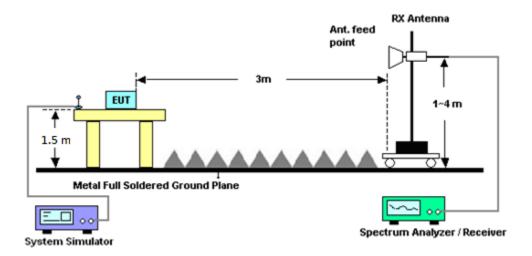

#### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 16 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

### 4.4 Field Strength of Spurious Radiation Measurement

#### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG900422-06A

#### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

- The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

# 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 06, 2019	Dec. 18, 2019	Mar. 05, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 04, 2019	Dec. 18, 2019	Sep. 03, 2020	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 26, 2019	Dec. 18, 2019	Nov. 25, 2020	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 09, 2019	Dec. 18, 2019	Oct. 08, 2020	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 23, 2019	Dec. 18, 2019	Aug. 22, 2020	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26. 5S-20	#A	N/A	Nov. 06, 2019	Dec. 18, 2019	Nov. 05, 2020	Conducted (TH03-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Dec. 18, 2019~ Feb. 05, 2020	Dec. 12, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Dec. 18, 2019~ Feb. 05, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Dec. 10, 2019	Dec. 18, 2019~ Feb. 05, 2020	Dec. 09, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	Dec. 18, 2019~ Feb. 05, 2020	Oct. 11, 2020	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 04, 2019	Dec. 18, 2019~ Feb. 05, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 13, 2019	Dec. 18, 2019~ Feb. 05, 2020	Nov. 12, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 28, 2019	Dec. 18, 2019~ Feb. 05, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN2	1.2GHz High Pass Filter	Sep. 15, 2019	Dec. 18, 2019~ Feb. 05, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 15, 2019	Dec. 18, 2019~ Feb. 05, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 18, 2019~ Feb. 05, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Dec. 18, 2019~ Feb. 05, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Dec. 18, 2019~ Feb. 05, 2020	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Mar. 08, 2019	Dec. 18, 2019~ Feb. 05, 2020	Mar. 07, 2020	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Dec. 18, 2019~ Feb. 05, 2020	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	Dec. 18, 2019~ Feb. 05, 2020	Nov. 06, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP161237	N/A	Oct. 25, 2019	Dec. 18, 2019~ Feb. 05, 2020	Oct. 24, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 13, 2019	Dec. 18, 2019~ Feb. 05, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Dec. 18, 2019~ Feb. 05, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 13, 2019	Dec. 18, 2019~ Feb. 05, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Dec. 18, 2019~ Feb. 05, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Aug. 27, 2019	Dec. 18, 2019~ Feb. 05, 2020	Aug. 26, 2020	Radiation (03CH11-HY)

Report No.: FG9O0422-06A

TEL: 886-3-327-3456 Page Number : 18 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## 6 Uncertainty of Evaluation

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.09
Confidence of 95% (U = 2Uc(y))	3.03

Report No.: FG9O0422-06A

#### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

	rance and the second se
Measuring Uncertainty for a Level of	2.44
Confidence of 95% (U = 2Uc(y))	3.44

#### <u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	3.95
Confidence of 95% (U = 2Uc(y))	3.95

TEL: 886-3-327-3456 Page Number : 19 of 19
FAX: 886-3-328-4978 Issued Date : Feb. 10, 2020

## **Appendix A. Test Results of Conducted Test**

## Conducted Output Power(Average power)

	Conducted Power (*Unit: dBm)						
Band	V	WCDMA Band V WCDMA Band II			II		
Channel	4132	4182	4233	9262	9400	9538	
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	
RMC 12.2K	23.33	23.29	22.80	23.26	23.27	23.30	
HSDPA Subtest-1	23.08	23.14	22.93	23.21	23.28	23.15	
HSDPA Subtest-2	22.05	21.85	22.03	22.25	22.12	22.20	
HSDPA Subtest-3	21.37	21.44	21.56	21.63	21.73	21.76	
HSDPA Subtest-4	21.48	21.33	21.56	21.64	21.62	21.82	
HSUPA Subtest-1	20.51	20.45	20.41	20.64	20.55	20.53	
HSUPA Subtest-2	20.45	20.56	20.56	20.64	20.79	20.75	
HSUPA Subtest-3	20.30	20.17	20.34	20.48	20.38	20.45	
HSUPA Subtest-4	21.61	21.41	21.44	21.72	21.63	21.54	
<b>HSUPA Subtest-5</b>	21.61	21.41	21.44	21.72	21.63	21.54	

	Conducted Power (*Unit: dBm)					
Band		WCDMA Band IV				
Channel	1312	1413	1513			
Frequency	1712.4	1732.6	1752.6			
RMC 12.2K	22.92	22.93	22.89			
HSDPA Subtest-1	22.75	22.72	22.74			
HSDPA Subtest-2	22.92	22.87	22.72			
HSDPA Subtest-3	21.76	21.62	21.75			
HSDPA Subtest-4	21.65	21.52	21.59			
HSUPA Subtest-1	20.25	20.35	20.17			
HSUPA Subtest-2	20.26	20.35	20.33			
HSUPA Subtest-3	20.20	19.93	20.24			
HSUPA Subtest-4	21.33	21.28	21.26			
HSUPA Subtest-5	21.33	21.28	21.26			


## A2. WCDMA

## Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.48	3.72	3.60	
Middle CH	3.76	3.60	4.16	PASS
Highest CH	3.32	3.56	4.76	


Report No.: FG9O0422-06A

TEL: 886-3-327-3456 Page Number : A2-1 of 16

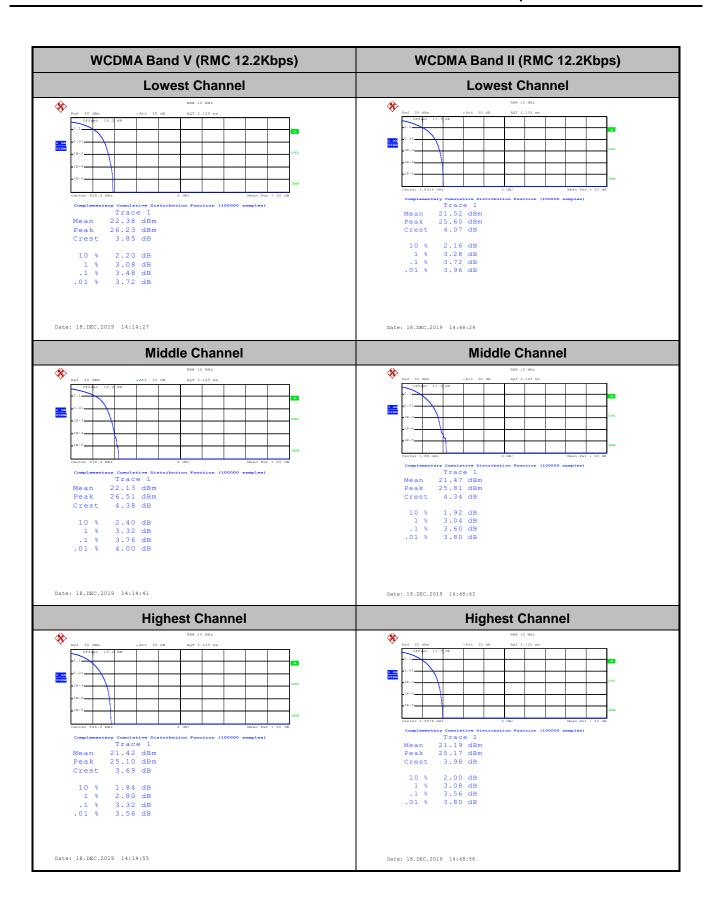

Report No.: FG900422-06A

TEL: 886-3-327-3456 Page Number : A2-2 of 16

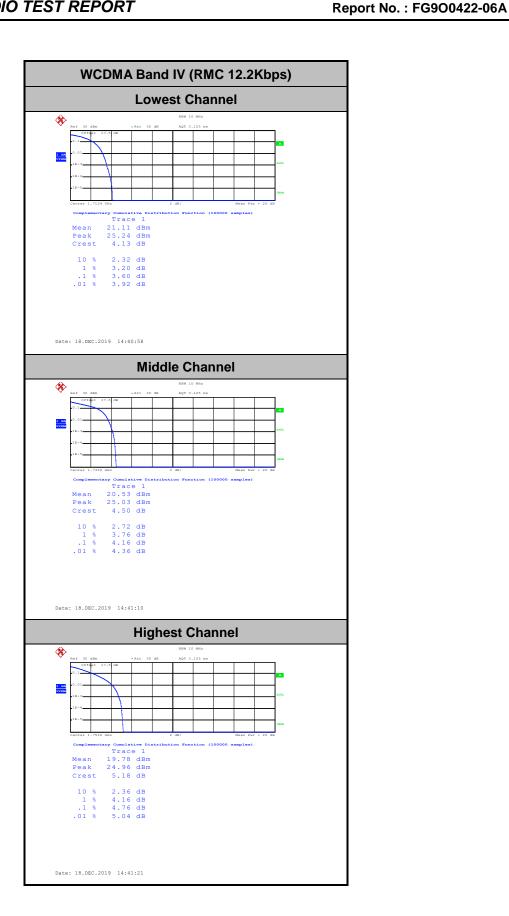

TEL: 886-3-327-3456 Page Number : A2-3 of 16


26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.73	4.72	4.70
Middle CH	4.72	4.71	4.74
Highest CH	4.72	4.71	4.72

Report No.: FG9O0422-06A

TEL: 886-3-327-3456 Page Number : A2-4 of 16




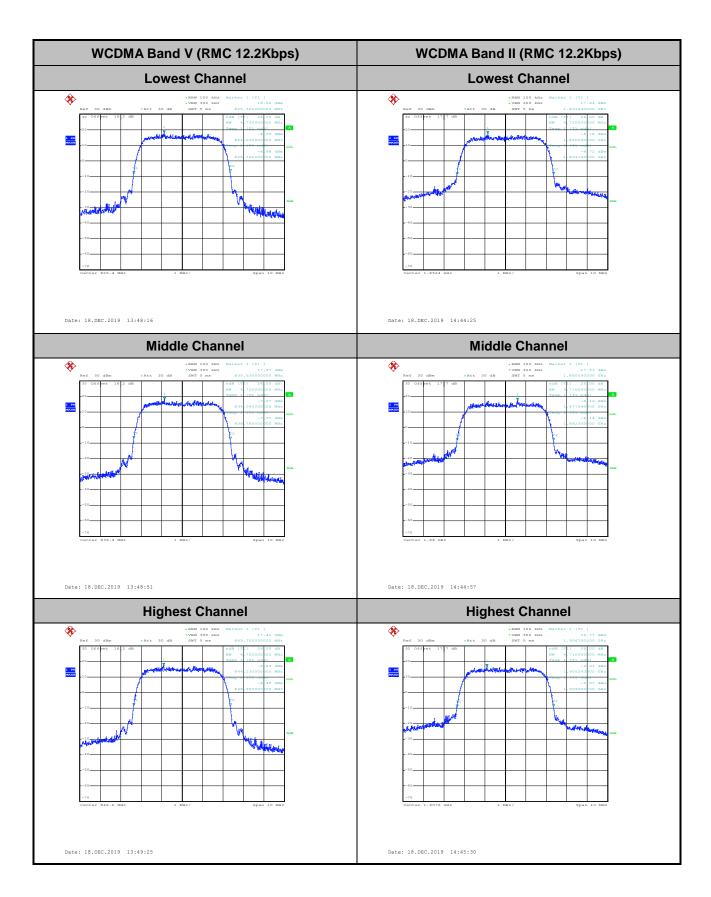

Report No.: FG9O0422-06A

TEL: 886-3-327-3456 Page Number: A2-5 of 16

Report No.: FG9O0422-06A

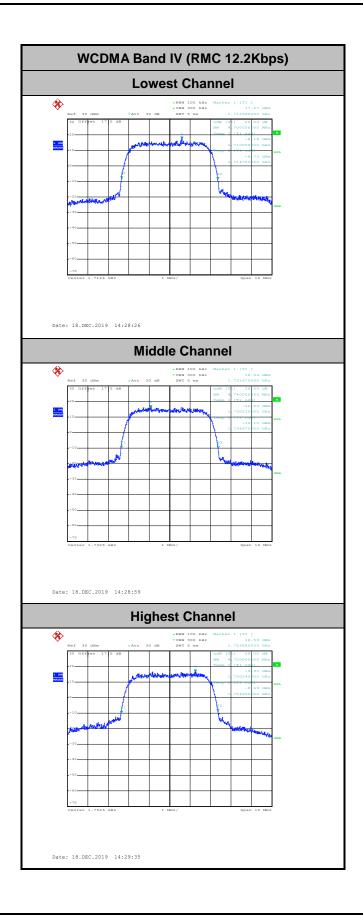

TEL: 886-3-327-3456 Page Number : A2-6 of 16


# Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.17	4.15
Middle CH	4.15	4.15	4.16
Highest CH	4.15	4.15	4.16

Report No.: FG9O0422-06A

TEL: 886-3-327-3456 Page Number : A2-7 of 16


FCC RADIO TEST REPORT

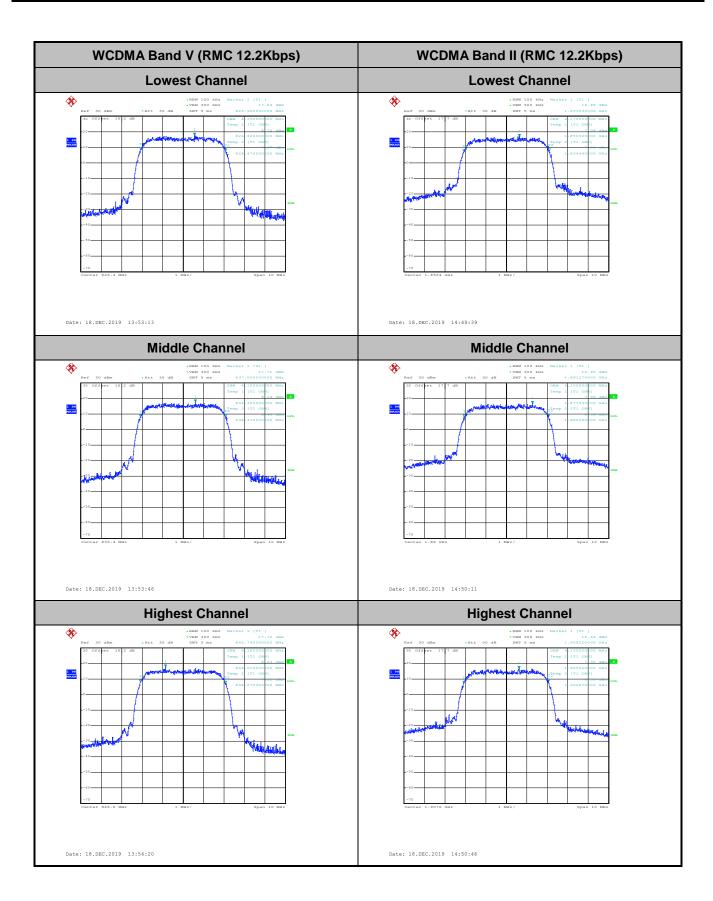

Report No.: FG9O0422-06A


TEL: 886-3-327-3456 Page Number: A2-8 of 16

Report No.: FG9O0422-06A

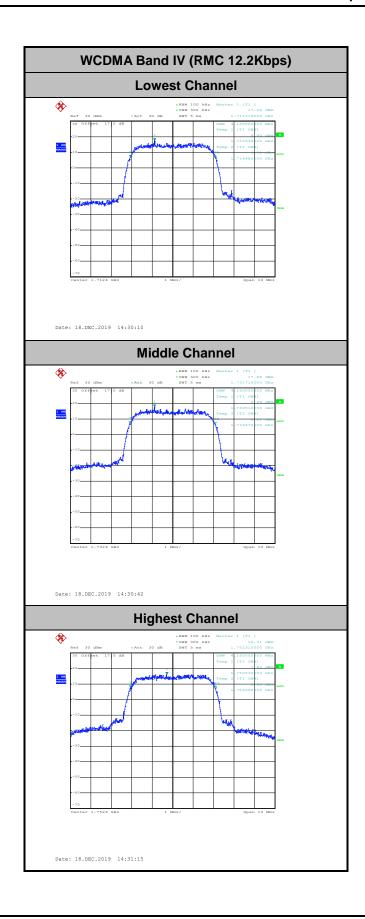


TEL: 886-3-327-3456 Page Number: A2-9 of 16

## **Conducted Band Edge**

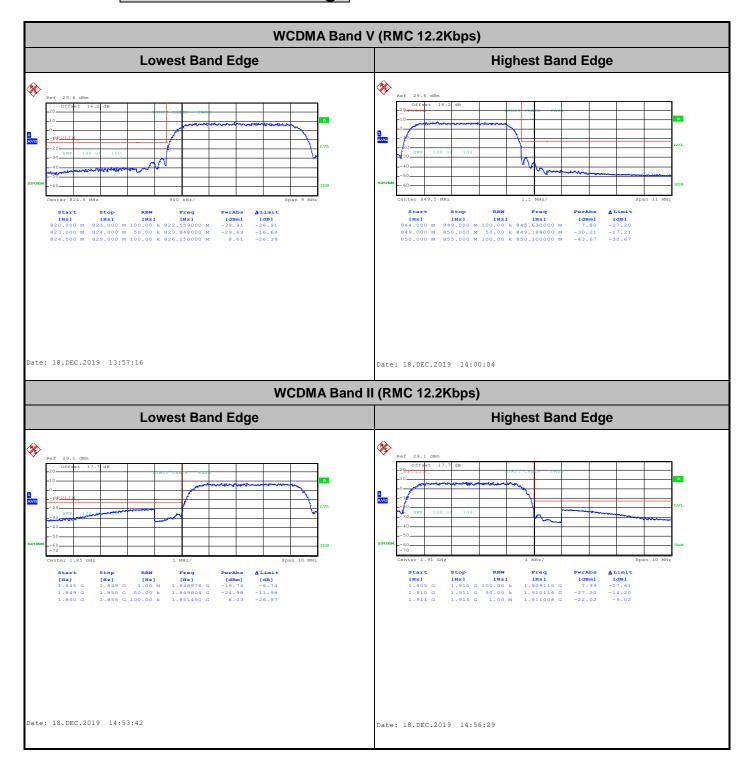

Report No.: FG9O0422-06A


TEL: 886-3-327-3456 Page Number: A2-10 of 16

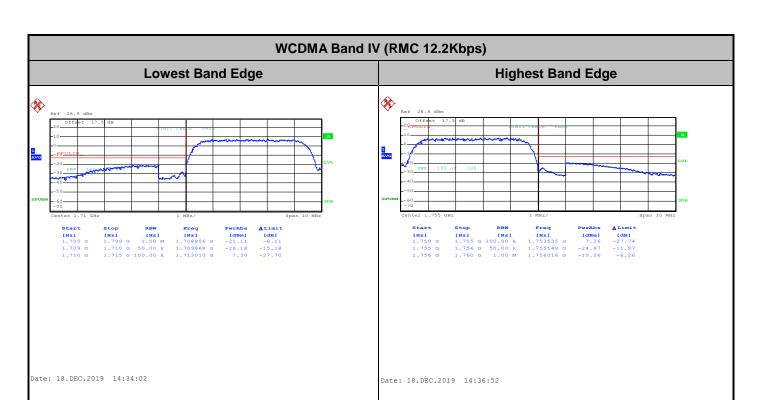

Report No.: FG9O0422-06A

TEL: 886-3-327-3456 Page Number: A2-11 of 16


## **Conducted Spurious Emission**

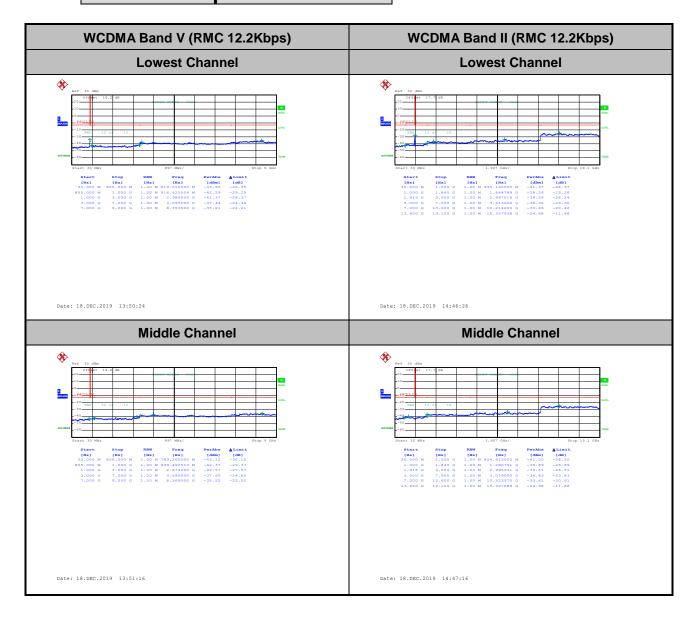

Report No.: FG9O0422-06A


TEL: 886-3-327-3456 Page Number : A2-12 of 16



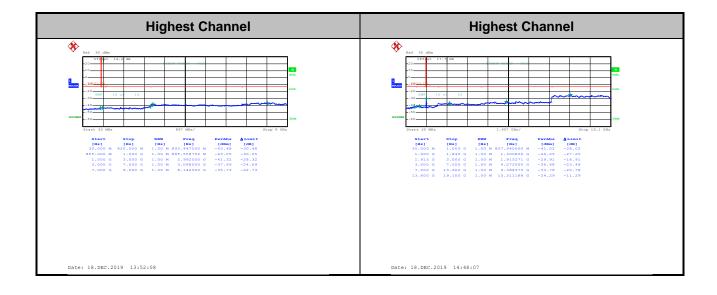

TEL: 886-3-327-3456 Page Number : A2-13 of 16

Report No.: FG9O0422-06A

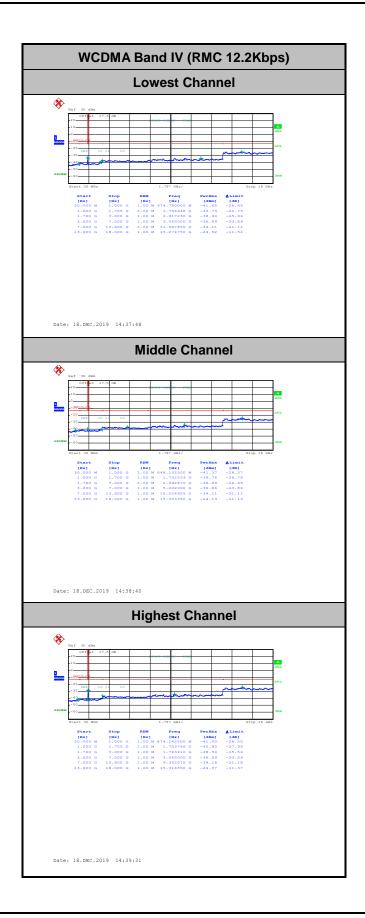

TEL: 886-3-327-3456 Page Number : A2-14 of 16

# Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0155	
40	Normal Voltage	0.0143	
30	Normal Voltage	0.0143	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0036	PASS
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0227	
20	Maximum Voltage	0.0143	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0155	

Report No.: FG9O0422-06A

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0011	
40	Normal Voltage	0.0011	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0043	
0	Normal Voltage	0.0059	
-10	Normal Voltage	0.0037	PASS
-20	Normal Voltage	0.0027	
-30	Normal Voltage	0.0037	
20	Maximum Voltage	0.0005	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0011	

TEL: 886-3-327-3456 Page Number : A2-15 of 16

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0029	
40	Normal Voltage	0.0023	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0196	
0	Normal Voltage	0.0271	
-10	Normal Voltage	0.0237	PASS
-20	Normal Voltage	0.0254	
-30	Normal Voltage	0.0185	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Report No.: FG9O0422-06A

#### Note:

- 1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.35 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block.

TEL: 886-3-327-3456 Page Number : A2-16 of 16

## **Appendix B. Test Results of ERP/EIRP and Radiated Test**

## **ERP/EIRP**

Channel	Mode	Cond	ucted	Ef	RP
Chamilei	Wiode	Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	WCDMA Band V	23.33	0.2153	19.82	0.0959
Middle	RMC 12.2Kbps	23.29	0.2133	19.78	0.0951
Highest	GT - LC = -1.36 dB	22.80	0.1905	19.29	0.0849
Limit	ERP < 7W	Result		PA	SS

Channel	Mode	Cond	ucted	EII	RP
Chamilei	Wiode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band II	23.26	0.2118	24.01	0.2518
Middle	RMC 12.2Kbps	23.27	0.2123	24.02	0.2523
Highest	(GT - LC = 0.75 dB)	23.30	0.2138	24.05	0.2541
Limit	EIRP < 2W	Result		PA	SS

Channel	Mode	Cond	ucted	EII	RP
Chamilei	Wiode	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	22.92	0.1959	22.10	0.1622
Middle	RMC 12.2Kbps	22.93	0.1963	22.11	0.1626
Highest	GT - LC = -0.82 dB	22.89	0.1945	22.07	0.1611
Limit	EIRP < 1W	Result		PA	SS

## **Radiated Spurious Emission**

## **WCDMA 850**

Report No.: FG9O0422-06A

WCDMA 850										
Channel	Frequency ( MHz )	ERP (dBm)	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)	
	1648	-49.72	-13	-36.72	-60.26	-56.67	0.53	9.63	Н	
	2480	-57.82	-13	-44.82	-71.79	-65.8	0.65	10.78	Н	
	3312	-58.44	-13	-45.44	-75.17	-67.57	0.76	12.04	Н	
									Н	
Lowest	1648	-52.76	-13	-39.76	-63.01	-59.71	0.53	9.63	V	
	2480	-53.00	-13	-40.00	-67.46	-60.98	0.65	10.78	V	
	3312	-57.45	-13	-44.45	-74.07	-66.58	0.76	12.04	V	
									V	
	1672	-47.43	-13	-34.43	-58.09	-54.43	0.53	9.68	Н	
	2512	-56.59	-13	-43.59	-70.56	-64.59	0.66	10.81	Н	
	3352	-58.41	-13	-45.41	-75.22	-67.65	0.76	12.16	Н	
NAC-J-II-									Н	
Middle	1672	-51.22	-13	-38.22	-61.48	-58.22	0.53	9.68	V	
	2512	-49.26	-13	-36.26	-63.64	-57.26	0.66	10.81	V	
	3352	-55.89	-13	-42.89	-72.44	-65.13	0.76	12.16	V	
									V	
	1696	-46.82	-13	-33.82	-57.75	-53.87	0.53	9.73	Н	
Highest	2544	-57.24	-13	-44.24	-71.28	-65.25	0.67	10.83	Н	
	3384	-58.27	-13	-45.27	-75.15	-67.6	0.77	12.25	Н	
									Н	
	1696	-53.17	-13	-40.17	-63.48	-60.22	0.53	9.73	V	
	2544	-49.18	-13	-36.18	-63.59	-57.19	0.67	10.83	V	
	3384	-58.55	-13	-45.55	-75.02	-67.88	0.77	12.25	V	
									V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-1 of 3

## **WCDMA 1700**

Report No.: FG9O0422-06A

WCDMA 1700										
Channel	Frequency ( MHz )	EiRP (dBm)	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)	
	3426	-29.82	-13	-16.82	-47.42	-41.42	0.77	12.38	Н	
	5142	-51.77	-13	-38.77	-72.76	-63.28	0.97	12.48	Н	
	6850	-53.91	-13	-40.91	-77.92	-64.71	0.83	11.63	Н	
									Н	
Lowest	3426	-35.00	-13	-22.00	-52.41	-46.6	0.77	12.38	V	
	5142	-53.68	-13	-40.68	-74.84	-65.19	0.97	12.48	V	
	6850	-53.64	-13	-40.64	-78.1	-64.44	0.83	11.63	V	
									V	
	3468	-32.68	-13	-19.68	-50.3	-44.41	0.78	12.50	Н	
	5196	-50.88	-13	-37.88	-72.02	-62.48	0.99	12.59	Н	
	6930	-52.79	-13	-39.79	-76.97	-63.24	1.01	11.45	Н	
NA: alalla									Н	
Middle	3468	-38.23	-13	-25.23	-56.24	-49.96	0.78	12.50	V	
	5196	-53.95	-13	-40.95	-75.25	-65.55	0.99	12.59	V	
	6930	-52.84	-13	-39.84	-77.4	-63.29	1.01	11.45	V	
									V	
	3504	-32.16	-13	-19.16	-49.8	-43.98	0.78	12.60	Н	
Highest	5256	-50.30	-13	-37.30	-71.63	-62	1.01	12.71	Н	
	7010	-51.81	-13	-38.81	-76.17	-61.93	1.17	11.28	Н	
									Н	
	3504	-35.69	-13	-22.69	-54.3	-47.51	0.78	12.60	V	
	5256	-54.89	-13	-41.89	-76.36	-66.59	1.01	12.71	V	
	7010	-51.98	-13	-38.98	-76.64	-62.1	1.17	11.28	V	
									V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-2 of 3

## **WCDMA 1900**

Report No.: FG9O0422-06A

WCDMA 1900										
Channel	Frequency (MHz)	EiRP (dBm)	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)	
	3708	-41.39	-13	-28.39	-58.84	-53.19	0.72	12.52	Н	
	5556	-49.55	-13	-36.55	-71.9	-61.72	1.00	13.17	Н	
	7410	-52.46	-13	-39.46	-77.97	-61.84	1.18	10.56	Н	
Lowoot									Н	
Lowest	3708	-32.45	-13	-19.45	-51.07	-44.25	0.72	12.52	V	
	5556	-41.48	-13	-28.48	-63.95	-53.65	1.00	13.17	V	
	7410	-52.89	-13	-39.89	-78.25	-62.27	1.18	10.56	V	
									V	
	3760	-46.52	-13	-33.52	-64.08	-58.33	0.69	12.50	Н	
	5640	-53.91	-13	-40.91	-76.24	-66.04	0.98	13.12	Н	
	7520	-52.17	-13	-39.17	-77.59	-61.45	1.18	10.46	Н	
N 42 1 11									Н	
Middle	3760	-36.74	-13	-23.74	-55.51	-48.55	0.69	12.50	V	
	5640	-48.69	-13	-35.69	-71.19	-60.82	0.98	13.12	V	
	7520	-52.22	-13	-39.22	-77.69	-61.5	1.18	10.46	V	
									V	
	3816	-49.95	-13	-36.95	-67.63	-61.74	0.69	12.47	Н	
	5723	-54.89	-13	-41.89	-77.3	-66.96	0.99	13.07	Н	
	7630	-51.73	-13	-38.73	-77.42	-61.31	1.18	10.76	Н	
L IS at									Н	
Highest	3816	-42.20	-13	-29.20	-61.1	-53.99	0.69	12.47	V	
	5723	-54.20	-13	-41.20	-76.82	-66.27	0.99	13.07	V	
	7630	-51.91	-13	-38.91	-77.35	-61.49	1.18	10.76	V	
									V	

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

TEL: 886-3-327-3456 Page Number : B2-3 of 3