



FCC RADIO TEST REPORT

FCC ID : APYHRO00285
Equipment : Smart phone
Brand Name : SHARP
Applicant : SHARP CORPORATION
2-13-1, HACHIHONMATSU-IIDA,
HIGASHI-HIROSHIMA-SHI,
HIROSHIMA PREFECTURE 739-0192, JAPAN
Manufacturer : SHARP CORPORATION
1 Takumi-Cho, Sakai-Ku, Sakai-Shi, Osaka
590-8522, Japan
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on May 04, 2020 and testing was started from May 21, 2020 and completed on May 28, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Measurement Results Explanation Example	8
2.5 Frequency List of Low/Middle/High Channels.....	9
3 Conducted Test Result	10
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP	11
3.3 Peak-to-Average Ratio	12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	13
3.5 Conducted Band Edge	14
3.6 Conducted Spurious Emission	15
3.7 Frequency Stability.....	16
4 Radiated Test Items	17
4.1 Measuring Instruments.....	17
4.2 Test Setup	17
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 List of Measuring Equipment.....	20
6 Uncertainty of Evaluation	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG021246-01A	01	Initial issue of report	Jun. 01, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	Under limit 19.24 dB at 5639.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yimin Ho



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass/BDS : PIFA Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Louis Chung
Temperature	21~24°C
Relative Humidity	51~55%

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH13-HY
Test Engineer	Jacky Hung and Wilson Wu
Temperature	21.5~23.5°C
Relative Humidity	49.5~55.5%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z Plane for Cellular Band ; Y Plane for PCS and AWS Band) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM1900	■ GSM Link ■ EDGE Class 8 Link	■ GSM Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

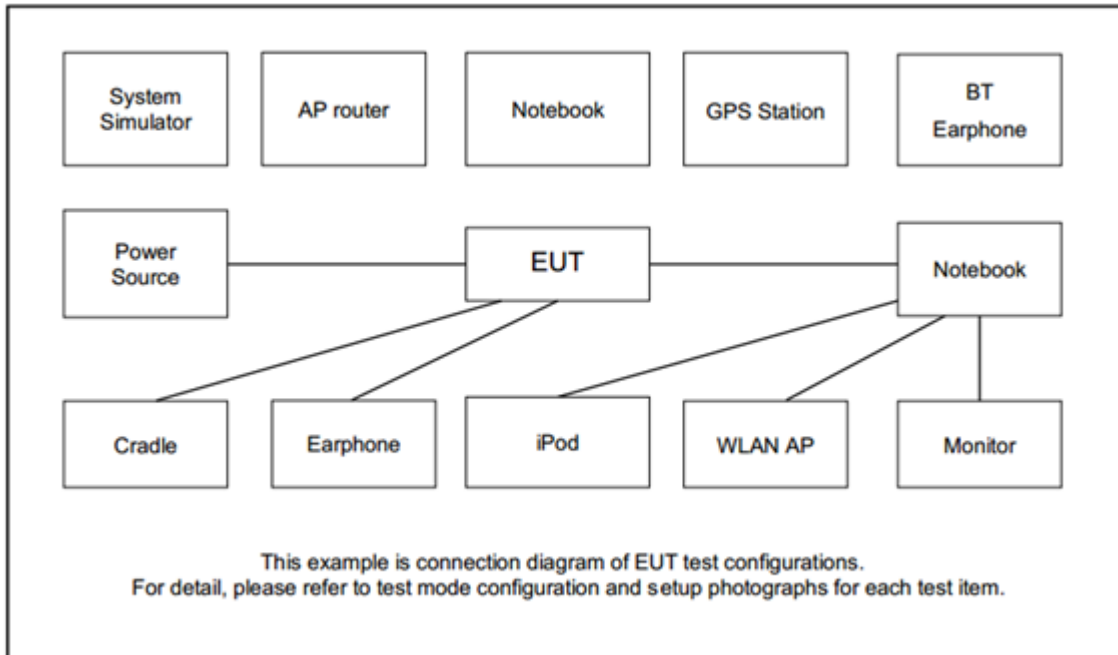

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A
3.	AC Adapter	DVE	DSA-10PFL-05 FUS 050200 a	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB) \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

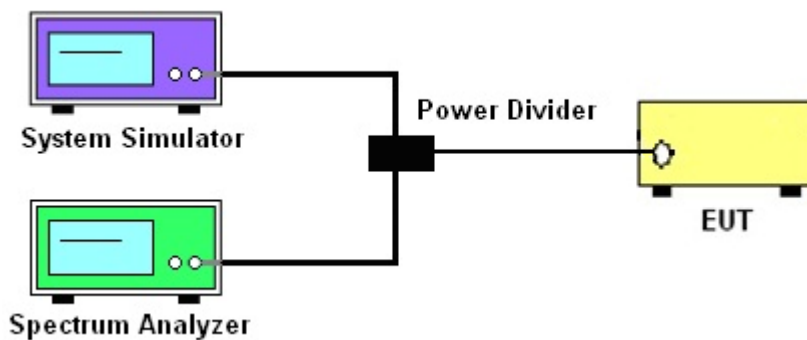

3.1.4 Frequency Stability

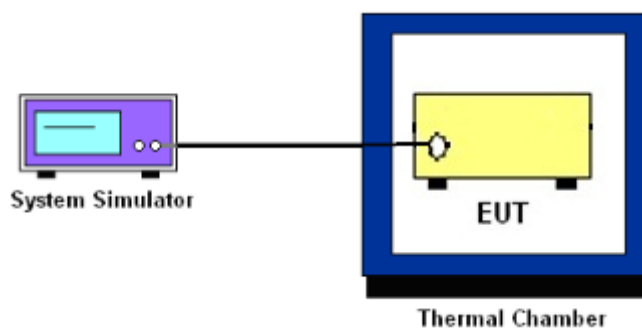

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated emissions below 30MHz

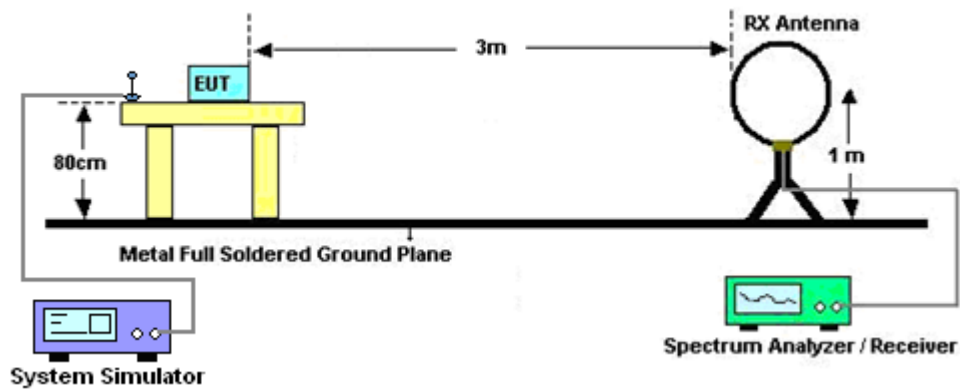

For radiated test from 30MHz to 1GHz

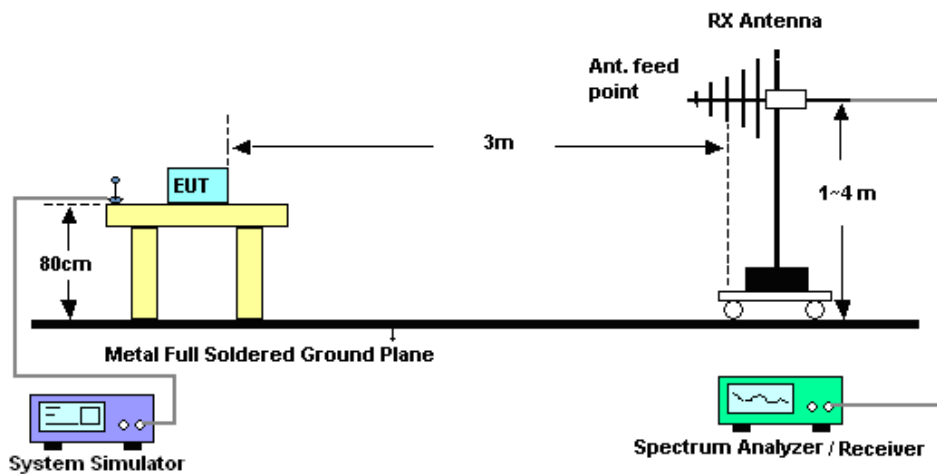

For radiated test above 1GHz

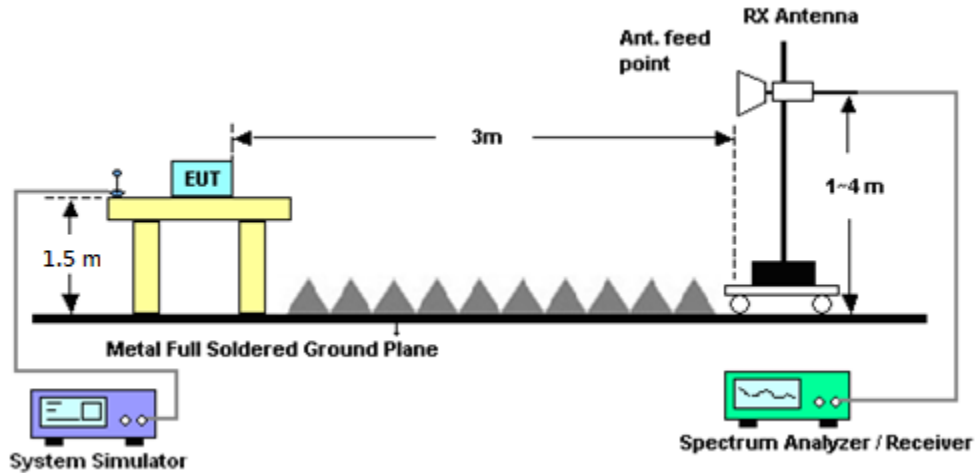

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Dec. 17, 2019	May 26, 2020~ May 28, 2020	Dec. 16, 2020	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&07	30MHz to 1GHz	Apr. 29, 2020	May 26, 2020~ May 28, 2020	Apr. 28, 2021	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	41912 & 07	30MHz to 1GHz	Apr. 29, 2020	May 26, 2020~ May 28, 2020	Apr. 28, 2021	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	Jul. 02, 2019	May 26, 2020~ May 28, 2020	Jul. 01, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	May 20, 2020	May 26, 2020~ May 28, 2020	May 19, 2021	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 19, 2020	May 26, 2020~ May 28, 2020	May 18, 2021	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 28, 2019	May 26, 2020~ May 28, 2020	Oct. 27, 2020	Radiation (03CH13-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Aug. 27, 2019	May 26, 2020~ May 28, 2020	Aug. 26, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 20, 2020	May 26, 2020~ May 28, 2020	Mar. 19, 2021	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Software	Audix	E3 6.2009-8-24	RK-000992	N/A	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	May 26, 2020~ May 28, 2020	Dec. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 12, 2020	May 26, 2020~ May 28, 2020	Feb. 21, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 12, 2020	May 26, 2020~ May 28, 2020	Feb. 21, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	May 26, 2020~ May 28, 2020	Feb. 24, 2021	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Dec. 10, 2019	May 26, 2020~ May 28, 2020	Dec. 09, 2020	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917098 0	18GHz~40GHz	Jan. 10, 2020	May 26, 2020~ May 28, 2020	Jan. 09, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 14, 2019	May 26, 2020~ May 28, 2020	Jul. 13, 2020	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN3	1.2GHz High Pass Filter	Jul. 03, 2019	May 26, 2020~ May 28, 2020	Jul. 02, 2020	Radiation (03CH13-HY)
Hygrometer	TECEPEL	DTM-303B	TP157151	N/A	Jun. 17, 2019	May 26, 2020~ May 28, 2020	Jun. 16, 2020	Radiation (03CH13-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 26, 2020	May 21, 2020	Mar. 25, 2021	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 04, 2019	May 21, 2020	Sep. 03, 2020	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 26, 2019	May 21, 2020	Nov. 25, 2020	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 09, 2019	May 21, 2020	Oct. 08, 2020	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 23, 2019	May 21, 2020	Aug. 22, 2020	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26. 5S-20	#A	N/A	Nov. 06, 2019	May 21, 2020	Nov. 05, 2020	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.21
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.24
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.99
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	-	-	-	29.95	29.98	29.93
GPRS class 8	-	-	-	29.93	29.94	29.93
GPRS class 10	-	-	-	27.95	27.98	28.00
GPRS class 11	-	-	-	26.78	26.80	26.79
GPRS class 12	-	-	-	25.81	25.85	25.82

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.87	23.88	23.77	22.39	22.47	22.43
HSDPA Subtest-1	22.91	22.88	22.86	21.48	21.50	21.52
HSDPA Subtest-2	22.89	22.92	22.94	21.33	21.42	21.43
HSDPA Subtest-3	22.49	22.46	22.48	20.85	20.94	20.96
HSDPA Subtest-4	22.48	22.45	22.45	20.89	20.92	21.04
HSUPA Subtest-1	22.90	22.86	22.82	21.34	21.39	21.39
HSUPA Subtest-2	20.95	20.81	20.84	19.39	19.54	19.53
HSUPA Subtest-3	21.92	21.88	21.89	20.39	20.44	20.45
HSUPA Subtest-4	20.93	20.83	20.87	19.42	19.53	19.54
HSUPA Subtest-5	22.88	22.82	22.88	21.30	21.40	21.40

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	21.75	21.79	21.77
HSDPA Subtest-1	20.94	20.88	20.90
HSDPA Subtest-2	21.06	20.97	21.00
HSDPA Subtest-3	20.58	20.49	20.52
HSDPA Subtest-4	20.58	20.48	20.52
HSUPA Subtest-1	21.11	21.04	21.01
HSUPA Subtest-2	19.06	18.67	18.94
HSUPA Subtest-3	20.14	19.99	19.97
HSUPA Subtest-4	19.06	19.05	19.02
HSUPA Subtest-5	21.10	21.00	20.90



A2. GSM


Peak-to-Average Ratio

Mode	GSM1900	Limit: 13dB
Mod.	GSM	Result
Lowest CH	0.44	PASS
Middle CH	0.44	
Highest CH	0.40	




GSM1900 (GSM)

Lowest Channel

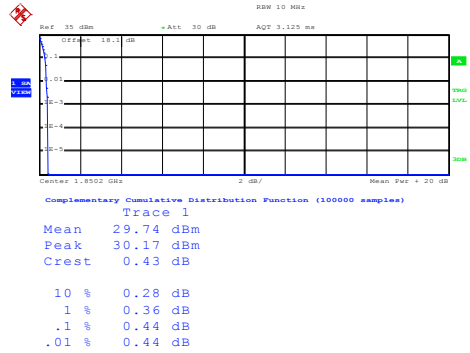


Date: 21.MAY.2020 10:14:37

Middle Channel

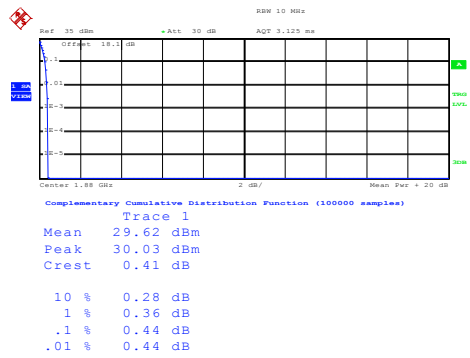

Date: 21.MAY.2020 10:14:56

Highest Channel

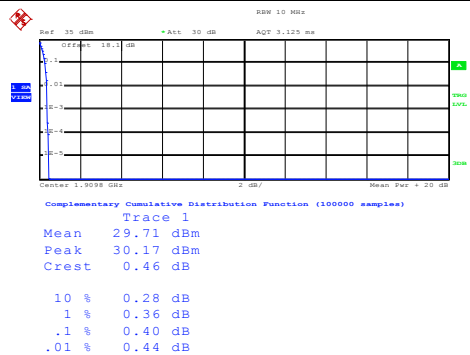

Date: 21.MAY.2020 10:15:14




26dB Bandwidth

Mode	GSM1900
Mod.	GSM
Lowest CH	0.299
Middle CH	0.300
Highest CH	0.305




GSM1900 (GSM)

Lowest Channel

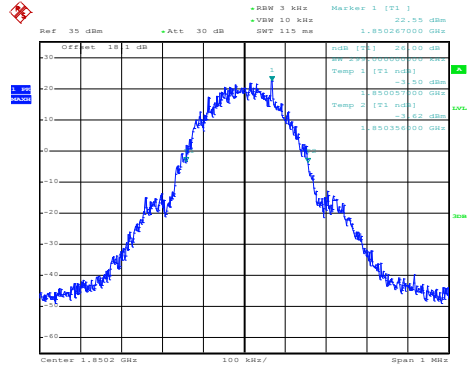


Date: 21.MAY.2020 10:13:04

Middle Channel

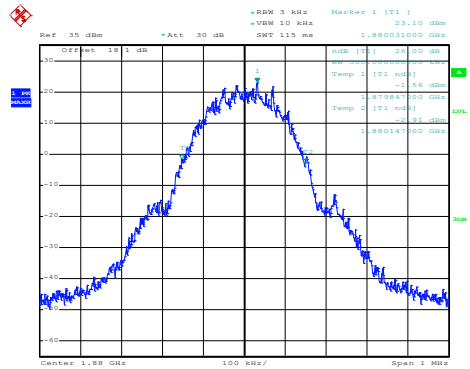

Date: 21.MAY.2020 10:13:37

Highest Channel

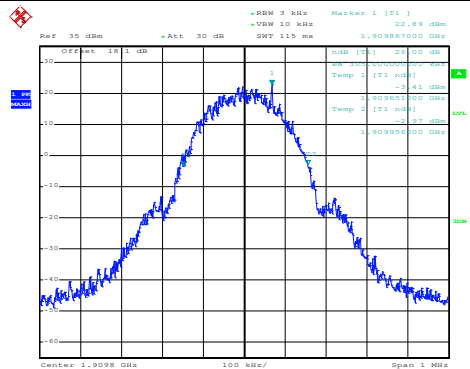

Date: 21.MAY.2020 10:14:09




Occupied Bandwidth

Mode	GSM1900
Mod.	GSM
Lowest CH	0.245
Middle CH	0.247
Highest CH	0.240




GSM1900 (GSM)

Lowest Channel

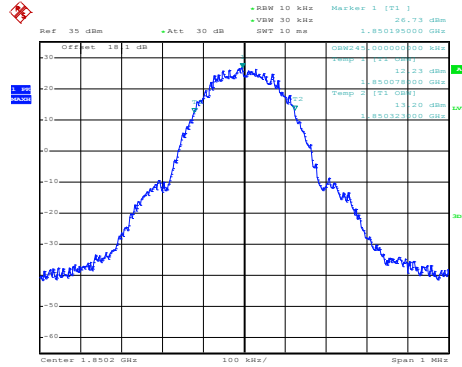


Date: 21.MAY.2020 10:15:52

Middle Channel

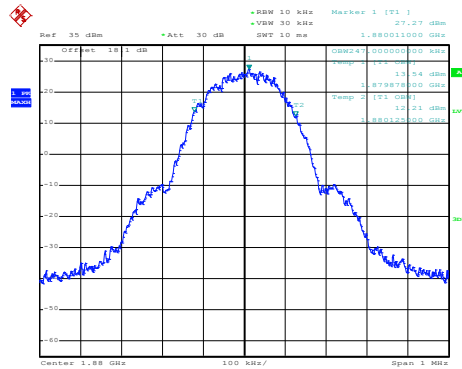

Date: 21.MAY.2020 10:16:24

Highest Channel

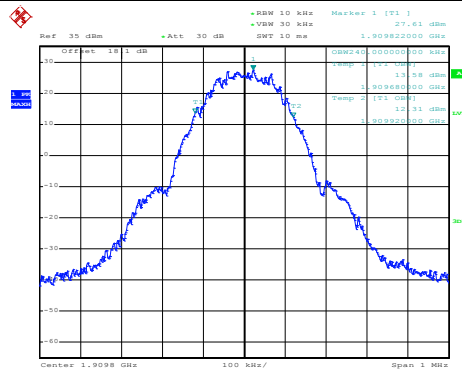


Date: 21.MAY.2020 10:16:56



Conducted Band Edge


GSM1900 (GSM)

Lowest Band Edge

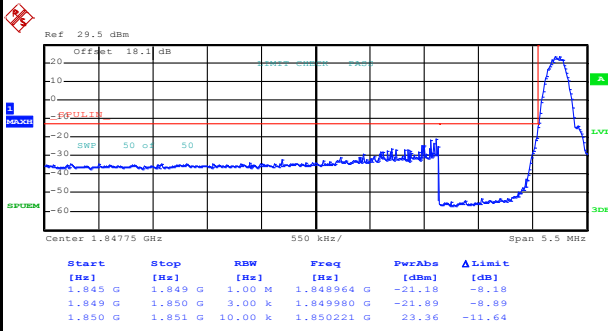

Date: 21.MAY.2020 10:18:37


Highest Band Edge

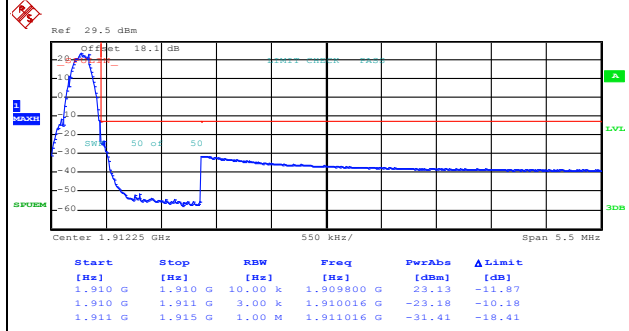

Date: 21.MAY.2020 10:21:24



Conducted Spurious Emission

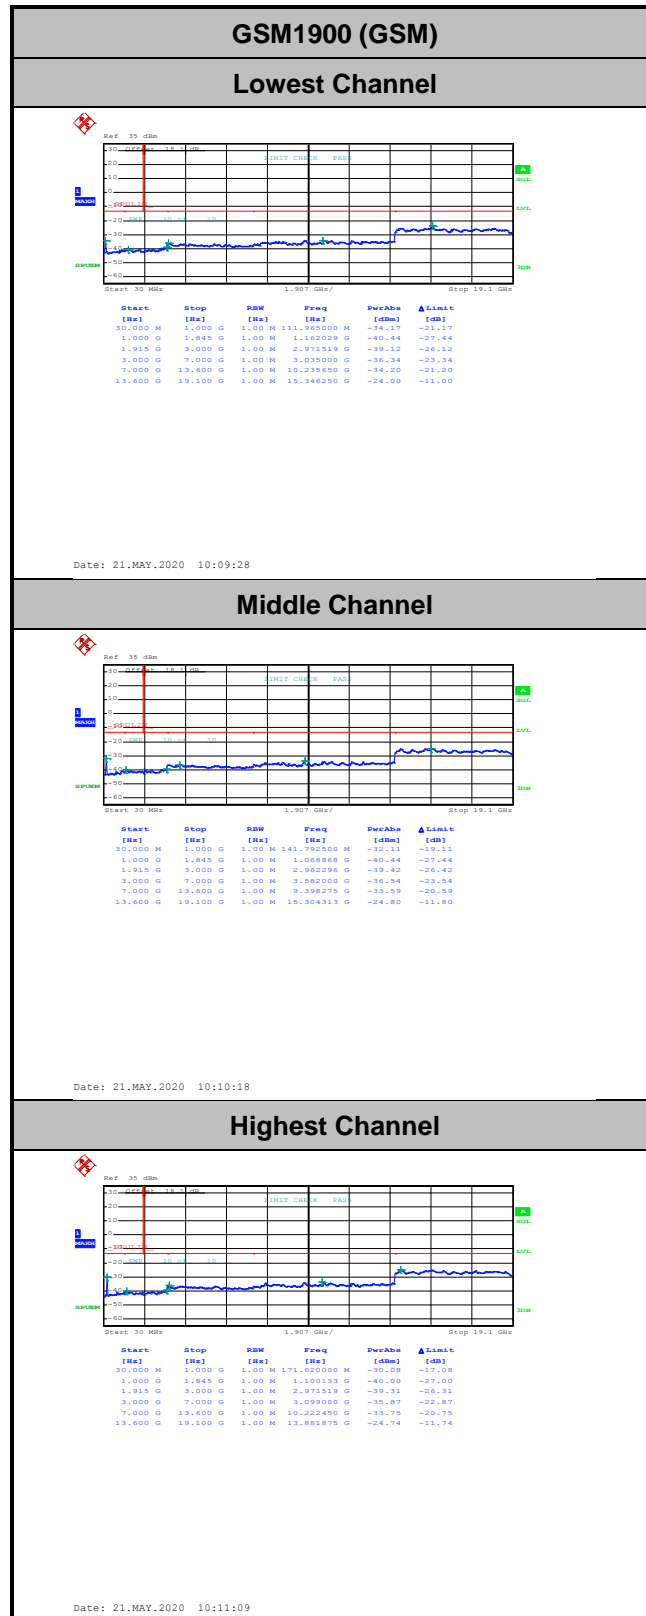



Frequency Stability

Test Conditions	Middle Channel	GSM1900 (GSM)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0011	
30	Normal Voltage	0.0000	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0016	
0	Normal Voltage	0.0005	
-10	Normal Voltage	0.0000	
-20	Normal Voltage	0.0011	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0027	

Note:

- 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
- 2. The frequency fundamental emissions stay within the authorized frequency block..









A3. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.20	2.84	3.20	PASS
Middle CH	3.32	3.08	3.08	
Highest CH	3.28	3.36	3.28	

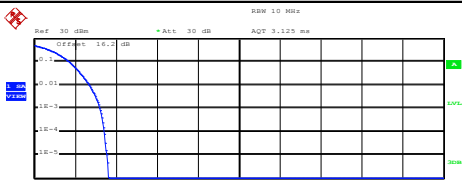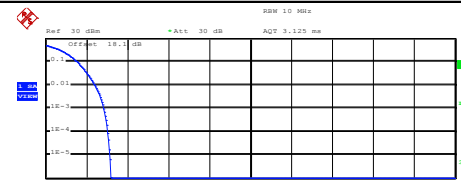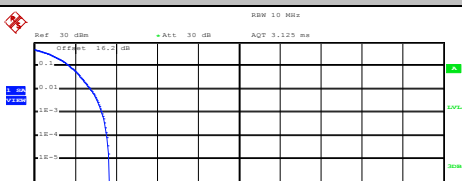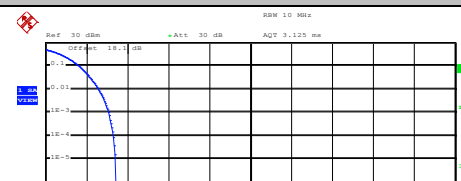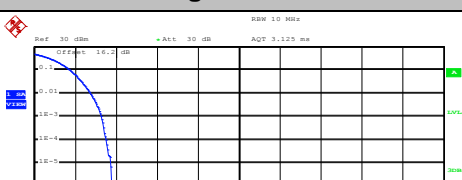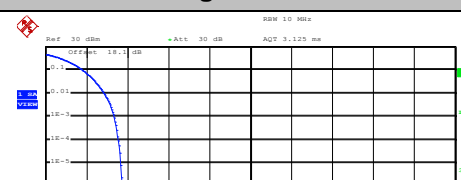


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																
<p style="text-align: center;">Lowest Channel</p>  <p>Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.67 dBm Peak 26.30 dBm Crest 3.63 dB</p> <table border="1"> <tr><td>10 %</td><td>1.72 dB</td></tr> <tr><td>1 %</td><td>2.68 dB</td></tr> <tr><td>.1 %</td><td>3.20 dB</td></tr> <tr><td>.01 %</td><td>3.44 dB</td></tr> </table> <p>Date: 21.MAY.2020 11:03:03</p>	10 %	1.72 dB	1 %	2.68 dB	.1 %	3.20 dB	.01 %	3.44 dB	<p style="text-align: center;">Lowest Channel</p>  <p>Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.49 dBm Peak 25.66 dBm Crest 3.18 dB</p> <table border="1"> <tr><td>10 %</td><td>1.56 dB</td></tr> <tr><td>1 %</td><td>2.40 dB</td></tr> <tr><td>.1 %</td><td>2.84 dB</td></tr> <tr><td>.01 %</td><td>3.04 dB</td></tr> </table> <p>Date: 21.MAY.2020 10:30:34</p>	10 %	1.56 dB	1 %	2.40 dB	.1 %	2.84 dB	.01 %	3.04 dB
10 %	1.72 dB																
1 %	2.68 dB																
.1 %	3.20 dB																
.01 %	3.44 dB																
10 %	1.56 dB																
1 %	2.40 dB																
.1 %	2.84 dB																
.01 %	3.04 dB																
<p style="text-align: center;">Middle Channel</p>  <p>Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.56 dBm Peak 26.23 dBm Crest 3.66 dB</p> <table border="1"> <tr><td>10 %</td><td>1.72 dB</td></tr> <tr><td>1 %</td><td>2.76 dB</td></tr> <tr><td>.1 %</td><td>3.32 dB</td></tr> <tr><td>.01 %</td><td>3.56 dB</td></tr> </table> <p>Date: 21.MAY.2020 11:03:18</p>	10 %	1.72 dB	1 %	2.76 dB	.1 %	3.32 dB	.01 %	3.56 dB	<p style="text-align: center;">Middle Channel</p>  <p>Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.58 dBm Peak 26.02 dBm Crest 3.43 dB</p> <table border="1"> <tr><td>10 %</td><td>1.64 dB</td></tr> <tr><td>1 %</td><td>2.60 dB</td></tr> <tr><td>.1 %</td><td>3.08 dB</td></tr> <tr><td>.01 %</td><td>3.32 dB</td></tr> </table> <p>Date: 21.MAY.2020 10:30:43</p>	10 %	1.64 dB	1 %	2.60 dB	.1 %	3.08 dB	.01 %	3.32 dB
10 %	1.72 dB																
1 %	2.76 dB																
.1 %	3.32 dB																
.01 %	3.56 dB																
10 %	1.64 dB																
1 %	2.60 dB																
.1 %	3.08 dB																
.01 %	3.32 dB																
<p style="text-align: center;">Highest Channel</p>  <p>Center 846.6 MHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.73 dBm Peak 26.51 dBm Crest 3.78 dB</p> <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.76 dB</td></tr> <tr><td>.1 %</td><td>3.28 dB</td></tr> <tr><td>.01 %</td><td>3.52 dB</td></tr> </table> <p>Date: 21.MAY.2020 11:03:32</p>	10 %	1.76 dB	1 %	2.76 dB	.1 %	3.28 dB	.01 %	3.52 dB	<p style="text-align: center;">Highest Channel</p>  <p>Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 22.57 dBm Peak 26.30 dBm Crest 3.73 dB</p> <table border="1"> <tr><td>10 %</td><td>1.80 dB</td></tr> <tr><td>1 %</td><td>2.88 dB</td></tr> <tr><td>.1 %</td><td>3.36 dB</td></tr> <tr><td>.01 %</td><td>3.56 dB</td></tr> </table> <p>Date: 21.MAY.2020 10:30:51</p>	10 %	1.80 dB	1 %	2.88 dB	.1 %	3.36 dB	.01 %	3.56 dB
10 %	1.76 dB																
1 %	2.76 dB																
.1 %	3.28 dB																
.01 %	3.52 dB																
10 %	1.80 dB																
1 %	2.88 dB																
.1 %	3.36 dB																
.01 %	3.56 dB																



WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

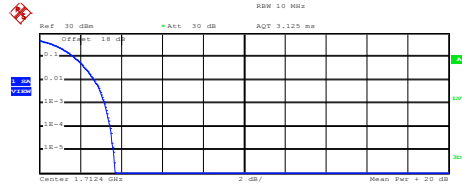


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 22.82 dBm
Peak 26.51 dBm
Crest 3.69 dB

10 % 1.68 dB
1 % 2.68 dB
.1 % 3.20 dB
.01 % 3.48 dB

Date: 21.MAY.2020 10:44:14

Middle Channel

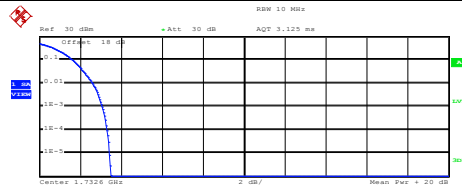


Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 22.66 dBm
Peak 26.16 dBm
Crest 3.49 dB

10 % 1.64 dB
1 % 2.60 dB
.1 % 3.08 dB
.01 % 3.32 dB

Date: 21.MAY.2020 10:44:32

Highest Channel

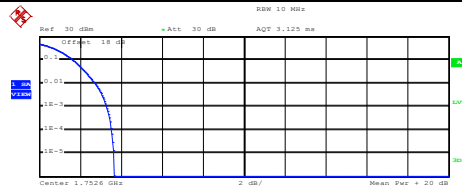

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 22.28 dBm
Peak 25.94 dBm
Crest 3.66 dB


10 % 1.64 dB
1 % 2.72 dB
.1 % 3.28 dB
.01 % 3.52 dB

Date: 21.MAY.2020 10:44:44



26dB Bandwidth


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.69	4.73	4.69
Middle CH	4.70	4.72	4.70
Highest CH	4.70	4.69	4.70

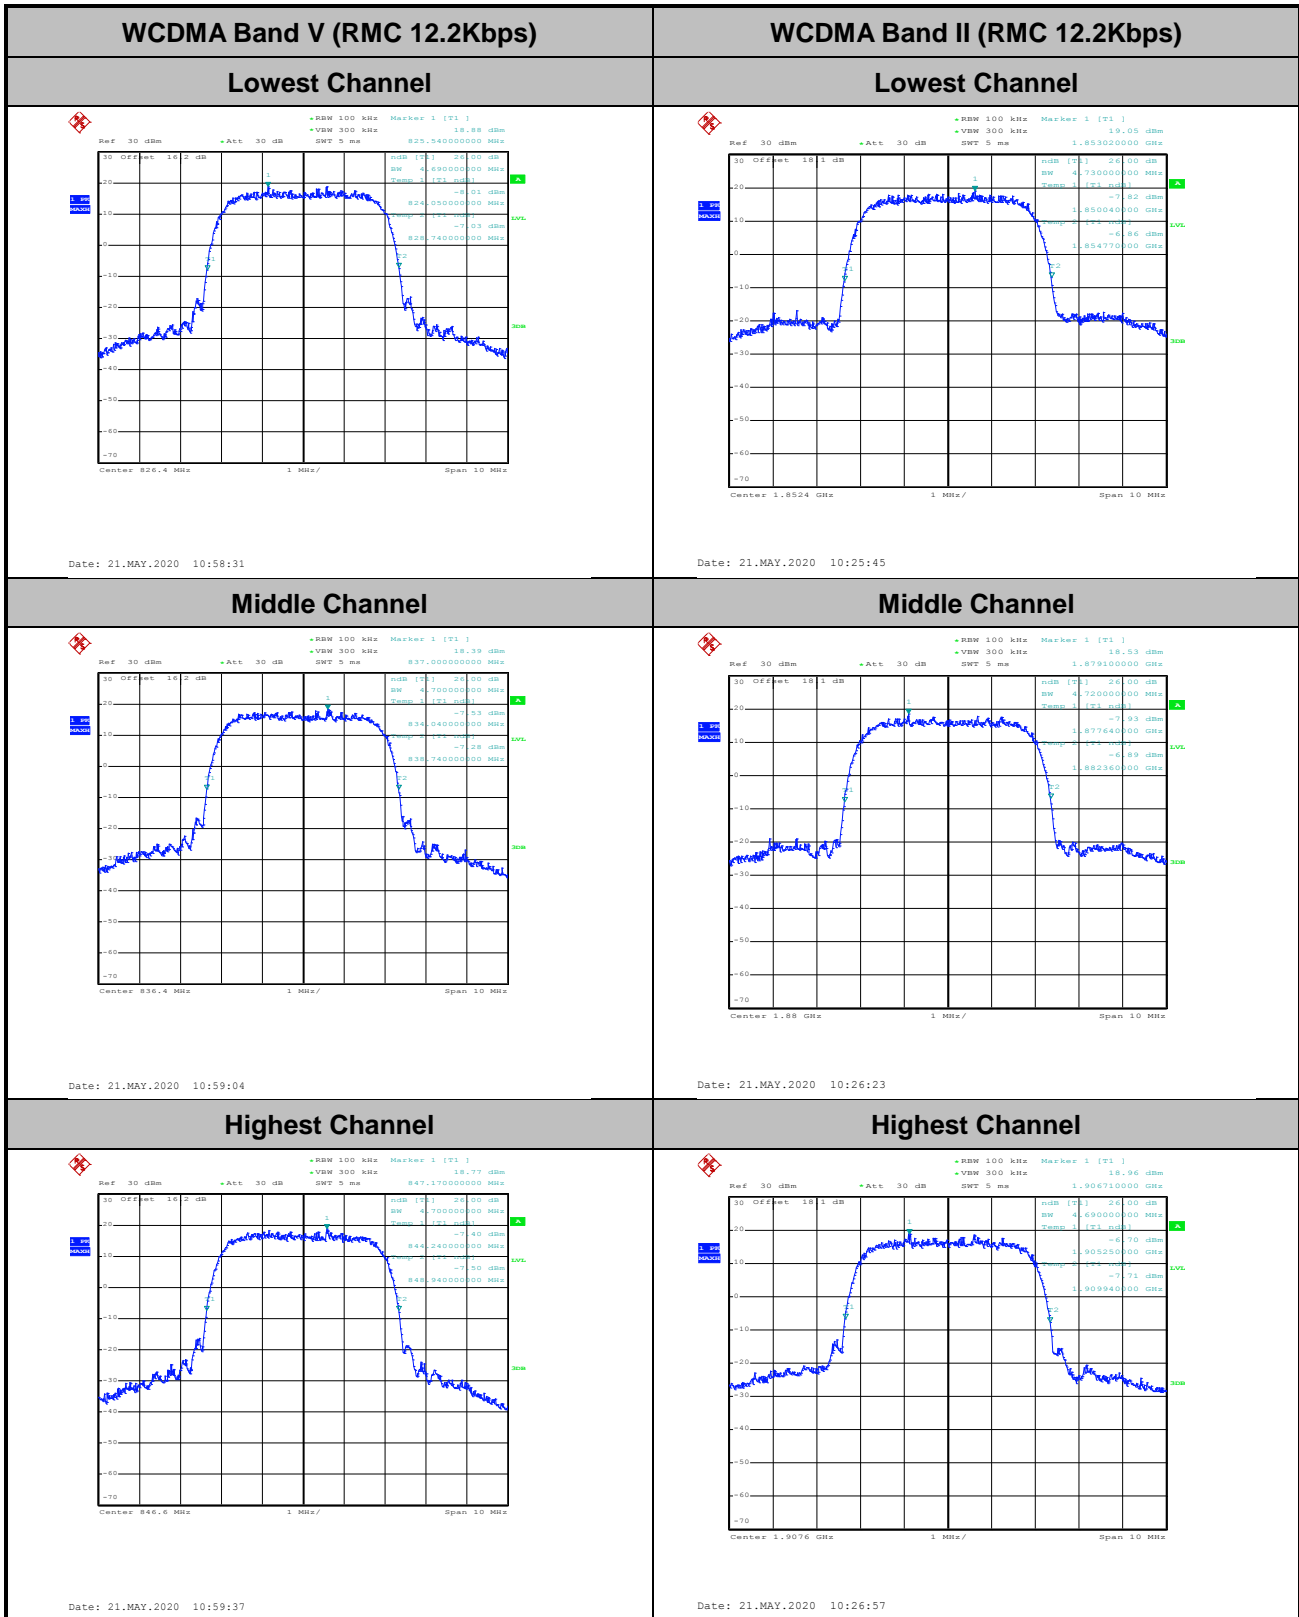




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

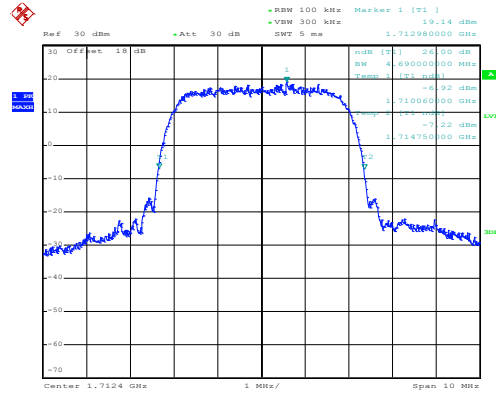


Date: 21.MAY.2020 10:39:42

Middle Channel

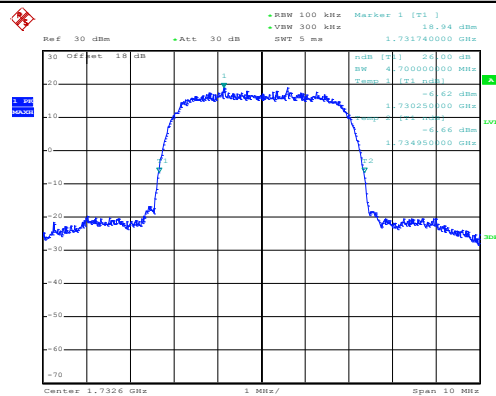

Date: 21.MAY.2020 10:40:17

Highest Channel

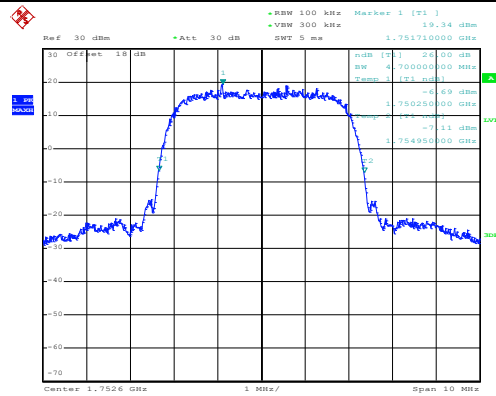



Date: 21.MAY.2020 10:40:56



Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.12	4.13	4.12
Middle CH	4.12	4.13	4.12
Highest CH	4.12	4.12	4.12

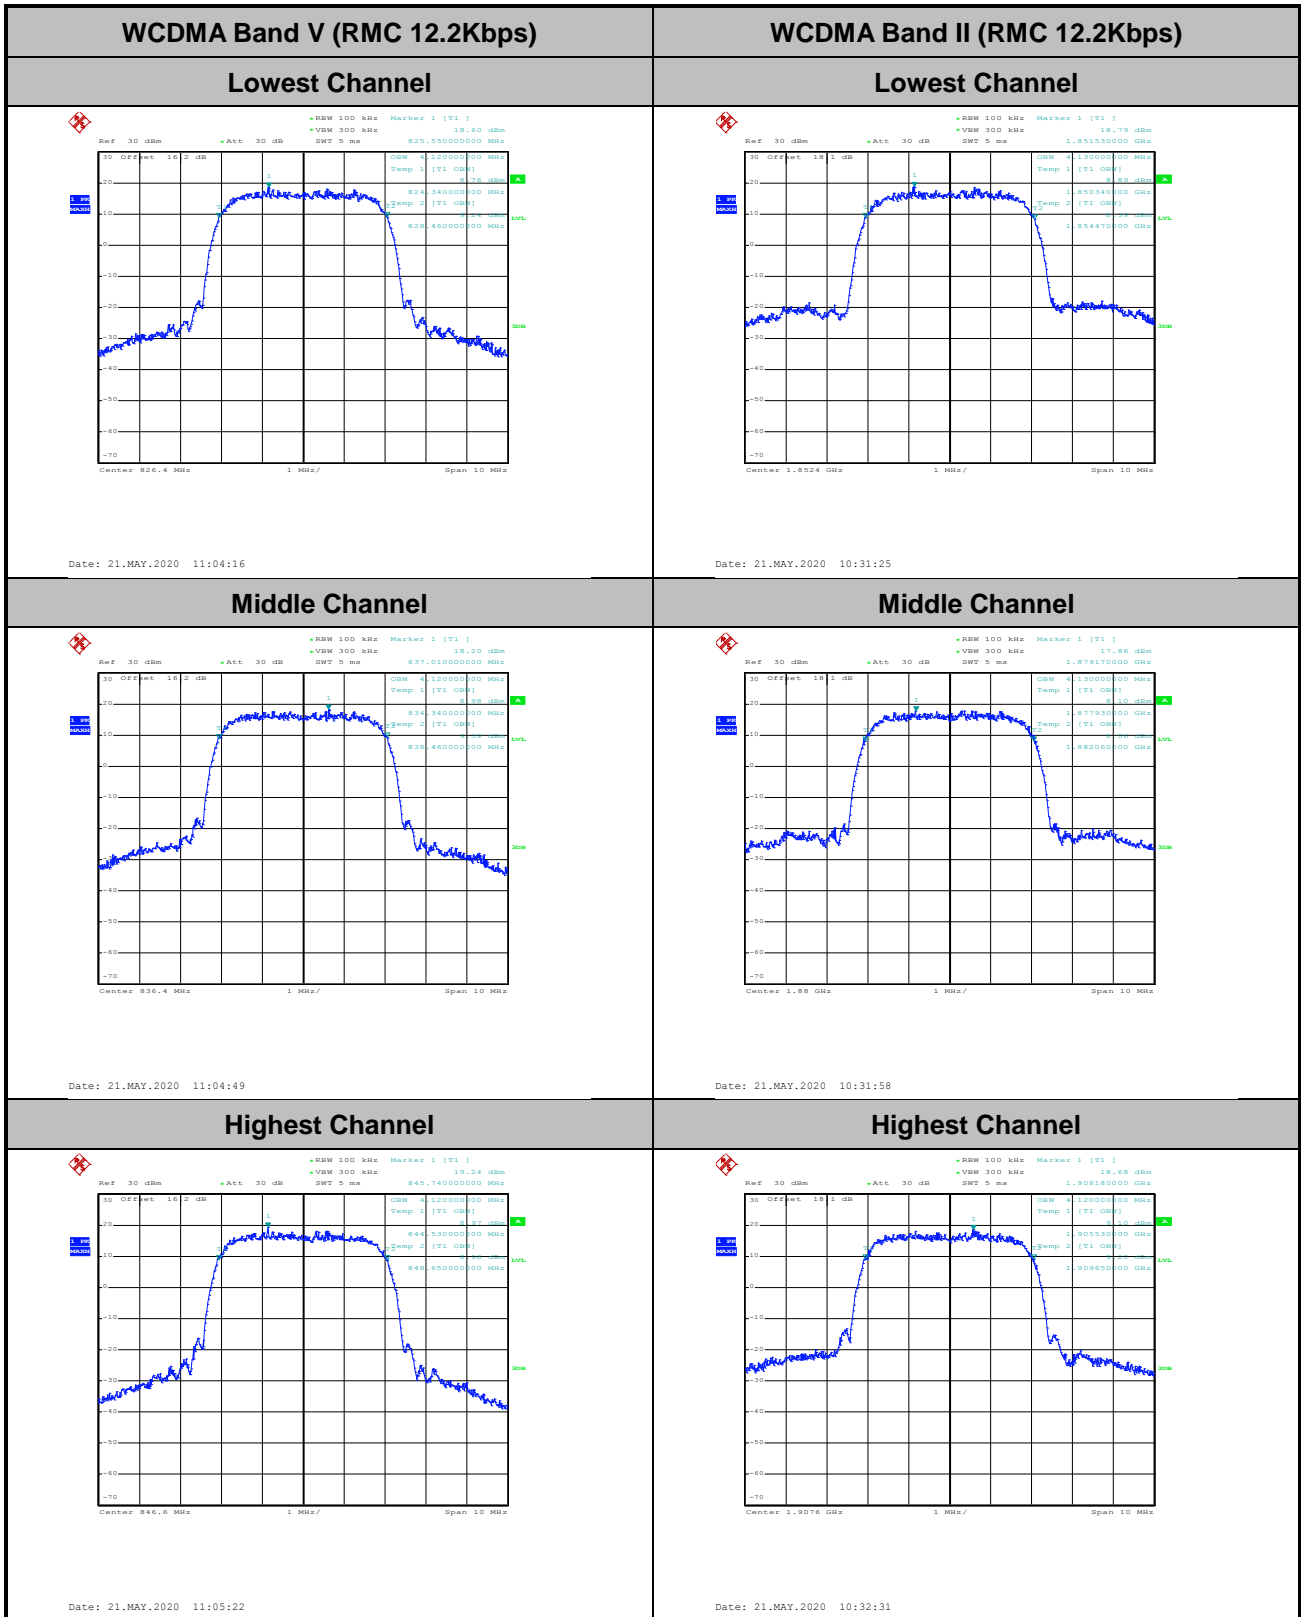

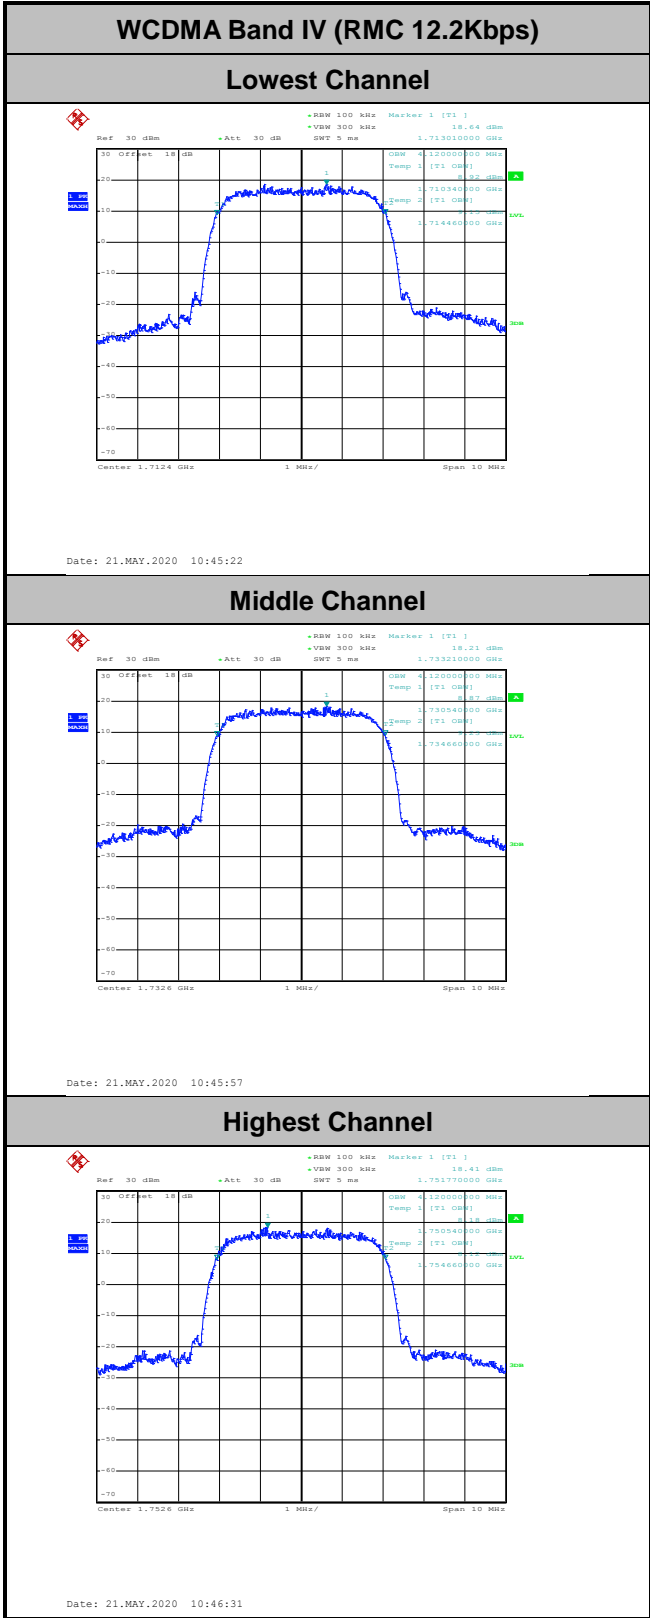




Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

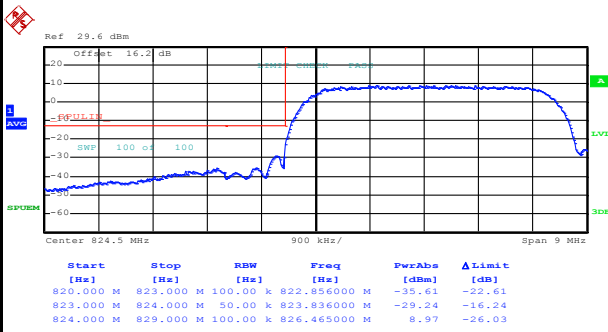

Date: 21.MAY.2020 11:08:21


Highest Band Edge

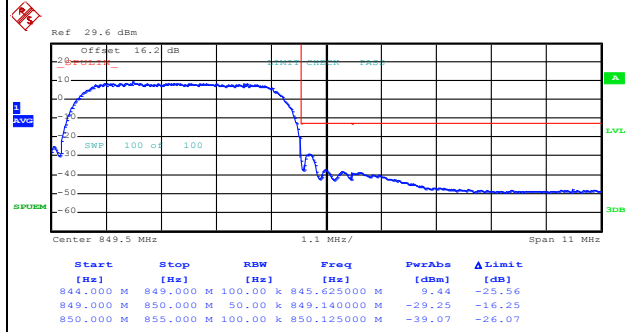

Date: 21.MAY.2020 11:11:11


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

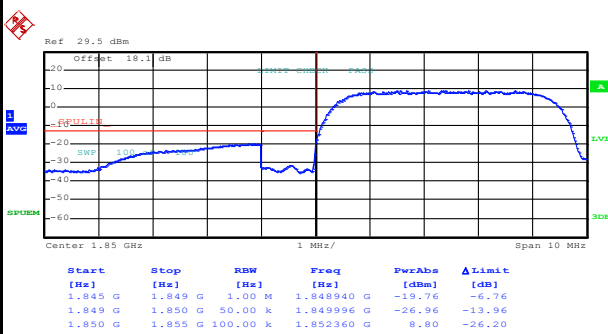

Date: 21.MAY.2020 10:35:24

Highest Band Edge

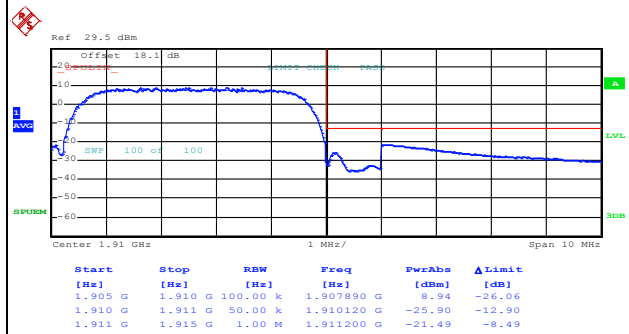


Date: 21.MAY.2020 10:38:11




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

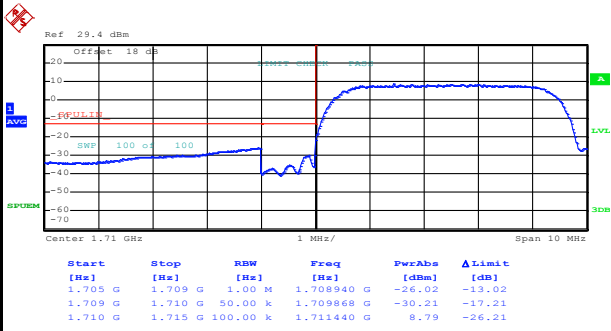







Date: 21.MAY.2020 10:49:29

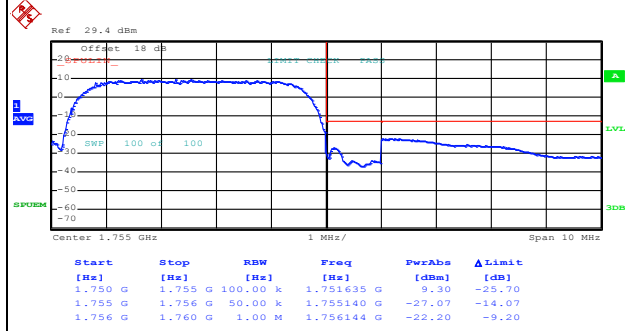

Date: 21.MAY.2020 10:52:52




Conducted Spurious Emission

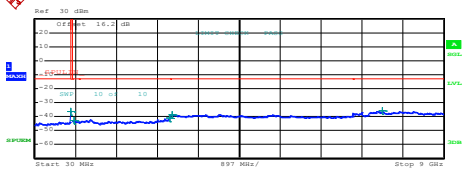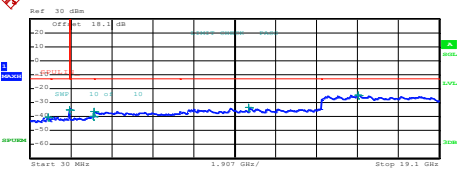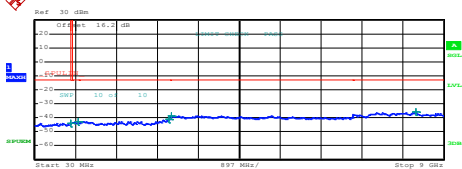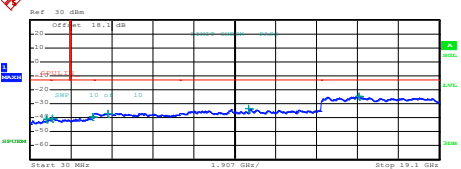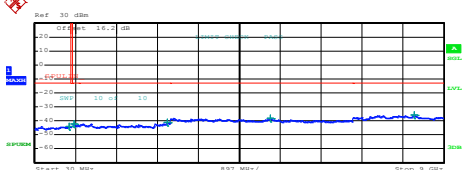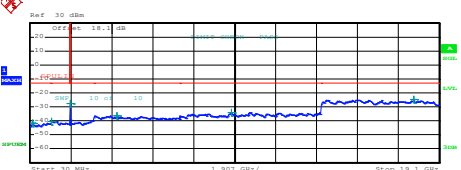WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																														
<p align="center">Lowest Channel</p>	<p align="center">Lowest Channel</p>																																																																														
 <table border="1" data-bbox="239 660 654 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>819,407500 M</td> <td>-30.45</td> <td>-23.45</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 G</td> <td>889,836252 M</td> <td>-43.10</td> <td>-30.10</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,989000 G</td> <td>-41.13</td> <td>-28.13</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,046000 G</td> <td>-38.49</td> <td>-25.49</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,649000 G</td> <td>-35.85</td> <td>-22.85</td> </tr> </tbody> </table> <p>Date: 21.MAY.2020 11:00:45</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,407500 M	-30.45	-23.45	855,000 M	1,000 G	1,000 G	889,836252 M	-43.10	-30.10	1,000 G	3,000 G	1,000 M	2,989000 G	-41.13	-28.13	3,000 G	7,000 G	1,000 M	3,046000 G	-38.49	-25.49	7,000 G	9,000 G	1,000 M	7,649000 G	-35.85	-22.85	 <table border="1" data-bbox="893 660 1308 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>873,455000 M</td> <td>-40.39</td> <td>-27.39</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,844789 G</td> <td>-35.45</td> <td>-22.45</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,949348 G</td> <td>-39.90</td> <td>-26.90</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,010000 G</td> <td>-36.29</td> <td>-23.29</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>10,209250 G</td> <td>-33.22</td> <td>-20.22</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>15,342813 G</td> <td>-24.69</td> <td>-11.69</td> </tr> </tbody> </table> <p>Date: 21.MAY.2020 10:28:12</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	873,455000 M	-40.39	-27.39	1,000 G	1,845 G	1,000 M	1,844789 G	-35.45	-22.45	1,915 G	3,000 G	1,000 M	2,949348 G	-39.90	-26.90	3,000 G	7,000 G	1,000 M	3,010000 G	-36.29	-23.29	7,000 G	13,600 G	1,000 M	10,209250 G	-33.22	-20.22	13,600 G	19,100 G	1,000 M	15,342813 G	-24.69	-11.69
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,407500 M	-30.45	-23.45																																																																										
855,000 M	1,000 G	1,000 G	889,836252 M	-43.10	-30.10																																																																										
1,000 G	3,000 G	1,000 M	2,989000 G	-41.13	-28.13																																																																										
3,000 G	7,000 G	1,000 M	3,046000 G	-38.49	-25.49																																																																										
7,000 G	9,000 G	1,000 M	7,649000 G	-35.85	-22.85																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	873,455000 M	-40.39	-27.39																																																																										
1,000 G	1,845 G	1,000 M	1,844789 G	-35.45	-22.45																																																																										
1,915 G	3,000 G	1,000 M	2,949348 G	-39.90	-26.90																																																																										
3,000 G	7,000 G	1,000 M	3,010000 G	-36.29	-23.29																																																																										
7,000 G	13,600 G	1,000 M	10,209250 G	-33.22	-20.22																																																																										
13,600 G	19,100 G	1,000 M	15,342813 G	-24.69	-11.69																																																																										
<p align="center">Middle Channel</p>	<p align="center">Middle Channel</p>																																																																														
 <table border="1" data-bbox="239 1178 654 1256"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>813,087500 M</td> <td>-43.92</td> <td>-30.92</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>976,949008 M</td> <td>-43.07</td> <td>-30.07</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,973000 G</td> <td>-41.11</td> <td>-28.11</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,063000 G</td> <td>-38.64</td> <td>-25.64</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,383500 G</td> <td>-35.76</td> <td>-22.76</td> </tr> </tbody> </table> <p>Date: 21.MAY.2020 11:01:36</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	813,087500 M	-43.92	-30.92	855,000 M	1,000 G	1,000 M	976,949008 M	-43.07	-30.07	1,000 G	3,000 G	1,000 M	2,973000 G	-41.11	-28.11	3,000 G	7,000 G	1,000 M	3,063000 G	-38.64	-25.64	7,000 G	9,000 G	1,000 M	8,383500 G	-35.76	-22.76	 <table border="1" data-bbox="893 1178 1308 1256"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>793,875000 M</td> <td>-41.31</td> <td>-28.31</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,849250 G</td> <td>-40.41</td> <td>-27.41</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,914536 G</td> <td>-39.12</td> <td>-26.12</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,043000 G</td> <td>-36.84</td> <td>-23.84</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>10,230750 G</td> <td>-33.55</td> <td>-20.55</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>15,379938 G</td> <td>-24.57</td> <td>-11.57</td> </tr> </tbody> </table> <p>Date: 21.MAY.2020 10:29:02</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	793,875000 M	-41.31	-28.31	1,000 G	1,845 G	1,000 M	1,849250 G	-40.41	-27.41	1,915 G	3,000 G	1,000 M	2,914536 G	-39.12	-26.12	3,000 G	7,000 G	1,000 M	3,043000 G	-36.84	-23.84	7,000 G	13,600 G	1,000 M	10,230750 G	-33.55	-20.55	13,600 G	19,100 G	1,000 M	15,379938 G	-24.57	-11.57
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	813,087500 M	-43.92	-30.92																																																																										
855,000 M	1,000 G	1,000 M	976,949008 M	-43.07	-30.07																																																																										
1,000 G	3,000 G	1,000 M	2,973000 G	-41.11	-28.11																																																																										
3,000 G	7,000 G	1,000 M	3,063000 G	-38.64	-25.64																																																																										
7,000 G	9,000 G	1,000 M	8,383500 G	-35.76	-22.76																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	793,875000 M	-41.31	-28.31																																																																										
1,000 G	1,845 G	1,000 M	1,849250 G	-40.41	-27.41																																																																										
1,915 G	3,000 G	1,000 M	2,914536 G	-39.12	-26.12																																																																										
3,000 G	7,000 G	1,000 M	3,043000 G	-36.84	-23.84																																																																										
7,000 G	13,600 G	1,000 M	10,230750 G	-33.55	-20.55																																																																										
13,600 G	19,100 G	1,000 M	15,379938 G	-24.57	-11.57																																																																										
<p align="center">Highest Channel</p>	<p align="center">Highest Channel</p>																																																																														
 <table border="1" data-bbox="239 1695 654 1774"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>776,550000 M</td> <td>-43.89</td> <td>-30.89</td> </tr> <tr> <td>855,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>890,851252 M</td> <td>-41.99</td> <td>-28.99</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,949000 G</td> <td>-42.21</td> <td>-28.21</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,020500 G</td> <td>-38.26</td> <td>-25.26</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,358000 G</td> <td>-35.95</td> <td>-22.95</td> </tr> </tbody> </table> <p>Date: 21.MAY.2020 11:02:27</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	776,550000 M	-43.89	-30.89	855,000 M	1,000 G	1,000 M	890,851252 M	-41.99	-28.99	1,000 G	3,000 G	1,000 M	2,949000 G	-42.21	-28.21	3,000 G	7,000 G	1,000 M	3,020500 G	-38.26	-25.26	7,000 G	9,000 G	1,000 M	8,358000 G	-35.95	-22.95	 <table border="1" data-bbox="893 1695 1308 1774"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>139,347500 M</td> <td>-41.37</td> <td>-28.37</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,820491 G</td> <td>-40.27</td> <td>-27.27</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,923271 G</td> <td>-37.56</td> <td>-24.56</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>4,082000 G</td> <td>-36.51</td> <td>-23.51</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>9,405750 G</td> <td>-34.25</td> <td>-21.25</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>17,320938 G</td> <td>-24.90</td> <td>-11.90</td> </tr> </tbody> </table> <p>Date: 21.MAY.2020 10:29:54</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	139,347500 M	-41.37	-28.37	1,000 G	1,845 G	1,000 M	1,820491 G	-40.27	-27.27	1,915 G	3,000 G	1,000 M	1,923271 G	-37.56	-24.56	3,000 G	7,000 G	1,000 M	4,082000 G	-36.51	-23.51	7,000 G	13,600 G	1,000 M	9,405750 G	-34.25	-21.25	13,600 G	19,100 G	1,000 M	17,320938 G	-24.90	-11.90
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	776,550000 M	-43.89	-30.89																																																																										
855,000 M	1,000 G	1,000 M	890,851252 M	-41.99	-28.99																																																																										
1,000 G	3,000 G	1,000 M	2,949000 G	-42.21	-28.21																																																																										
3,000 G	7,000 G	1,000 M	3,020500 G	-38.26	-25.26																																																																										
7,000 G	9,000 G	1,000 M	8,358000 G	-35.95	-22.95																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	139,347500 M	-41.37	-28.37																																																																										
1,000 G	1,845 G	1,000 M	1,820491 G	-40.27	-27.27																																																																										
1,915 G	3,000 G	1,000 M	1,923271 G	-37.56	-24.56																																																																										
3,000 G	7,000 G	1,000 M	4,082000 G	-36.51	-23.51																																																																										
7,000 G	13,600 G	1,000 M	9,405750 G	-34.25	-21.25																																																																										
13,600 G	19,100 G	1,000 M	17,320938 G	-24.90	-11.90																																																																										




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

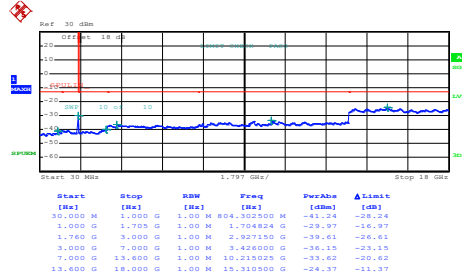


Date: 21.MAY.2020 10:42:05

Middle Channel

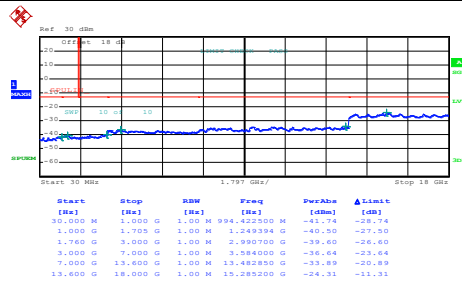

Date: 21.MAY.2020 10:42:57

Highest Channel

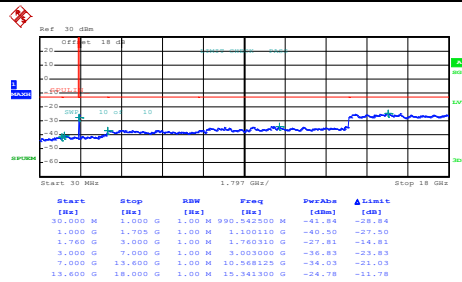

Date: 21.MAY.2020 10:43:49



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0024	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0000	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0000	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0012	
-30	Normal Voltage	0.0012	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0011	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0000	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0005	
-20	Normal Voltage	0.0016	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0006	
30	Normal Voltage	0.0006	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0017	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0156	
-20	Normal Voltage	0.0173	
-30	Normal Voltage	0.0185	
20	Maximum Voltage	0.0092	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0121	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	WCDMA Band V	23.87	0.2438	14.60	0.0288
Middle	RMC 12.2Kbps	23.88	0.2443	14.61	0.0289
Highest	GT - LC = -7.12 dB	23.77	0.2382	14.50	0.0282
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	29.95	0.9886	30.08	1.0186
Middle	GSM	29.98	0.9954	30.11	1.0257
Highest	(GT - LC = 0.13 dB)	29.93	0.9840	30.06	1.0139
Lowest	WCDMA Band II	22.39	0.1734	22.52	0.1786
Middle	RMC 12.2Kbps	22.47	0.1766	22.60	0.1820
Highest	(GT - LC = 0.13 dB)	22.43	0.1750	22.56	0.1803
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	21.75	0.1496	20.98	0.1253
Middle	RMC 12.2Kbps	21.79	0.1510	21.02	0.1265
Highest	GT - LC = -0.77 dB	21.77	0.1503	21.00	0.1259
Limit	EIRP < 1W	Result		PASS	



Radiated Spurious Emission

WCDMA 850

Table with 10 columns: Channel, Frequency (MHz), ERP (dBm), Limit (dBm), Over Limit (dB), SPA Reading (dBm), S.G. Power (dBm), TX Cable loss (dB), TX Antenna Gain (dBi), Polarization (H/V). Rows are grouped by Channel (Lowest, Middle, Highest) and Frequency (1656, 2480, 3306, 1672, 2508, 3344, 1696, 2536, 3384).

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM 1900

GSM 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-54.27	-13	-41.27	-74.81	-64.58	1.97	12.28	H
	5550	-38.20	-13	-25.20	-61.79	-48.33	2.14	12.27	H
	7400	-47.73	-13	-34.73	-75.84	-55.73	2.18	10.18	H
									H
									H
									H
	3700	-53.16	-13	-40.16	-74.22	-63.47	1.97	12.28	V
	5550	-32.62	-13	-19.62	-56.83	-42.75	2.14	12.27	V
	7400	-47.62	-13	-34.62	-75.7	-55.62	2.18	10.18	V
									V
									V
									V
Middle	3763	-51.65	-13	-38.65	-72.34	-61.89	2.01	12.24	H
	5639	-37.98	-13	-24.98	-61.64	-48.25	2.12	12.39	H
	7526	-47.66	-13	-34.66	-75.42	-55.64	2.11	10.09	H
									H
									H
									H
	3763	-50.34	-13	-37.34	-71.53	-60.58	2.01	12.24	V
	5639	-32.24	-13	-19.24	-56.52	-42.51	2.12	12.39	V
	7526	-48.25	-13	-35.25	-75.91	-56.23	2.11	10.09	V
									V
									V
									V
Highest	3819	-50.55	-13	-37.55	-71.35	-60.72	2.04	12.21	H
	5730	-38.99	-13	-25.99	-63.08	-49.41	2.10	12.52	H
	7638	-47.91	-13	-34.91	-75.22	-56.29	2.11	10.50	H
									H
									H
									H
	3819	-48.81	-13	-35.81	-70.08	-58.98	2.04	12.21	V
	5730	-32.94	-13	-19.94	-57.58	-43.36	2.10	12.52	V
	7638	-48.16	-13	-35.16	-75.52	-56.54	2.11	10.50	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3707	-48.78	-13	-35.78	-69.33	-59.08	1.98	12.28	H
	5562	-48.58	-13	-35.58	-72.14	-58.73	2.14	12.29	H
	7414	-47.38	-13	-34.38	-75.46	-55.37	2.17	10.15	H
									H
									H
									H
	3707	-50.10	-13	-37.10	-71.18	-60.40	1.98	12.28	V
	5562	-48.27	-13	-35.27	-72.45	-58.42	2.14	12.29	V
	7414	-47.38	-13	-34.38	-75.41	-55.37	2.17	10.15	V
									V
									V
									V
Middle	3763	-46.48	-13	-33.48	-67.17	-56.72	2.01	12.24	H
	5639	-46.86	-13	-33.86	-70.52	-57.13	2.12	12.39	H
	7526	-47.42	-13	-34.42	-75.18	-55.40	2.11	10.09	H
									H
									H
									H
	3763	-48.66	-13	-35.66	-69.85	-58.90	2.01	12.24	V
	5639	-46.69	-13	-33.69	-70.97	-56.96	2.12	12.39	V
	7526	-47.78	-13	-34.78	-75.44	-55.76	2.11	10.09	V
									V
									V
									V
Highest	3812	-47.51	-13	-34.51	-68.3	-57.69	2.03	12.21	H
	5723	-49.78	-13	-36.78	-73.83	-60.19	2.10	12.51	H
	7624	-48.06	-13	-35.06	-75.36	-56.39	2.11	10.45	H
									H
									H
									H
	3812	-49.06	-13	-36.06	-70.33	-59.24	2.03	12.21	V
	5723	-44.66	-13	-31.66	-69.27	-55.07	2.10	12.51	V
	7624	-47.92	-13	-34.92	-75.26	-56.25	2.11	10.45	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1700

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-49.26	-13	-36.26	-68.36	-59.63	1.81	12.18	H
	5135	-51.65	-13	-38.65	-75.06	-61.47	2.30	12.13	H
	6850	-47.82	-13	-34.82	-74.02	-56.50	2.37	11.05	H
									H
									H
									H
	3427	-49.26	-13	-36.26	-68.98	-59.63	1.81	12.18	V
	5135	-50.82	-13	-37.82	-74.8	-60.64	2.30	12.13	V
	6850	-48.17	-13	-35.17	-74.93	-56.85	2.37	11.05	V
									V
									V
									V
Middle	3462	-51.24	-13	-38.24	-70.67	-61.69	1.84	12.29	H
	5198	-53.01	-13	-40.01	-76.47	-62.87	2.28	12.14	H
	6924	-49.18	-13	-36.18	-75.61	-57.76	2.39	10.98	H
									H
									H
									H
	3462	-50.70	-13	-37.70	-70.66	-61.15	1.84	12.29	V
	5198	-51.16	-13	-38.16	-75.17	-61.02	2.28	12.14	V
	6924	-48.97	-13	-35.97	-76.01	-57.55	2.39	10.98	V
									V
									V
									V
Highest	3504	-50.96	-13	-37.96	-70.76	-61.49	1.87	12.40	H
	5256	-52.63	-13	-39.63	-76.14	-62.53	2.26	12.15	H
	7008	-48.83	-13	-35.83	-75.55	-57.30	2.42	10.89	H
									H
									H
									H
	3504	-50.91	-13	-37.91	-71.16	-61.44	1.87	12.40	V
	5256	-51.07	-13	-38.07	-75.11	-60.97	2.26	12.15	V
	7008	-48.02	-13	-35.02	-75.4	-56.49	2.42	10.89	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.