



# FCC RF Test Report

**APPLICANT** : SHARP CORPORATION  
**EQUIPMENT** : Smart phone  
**BRAND NAME** : SHARP  
**FCC ID** : APYHRO00287  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 23, 2020 and testing was completed on Jul. 21, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Test Software ..... 7

    1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 12

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

    3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 16

    3.3 Power Spectral Density Measurement ..... 18

    3.4 Unwanted Emissions Measurement ..... 20

    3.5 AC Conducted Emission Measurement ..... 25

    3.6 Automatically Discontinue Transmission ..... 27

    3.7 Antenna Requirements ..... 28

**4 LIST OF MEASURING EQUIPMENT ..... 29**

**5 UNCERTAINTY OF EVALUATION ..... 30**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 2.39 dB at 4962.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.02 dB at 0.595 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**SHARP CORPORATION**

2-13-1, HACHIHONMATSU-IIDA, HIGASHI-HIROSHIMA-SHI, HIROSHIMA PREFECTURE 739-0192, JAPAN

## 1.2 Manufacturer

**SHARP CORPORATION**

1 Takumi-Cho, Sakai-Ku, Sakai-Shi, Osaka 590-8522, Japan

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Smart phone
<b>Brand Name</b>	SHARP
<b>FCC ID</b>	APYHRO00287
<b>EUT supports Radios application</b>	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver/GNSS
<b>IMEI Code</b>	Conducted: N/A Conduction: 004401230052025 Radiation: 004401230052975
<b>HW Version</b>	DVT
<b>SW Version</b>	V1.260
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
<b>Maximum Output Power to Antenna</b>	<p>&lt;MIMO Ant.1+2&gt;            &lt;5180 MHz ~ 5240 MHz&gt;            802.11a : 20.73 dBm / 0.1183 W            802.11n HT20 : 20.65 dBm / 0.1161 W            802.11n HT40 : 20.68 dBm / 0.1169 W            802.11ac VHT20 : 20.64 dBm / 0.1159 W            802.11ac VHT40 : 20.66 dBm / 0.1164 W            802.11ac VHT80 : 20.55 dBm / 0.1135 W</p> <p>&lt;5260 MHz ~ 5320 MHz&gt;            802.11a : 20.56 dBm / 0.1138 W            802.11n HT20 : 20.47 dBm / 0.1114 W            802.11n HT40 : 20.09 dBm / 0.1021 W            802.11ac VHT20 : 20.47 dBm / 0.1114 W            802.11ac VHT40 : 20.06 dBm / 0.1014 W            802.11ac VHT80 : 17.51 dBm / 0.0564 W</p> <p>&lt;5500 MHz ~ 5700 MHz &gt;            802.11a : 18.91 dBm / 0.0778 W            802.11n HT20 : 18.97 dBm / 0.0789 W            802.11n HT40 : 18.88 dBm / 0.0773 W            802.11ac VHT20 : 18.97 dBm / 0.0789 W            802.11ac VHT40 : 18.82 dBm / 0.0762 W            802.11ac VHT80 : 19.24 dBm / 0.0839 W</p>
<b>99% Occupied Bandwidth</b>	<p>&lt;MIMO Ant.1+2&gt;            &lt;5180 MHz ~ 5240 MHz&gt;            802.11a : 17.48 MHz            802.11n HT20 : 18.68 MHz            802.11n HT40 : 36.56 MHz            802.11ac VHT80 : 75.76 MHz</p> <p>&lt;5260 MHz ~ 5320 MHz&gt;            802.11a : 17.43 MHz            802.11n HT20 : 18.73 MHz            802.11n HT40 : 36.56 MHz            802.11ac VHT80 : 75.76 MHz</p> <p>&lt;5500 MHz ~ 5700 MHz &gt;            802.11a : 17.43 MHz            802.11n HT20 : 18.68 MHz            802.11n HT40 : 36.46 MHz            802.11ac VHT80 : 75.76 MHz</p>
<b>Antenna Type / Gain</b>	<p>&lt;5150 MHz ~ 5250 MHz&gt;            &lt;Ant. 1&gt; : PIFA Antenna with gain -1.10 dBi            &lt;Ant. 2&gt; : PIFA Antenna with gain 0.10 dBi</p> <p>&lt;5250 MHz ~ 5350 MHz&gt;            &lt;Ant. 1&gt; : PIFA Antenna with gain -0.50 dBi            &lt;Ant. 2&gt; : PIFA Antenna with gain -1.50 dBi</p> <p>&lt;5470 MHz ~ 5725 MHz&gt;            &lt;Ant. 1&gt; : PIFA Antenna with gain -0.20 dBi            &lt;Ant. 2&gt; : PIFA Antenna with gain -0.50 dBi</p>



<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
<b>Antenna Function Description</b>		Ant. 1	Ant. 2
	802.11 a/n/ac SISO/MIMO	V	V

**Note:**

1. For SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
2. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their maximum conducted power.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24



## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

**MIMO Mode**

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + Earphone + USB Cable(Charging from Adapter)
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable.	



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-

## 2.3 Connection Diagram of Test System

For Conducted Emission:

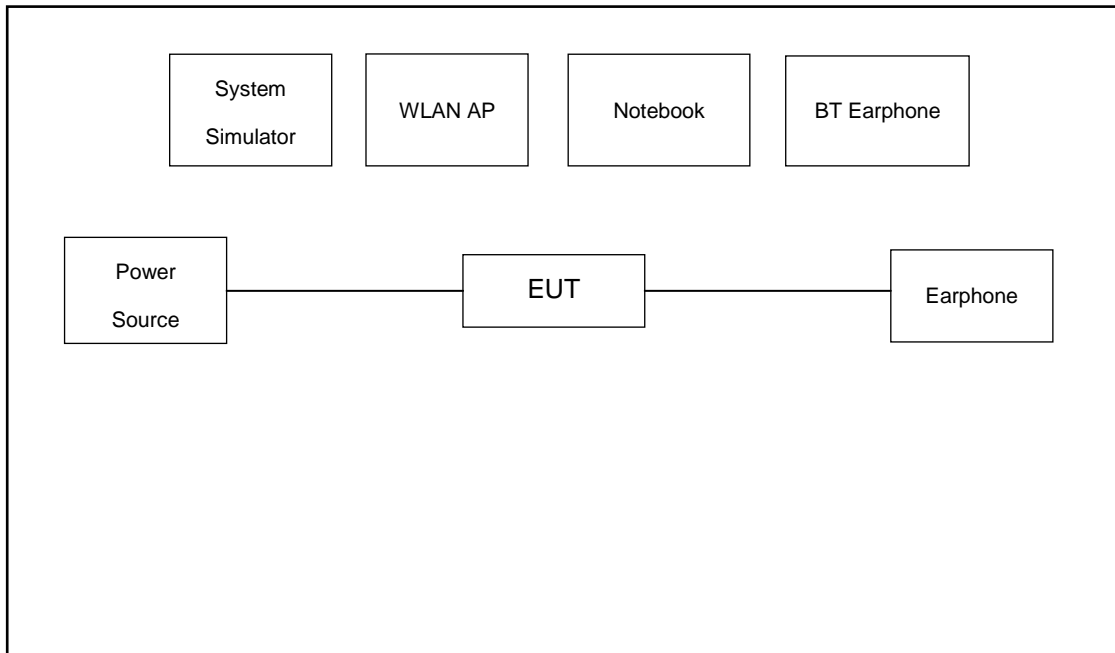

For Radiated Emission:

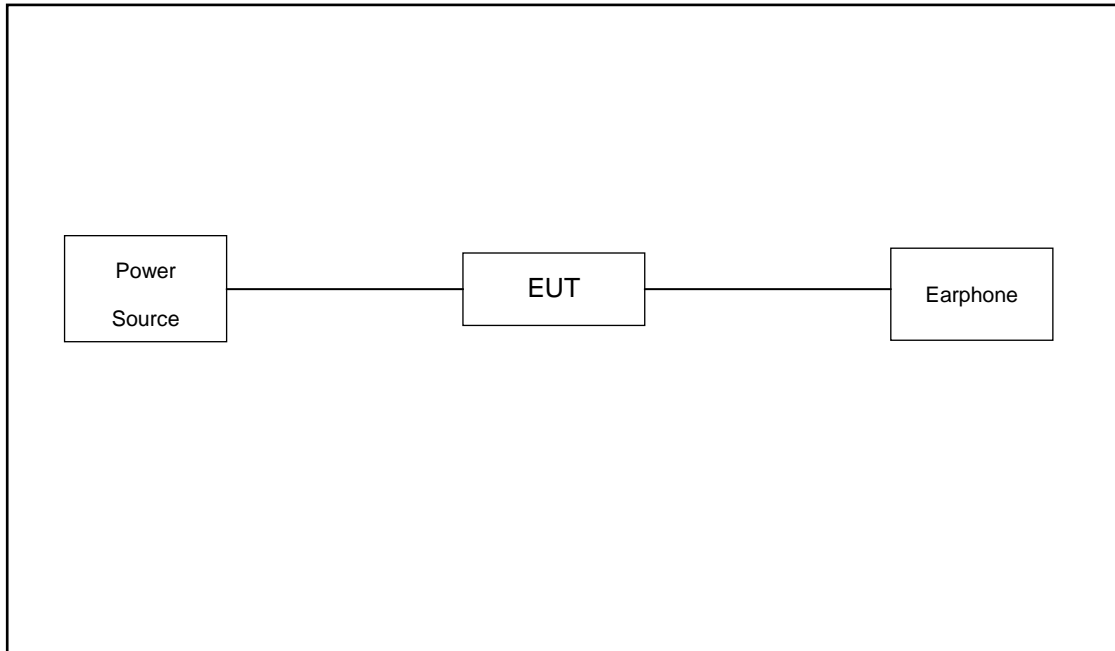

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.3 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
 &= 7.3 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.



##### 3.1.4 Test Setup

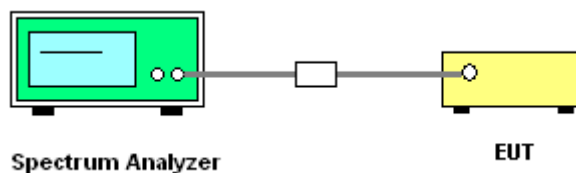



### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

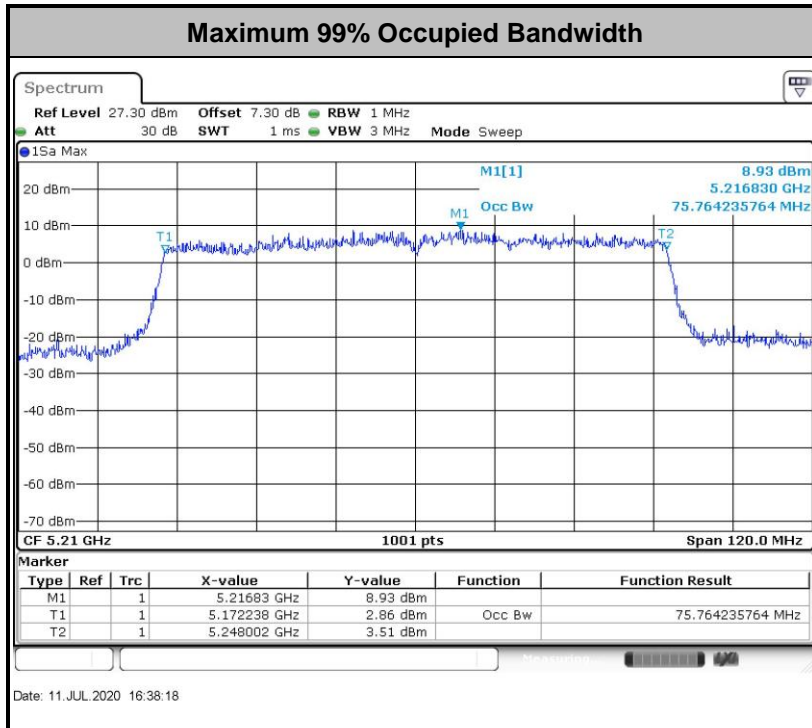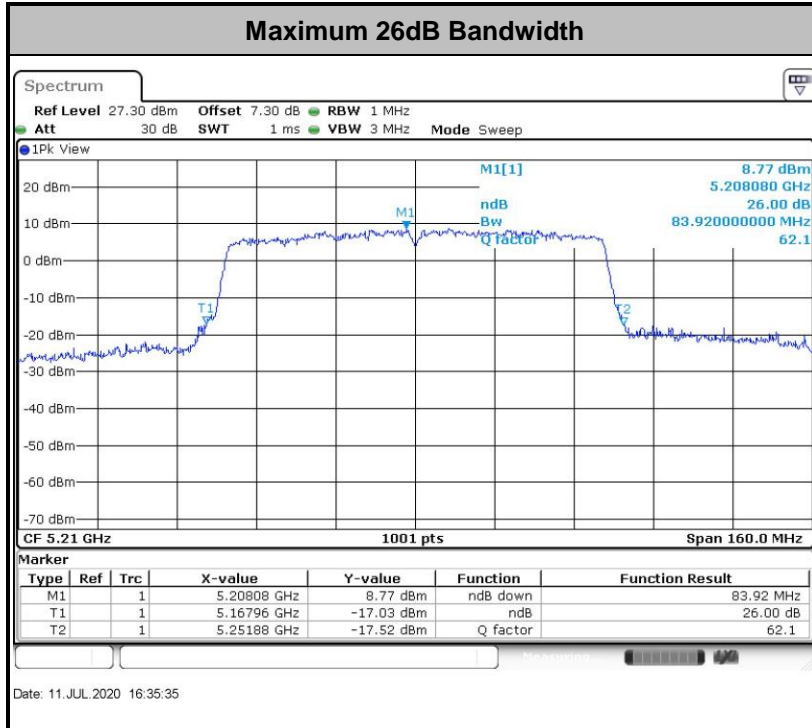

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 + 10 \log B$ , dBm, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where x is the duty cycle.



### 3.2.4 Test Setup

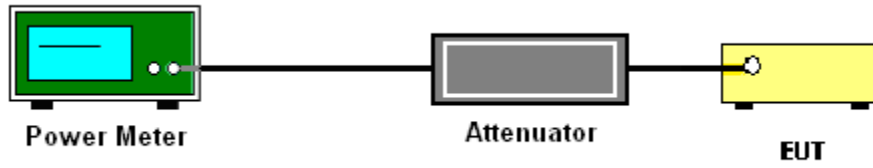

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.


The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### 3.3.4 Test Setup

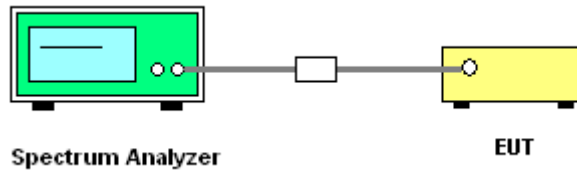

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

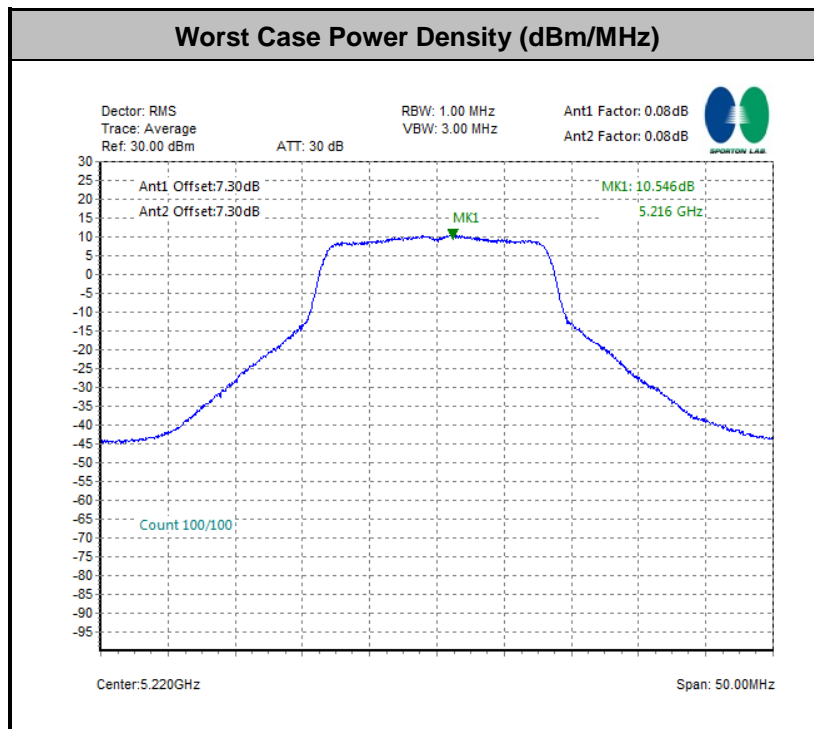



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.8$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{Meas}$  is the field strength of the emission at the measurement distance, in dBµV/m

$d_{Meas}$  is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

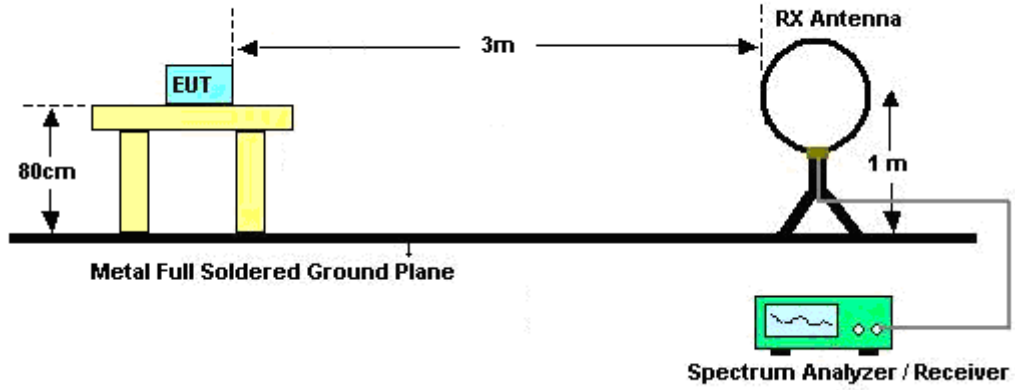

For radiated emissions from 30MHz to 1GHz

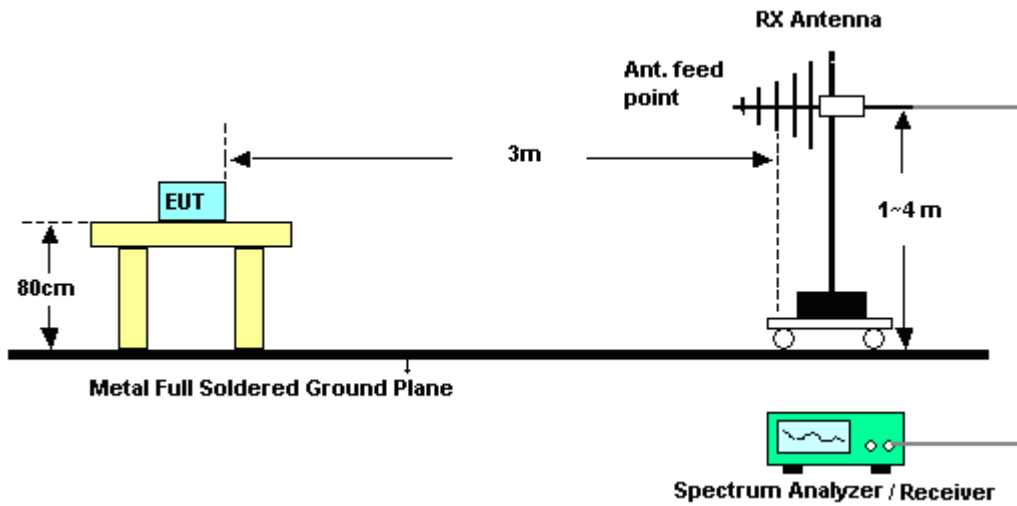

For radiated emissions above 1GHz

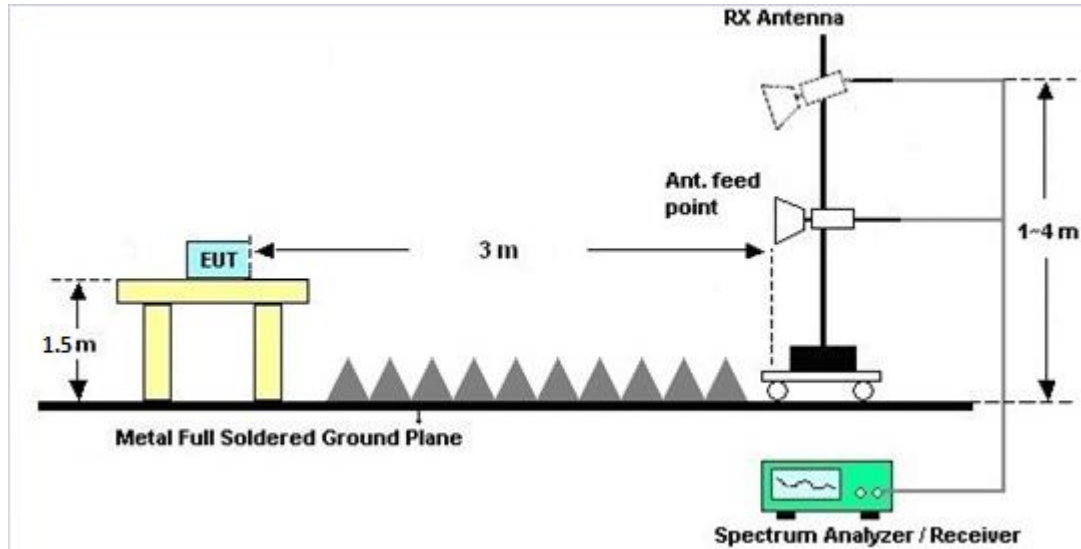

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.4.7 Duty Cycle

Please refer to Appendix D.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.





### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

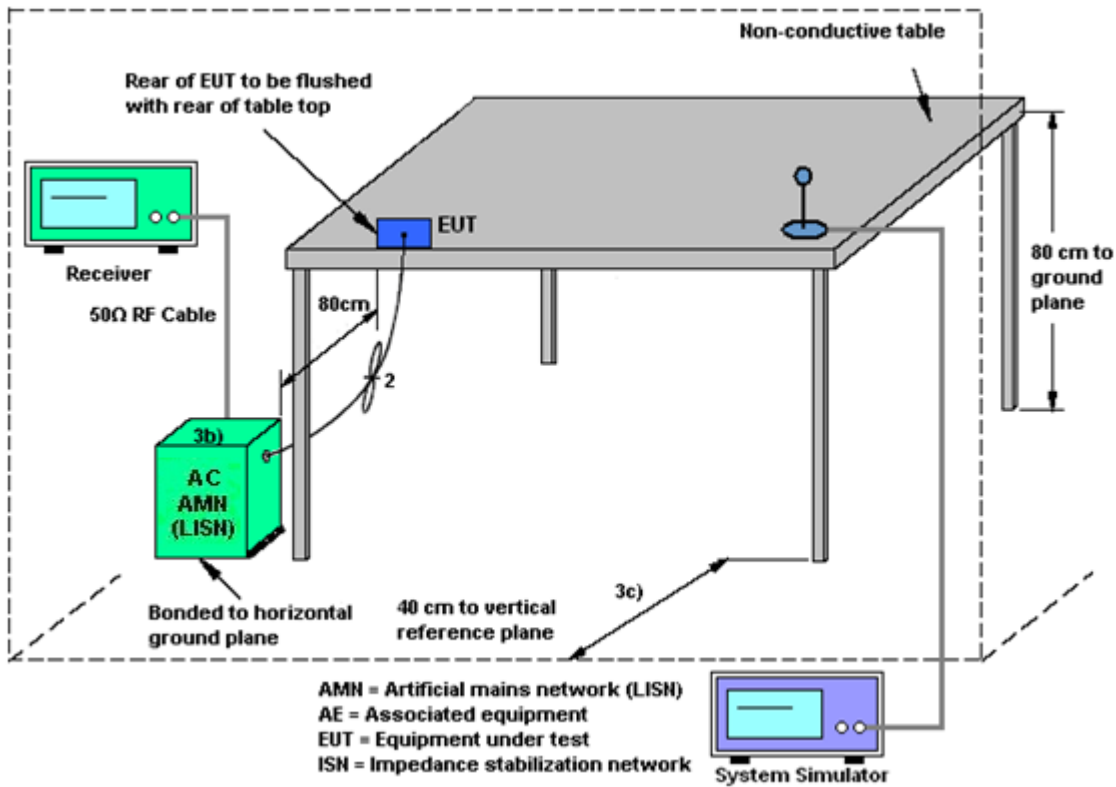

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.6 Automatically Discontinue Transmission

### 3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
Band I	-1.10	0.10	0.10	2.53	0.00	0.00
Band II	-0.50	-1.50	-0.50	2.02	0.00	0.00
Band III	-0.20	-0.50	-0.20	2.66	0.00	0.00

Power limit reduction = Composite gain – 6dBi, ( min = 0 )

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, ( min = 0 )



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Jul. 11, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Jul. 11, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Jul. 11, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 18, 2019	Jul. 21, 2020	Oct. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 15, 2020	Jul. 21, 2020	Apr. 16, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Jul. 21, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Jul. 21, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Jul. 21, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jul. 21, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Jul. 21, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jul. 21, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1GHz-18GHz	Jan. 02, 2020	Jul. 21, 2020	Jan. 03, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Jul. 21, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 21, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 21, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 21, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Jul. 14, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jul. 14, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jul. 14, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jul. 14, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	Lex Wu	Temperature:	21~25	°C
Test Date:	2020/7/11	Relative Humidity:	51~54	%



**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band I													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	17.38	17.38	23.43	22.93	-	-	22.40		
11a	6Mbps	2	44	5220	17.38	17.43	23.98	22.88	-	-	22.40		
11a	6Mbps	2	48	5240	17.43	17.48	24.13	23.18	-	-	22.41		
HT20	MCS0	2	36	5180	18.53	18.53	24.83	24.13	-	-	22.68		
HT20	MCS0	2	44	5220	18.58	18.63	25.23	24.58	-	-	22.69		
HT20	MCS0	2	48	5240	18.53	18.68	25.48	25.08	-	-	22.68		
HT40	MCS0	2	38	5190	36.46	36.56	41.90	41.72	-	-	23.01		
HT40	MCS0	2	46	5230	36.56	36.46	41.63	42.17	-	-	23.01		
VHT80	MCS0	2	42	5210	75.64	75.76	83.92	83.12	-	-	23.01		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.08	0.08	17.12	17.87	20.52	24.00	0.10		Pass	
11a	6Mbps	2	44	5220	0.08	0.08	17.20	17.95	20.60	24.00	0.10		Pass	
11a	6Mbps	2	48	5240	0.08	0.08	17.49	17.94	20.73	24.00	0.10		Pass	
HT20	MCS0	2	36	5180	0.08	0.08	16.93	17.74	20.36	24.00	0.10		Pass	
HT20	MCS0	2	44	5220	0.08	0.08	17.03	17.97	20.54	24.00	0.10		Pass	
HT20	MCS0	2	48	5240	0.08	0.08	17.40	17.87	20.65	24.00	0.10		Pass	
HT40	MCS0	2	38	5190	0.16	0.16	17.11	17.98	20.58	24.00	0.10		Pass	
HT40	MCS0	2	46	5230	0.16	0.16	17.32	17.99	20.68	24.00	0.10		Pass	
VHT20	MCS0	2	36	5180	0.08	0.08	16.90	17.75	20.36	24.00	0.10		Pass	
VHT20	MCS0	2	44	5220	0.08	0.08	17.03	17.89	20.49	24.00	0.10		Pass	
VHT20	MCS0	2	48	5240	0.08	0.08	17.40	17.85	20.64	24.00	0.10		Pass	
VHT40	MCS0	2	38	5190	0.16	0.16	17.09	17.98	20.57	24.00	0.10		Pass	
VHT40	MCS0	2	46	5230	0.16	0.16	17.31	17.96	20.66	24.00	0.10		Pass	
VHT80	MCS0	2	42	5210	0.35	0.33	17.03	17.99	20.55	24.00	0.10		Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.08	0.08			10.34		11.00		2.53	Pass
11a	6Mbps	2	44	5220	0.08	0.08			10.55		11.00		2.53	Pass
11a	6Mbps	2	48	5240	0.08	0.08			10.48		11.00		2.53	Pass
HT20	MCS0	2	36	5180	0.08	0.08			10.04		11.00		2.53	Pass
HT20	MCS0	2	44	5220	0.08	0.08			9.77		11.00		2.53	Pass
HT20	MCS0	2	48	5240	0.08	0.08			9.95		11.00		2.53	Pass
HT40	MCS0	2	38	5190	0.16	0.16			6.75		11.00		2.53	Pass
HT40	MCS0	2	46	5230	0.16	0.16			6.90		11.00		2.53	Pass
VHT80	MCS0	2	42	5210	0.35	0.33			3.80		11.00		2.53	Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band II															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	17.38	17.43	24.13	23.18	23.40		29.40		23.98		
11a	6Mbps	2	60	5300	17.43	17.43	24.13	23.03	23.41		29.41		23.98		
11a	6Mbps	2	64	5320	17.43	17.38	24.38	23.33	23.40		29.40		23.98		
HT20	MCS0	2	52	5260	18.63	18.73	25.43	24.88	23.70		29.70		23.98		
HT20	MCS0	2	60	5300	18.73	18.68	25.43	24.53	23.71		29.71		23.98		
HT20	MCS0	2	64	5320	18.73	18.68	25.67	25.18	23.71		29.71		23.98		
HT40	MCS0	2	54	5270	36.56	36.46	41.81	41.72	23.98		30.00		23.98		
HT40	MCS0	2	62	5310	36.56	36.56	41.90	42.26	23.98		30.00		23.98		
VHT80	MCS0	2	58	5290	75.76	75.76	83.12	83.28	23.98		30.00		23.98		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band II															
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	0.08	0.08	16.27	17.26	19.80	23.98		-0.50	26.99	Pass	
11a	6Mbps	2	60	5300	0.08	0.08	17.12	17.87	20.52	23.98		-0.50	26.99	Pass	
11a	6Mbps	2	64	5320	0.08	0.08	17.08	17.98	20.56	23.98		-0.50	26.99	Pass	
HT20	MCS0	2	52	5260	0.08	0.08	16.19	17.14	19.70	23.98		-0.50	26.99	Pass	
HT20	MCS0	2	60	5300	0.08	0.08	16.83	17.72	20.31	23.98		-0.50	26.99	Pass	
HT20	MCS0	2	64	5320	0.08	0.08	16.90	17.96	20.47	23.98		-0.50	26.99	Pass	
HT40	MCS0	2	54	5270	0.16	0.16	16.37	17.69	20.09	23.98		-0.50	26.99	Pass	
HT40	MCS0	2	62	5310	0.16	0.16	16.00	16.98	19.53	23.98		-0.50	26.99	Pass	
VHT20	MCS0	2	52	5260	0.08	0.08	16.11	17.07	19.63	23.98		-0.50	26.99	Pass	
VHT20	MCS0	2	60	5300	0.08	0.08	16.74	17.77	20.30	23.98		-0.50	26.99	Pass	
VHT20	MCS0	2	64	5320	0.08	0.08	16.85	17.99	20.47	23.98		-0.50	26.99	Pass	
VHT40	MCS0	2	54	5270	0.16	0.16	16.28	17.69	20.06	23.98		-0.50	26.99	Pass	
VHT40	MCS0	2	62	5310	0.16	0.16	15.99	16.97	19.52	23.98		-0.50	26.99	Pass	
VHT80	MCS0	2	58	5290	0.35	0.33	14.37	14.62	17.51	23.98		-0.50	26.99	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

Band II														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	0.08	0.08			9.93		11.00		2.02	Pass
11a	6Mbps	2	60	5300	0.08	0.08			10.40		11.00		2.02	Pass
11a	6Mbps	2	64	5320	0.08	0.08			10.17		11.00		2.02	Pass
HT20	MCS0	2	52	5260	0.08	0.08			9.32		11.00		2.02	Pass
HT20	MCS0	2	60	5300	0.08	0.08			9.50		11.00		2.02	Pass
HT20	MCS0	2	64	5320	0.08	0.08			9.62		11.00		2.02	Pass
HT40	MCS0	2	54	5270	0.16	0.16			6.33		11.00		2.02	Pass
HT40	MCS0	2	62	5310	0.16	0.16			6.00		11.00		2.02	Pass
VHT80	MCS0	2	58	5290	0.35	0.33			1.14		11.00		2.02	Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	17.38	17.38	22.43	22.68	23.40		29.40		23.98		
11a	6Mbps	2	116	5580	17.43	17.38	23.03	22.68	23.40		29.40		23.98		
11a	6Mbps	2	140	5700	17.43	17.43	22.78	22.63	23.41		29.41		23.98		
HT20	MCS0	2	100	5500	18.58	18.68	24.03	24.28	23.69		29.69		23.98		
HT20	MCS0	2	116	5580	18.53	18.58	23.98	24.38	23.68		29.68		23.98		
HT20	MCS0	2	140	5700	18.63	18.58	24.18	24.43	23.69		29.69		23.98		
HT40	MCS0	2	102	5510	36.46	36.46	41.81	41.90	23.98		30.00		23.98		
HT40	MCS0	2	110	5550	36.46	36.36	41.81	41.63	23.98		30.00		23.98		
HT40	MCS0	2	134	5670	36.46	36.46	41.90	42.08	23.98		30.00		23.98		
VHT80	MCS0	2	106	5530	75.64	75.64	83.28	83.12	23.98		30.00		23.98		
VHT80	MCS0	2	122	5610	75.76	75.76	82.64	83.76	23.98		30.00		23.98		

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	0.08	0.08	15.25	16.30	18.81	23.98		-0.20		26.99	Pass
11a	6Mbps	2	116	5580	0.08	0.08	15.49	16.28	18.91	23.98		-0.20		26.99	Pass
11a	6Mbps	2	140	5700	0.08	0.08	15.44	15.72	18.59	23.98		-0.20		26.99	Pass
HT20	MCS0	2	100	5500	0.08	0.08	15.29	16.43	18.91	23.98		-0.20		26.99	Pass
HT20	MCS0	2	116	5580	0.08	0.08	15.51	16.36	18.97	23.98		-0.20		26.99	Pass
HT20	MCS0	2	140	5700	0.08	0.08	15.61	15.88	18.76	23.98		-0.20		26.99	Pass
HT40	MCS0	2	102	5510	0.16	0.16	15.33	16.31	18.86	23.98		-0.20		26.99	Pass
HT40	MCS0	2	110	5550	0.16	0.16	15.40	16.29	18.88	23.98		-0.20		26.99	Pass
HT40	MCS0	2	134	5670	0.16	0.16	15.60	15.66	18.64	23.98		-0.20		26.99	Pass
VHT20	MCS0	2	100	5500	0.08	0.08	15.39	16.43	18.95	23.98		-0.20		26.99	Pass
VHT20	MCS0	2	116	5580	0.08	0.08	15.36	16.48	18.97	23.98		-0.20		26.99	Pass
VHT20	MCS0	2	140	5700	0.08	0.08	15.57	15.92	18.76	23.98		-0.20		26.99	Pass
VHT40	MCS0	2	102	5510	0.16	0.16	15.20	16.24	18.76	23.98		-0.20		26.99	Pass
VHT40	MCS0	2	110	5550	0.16	0.16	15.31	16.25	18.82	23.98		-0.20		26.99	Pass
VHT40	MCS0	2	134	5670	0.16	0.16	15.75	15.65	18.71	23.98		-0.20		26.99	Pass
VHT80	MCS0	2	106	5530	0.35	0.33	14.99	16.30	18.71	23.98		-0.20		26.99	Pass
VHT80	MCS0	2	122	5610	0.35	0.33	16.12	16.34	19.24	23.98		-0.20		26.99	Pass




**TEST RESULTS DATA**  
**Power Spectral Density**

Band III														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	0.08	0.08			8.28		11.00		2.66	Pass
11a	6Mbps	2	116	5580	0.08	0.08			8.73		11.00		2.66	Pass
11a	6Mbps	2	140	5700	0.08	0.08			8.35		11.00		2.66	Pass
HT20	MCS0	2	100	5500	0.08	0.08			8.24		11.00		2.66	Pass
HT20	MCS0	2	116	5580	0.08	0.08			8.43		11.00		2.66	Pass
HT20	MCS0	2	140	5700	0.08	0.08			8.09		11.00		2.66	Pass
HT40	MCS0	2	102	5510	0.16	0.16			5.12		11.00		2.66	Pass
HT40	MCS0	2	110	5550	0.16	0.16			5.97		11.00		2.66	Pass
HT40	MCS0	2	134	5670	0.16	0.16			4.86		11.00		2.66	Pass
VHT80	MCS0	2	106	5530	0.35	0.33			2.41		11.00		2.66	Pass
VHT80	MCS0	2	122	5610	0.35	0.33			2.54		11.00		2.66	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

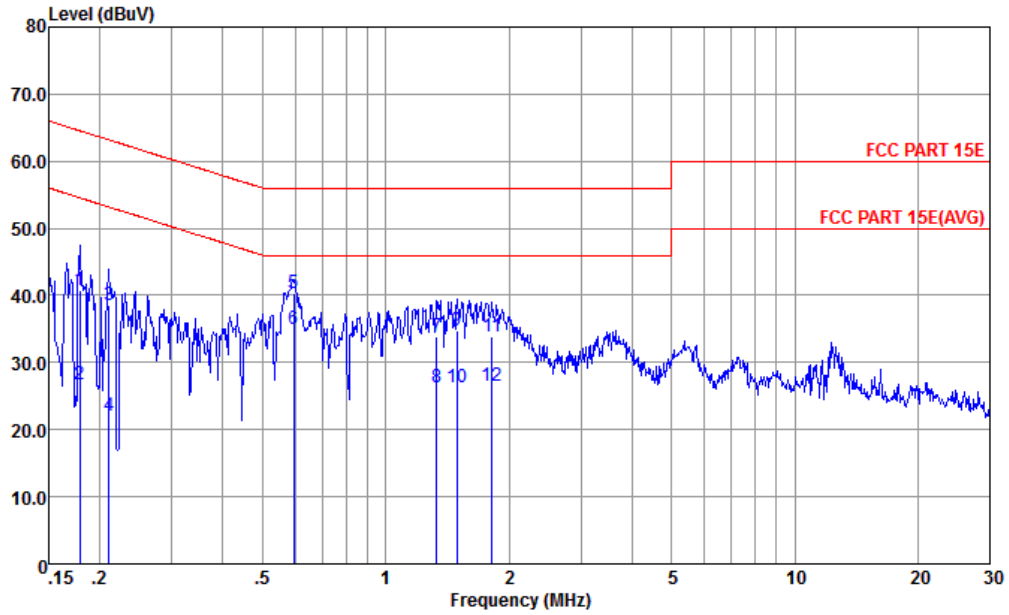


Site : CO01-KS  
 Condition : FCC PART 15E LISN-L-191028-CN02 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.179	40.69	-23.86	64.55	30.20	0.08	10.41	QP
2	0.179	26.79	-27.76	54.55	16.30	0.08	10.41	Average
3	0.211	38.65	-24.53	63.18	28.20	0.09	10.36	QP
4	0.211	22.05	-31.13	53.18	11.60	0.09	10.36	Average
5	0.595	40.28	-15.72	56.00	29.90	0.14	10.24	QP
6 *	0.595	34.98	-11.02	46.00	24.60	0.14	10.24	Average
7	1.331	33.80	-22.20	56.00	23.30	0.27	10.23	QP
8	1.331	26.40	-19.60	46.00	15.90	0.27	10.23	Average
9	1.495	34.73	-21.27	56.00	24.20	0.30	10.23	QP
10	1.495	26.33	-19.67	46.00	15.80	0.30	10.23	Average
11	1.819	33.89	-22.11	56.00	23.30	0.36	10.23	QP
12	1.819	26.49	-19.51	46.00	15.90	0.36	10.23	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

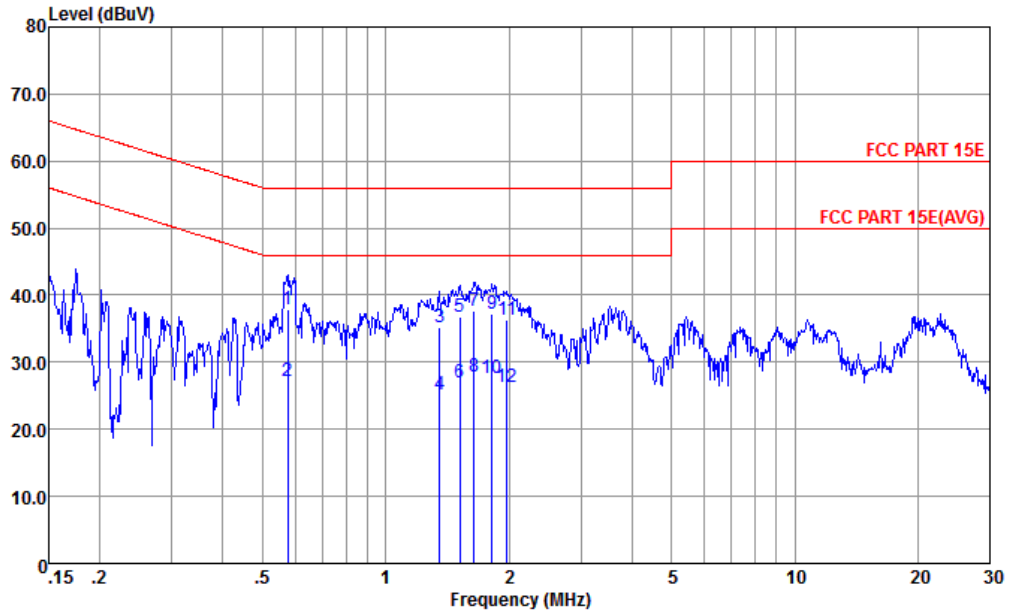

Site : CO01-KS  
 Condition : FCC PART 15E LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.576	37.78	-18.22	56.00	27.30	0.24	10.24	QP
2	0.576	27.08	-18.92	46.00	16.60	0.24	10.24	Average
3	1.352	35.22	-20.78	56.00	24.60	0.39	10.23	QP
4	1.352	25.22	-20.78	46.00	14.60	0.39	10.23	Average
5	1.519	36.86	-19.14	56.00	26.20	0.43	10.23	QP
6	1.519	26.96	-19.04	46.00	16.30	0.43	10.23	Average
7	1.645	37.59	-18.41	56.00	26.90	0.46	10.23	QP
8 *	1.645	27.89	-18.11	46.00	17.20	0.46	10.23	Average
9	1.819	37.32	-18.68	56.00	26.60	0.49	10.23	QP
10	1.819	27.62	-18.38	46.00	16.90	0.49	10.23	Average
11	1.980	36.25	-19.75	56.00	25.50	0.52	10.23	QP
12	1.980	26.35	-19.65	46.00	15.60	0.52	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz  
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 36 5180MHz		5113.92	55.62	-18.38	74	42.33	35.3	11.32	33.33	100	283	P	H
		5147.68	46.4	-7.6	54	33.03	35.33	11.36	33.32	100	283	A	H
	*	5182	111.31	-	-	97.87	35.36	11.4	33.32	100	283	P	H
		5182	104.07	-	-	90.63	35.36	11.4	33.32	100	283	A	H
		5126.72	54.73	-19.27	74	41.41	35.31	11.34	33.33	103	244	P	V
		5147.04	45.18	-8.82	54	31.81	35.33	11.36	33.32	103	244	A	V
	*	5182	104.61	-	-	91.17	35.36	11.4	33.32	103	244	P	V
		5182	97.76	-	-	84.32	35.36	11.4	33.32	103	244	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36		10360	45.26	-23.04	68.3	51.91	39.6	15.83	62.08	300	0	P	H
5180MHz		10360	46.84	-21.46	68.3	53.49	39.6	15.83	62.08	100	360	P	V
802.11a CH 44		10440	45.61	-22.69	68.3	52.14	39.63	15.89	62.05	300	0	P	H
5220MHz		10440	45.99	-22.31	68.3	52.52	39.63	15.89	62.05	100	360	P	V
802.11a CH 48		10480	46.69	-21.61	68.3	53.11	39.66	15.94	62.02	100	360	P	H
5240MHz		10480	45.54	-22.76	68.3	51.96	39.66	15.94	62.02	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 CH 36 5180MHz and a Remark section.



**Band 1 5150~5250MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36		10360	45.09	-23.21	68.3	51.74	39.6	15.83	62.08	100	360	P	H
5180MHz		10360	45.6	-22.7	68.3	52.25	39.6	15.83	62.08	100	360	P	V
802.11n HT20 CH 44		10440	45.87	-22.43	68.3	52.4	39.63	15.89	62.05	100	360	P	H
5220MHz		10440	46.58	-21.72	68.3	53.11	39.63	15.89	62.05	100	360	P	V
802.11n HT20 CH 48		10480	46.12	-22.18	68.3	52.54	39.66	15.94	62.02	100	360	P	H
5240MHz		10480	45.61	-22.69	68.3	52.03	39.66	15.94	62.02	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 1 5150~5250MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5147.2	58.51	-15.49	74	45.14	35.33	11.36	33.32	100	283	P	H
		5147.2	47.72	-6.28	54	34.35	35.33	11.36	33.32	100	283	A	H
	*	5188	109.41	-	-	95.97	35.36	11.4	33.32	100	283	P	H
		5188	101.75	-	-	88.31	35.36	11.4	33.32	100	283	A	H
		5367.42	54.82	-19.18	74	41	35.54	11.6	33.32	100	283	P	H
		5395.5	45.08	-8.92	54	31.22	35.57	11.6	33.31	100	283	A	H
		5138.24	55.28	-18.72	74	41.95	35.31	11.34	33.32	103	245	P	V
		5149.76	45.62	-8.38	54	32.25	35.33	11.36	33.32	103	245	A	V
	*	5188	102.19	-	-	88.75	35.36	11.4	33.32	103	245	P	V
		5188	94.89	-	-	81.45	35.36	11.4	33.32	103	245	A	V
		5353.38	54.89	-19.11	74	41.08	35.52	11.61	33.32	103	245	P	V
		5374.8	44.56	-9.44	54	30.73	35.54	11.6	33.31	103	245	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 38 5190MHz and CH 46 5230MHz, and a Remark section.



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11ac VHT80 CH 38 5210MHz and a Remark section.



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10420	45.69	-22.61	68.3	52.25	39.62	15.88	62.06	100	360	P	H
CH 42 5210MHz		10420	45.13	-23.17	68.3	51.69	39.62	15.88	62.06	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz
WIFI 802.11a (Band Edge @ 3m)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains test data for 802.11a CH 64 at 5320MHz and a Remark section.



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	45.4	-22.9	68.3	51.75	39.68	15.98	62.01	100	360	P	H
		10520	45.54	-22.76	68.3	51.89	39.68	15.98	62.01	100	360	P	V
802.11a CH 60 5300MHz		10600	45.85	-28.15	74	52.04	39.72	16.06	61.97	100	360	P	H
		10600	47.59	-26.41	74	53.78	39.72	16.06	61.97	100	360	P	V
802.11a CH 64 5320MHz		10640	45.15	-28.85	74	51.27	39.74	16.09	61.95	100	360	P	H
		10640	47.45	-26.55	74	53.57	39.74	16.09	61.95	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 CH 64 5320MHz and a Remark section.



**Band 2 5250~5350MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	46.1	-22.2	68.3	52.45	39.68	15.98	62.01	100	360	P	H
802.11n HT20 CH 60 5300MHz		10600	47.13	-26.87	74	53.32	39.72	16.06	61.97	100	360	P	H
802.11n HT20 CH 64 5320MHz		10640	46.38	-27.62	74	52.5	39.74	16.09	61.95	100	360	P	H
802.11n HT20 CH 52 5260MHz		10520	45.97	-22.33	68.3	52.32	39.68	15.98	62.01	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600	46.32	-27.68	74	52.51	39.72	16.06	61.97	100	360	P	V
802.11n HT20 CH 64 5320MHz		10640	45.38	-28.62	74	51.5	39.74	16.09	61.95	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5142.4	55.04	-18.96	74	41.67	35.33	11.36	33.32	146	281	P	H
		5117.6	45.36	-8.64	54	32.07	35.3	11.32	33.33	146	281	A	H
	*	5320	107.92	-	-	94.13	35.49	11.62	33.32	146	281	P	H
		5320	99.94	-	-	86.15	35.49	11.62	33.32	146	281	A	H
		5355	57.35	-16.65	74	43.54	35.52	11.61	33.32	146	281	P	H
		5350	48.59	-5.41	54	34.78	35.52	11.61	33.32	146	281	A	H
		5132	54.92	-19.08	74	41.59	35.31	11.34	33.32	100	157	P	V
		5107.04	45.35	-8.65	54	32.06	35.3	11.32	33.33	100	157	A	V
	*	5314	103.68	-	-	89.89	35.49	11.62	33.32	100	157	P	V
		5314	96.3	-	-	82.51	35.49	11.62	33.32	100	157	A	V
	5350.3	59.33	-14.67	74	45.52	35.52	11.61	33.32	100	157	P	V	
	5350.3	49.5	-4.5	54	35.69	35.52	11.61	33.32	100	157	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 2 5250~5350MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54		10540	45.76	-22.54	68.3	52.08	39.69	15.99	62	100	360	P	H
5270MHz		10540	45.23	-23.07	68.3	51.55	39.69	15.99	62	100	360	P	V
802.11n HT40 CH 62		10620	45.88	-28.12	74	52.03	39.73	16.08	61.96	100	360	P	H
5310MHz		10620	45.25	-28.75	74	51.4	39.73	16.08	61.96	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ac VHT80 CH 58 5290MHz and a Remark section.



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10580	46.45	-21.85	68.3	52.68	39.71	16.04	61.98	100	360	P	H
CH 58 5290MHz		10580	45.68	-22.62	68.3	51.91	39.71	16.04	61.98	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 100 5500MHz		5457.2	55.5	-18.5	74	41.59	35.62	11.6	33.31	112	219	P	H
		5468.56	55.53	-12.77	68.3	41.59	35.64	11.61	33.31	112	219	P	H
		5454.64	46.15	-7.85	54	32.24	35.62	11.6	33.31	112	219	A	H
		5500	111.27	-	-	97.3	35.67	11.61	33.31	112	219	P	H
		5500	103.88	-	-	89.91	35.67	11.61	33.31	112	219	A	H
		5459.44	54.53	-19.47	74	40.62	35.62	11.6	33.31	121	248	P	V
		5464.56	54.35	-13.95	68.3	40.41	35.64	11.61	33.31	121	248	P	V
		5458.96	45.43	-8.57	54	31.52	35.62	11.6	33.31	121	248	A	V
		5500	105.97	-	-	92	35.67	11.61	33.31	121	248	P	V
		5500	98.9	-	-	84.93	35.67	11.61	33.31	121	248	A	V
802.11a CH 140 5700MHz		5727.48	57.83	-10.47	68.3	43.42	35.84	11.95	33.38	117	219	P	H
		5704	111.74	-	-	97.33	35.83	11.95	33.37	117	219	P	H
		5704	104.07	-	-	89.66	35.83	11.95	33.37	117	219	A	H
		5728.2	55.89	-12.41	68.3	41.48	35.84	11.95	33.38	100	210	P	V
		5704	106.47	-	-	92.06	35.83	11.95	33.37	100	210	P	V
		5704	100.48	-	-	86.07	35.83	11.95	33.37	100	210	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include channels 100, 116, and 140 at various frequencies.



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 100 5500MHz		5435.12	55.32	-18.68	74	41.42	35.61	11.6	33.31	100	216	P	H
		5467.44	55.23	-13.07	68.3	41.29	35.64	11.61	33.31	100	216	P	H
		5459.92	45.93	-8.07	54	32.02	35.62	11.6	33.31	100	216	A	H
	*	5500	110.91	-	-	96.94	35.67	11.61	33.31	100	216	P	H
		5500	103.92	-	-	89.95	35.67	11.61	33.31	100	216	A	H
		5441.52	54.8	-19.2	74	40.9	35.61	11.6	33.31	100	159	P	V
		5466.96	54.1	-14.2	68.3	40.16	35.64	11.61	33.31	100	159	P	V
		5459.9	44.95	-9.05	54	31.04	35.62	11.6	33.31	100	159	A	V
	*	5500	106.1	-	-	92.13	35.67	11.61	33.31	100	159	P	V
	5500	98.52	-	-	84.55	35.67	11.61	33.31	100	159	A	V	
802.11n HT20 CH 140 5700MHz		5725	58.69	-9.61	68.3	44.28	35.84	11.95	33.38	100	217	P	H
	*	5704	111.63	-	-	97.22	35.83	11.95	33.37	100	217	P	H
		5704	103.91	-	-	89.5	35.83	11.95	33.37	100	217	A	H
		5738.44	56.02	-12.28	68.3	41.59	35.85	11.96	33.38	100	209	P	V
	*	5704	106.9	-	-	92.49	35.83	11.95	33.37	100	209	P	V
	5704	99.51	-	-	85.1	35.83	11.95	33.37	100	209	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 100, 116, and 140 at various frequencies.



**Band 3 - 5470~5725MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 102 5510MHz		5459.12	60.79	-13.21	74	46.88	35.62	11.6	33.31	145	281	P	H
		5466.16	65.02	-3.28	68.3	51.08	35.64	11.61	33.31	145	281	P	H
		5460	50.84	-3.16	54	36.93	35.62	11.6	33.31	145	281	A	H
	*	5524	107.46	-	-	93.43	35.69	11.66	33.32	145	281	P	H
		5524	100.27	-	-	86.24	35.69	11.66	33.32	145	281	A	H
		5747.08	54.88	-13.42	68.3	40.46	35.85	11.96	33.39	145	281	P	H
		5457.68	56.26	-17.74	74	42.35	35.62	11.6	33.31	100	163	P	V
		5466.64	59.37	-8.93	68.3	45.43	35.64	11.61	33.31	100	163	P	V
		5459.76	46.95	-7.05	54	33.04	35.62	11.6	33.31	100	163	A	V
	*	5506	104.21	-	-	90.24	35.67	11.61	33.31	100	163	P	V
		5506	97.19	-	-	83.22	35.67	11.61	33.31	100	163	A	V
		5741.56	55.17	-13.13	68.3	40.75	35.85	11.96	33.39	100	163	P	V
802.11n HT40 CH 134 5670MHz		5420.08	54.14	-19.86	74	40.26	35.59	11.6	33.31	121	284	P	H
		5468.08	54.56	-13.74	68.3	40.62	35.64	11.61	33.31	121	284	P	H
		5453.68	44.94	-9.06	54	31.03	35.62	11.6	33.31	121	284	A	H
	*	5680	108.22	-	-	93.83	35.82	11.94	33.37	121	284	P	H
		5680	100.68	-	-	86.29	35.82	11.94	33.37	121	284	A	H
		5726.28	63.44	-4.86	68.3	49.03	35.84	11.95	33.38	121	284	P	H
		5415.44	54.6	-19.4	74	40.72	35.59	11.6	33.31	101	188	P	V
		5469.84	53.21	-15.09	68.3	39.27	35.64	11.61	33.31	101	188	P	V
		5455.28	44.98	-9.02	54	31.07	35.62	11.6	33.31	101	188	A	V
	*	5680	105.02	-	-	90.63	35.82	11.94	33.37	101	188	P	V
	5680	98.42	-	-	84.03	35.82	11.94	33.37	101	188	A	V	
	5728.44	57.38	-10.92	68.3	42.97	35.84	11.95	33.38	101	188	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 102, 110, and 134 at various frequencies.



**Band 3 - 5470~5725MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 106 5530MHz		5458.64	58.74	-15.26	74	44.83	35.62	11.6	33.31	126	283	P	H
		5465.52	62.32	-5.98	68.3	48.38	35.64	11.61	33.31	126	283	P	H
	*	5460	50.63	-3.37	54	36.72	35.62	11.6	33.31	126	283	A	H
		5524	104.16	-	-	90.13	35.69	11.66	33.32	126	283	P	H
		5524	97.18	-	-	83.15	35.69	11.66	33.32	126	283	A	H
		5754.52	54.31	-13.99	68.3	39.89	35.85	11.96	33.39	126	283	P	H
		5449.84	55.38	-18.62	74	41.47	35.62	11.6	33.31	100	186	P	V
		5466.64	56.31	-11.99	68.3	42.37	35.64	11.61	33.31	100	186	P	V
	*	5459.76	46.85	-7.15	54	32.94	35.62	11.6	33.31	100	186	A	V
		5524	100.67	-	-	86.64	35.69	11.66	33.32	100	186	P	V
		5524	93.31	-	-	79.28	35.69	11.66	33.32	100	186	A	V
	5725.96	55.24	-13.06	68.3	40.83	35.84	11.95	33.38	100	186	P	V	
802.11ac VHT80 CH 122 5610MHz		5453.84	55.4	-18.6	74	41.49	35.62	11.6	33.31	105	256	P	H
		5460.56	56.46	-11.84	68.3	42.55	35.62	11.6	33.31	105	256	P	H
		5459.92	46.02	-7.98	54	32.11	35.62	11.6	33.31	105	256	A	H
		5602	106.74	-	-	92.38	35.77	11.93	33.34	105	256	P	H
		5602	98.94	-	-	84.58	35.77	11.93	33.34	105	256	A	H
		5725.4	57.32	-10.98	68.3	42.91	35.84	11.95	33.38	105	256	P	H
		5458.16	55.12	-18.88	74	41.21	35.62	11.6	33.31	100	187	P	V
		5461.2	53.79	-14.51	68.3	39.88	35.62	11.6	33.31	100	187	P	V
		5456.24	45.58	-8.42	54	31.67	35.62	11.6	33.31	100	187	A	V
		5602	103.48	-	-	89.12	35.77	11.93	33.34	100	187	P	V
		5602	96.81	-	-	82.45	35.77	11.93	33.34	100	187	A	V
	5725.16	55.09	-13.21	68.3	40.68	35.84	11.95	33.38	100	187	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ac VHT80 CH 106 5530MHz and CH 122 5610MHz, plus a Remark section.



Emission below 1GHz

WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80 LF		30	19.11	-20.89	40	25.05	25.1	0.94	31.98	-	-	P	H
		67.83	15.04	-24.96	40	33.08	12.38	1.51	31.93	-	-	P	H
		149.31	22.6	-20.9	43.5	34.98	17.14	2.42	31.94	-	-	P	H
		305.48	27.49	-18.51	46	36.56	19.46	3.48	32.01	-	-	P	H
		465.53	29.15	-16.85	46	33.72	23.38	4.28	32.23	100	0	P	H
		938.89	28.9	-17.1	46	23.32	30.59	6.08	31.09	-	-	P	H
		30	27.12	-12.88	40	33.06	25.1	0.94	31.98	100	0	P	V
		66.86	19.76	-20.24	40	37.87	12.32	1.5	31.93	-	-	P	V
		351.07	24	-22	46	31.83	20.53	3.72	32.08	-	-	P	V
		406.36	28.15	-17.85	46	34.21	22.06	4	32.12	-	-	P	V
		484.93	32.32	-13.68	46	36.48	23.72	4.37	32.25	-	-	P	V
		901.06	30.26	-15.74	46	26.62	29.14	5.95	31.45	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For CO-Location

Band 2 - 5250~5350MHz
WIFI 5G + BLE
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency, Level, Over Limit, Limit Line, Read Level, Antenna Factor, Cable Loss, Preamp Factor, Ant Pos, Table Pos, Peak Avg., Pol. It contains multiple rows of test data for 802.11ac VHT80 CH 58 and a Remark section at the bottom.



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10580	44.39	-23.91	68.3	50.62	39.71	16.04	61.98	100	360	P	H
CH 58 5290MHz		10580	44.32	-23.98	68.3	50.55	39.71	16.04	61.98	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 39 2480MHz	*	2484.28	55.15	-18.85	74	49.21	31.99	7.89	33.94	100	204	P	H
	*	2483.5	46.75	-7.25	54	40.81	31.99	7.89	33.94	100	204	A	H
		2480	96.88	-	-	90.94	31.99	7.89	33.94	100	204	P	H
		2480	95.39	-	-	89.45	31.99	7.89	33.94	100	204	A	H
	*	2495.56	54.65	-19.35	74	48.71	31.94	7.93	33.93	349	177	P	V
	*	2483.5	45.24	-8.76	54	39.3	31.99	7.89	33.94	349	177	A	V
		2480	92.4	-	-	86.46	31.99	7.89	33.94	349	177	P	V
		2480	91.06	-	-	85.12	31.99	7.89	33.94	349	177	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4962	55.23	-18.77	74	70.93	35.19	11.14	62.03	120	309	P	H
		4962	51.61	-2.39	54	67.31	35.19	11.14	62.03	120	309	A	H
		7440	42.22	-31.78	74	53.85	36.89	13.59	62.11	300	0	P	H
		4962	48.7	-25.3	74	64.4	35.19	11.14	62.03	300	360	P	V
		7440	42.52	-31.48	74	54.15	36.89	13.59	62.11	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 2 - 5250~5350MHz**  
**WIFI 5G + WWAN**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80 CH 58 5290MHz		5116.48	55.36	-18.64	74	42.07	35.3	11.32	33.33	162	351	P	H
		5109.6	45.89	-8.11	54	32.6	35.3	11.32	33.33	162	351	A	H
	*	5296	101.69	-	-	87.91	35.48	11.62	33.32	162	351	P	H
		5296	93.75	-	-	79.97	35.48	11.62	33.32	162	351	A	H
		5350.3	58.48	-15.52	74	44.67	35.52	11.61	33.32	162	351	P	H
		5353	50.76	-3.24	54	36.95	35.52	11.61	33.32	162	351	A	H
		5115.04	54.51	-19.49	74	41.22	35.3	11.32	33.33	100	159	P	V
		5115.52	45.79	-8.21	54	32.5	35.3	11.32	33.33	100	159	A	V
	*	5308	97.16	-	-	83.38	35.48	11.62	33.32	100	159	P	V
		5308	89.09	-	-	75.31	35.48	11.62	33.32	100	159	A	V
		5351.2	56.3	-17.7	74	42.49	35.52	11.61	33.32	100	159	P	V
	5350	48.89	-5.11	54	35.08	35.52	11.61	33.32	100	159	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 Part27M B41 CA (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		5148	42.27	-31.73	74	57.47	35.35	11.38	61.93	100	360	P	H
		5290	48.6	-19.7	68.3	63.55	35.46	11.59	62	100	360	P	H
VHT80		10580	45.85	-22.45	68.3	52.08	39.71	16.04	61.98	300	0	P	H
CH 58		5148	40.9	-33.10	74	56.1	35.35	11.38	61.93	100	0	P	V
5290MHz		5290	43.12	-25.18	68.3	58.07	35.46	11.59	62	100	0	P	V
		10580	45.62	-22.68	68.3	51.85	39.71	16.04	61.98	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	98.28	-	-	10Hz
1+2	802.11n HT20	98.16	-	-	10Hz
1+2	802.11n HT40	96.38	0.950	1.05	1.2kHz
1+2	802.11ac VHT80	92.77	0.465	2.150	2.2kHz


### 802.11a

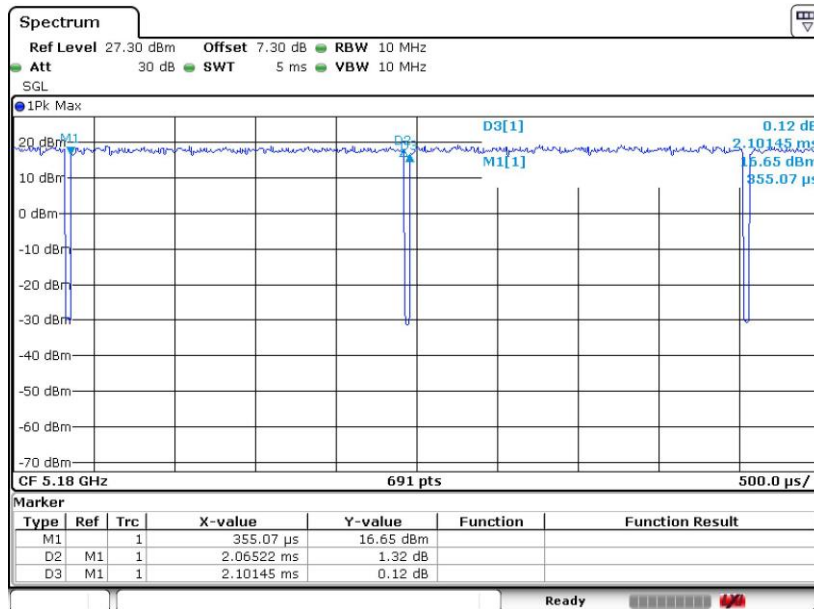

Date: 6.JUL.2020 18:27:08




802.11n HT20

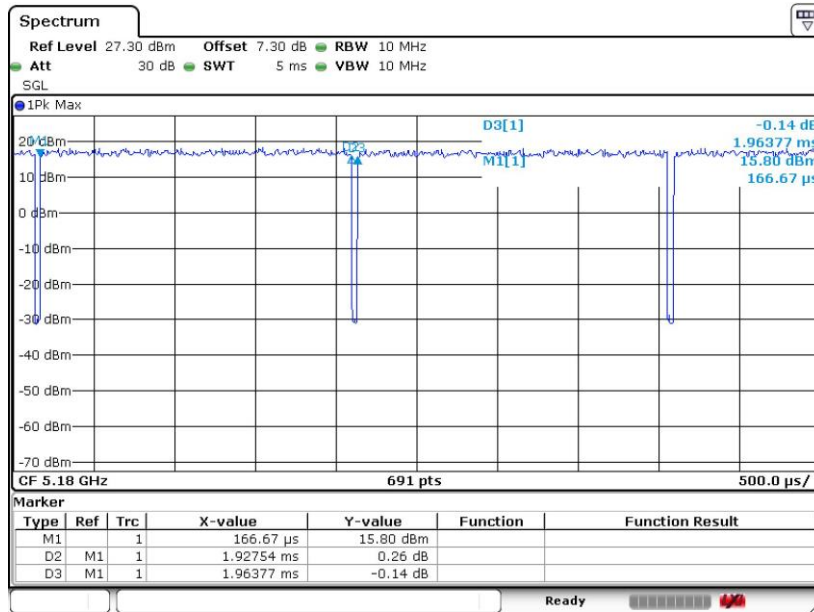

Date: 6.JUL.2020 19:58:08

802.11n HT40

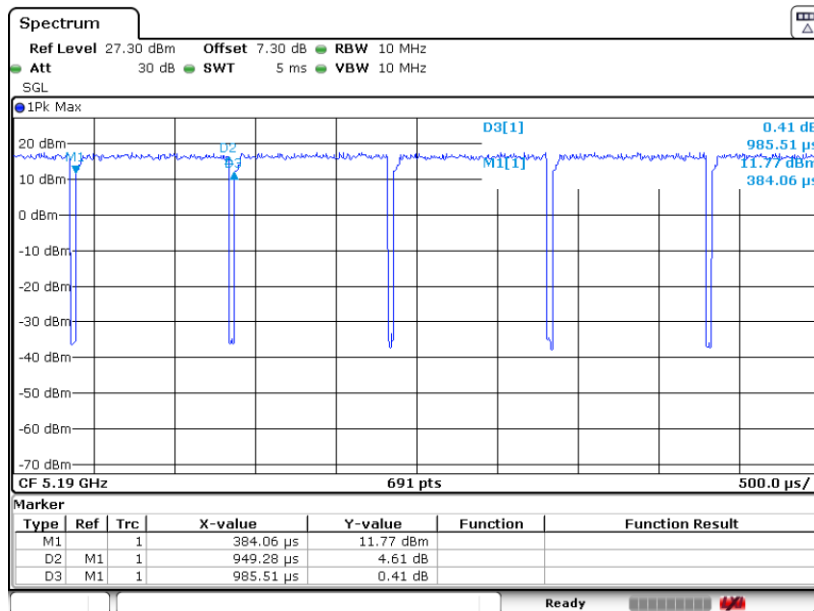



802.11ac VHT80

