



**FCC 47 CFR PART 15 SUBPART C &  
INDUSTRY CANADA RSS-210**

**TEST REPORT**

**For**

**TABLET DISPLAY UNIT**

**FCC Model: 12131-1000-XX(X=0~9;a~z;A~Z)  
IC Model: 12131-1000-03, RF-3590RT, RF-3590**

**Trade Name: HARRIS**

*Issued to*

**Harris Corporation RF Communications Division  
221 Jefferson Ridge Parkway, Lynchburg, VA 24501**

*Issued by*

**Compliance Certification Services Inc.  
No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City 24891, Taiwan. (R.O.C.)  
<http://www.ccsrf.com>  
[service@ccsrf.com](mailto:service@ccsrf.com)  
Issued Date: February 19, 2013**



---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	February 19, 2013	Initial Issue	ALL	Angel Cheng



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES .....	8
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	9
4.2 MEASUREMENT EQUIPMENT USED .....	9
4.3 MEASUREMENT UNCERTAINTY .....	10
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>11</b>
5.1 FACILITIES .....	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT .....	13
<b>7. FCC PART 15.247 REQUIREMENTS &amp; RSS 210 REQUIREMENTS .....</b>	<b>14</b>
7.1 99% BANDWIDTH .....	14
7.2 20 DB BANDWIDTH.....	18
7.3 PEAK POWER.....	25
7.4 BAND EDGES MEASUREMENT .....	26
7.5 FREQUENCY SEPARATION .....	45
7.6 NUMBER OF HOPPING FREQUENCY.....	50
7.7 TIME OF OCCUPANCY (DWELL TIME) .....	55
7.8 SPURIOUS EMISSIONS .....	66
7.9 POWERLINE CONDUCTED EMISSIONS.....	84
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>87</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



# 1. TEST RESULT CERTIFICATION

**Applicant:** Harris Corporation RF Communications Division  
221 Jefferson Ridge Parkway, Lynchburg, VA 24501

**Manufacturer:** PEGATRON CORPORATION TAOYUAN PLANT  
No.5, Shing Yen St, Kwei Shan Hsiang, Taoyuan Hsien, Taiwan

**Equipment Under Test:** TABLET DISPLAY UNIT

**Trade Name:** HARRIS

**FCC Model:** 12131-1000-XX(X=0~9;a~z;A~Z)

**IC Model:** 12131-1000-03, RF-3590RT, RF-3590

**Date of Test:** December 18, 2012 ~ February 18, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C Industry Canada RSS-210 Issue 8 Annex 8 Industry Canada RSS-GEN Issue 3	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements set forth in the above standards. The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

---


Miller Lee  
Section Manager  
Compliance Certification Services Inc.

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	TABLET DISPLAY UNIT
<b>Trade Name</b>	HARRIS
<b>Model Number</b>	For FCC: 12131-1000-XX(X=0~9;a~z;A~Z) For IC: 12131-1000-03, RF-3590RT, RF-3590
<b>Model Discrepancy</b>	<b>For FCC:</b> The suffix of 12131-1000-XX (X=0~9;a~z;A~Z) on model number is just for marketing purpose only. <b>For IC:</b> All the specification and layout are identical except they come with different model numbers for marketing purposes.
<b>Received Date</b>	November 23, 2012
<b>Power Adapter</b>	Powered by power Adapter Trade Name: XP Power Model Number : VEH60US19 Rating : 100-240V ~ 1.7A , 50-60Hz 19V  3.16 A
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Power</b>	3.36 dBm
<b>Modulation Technique</b>	GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps; 8DPSK for 3Mbps
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	Chip Antenna / Gain: 4.67 dBi

**Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: AQZ-12131-1000 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, and ANSI C63.4.

This submittal(s) (test report) is intended for IC Certification with Industry Canada RSS-210.

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, and ANSI C63.4: 2009.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: 12131-2100-01) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) with 1Mbps data rate was chosen for full testing.

During the preliminary test, GFSK,  $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

Following channels were selected for the radiated emission testing only as listed below:

Tested Channel	Modulation Type	Packet Type	Data Rate
Low, Mid, High	GFSK	DH 5	1
Low, Mid, High	8DPSK	DH 5	3

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.





## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/16/2013
Power Meter	Anritsu	ML2495A	1012009	04/26/2013
Power Sensor	Anritsu	MA2411B	0917072	04/26/2013

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/01/2013
EMI Test Receiver	R&S	ESCI	100064	02/15/2014
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/11/2014
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/18/2013
Bilog Antenna	Sunol Sciences	JB3	A030105	10/02/2013
Horn Antenna	EMCO	3117	00055165	01/10/2014
Horn Antenna	EMCO	3116	00026370	10/11/2013
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/24/2013
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	07/31/2013
LISN	R&S	ENV216	101054	06/06/2013
LISN	EMCO	3825/2	9106-1809	07/03/2013
ISN	FCC	FCC-TLISN-T2-02-09	100105	07/30/2013
ISN	FCC	FCC-TLISN-T4-02-09	20395	05/24/2013
ISN	FCC	FCC-TLISN-T8-02-09	100106	07/31/2013
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/25/2013
Test S/W	CCS-3A1-CE			



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID / BSMI ID	Data Cable	Power Cord
1	LCD Monitor	DELL	U2410F	CN-082WXD-728 72-16R-02GL	R43002	Shielded, 1.8m	Unshielded, 1.8m
2	Notebook	Rugged	N13	RCJNOIPG00018	N/A	Shielded, 1.8m	Unshielded, 1.8m with two core
3	HDD	WD	My Passport	WX31A41D9040	D33015	Shielded, 1.2m	N/A
4	Mouse	DELL	OXN867	J0206CRS	R41108	Shielded, 1.8m	N/A
5	HDD	WD	My Passport	WX31A41A7211	D33015	Shielded, 1.8m	N/A
6	Earphone	N/A	N/A	N/A	N/A	Shielded, 1.2m	Unshielded, 1.8m
7	SD Card	Apacer	AP4GSDHC6	N/A	N/A	N/A	N/A
8.	NB	R33022	HP	Pavilion dv6	CNF9491GLJ	Non- Shielded, 3m	Non-shd, 2.0 m

**Remark:**


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15.247 REQUIREMENTS & RSS 210 REQUIREMENTS

### 7.1 99% BANDWIDTH

#### Test Configuration



#### TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.

#### TEST RESULTS

*No non-compliance noted.*

#### Test Data

##### For GFSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	0.90857
Mid	2441	0.89737
High	2480	0.91017

##### For 8DPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.1894
Mid	2441	1.1959
High	2480	1.1994




**Test Plot**

**For GFSK / DH5**

**99% Bandwidth (CH Low)**

Agilent 10:58:26 Dec 18, 2012

R T

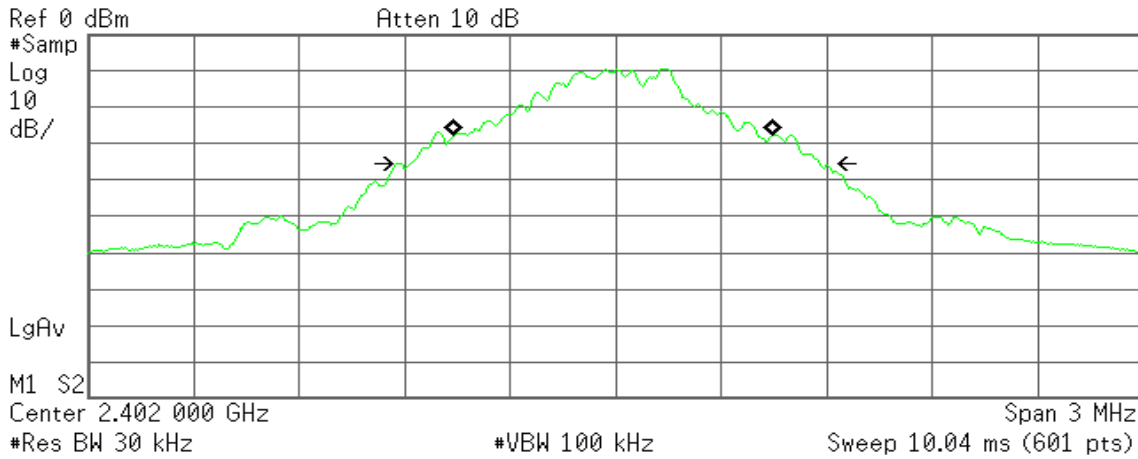

**Occupied Bandwidth**  
**905.5783 kHz**


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** -6.927 kHz  
**x dB Bandwidth** 1.158 MHz\*

**99% Bandwidth (CH Mid)**

Agilent 10:59:03 Dec 18, 2012

R T

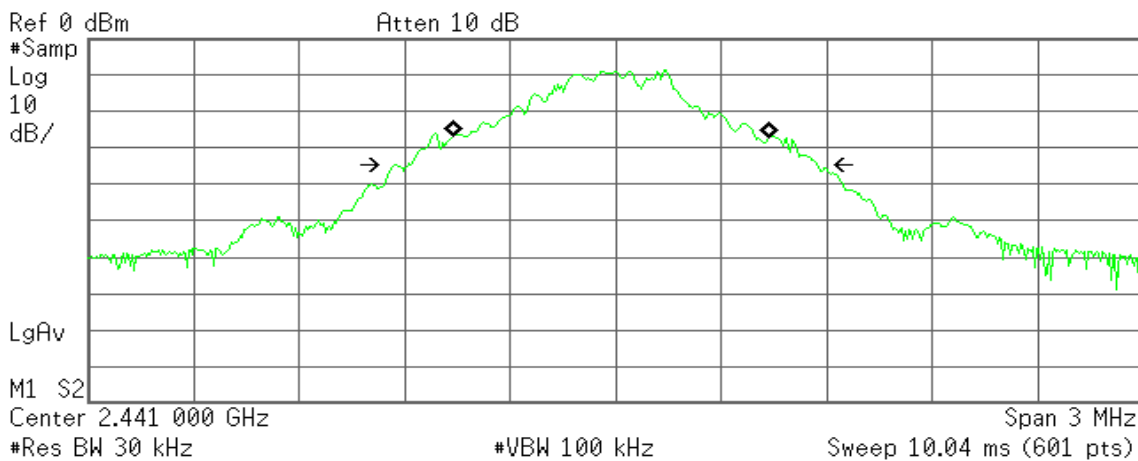

**Occupied Bandwidth**  
**897.3735 kHz**

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** -13.764 kHz  
**x dB Bandwidth** 1.197 MHz\*



### 99% Bandwidth (CH High)

Agilent 10:59:34 Dec 18, 2012

R T

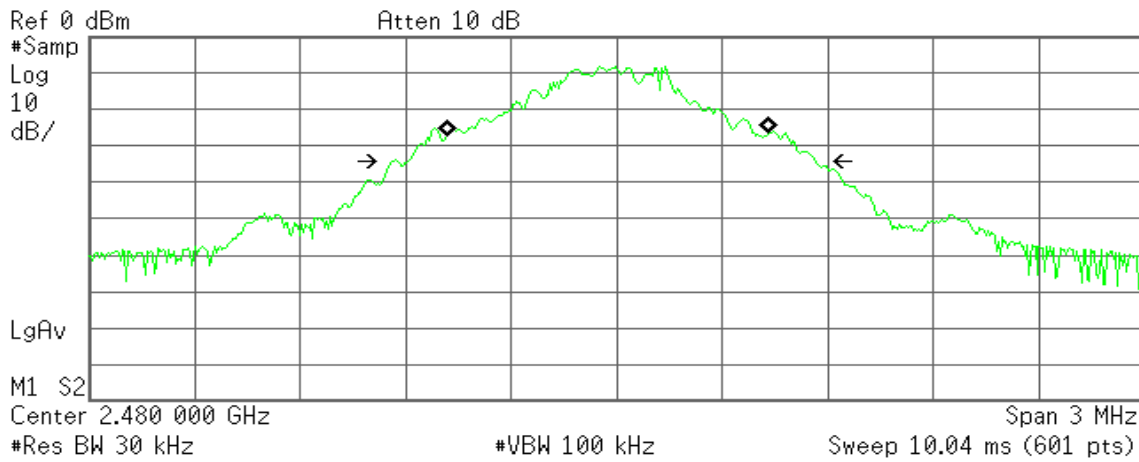

**Occupied Bandwidth**  
910.1734 kHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** -22.790 kHz  
**x dB Bandwidth** 1.197 MHz\*

### For 8DPSK / DH5

### 99% Bandwidth (CH Low)

Agilent 11:00:28 Dec 18, 2012

R T

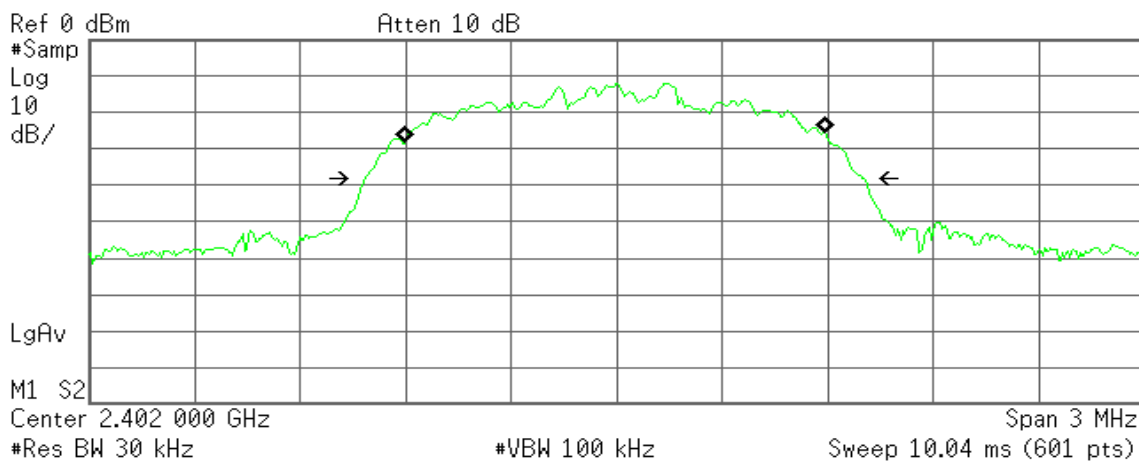

**Occupied Bandwidth**  
1.1894 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** -7.079 kHz  
**x dB Bandwidth** 1.417 MHz\*






### 99% Bandwidth (CH Mid)

Agilent 11:00:52 Dec 18, 2012

R T

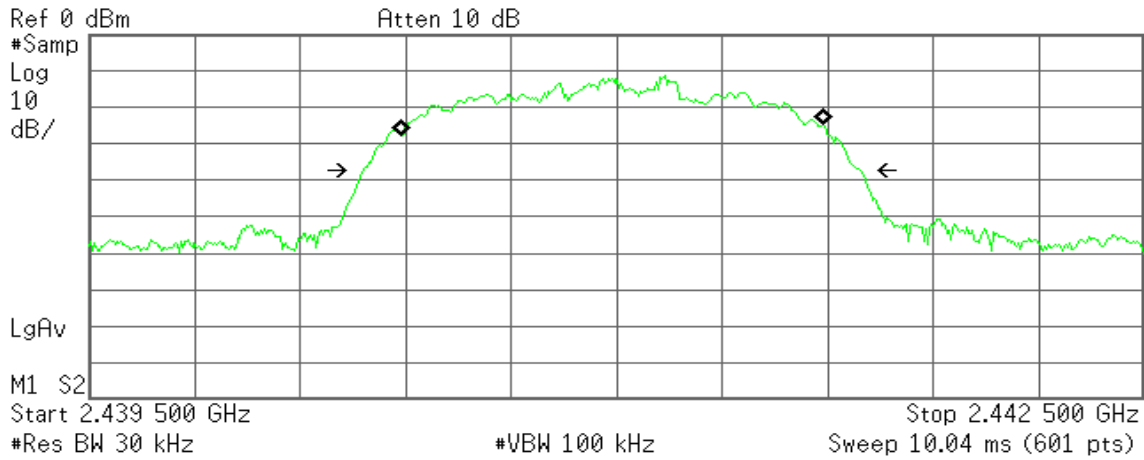

Occupied Bandwidth  
1.1959 MHz


Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error -15.155 kHz  
x dB Bandwidth 1.416 MHz\*

### 99% Bandwidth (CH High)

Agilent 11:01:53 Dec 18, 2012

R T

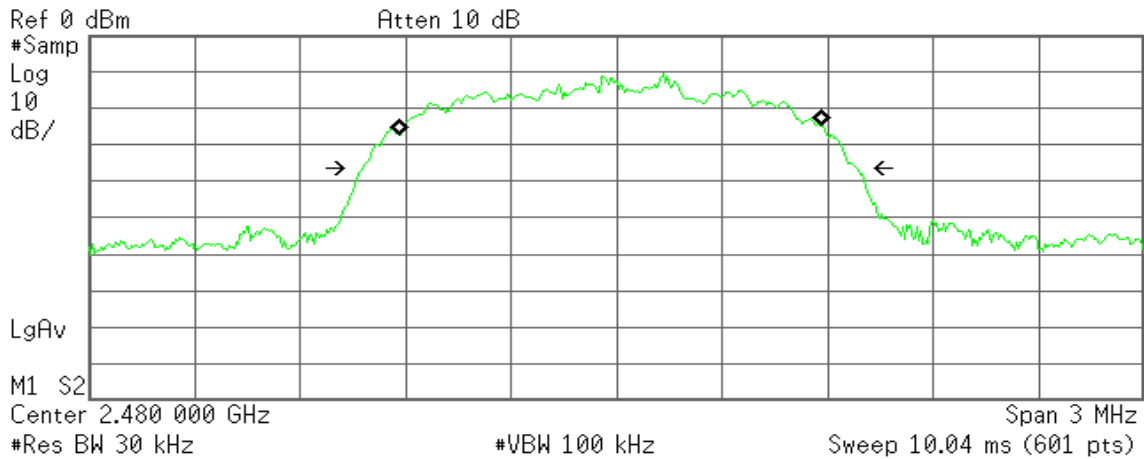

Occupied Bandwidth  
1.1994 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error -21.978 kHz  
x dB Bandwidth 1.412 MHz\*




## 7.2 20 DB BANDWIDTH

### LIMIT

None; for reporting purposes only.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30 kHz, VBW = 100 kHz, Sweep = 3.2 ms.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### TEST RESULTS

*No non-compliance noted.*

#### Test Data

##### **For GFSK / DH5**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.05
Mid	2441	1.05
High	2480	1.04

##### **For 8DPSK / DH5**


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.345
Mid	2441	1.35
High	2480	1.35



**Test Plot**

For GFSK / DH5

20dB Bandwidth (CH Low)

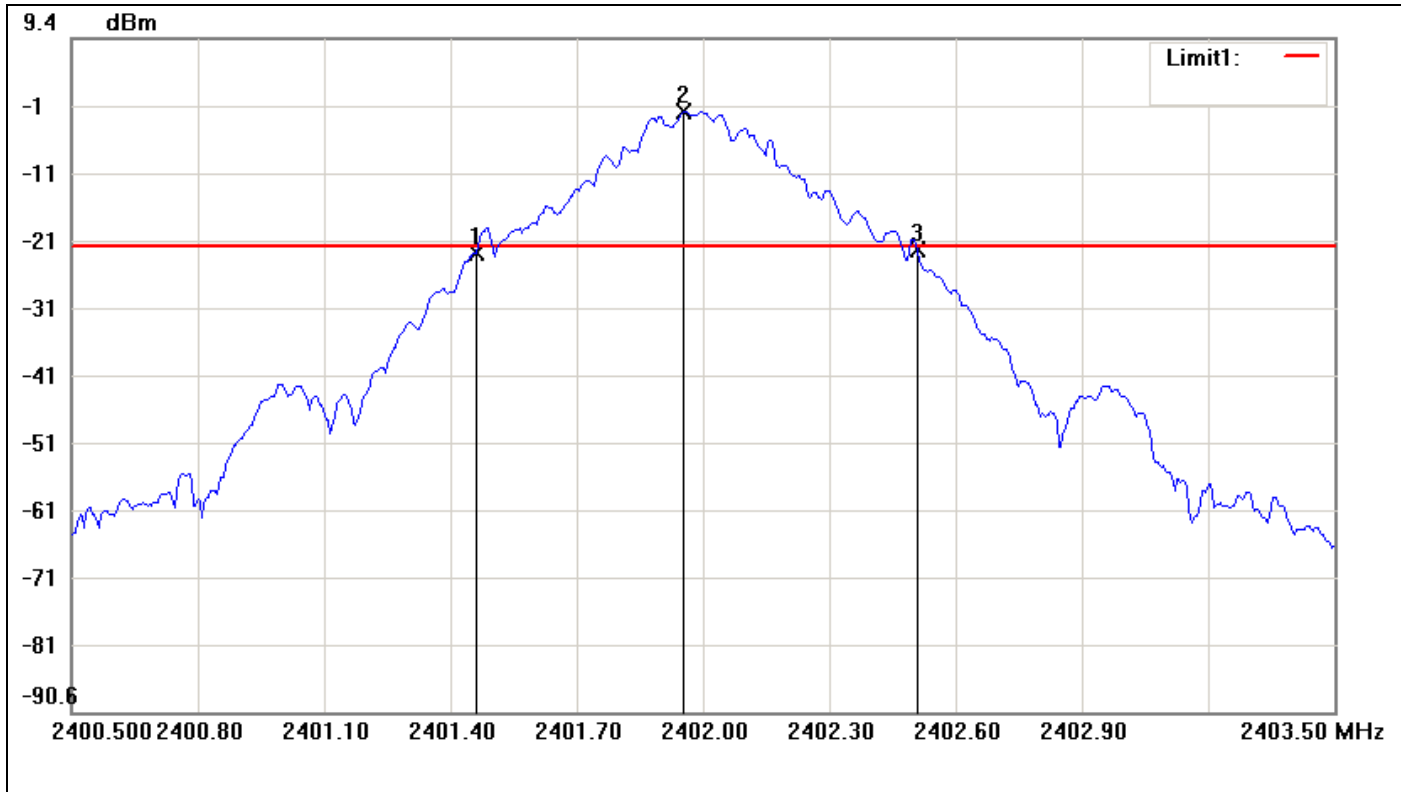


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2401.4600	-22.56	-21.53	-1.03
2	2401.9550	-1.53	-21.53	20.00
3	2402.5100	-21.90	-21.53	-0.37

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.05	0.66



20dB Bandwidth (CH Mid)

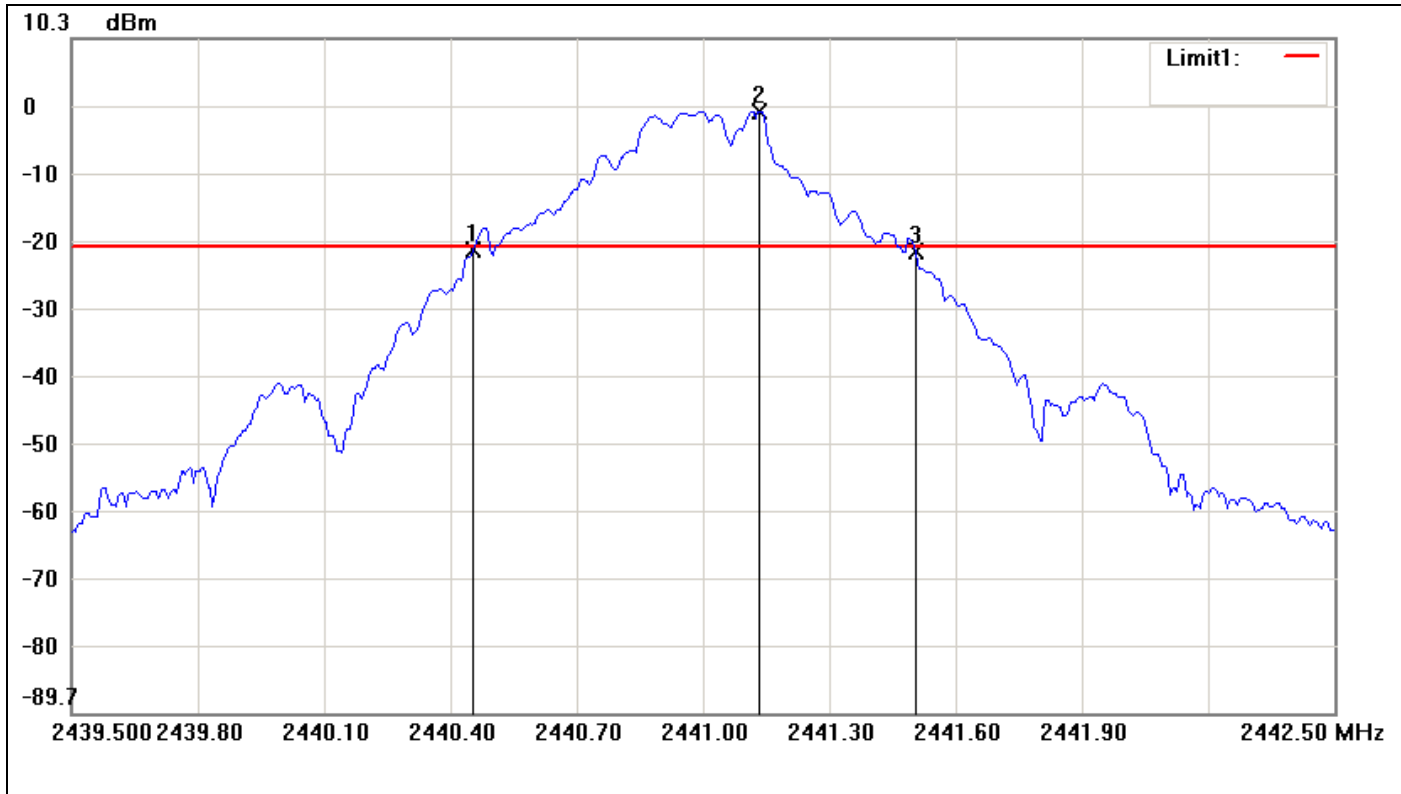


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2440.4550	-21.16	-20.49	-0.67
2	2441.1350	-0.49	-20.49	20.00
3	2441.5050	-21.42	-20.49	-0.93

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.05	-0.26



20dB Bandwidth (CH High)

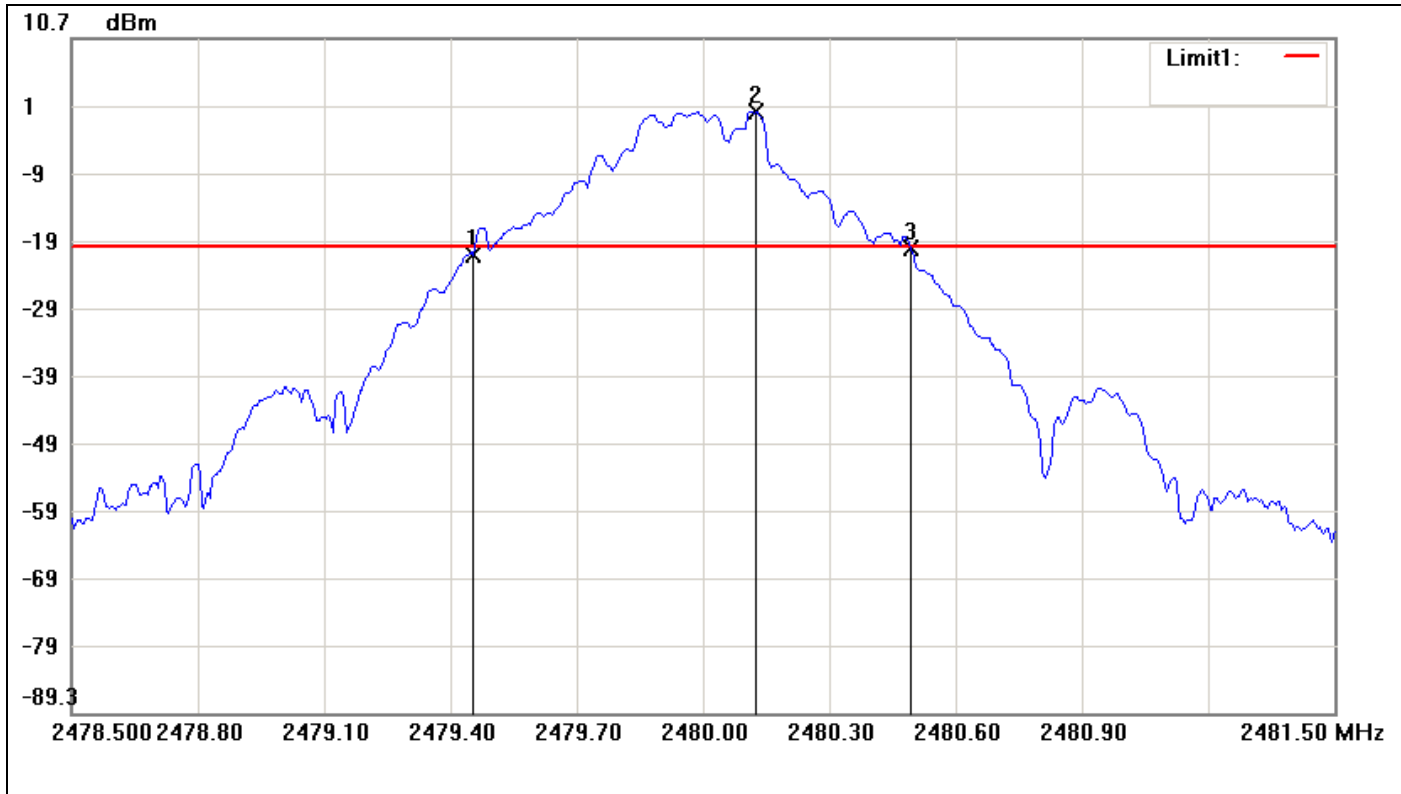


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2479.4550	-21.34	-20.13	-1.21
2	2480.1250	-0.13	-20.13	20.00
3	2480.4950	-20.36	-20.13	-0.23

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.04	0.98



For 8DPSK / DH5

20dB Bandwidth (CH Low)

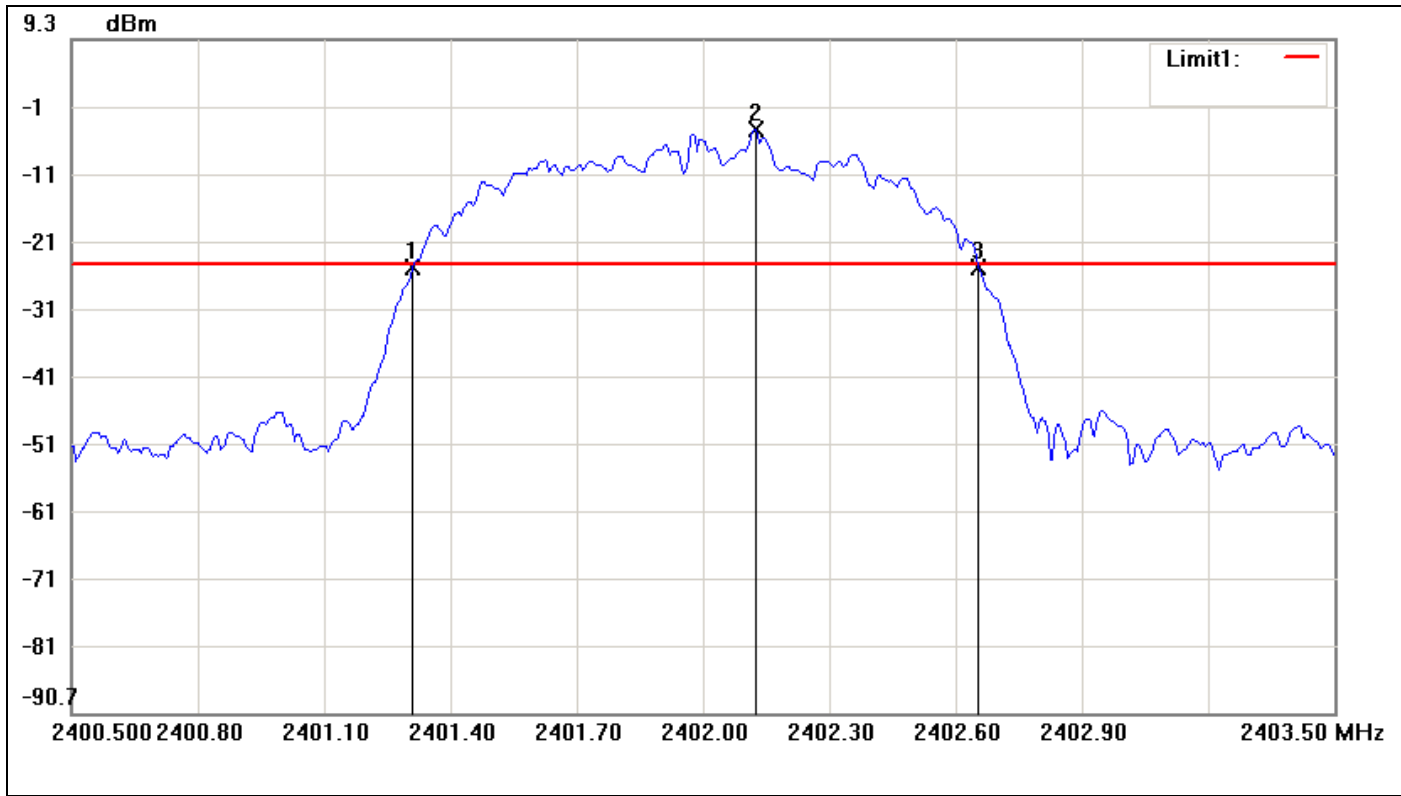


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3100	-24.68	-24.11	-0.57
2	2402.1250	-4.11	-24.11	20.00
3	2402.6550	-24.48	-24.11	-0.37

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.345	0.2



20dB Bandwidth (CH Mid)

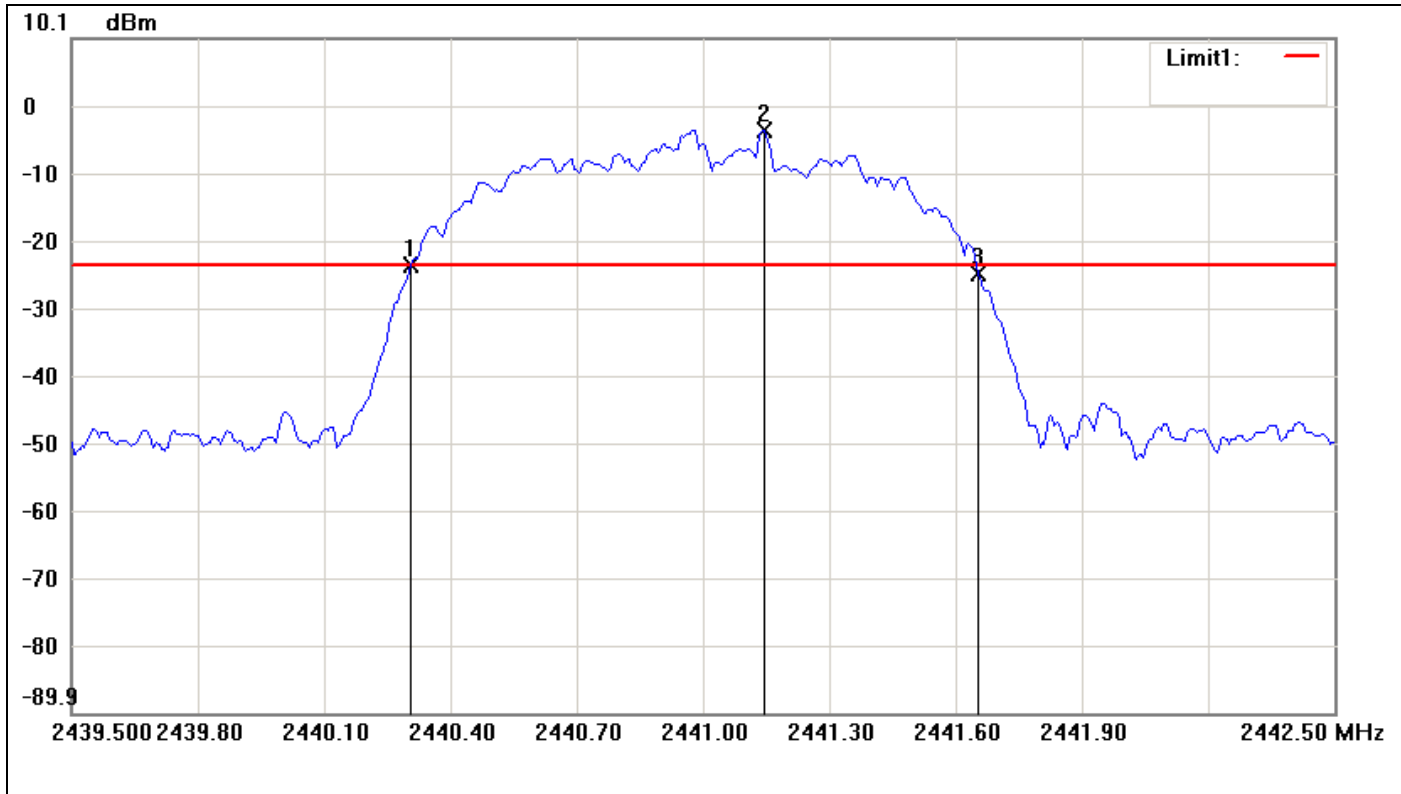


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2440.3050	-23.49	-23.45	-0.04
2	2441.1450	-3.45	-23.45	20.00
3	2441.6550	-24.73	-23.45	-1.28

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.35	-1.24



### 20dB Bandwidth (CH High)

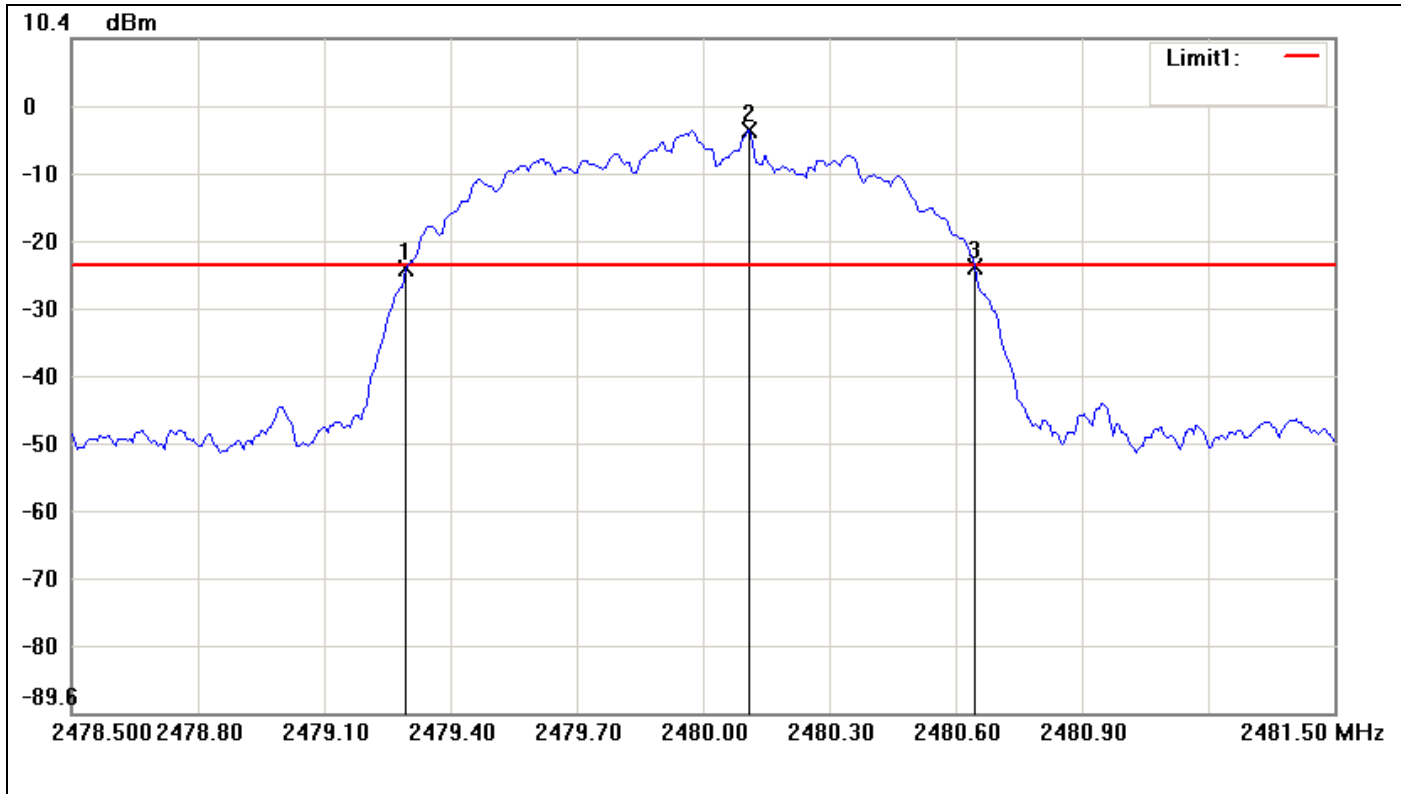

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2479.2950	-23.67	-23.22	-0.45
2	2480.1100	-3.22	-23.22	20.00
3	2480.6450	-23.34	-23.22	-0.12

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.35	0.33






### 7.3 PEAK POWER

#### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1) & RSS-210 §A8.4(2), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

#### Test Configuration

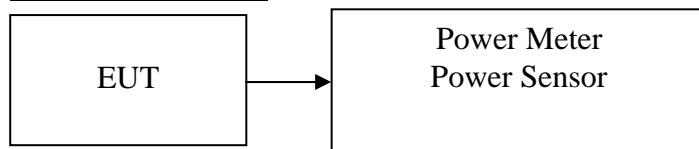

#### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

#### TEST RESULTS

*No non-compliance noted.*

#### Test Data

##### **For GFSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	1.62	0.0015	0.125	PASS
Mid	2441	2.40	0.0017		PASS
High	2480	2.83	0.0019		PASS

##### **For 8DPSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	2.05	0.0016	0.125	PASS
Mid	2441	2.92	0.0020		PASS
High	2480	3.36	0.0022		PASS



## **7.4 BAND EDGES MEASUREMENT**

### **LIMIT**


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.




**Test Configuration**

**For Radiated**

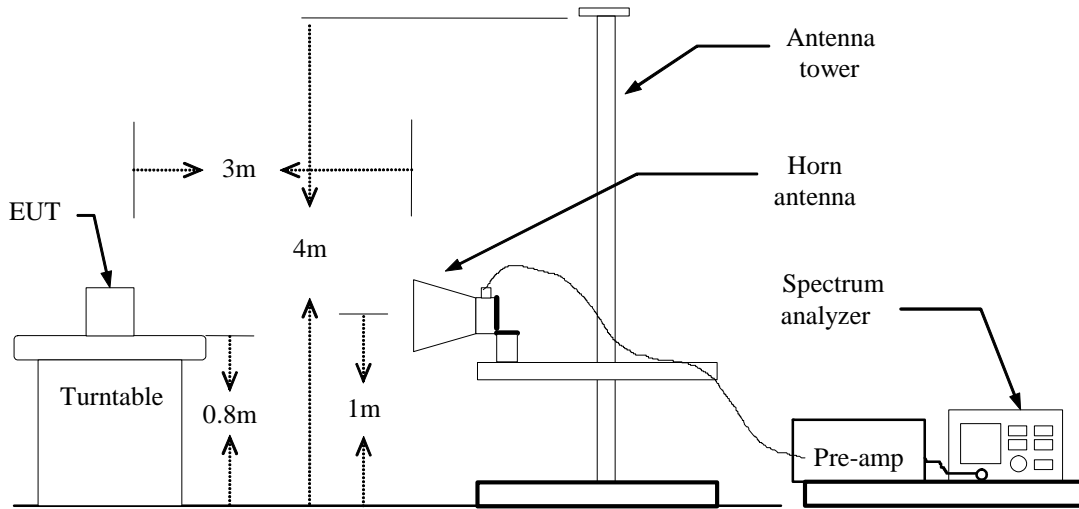

**For Conducted**





## **TEST PROCEDURE**

### **For Radiated**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### **For Conducted**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 300 kHz. The video bandwidth is set to 300 kHz.

## **TEST RESULTS**

Refer to attach spectrum analyzer data chart.



**For GFSK / DH5**

**Band Edges (CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 18:02:45 Dec 19, 2012

R T

Mkr1 2.310 27 GHz  
48.03 dB $\mu$ V/m

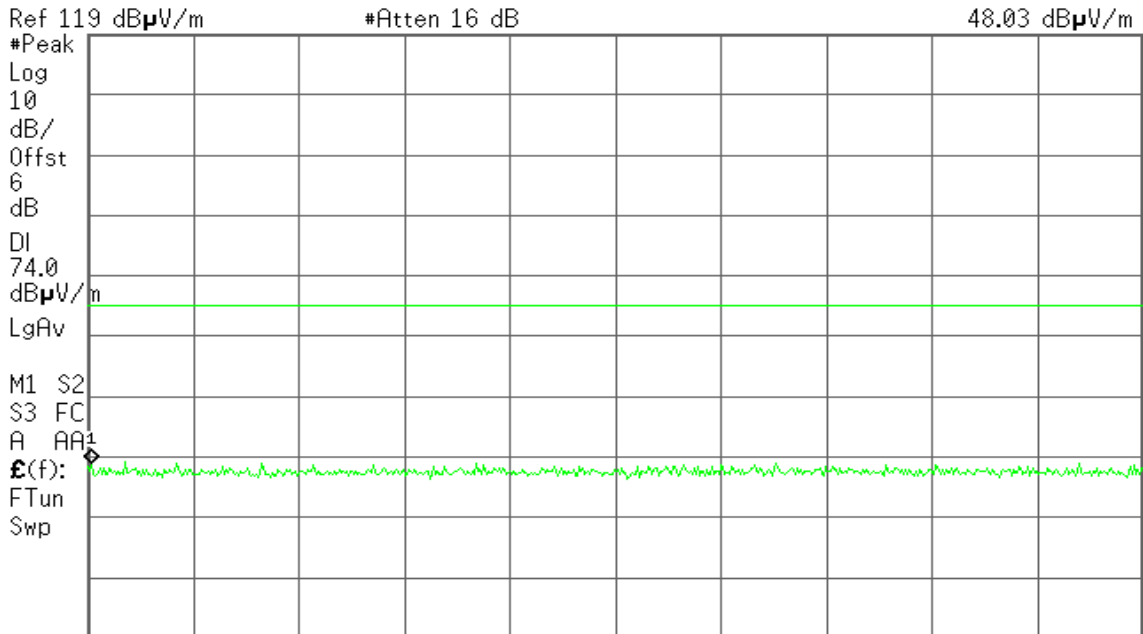

Start 2.310 00 GHz #Res BW 1 MHz #VBW 3 MHz Stop 2.390 00 GHz #Sweep 100 ms (601 pts)


**Detector mode: Average**

**Polarity: Vertical**

Agilent 18:03:18 Dec 19, 2012

R T

Mkr1 2.378 53 GHz  
33.88 dB $\mu$ V/m

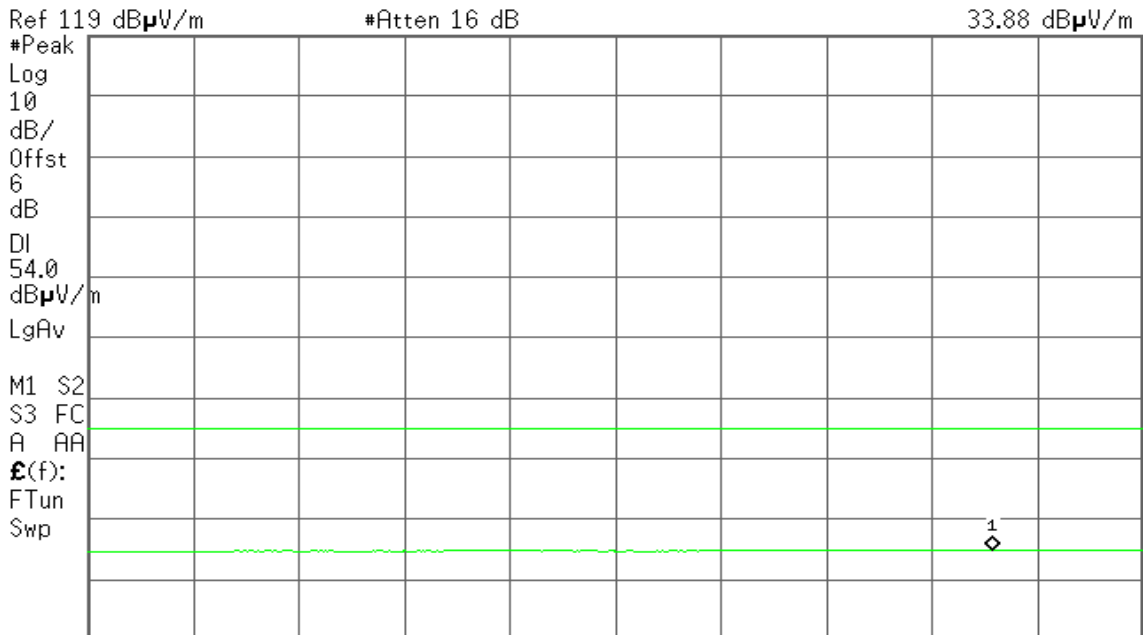

Start 2.310 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.390 00 GHz Sweep 6.238 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 17:55:19 Dec 19, 2012

R T

Mkr1 2.376 93 GHz  
48.64 dBµV/m

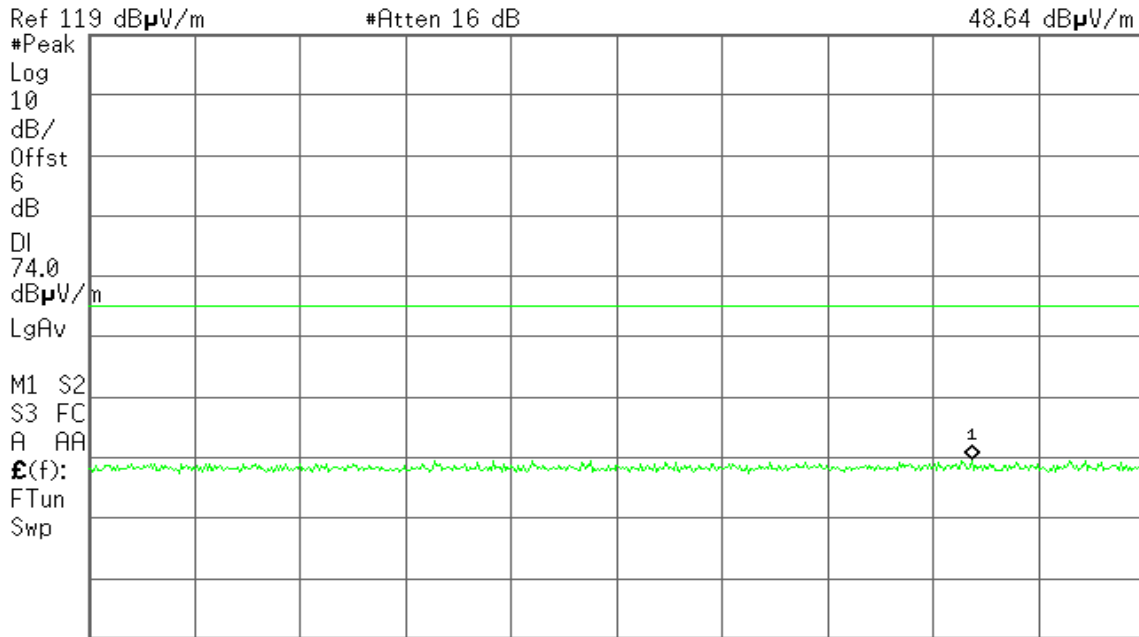

Start 2.310 00 GHz Stop 2.390 00 GHz  
#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 17:56:13 Dec 19, 2012

R T

Mkr1 2.378 00 GHz  
33.95 dBµV/m

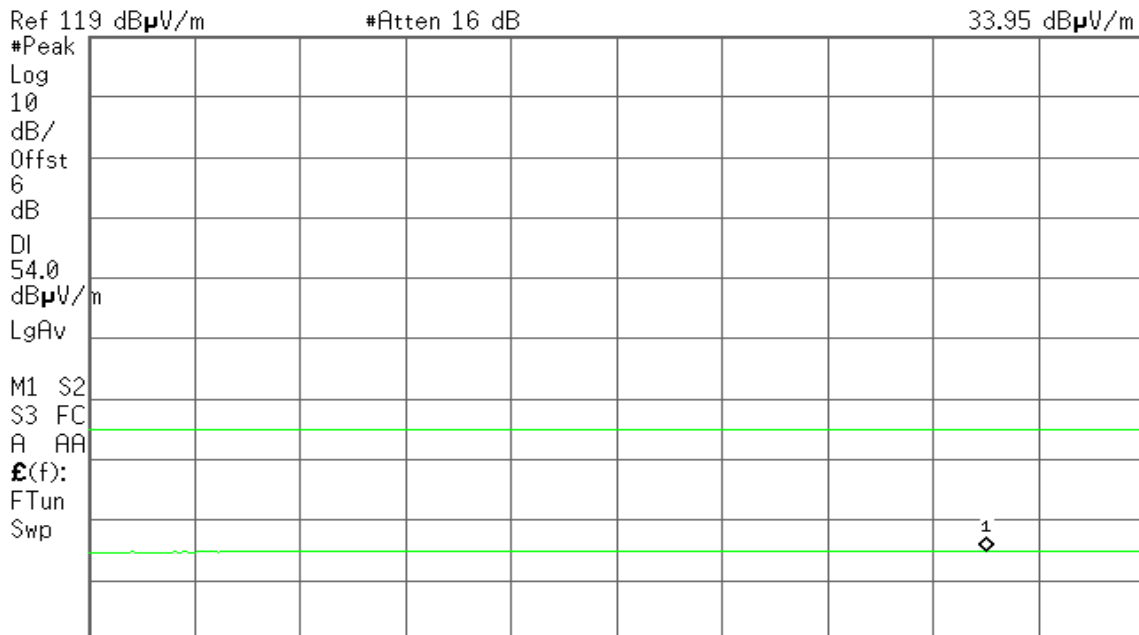

Start 2.310 00 GHz Stop 2.390 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 6.238 s (601 pts)



Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 18:16:53 Dec 19, 2012


R T

Mkr1 2.483 86 GHz

50.00 dBµV/m

Ref 119 dBµV/m

#Atten 16 dB

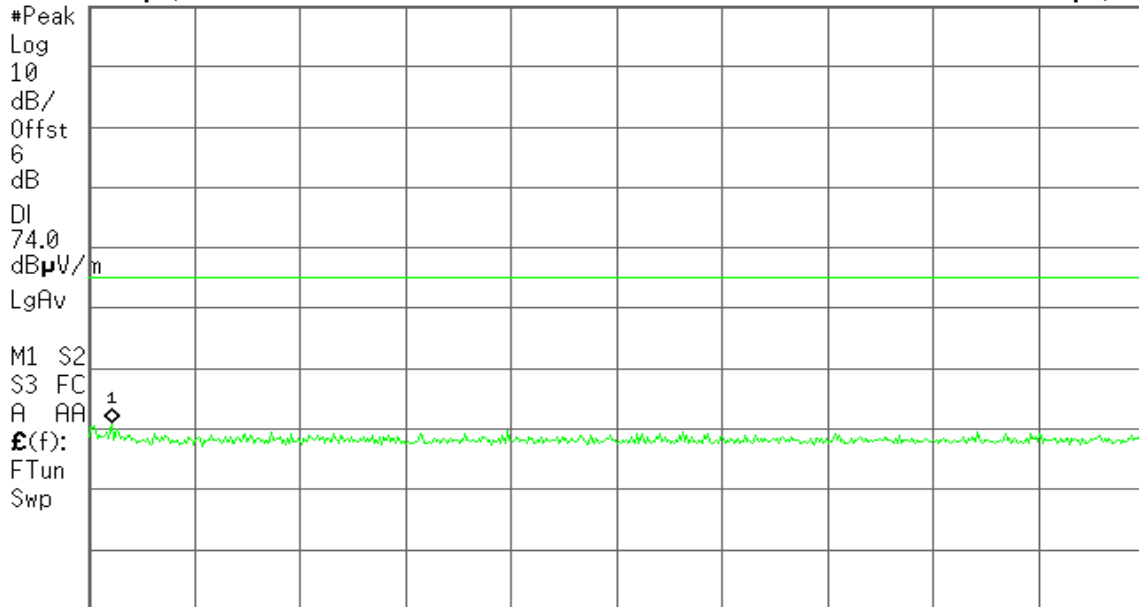

Start 2.483 50 GHz

#Res BW 1 MHz

#VBW 3 MHz

Stop 2.500 00 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 18:17:15 Dec 19, 2012


R T

Mkr1 2.483 61 GHz

34.01 dBµV/m

Ref 119 dBµV/m

#Atten 16 dB

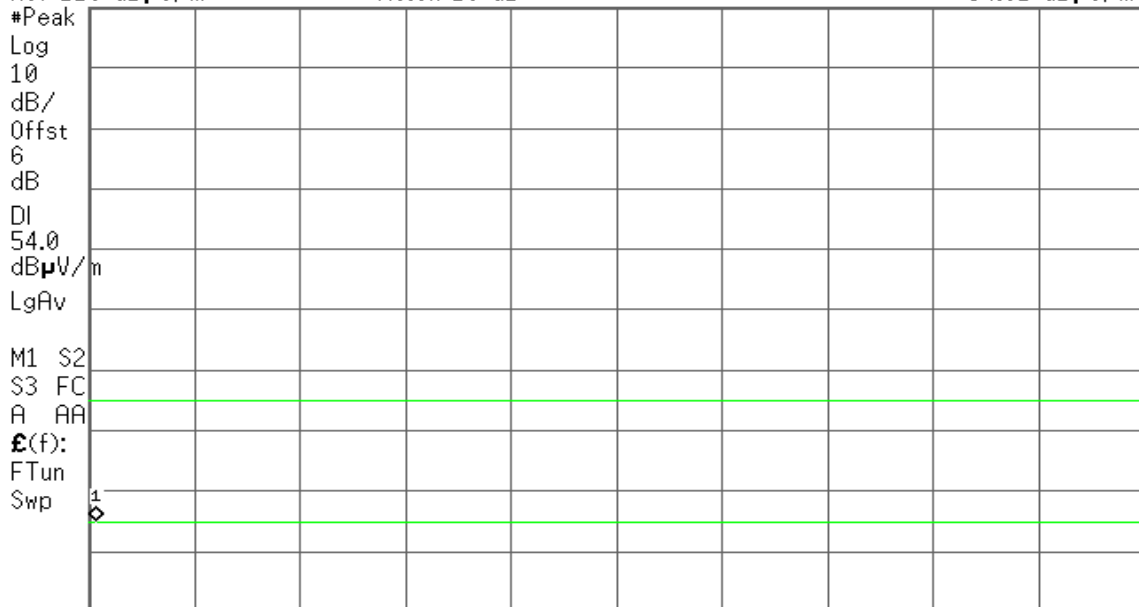

Start 2.483 50 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.287 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 18:12:40 Dec 19, 2012

R T

Mkr1 2.483 61 GHz  
54.99 dBµV/m

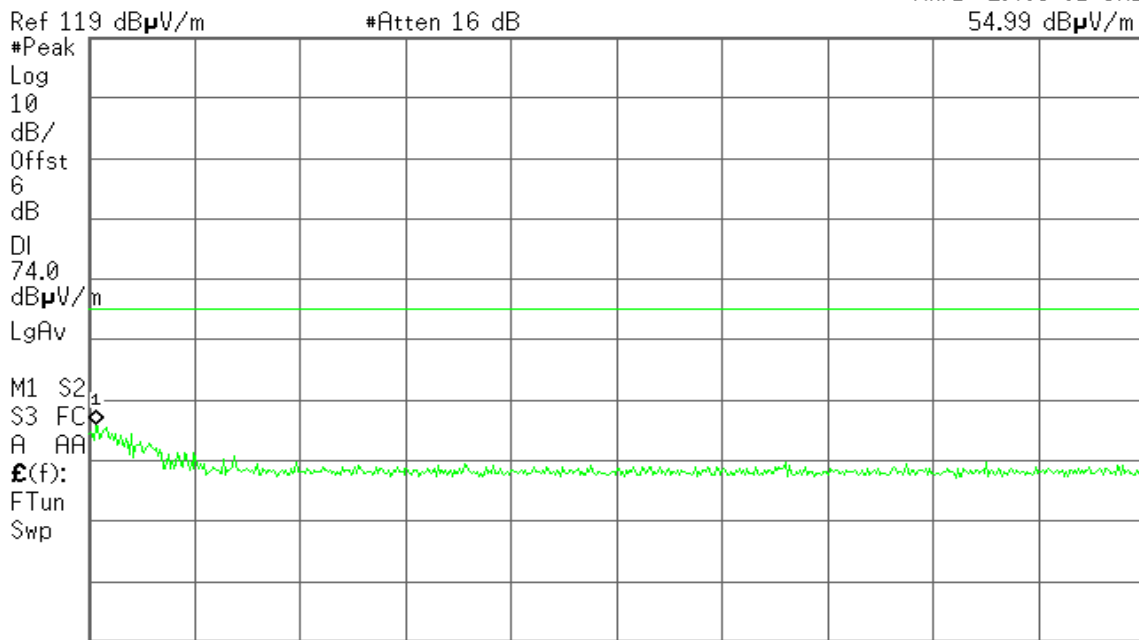

Start 2.483 50 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 18:13:03 Dec 19, 2012

R T

Mkr1 2.483 64 GHz  
34.21 dBµV/m

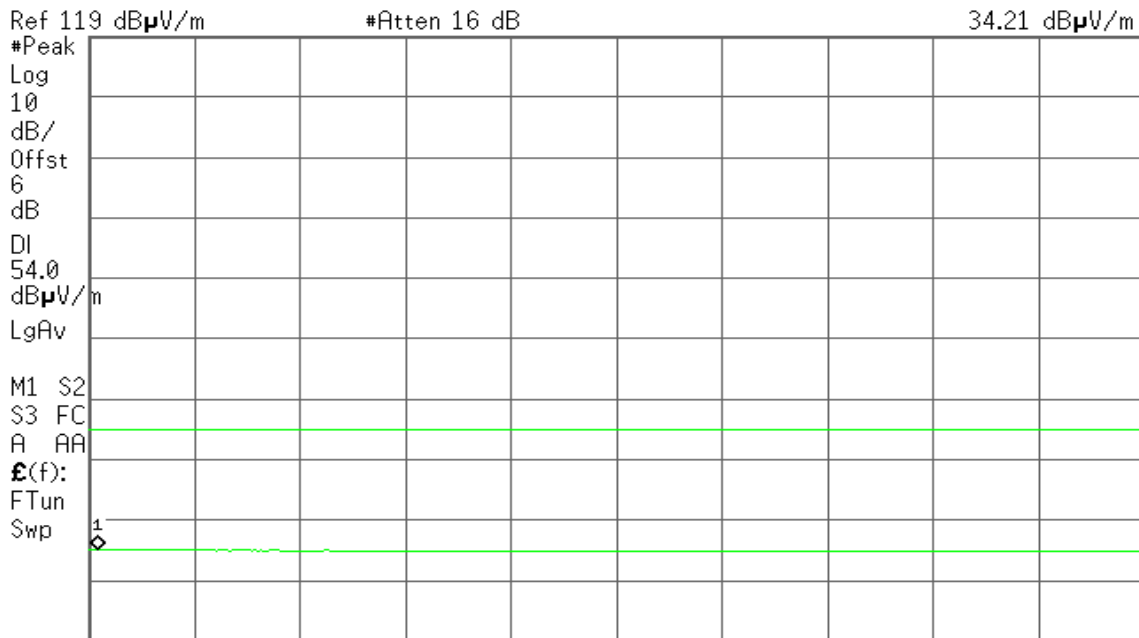

Start 2.483 50 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 1.287 s (601 pts)





For 8DPSK / DH5

Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical


Agilent 18:54:04 Dec 19, 2012

R T

Mkr1 2.315 47 GHz  
48.11 dBµV/m

Ref 119 dBµV/m

#Atten 16 dB

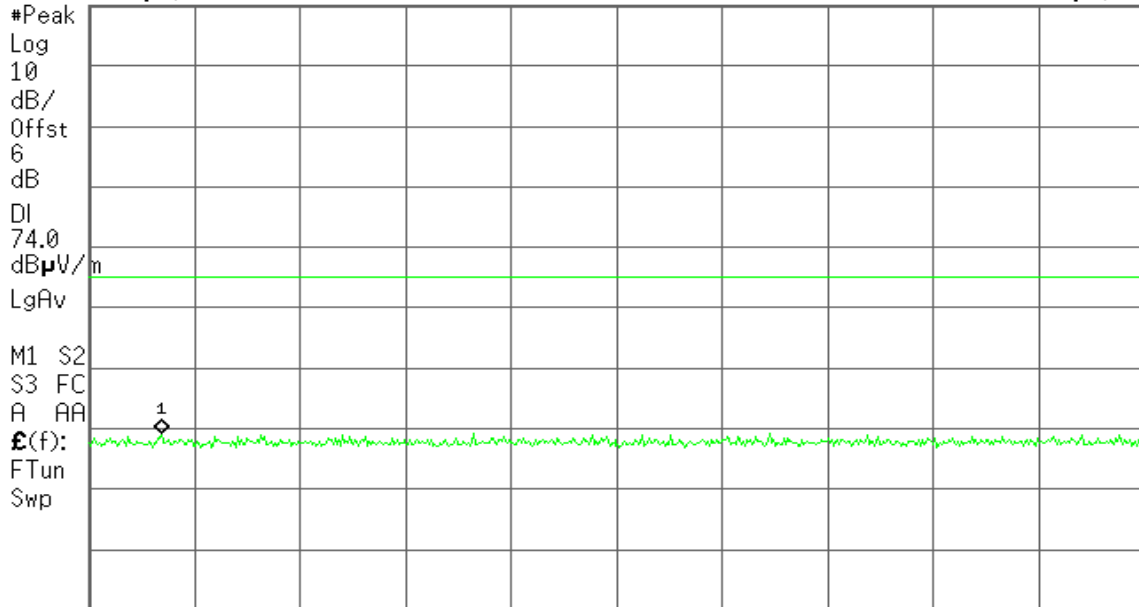

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent 18:54:37 Dec 19, 2012

R T

Mkr1 2.376 00 GHz  
33.71 dBµV/m

Ref 119 dBµV/m

#Atten 16 dB

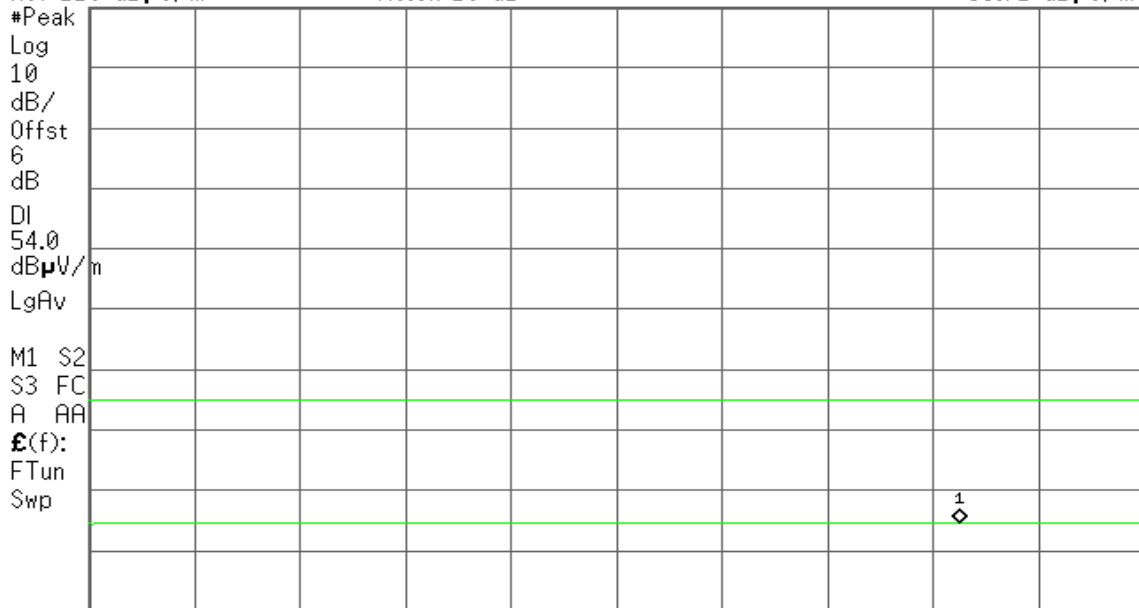

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 6.238 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:05:07 Dec 19, 2012

R T

Mkr1 2.370 67 GHz  
47.53 dBµV/m

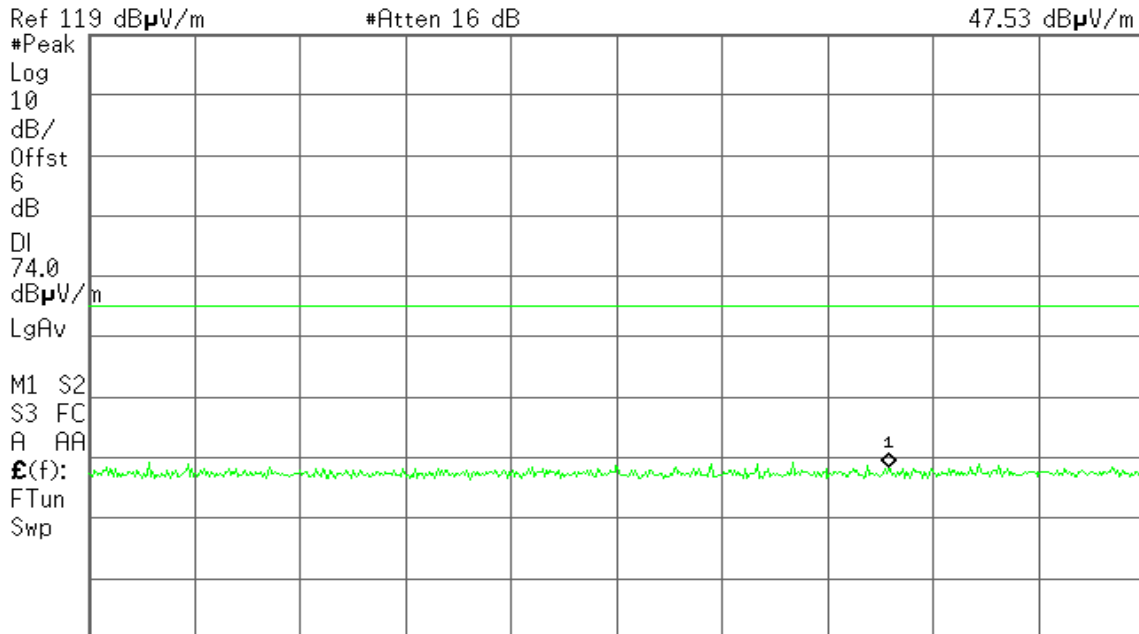

Start 2.310 00 GHz Stop 2.390 00 GHz  
#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 19:05:37 Dec 19, 2012

R T

Mkr1 2.380 00 GHz  
33.69 dBµV/m

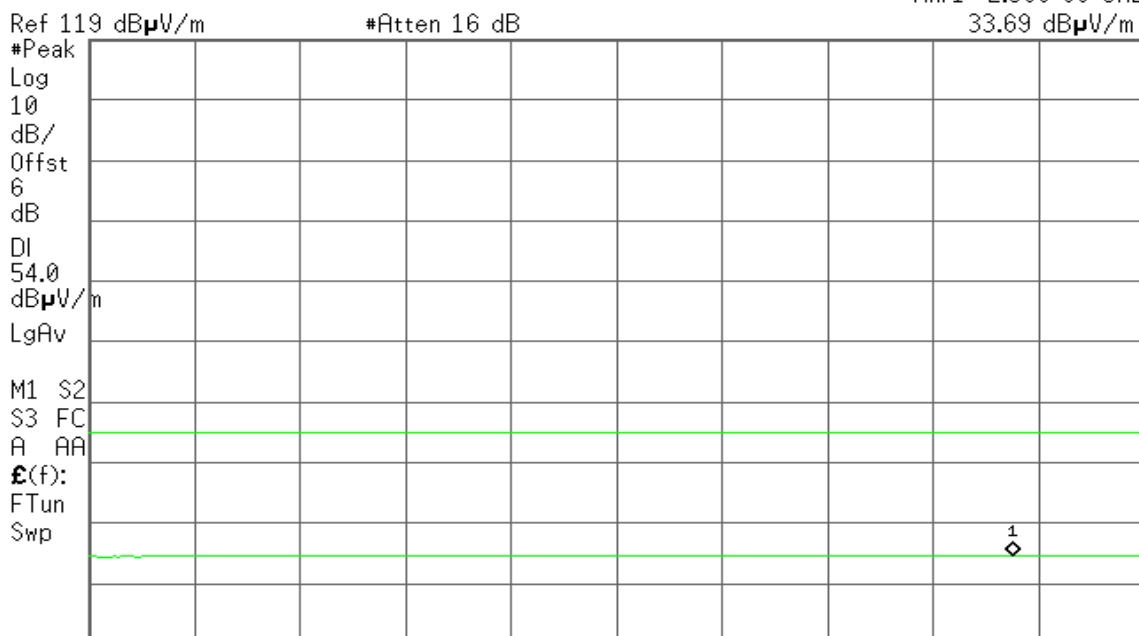

Start 2.310 00 GHz Stop 2.390 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 6.238 s (601 pts)



### Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 18:21:42 Dec 19, 2012


R T

Mkr1 2.493 87 GHz

48.00 dB $\mu$ V/m

Ref 119 dB $\mu$ V/m

#Atten 16 dB

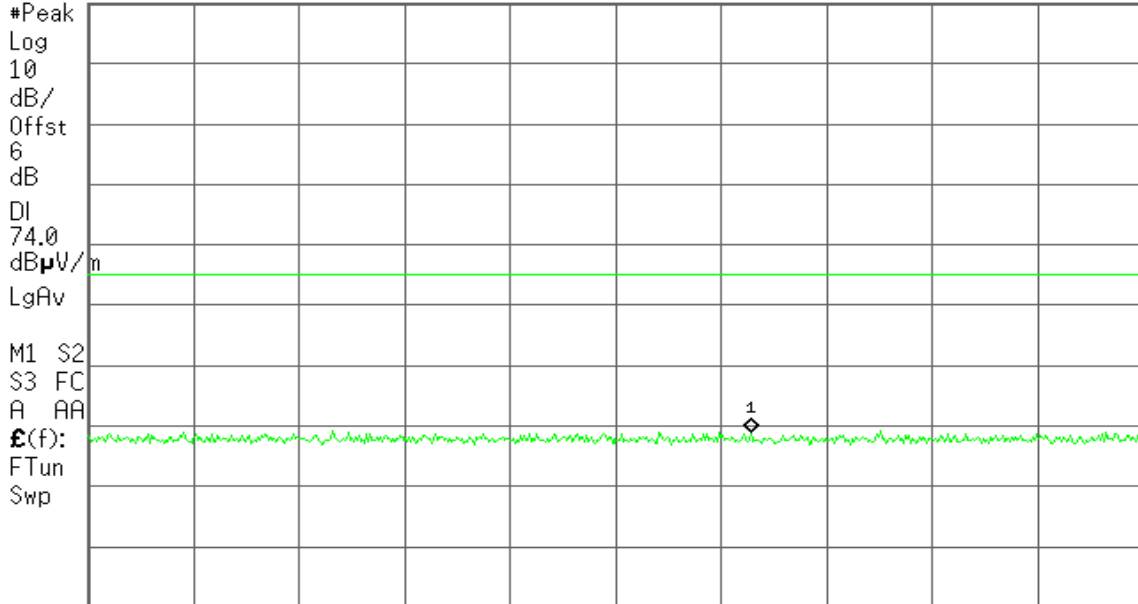

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 18:22:10 Dec 19, 2012

R T

Mkr1 2.483 50 GHz

33.96 dB $\mu$ V/m

Ref 119 dB $\mu$ V/m

#Atten 16 dB



Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 1.287 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 18:43:25 Dec 19, 2012

R T

Mkr1 2.489 06 GHz  
48.39 dBµV/m

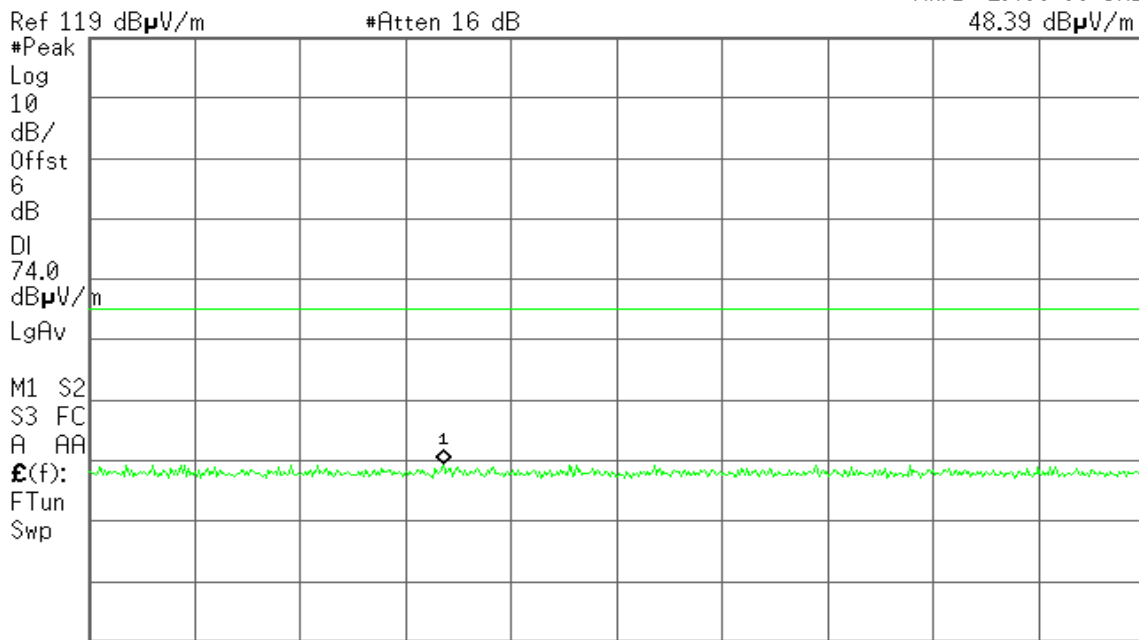

Start 2.483 50 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 18:43:56 Dec 19, 2012

R T

Mkr1 2.484 19 GHz  
33.87 dBµV/m

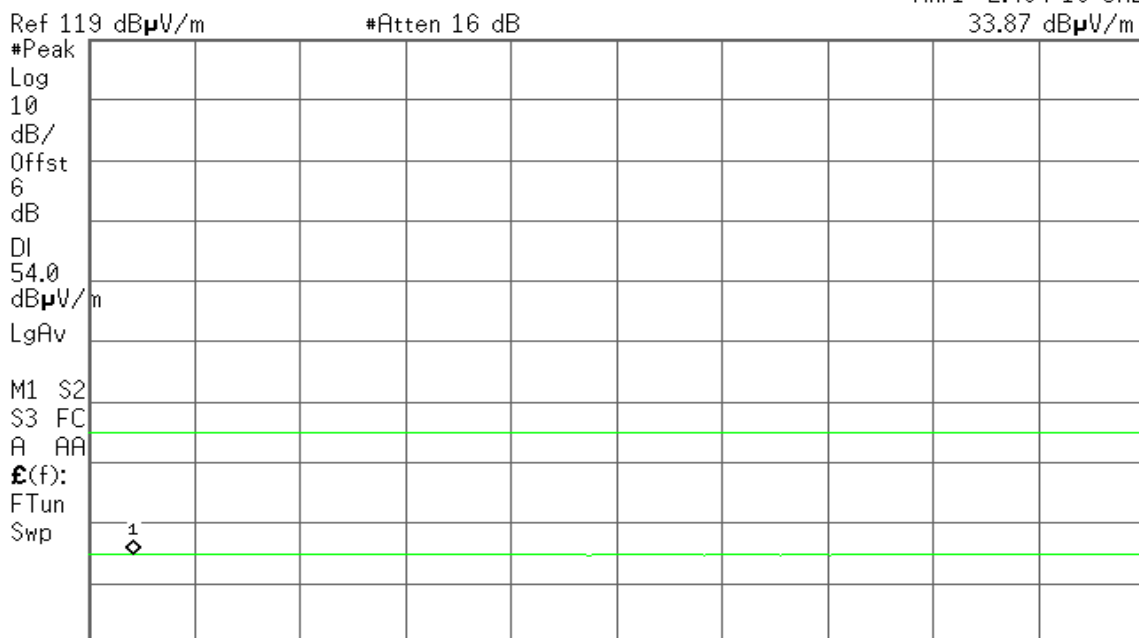


Start 2.483 50 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 1.287 s (601 pts)



GFSK


Band Edges (CH Low)

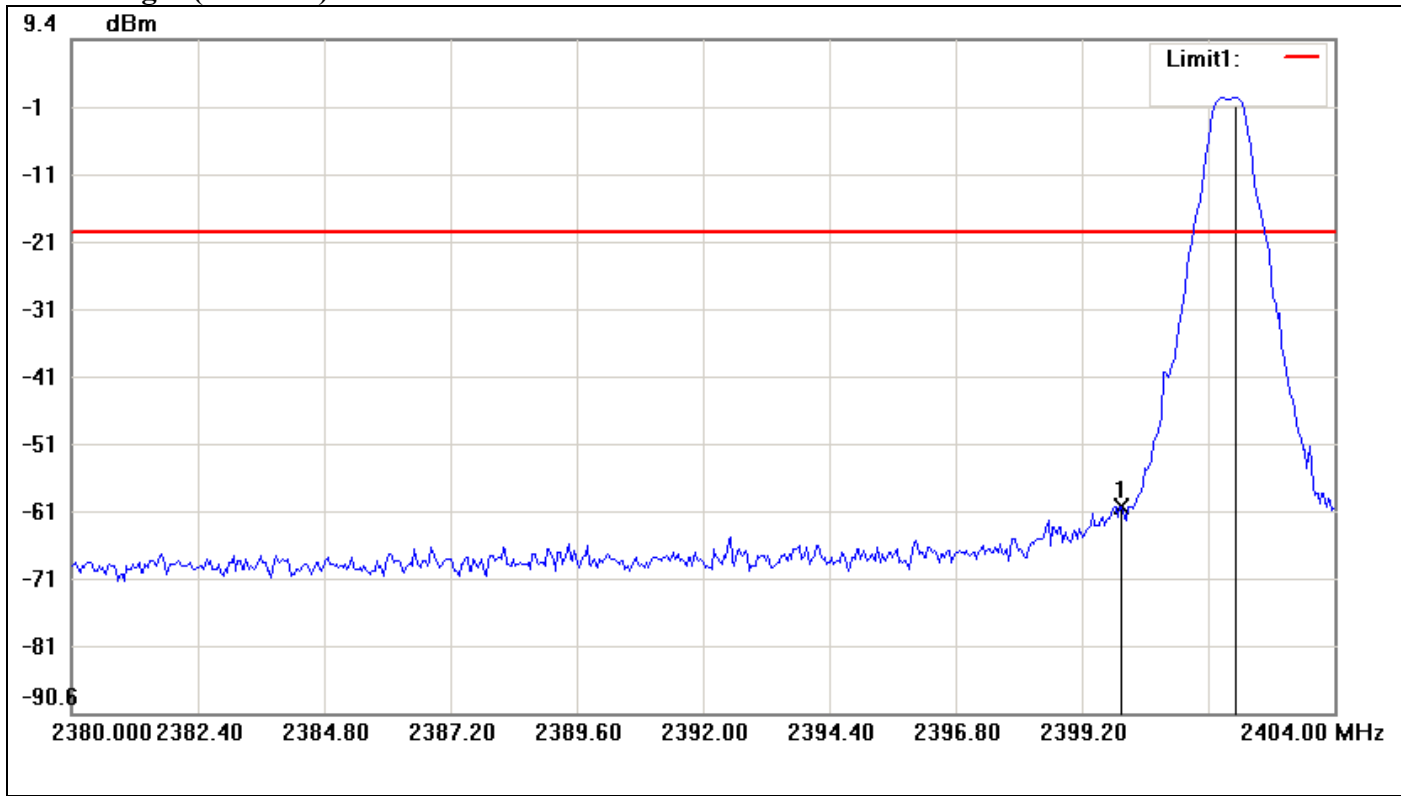

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2399.9600	-60.02	-19.14	-40.88
2	2402.1200	0.86	-19.14	20.00




### Band Edges (CH High)

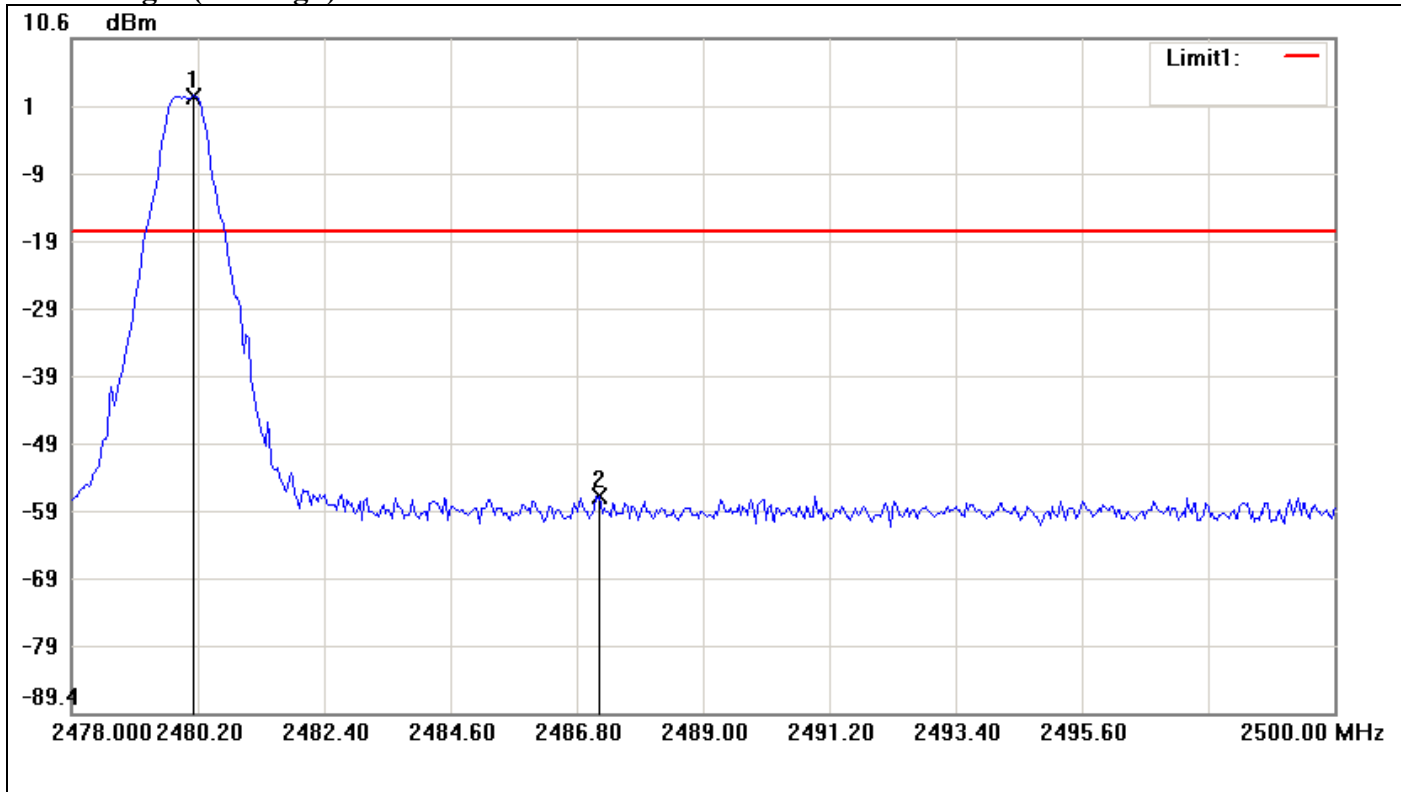

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2480.1267	2.10	-17.90	20.00
2	2487.2033	-57.33	-17.90	-39.43




**Hopping Mode  
(CH Low)**

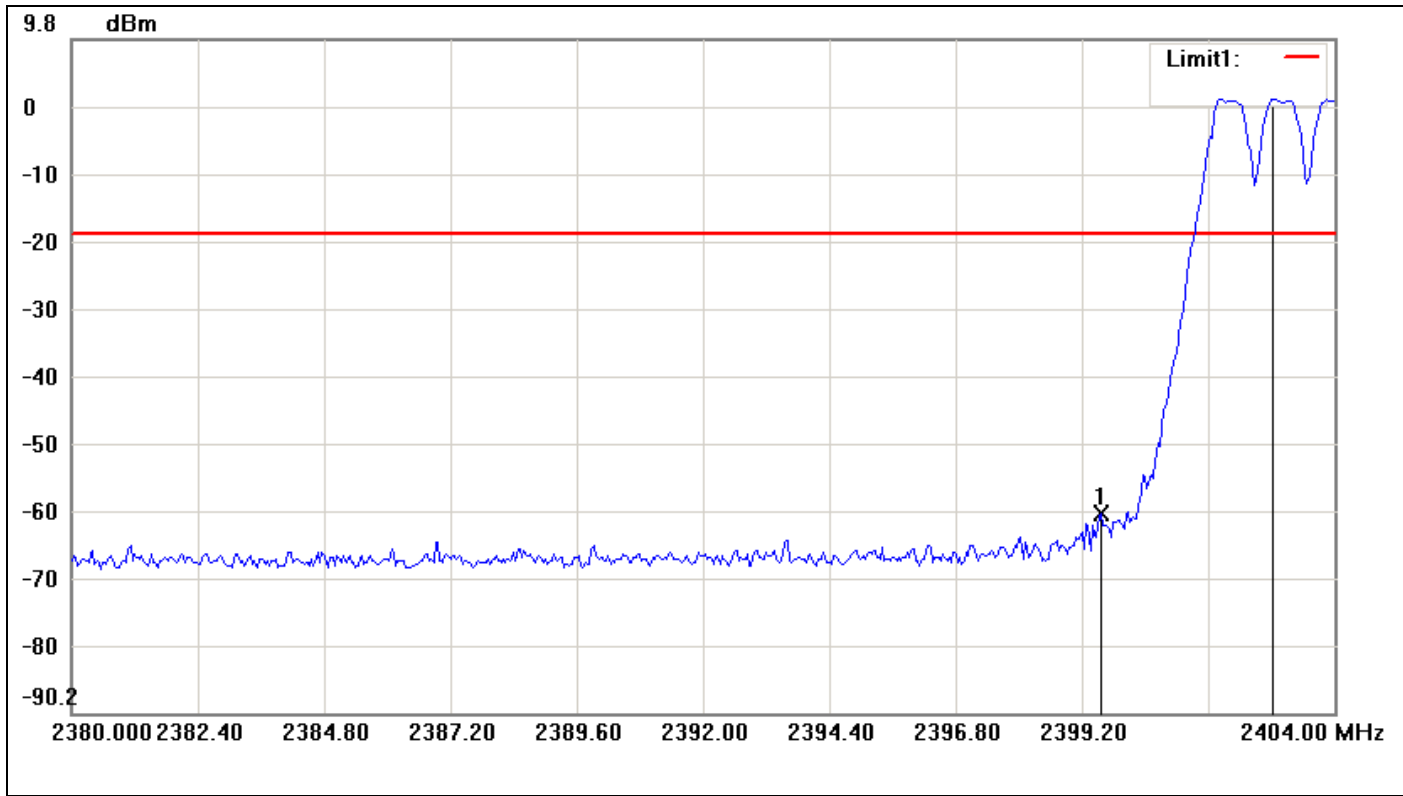

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2399.5600	-60.53	-19.11	-41.42
2	2402.8400	0.89	-19.11	20.00



(CH High)

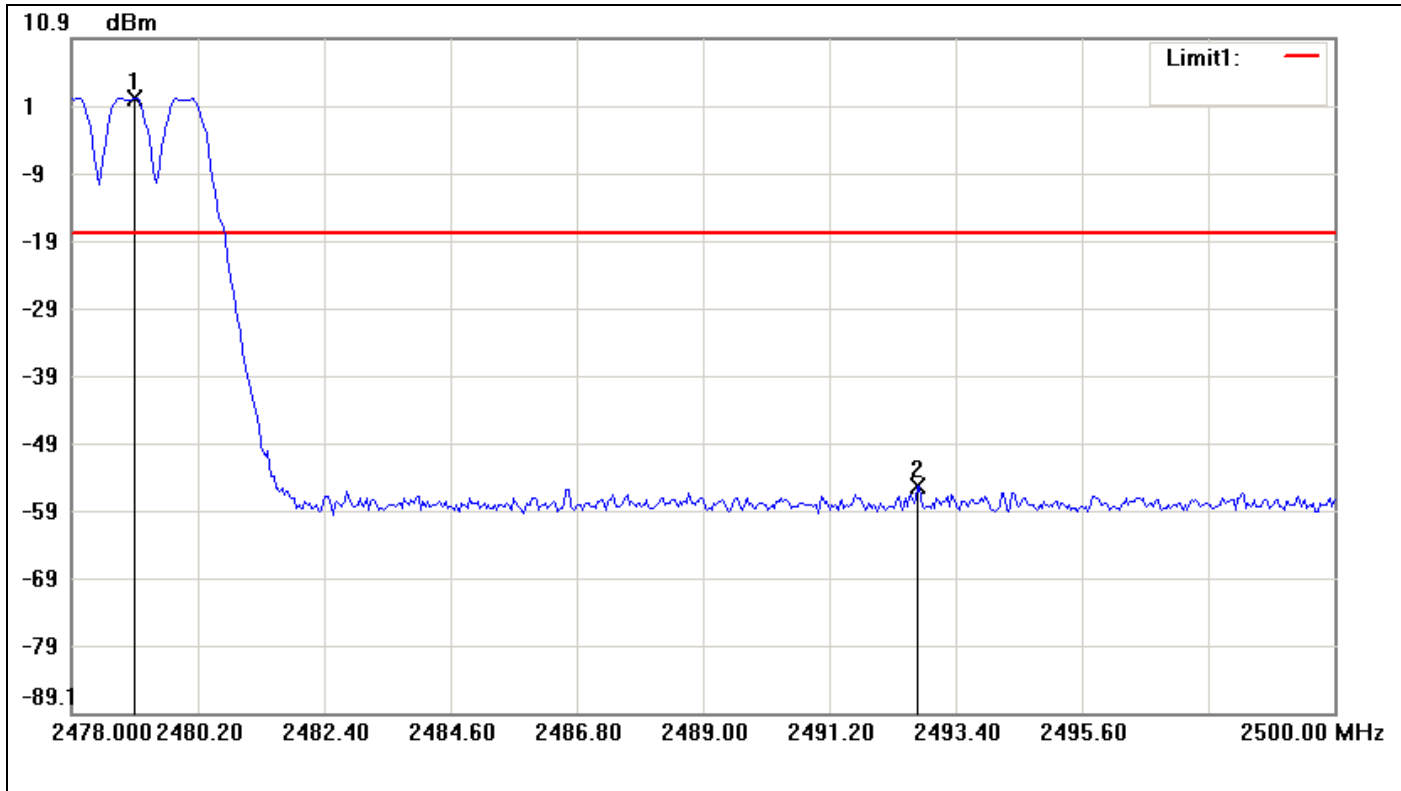


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2479.1000	2.13	-17.87	20.00
2	2492.7400	-55.52	-17.87	-37.65





### 8DPSK


#### Band Edges (CH Low)

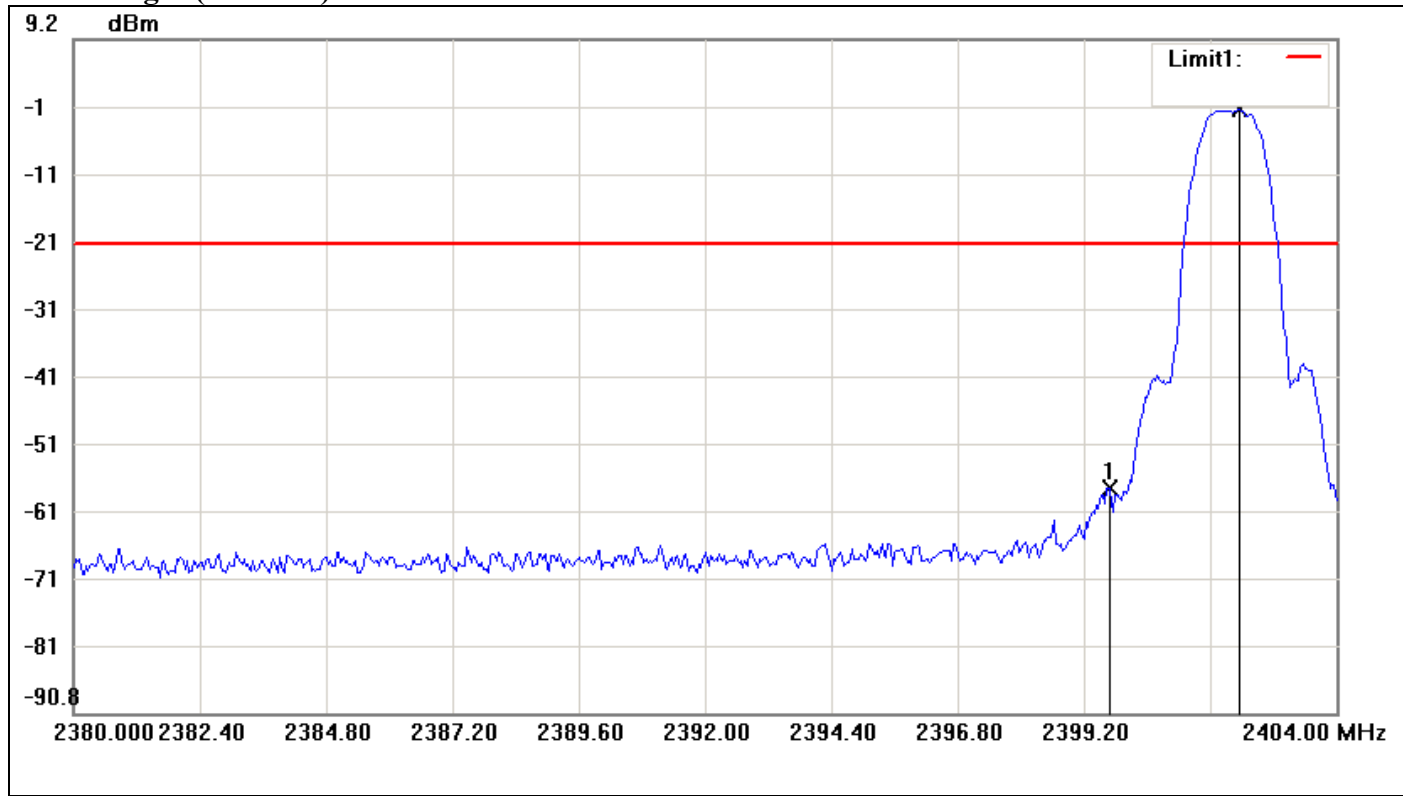

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2399.6800	-57.41	-21.32	-36.09
2	2402.1600	-1.32	-21.32	20.00




### Band Edges (CH High)

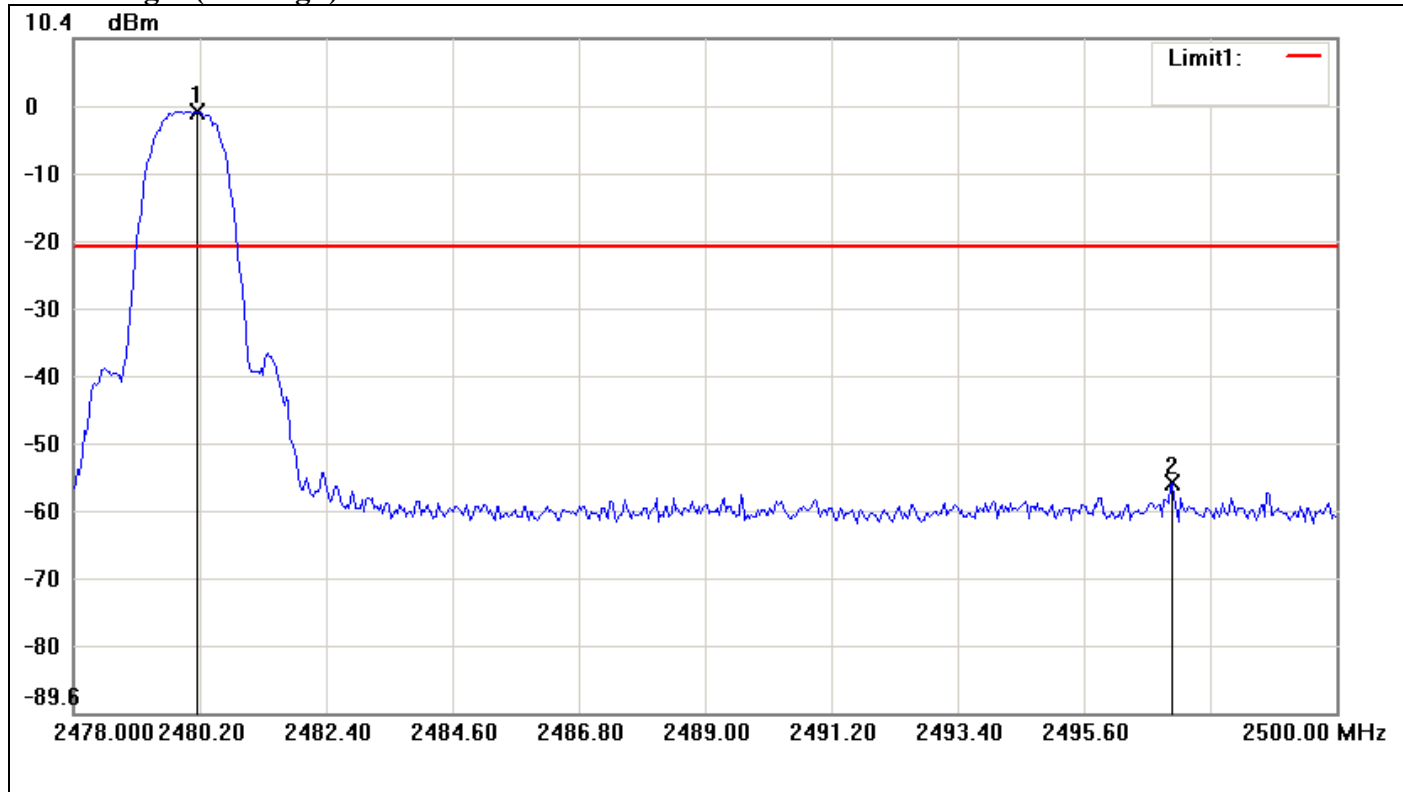

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2480.1633	-0.32	-20.32	20.00
2	2497.1400	-55.33	-20.32	-35.01




**Hopping Mode  
(CH Low)**

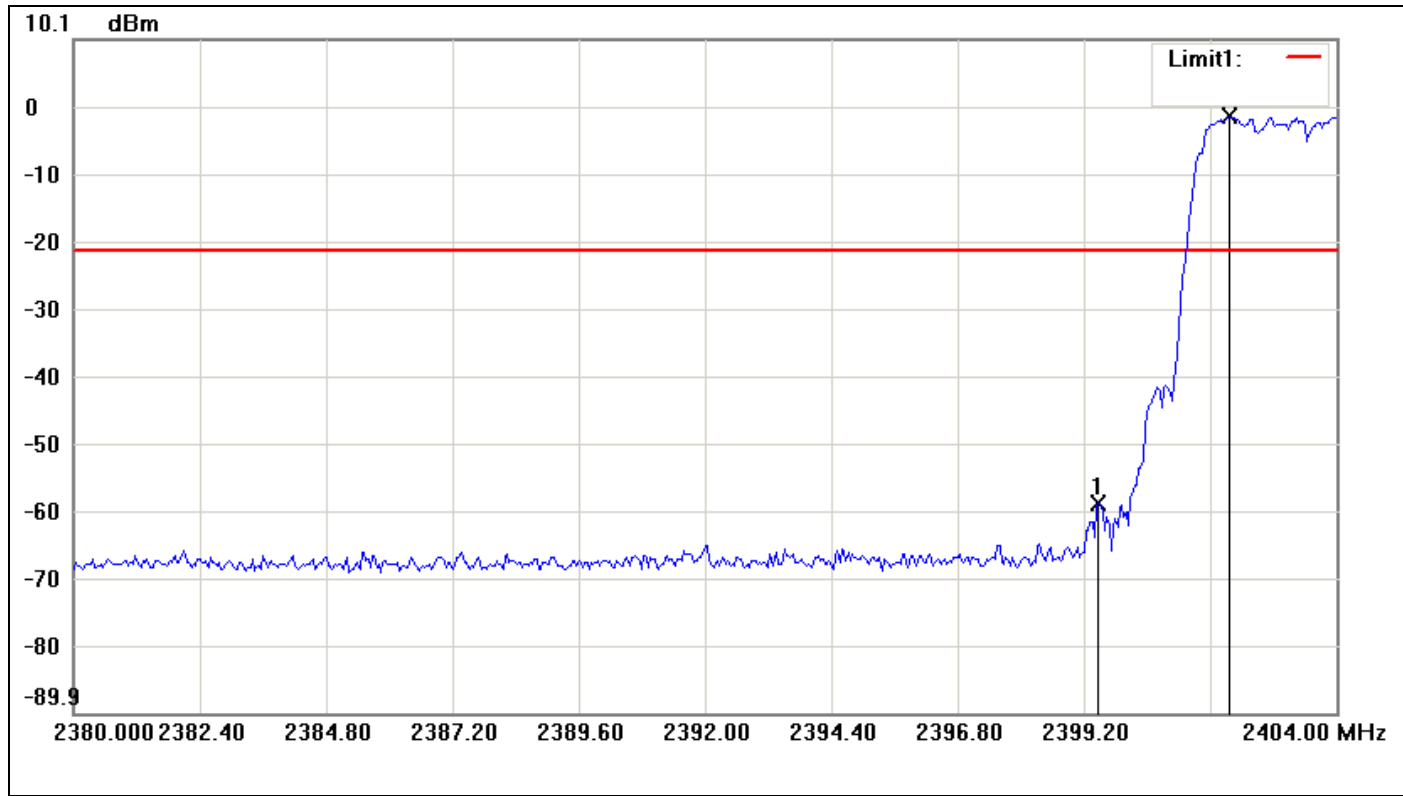

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2399.4800	-58.75	-21.41	-37.34
2	2401.9600	-1.41	-21.41	20.00



(CH High)

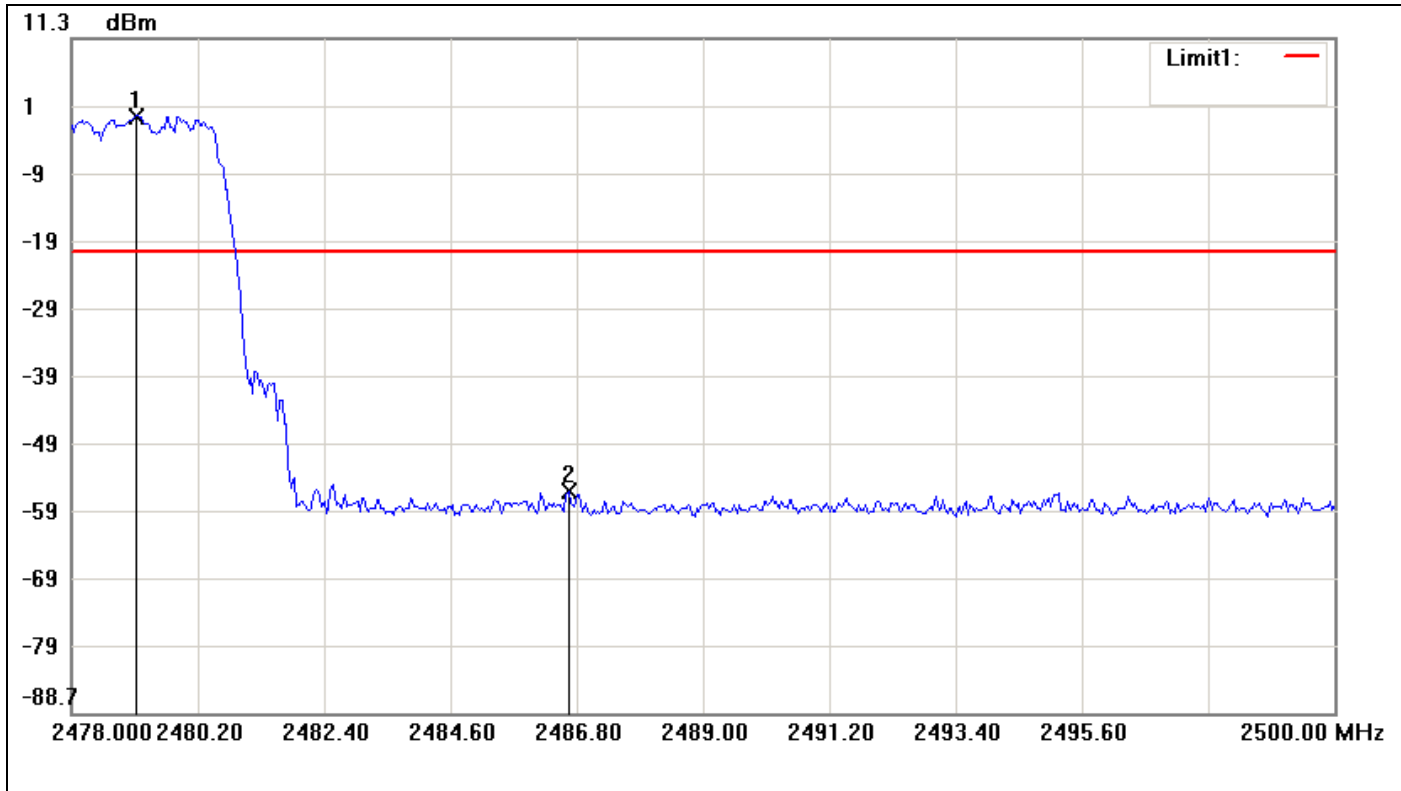

	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2479.1367	-0.17	-20.17	20.00
2	2486.6533	-55.91	-20.17	-35.74




## 7.5 FREQUENCY SEPARATION

### LIMIT

According to §15.247(a)(1) & RSS-210 §A8.1 (2), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = 3.2 ms.
5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

##### **For GFSK / DH5**

Channel Separation (MHz)	two-thirds of the 20 dB bandwidth (kHz)	Channel Separation Limit	Result
1.07	700	>two-thirds of the 20 dB bandwidth	Pass

##### **For 8DPSK / DH5**


Channel Separation (MHz)	two-thirds of the 20 dB bandwidth (kHz)	Channel Separation Limit	Result
1.215	900	>two-thirds of the 20 dB bandwidth	Pass



**Test Plot**

For GFSK / DH5

**Measurement of Channel Separation**

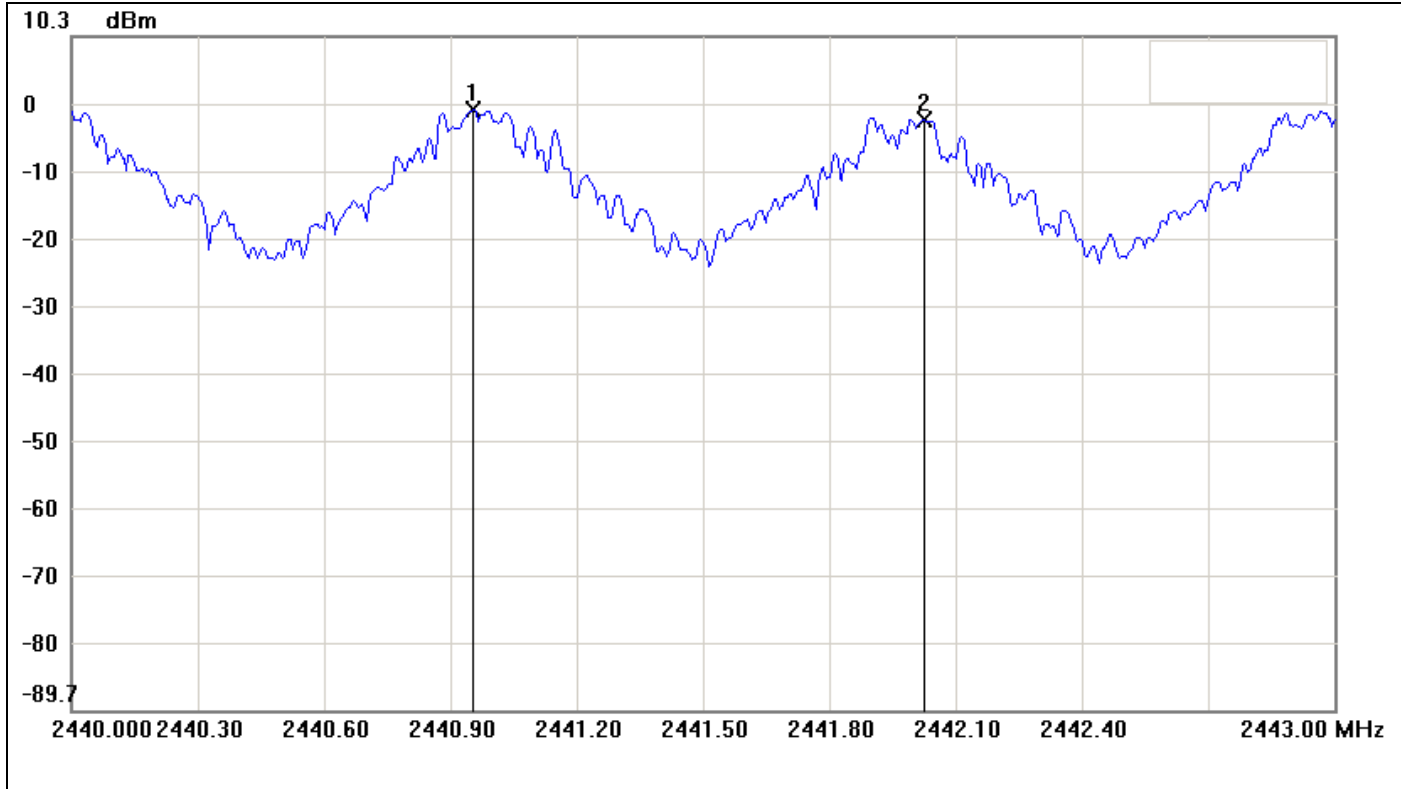


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9550	-0.67		
2	2442.0250	-1.97		

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk2-mk1	1.07	-1.3



**Measurement of 20dB Bandwidth**

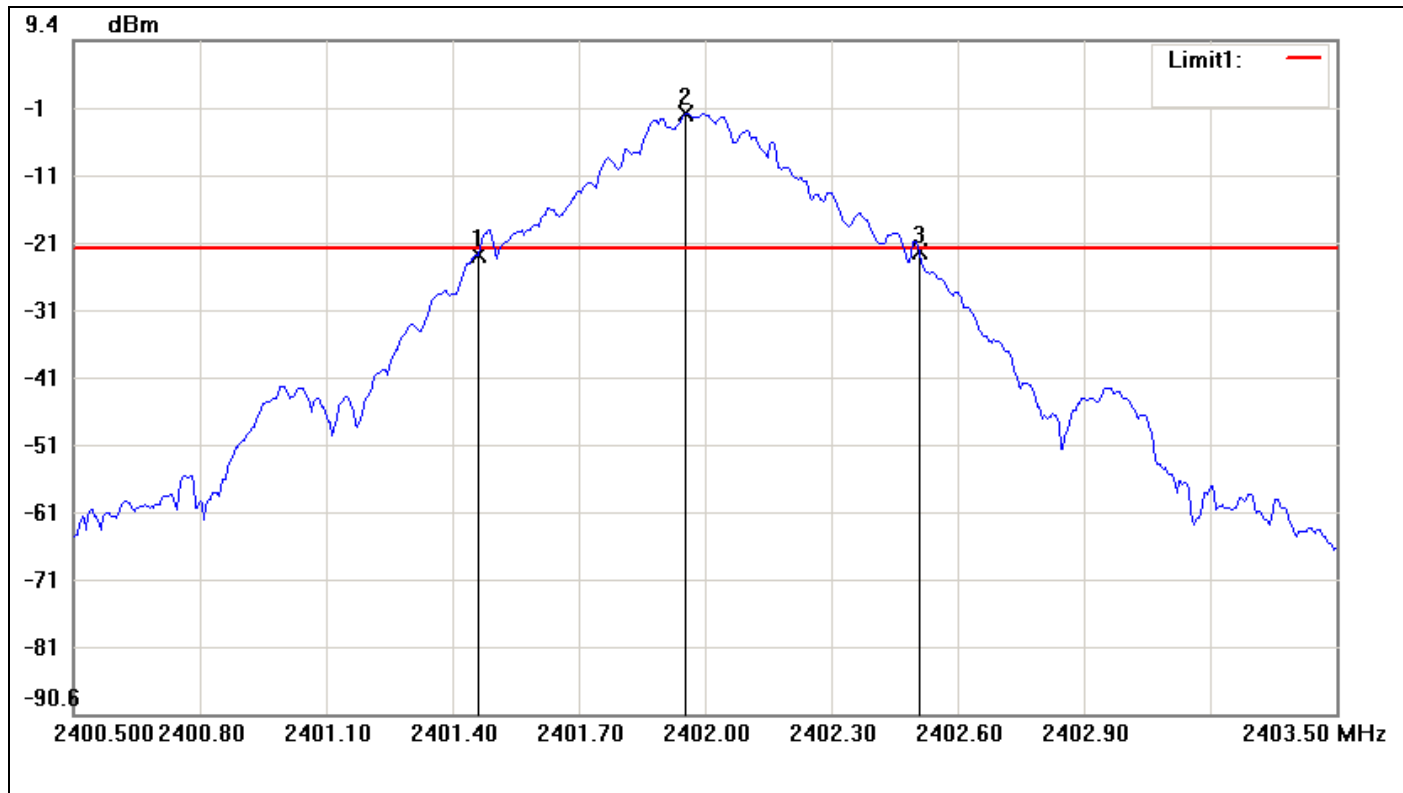


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2401.4600	-22.56	-21.53	-1.03
2	2401.9550	-1.53	-21.53	20.00
3	2402.5100	-21.90	-21.53	-0.37

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.05	0.66



For 8DPSK / DH5

Measurement of Channel Separation

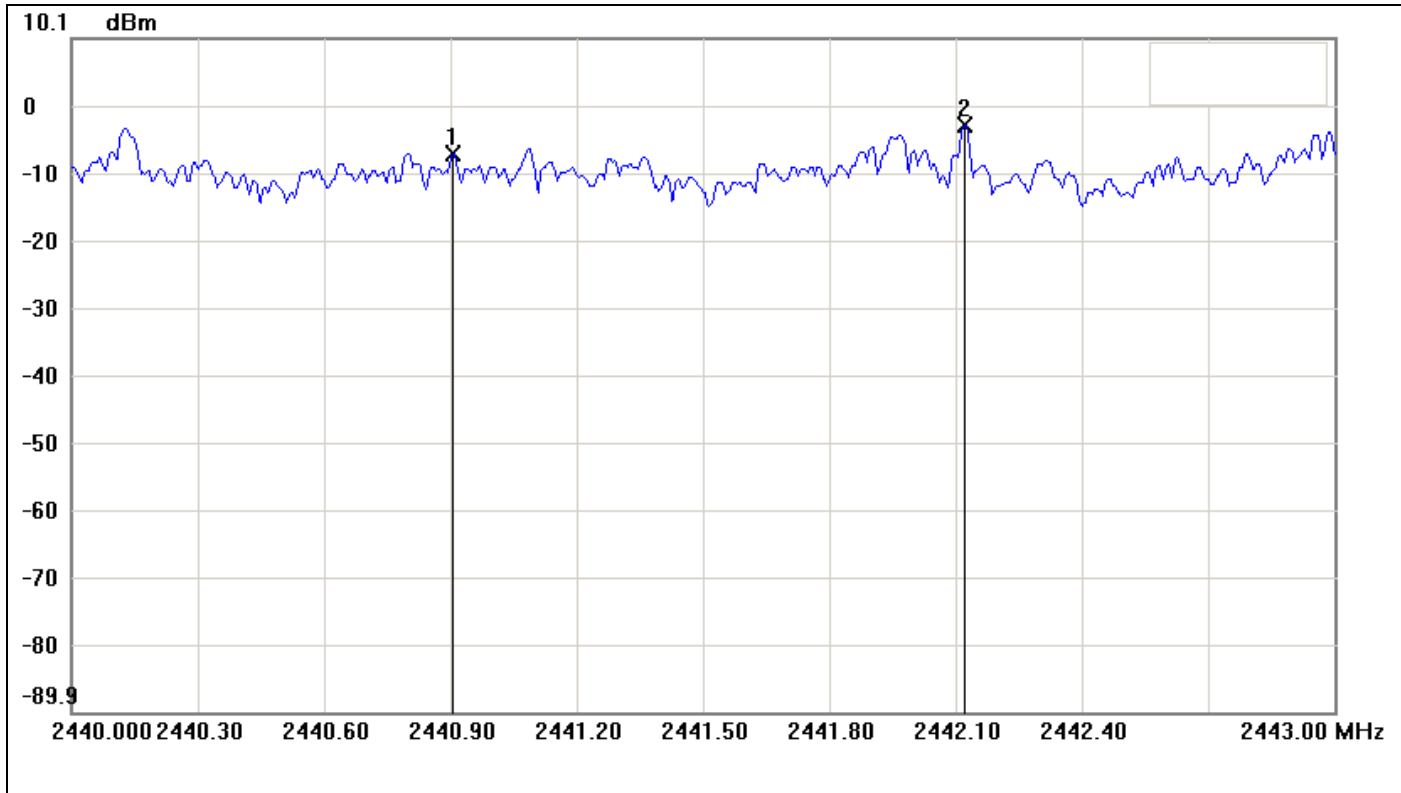


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9050	-7.01		
2	2442.1200	-2.78		

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk2-mk1	1.215	4.23





**Measurement of 20dB Bandwidth**

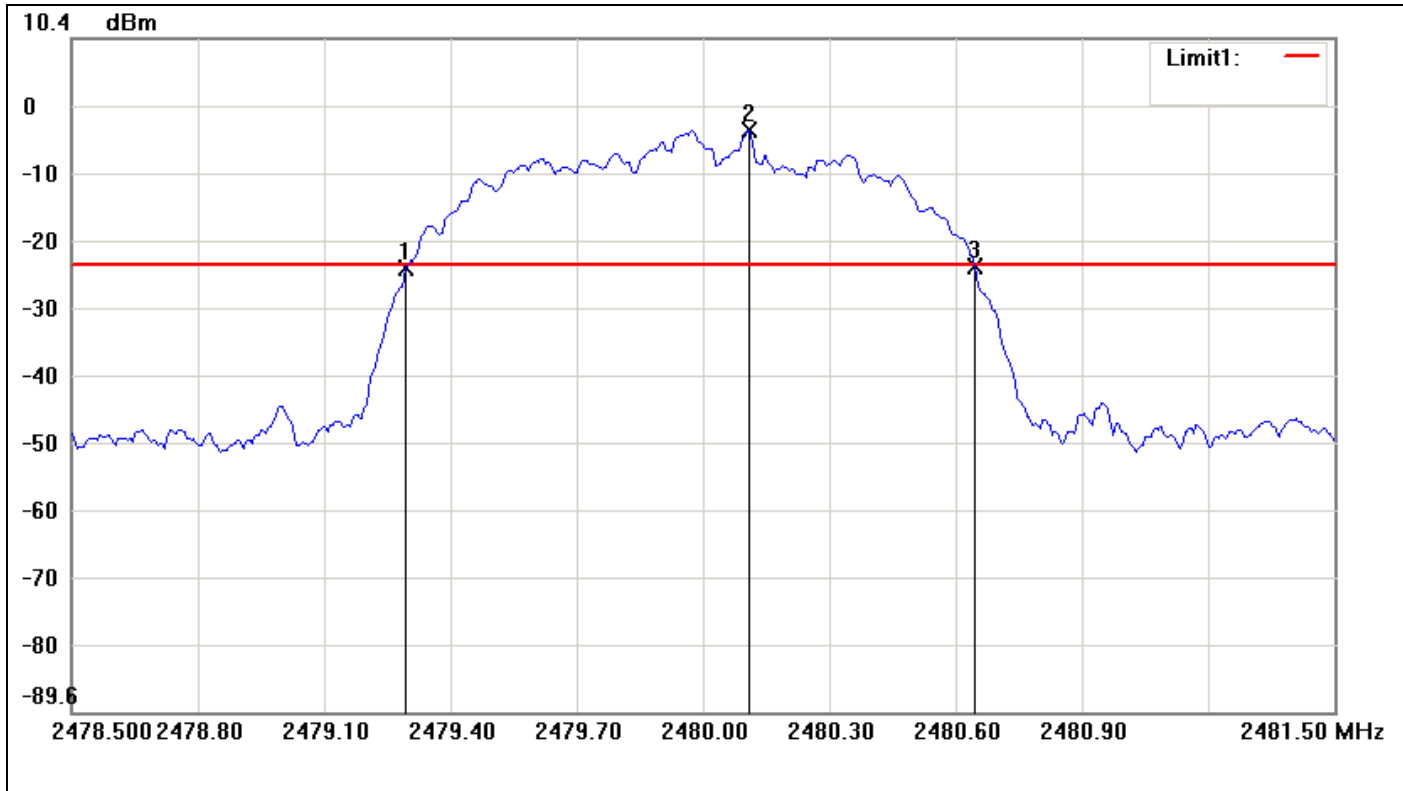

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2479.2950	-23.67	-23.22	-0.45
2	2480.1100	-3.22	-23.22	20.00
3	2480.6450	-23.34	-23.22	-0.12

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	1.35	0.33




## 7.6 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

According to §15.247(a)(1)(iii) & RSS-210 §A8.1(4), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2430.5MHz, Sweep = auto  
Start=2430.5MHz, Stop = 2460.5MHz, Sweep = auto and Start=2460.5MHz, Stop = 2485.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=510kHz.
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*

#### Normal Mode:

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS



AFH Mode: 20 Channels declared.




**Test Plot**

**For GFSK**

**Channel Number**

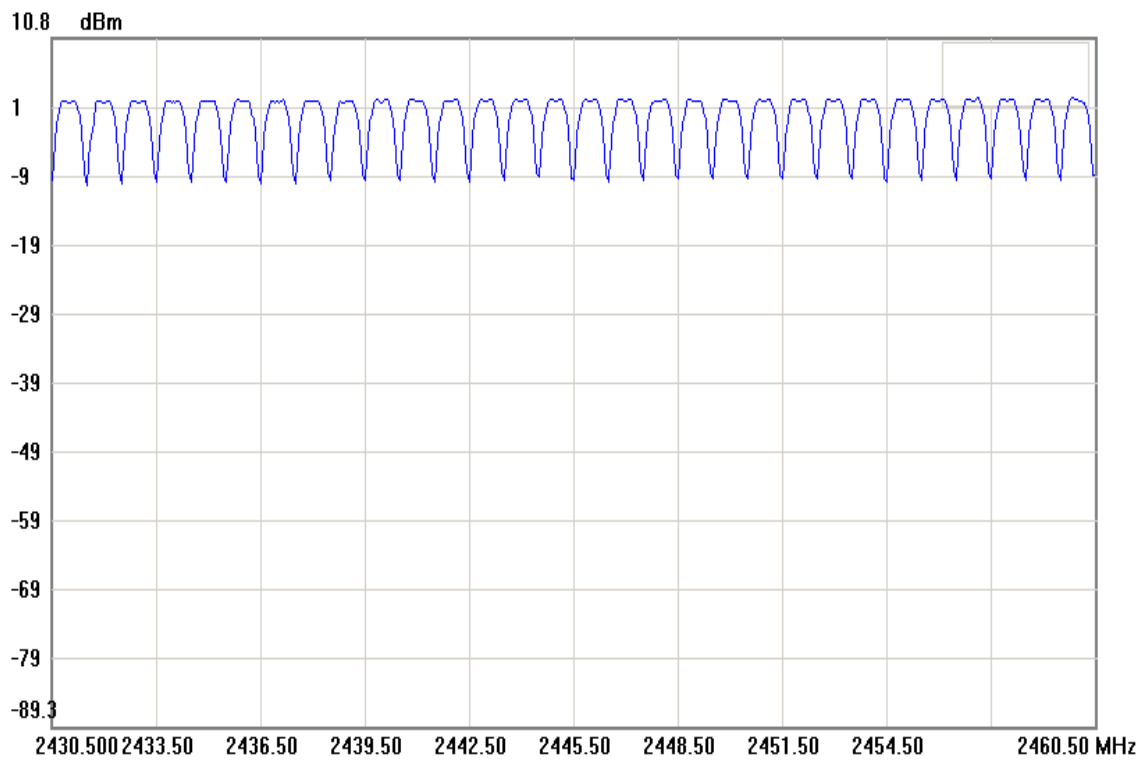
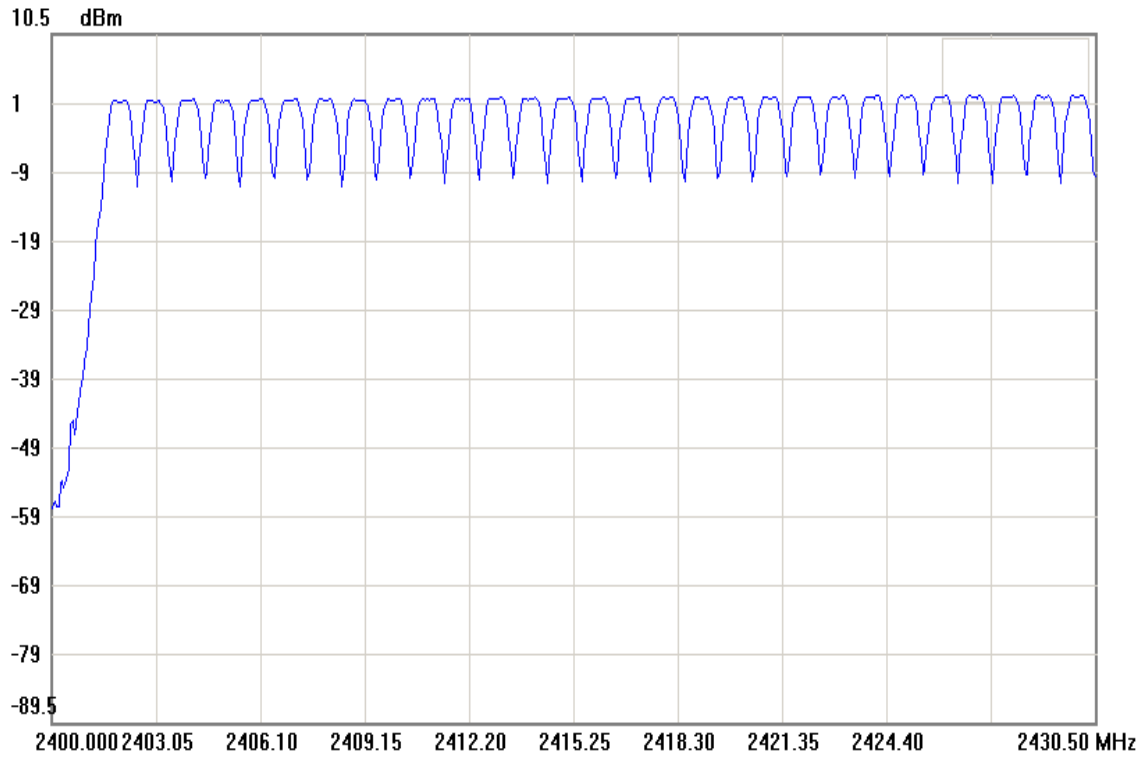


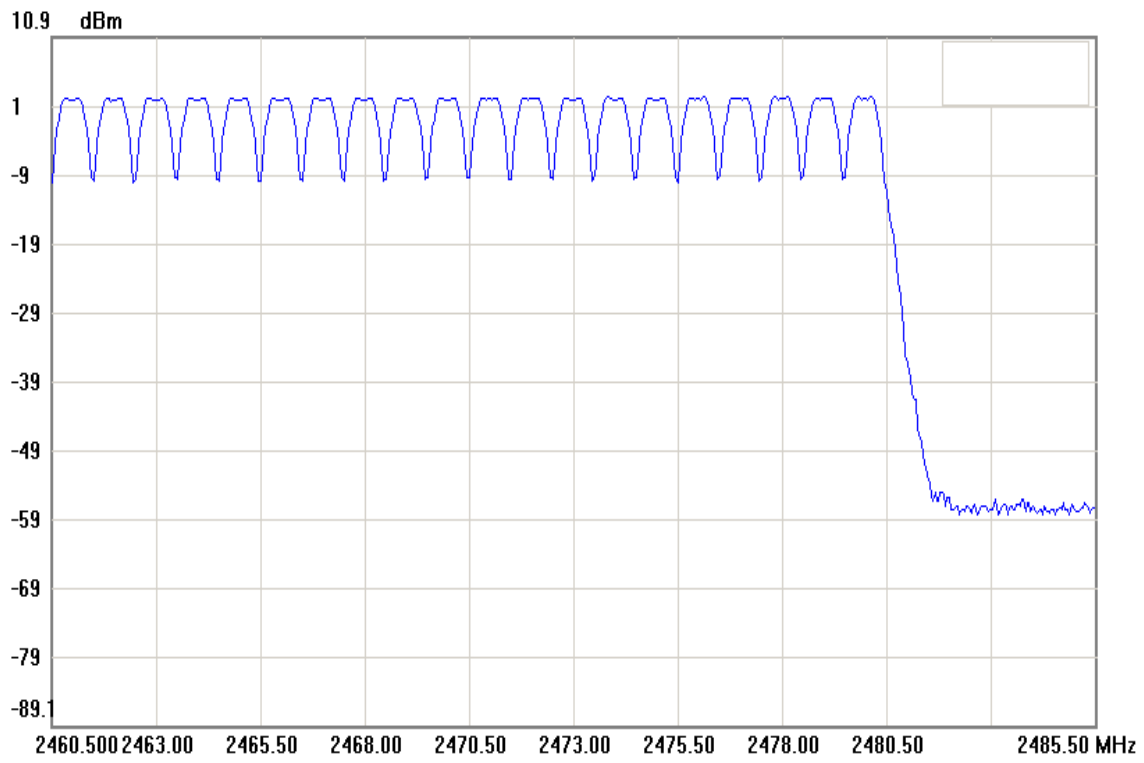




**For 8DPSK**

**Channel Number**

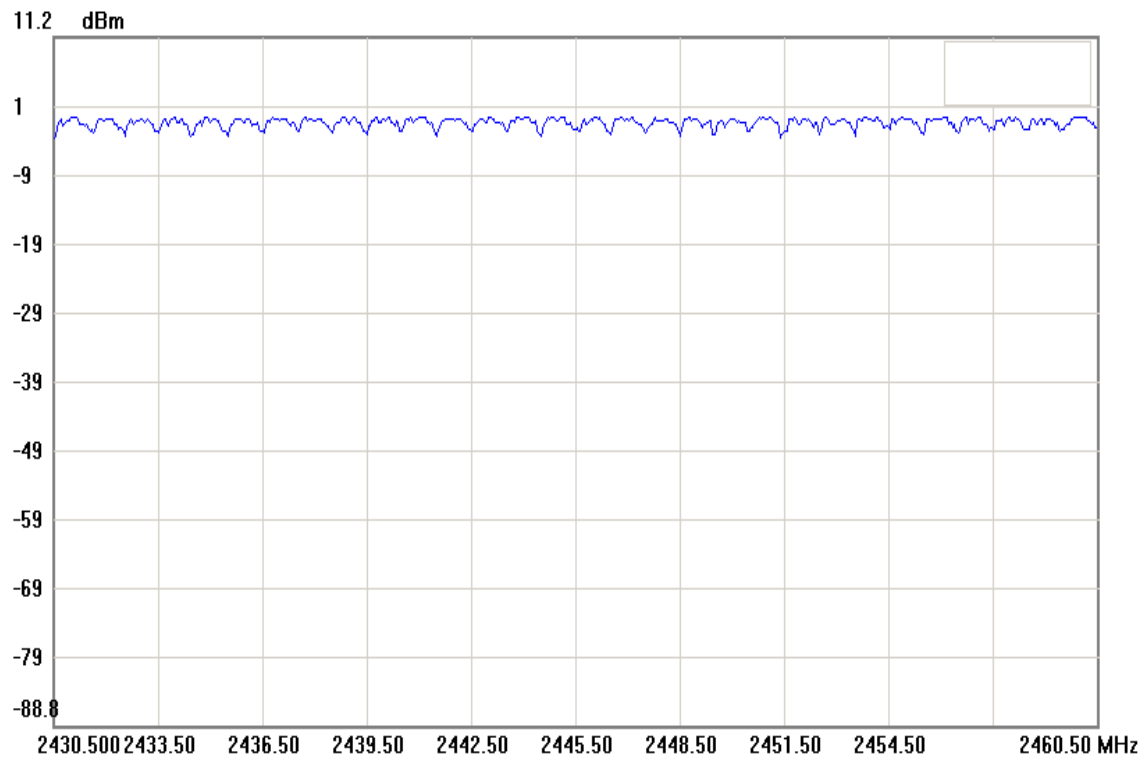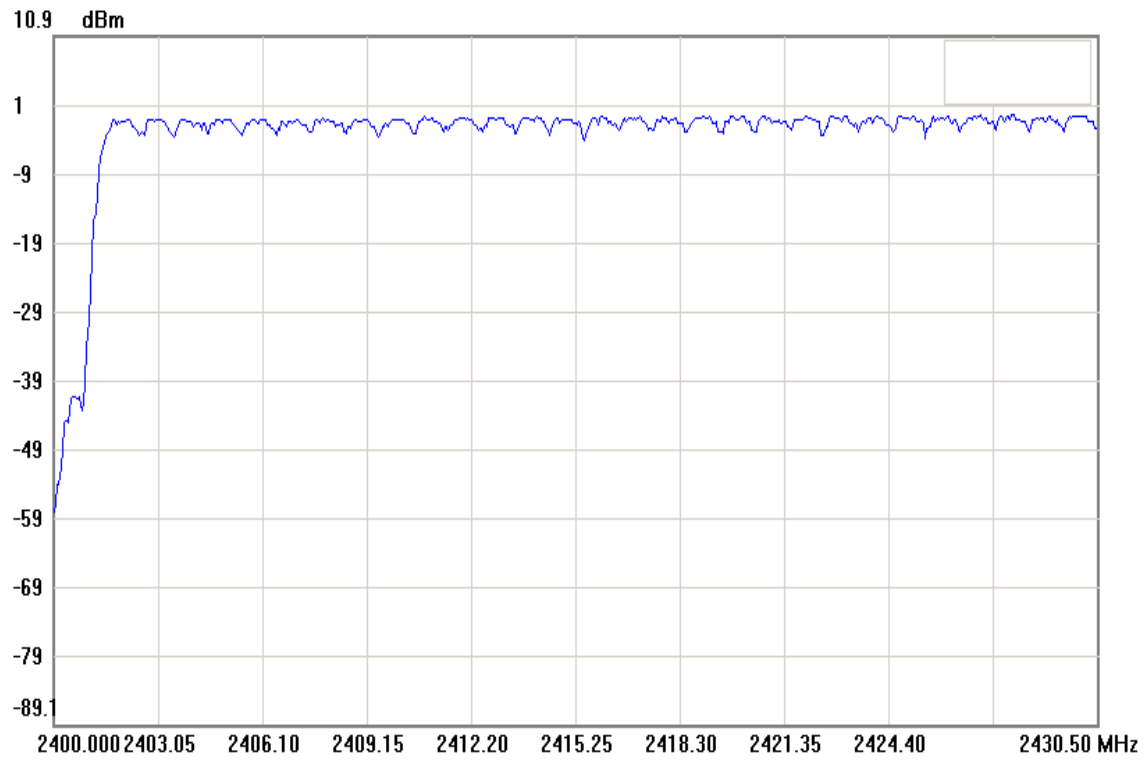

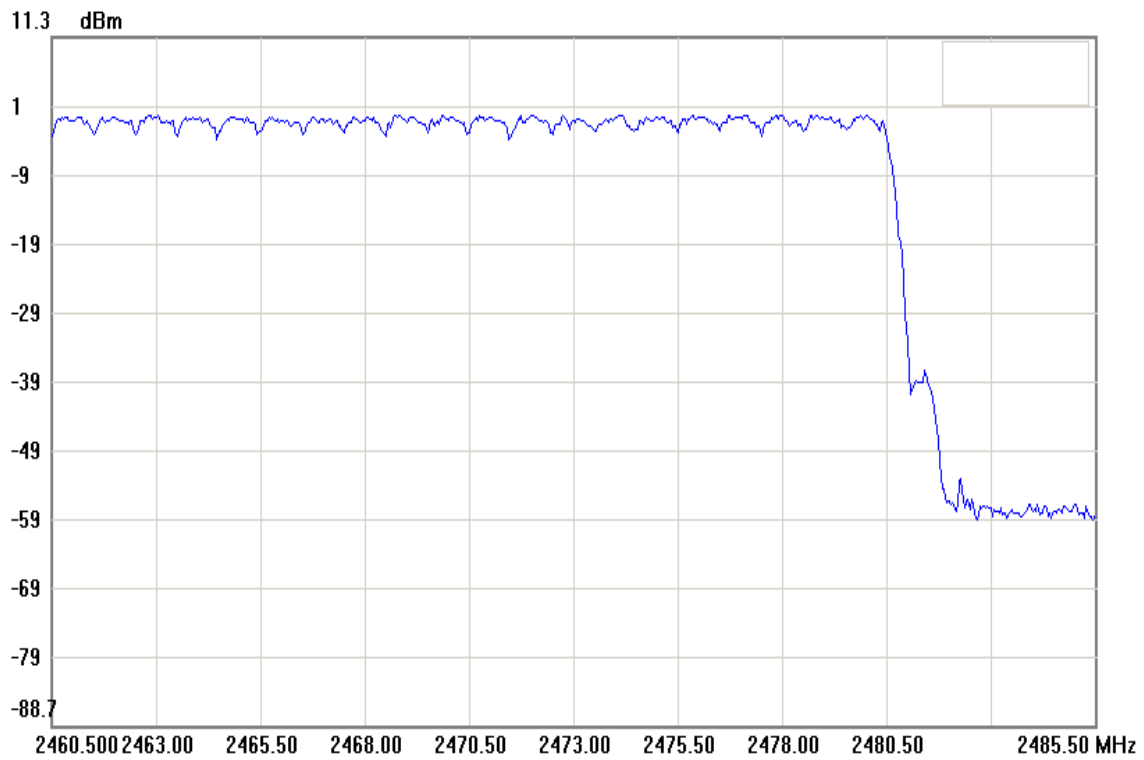




## 7.7 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

According to RSS-210 §A8.1(4), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms.
5. Repeat above procedures until all frequency measured were complete.

For AFH Mode:

1. The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 0.8 second scan, to enable resolution of each occurrence.
2. The average time of occupancy in the specified 8 second period (20 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

### TEST RESULTS

*No non-compliance noted*



**Test Data**

**For AFH**

DH 1:  $10 \times 0.3845 \times 8 = 30.76$  (ms)

DH 3:  $10 \times 1.635 \times 5 = 81.75$  (ms)

DH 5:  $10 \times 2.888 \times 4 = 115.52$  (ms)

	Pulse Time (ms)	Number of Pulses	Total of Dwell (ms)	Limit (ms)	Result
DH 1	0.3845	8	30.76	400.00	PASS
DH 3	1.635	5	81.75		PASS
DH 5	2.888	4	115.52		PASS

**For GFSK**

DH 1:  $0.3867 \times (1600/2)/79 \times 31.6 = 123.744$  (ms)

DH 3:  $1.65 \times (1600/4)/79 \times 31.6 = 264.000$  (ms)

DH 5:  $2.9083 \times (1600/6)/79 \times 31.6 = 310.219$  (ms)

	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
DH 1	0.3867	123.744	31.60	400.00	PASS
DH 3	1.65	264.000	31.60		PASS
DH 5	2.9083	310.219	31.60		PASS

**For 8DPSK**

DH 1:  $0.3916 \times (1600/2)/79 \times 31.6 = 125.312$  (ms)

DH 3:  $1.65 \times (1600/4)/79 \times 31.6 = 264.000$  (ms)

DH 5:  $2.9084 \times (1600/6)/79 \times 31.6 = 310.229$  (ms)

	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
DH 1	0.3916	125.312	31.60	400.00	PASS
DH 3	1.65	264.000	31.60		PASS
DH 5	2.9084	310.229	31.60		PASS





**Test Plot**

**For AFH Mode:**


**DH1**

**Pulse width**

Agilent 13:23:46 Feb 18, 2013

R T

Mkr1 384.5  $\mu$ s  
-4.03 dB

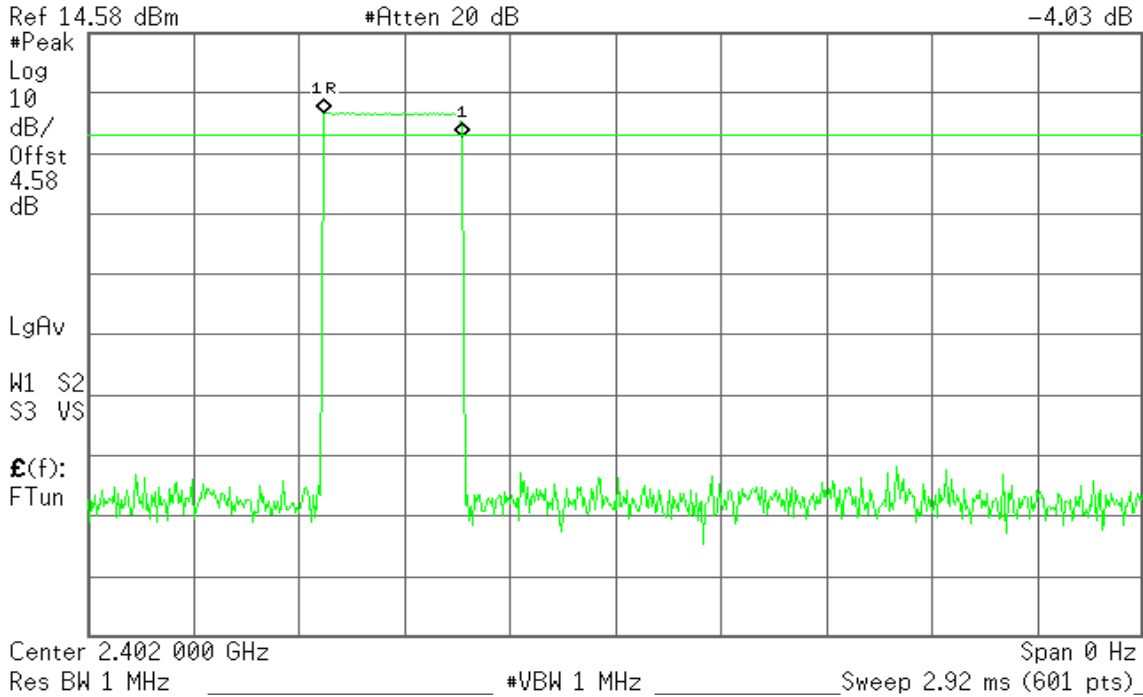


**Number of pulses in 0.8 second observation period**

Agilent 13:22:35 Feb 18, 2013

R T

Mkr1 597.3 ms  
-58.07 dBm

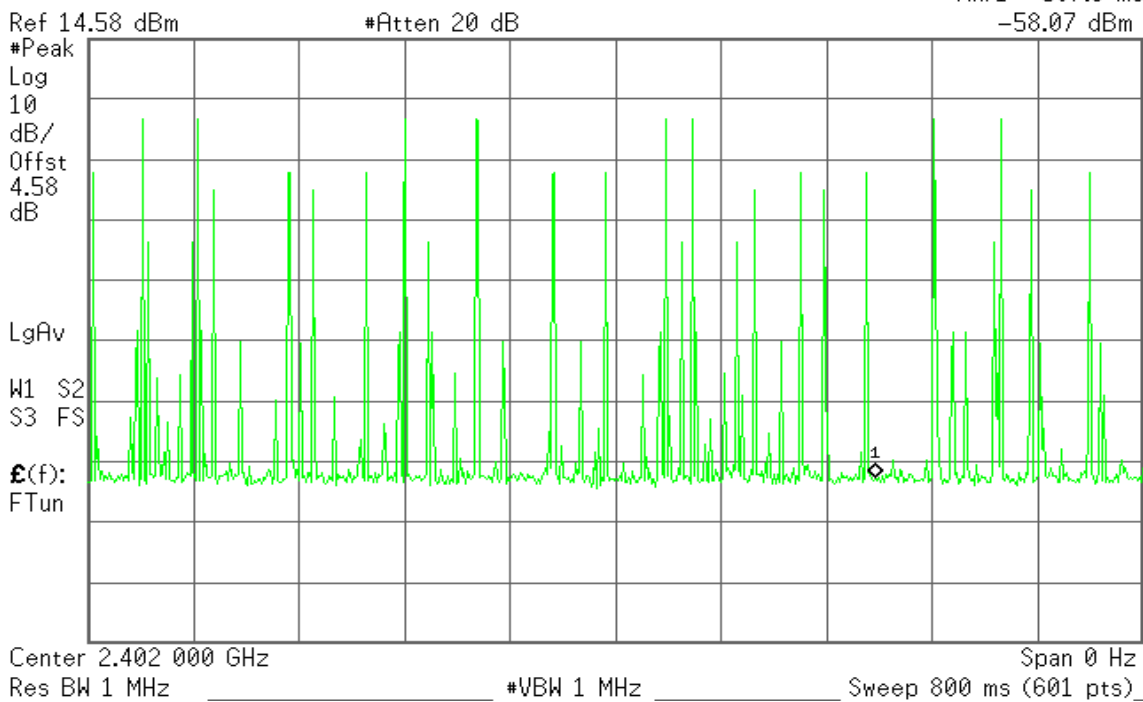




**DH3**

**Pulse width**

Agilent 13:23:46 Feb 18, 2013

R T


Mkr1 384.5  $\mu$ s  
-4.03 dB

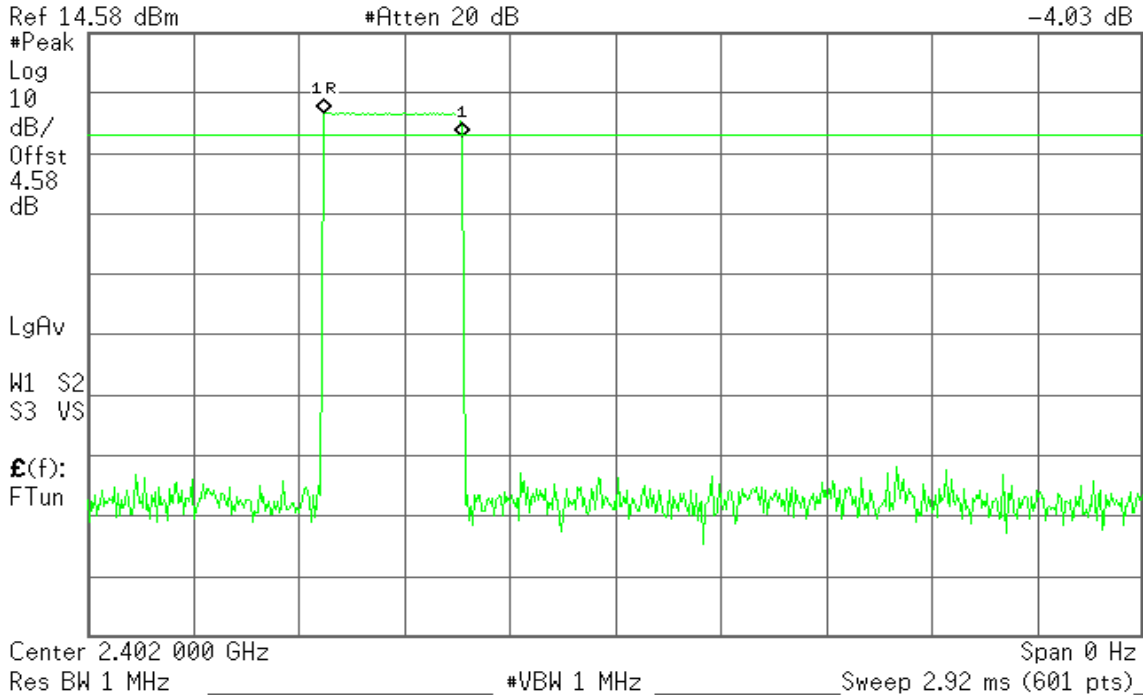

**Number of pulses in 0.8 second observation period**

Agilent 13:25:47 Feb 18, 2013

R T

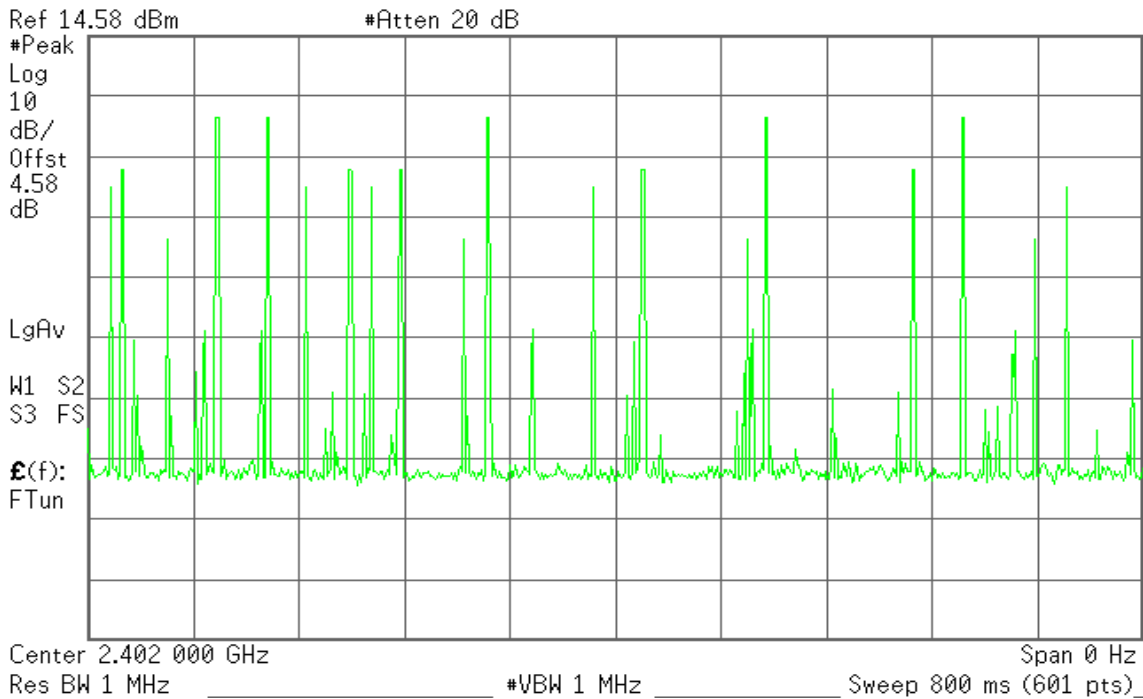




**DH5**

**Pulse width**

Agilent 13:29:09 Feb 18, 2013

R T


Mkr1 2.888 ms  
-0.34 dB

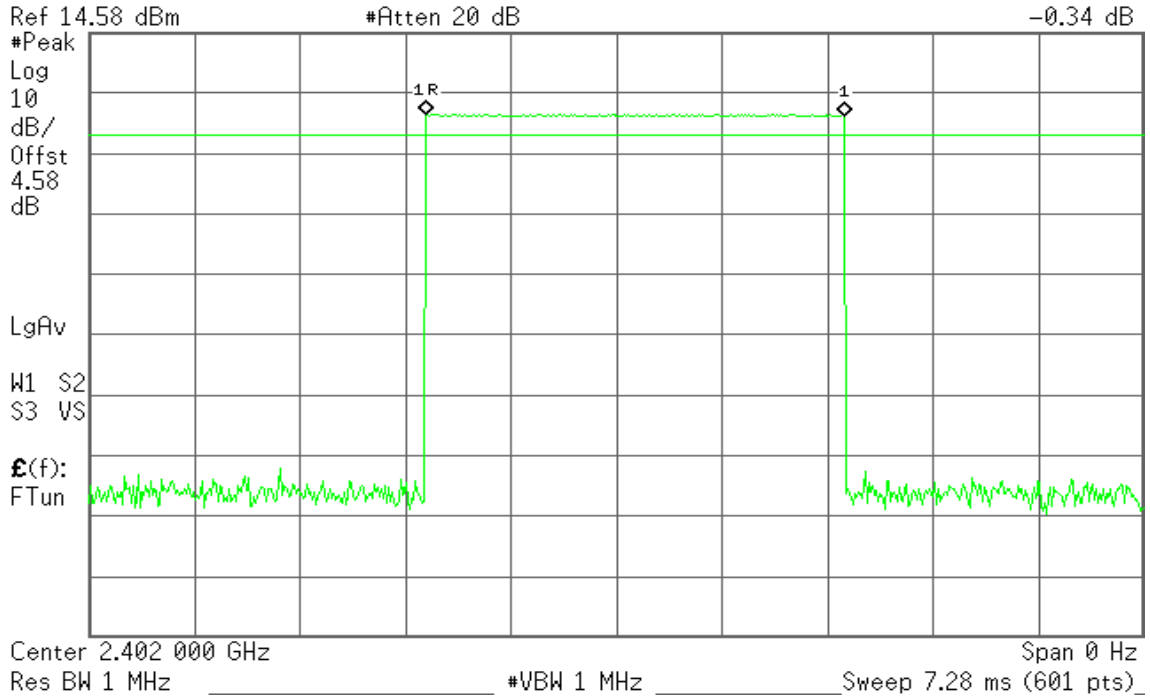

**Number of pulses in 0.8 second observation period**

Agilent 13:26:07 Feb 18, 2013


R T

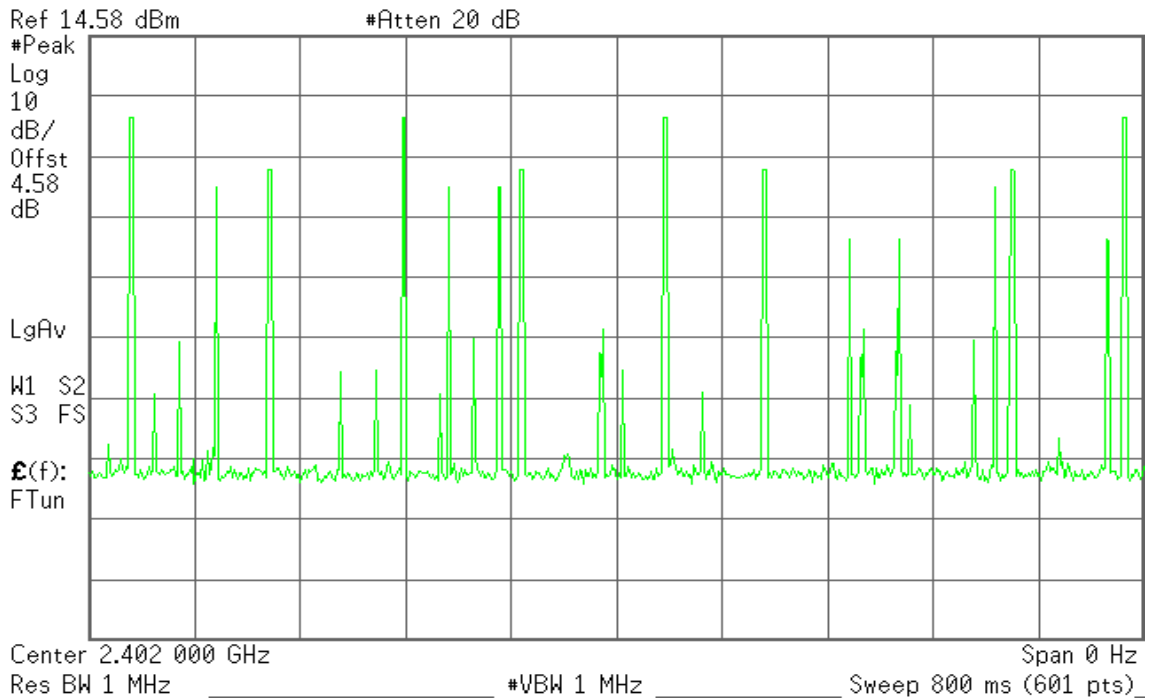



For GFSK

**DH 1**

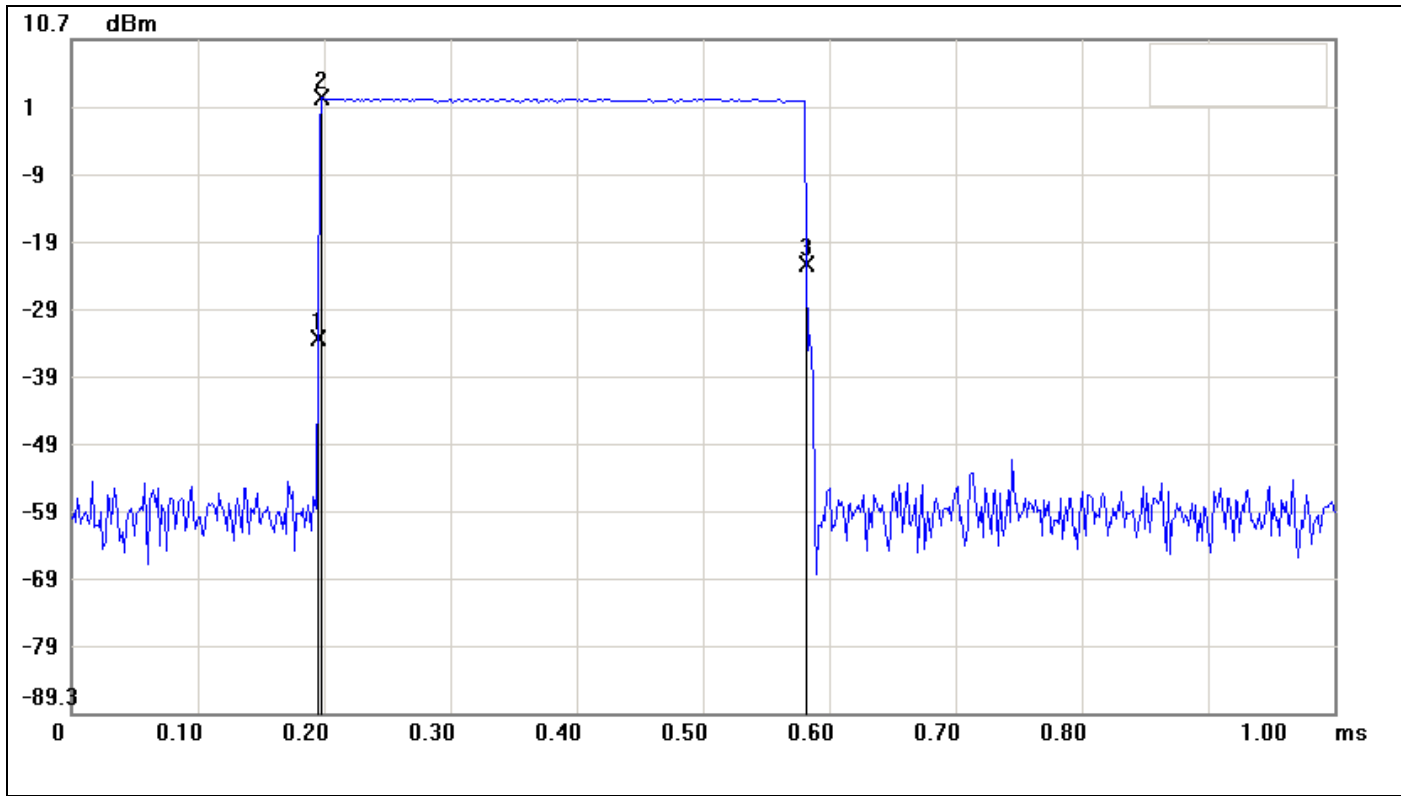


No.	Sweep time(ms)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	0.1950	-33.54		
2	0.1983	2.04		
3	0.5817	-22.57		

No.		$\Delta$ Time(ms)	$\Delta$ Level(dB)
1	mk3-mk1	0.3867	10.97



**DH 3**

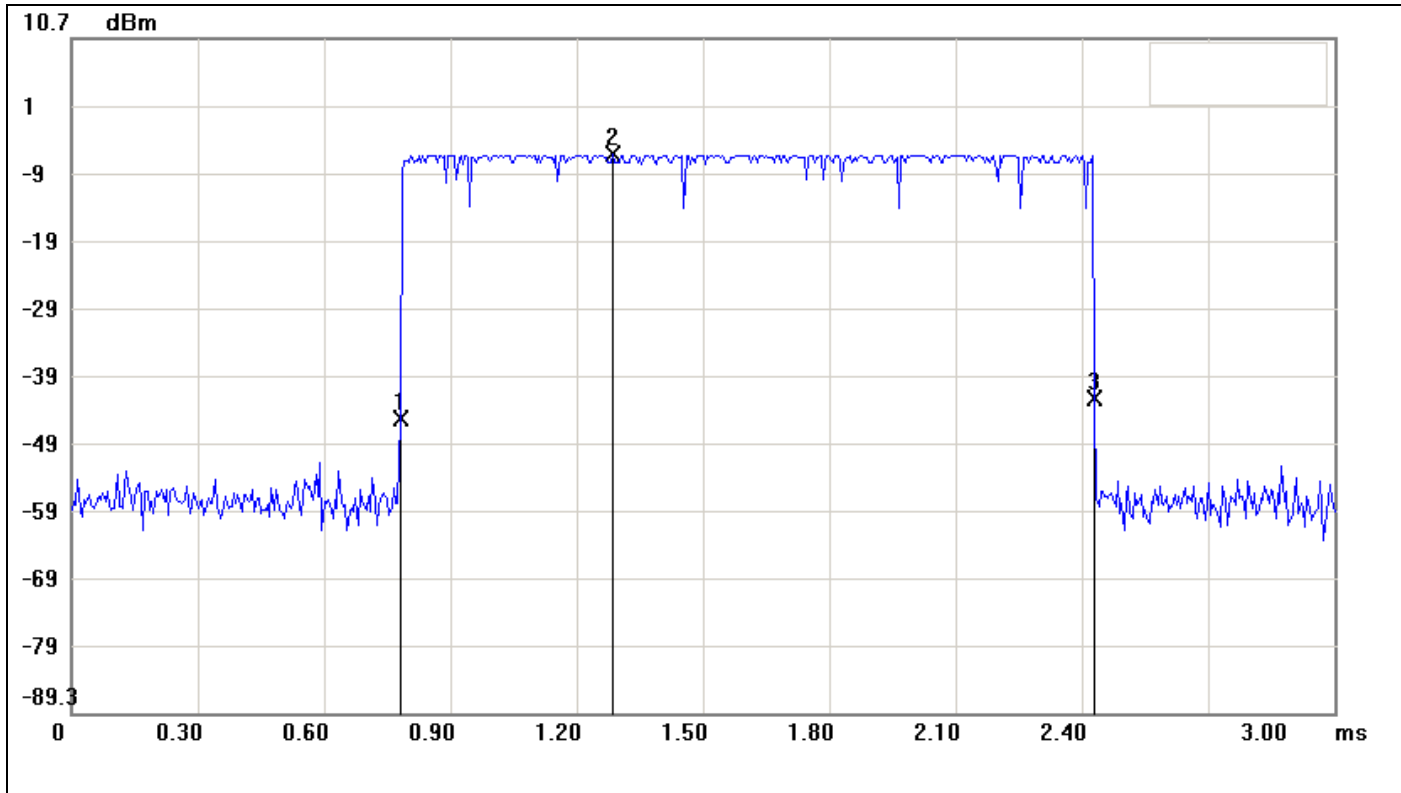


No.	Sweep time(ms)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	0.7800	-45.72		
2	1.2850	-6.47		
3	2.4300	-42.69		

No.		$\Delta$ Time(ms)	$\Delta$ Level(dB)
1	mk3-mk1	1.65	3.03



**DH 5**

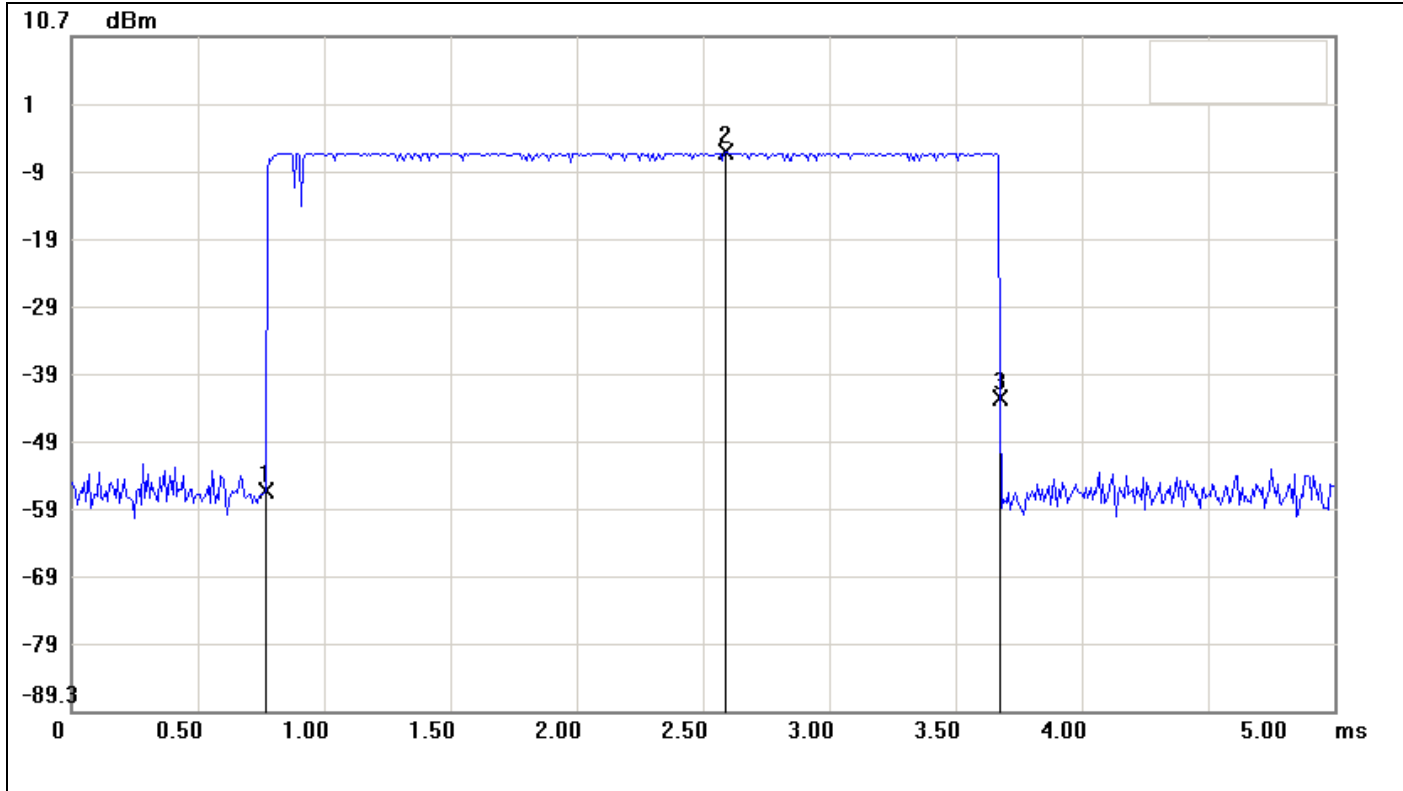


No.	Sweep time(ms)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	0.7667	-56.58		
2	2.5917	-6.50		
3	3.6750	-42.93		

No.		$\Delta$ Time(ms)	$\Delta$ Level(dB)
1	mk3-mk1	2.9083	13.65



For 8DPSK

DH 1

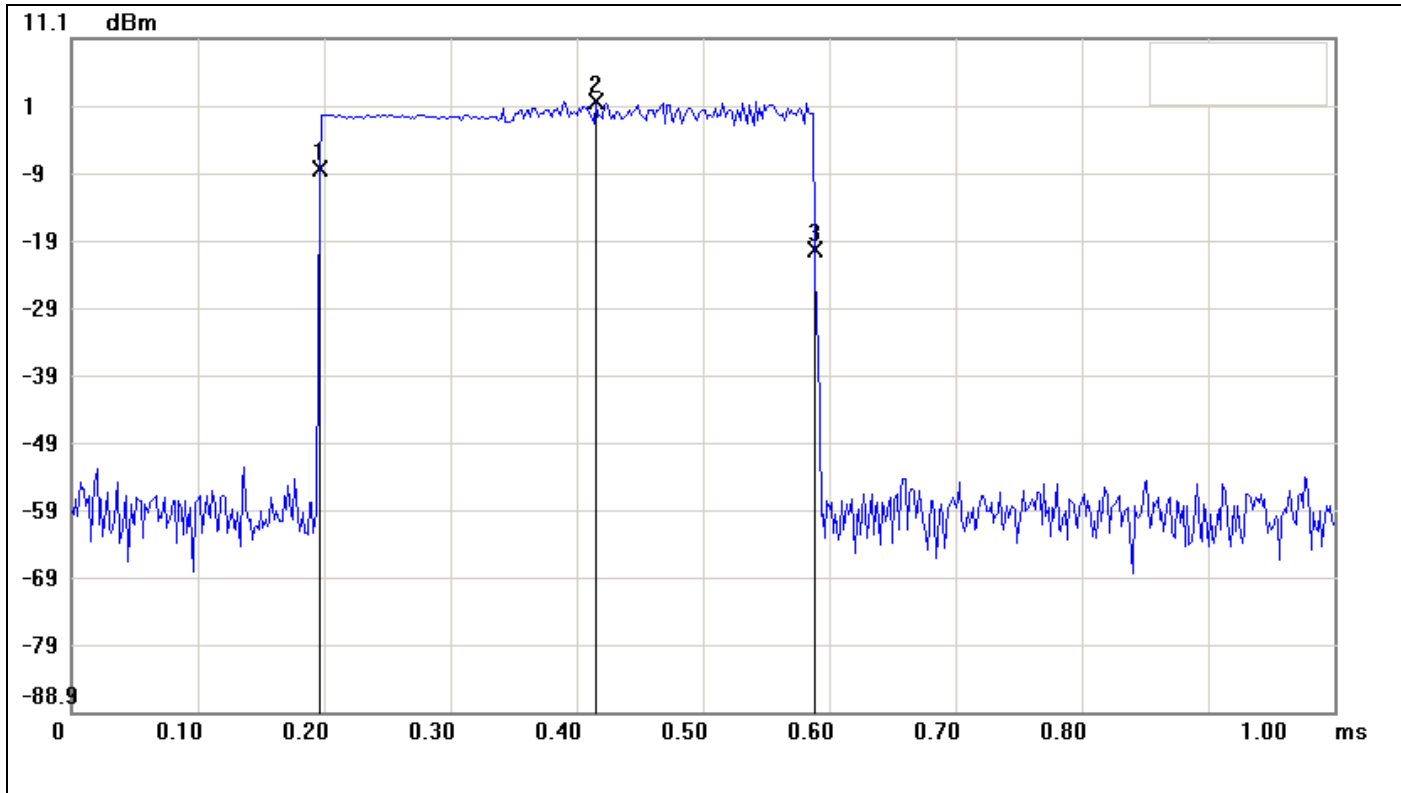


No.	Sweep time(ms)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	0.1967	-8.37		
2	0.4150	1.84		
3	0.5883	-20.35		

No.		$\Delta$ Time(ms)	$\Delta$ Level(dB)
1	mk3-mk1	0.3916	-11.98



**DH 3**

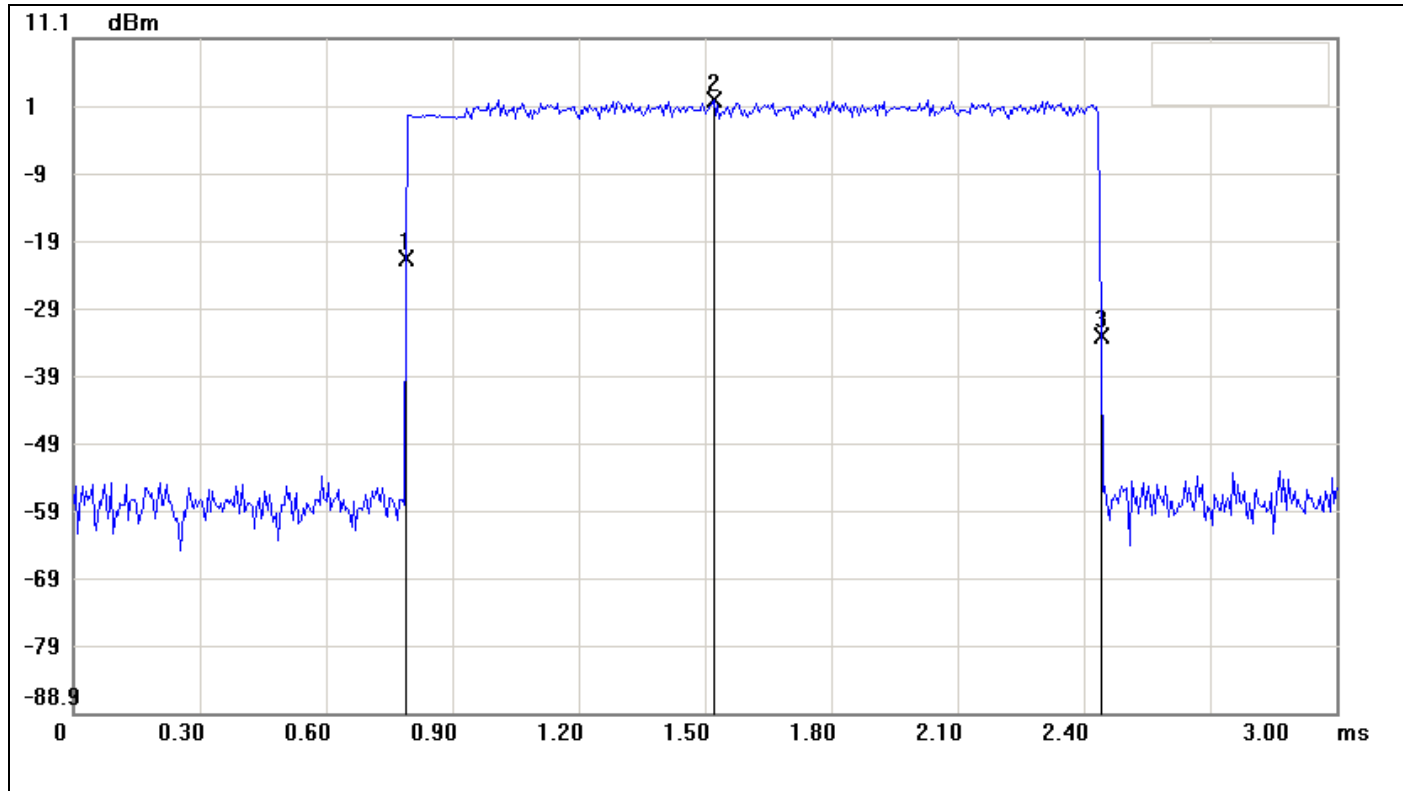


No.	Sweep time(ms)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	0.7900	-21.47		
2	1.5200	1.96		
3	2.4400	-32.99		

No.		$\Delta$ Time(ms)	$\Delta$ Level(dB)
1	mk3-mk1	1.65	-11.52





**DH 5**

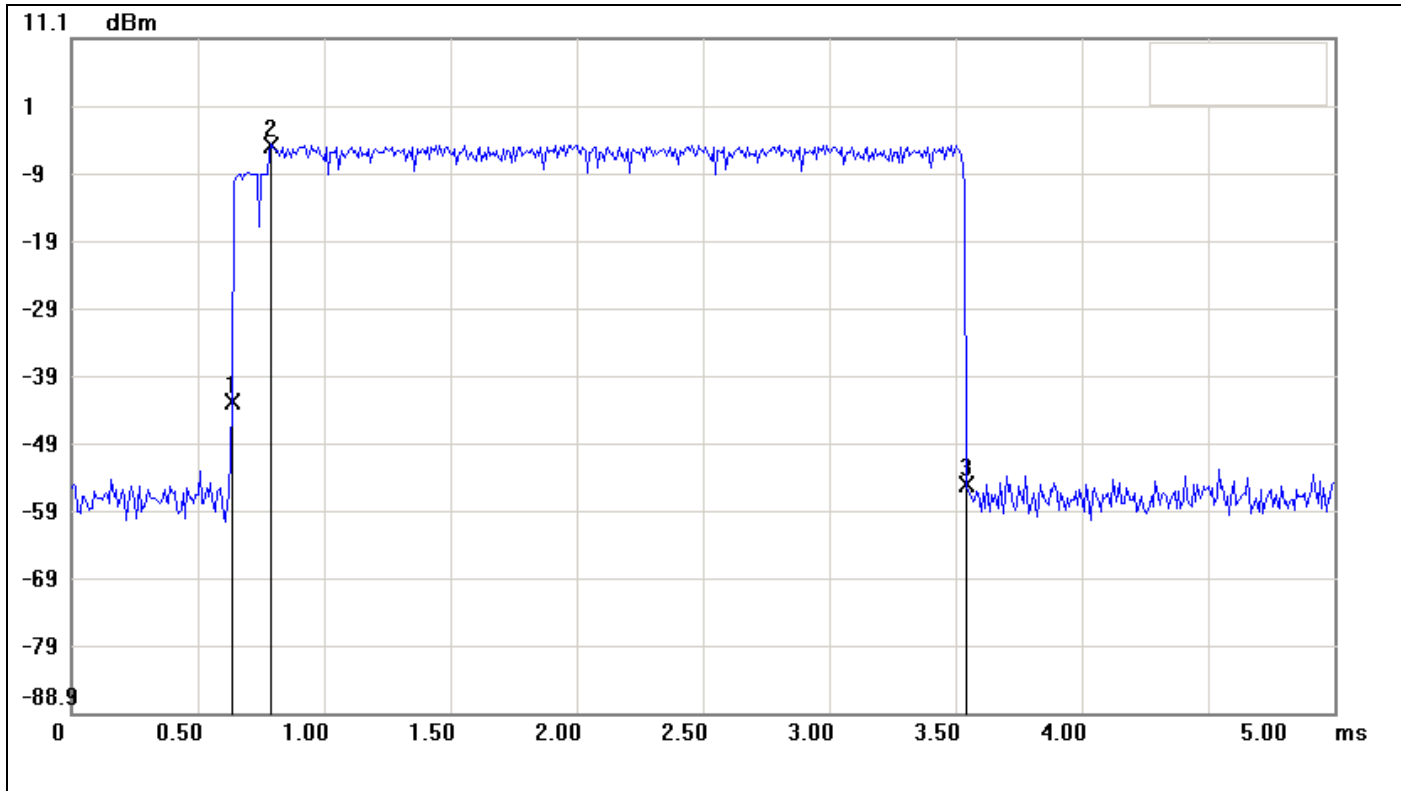

No.	Sweep time(ms)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	0.6333	-42.84		
2	0.7917	-4.63		
3	3.5417	-54.94		

No.		$\Delta$ Time(ms)	$\Delta$ Level(dB)
1	mk3-mk1	2.9084	-12.1




## 7.8 SPURIOUS EMISSIONS

### 7.8.1 Conducted Measurement

#### LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS


*No non-compliance noted*



**Test Plot**

**For GFSK / DH5**


**CH Low**

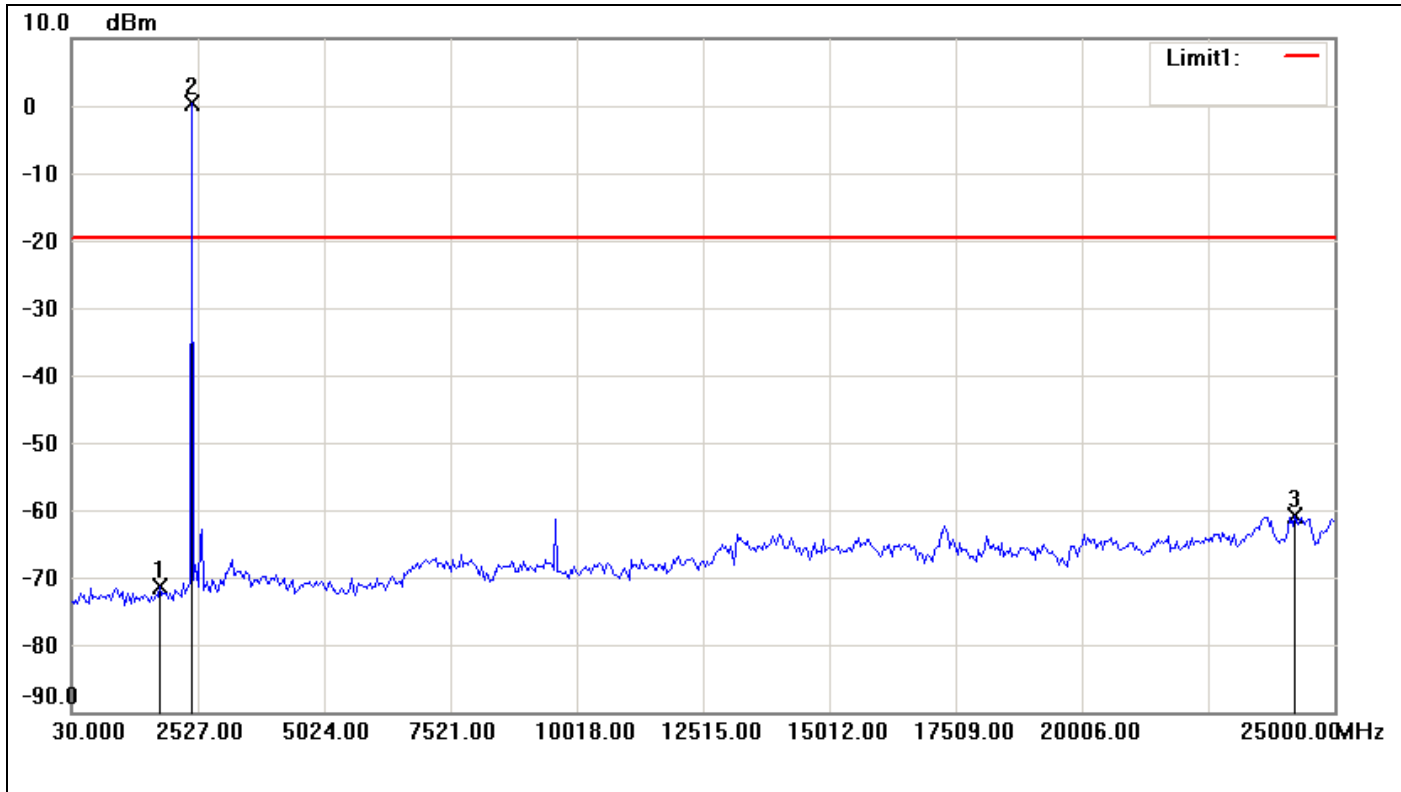

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	1777.9000	-71.42	-19.76	-51.66
2	2402.1500	0.24	-19.76	20.00
3	24209.2833	-60.92	-19.76	-41.16




### CH Mid

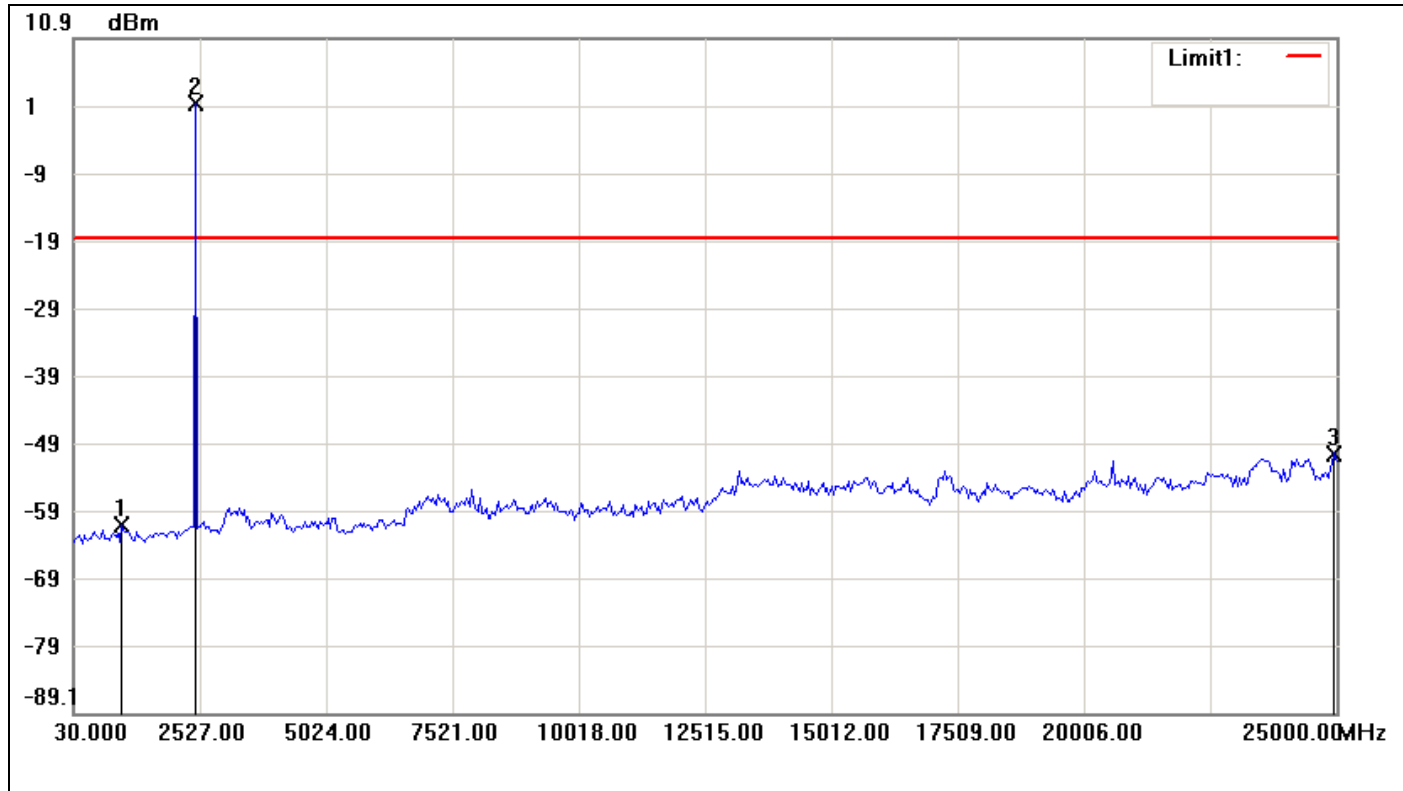

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	987.1833	-61.24	-18.70	-42.54
2	2443.7667	1.30	-18.70	20.00
3	24958.3833	-50.61	-18.70	-31.91



### CH High

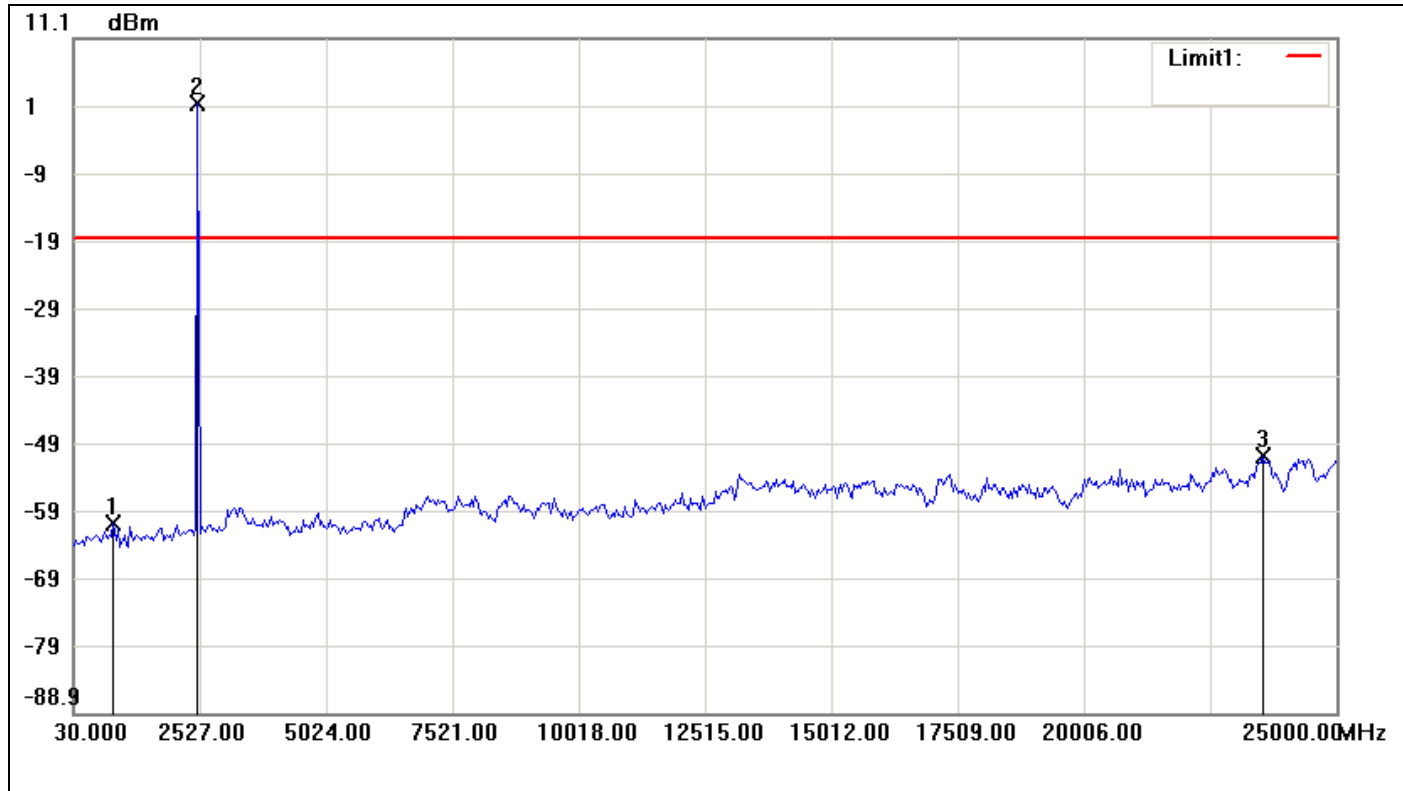


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	820.7167	-60.80	-18.53	-42.27
2	2485.3833	1.47	-18.53	20.00
3	23543.4167	-50.81	-18.53	-32.28



For 8DPSK / DH5


CH Low

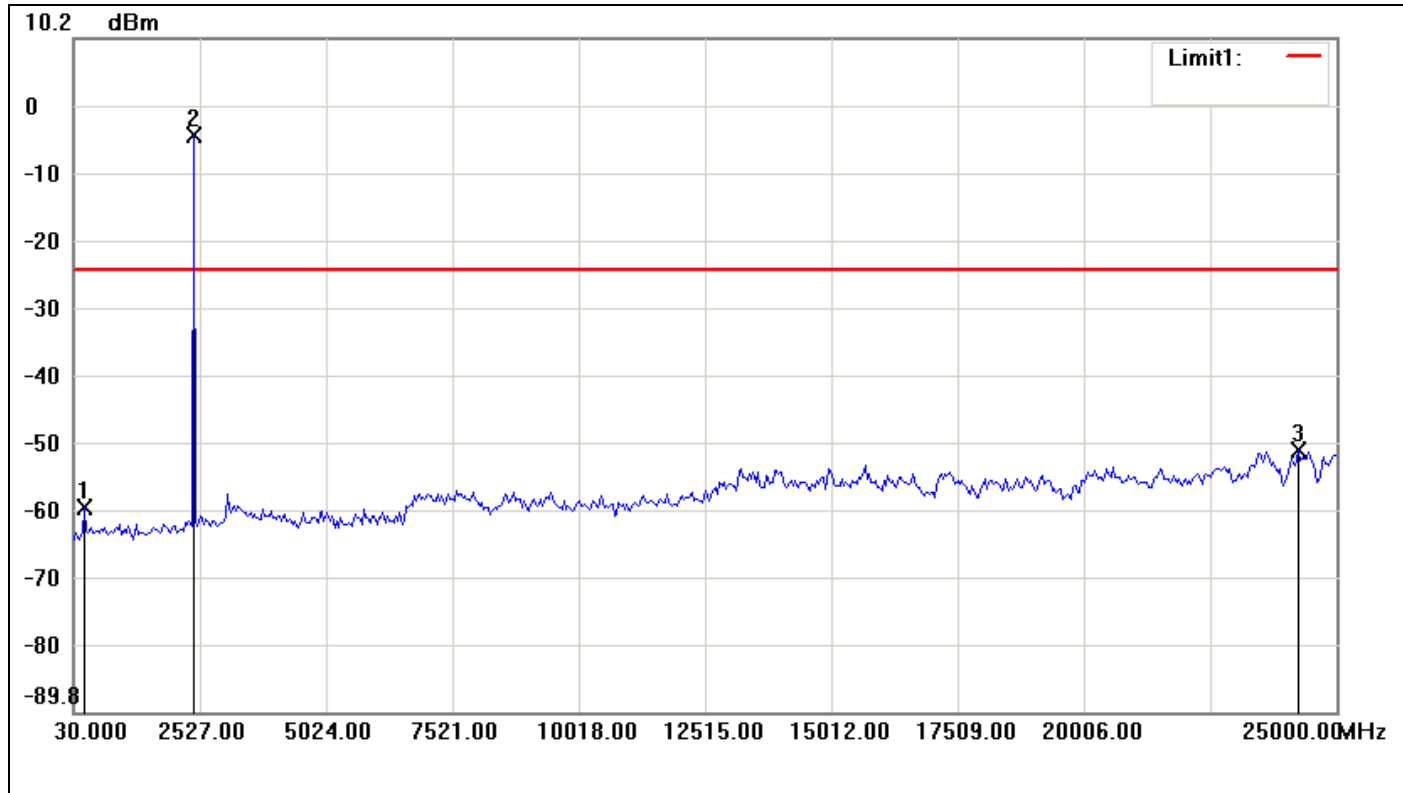

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	238.0833	-59.40	-24.19	-35.21
2	2402.1500	-4.19	-24.19	20.00
3	24250.9000	-51.01	-24.19	-26.82




### CH Mid

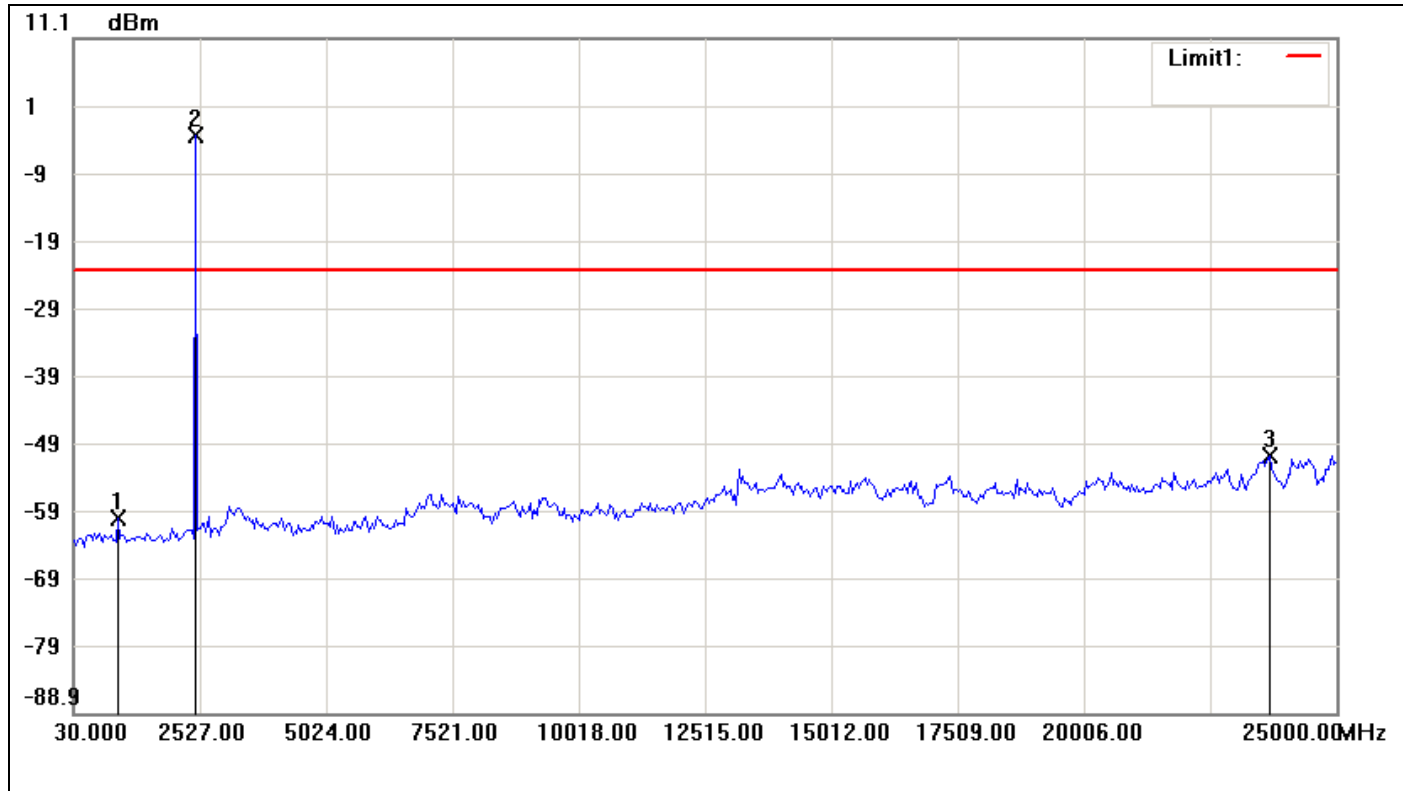

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	903.9500	-60.04	-23.35	-36.69
2	2443.7667	-3.35	-23.35	20.00
3	23668.2667	-50.75	-23.35	-27.40



### CH High

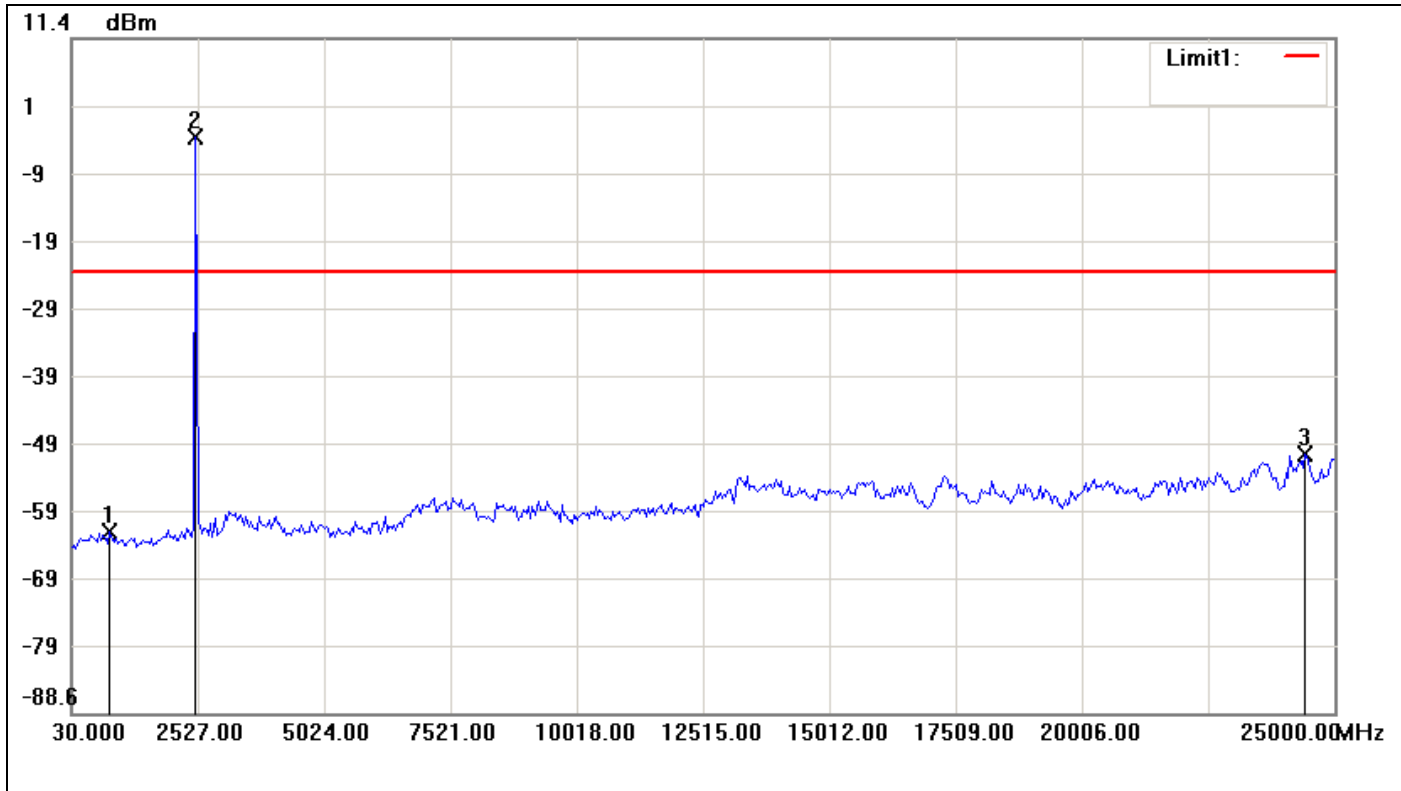

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	779.1000	-61.63	-23.13	-38.50
2	2485.3833	-3.13	-23.13	20.00
3	24417.3667	-50.11	-23.13	-26.98





## 7.8.2 Radiated Emissions

### LIMIT

All spurious emissions shall comply with the limits of §15.209(a) and RSS-Gen Table 2 & Table 5.

### RSS-Gen Table 2 & Table 5: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz <sup>(Note)</sup>

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

**Note:** \*Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 7.2.7.

Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

### RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)


Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	3000
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

**Note:** The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.




### Test Configuration

#### 9kHz ~ 30MHz

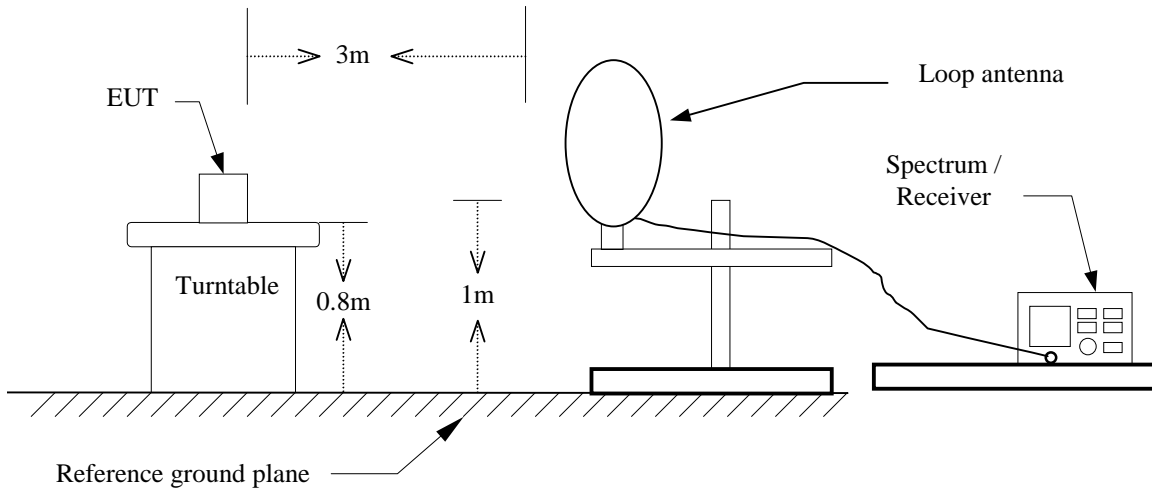


#### 30MHz ~ 1GHz

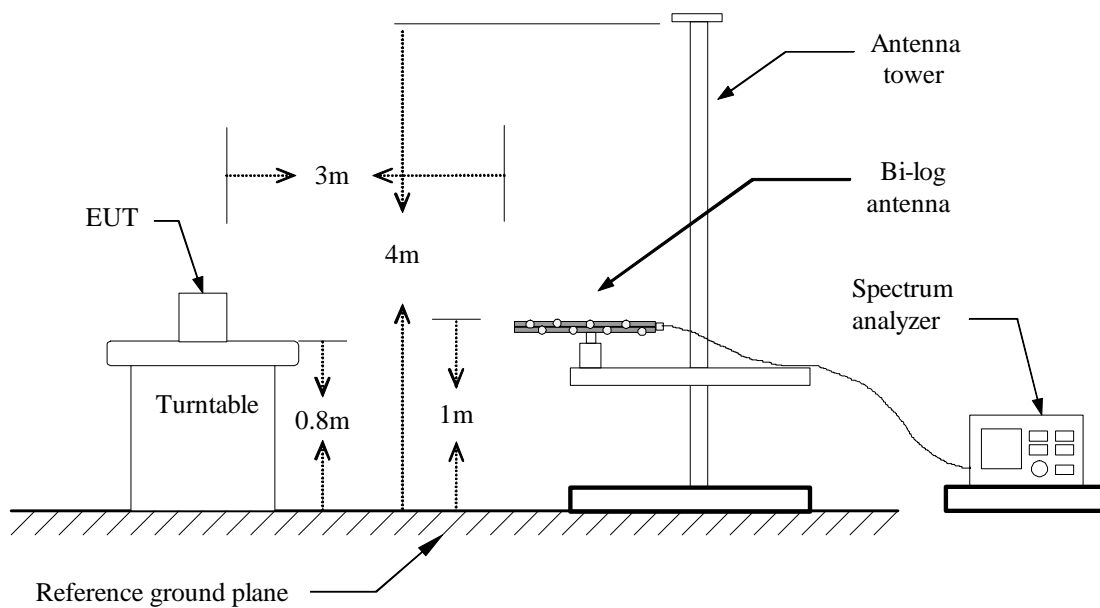



Above 1 GHz

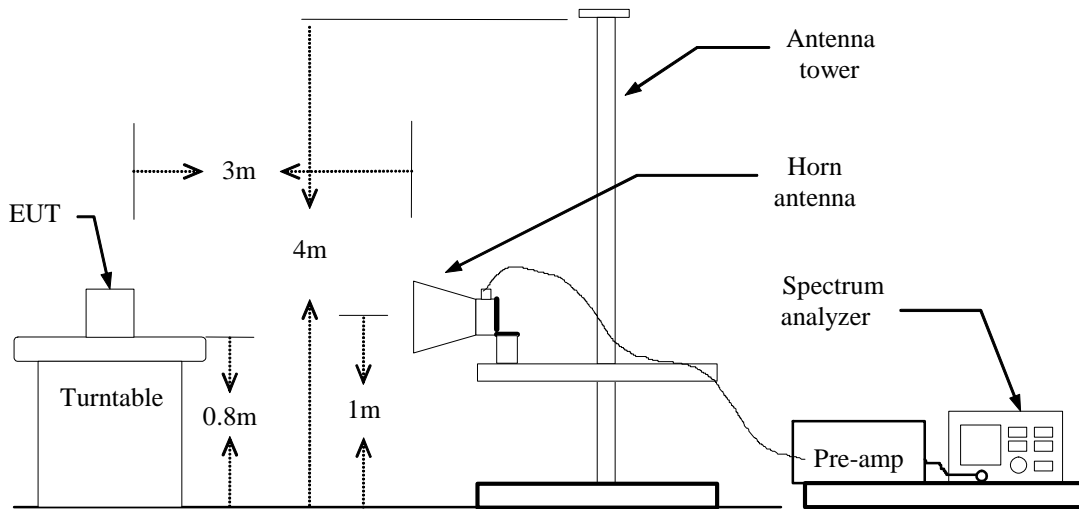



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz**

**Operation Mode:** Normal Link      **Test Date:** December 19, 2012  
**Temperature:** 26°C      **Tested by:** Chester Tsai  
**Humidity:** 50 % RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
159.3333	47.87	-29.24	18.63	43.50	-24.87	peak	V
384.0500	46.60	-25.86	20.74	46.00	-25.26	peak	V
432.5500	52.31	-24.67	27.64	46.00	-18.36	peak	V
527.9333	50.98	-23.07	27.91	46.00	-18.09	peak	V
576.4333	50.45	-22.63	27.82	46.00	-18.18	peak	V
671.8167	47.11	-20.56	26.55	46.00	-19.45	peak	V
288.6667	45.91	-27.91	18.00	46.00	-28.00	peak	H
335.5500	44.35	-26.90	17.45	46.00	-28.55	peak	H
384.0500	45.86	-25.86	20.00	46.00	-26.00	peak	H
451.9500	52.84	-24.18	28.66	46.00	-17.34	peak	H
629.7833	41.08	-21.42	19.66	46.00	-26.34	peak	H
671.8167	41.91	-20.56	21.35	46.00	-24.65	peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5.  $Margin (dB) = Remark\ result (dBuV/m) - Quasi-peak\ limit (dBuV/m).$



**Above 1 GHz**

**Operation Mode:** TX / GFSK / DH5 / CH Low

**Test Date:** December 19, 2012

**Temperature:** 26°C

**Tested by:** Chester Tsai

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1923.333	70.61	-19.85	50.76	74.00	-23.24	peak	V
N/A							
2380.000	66.12	-18.16	47.96	74.00	-26.04	peak	H
4825.000	59.38	-12.29	47.09	74.00	-26.91	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit .
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / GFSK / DH5 / CH Mid

Test Date: December 19, 2012

Temperature: 26°C

Tested by: Chester Tsai

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2356.667	66.27	-18.24	48.03	74.00	-25.97	peak	V
N/A							
2873.333	65.58	-16.97	48.61	74.00	-25.39	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / GFSK / DH5 / CH High

Test Date: December 19, 2012

Temperature: 26°C

Tested by: Chester Tsai

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2316.667	66.36	-18.38	47.98	74.00	-26.02	peak	V
N/A							
2266.667	66.64	-18.52	48.12	74.00	-25.88	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / 8DPSK / DH5 / CH Low

Test Date: December 19, 2012

Temperature: 26°C

Tested by: Chester Tsai

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2106.667	65.73	-18.90	46.83	74.00	-27.17	peak	V
N/A							
2170.000	65.46	-18.75	46.71	74.00	-27.29	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / 8DPSK / DH5 / CH Mid

Test Date: December 19, 2012

Temperature: 26°C

Tested by: Chester Tsai

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2263.333	65.57	-18.53	47.04	74.00	-26.96	peak	V
N/A							
2313.333	65.48	-18.39	47.09	74.00	-26.91	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / 8DPSK / DH5 / CH High

Test Date: December 19, 2012

Temperature: 26°C

Tested by: Chester Tsai

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2330.000	65.38	-18.33	47.05	74.00	-26.95	peak	V
N/A							
2266.667	66.92	-18.52	48.40	74.00	-25.60	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.9 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a) & RSS-Gen §7.2.4, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

#### Test Data

**Operation Mode:** Normal Link                      **Test Date:** December 20, 2012

**Temperature:** 26°C                                      **Tested by:** Tank Wu

**Humidity:** 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.2047	34.36	28.80	9.87	44.23	38.67	63.41	53.42	-19.18	-14.75	L1
0.2515	26.57	23.74	9.88	36.45	33.62	61.70	51.71	-25.25	-18.09	L1
0.4397	23.13	21.29	9.88	33.01	31.17	57.07	47.07	-24.06	-15.90	L1
0.5026	26.58	25.01	9.88	36.46	34.89	56.00	46.00	-19.54	-11.11	L1
0.7536	19.24	17.44	9.90	29.14	27.34	56.00	46.00	-26.86	-18.66	L1
4.8341	16.36	10.63	10.03	26.39	20.66	56.00	46.00	-29.61	-25.34	L1
0.2039	31.70	27.53	9.64	41.34	37.17	63.45	53.45	-22.11	-16.28	L2
0.2513	24.79	22.05	9.65	34.44	31.70	61.71	51.71	-27.27	-20.01	L2
0.4401	21.77	19.73	9.66	31.43	29.39	57.06	47.06	-25.63	-17.67	L2
0.5023	25.26	23.67	9.66	34.92	33.33	56.00	46.00	-21.08	-12.67	L2
3.0145	16.42	15.82	9.77	26.19	25.59	56.00	46.00	-29.81	-20.41	L2
4.8354	16.91	12.50	9.83	26.74	22.33	56.00	46.00	-29.26	-23.67	L2


#### Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



**Test Plots**

**Conducted emissions (Line 1)**

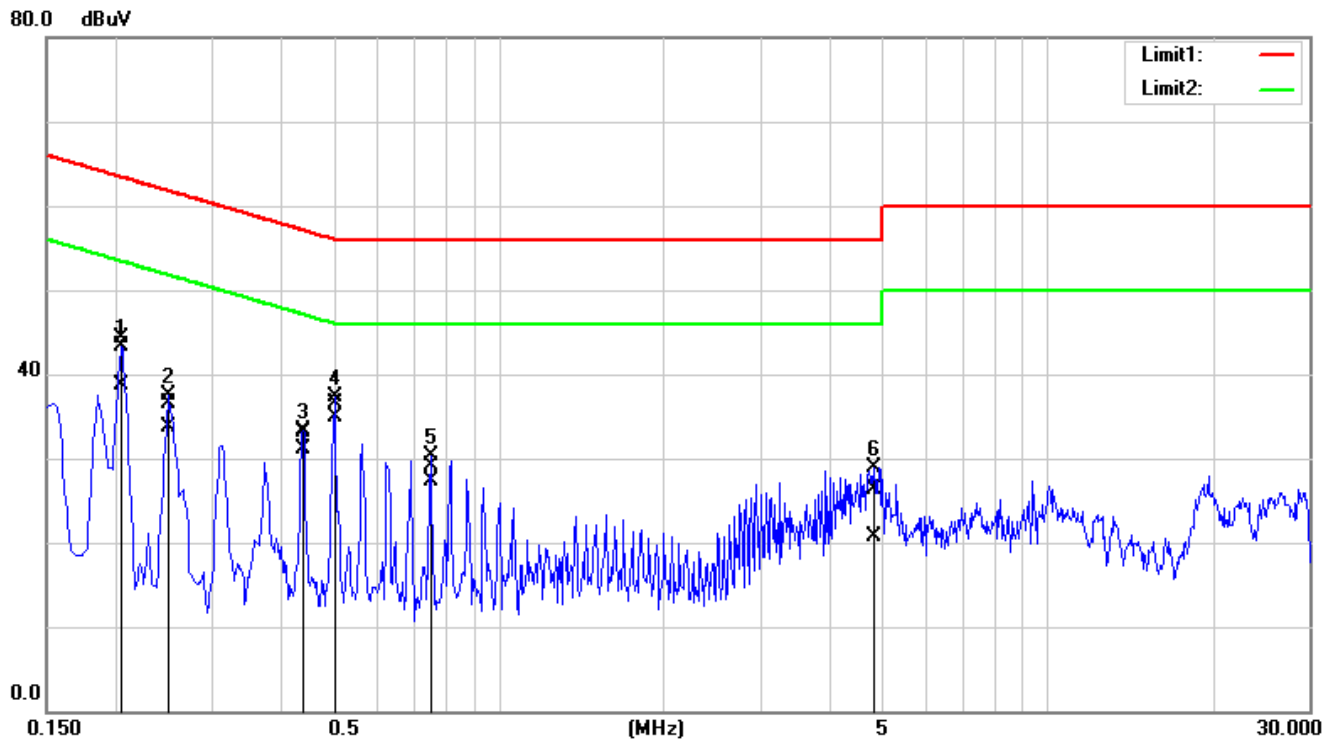

**Conducted emissions (Line 2)**

