



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM161100966101
Page: 1 of 22

1

FCC REPORT

Application No.: SZEM1611009661CR
Applicant: OSIM International Pte. Ltd.
Manufacturer: Body Source Technology (Shenzhen) Co., Ltd
Factory: Body Source Technology (Shenzhen) Co., Ltd
Product Name: uCrown3
Model No.(EUT): OS-158
Trade Mark: OSIM
FCC ID: ARG-OS-158
Standards: 47 CFR Part 15, Subpart C (2015)
Date of Receipt: 2016-11-16
Date of Test: 2016-11-16 to 2016-11-24
Date of Issue: 2016-11-25

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-11-25		Original

Authorized for issue by:				
Tested By		 <hr/>		2016-11-24
				Date
Checked By		 <hr/>		2016-11-25
				Date
		(Eric Fu) /Reviewer		



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10(2013)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.231 (b)	ANSI C63.10(2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.231 (b)/15.209	ANSI C63.10(2013)	PASS
20dB Bandwidth	47 CFR Part 15, Subpart C Section 15.231 (c)	ANSI C63.10(2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.231 (a)	ANSI C63.10(2013)	PASS



4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST LOCATION	6
5.6 TEST FACILITY	7
5.7 DEVIATION FROM STANDARDS	7
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.10 EQUIPMENT LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	10
6.1 ANTENNA REQUIREMENT	10
6.2 SPURIOUS EMISSIONS	11
6.2.1 Spurious Emissions	11
6.3 20DB BANDWIDTH	17
6.4 DWELL TIME	19
7 PHOTOGRAPHS - TEST SETUP (TEST MODEL NO.:uCrown3)	21
7.1 RADIATED EMISSION(BELOW 1G)	21
7.2 RADIATED SPURIOUS EMISSIONS	21
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	22



5 General Information

5.1 Client Information

Applicant:	OSIM International Pte. Ltd.
Address of Applicant:	65 Ubi Avenue 1, OSIM Headquarters, Singapore 408939
Manufacturer:	Body Source Technology (Shenzhen) Co., Ltd
Address of Manufacturer:	Floor 8, Building H, Gangzhilong Technology Park, Heping East Road, Longhua Street, Baoan District, Shenzhen, P.R. China.
Factory:	Body Source Technology (Shenzhen) Co., Ltd
Address of Factory:	Floor 8, Building H, Gangzhilong Technology Park, Heping East Road, Longhua Street, Baoan District, Shenzhen, P.R. China.

5.2 General Description of EUT

Name:	uCrown3
Mode No.:	OS-158
Trade Mark:	OSIM
Sample Type:	Portable production
Operation Frequency:	315MHz
Modulation Type:	ASK
Antenna Type:	Internal
Antenna Gain:	0dBi
Power Supply:	3.0V DC(1.5V x 2 "AAA" Size Batteries)



5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



SGS-CSTC Standards Technical Services Ltd.
Shenzhen Branch

Report No.: SZEM161100966101

Page: 8 of 22

5.10 Equipment List

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09



SGS-CSTC Standards Technical Services Ltd.
Shenzhen Branch


Report No.: SZEM161100966101

Page: 9 of 22

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2016-07-19	2017-07-19
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Horn Antenna(26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna Requirement

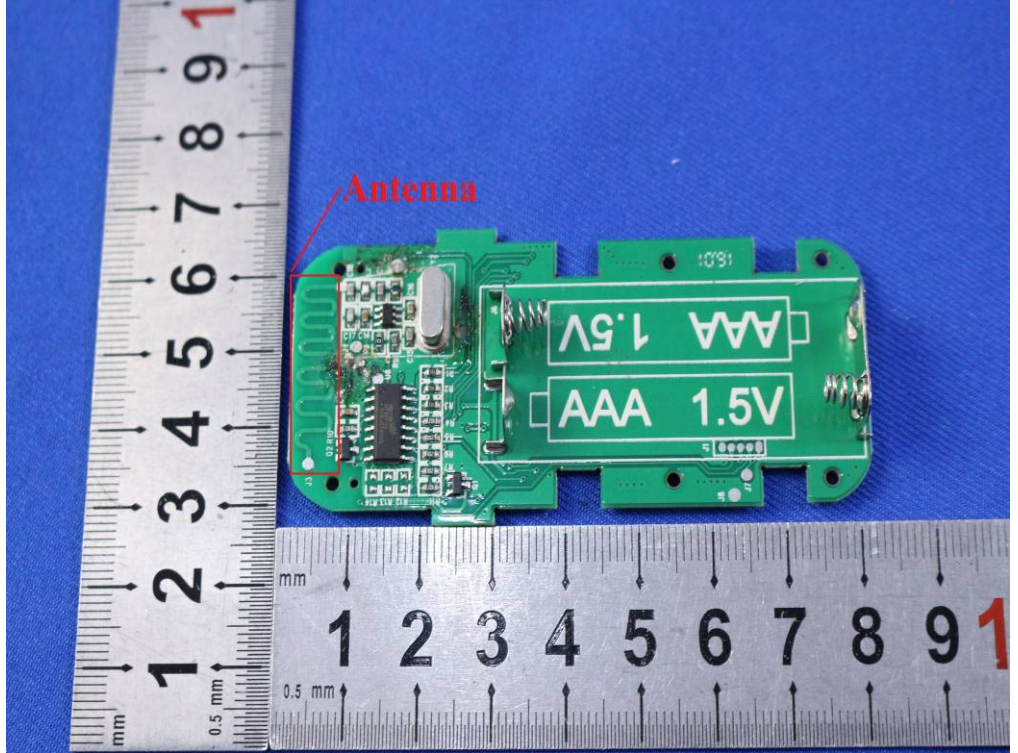Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.</p>	



6.2 Spurious Emissions

6.2.1 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	315MHz	75.62		Average Value	
		95.62		Peak Value	

<p>Test Procedure:</p>	<ol style="list-style-type: none"> For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
<p>Test Setup:</p>	

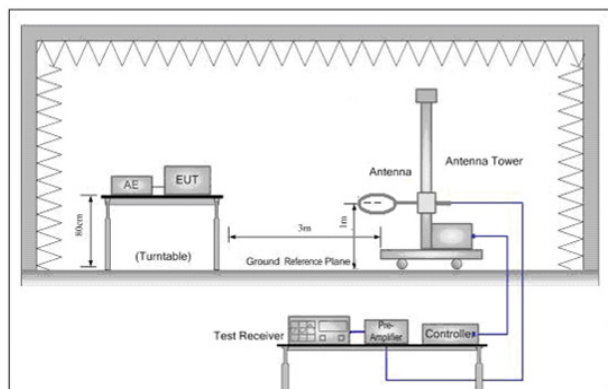


Figure 1. Below 30MHz

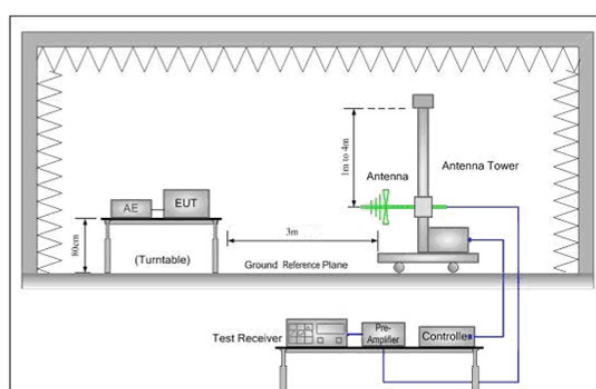


Figure 2. 30MHz to 1GHz

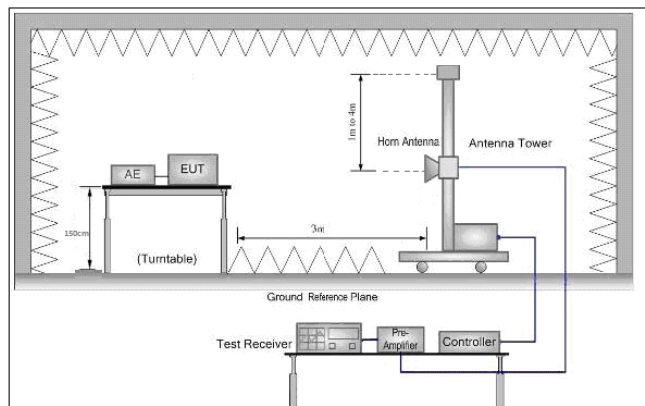


Figure 3. Above 1 GHz

Test Mode:	Pre-scan Transmitting with all function and find the worst case, only the worst case data has been recorded into report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

6.2.1.1 Field Strength Of The Fundamental Signal

Peak value:								
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
315.02	1.95	14.44	26.52	69.94	59.81	75.62	-15.81	Horizontal
315.02	1.95	14.44	26.52	66.93	56.80	75.62	-18.82	Vertical




SGS-CSTC Standards Technical Services Ltd. Shenzhen Branch

Report No.: SZEM161100966101
Page: 14 of 22

6.2.1.2 Spurious Emissions

30MHz~1GHz (Peak value)	
Test mode:	Transmitting

Horizontal :

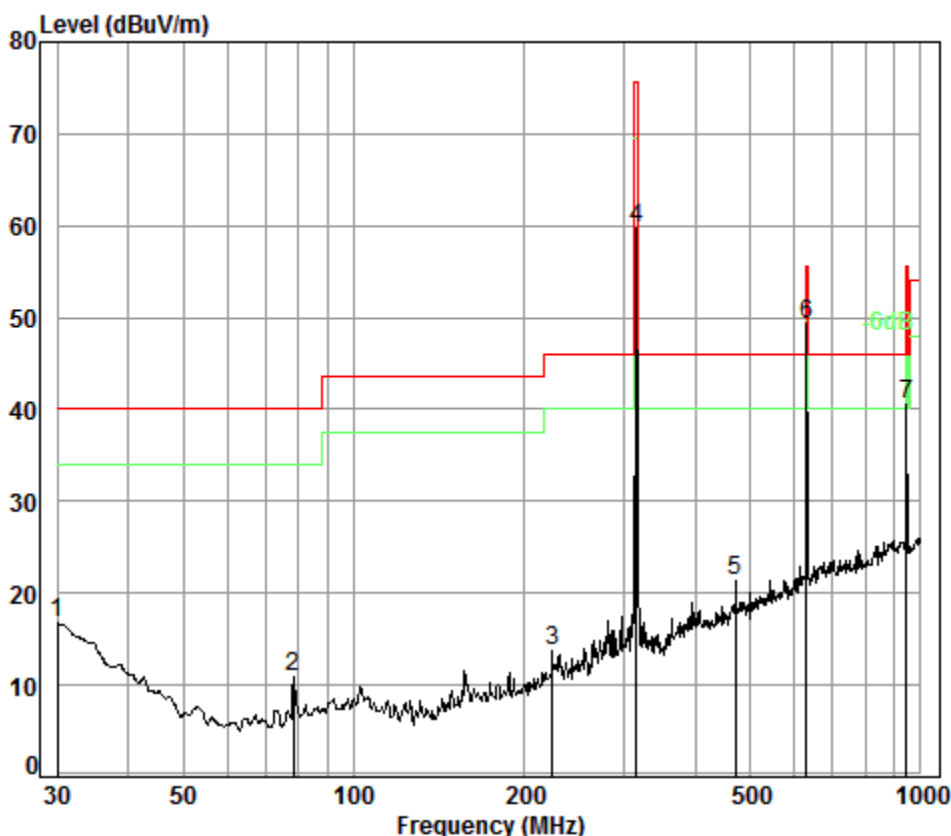

Condition: 3m HORIZONTAL

Job No. : 9661CR

Test mode: TX

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	30.00	0.60	18.70	27.36	24.80	40.00	-23.26
2	78.41	1.05	7.57	27.23	29.46	40.00	-29.15
3	223.73	1.54	11.43	26.62	27.42	46.00	-32.23
4	315.02	1.95	14.44	26.52	69.94	75.62	-15.81
5	472.18	2.50	17.70	27.56	28.80	46.00	-24.56
6 pp	629.48	2.76	20.52	27.50	53.49	55.62	-6.35
7	945.44	3.65	23.30	26.58	40.10	55.62	-15.15




SGS-CSTC Standards Technical Services Ltd.
Shenzhen Branch

Report No.: SZEM161100966101

Page: 15 of 22

Vertical

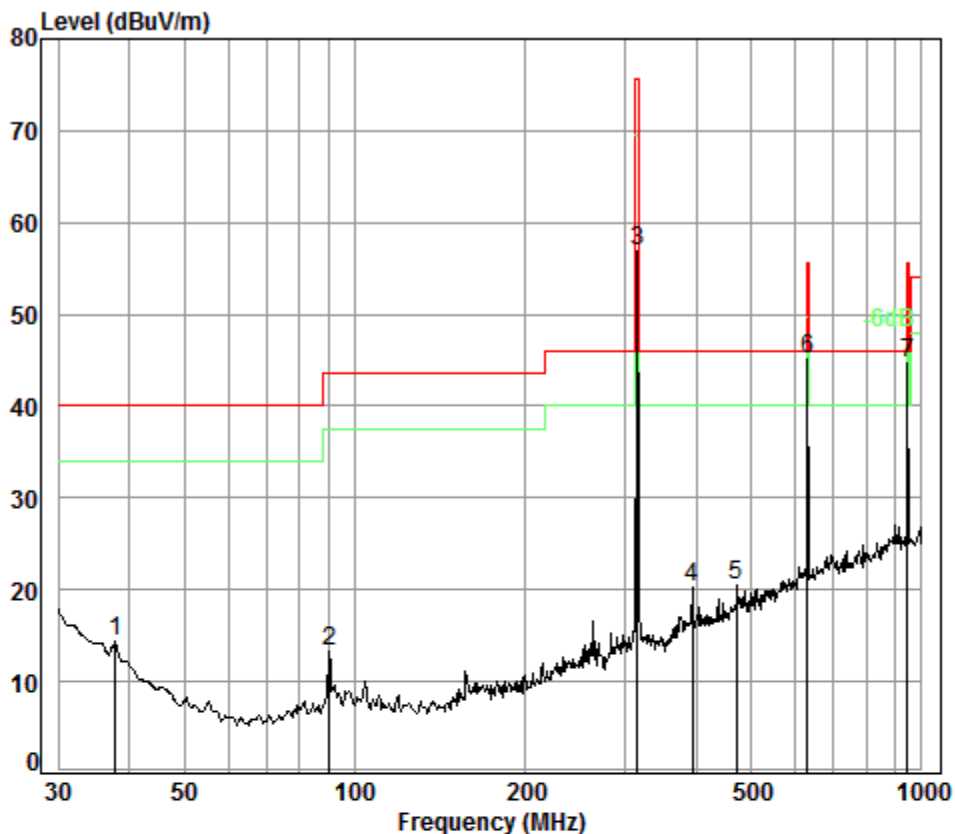

Condition: 3m VERTICAL

Job No. : 9661CR

Test mode: TX

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	37.81	0.60	14.33	27.33	26.75	14.35	40.00	-25.65
2	90.22	1.10	8.71	27.21	30.75	13.35	43.50	-30.15
3	315.02	1.95	14.44	26.52	66.93	56.80	75.62	-18.82
4	393.47	2.18	16.22	27.09	29.03	20.34	46.00	-25.66
5	472.18	2.50	17.70	27.56	27.81	20.45	46.00	-25.55
6 pp	629.48	2.76	20.52	27.50	49.45	45.23	55.62	-10.39
7	945.44	3.65	23.30	26.58	44.25	44.62	55.62	-11.00



SGS-CSTC Standards Technical Services Ltd.
Shenzhen Branch

Report No.: SZEM161100966101

Page: 16 of 22

Above 1GHz

Peak value:

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1260.816	24.77	4.17	38.03	47.04	37.95	74	-36.05	Vertical
1574.380	26.14	4.56	38.07	60.93	53.56	74	-20.44	Vertical
1891.438	27.41	4.91	38.09	57.05	51.28	74	-22.72	Vertical
2203.912	28.50	5.19	38.12	48.31	43.88	74	-30.12	Vertical
2832.915	30.70	5.77	38.19	50.25	48.53	74	-25.47	Vertical
3150.399	31.59	6.05	38.29	48.26	47.61	74	-26.39	Vertical
1216.954	24.56	4.10	38.03	44.41	35.04	74	-38.96	Horizontal
1574.380	26.14	4.56	38.07	55.27	47.90	74	-26.10	Horizontal
1891.438	27.41	4.91	38.09	49.41	43.64	74	-30.36	Horizontal
2250.510	28.65	5.23	38.13	45.49	41.24	74	-32.76	Horizontal
2837.478	30.72	5.77	38.19	53.72	52.02	74	-21.98	Horizontal
4082.252	33.60	6.80	38.74	45.83	47.49	74	-26.51	Horizontal


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

6.3 20dB Bandwidth

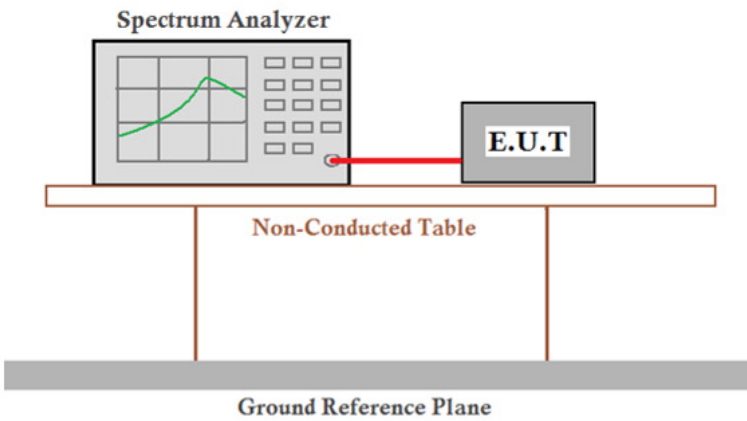Test Requirement:	47 CFR Part 15C Section 15.231 (c)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Mode:	Pre-scan Transmitting with all function and find the worst case, only the worst case data has been recorded into report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

20dB bandwidth (MHz)	Limit (MHz)	Results
0.430	0.7875	Pass




SGS-CSTC Standards Technical Services Ltd. Shenzhen Branch


Report No.: SZEM161100966101

Page: 18 of 22

Test plot as follows:

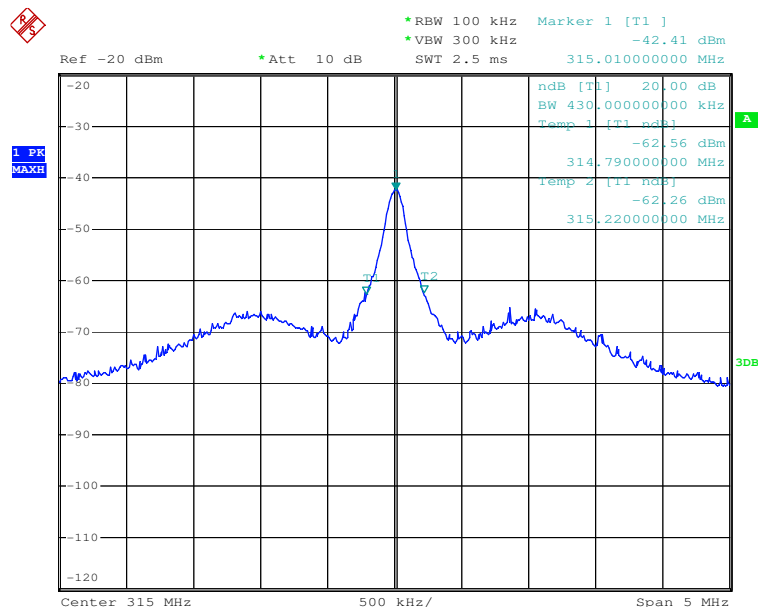

6.4 Dwell Time

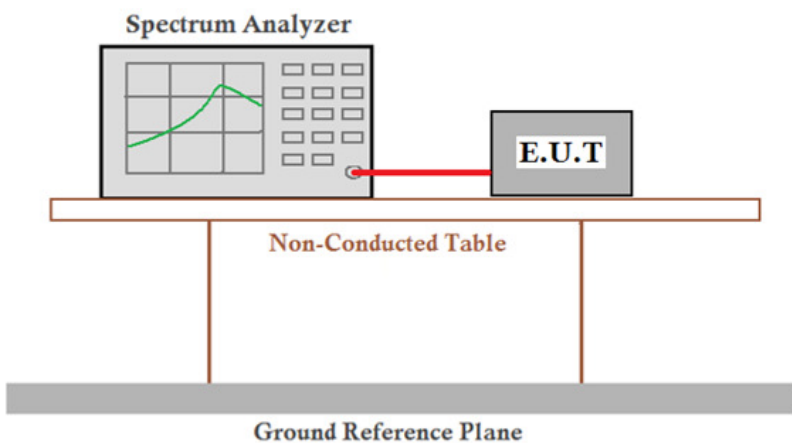Test Requirement:	47 CFR Part 15C Section 15.231 (a) (1)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	Not more than 5 seconds
Test Mode:	Pre-scan Transmitting with all function and find the worst case, only the worst case data has been recorded into report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

Test item	Limit	Results
Transmitting time	≤5S	Pass




SGS-CSTC Standards Technical Services Ltd. Shenzhen Branch

Report No.: SZEM161100966101

Page: 20 of 22


Test plot as follows:

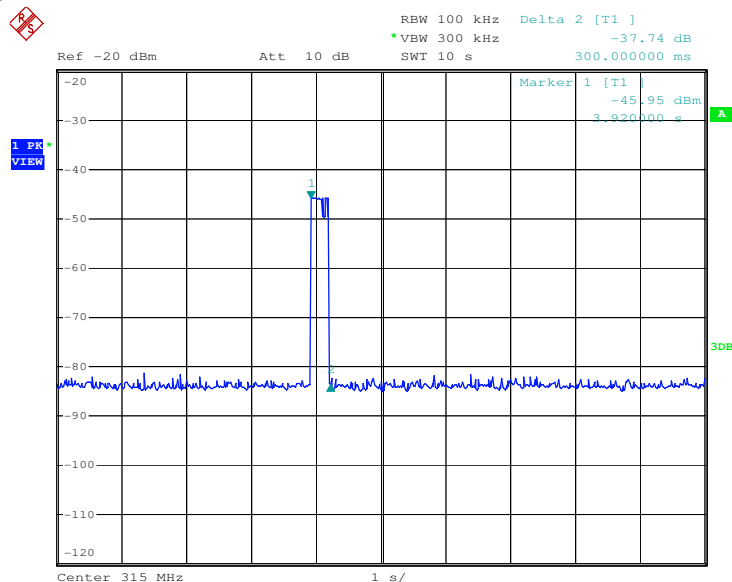


7 Photographs - Test setup

(Test Model No.:uCrown3)

7.1 Radiated Emission(below 1G)

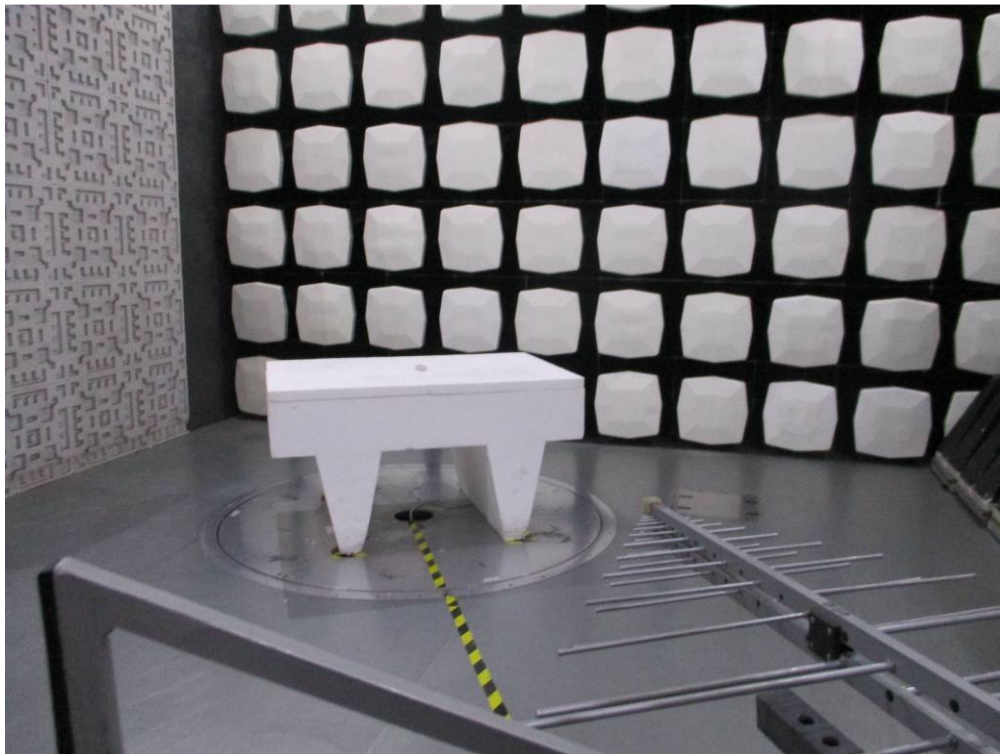

7.2 Radiated Spurious Emissions

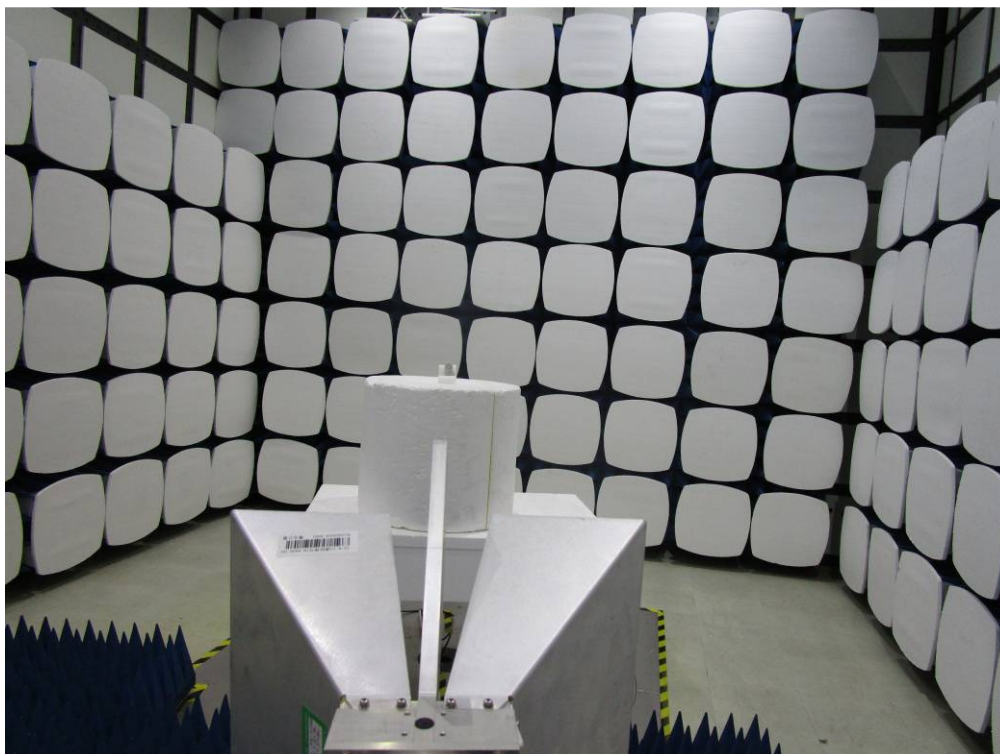



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1611009661CR.