



### FCC Part 15, Subpart C Test Report

FCC ID: ARS-10BDL3351T

Applicant: Top Victory Electronics (Taiwan) Co Ltd

Address: 10F., No.230, Liancheng Rd., Zhonghe Dist., New Taipei City, 23553  
Taiwan

Manufacturer: MMD(Shanghai)Electronics Technology Co Ltd

Address: Room 5060A No 2 Building 555 Dong Chan Road, Min Hang District,  
SHANGHAI 200241, CHINA

Product: Colour Monitor

Brand: Philips

Test Model(s): 10BDL3351T

Series Model(s): See section 2.1

Test Date: Mar. 13, 2024 ~ Apr. 02, 2024

Issued Date: Apr. 03, 2024

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park,  
HuangJiang Town, Dongguan City, People's Republic of China

Test Firm Registration No.: 915896

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

*Nature Lee*

Nature Lee

Reviewed by :

*Dragon Long*

Dragon Long

Approved by :

*Scott He*

Scott He

"This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver."

**Table of Contents**

<b>Release Control Record</b> .....	<b>4</b>
<b>1. Summary of Test Results</b> .....	<b>5</b>
1.1 Measurement Uncertainty .....	5
1.2 Modification Record .....	5
<b>2. General Information</b> .....	<b>6</b>
2.1 General Description of EUT .....	6
2.2 Description of Test Channels .....	7
2.3 Test Mode Applicability and Tested Channel Detail .....	7
2.4 Description of Support Units .....	9
2.5 Configuration of System under Test .....	9
2.6 Duty Cycle of Test Signal .....	10
<b>3. Test Types and Results</b> .....	<b>11</b>
3.1 Radiated Emission and Band-edge Measurement .....	11
3.1.1 Limits of radiated emission and band-edge measurement .....	11
3.1.2 Test Instruments .....	12
3.1.3 Test Procedures .....	13
3.1.4 Deviation from Test Standard .....	14
3.1.5 Test Setup .....	15
3.1.6 EUT Operating Conditions .....	16
3.1.7 Test Results .....	17
3.2 Conducted Emission Measurement .....	29
3.2.1 Limits of Conducted Emission Measurement .....	29
3.2.2 Test Instruments .....	29
3.2.3 Test Procedures .....	29
3.2.4 Deviation from Test Standard .....	29
3.2.5 Test setup .....	30
3.2.6 EUT Operating Conditions .....	30
3.2.7 Test Results .....	31
3.3 6dB Bandwidth Measurement .....	33
3.3.1 Limits of 6dB Bandwidth Measurement .....	33
3.3.2 Test Setup .....	33
3.3.3 Test Instruments .....	33
3.3.4 Test Procedure .....	34
3.3.5 Deviation from Test Standard .....	34
3.3.6 EUT Operating Conditions .....	34
3.3.7 Test Result .....	35
3.4 Occupied Bandwidth Measurement .....	37
3.4.1 Test Setup .....	37
3.4.2 Test Instruments .....	37
3.4.3 Test Procedure .....	37
3.4.4 Deviation from Test Standard .....	37
3.4.5 EUT Operating Conditions .....	37
3.4.6 Test Results .....	38
3.5 Conducted Output Power Measurement .....	40
3.5.1 Limits of Conducted Output Power Measurement .....	40
3.5.2 Test Setup .....	40
3.5.3 Test Instruments .....	40
3.5.4 Test Procedures .....	40
3.5.5 Deviation from Test Standard .....	42
3.5.6 EUT Operating Conditions .....	42
3.5.7 Test Results .....	43

Test Report No.: 23122202-02-RF-US-02

4.1	Power Spectral Density Measurement .....	46
4.1.1	Limits of Power Spectral Density Measurement.....	46
4.1.2	Test Setup .....	46
4.1.3	Test Instruments .....	46
4.1.4	Test Procedure .....	47
4.1.5	Deviation from Test Standard.....	47
4.1.6	EUT Operating Condition .....	47
4.1.7	Test Results.....	48
4.2	Conducted Out of Band Emission Measurement .....	50
4.2.1	Limits of Conducted Out of Band Emission Measurement.....	50
4.2.2	Test Setup .....	50
4.2.3	Test Instruments .....	50
4.2.4	Test Procedure .....	51
4.2.5	Deviation from Test Standard.....	51
4.2.6	EUT Operating Condition .....	51
4.2.7	Test results .....	52
<b>4.</b>	<b>Pictures of Test Arrangements .....</b>	<b>56</b>
<b>5.</b>	<b>Test Instruments.....</b>	<b>57</b>
	<b>Appendix – Information on The Testing Laboratories.....</b>	<b>58</b>

Test Report No.: 23122202-02-RF-US-02

**Release Control Record**

Issue No.	Description	Date Issued
23122202-02-RF-US-02	Original Release	Apr. 03, 2024

**1. Summary of Test Results**

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013			
Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used. The device is professionally installed

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class A (DoC). The test report has been issued separately.

**1.1 Measurement Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emission	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

**1.2 Modification Record**

There were no modifications required for compliance.

**2. General Information****2.1 General Description of EUT**

Product	Colour Monitor
Test Model(s)	10BDL3351T
Sample No.	HS2403020002; HS2403020003
Series Model(s)	10BDL***** The "*" could be any alphanumeric character including blank for marketing differentiation.
Status of EUT	Engineering Prototype
Power Supply Rating	DC 12V from Adapter or DC 48V from POE
Modulation Type	GFSK for DTS
Transfer Rate	1 Mbps, 2Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Maximum Output Power	4.87dBm (Peak)
Antenna Type	PIFA Antenna
Antenna Gain	2.2dBi Gain
Antenna Connector	I-PEX
Accessory Device	Adapter Cable: Unshielded, 180cm

## Note:

1. Please refer to the EUT photo document (Reference No.: 23122202-02-01&02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
3. For the test results, the EUT had been tested with all conditions, and only the worst case was shown in the test report.
4. Model difference: These models are only different from model name for trade purpose.
5. For the test results, the EUT had been tested with all power supply type, and only the worst case was shown in the test report.

## 2.2 Description of Test Channels

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
<b>0</b>	<b>2402</b>	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	<b>19</b>	<b>2440</b>	29	2460	<b>39</b>	<b>2480</b>

## 2.3 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Radiated	AC Power Conducted Emission	N/A	N/A	N/A	DC12V from adapter via AC120V input
Radiated	Radiated Emissions	√	√	√	DC12V from adapter via AC120V input
Antenna Port Conducted Measurement	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	6dB Bandwidth	N/A	N/A	N/A	
	Occupied Bandwidth Measurement	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Power Spectral Density	N/A	N/A	N/A	

- \*: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on **Z-plane**.
- "N/A" means no effect.

### Test Condition:

Applicable test items	Environmental Conditions	Test Date	Tested by
Radiated Emissions	24.0deg. C, 55%RH	Mar. 24, 2024	Hua
Antenna Port Conducted Measurement	25.3deg. C, 54%RH	Apr. 01, 2024	Dragon Long

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)

Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)

E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release

[Ver. 1.5](#)

**Radiated Emission Test (Above 1GHz):**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	2
-	0 to 39	0, 19, 39	GFSK	1

**Radiated Emission Test (Below 1GHz):**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	2
-	0 to 39	39	GFSK	1

**Power Line Conducted Emission Test:**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	2
-	0 to 39	39	GFSK	1

**Antenna Port Conducted Measurement:**

\*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	2
-	0 to 39	0, 19, 39	GFSK	1




**2.4 Description of Support Units**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.



No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook	HUAWEI	NbD-WFH9	EUPEM21725002655	N/A
2	Notebook	DELL	Inspiron 14R Aluminum Edition	6WPG9-63PV4-RBPF2-T6RHW-W9GBP	N/A

No.	Signal Cable Description of The Above Support Units
1.	USB extension cord: Unshielded, Detachable 1.2m;

**2.5 Configuration of System under Test**

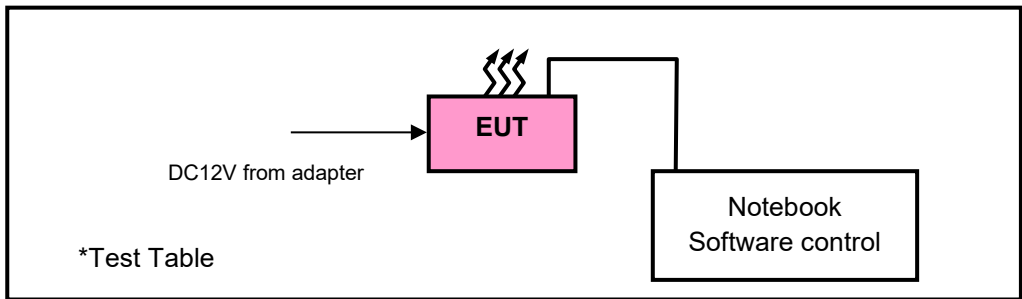

## 2.6 Duty Cycle of Test Signal

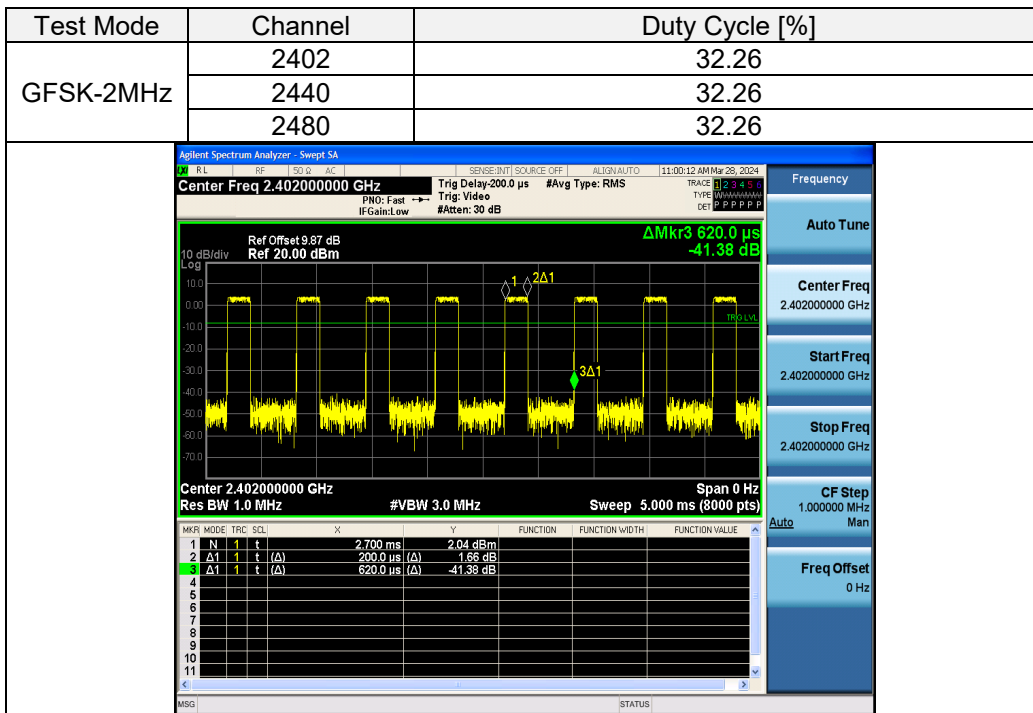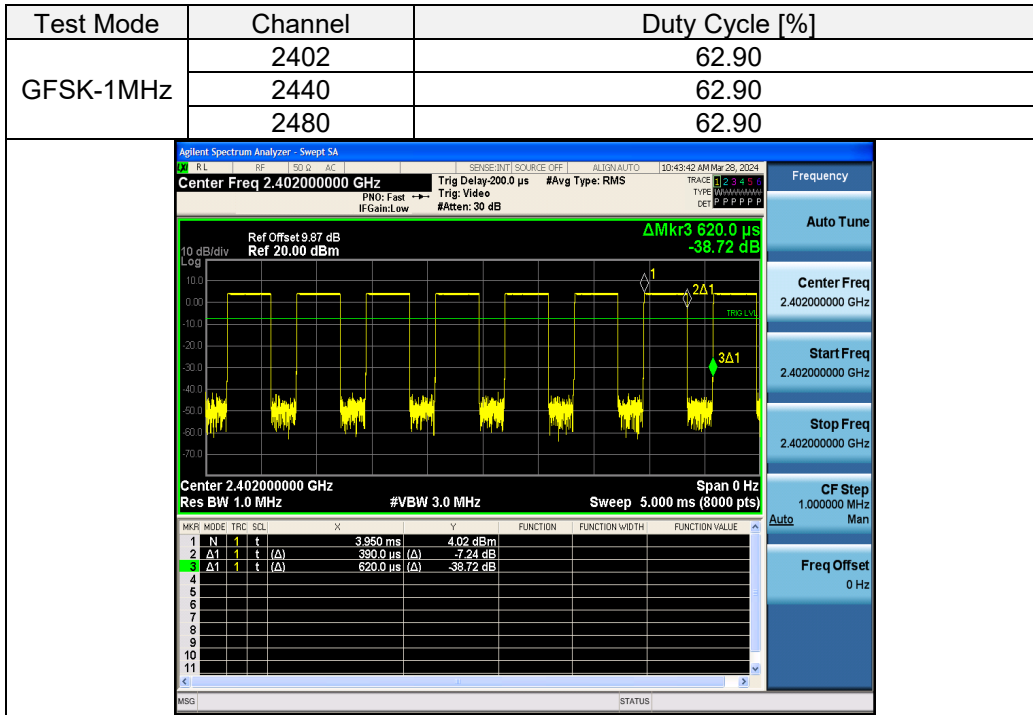

**3. Test Types and Results****3.1 Radiated Emission and Band-edge Measurement**

## 3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

\* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.  
 \* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable.

## Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2024-12-17
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2026-03-12**
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	56735	2024-05-04*
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver (9kHz~3GHz)	Rohde&Schwarz	ESPI 7	101978	2024-12-17
Broadband antenna (25MHz~2500MHz)	Schwarzbeck	VULB 9168	937	2024-08-18
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	HS-2018037	2026-03-12**
Signal Amplifier (30MHz~1000MHz)	Com-power	PAM-103	18020051	2024-08-06
Attenuator	R&S	TS2GA-6dB	18101101	N/A
Test software	FARAD	EZ_EMCV1.1.4.2	N/A	N/A

Frequency Range above 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESPI 7	101978	2024-12-17
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2026-03-12**
Test software	FARAD	EZ_EMCV1.1.4.2	N/A	N/A
Digital Multimeter	FLUKE	15B+	43512617WS	2024-08-07
Horn Antenna	Schwarzbeck	BBHA 9170	979	2024-05-03*
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2024-12-17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	25	2024-08-06
Pre-Amplifier	EMCI	EMC 184045SE	9870709	2024-12-17
Spectrum	Keysight	N9020A	MY51240612	2024-08-06

Note:

1. The calibration interval of the above test instruments is 12 months or 24 months (\*) or 36 months (\*\*).
2. The test was performed in 966.

## 3.1.3 Test Procedures

**a. Peak emission levels are measured by setting the instrument as follow:**

- 1) RBW & VBW setting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.  
 3) Sweep time = auto.  
 4) Trace mode = max hold.  
 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

**b. Average emission levels are measured by setting the instrument as follow:**● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW  $\geq 3$  \*RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW  $\geq 3$  \*RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

\*If power averaging (rms) mode was used in step 5). then the applicable correction factor is  $[10 \log(1/D)]$ , where D is the duty cycle.

\*\*If linear voltage averaging mode was used in step f). then the applicable correction factor is  $[20 \log(1/D)]$ , where D is the duty cycle.

\*\*\*If a specific emission is demonstrated to be continuous ( $D > 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that.

**● Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ( $D > 98\%$ ) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed  $\pm 2\%$ ), then the following procedure shall be used:

- 1) RBW = 1 MHz.
  - 2) VBW  $\geq 1/T$ .
  - 3) Detector = peak
  - 4) Sweep time = auto.
  - 5) Trace mode = max hold.
  - 6) Allow max hold to run for at least  $[50 \times (1/D)]$  traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (Above 1GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1GHz), which was mounted on the top of a variable-height antenna tower.
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is =10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

**3.1.4 Deviation from Test Standard**


No deviation.

### 3.1.5 Test Setup


#### Radiated emission below 30MHz:

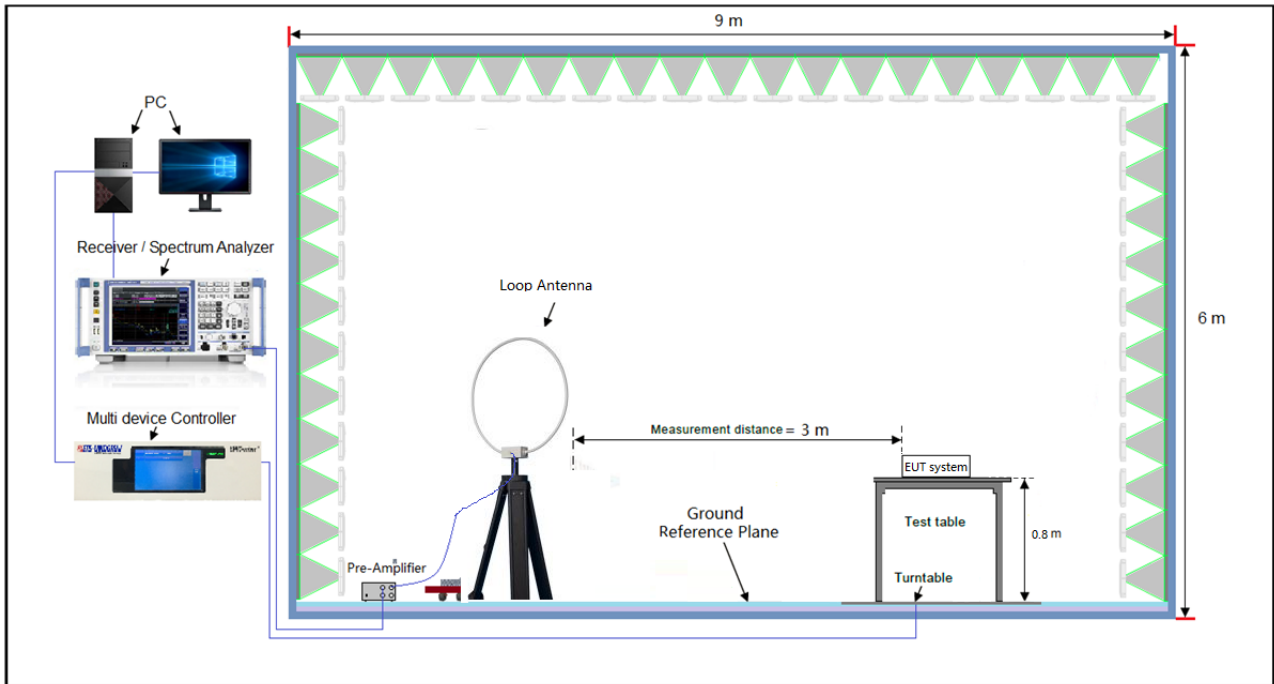

#### Frequency Range below 1GHz:

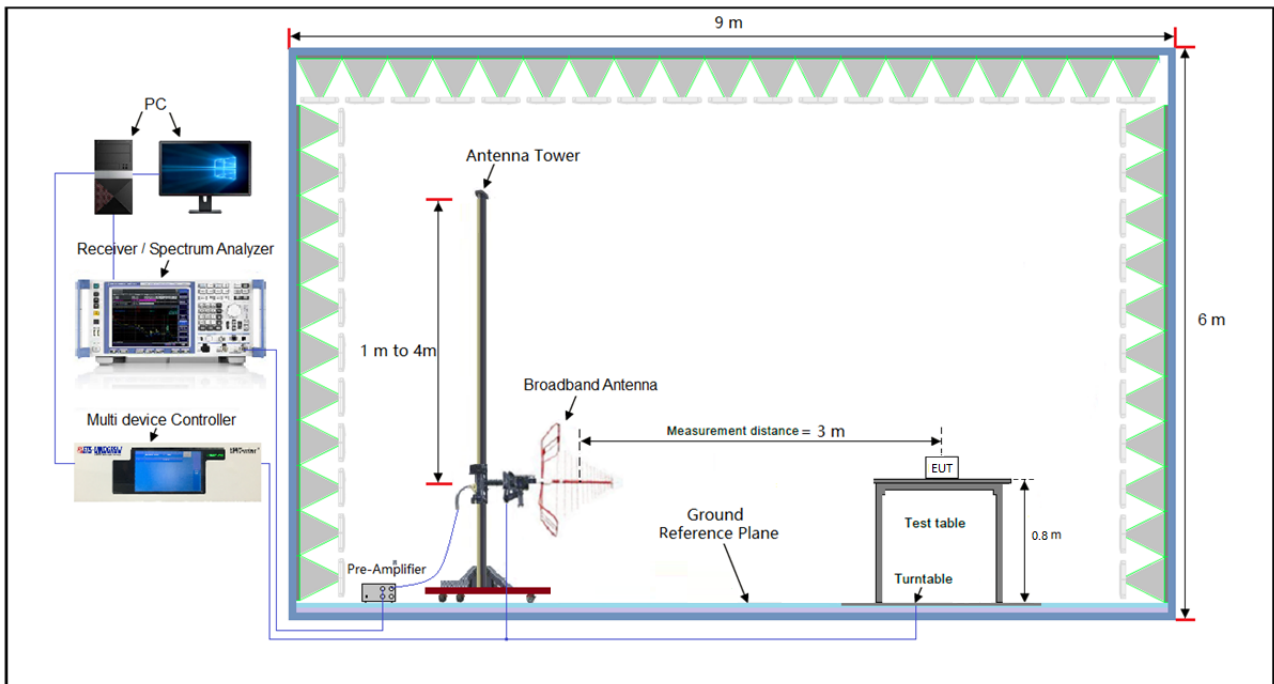

## Frequency Range above 1GHz:

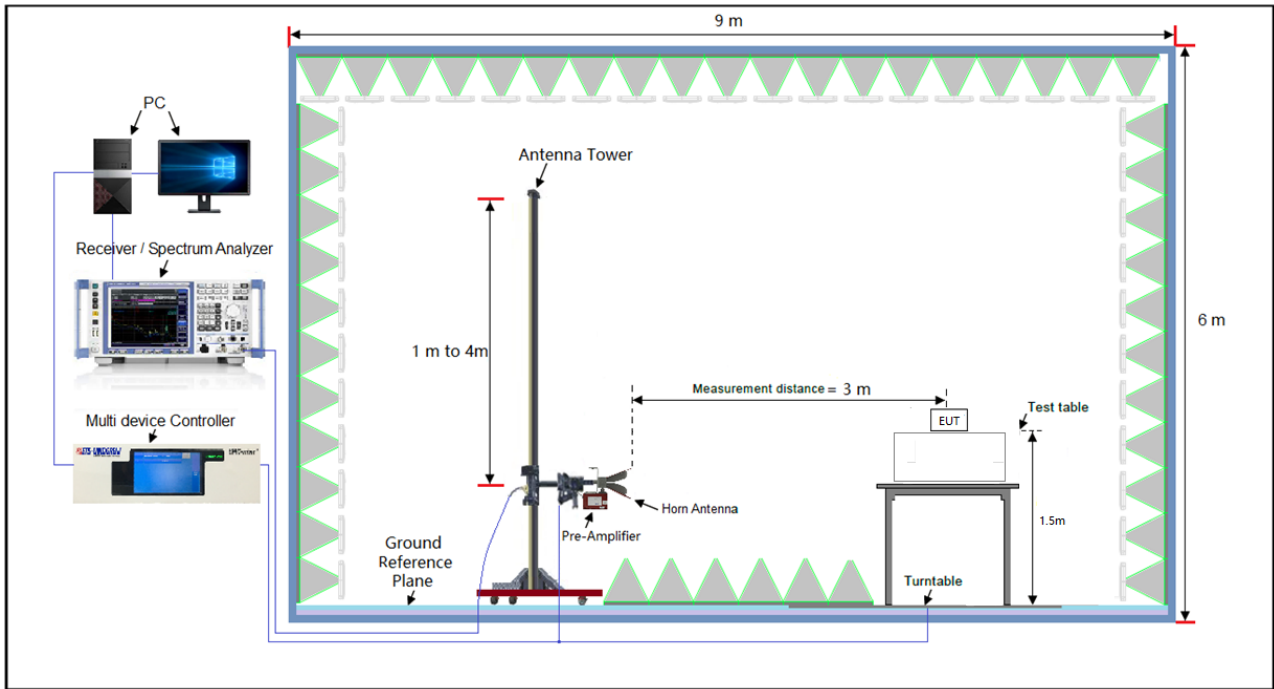

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.




### 3.1.7 Test Results

#### 9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

#### 30MHz ~ 1GHz Worst-Case Data:

Test Channel	Channel 39	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Hua

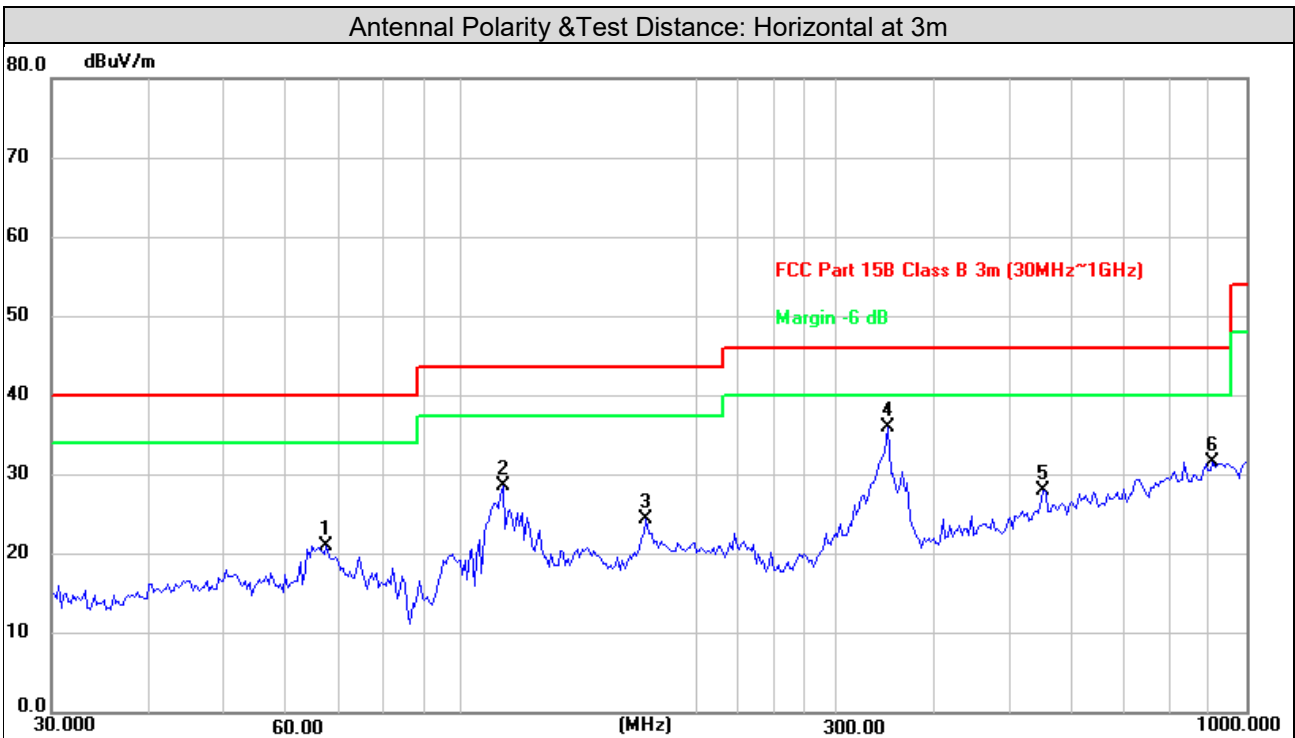


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	67.2022	37.21	-16.07	21.14	40.00	-18.86	peak	248	59
2	112.9196	44.98	-16.31	28.67	43.50	-14.83	peak	345	213
3	171.9946	38.35	-13.82	24.53	43.50	-18.97	peak	262	180
4	349.2500	48.05	-11.96	36.09	46.00	-9.91	peak	288	77
5	550.9480	33.99	-5.87	28.12	46.00	-17.88	peak	356	141
6	906.4824	30.37	1.33	31.70	46.00	-14.30	peak	252	311

#### Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Test Channel	Channel 39	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Hua

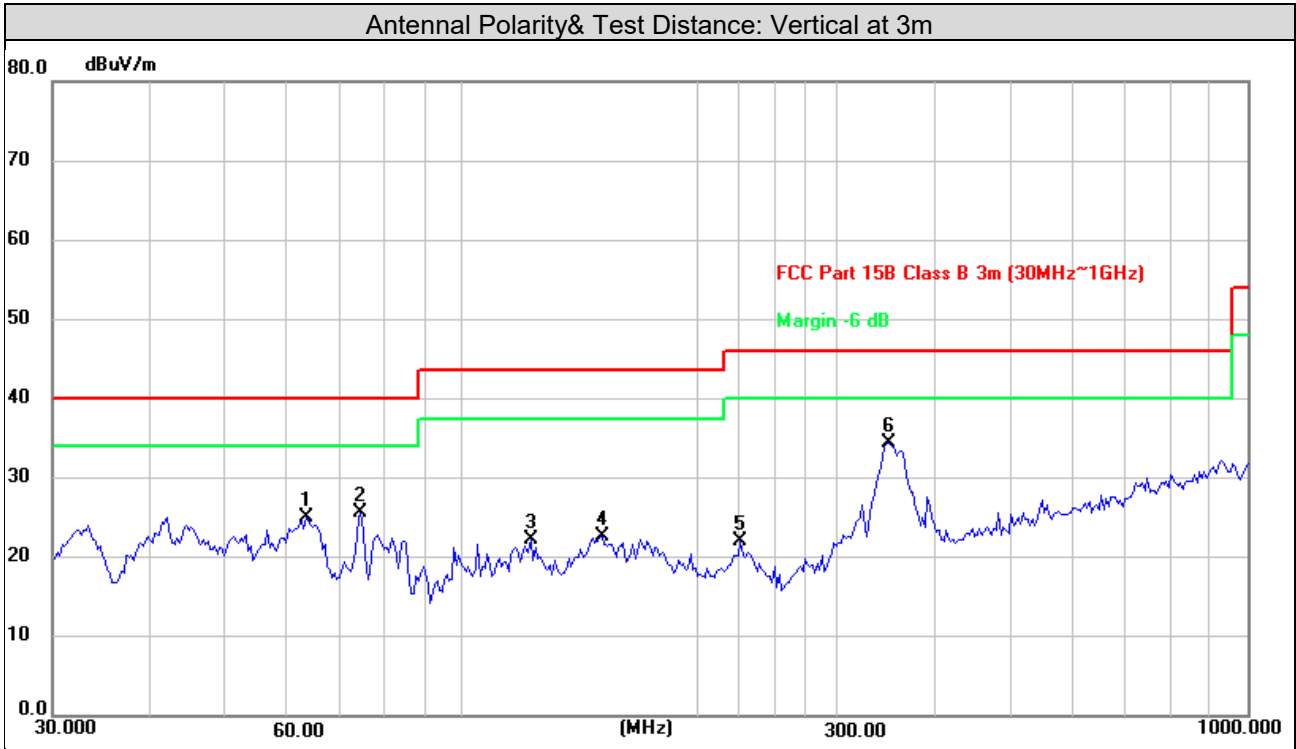


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	63.0916	40.45	-15.44	25.01	40.00	-14.99	peak	320	92
2	74.1351	43.28	-17.63	25.65	40.00	-14.35	peak	357	129
3	121.9755	37.54	-15.34	22.20	43.50	-21.30	peak	311	79
4	150.5378	36.92	-14.26	22.66	43.50	-20.84	peak	167	71
5	226.0994	37.76	-15.62	22.14	46.00	-23.86	peak	194	148
6	349.2500	46.28	-11.96	34.32	46.00	-11.68	peak	371	141

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

**Above 1GHz Data:**  
**BLE-1Mbps**

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

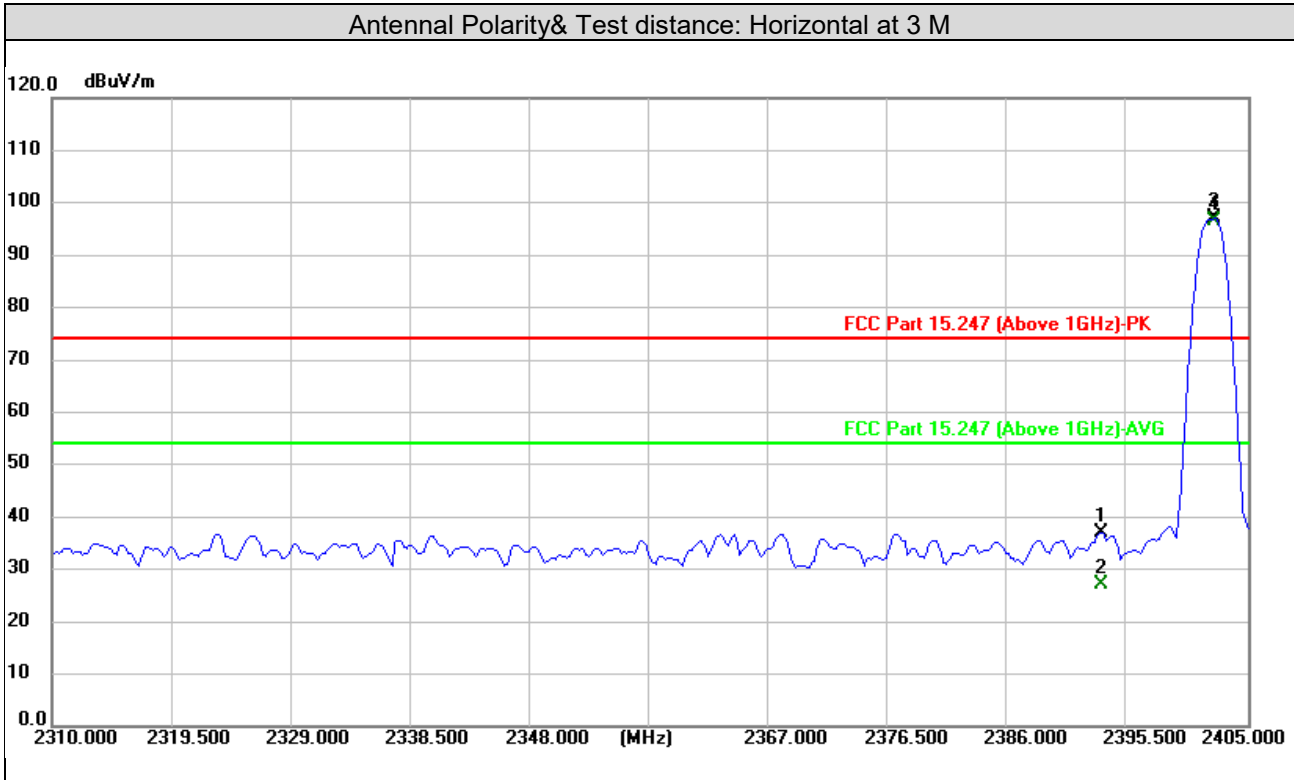


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2393.387	37.32	-0.40	36.92	74.00	-37.08	peak	100	211
2	2393.387	27.56	-0.40	27.16	54.00	-26.84	AVG	100	211
3 #	2402.335	97.39	-0.39	97.00			peak	100	211
4 #	2402.335	96.96	-0.39	96.57			AVG	100	211
5	4804.000	39.99	5.30	45.29	74.00	-28.71	peak	262	60
6	4804.000	30.22	5.30	35.52	54.00	-18.48	AVG	262	60
7	7206.000	42.10	12.40	54.50	74.00	-19.50	peak	292	194
8	7206.000	31.98	12.40	44.38	54.00	-9.62	AVG	292	194

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

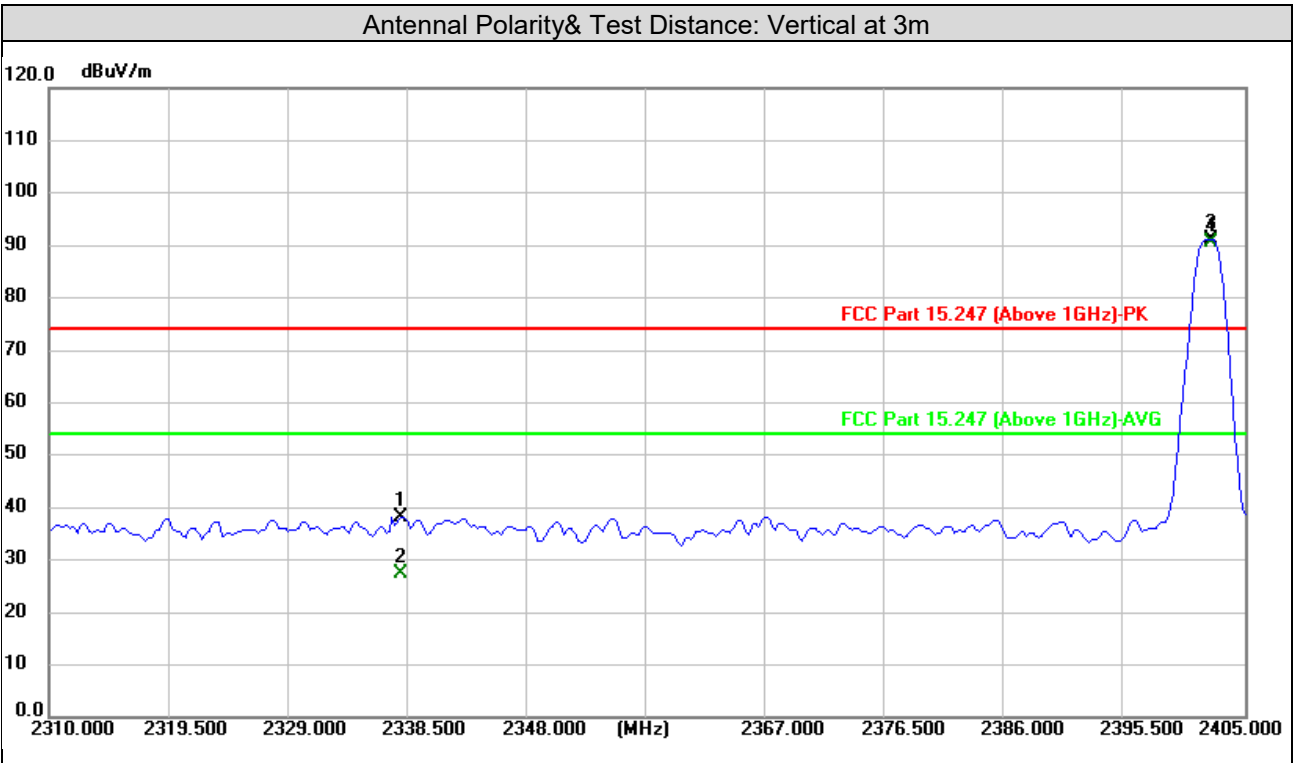

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2338.176	38.67	-0.53	38.14	74.00	-35.86	peak	254	46
2	2338.176	27.91	-0.53	27.38	54.00	-26.62	AVG	254	46
3 #	2402.335	91.66	-0.39	91.27			peak	254	46
4 #	2402.335	90.88	-0.39	90.49			AVG	254	46
5	4804.000	40.54	5.30	45.84	74.00	-28.16	peak	146	82
6	4804.000	29.26	5.30	34.56	54.00	-19.44	AVG	146	82
7	7206.000	40.05	12.40	52.45	74.00	-21.55	peak	137	334
8	7206.000	29.71	12.40	42.11	54.00	-11.89	AVG	137	334

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	98.05	-0.31	97.74			peak	122	195
2#	2440.000	97.51	-0.31	97.20			AVG	122	195
3	4880.000	40.48	6.25	46.73	74.00	-27.27	peak	191	71
4	4880.000	29.66	6.25	35.91	54.00	-18.09	AVG	191	71
5	7320.000	40.68	12.65	53.33	74.00	-20.67	peak	154	252
6	7320.000	31.22	12.65	43.87	54.00	-10.13	AVG	154	252


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	91.65	-0.31	91.34			peak	270	41
2#	2440.000	91.07	-0.31	90.76			AVG	270	41
3	4880.000	39.94	6.25	46.19	74.00	-27.81	peak	126	34
4	4880.000	30.09	6.25	36.34	54.00	-17.66	AVG	126	34
5	7320.000	40.23	12.65	52.88	74.00	-21.12	peak	163	95
6	7320.000	30.21	12.65	42.86	54.00	-11.14	AVG	163	95

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2440MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antenna Polarity& Test Distance: Horizontal at 3 M

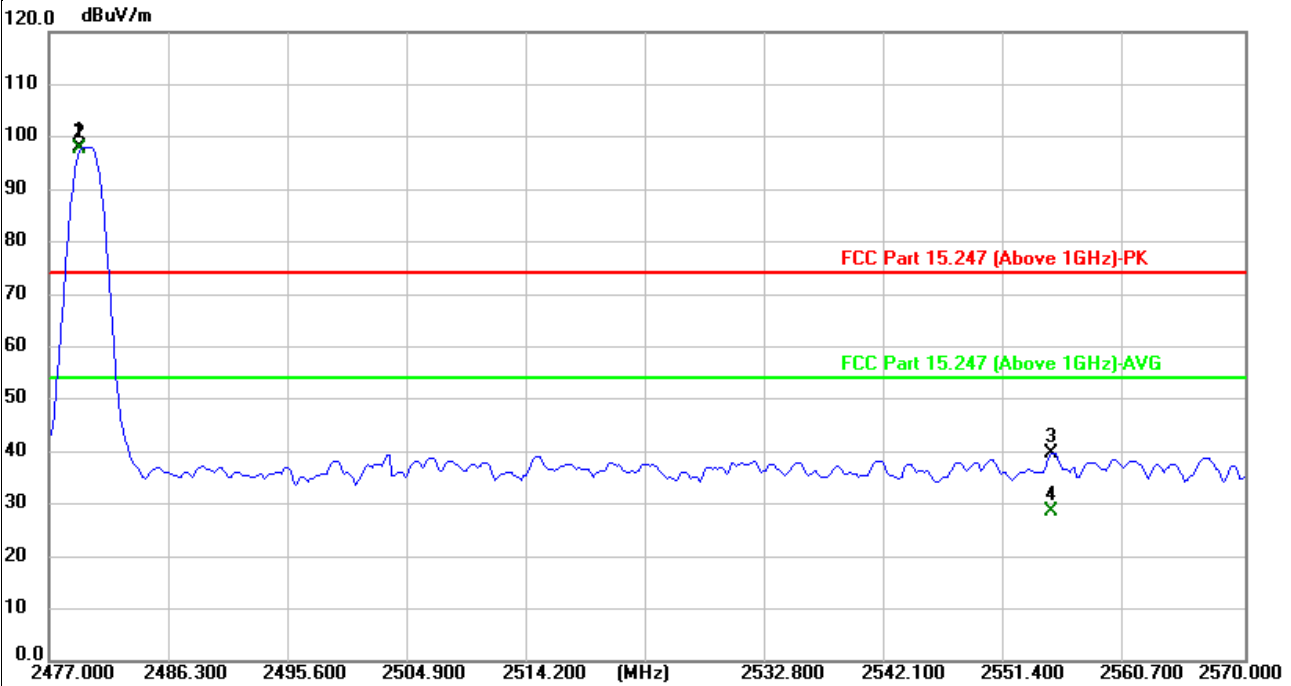


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.609	98.34	-0.21	98.13			peak	165	325
2#	2479.609	97.81	-0.21	97.60			AVG	165	325
3	2555.090	39.75	-0.05	39.70	74.00	-34.30	peak	165	325
4	2555.090	28.70	-0.05	28.65	54.00	-25.35	AVG	165	325
5	4960.000	38.96	6.16	45.12	74.00	-28.88	peak	184	249
6	4960.000	29.52	6.16	35.68	54.00	-18.32	AVG	184	249
7	7440.000	40.31	12.91	53.22	74.00	-20.78	peak	248	44
8	7440.000	31.14	12.91	44.05	54.00	-9.95	AVG	248	44

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

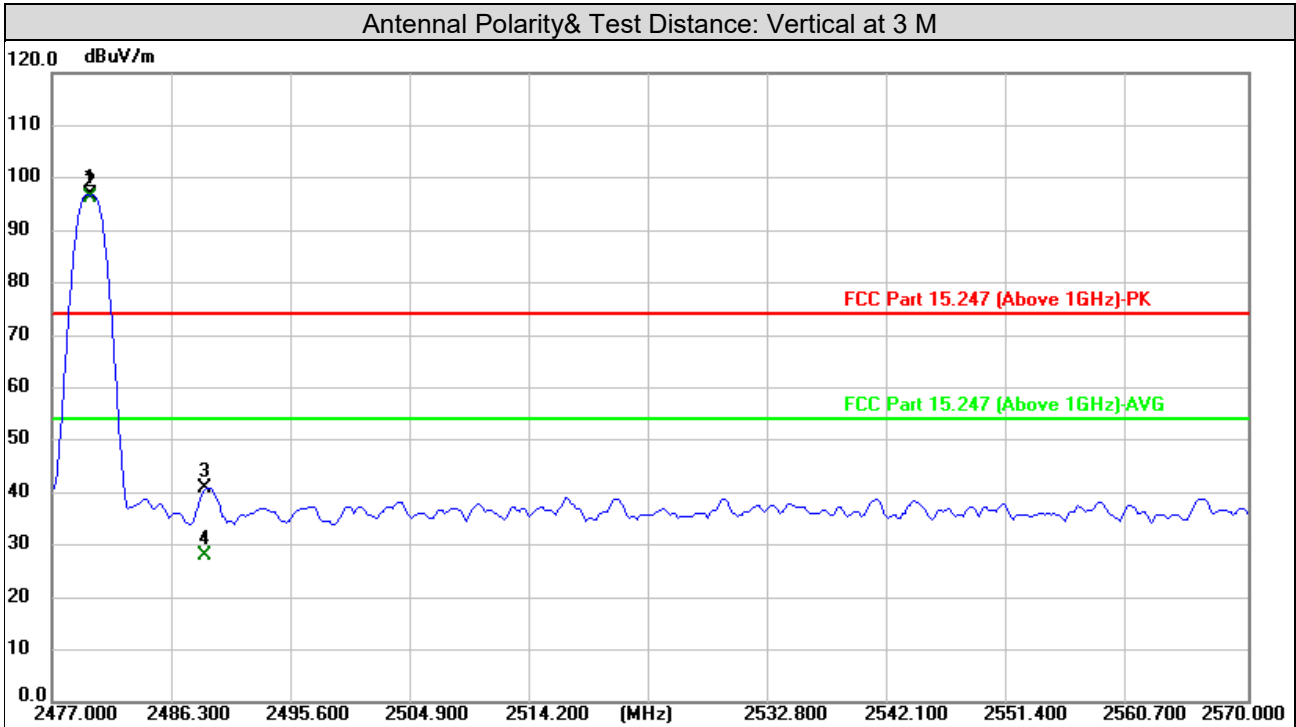


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.168	96.97	-0.21	96.76			peak	120	0
2#	2480.168	96.42	-0.21	96.21			AVG	120	0
3	2489.114	40.92	-0.19	40.73	74.00	-33.27	peak	120	0
4	2489.114	28.08	-0.19	27.89	54.00	-26.11	AVG	120	0
5	4960.000	40.68	6.16	46.84	74.00	-27.16	peak	167	86
6	4960.000	29.13	6.16	35.29	54.00	-18.71	AVG	167	86
7	7440.000	39.69	12.91	52.60	74.00	-21.40	peak	171	111
8	7440.000	28.96	12.91	41.87	54.00	-12.13	AVG	171	111

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**Above 1GHz Data:**  
**BLE-2Mbps**

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

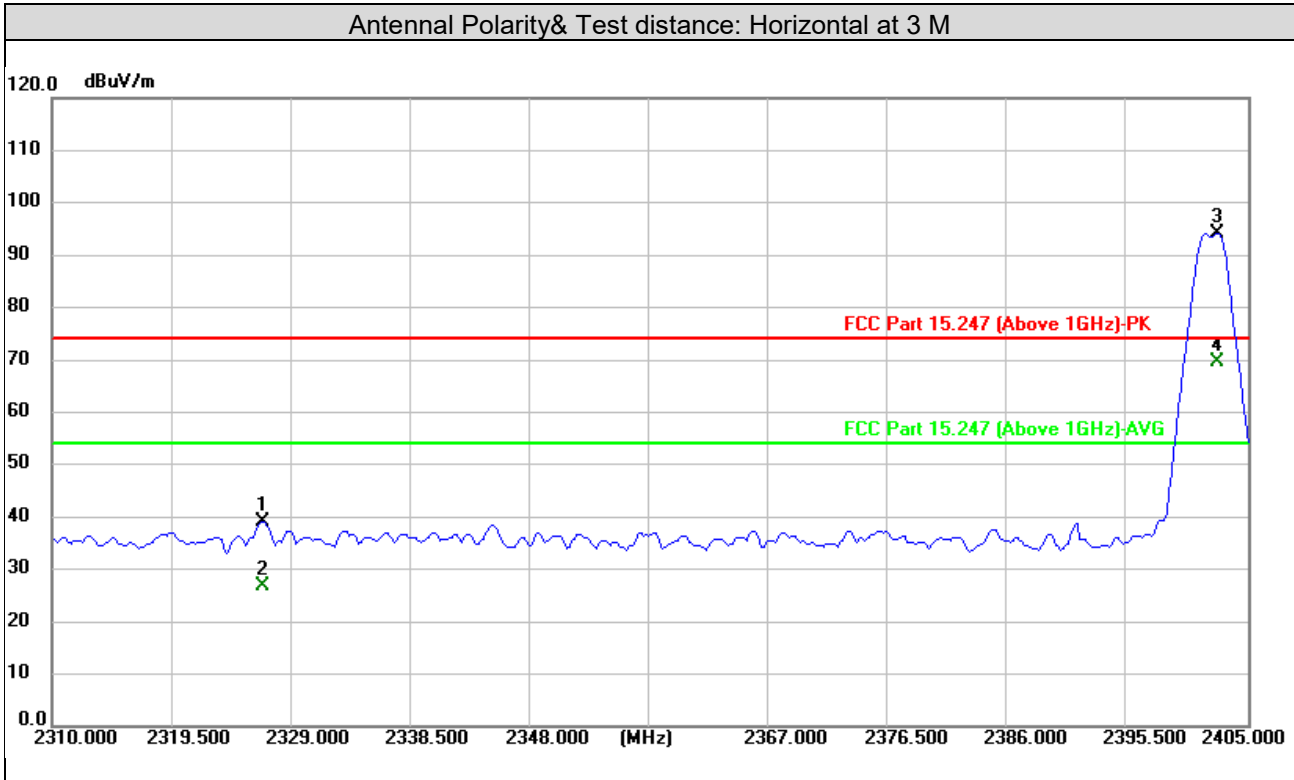


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2326.754	39.68	-0.56	39.12	74.00	-34.88	peak	170	322
2	2326.754	27.20	-0.56	26.64	54.00	-27.36	AVG	170	322
3 #	2402.525	94.48	-0.39	94.09			peak	170	322
4 #	2402.525	70.10	-0.39	69.71			AVG	170	322
5	4804.000	41.62	5.30	46.92	74.00	-27.08	peak	255	155
6	4804.000	29.50	5.30	34.80	54.00	-19.20	AVG	255	155
7	7206.000	39.87	12.40	52.27	74.00	-21.73	peak	133	234
8	7206.000	30.42	12.40	42.82	54.00	-11.18	AVG	133	234

**Remarks:**

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

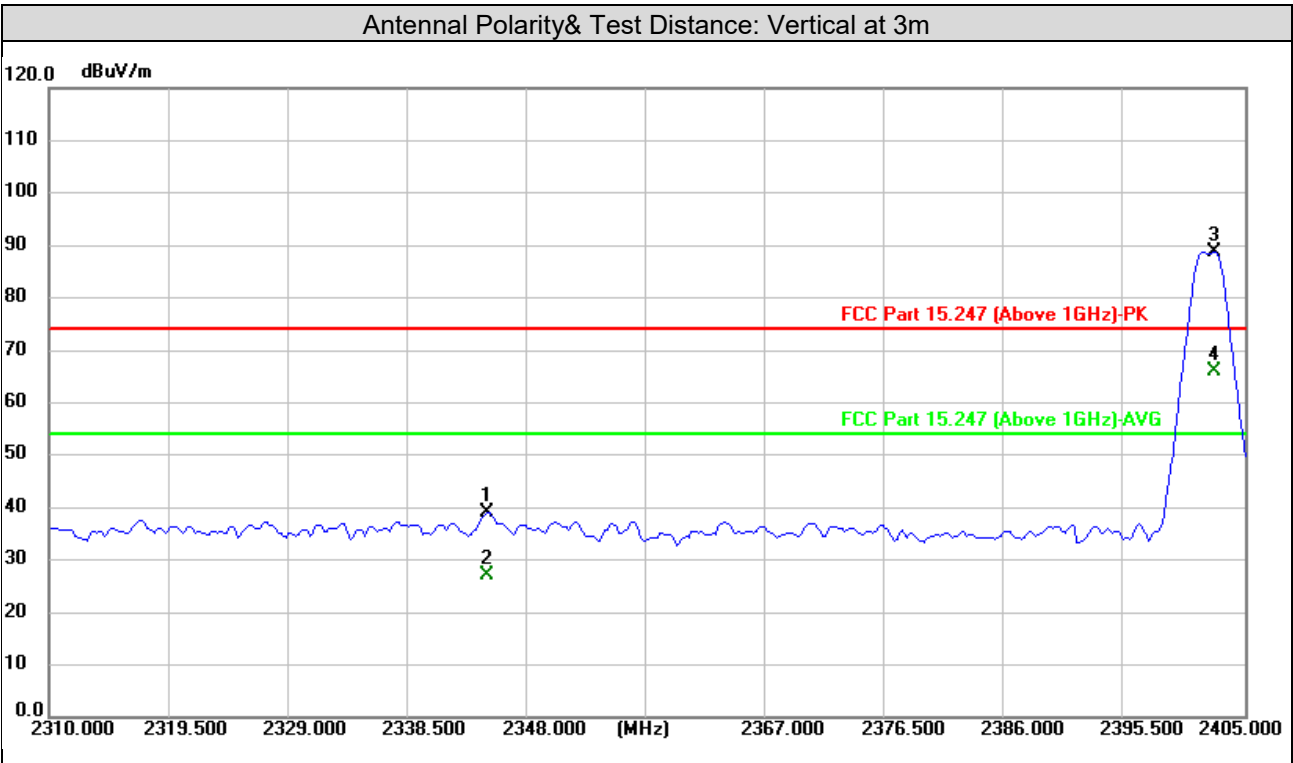

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2344.840	39.60	-0.52	39.08	74.00	-34.92	peak	280	53
2	2344.840	27.62	-0.52	27.10	54.00	-26.90	AVG	280	53
3 #	2402.525	89.16	-0.39	88.77			peak	280	53
4 #	2402.525	66.40	-0.39	66.01			AVG	280	53
5	4804.000	39.81	5.30	45.11	74.00	-28.89	peak	175	143
6	4804.000	29.33	5.30	34.63	54.00	-19.37	AVG	175	143
7	7206.000	39.85	12.40	52.25	74.00	-21.75	peak	114	57
8	7206.000	29.51	12.40	41.91	54.00	-12.09	AVG	114	57

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	99.45	-0.31	99.14			peak	161	329
2#	2440.000	75.29	-0.31	74.98			AVG	161	329
3	4880.000	40.40	6.25	46.65	74.00	-27.35	peak	298	332
4	4880.000	29.31	6.25	35.56	54.00	-18.44	AVG	298	332
5	7320.000	40.25	12.65	52.90	74.00	-21.10	peak	175	28
6	7320.000	29.64	12.65	42.29	54.00	-11.71	AVG	175	28


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	90.37	-0.31	90.06			peak	100	137
2#	2440.000	70.07	-0.31	69.76			AVG	100	137
3	4880.000	40.20	6.25	46.45	74.00	-27.55	peak	118	289
4	4880.000	29.08	6.25	35.33	54.00	-18.67	AVG	118	289
5	7320.000	39.72	12.65	52.37	74.00	-21.63	peak	177	45
6	7320.000	29.23	12.65	41.88	54.00	-12.12	AVG	177	45

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2440MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antenna Polarity& Test Distance: Horizontal at 3 M

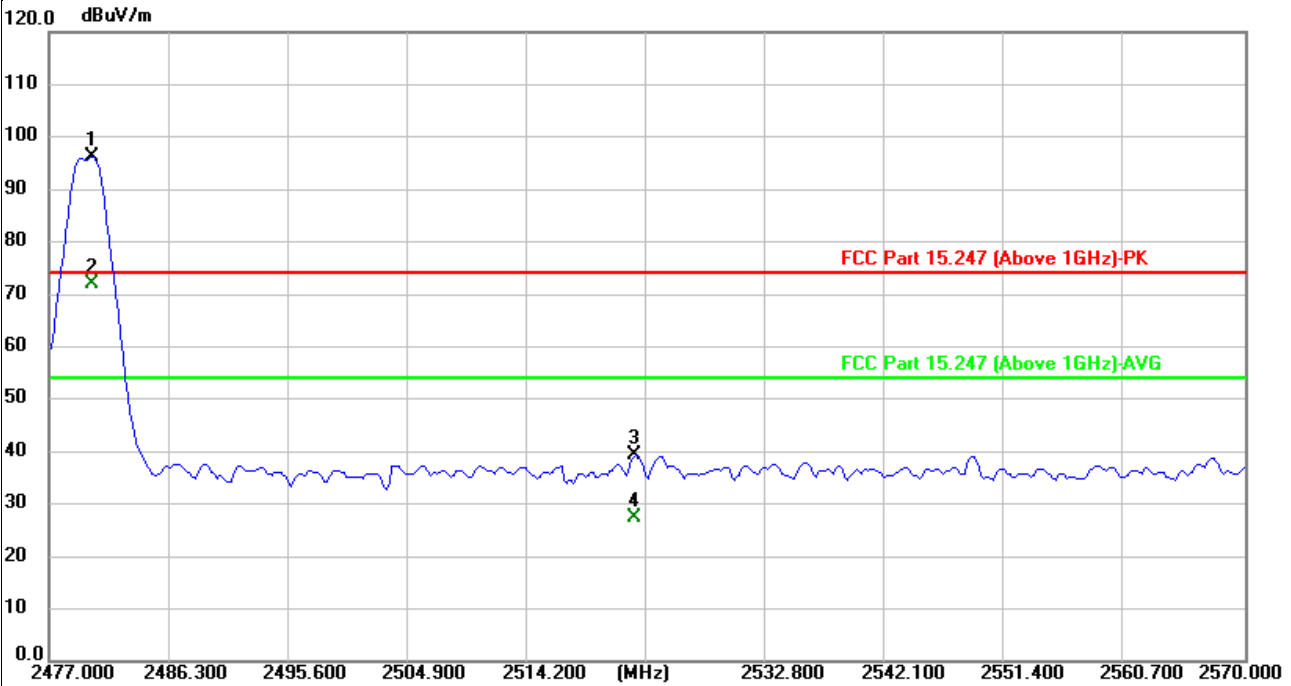


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.355	96.32	-0.21	96.11			peak	122	82
2#	2480.355	72.17	-0.21	71.96			AVG	122	82
3	2522.661	39.40	-0.11	39.29	74.00	-34.71	peak	122	82
4	2522.661	27.49	-0.11	27.38	54.00	-26.62	AVG	122	82
5	4960.000	40.76	6.16	46.92	74.00	-27.08	peak	287	119
6	4960.000	28.79	6.16	34.95	54.00	-19.05	AVG	287	119
7	7440.000	39.78	12.91	52.69	74.00	-21.31	peak	105	146
8	7440.000	29.88	12.91	42.79	54.00	-11.21	AVG	105	146

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

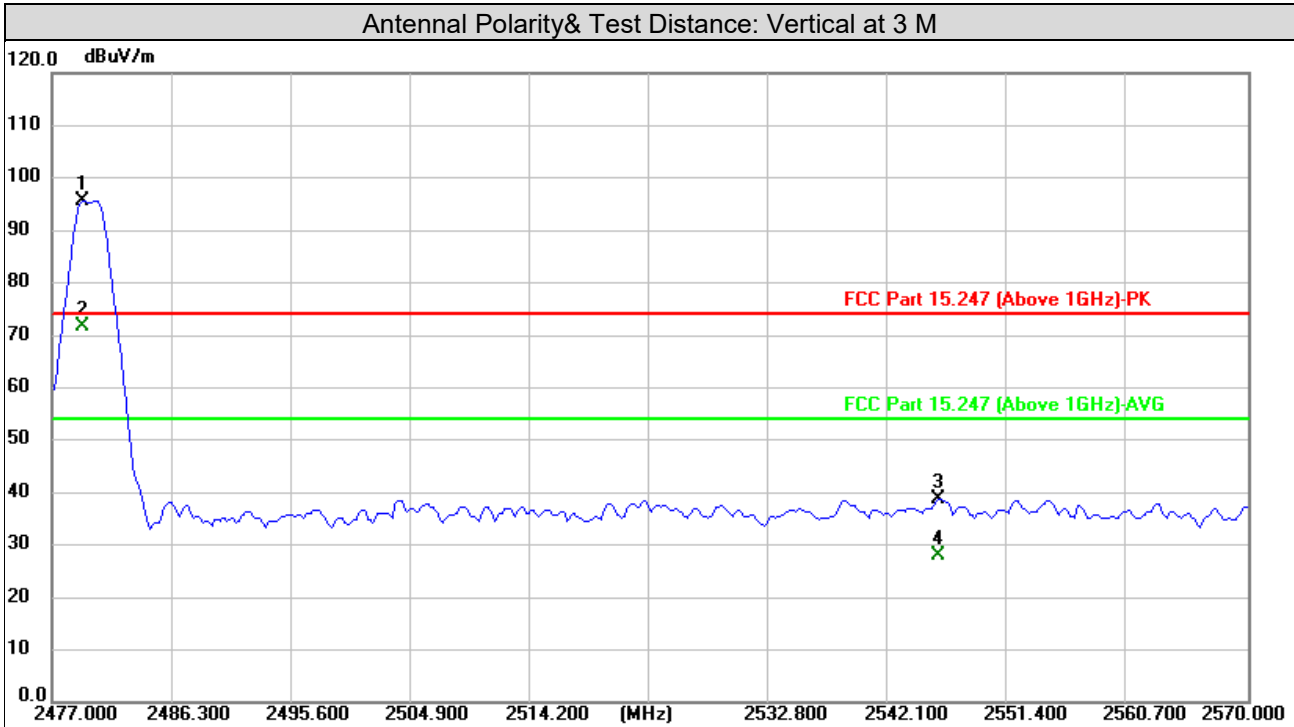

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.423	95.95	-0.21	95.74			peak	139	348
2#	2479.423	71.96	-0.21	71.75			AVG	139	348
3	2546.144	38.91	-0.07	38.84	74.00	-35.16	peak	139	348
4	2546.144	28.12	-0.07	28.05	54.00	-25.95	AVG	139	348
5	4960.000	40.76	6.16	46.92	74.00	-27.08	peak	163	143
6	4960.000	28.79	6.16	34.95	54.00	-19.05	AVG	163	143
7	7440.000	38.87	12.91	51.78	74.00	-22.22	peak	112	292
8	7440.000	29.13	12.91	42.04	54.00	-11.96	AVG	112	292

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.
4. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**3.2 Conducted Emission Measurement**

## 3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 3.2.2 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR 7	101961	2024-12-17
Artificial Mains Network	Rohde&Schwarz	ENV216	3560.6550.15	2024-12-17
Test software	FARAD	EZ_EMV V1.1.4.2	N/A	N/A

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to LISAI/CHINA.  
2. The test was performed in Shielded Room.

## 3.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

**Note:** All modes of operation were investigated and the worst-case emissions are reported.

## 3.2.4 Deviation from Test Standard

No deviation.

### 3.2.5 Test setup

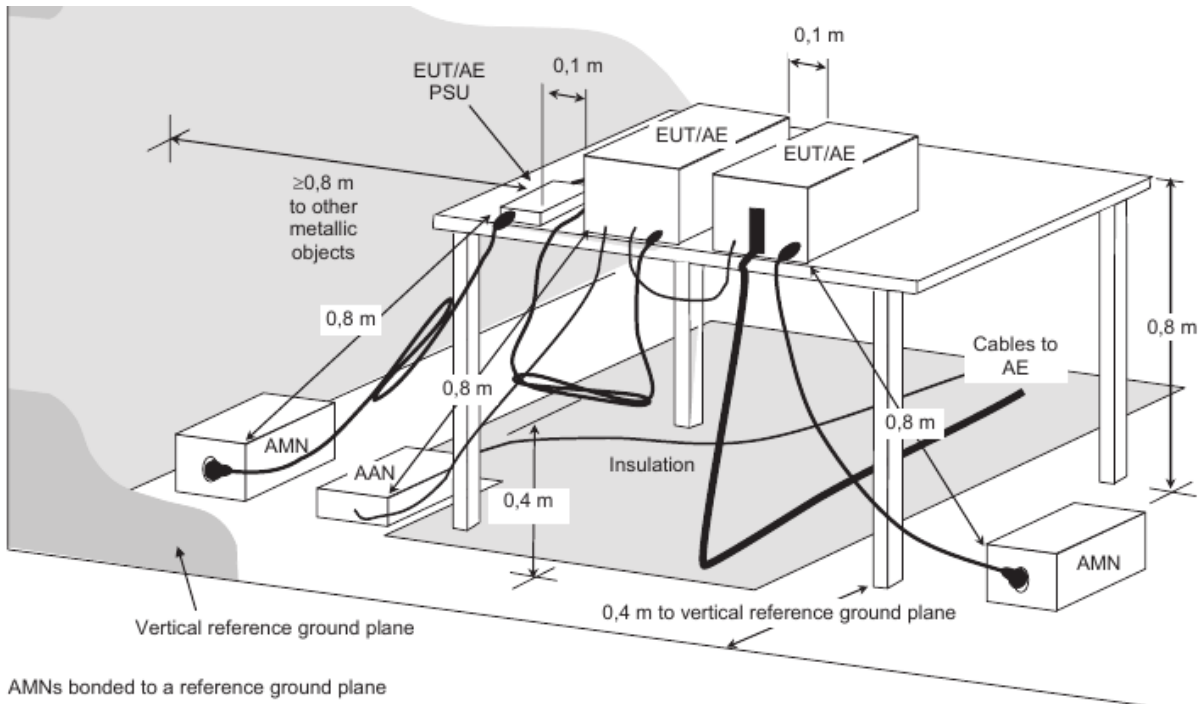


### 3.2.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

### 3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	--	--------------------------------------

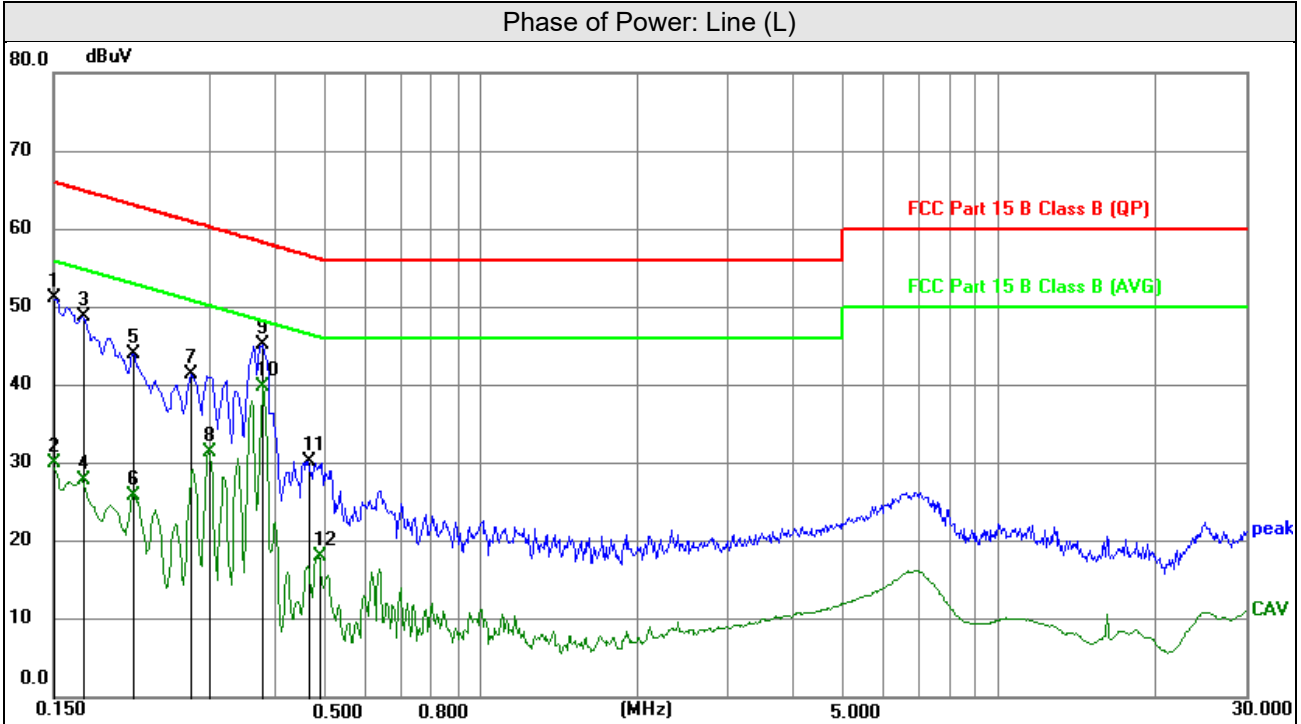


No	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	40.91	10.19	51.10	66.00	-14.90	peak
2	0.1500	19.81	10.19	30.00	56.00	-26.00	AVG
3	0.1703	38.65	10.16	48.81	64.95	-16.14	peak
4	0.1703	17.66	10.16	27.82	54.95	-27.13	AVG
5	0.2130	33.84	10.15	43.99	63.09	-19.10	peak
6	0.2130	15.75	10.15	25.90	53.09	-27.19	AVG
7	0.2760	31.29	10.19	41.48	60.94	-19.46	peak
8	0.2985	21.25	10.20	31.45	50.28	-18.83	AVG
9	0.3817	35.11	10.12	45.23	58.24	-13.01	peak
10	0.3817	29.73	10.12	39.85	48.24	-8.39	AVG
11	0.4650	20.14	10.11	30.25	56.60	-26.35	peak
12	0.4875	7.91	10.10	18.01	46.21	-28.20	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	--	--------------------------------------

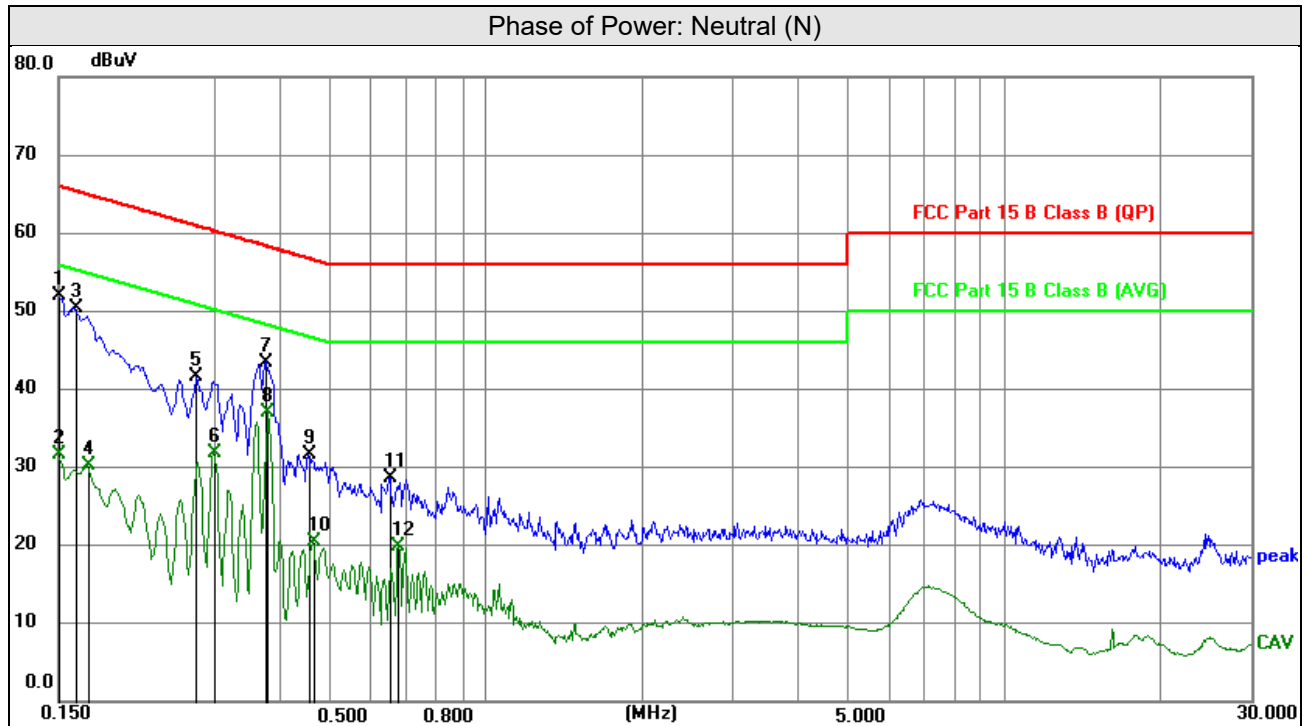

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	41.84	10.19	52.03	66.00	-13.97	peak
2	0.1500	21.45	10.19	31.64	56.00	-24.36	AVG
3	0.1613	40.30	10.17	50.47	65.40	-14.93	peak
4	0.1703	20.02	10.16	30.18	54.95	-24.77	AVG
5	0.2760	31.50	10.17	41.67	60.94	-19.27	peak
6	0.2985	21.64	10.18	31.82	50.28	-18.46	AVG
7	0.3772	33.38	10.11	43.49	58.34	-14.85	peak
8	0.3817	26.85	10.10	36.95	48.24	-11.29	AVG
9	0.4560	21.48	10.11	31.59	56.77	-25.18	peak
10	0.4650	10.25	10.11	20.36	46.60	-26.24	AVG
11	0.6540	18.57	10.10	28.67	56.00	-27.33	peak
12	0.6809	9.80	10.10	19.90	46.00	-26.10	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




### 3.3 6dB Bandwidth Measurement

#### 3.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

#### 3.3.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

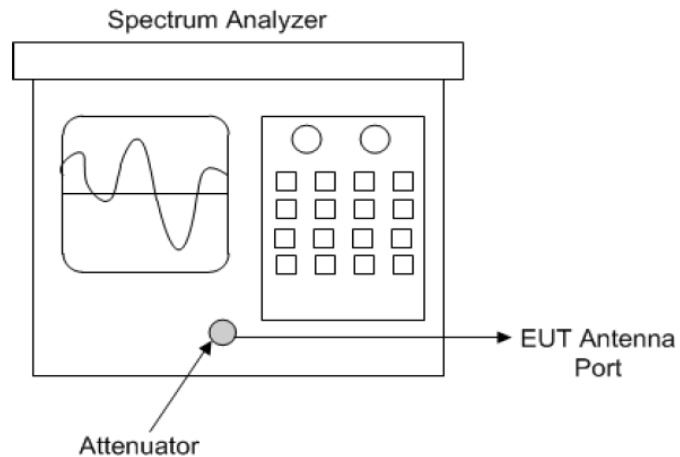

Spectrum analyzer test configuration

#### 3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

### 3.3.4 Test Procedure

#### Option 1:

- a. Set resolution bandwidth (RBW) = 30kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with  $X$  set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW  $\geq 3 \times$  RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 3.3.5 Deviation from Test Standard

No deviation.

### 3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.3.7 Test Result

BLE-1Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	0.704	>0.5
19	2440MHz	0.696	>0.5
39	2480MHz	0.704	>0.5

BLE-2Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	1.064	>0.5
19	2440MHz	1.092	>0.5
39	2480MHz	1.076	>0.5




Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5

### 3.4 Occupied Bandwidth Measurement

#### 3.4.1 Test Setup

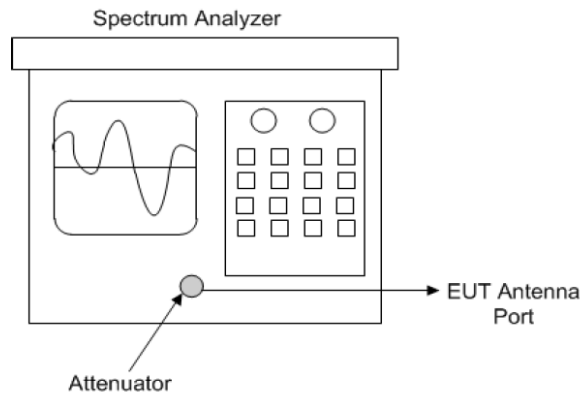

#### 3.4.2 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 3.4.4 Deviation from Test Standard

No deviation.


#### 3.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.4.6 Test Results

<b>BLE-1Mbps</b>			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	1.0665	2400~2483.5
19	2440MHz	1.0659	2400~2483.5
39	2480MHz	1.0630	2400~2483.5

<b>BLE-2Mbps</b>			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	2.0736	2400~2483.5
19	2440MHz	2.0831	2400~2483.5
39	2480MHz	2.0784	2400~2483.5

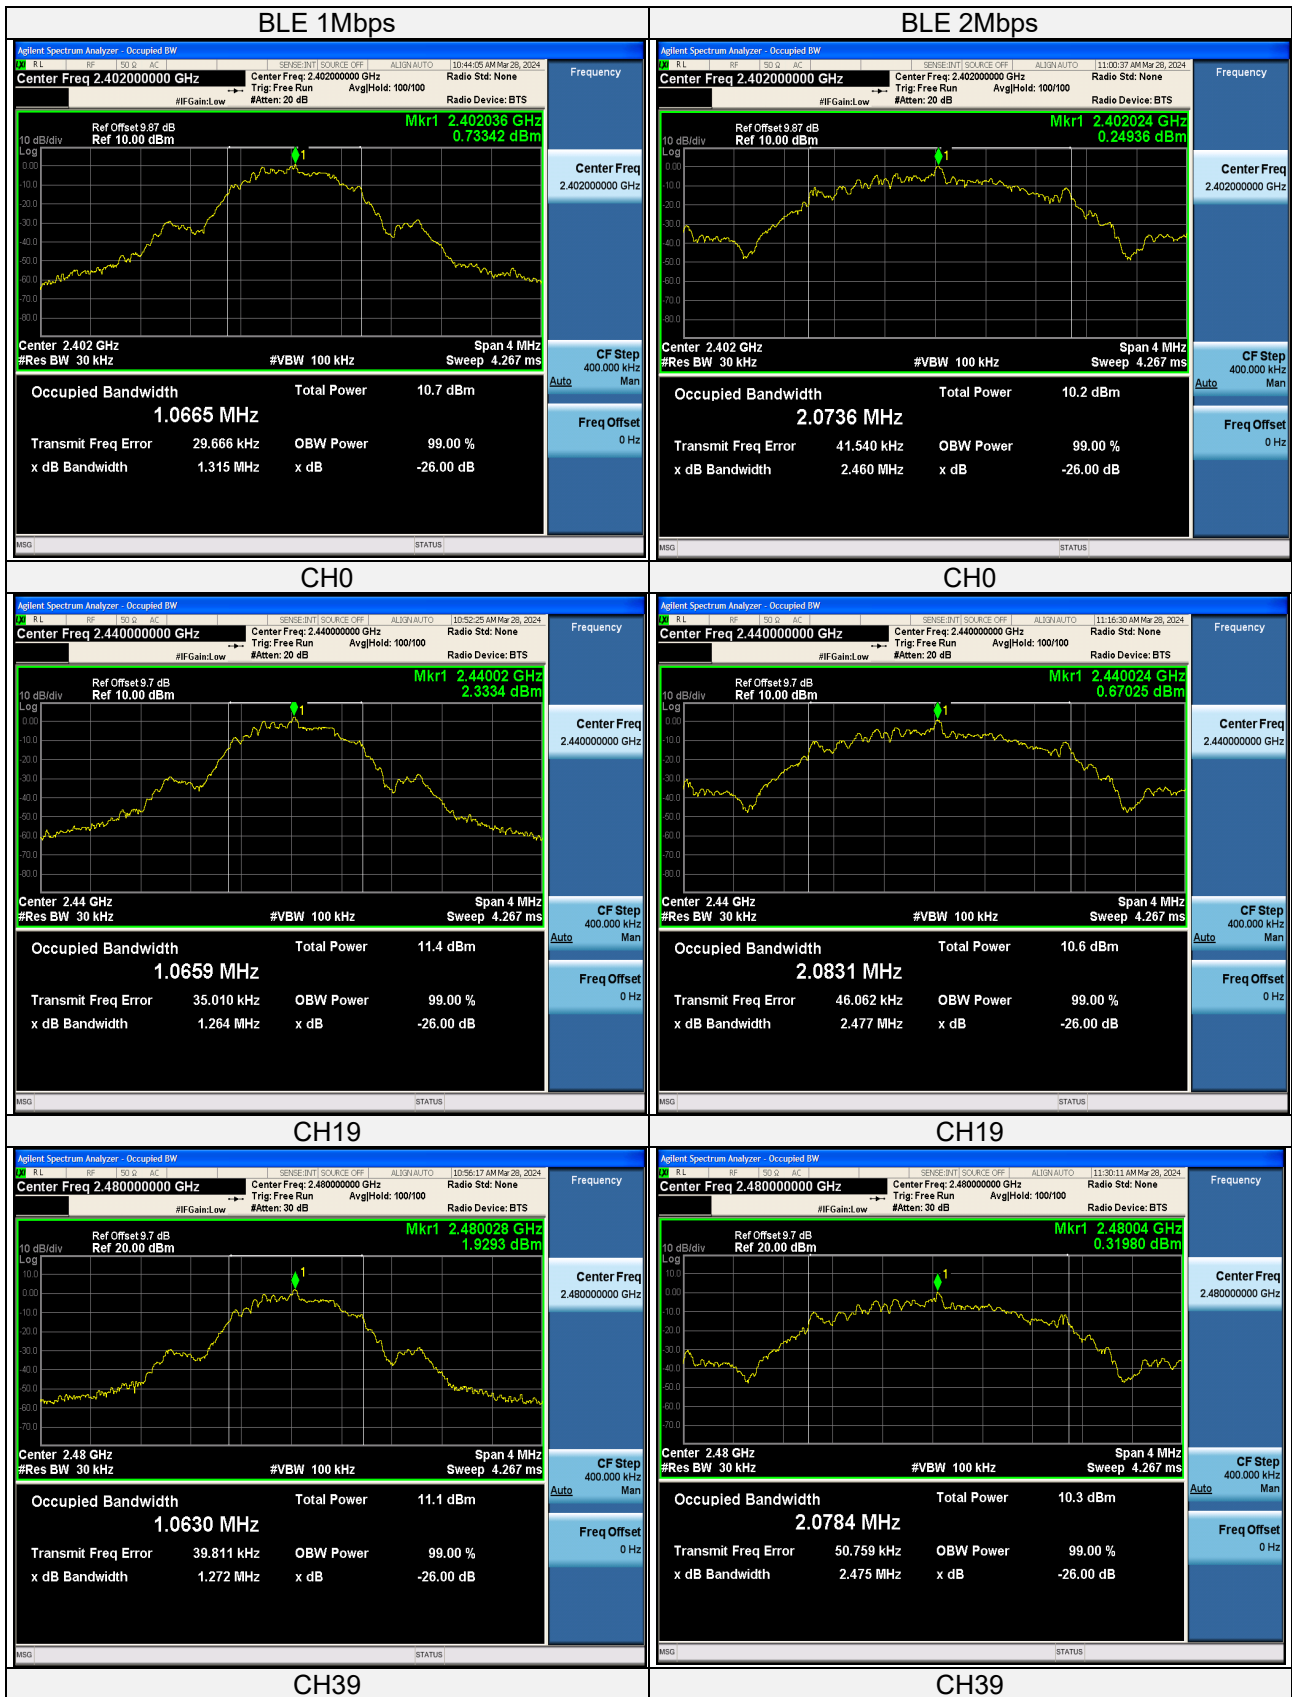

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5


### 3.5 Conducted Output Power Measurement

#### 3.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm).

#### 3.5.2 Test Setup

- Measurement using a spectrum analyzer (SA) Subclause 11.9.2.2 of ANSI C63.10 is applicable

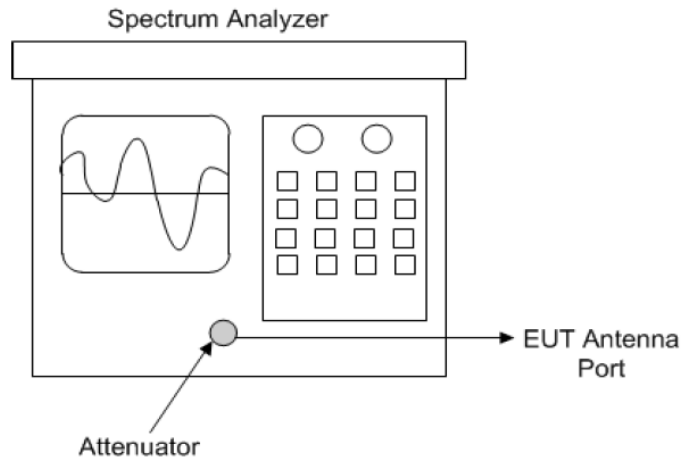

Spectrum analyzer output power test configuration

#### 3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.5.4 Test Procedures

Measurement using a spectrum analyzer (SA), Selection of test method:

The proper test method is selected based on the following criteria:

- Method AVGSA-1 or method AVGSA-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
  - 1) The EUT transmits continuously (or with a  $D > 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the instrument configured as in method AVGSA-1) is equal to or shorter than the duration  $T$  of each transmission from the EUT, and if those transmissions exhibit full power throughout their durations.
- Method AVGSA-2 or method AVGSA-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than +2%.
- Method AVGSA-3 or method AVGSA-3A (alternative)** shall be applied if the conditions of the preceding item a) and item b) cannot be achieved.



Test Report No.: 23122202-02-RF-US-02

 Measurement using a spectrum analyzer (SA), Selection of test method: Maximum peak conducted output power

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW > DTS bandwidth.
- b) Set VBW > [3 x RBW]
- c) Set span > [3 x RBW]
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Test Report No.: 23122202-02-RF-US-02

 Maximum conducted (average) output power (Method AVGSA-2):

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c) SA Setting:
  - 1\* Set span to at least 1.5 times the OBW
  - 2\* Set sweep trigger to "free run."
  - 3\* Set RBW= 1% to 5% of the OBW. not to exceed 1MHz.
  - 4\* Set VBW  $\geq 3 \times$  RBW
  - 5\* Number of points in sweep  $\geq 2 \times$  span /RBW. (This gives bin-to-bin spacing  $\leq$  RBW / 2. so that narrowband signals are not lost between frequency bins).
  - 6\* Sweep time  $\leq$  (number of points in sweep) x T. where T is defined in 11.6. If this gives a sweep time less than the auto sweep time of the instrument. then method AVGSA-3 shall not be used (use AVGSA-3A). The purpose of this step is so that the averaging time in each bin is less than or equal to the minimum time of a transmission.
  - 7\* Detector =RMS (power averaging).
  - 8\* Trace mode =max hold.
  - 9\* Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - 10\* Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function. then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 3.5.5 Deviation from Test Standard

No deviation.

### 3.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 Test Results


BLE-1Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	4.42	2.767	<125	<1000	Pass
19	2440	4.87	3.069	<125	<1000	Pass
39	2480	4.59	2.877	<125	<1000	Pass

BLE-1Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	2.49	1.774	<125	<1000	Pass
19	2440	3.22	2.099	<125	<1000	Pass
39	2480	3.15	2.065	<125	<1000	Pass

BLE-2Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	4.38	2.742	<125	<1000	Pass
19	2440	4.80	3.019	<125	<1000	Pass
39	2480	4.55	2.851	<125	<1000	Pass

BLE-2Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	2.06	1.607	<125	<1000	Pass
19	2440	2.46	1.762	<125	<1000	Pass
39	2480	2.37	1.726	<125	<1000	Pass

1Mbps

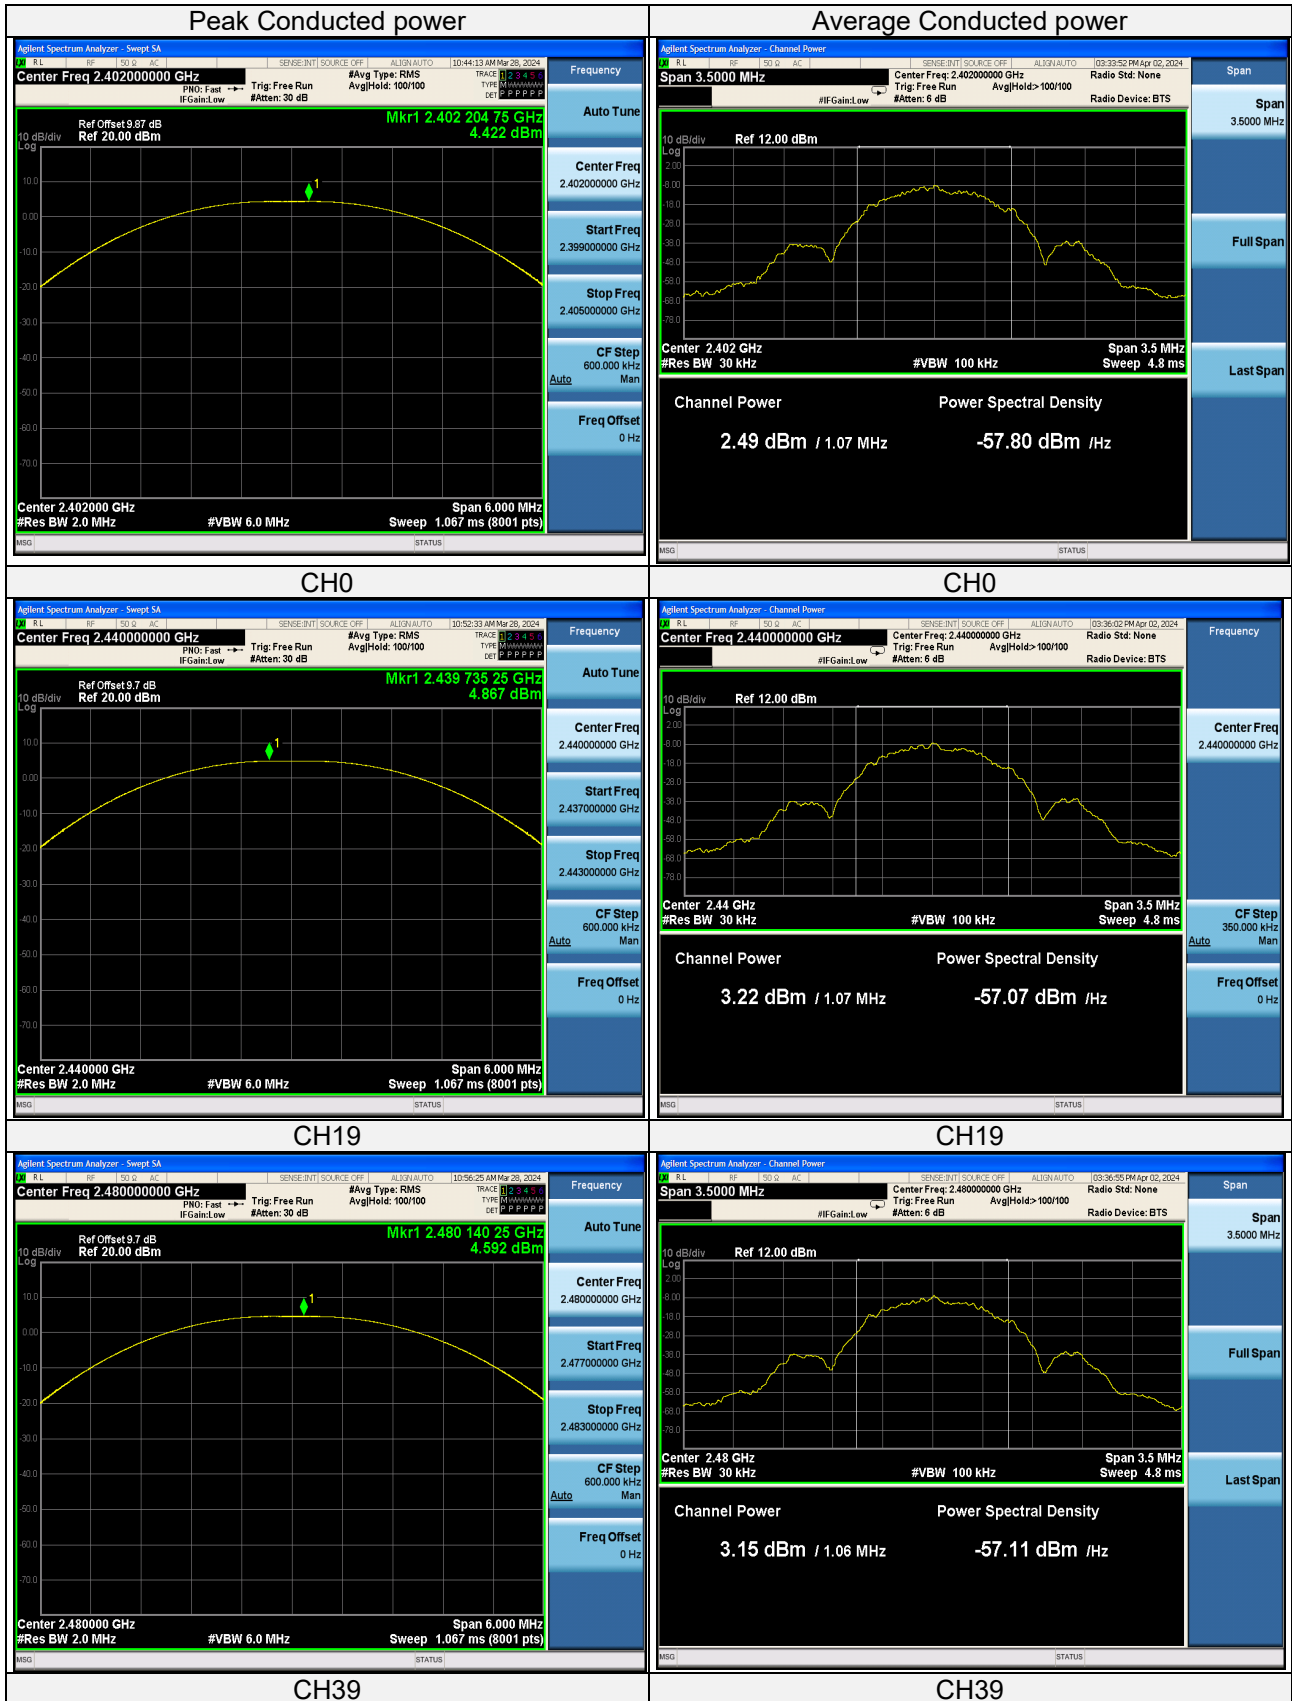

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5

## 2Mbps



Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5


**4.1 Power Spectral Density Measurement**

4.1.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm/3kHz.

4.1.2 Test Setup

- DTS maximum power spectral density level in the fundamental emission Subclause 11.10 of ANSI C63.10 is applicable.

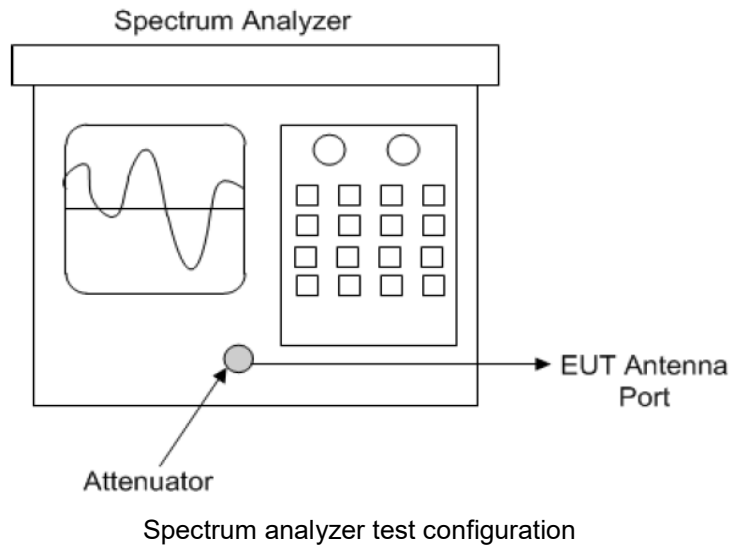

4.1.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 4.1.4 Test Procedure

- a. **Method AVGPSD-1 or method AVGPSD-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
- 1) The EUT transmits continuously (or with a  $D \geq 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep is equal to or shorter than the duration  $I$  of each transmission from the EUT, and if those transmissions exhibit full power throughout these durations.
- b. **Method AVGPSD-2 or method AVGPSD-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved. and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2\%$ .
- c. **Method AVGPSD-3 or method AVGPSD-3A (alternative)** shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.

#### Method AVGPSD-3:

Method AVGPSD-3 uses mms detection across ON and OFE times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e.  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed  $\pm 2\%$ ).

#### SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
  - b. Set sweep trigger to "free run."
  - c. Set the RBW = 3 kHz, VBW = 10 kHz.
  - d. Detector = RMS (power averaging).
  - e. Sweep time = Auto couple.
  - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - g. Use the peak marker function to determine the maximum PSD level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

#### 4.1.5 Deviation from Test Standard

No deviation.

#### 4.1.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.1.7 Test Results

BLE-1Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/3kHz)	Limit (dBm/3kHz)
0	2402MHz	-9.98	<8
19	2440MHz	-9.55	<8
39	2480MHz	-9.74	<8

BLE-2Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/3kHz)	Limit (dBm/3kHz)
0	2402MHz	-12.61	<8
19	2440MHz	-12.28	<8
39	2480MHz	-12.36	<8



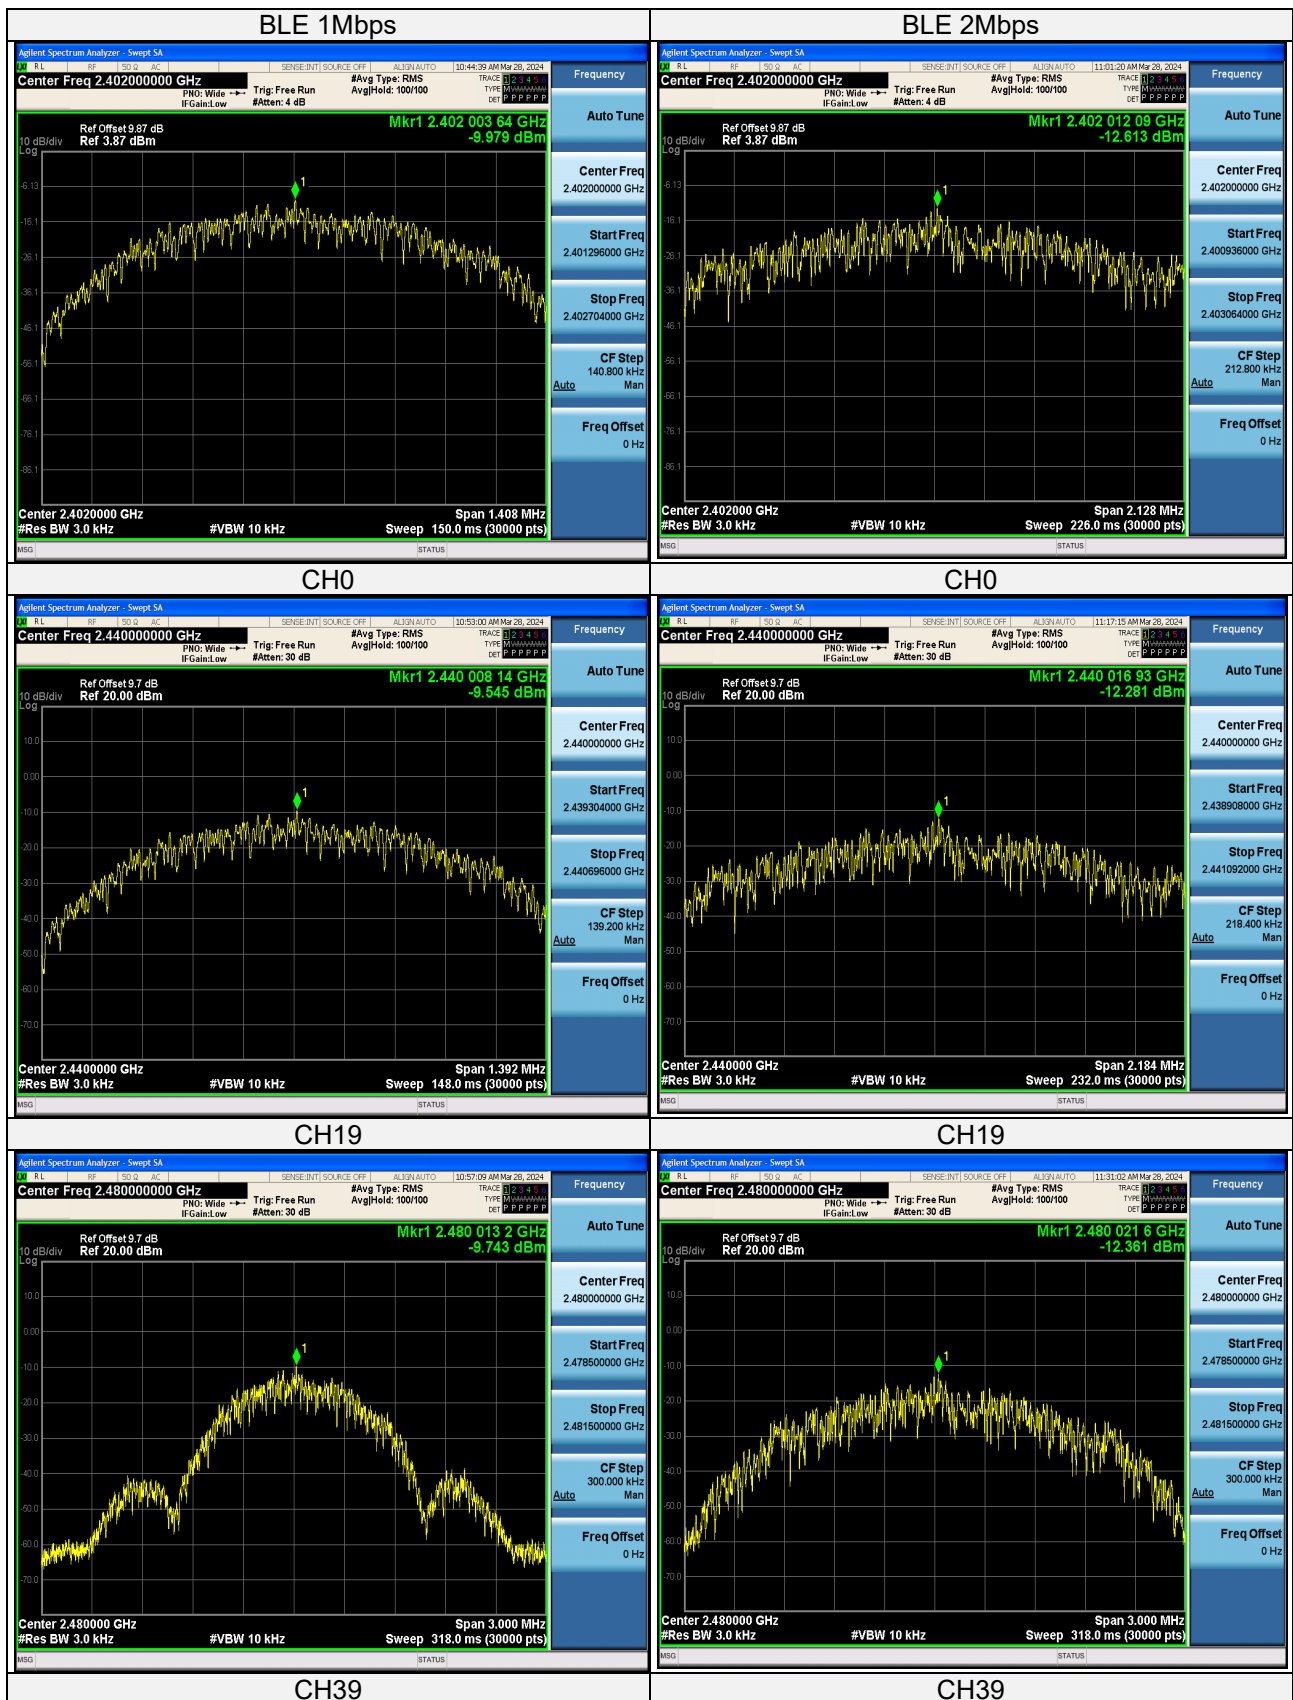

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5


## 4.2 Conducted Out of Band Emission Measurement

### 4.2.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

### 4.2.2 Test Setup

- DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable.

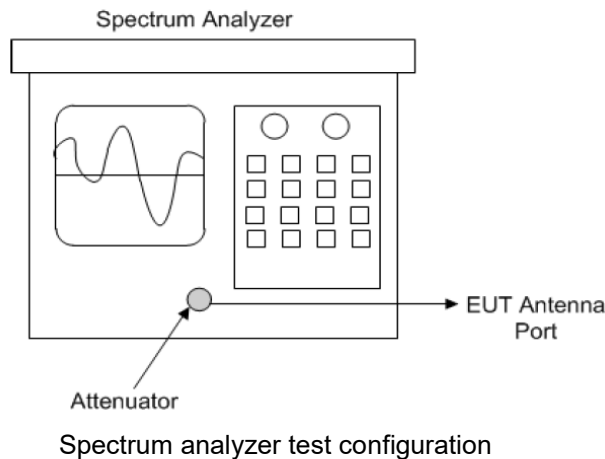

### 4.2.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 4.2.4 Test Procedure

a. Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to 21.5 times the DTS bandwidth)
- 3) Set the RBW= 100 kHz)
- 4) Set the VBW  $\geq 3 \times$  RBW
- 5) Detector = peak
- 6) Sweep time = auto coupling
- 7) Trace mode =max hold
- 8) Allow trace to fully stabilize
- 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

b. Establish an emission level by using the following procedure:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz
- 3) Set the VBW  $\geq 300$  kHz.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


#### 4.2.5 Deviation from Test Standard

No deviation.

#### 4.2.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.2.7 Test results

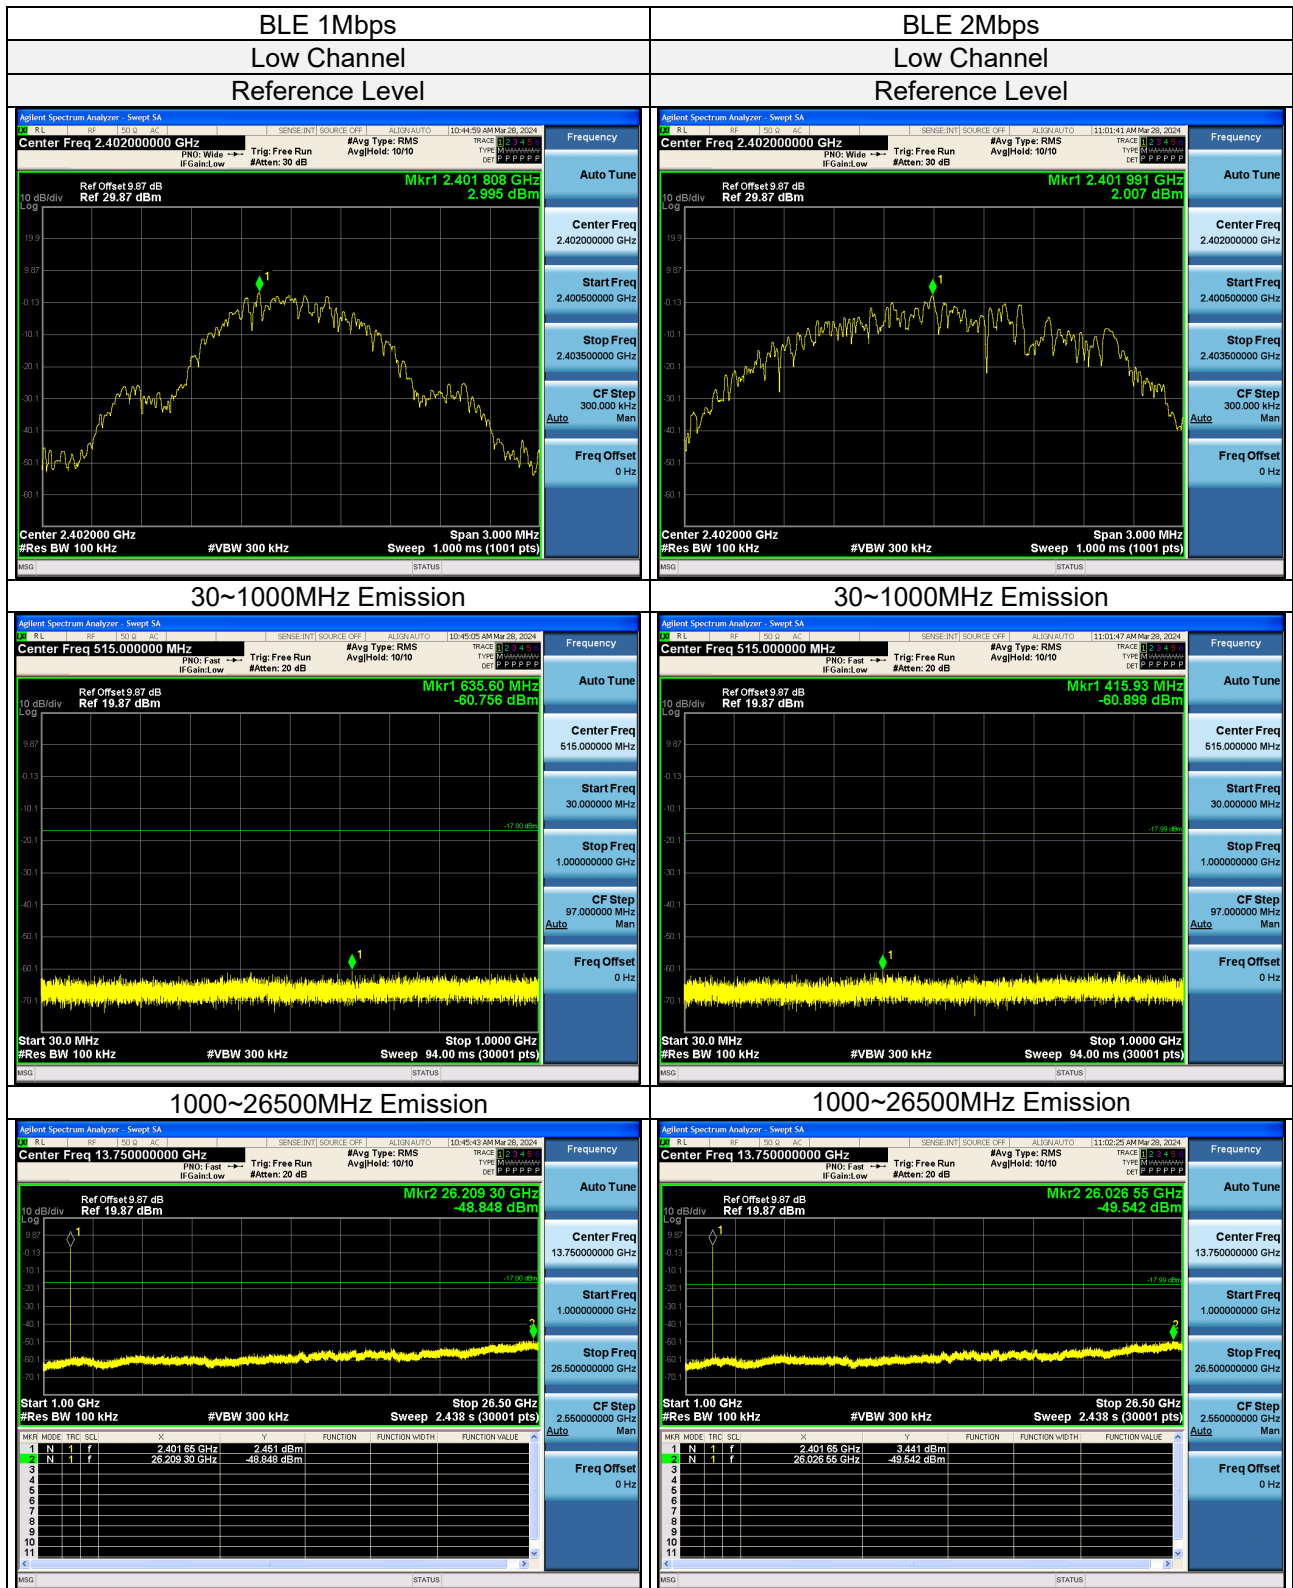

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)


Release  
 Ver. 1.5

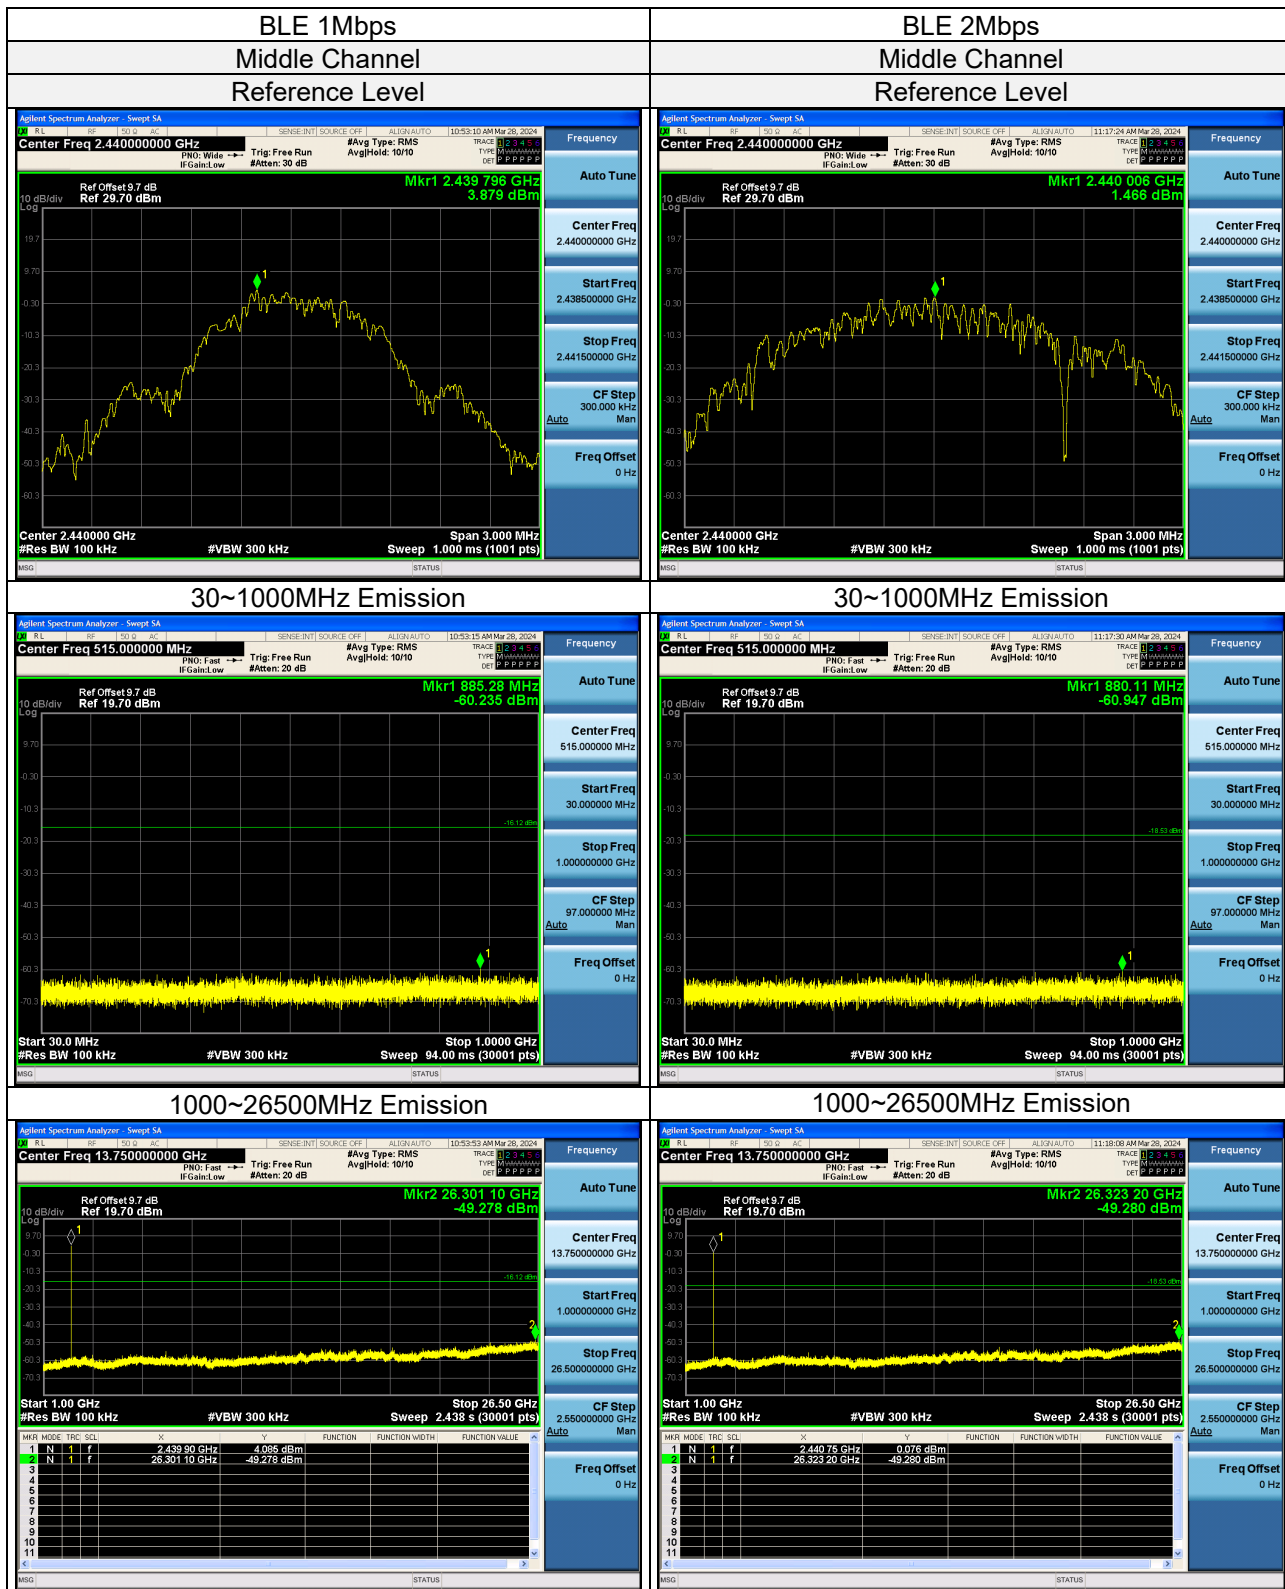

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)


Release Ver. 1.5

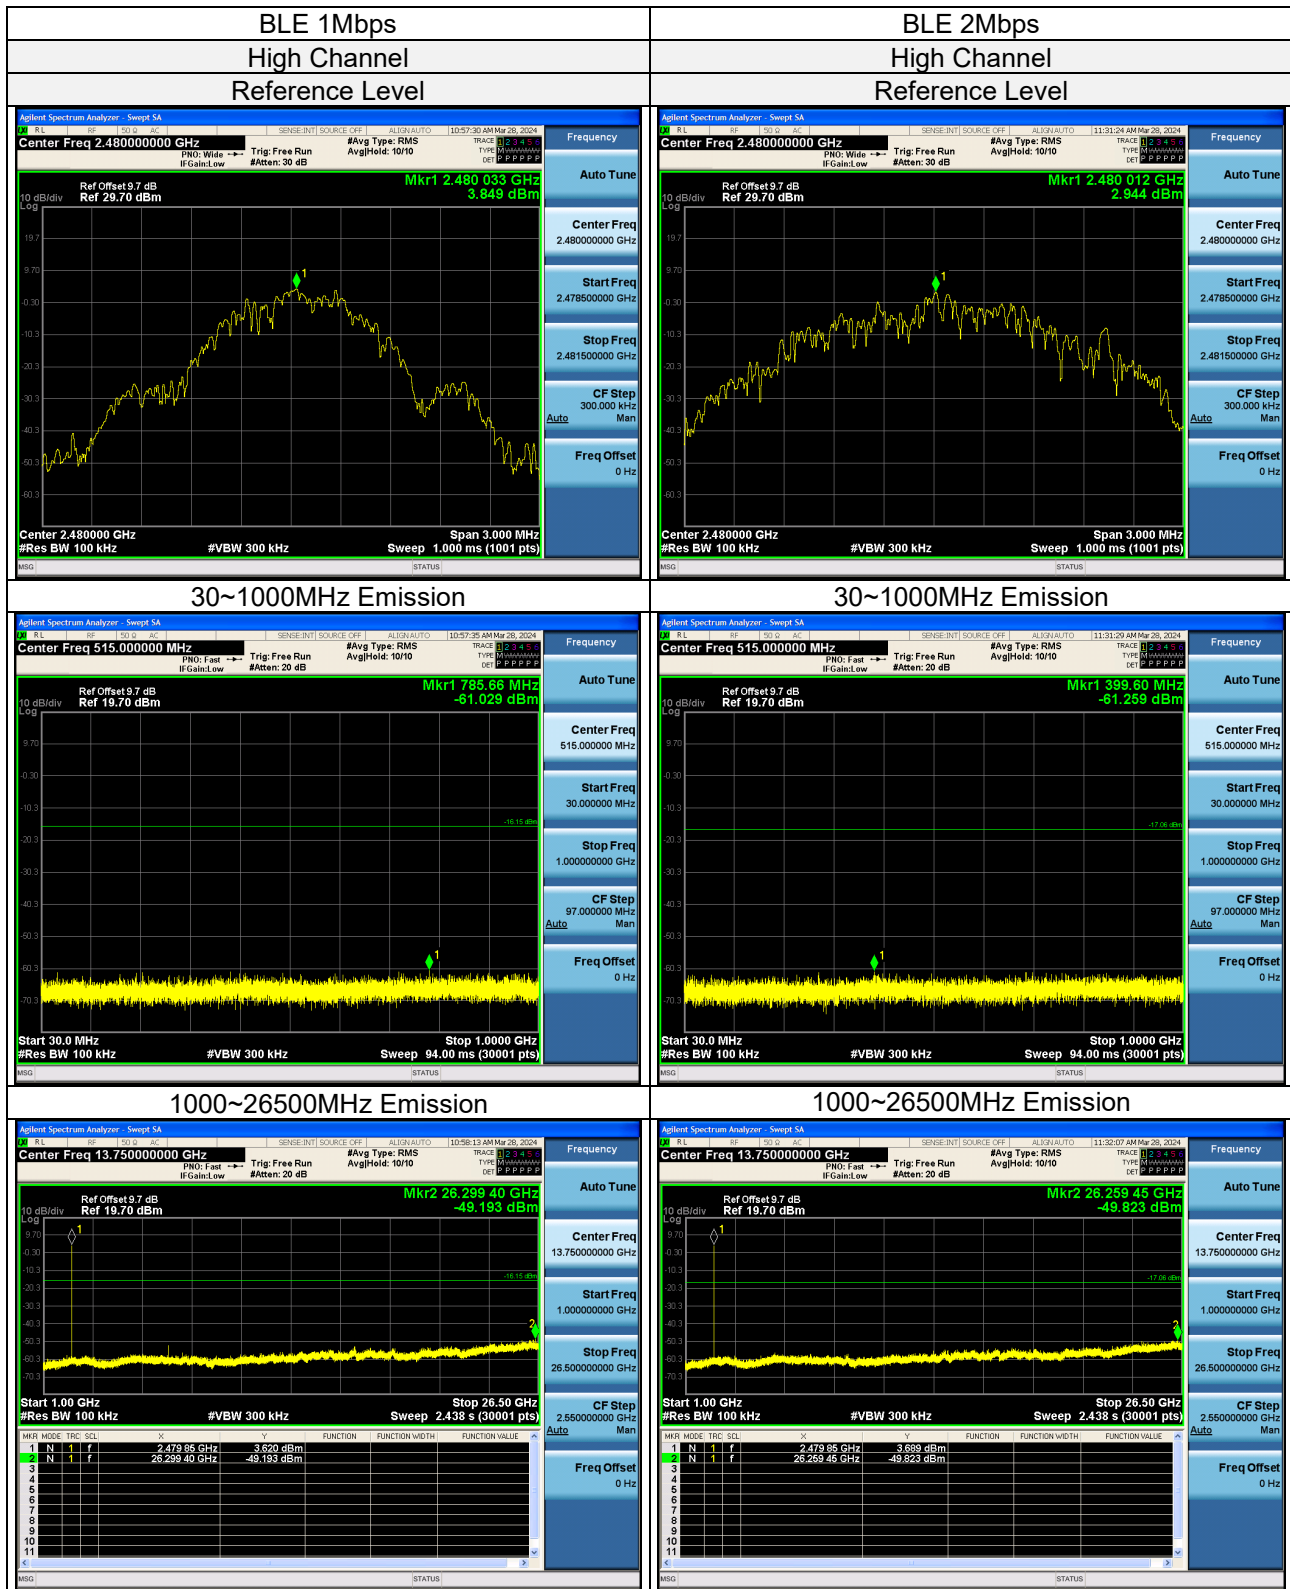

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5

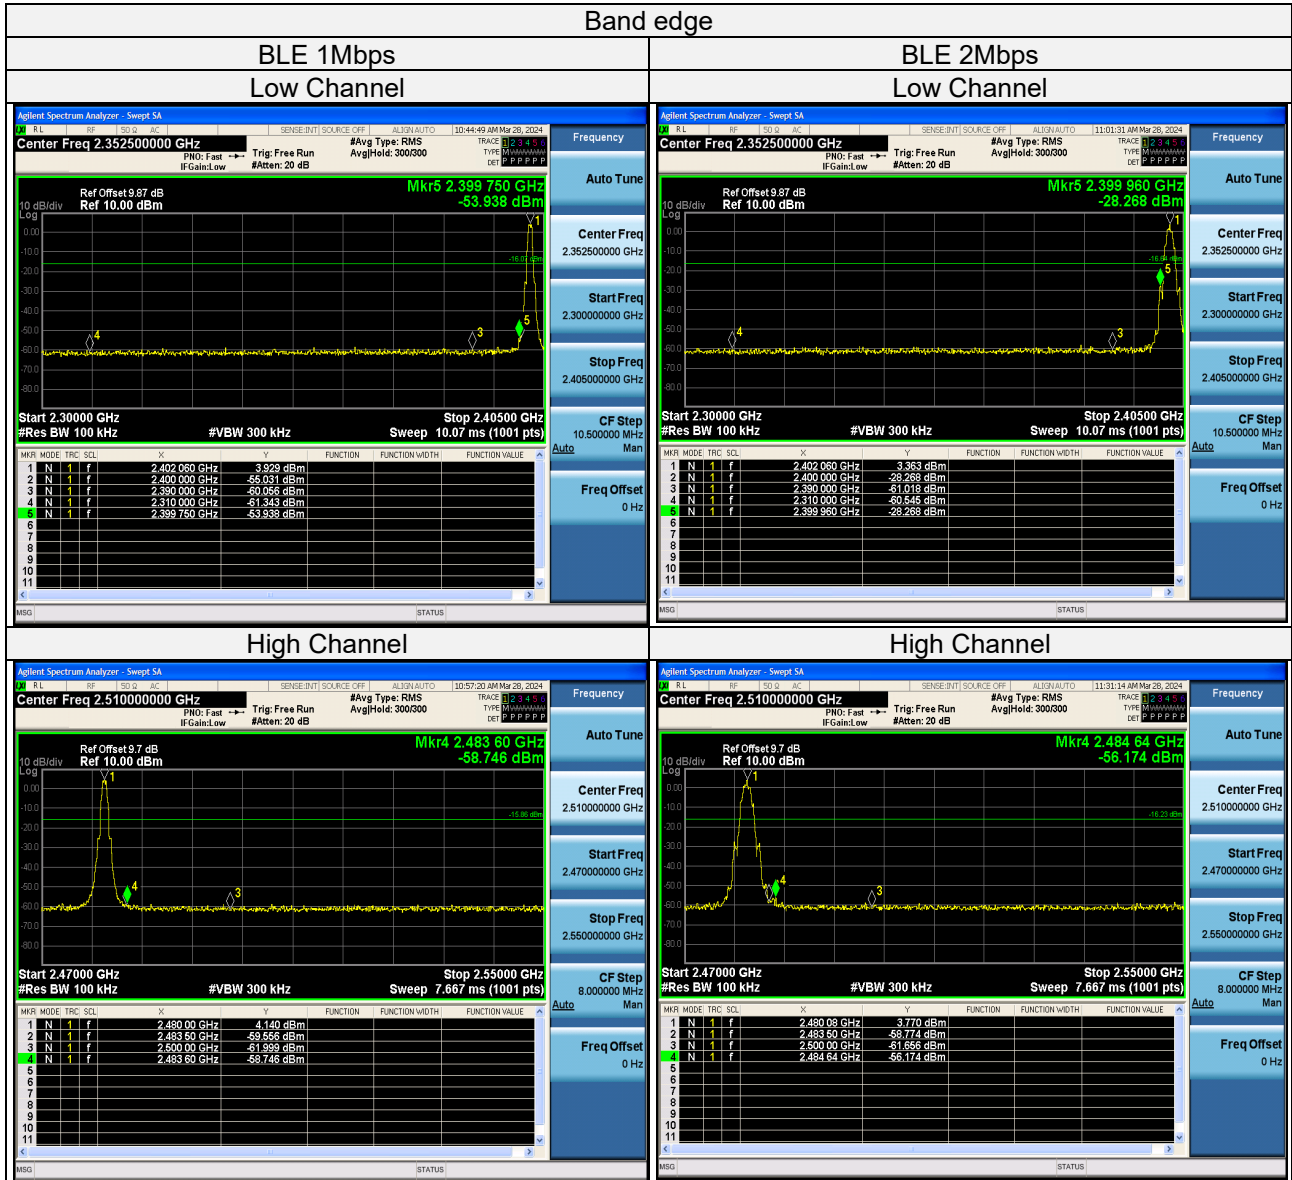

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5

**4. Pictures of Test Arrangements**

Please refer to the attached file (Test Setup Photo).



**5. Test Instruments**

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.Date
Spectrum	Keysight	N9020A	MY51240612	2024-08-06
Power Meter 10Hz~18GHz	Tonscend	JS0806-2	188060126	2024-08-06
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2024-12-17
Signal generator	Keysight	E4421	GB40051020	2025-03-14
Universal Switch Control Unit	Rohde&Schwarz	CMW500	12010002k50	2024-12-17
Humidity tester	Jingchuang	GSP-8A	CMA22B000592	2024-12-24
Test Software	Tonscend	JS0806-2	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months.  
2. The test was performed in RF Chamber.

**Appendix – Information on The Testing Laboratories**

We, [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: [Customerservice.dg@hwa-hsing.com](mailto:Customerservice.dg@hwa-hsing.com)

Web Site: [www.hwa-hsing.com](http://www.hwa-hsing.com)

--- END ---