

**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

*For*

10.1 Inch LCD Monitor With Built In DVD Player

MODEL No.: SBD61011, AVX10USB

FCC ID: ATI9R3SBD61011

Trademark: N/A

REPORT NO.: ES160831009E

ISSUE DATE: October 12, 2016

*Prepared for*

Action Electronics Co.,Ltd.

2480, TINGKAT PERUSAHAAN ENAM, PRAI FREE TRADE ZONE,  
13600, PERAI, PENANG, MALAYSIA

*Prepared by*

EMTEK (SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

## Table of Contents

1	TEST RESULT CERTIFICATION .....	3
2	EUT TECHNICAL DESCRIPTION.....	4
3	SUMMARY OF TEST RESULT .....	5
4	TEST METHODOLOGY .....	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
4.2	MEASUREMENT EQUIPMENT USED .....	6
4.3	DESCRIPTION OF TEST MODES.....	7
5	FACILITIES AND ACCREDITATIONS .....	8
5.1	FACILITIES .....	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS .....	8
6	TEST SYSTEM UNCERTAINTY .....	9
7	SETUP OF EQUIPMENT UNDER TEST .....	10
7.1	RADIO FREQUENCY TEST SETUP 1.....	10
7.2	RADIO FREQUENCY TEST SETUP 2.....	10
7.3	CONDUCTED EMISSION TEST SETUP.....	12
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	13
7.5	SUPPORT EQUIPMENT .....	13
8	TEST REQUIREMENTS .....	14
8.1	OCCUPIED BANDWIDTH .....	14
8.2	RADIATED SPURIOUS EMISSION.....	17
8.3	CONDUCTED EMISSION TEST.....	27
8.4	ANTENNA APPLICATION.....	28

**1 TEST RESULT CERTIFICATION**

Applicant:	Action Electronics Co.,Ltd. 2480, TINGKAT PERUSAHAAN ENAM, PRAI FREE TRADE ZONE, 13600, PERAI, PENANG, MALAYSIA
Manufacturer:	Action Electronics Co.,Ltd. 2480, TINGKAT PERUSAHAAN ENAM, PRAI FREE TRADE ZONE, 13600, PERAI, PENANG, MALAYSIA
Factory:	SHENZHEN WSIC TECHNOLOGY CO.,LTD 2F(West B), Block 5, TianFuAn Industrial Park, Huangmabu Village, Xixiang Town, Baoan District, Shenzhen, China
Product Description:	10.1 Inch LCD Monitor With Built In DVD Player
Model Number:	SBD61011, AVX10USB
File Number:	ES160831009E
Date of Test:	August 31, 2016 to October 10, 2016


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.239.

The test results of this report relate only to the tested sample identified in this report

Date of Test : August 31, 2016 to October 10, 2016

Prepared by :   
Rui Zhou/Editor

Reviewer :   
Joe Xia /Supervisor

Approve & Authorized Signer :   
Lisa Wang/Manager

## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>EUT</b>	10.1 Inch Lcd Monitor With Built In Dvd Player
<b>Model Number</b>	SBD61011, AVX10USB (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the differences are the color and model no. for trading purpose. We prepare SBD61011 for test.)
<b>Device Type</b>	FM transmitter
<b>Modulation:</b>	FM
<b>Operating Frequency Range(s):</b>	88.1-107.9MHz
<b>Number of Channels:</b>	100 channels
<b>Antenna Type</b>	External Antenna
<b>Power supply</b>	<input checked="" type="checkbox"/> DC supply: DC12V from battery

**Note:** for more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.215 (c)	Occupied Bandwidth	PASS	
15.239 (b)	Field strength of the fundamental signal	PASS	
15.239 (b) (c) 15.209	Spurious emissions	PASS	
15.207	Conducted Emission	N/A	
15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable)			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: AT19R3SBD61011 filing to comply with Section 15.239 of the FCC Part 15, Subpart C Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:  
 FCC 47 CFR Part 2, Subpart J  
 FCC 47 CFR Part 15, Subpart C

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/28/2016
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/28/2016
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/29/2016
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/29/2016
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/29/2016

#### 4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/29/2016
Pre-Amplifier	HP	8447D	2944A07999	05/28/2016
Bilog Antenna	Schwarzbeck	VULB9163	142	05/28/2016
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2016
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/29/2016
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/28/2016
Cable	Schwarzbeck	AK9513	ACRX1	05/29/2016
Cable	Rosenberger	N/A	FP2RX2	05/29/2016
Cable	Schwarzbeck	AK9513	CRPX1	05/29/2016
Cable	Schwarzbeck	AK9513	CRRX2	05/29/2016

#### 4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/28/2016
Power meter	Anritsu	ML2495A	0824006	05/28/2016
Power sensor	Anritsu	MA2411B	0738172	05/28/2016
Spectrum Analyzer	Agilent	N9010A	My53470879	05/28/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for FM:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	88.1	49	98.1	...	...
1	88.3	50	98.3	97	107.5
2	88.5	51	98.5	98	107.7
...	...	...	...	99	107.9

Note:  $f_c = 88.1\text{MHz} + (k) \times 0.2\text{MHz}$   $k=0$  to 99

Test Frequency and channel for FM:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	88.1	49	98.1	99	107.9

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29

The certificate is valid until 2016.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, July 06, 2016

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 24, 2015

The Certificate Registration Number is 4480A-2.

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China



## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The FM component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


#### (a) Radiated Emission Test Set-Up, Frequency Below 30MHz

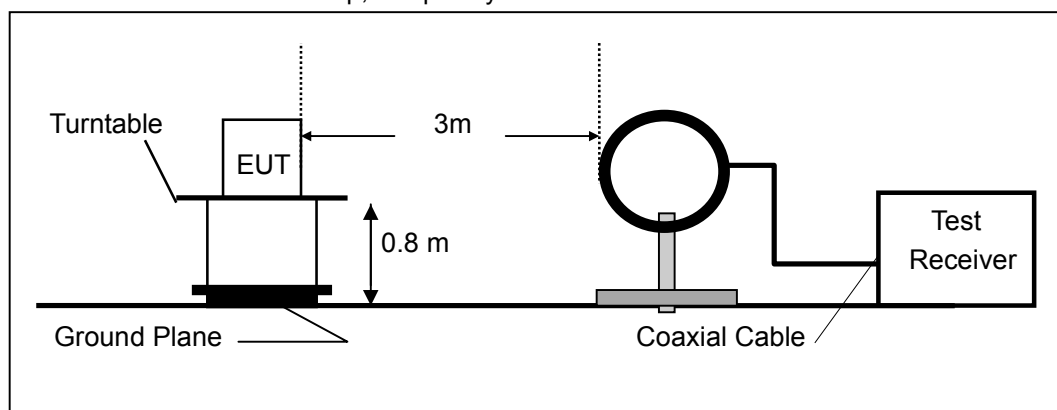

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

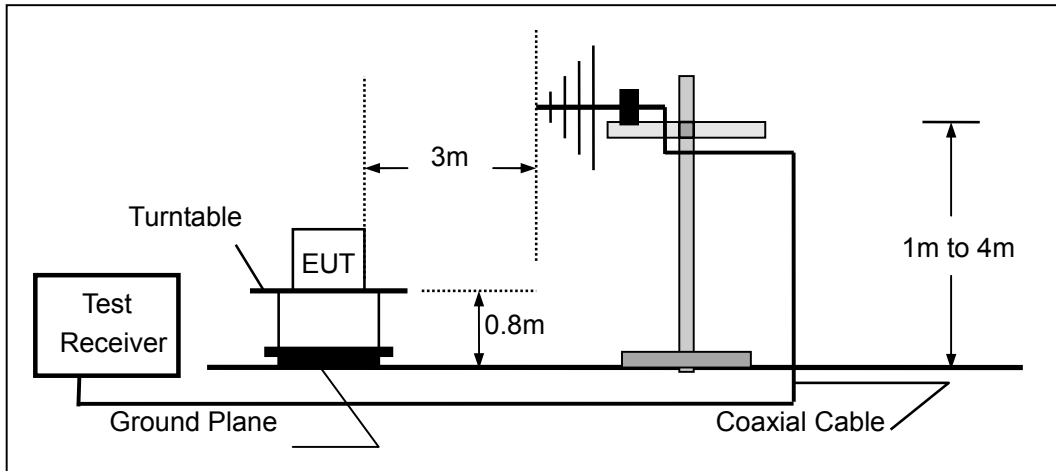

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

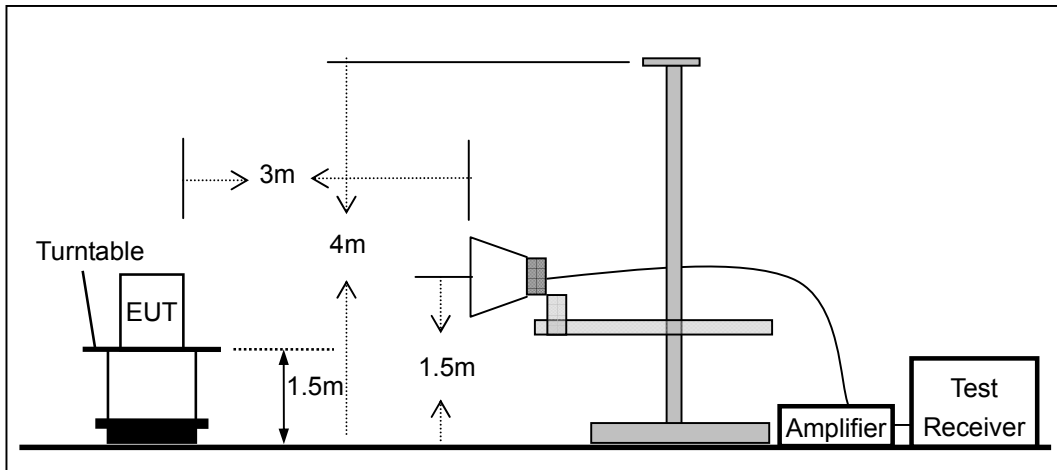


### 7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (Bluetooth Car Charger(Smart driving Edition)) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

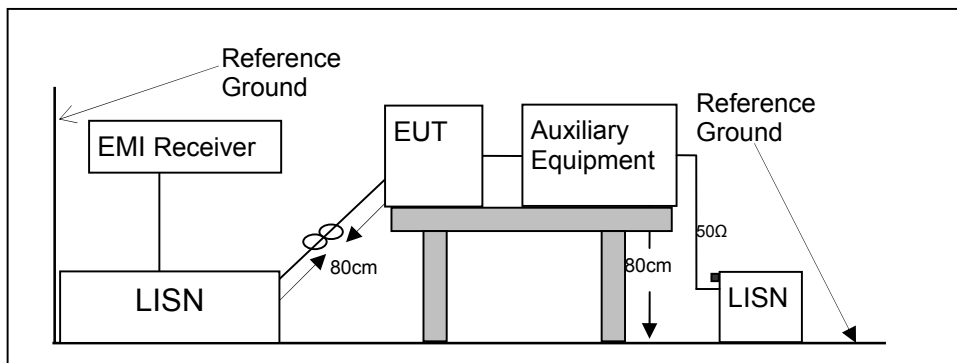

#### 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

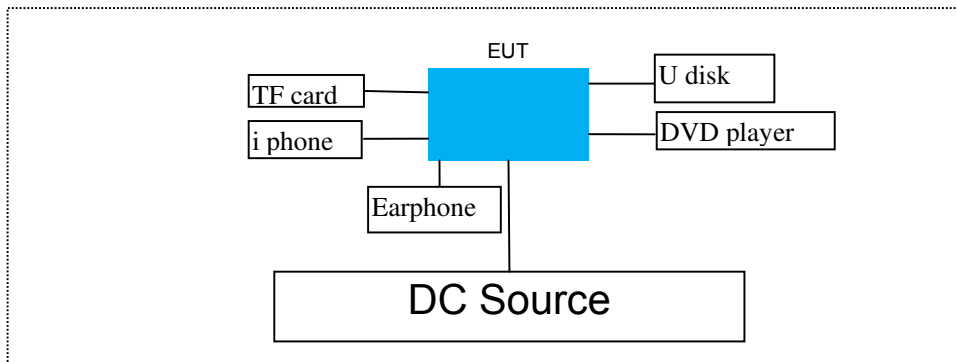

#### 7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
1	U disk	kingston	N/A	N/A	N/A
2	TF card	kingston	N/A	N/A	N/A
3	i phone	Apple	A1526	N/A	N/A
4	DVD player	SONY	BDP-S370	N/A	N/A
5	Earphone	Modern	N/A	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 OCCUPIED BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part15 C Section 15.215(c)

#### 8.1.2 Conformance Limit

200kHz

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.1.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

RBW  $\geq$  1% of the 20 dB bandwidth

VBW  $\geq$  RBW

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector function = RMS

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.


Measure and record the results in the test report.

### Test Results

Temperature:	24°C	Test Date:	October 8, 2016
Humidity:	53 %	Test By:	King Kong


Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
FM	00	81.1	51.60	200	PASS
	49	98.1	51.80	200	PASS
	99	107.9	52.00	200	PASS

Test Model	20dB Bandwidth FM Transmitter Channel 0: 81.1MHz	FM Modulation
------------	--	---------------

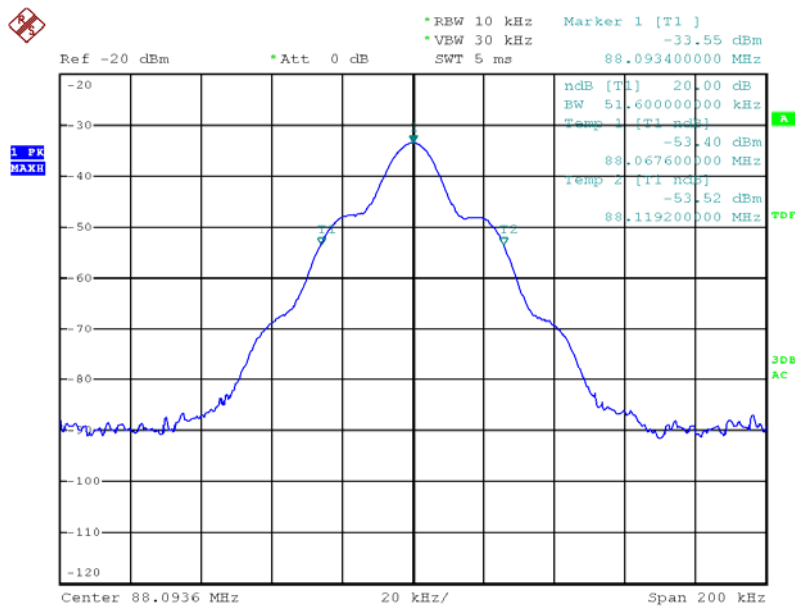


Date: 8.OCT.2016 17:06:16

Test Model	20dB Bandwidth FM Transmitter Channel 49: 98.1MHz	FM Modulation
------------	---	---------------

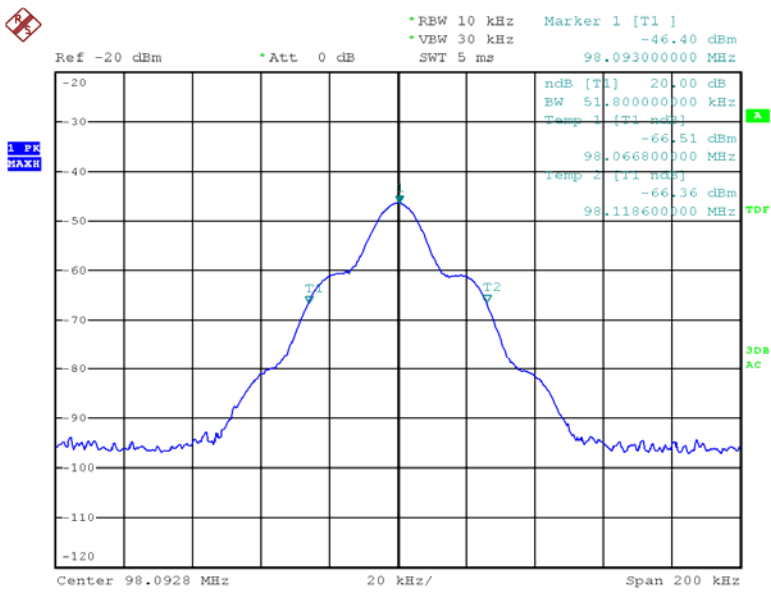

Date: 8.OCT.2016 17:04:20

Test Model	20dB Bandwidth FM Transmitter Channel 99: 107.9MHz	FM Modulation
------------	--	---------------

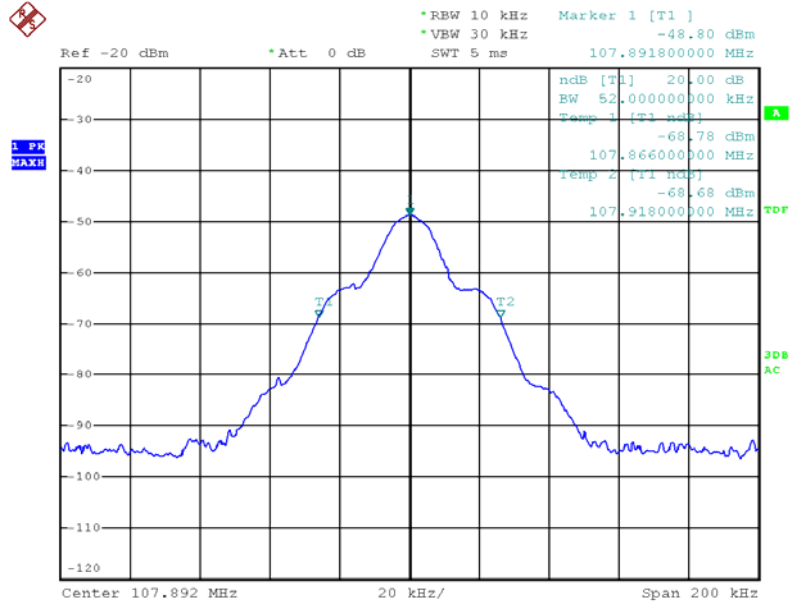

Date: 8.OCT.2016 17:17:11



## 8.2 RADIATED SPURIOUS EMISSION

### 8.2.1 Applicable Standard

According to FCC Part 15.239(b) (c) and 15.209

### 8.2.2 Conformance Limit

Field strength of the fundamental signal shall not exceed the level of the emission specified in the following table

Frequency	Limit (dBuV/m@3m)	Remark
88-108MHz	68	Peak Value
	48	Average Value

According to FCC Part 15.239(c): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 8.2.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 8.2.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

**8.2.5 Test Results**

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	24°C	Test Date:	September 9, 2016
Humidity:	53 %	Test By:	KK
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance/ test distance})$  (dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Transmitter Fundamental Field Strength

Temperature:	24°C	Test Date:	September 9, 2016
Humidity:	53 %	Test By:	KK
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. V/H	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
88.1	V	45.56	44.90	68	48	-22.44	-3.10
	H	46.66	45.75	68	48	-21.34	-2.25
98.1	V	46.67	45.80	68	48	-21.33	-2.20
	H	47.87	46.63	68	48	-20.13	-1.37
107.9	V	47.24	46.30	68	48	-20.76	-1.70
	H	47.21	46.30	68	48	-20.79	-1.70

■ Spurious Emission below 1GHz (30MHz to 1GHz)

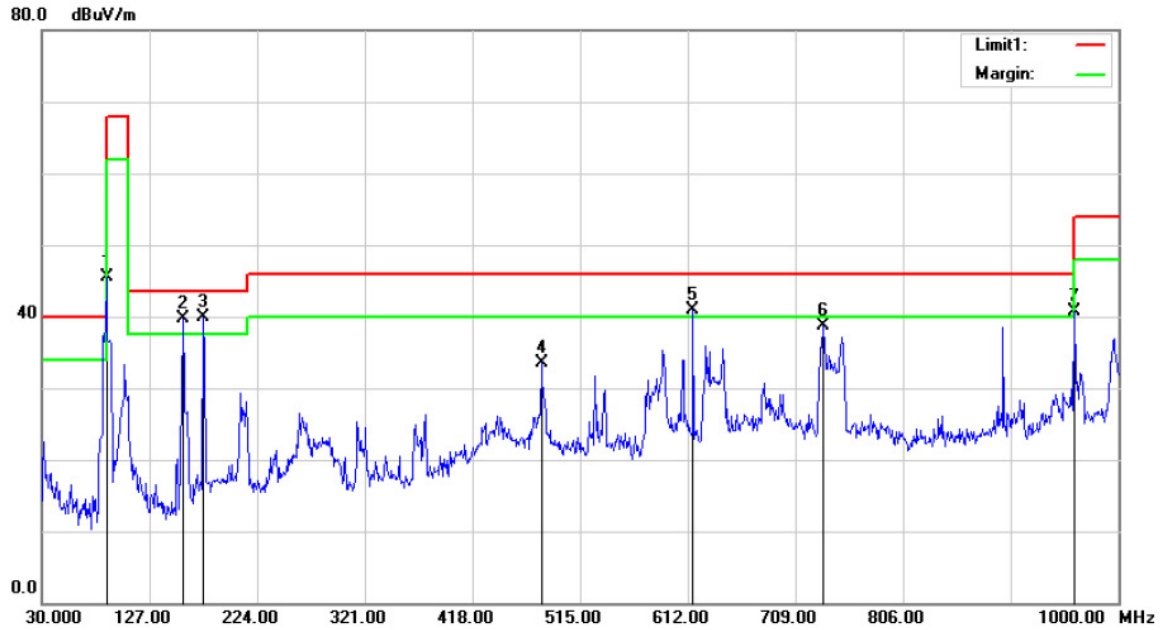

Site 3m Chamber #3

Polarization: *Vertical*

Temperature: 24

Limit: (RE)FCC PART 15 CLASS B (FM)

Power: DC 12V

Humidity: 53 %


Mode:TX88.1MHz

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		88.1000	63.72	-18.16	45.56	68.00	-22.44	peak	0	
2	!	157.0700	58.17	-18.49	39.68	43.50	-3.82	QP	0	
3	*	175.5000	57.06	-17.15	39.91	43.50	-3.59	QP	0	
4		480.0800	41.19	-7.75	33.44	46.00	-12.56	QP	0	
5	!	616.8500	46.38	-5.56	40.82	46.00	-5.18	QP	0	
6		734.2200	42.40	-3.69	38.71	46.00	-7.29	QP	0	
7		960.2300	41.32	-0.55	40.77	54.00	-13.23	QP	0	

\*:Maximum data    x:Over limit    !:over margin

Operator: H

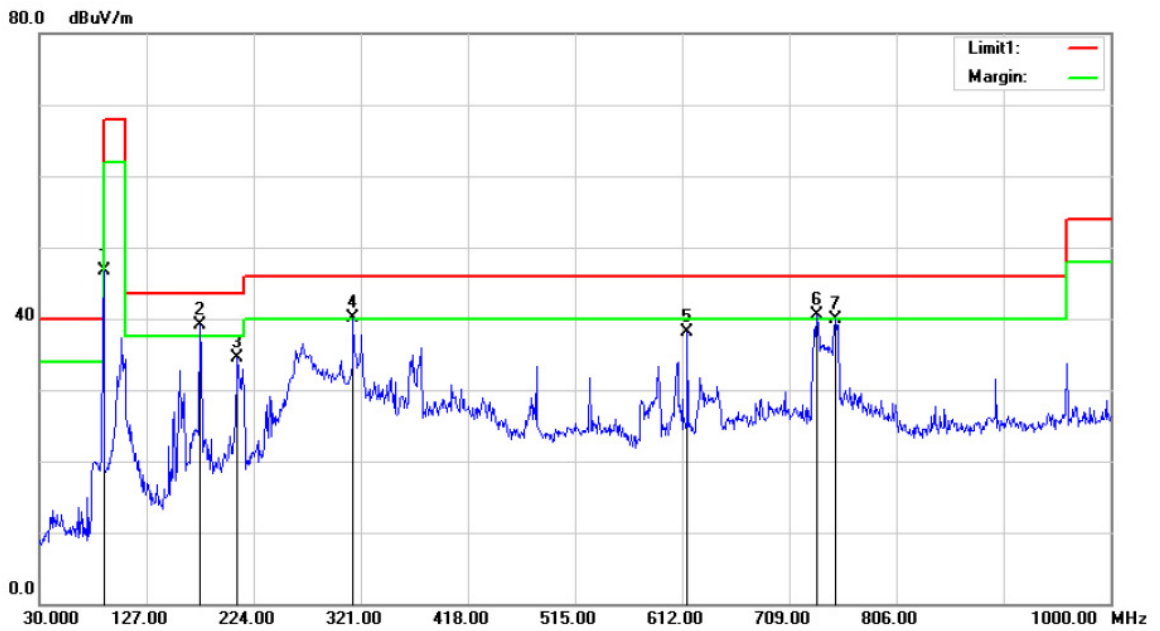

Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24  
 Limit: (RE)FCC PART 15 CLASS B (FM) Power: DC 12V Humidity: 53 %


Mode:TX88.1MHz

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		88.1000	64.82	-18.16	46.66	68.00	-21.34	peak	0	
2	*	175.5000	56.23	-17.15	39.08	43.50	-4.42	QP	0	
3		209.4500	49.40	-14.99	34.41	43.50	-9.09	QP	0	
4	!	314.2100	51.37	-11.32	40.05	46.00	-5.95	QP	0	
5		616.8500	43.66	-5.56	38.10	46.00	-7.90	QP	0	
6	!	734.2200	44.24	-3.69	40.55	46.00	-5.45	QP	0	
7		750.7100	43.27	-3.45	39.82	46.00	-6.18	QP	0	

\*:Maximum data x:Over limit !:over margin

Operator: H

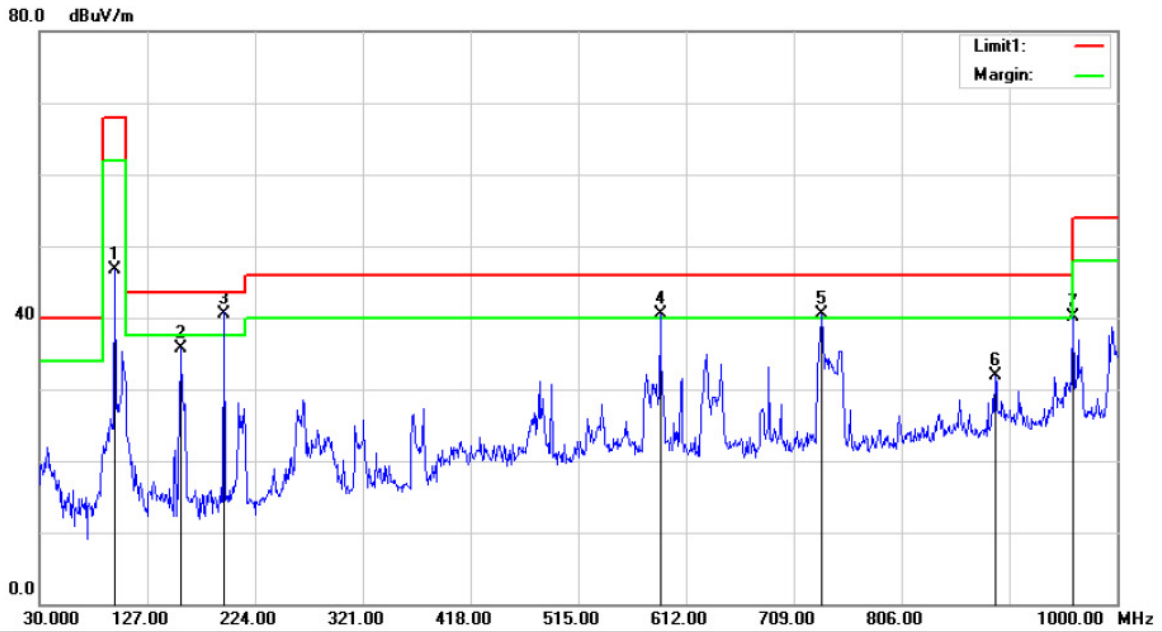

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24  
 Limit: (RE)FCC PART 15 CLASS B (FM) Power: DC 12V Humidity: 53 %


Mode:TX98.1MHz

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		98.1000	62.27	-15.60	46.67	68.00	-21.33	peak	0	
2		157.0700	54.11	-18.49	35.62	43.50	-7.88	QP	0	
3	*	195.8700	56.45	-16.02	40.43	43.50	-3.07	QP	0	
4	!	588.7200	46.58	-6.03	40.55	46.00	-5.45	QP	0	
5	!	734.2200	44.10	-3.69	40.41	46.00	-5.59	QP	0	
6		890.3900	33.46	-1.57	31.89	46.00	-14.11	QP	0	
7		960.2300	40.70	-0.55	40.15	54.00	-13.85	QP	0	

\*:Maximum data    x:Over limit    !:over margin

Operator: H

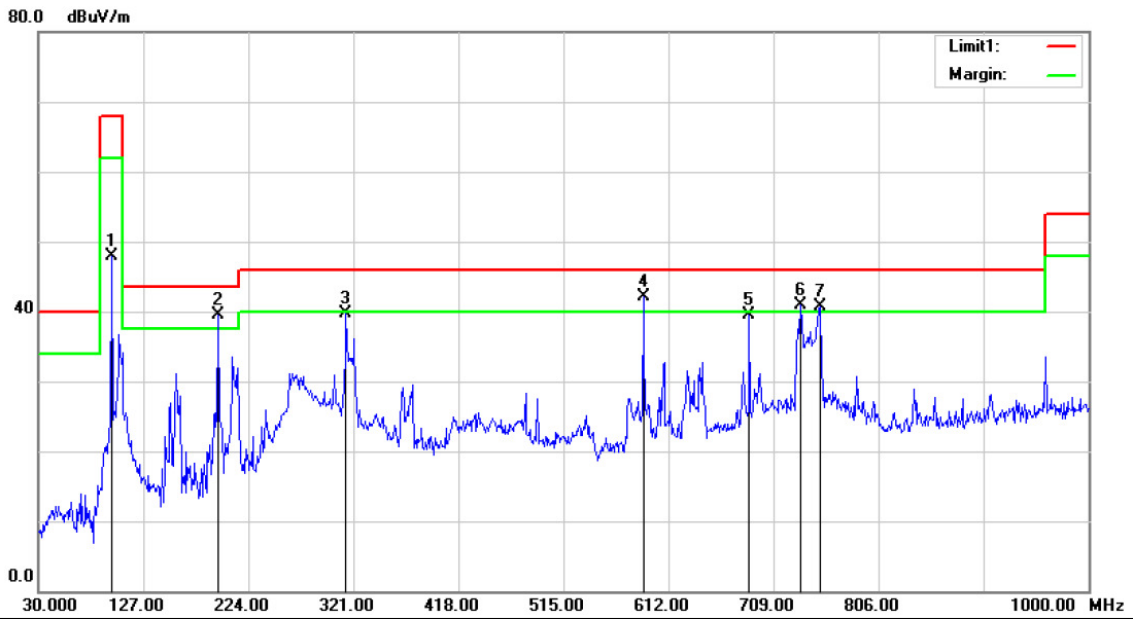


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24  
 Limit: (RE)FCC PART 15 CLASS B (FM) Power: DC 12V Humidity: 53 %

Mode: TX98.1MHz  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		98.1000	63.47	-15.60	47.87	68.00	-20.13	peak	0	
2	*	195.8700	55.61	-16.02	39.59	43.50	-3.91	QP	0	
3		314.2100	50.96	-11.32	39.64	46.00	-6.36	QP	0	
4	!	588.7200	48.09	-6.03	42.06	46.00	-3.94	QP	0	
5		686.6900	43.84	-4.41	39.43	46.00	-6.57	QP	0	
6	!	734.2200	44.59	-3.69	40.90	46.00	-5.10	QP	0	
7	!	751.6800	44.11	-3.43	40.68	46.00	-5.32	QP	0	

\*:Maximum data x:Over limit !:over margin

Operator: H

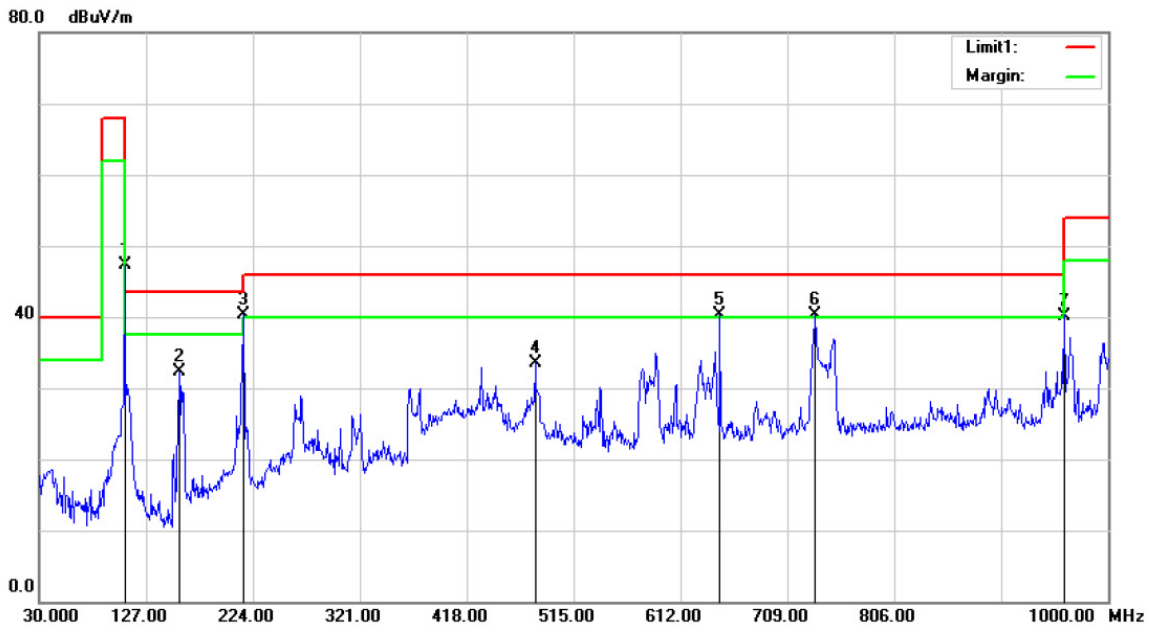

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24  
 Limit: (RE)FCC PART 15 CLASS B (FM) Power: DC 12V Humidity: 53 %

Mode:TX107.9MHz


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		107.9000	62.60	-15.36	47.24	68.00	-20.76	peak	0	
2		157.0700	50.84	-18.49	32.35	43.50	-11.15	QP	0	
3	*	215.2700	55.04	-14.68	40.36	43.50	-3.14	QP	0	
4		480.0800	41.28	-7.75	33.53	46.00	-12.47	QP	0	
5	!	647.8900	45.42	-5.05	40.37	46.00	-5.63	QP	0	
6	!	734.2200	43.98	-3.69	40.29	46.00	-5.71	QP	0	
7		960.2300	40.75	-0.55	40.20	54.00	-13.80	QP	0	

\*:Maximum data x:Over limit !:over margin

Operator: H



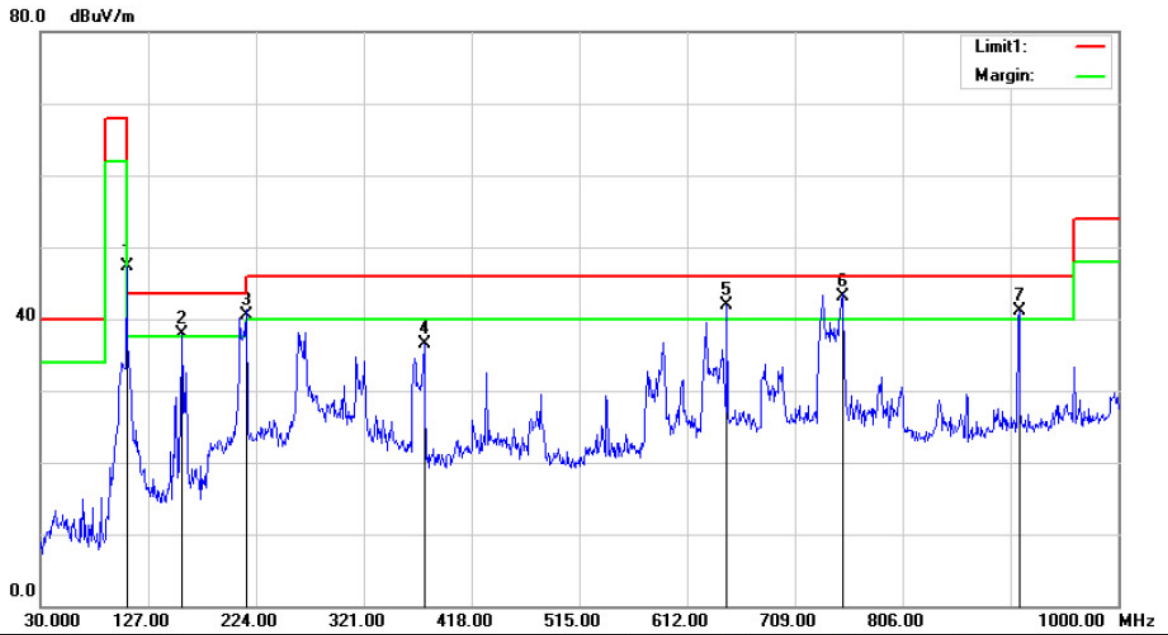

Site 3m Chamber #3

Polarization: *Horizontal*

Temperature: 24

Limit: (RE)FCC PART 15 CLASS B (FM)

Power: DC 12V

Humidity: 53 %

Mode:TX107.9MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		107.9000	62.57	-15.36	47.21	68.00	-20.79		0	peak	
2	!	157.0700	56.30	-18.49	37.81	43.50	-5.69		0	QP	
3	!	215.2700	55.15	-14.68	40.47	43.50	-3.03		0	QP	
4		375.3200	46.79	-10.20	36.59	46.00	-9.41		0	QP	
5	!	647.8900	46.91	-5.05	41.86	46.00	-4.14		0	QP	
6	*	751.6800	46.46	-3.43	43.03	46.00	-2.97		0	QP	
7	!	910.7600	42.33	-1.29	41.04	46.00	-4.96		0	QP	

\*:Maximum data    x:Over limit    !:over margin

Operator: H

■ Spurious Emission Above 1GHz (1GHz to 1.08GHz)

Temperature:	24 °C	Test Date:	September 9, 2016
Humidity:	53 %	Test By:	King Kong
Test mode:	FM	Frequency:	Channel 0: 81.1MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1023.50	V	42.48	29.34	74.00	54.00	-31.52	-24.66
1075.50	V	43.45	33.90	74.00	54.00	-30.55	-20.10
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
1035.25	H	48.78	30.79	74.00	54.00	-25.22	-23.21
1067.30	H	47.81	36.48	74.00	54.00	-26.19	-17.52

Temperature:	24 °C	Test Date:	September 9, 2016
Humidity:	53 %	Test By:	King Kong
Test mode:	FM	Frequency:	Channel 49: 98.1MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1023.16	V	42.81	29.61	74.00	54.00	-31.19	-24.39
1074.29	V	45.50	34.42	74.00	54.00	-28.50	-19.58
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
1035.12	H	45.65	27.28	74.00	54.00	-28.35	-26.72
1065.20	H	44.12	32.53	74.00	54.00	-29.88	-21.47

Temperature:	24 °C	Test Date:	September 9, 2016
Humidity:	53 %	Test By:	King Kong
Test mode:	FM	Frequency:	Channel 99: 107.9MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1027.21	V	46.51	33.12	74.00	54.00	-27.49	-20.88
1072.70	V	47.57	36.32	74.00	54.00	-26.43	-17.68
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
1035.27	H	45.35	29.12	74.00	54.00	-28.65	-24.88
1068.90	H	46.87	35.37	74.00	54.00	-27.13	-18.63

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured

**8.3 CONDUCTED EMISSION TEST**

**8.3.1 Applicable Standard**

According to FCC Part 15.207(a)

**8.3.2 Conformance Limit**

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

**8.3.3 Test Configuration**

Test according to clause 7.3 conducted emission test setup

**8.3.4 Test Procedure**

The EUT was placed on a table which is 0.8m above ground plane.  
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
 Repeat above procedures until all frequency measured were complete.

**8.3.5 Test Results**

Not applicable.

The EUT power supply is DC 12V.

**8.4 ANTENNA APPLICATION**

**8.4.1 Antenna Requirement**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**8.4.2 Result**

PASS.

The EUT has 1 antenna: a external Antenna for FM;

- Note:
- Antenna use a permanently attached antenna which is not replaceable.
  - Not using a standard antenna jack or electrical connector for antenna replacement
  - The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.