



FCC TEST REPORT

FCC ID: AUSCR7011B

Product	:	Burton Entertainment Center , McQueen Entertainment Center
Model Name	:	CR7011B-GY, CR7011XX-XXXX ("XX-XXXX" can be replaced by letter from "A" to "Z", number from "0" to "9" or blank)
Brand	:	CROSLEY
Report No.	:	PTC22052400802E-FC01
Prepared for		
Modern Marketing Concepts, Inc.		
1220 E Oak, St. Louisville, KY 40204 United States		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Modern Marketing Concepts, Inc.
Address : 1220 E Oak, St. Louisville, KY 40204 United States
Manufacture's name : Timsen Development Limited
Address : 5F, 447# Tianhebei Road, Guangzhou, China
Product name : Burton Entertainment Center , McQueen Entertainment Center
Model name : CR7011B-GY, CR7011XX-XXXX ("XX-XXXX" can be replaced by letter from "A" to "Z", number from "0" to "9" or blank)
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : Jun. 29, 2022 to Jul. 01, 2022
Date of Issue : Jul. 01, 2022
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Handwritten signature of Simon Pu in black ink.

Simon Pu / Engineer

Technical Manager:

Handwritten signature of Ronnie Liu in black ink.

Ronnie Liu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 TEST FACILITY	5
4 GENERAL INFORMATION	6
4.1 GENERAL DESCRIPTION OF E.U.T.....	6
4.2 TEST MODE	7
5 EQUIPMENT DURING TEST	9
5.1 EQUIPMENTS LIST.....	9
5.2 MEASUREMENT UNCERTAINTY.....	11
5.3 DESCRIPTION OF SUPPORT UNITS.....	12
6 CONDUCTED EMISSION	13
6.1 E.U.T. OPERATION.....	13
6.2 EUT SETUP	13
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
6.4 MEASUREMENT PROCEDURE:	14
6.5 CONDUCTED EMISSION LIMIT	14
6.6 MEASUREMENT DESCRIPTION.....	14
6.7 CONDUCTED EMISSION TEST RESULT	14
7 RADIATED SPURIOUS EMISSIONS	17
7.1 EUT OPERATION	17
7.2 TEST SETUP	18
7.3 SPECTRUM ANALYZER SETUP.....	19
7.4 TEST PROCEDURE	20
7.5 SUMMARY OF TEST RESULTS	21
8 MAXIMUM PEAK OUTPUT POWER TEST	28
8.1 TEST STANDARD AND LIMIT.....	28
8.2 TEST SETUP	28
8.3 TEST PROCEDURE	28
8.4 TEST DATA.....	29



9 20DB OCCUPY BANDWIDTH TEST	34
9.1 TEST STANDARD.....	34
9.2 TEST SETUP	34
9.3 TEST PROCEDURE.....	34
9.4 TEST DATA.....	34
10 CARRIER FREQUENCY SEPARATION TEST	40
10.1 TEST STANDARD AND LIMIT	40
10.2 TEST SETUP	40
10.3 TEST PROCEDURE.....	40
10.4 TEST DATA	40
11 NUMBER OF HOPPING CHANNEL TEST	43
11.1 TEST STANDARD AND LIMIT	43
11.2 TEST SETUP	43
11.3 TEST PROCEDURE.....	43
11.4 TEST DATA	44
12 DWELL TIME TEST	46
12.1 TEST STANDARD AND LIMIT	46
12.2 TEST SETUP	46
12.3 TEST PROCEDURE.....	46
12.4 TEST DATA	47
13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	52
13.1 TEST STANDARD AND LIMIT	52
13.2 TEST SETUP	52
13.3 TEST PROCEDURE	52
13.4 TEST DATA	53
14 ANTENNA REQUIREMENT	70
14.1 TEST STANDARD AND REQUIREMENT.....	70
14.2 ANTENNA CONNECTED CONSTRUCTION	70
15 APPENDIX I -- TEST SETUP PHOTOGRAPH	71
16 APPENDIX II -- EUT PHOTOGRAPH	73



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

3 TEST FACILITY

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A



4 General Information

4.1 General Description of E.U.T.

Product Name	:	Burton Entertainment Center , McQueen Entertainment Center
Model Name	:	CR7011B-GY
Additional model	:	CR7011XX-XXXX ("XX-XXXX" can be replaced by letter from "A" to "Z", number from "0" to "9" or blank)
Specification	:	BDR+EDR
Operation Frequency	:	2402-2480MHz
Number of Channel	:	79 channels for BDR+EDR
Type of Modulation	:	GFSK, $\pi/4$ -DQPSK,8DPSK For DSS
Antenna installation	:	PCB antenna
Antenna Gain	:	-0.58 dBi
Rated Power Supply	:	For Adapter: Model: GKYZA0100120US Input: 100-240V~50/60Hz,0.5A MAX Output:DC12V,1000mA
Test Power Supply	:	Input:120V
Hardware Version	:	V1.0
Software Version	:	V1.0



4.2 Test Mode

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-



Report No.: PTC22052400802E-FC01

Channel	Frequency(MHz)
0	2402
39	2441
78	2480



5 Equipment During Test

5.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2022
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2022
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2022
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2022

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2022
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2022
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2022
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2022
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2022
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2022
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2022
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2022
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2022
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2022



Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2022
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2022
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2022



5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±3.15dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



5.3 Description of Support Units

Equipment	Model No.	Series No.	Parameters
Adapter	GKYZA0100120 US	N/A	Input:AC 100-240V,50/60Hz 0.5A MAX Output:DC 12V,1000mA

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Frequency Range: : 150kHz to 30MHz
 Class/Severity: : Class B
 Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C
 Humidity: : 51 % RH
 Atmospheric Pressure: : 101.12 kPa
 Test Voltage : AC 120V/60Hz

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

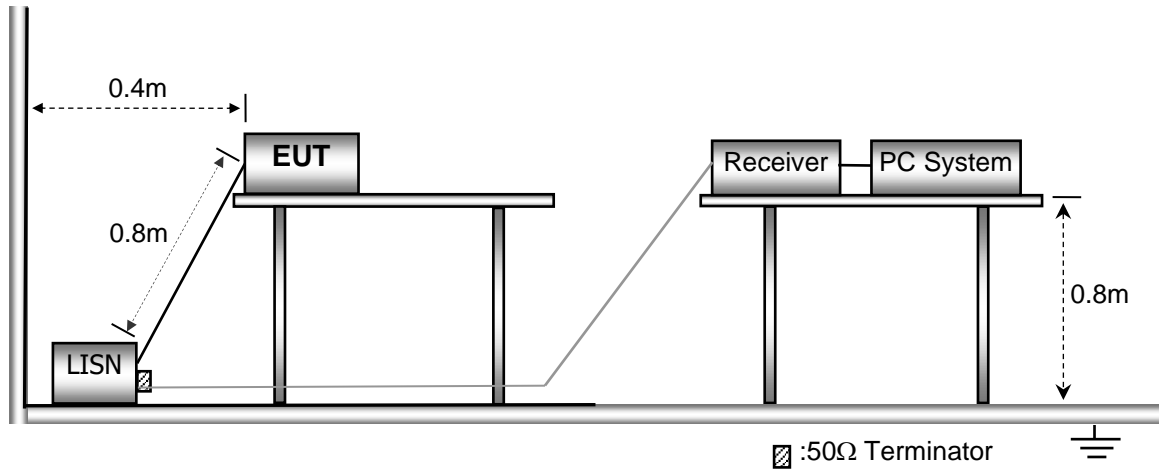

6.3 Test SET-UP (Block Diagram of Configuration)

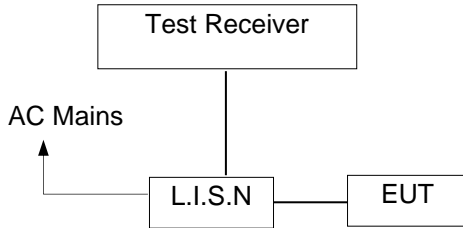

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.7 Conducted Emission Test Result

Pass

Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.




Line -120V/60Hz:

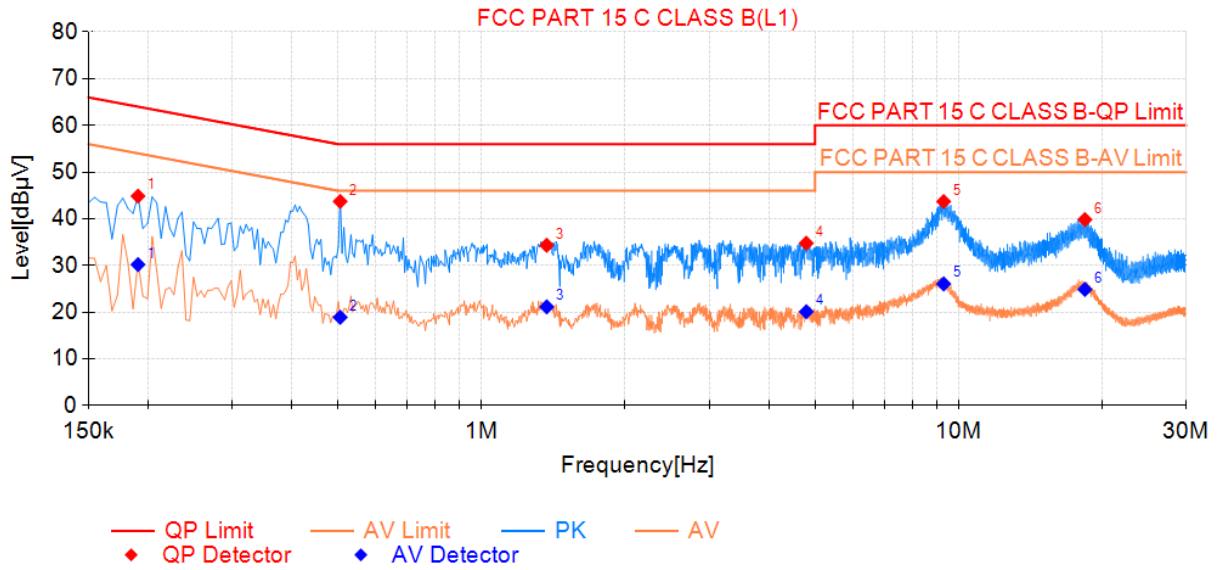

Final Data List								
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.191	44.87	64.01	19.14	30.20	54.01	23.81	PASS
2	0.506	43.73	56.00	12.27	18.91	46.00	27.09	PASS
3	1.370	34.34	56.00	21.66	21.14	46.00	24.86	PASS
4	4.794	34.78	56.00	21.22	20.11	46.00	25.89	PASS
5	9.303	43.71	60.00	16.29	26.07	50.00	23.93	PASS
6	18.393	39.84	60.00	20.16	24.88	50.00	25.12	PASS



Neutral -120V/60Hz:

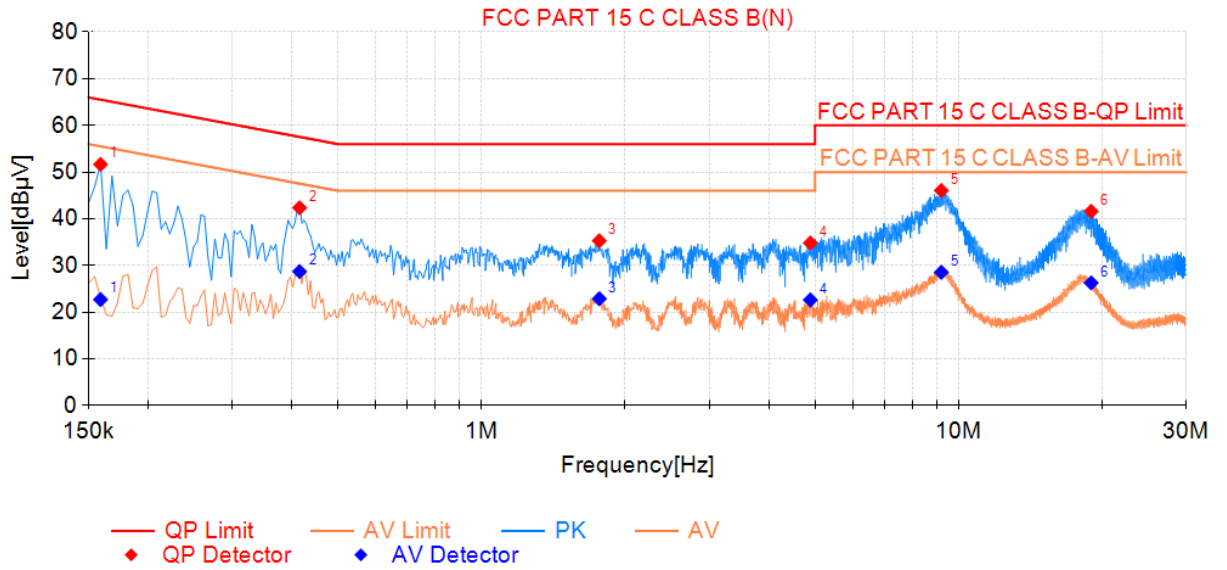

Final Data List								
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.159	51.66	65.52	13.86	22.70	55.52	32.82	PASS
2	0.416	42.36	57.54	15.18	28.71	47.54	18.83	PASS
3	1.766	35.29	56.00	20.71	22.89	46.00	23.11	PASS
4	4.889	34.81	56.00	21.19	22.63	46.00	23.37	PASS
5	9.200	46.06	60.00	13.94	28.55	50.00	21.45	PASS
6	18.960	41.61	60.00	18.39	26.28	50.00	23.72	PASS



7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
 Humidity : 55.5% RH
 Atmospheric Pressure : 101.3kPa
 Test Voltage : AC 120V60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

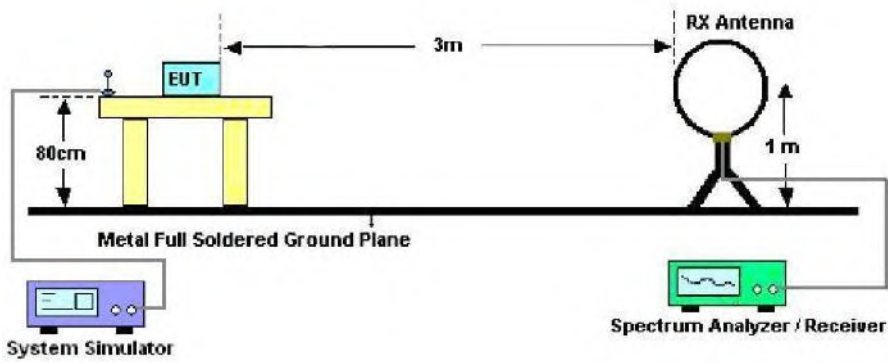

The test setup for emission measurement from 30 MHz to 1 GHz.

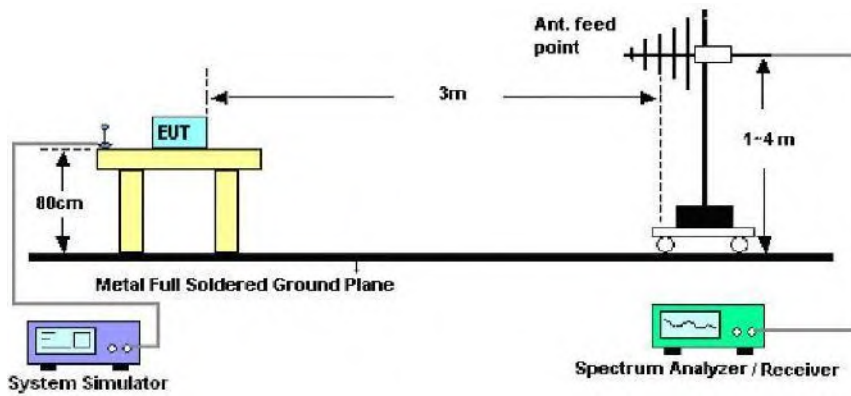

The test setup for emission measurement above 1 GHz.

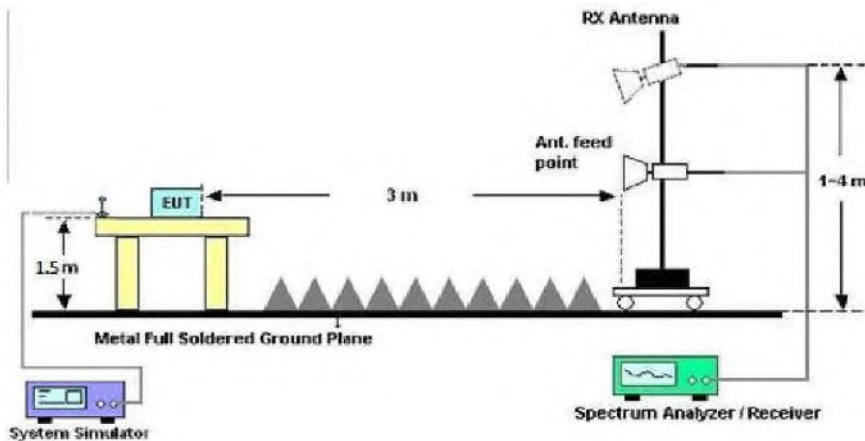



7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over Limit (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots,Low Channel (2402MHz) Worst case GFSK for record:



Test plot for Horizontal

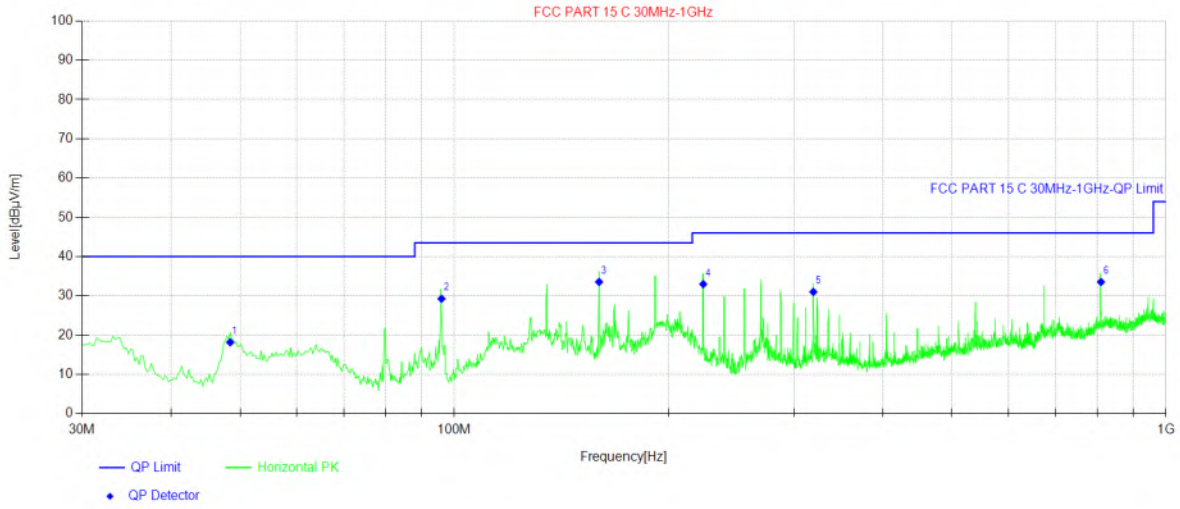


Final Data List[QP]								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.43	-17.72	18.17	40.00	21.83	100	128	Horizontal
2	95.96	-20.19	29.27	43.50	14.23	100	162	Horizontal
3	159.74	-15.86	33.55	43.50	9.95	100	214	Horizontal
4	223.76	-18.27	32.98	46.00	13.02	100	214	Horizontal
5	319.55	-14.88	31.00	46.00	15.00	100	84	Horizontal
6	810.37	-4.28	33.54	46.00	12.46	100	76	Horizontal

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test plot for Vertical

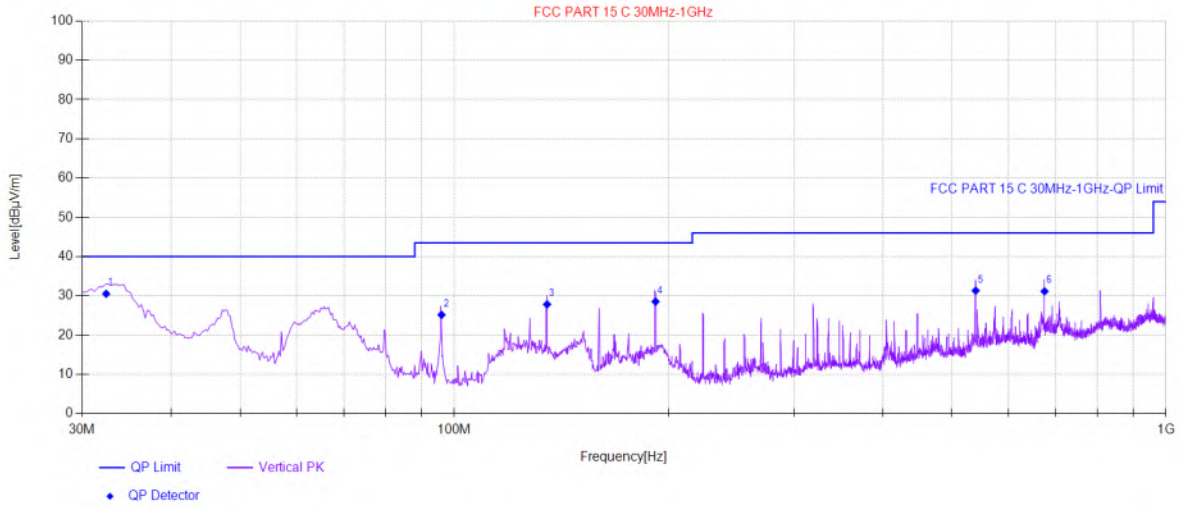

Final Data List[QP]								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.43	-18.20	30.53	40.00	9.47	100	222	Vertical
2	95.96	-20.19	25.17	43.50	18.33	100	139	Vertical
3	135.00	-16.88	27.83	43.50	15.67	100	359	Vertical
4	191.75	-18.22	28.53	43.50	14.97	100	0	Vertical
5	540.22	-9.60	31.32	46.00	14.68	100	51	Vertical
6	675.05	-6.94	31.16	46.00	14.84	100	12	Vertical

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test Frequency 1GHz-25GHz

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK, Hopping)mode have been tested, and the worst result(GFSK, Hopping) was report as below

Test Mode: CH00 GFSK					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804	45.46	34.04	6.58	34.09	51.99	74	-22.01	V
7206	41.13	37.11	7.73	34.5	51.47	74	-22.53	V
9608	37.57	39.31	9.23	34.79	51.32	74	-22.68	V
4804	45.86	34.04	6.58	34.09	52.39	74	-21.61	H
7206	36.37	37.11	7.73	34.5	46.71	74	-27.29	H
9608	39.90	39.31	9.23	34.79	53.65	74	-20.35	H
Average Value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804	31.81	34.04	6.58	34.09	38.34	54	-15.66	V
7206	27.02	37.11	7.73	34.5	37.36	54	-16.64	V
9608	24.00	39.31	9.23	34.79	37.75	54	-16.25	V
4804	33.65	34.04	6.58	34.09	40.18	54	-13.82	H
7206	28.13	37.11	7.73	34.5	38.47	54	-15.53	H
9608	25.61	39.31	9.23	34.79	39.36	54	-14.64	H



Test Mode: CH39 GFSK					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882	42.35	34.38	6.69	34.09	49.33	74	-24.67	V
7323	38.51	37.22	7.78	34.53	48.98	74	-25.02	V
9764	35.25	39.46	9.35	34.8	49.26	74	-24.74	V
4882	44.41	34.38	6.69	34.09	51.39	74	-22.61	H
7323	37.70	37.22	7.78	34.53	48.17	74	-25.83	H
9764	34.30	39.46	9.35	34.8	48.31	74	-25.69	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882	32.61	34.38	6.69	34.09	39.59	54	-14.41	V
7323	26.96	37.22	7.78	34.53	37.43	54	-16.57	V
9764	24.28	39.46	9.35	34.8	38.29	54	-15.71	V
4882	32.63	34.38	6.69	34.09	39.61	54	-14.39	H
7323	28.73	37.22	7.78	34.53	39.20	54	-14.80	H
9764	26.40	39.46	9.35	34.8	40.41	54	-13.59	H



Test Mode: CH78 GFSK					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960	42.76	34.72	6.79	34.09	50.18	74	-23.82	V
7440	40.56	37.34	7.82	34.57	51.15	74	-22.85	V
9920	33.79	39.62	9.46	34.81	48.06	74	-25.94	V
4960	41.14	34.72	6.79	34.09	48.56	74	-25.44	H
7440	37.78	37.34	7.82	34.57	48.37	74	-25.63	H
9920	37.49	39.62	9.46	34.81	51.76	74	-22.24	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960	33.61	34.04	6.58	34.09	40.14	54	-13.86	V
7440	27.12	37.11	7.73	34.5	37.46	54	-16.54	V
9920	25.16	39.31	9.23	34.79	38.91	54	-15.09	V
4960	32.11	34.04	6.58	34.09	38.64	54	-15.36	H
7440	26.60	37.11	7.73	34.5	36.94	54	-17.06	H
9920	23.99	39.31	9.23	34.79	37.74	54	-16.26	H

Note:

1. The testing has been conformed to $10 \times 2480\text{MHz} = 24800\text{MHz}$.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Over Limit = Emission Level - Limit



Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK)mode have been tested, and the worst result(GFSK) was report as below

Test Mode: Low Channel 2402MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390	47.99	29.15	3.41	34.01	46.54	74	-27.46	H	Peak
2400	59.14	29.16	3.43	34.01	57.72	74	-16.28	H	Peak
2390	47.59	29.15	3.41	34.01	46.14	74	-27.86	V	Peak
2400	54.51	29.16	3.43	34.01	53.09	74	-20.91	V	Peak
2390	40.20	29.15	3.41	34.01	38.75	54	-15.25	H	AV
2400	43.91	29.16	3.43	34.01	42.49	54	-11.51	H	AV
2390	39.23	29.15	3.41	34.01	37.78	54	-16.22	V	AV
2400	44.38	29.16	3.43	34.01	42.96	54	-11.04	V	AV

Test Mode: High Channel 2480MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.5	59.41	29.28	3.53	34.03	58.19	74	-15.81	H	Peak
2500	49.72	29.30	3.56	34.03	48.55	74	-25.45	H	Peak
2483.5	60.40	29.28	3.53	34.03	59.18	74	-14.82	V	Peak
2500	48.93	29.30	3.56	34.03	47.76	74	-26.24	V	Peak
2483.5	42.83	29.28	3.53	34.03	41.61	54	-12.39	H	AV
2500	39.40	29.30	3.56	34.03	38.23	54	-15.77	H	AV
2483.5	43.23	29.28	3.53	34.03	42.01	54	-11.99	V	AV
2500	39.92	29.30	3.56	34.03	38.75	54	-15.25	V	AV




8 Maximum Peak Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	125mW

8.2 Test Setup



8.3 Test Procedure


1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.



8.4 Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-0.14	≤20.97	PASS
		2441	0.02	≤20.97	PASS
		2480	0.52	≤20.97	PASS
2DH5	Ant1	2402	0.46	≤20.97	PASS
		2441	0.69	≤20.97	PASS
		2480	1.03	≤20.97	PASS
3DH5	Ant1	2402	0.86	≤20.97	PASS
		2441	0.96	≤20.97	PASS
		2480	1.5	≤20.97	PASS

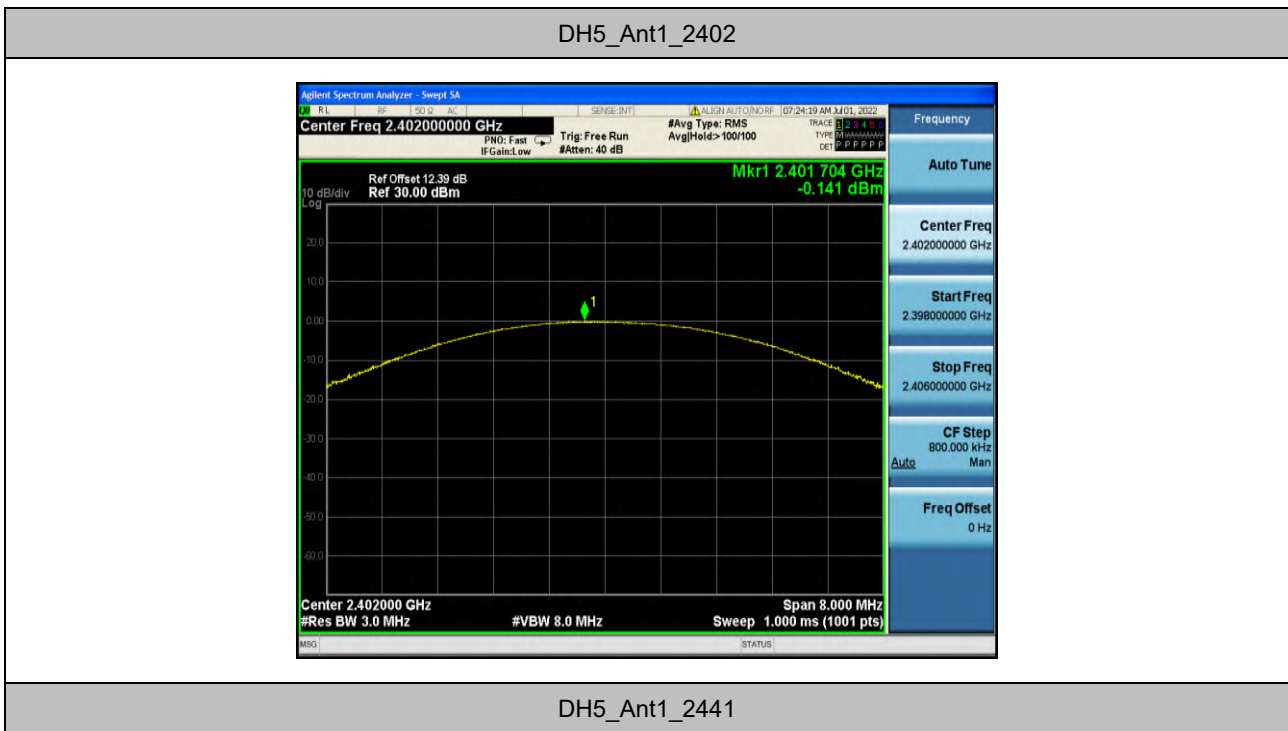




DH5_Ant1_2480



2DH5_Ant1_2402

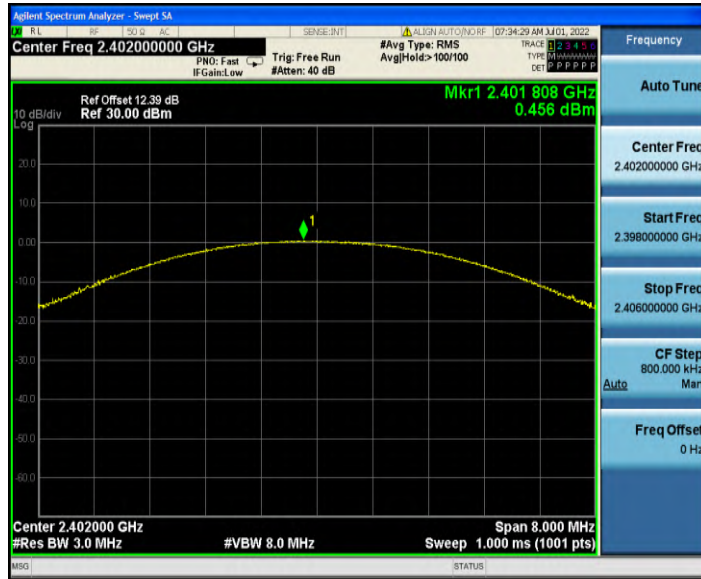

2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480






9 20DB Occupy Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup

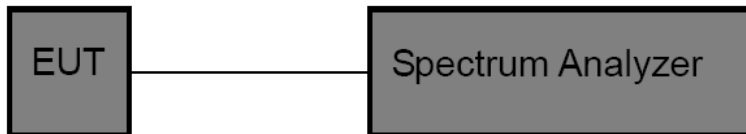

9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data

Test Item	: 20dB BW	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH



TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.888	2401.565	2402.453	---	---
		2441	0.888	2440.565	2441.453	---	---
		2480	0.882	2479.568	2480.450	---	---
2DH5	Ant1	2402	1.302	2401.358	2402.660	---	---
		2441	1.296	2440.361	2441.657	---	---
		2480	1.302	2479.361	2480.663	---	---
3DH5	Ant1	2402	1.221	2401.421	2402.642	---	---
		2441	1.224	2440.421	2441.645	---	---
		2480	1.227	2479.421	2480.648	---	---

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480






10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:


1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	: Frequency Separation	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH



TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.004	≥0.888	PASS
2DH5	Ant1	Hop	1.162	≥0.868	PASS
3DH5	Ant1	Hop	1.15	≥0.818	PASS

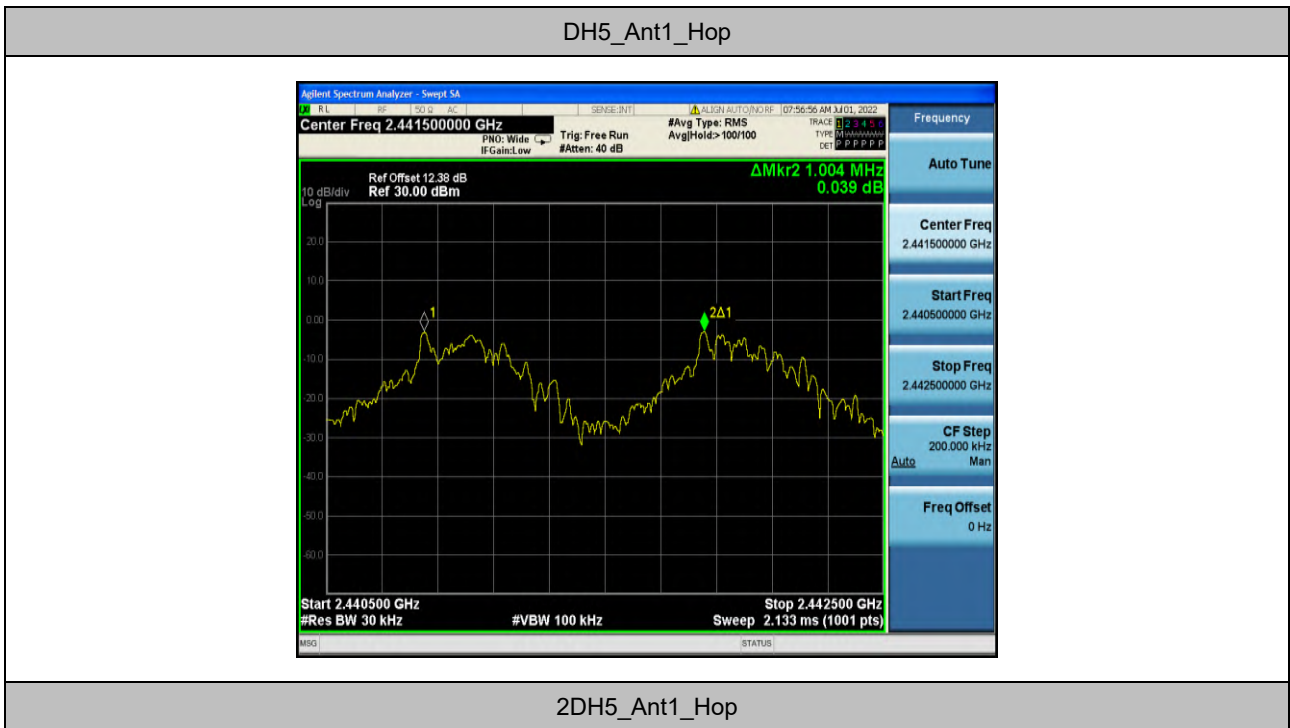



3DH5_Ant1_Hop






11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:


1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.




11.4 Test Data

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

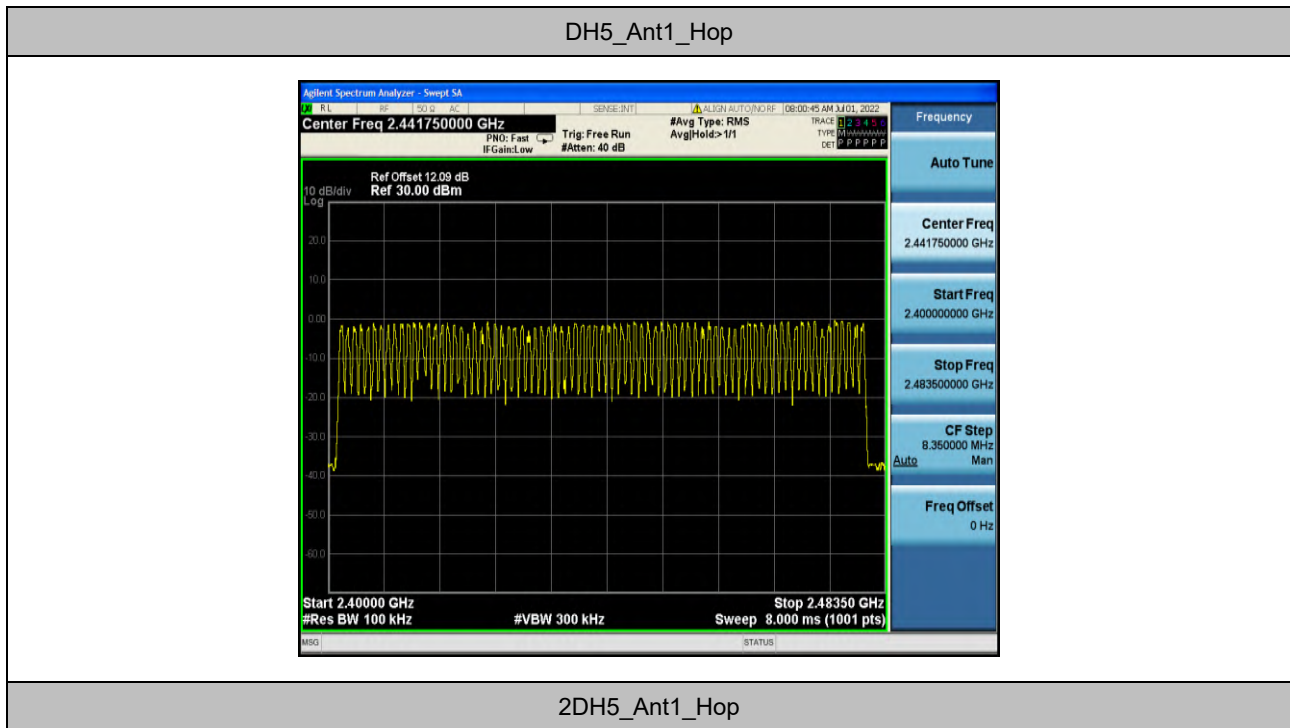

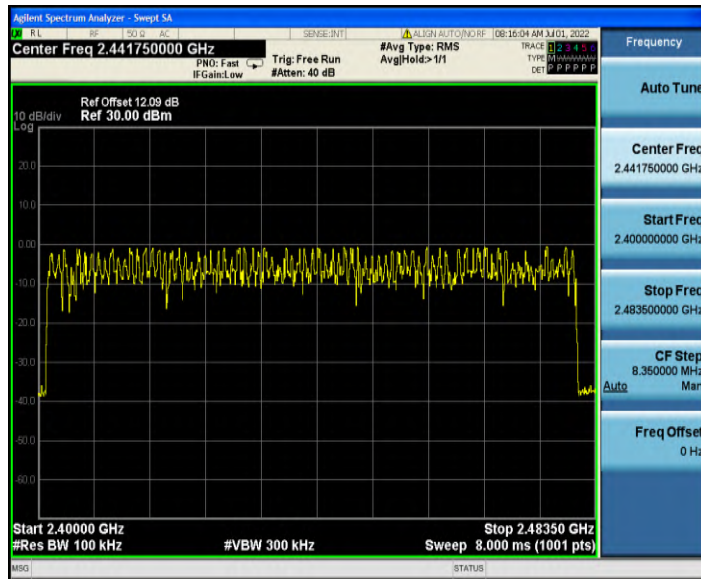

3DH5_Ant1_Hop






12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:


1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



12.4 Test Data


Test Item	: Time of Occupancy	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.34	320	0.108	≤0.4	PASS
DH3	Ant1	Hop	0.34	160	0.054	≤0.4	PASS
DH5	Ant1	Hop	0.34	106.67	0.036	≤0.4	PASS
2DH1	Ant1	Hop	0.34	320	0.108	≤0.4	PASS
2DH3	Ant1	Hop	0.34	160	0.054	≤0.4	PASS
2DH5	Ant1	Hop	0.34	106.67	0.036	≤0.4	PASS
3DH1	Ant1	Hop	0.34	320	0.108	≤0.4	PASS
3DH3	Ant1	Hop	0.34	160	0.054	≤0.4	PASS
3DH5	Ant1	Hop	0.34	106.67	0.036	≤0.4	PASS

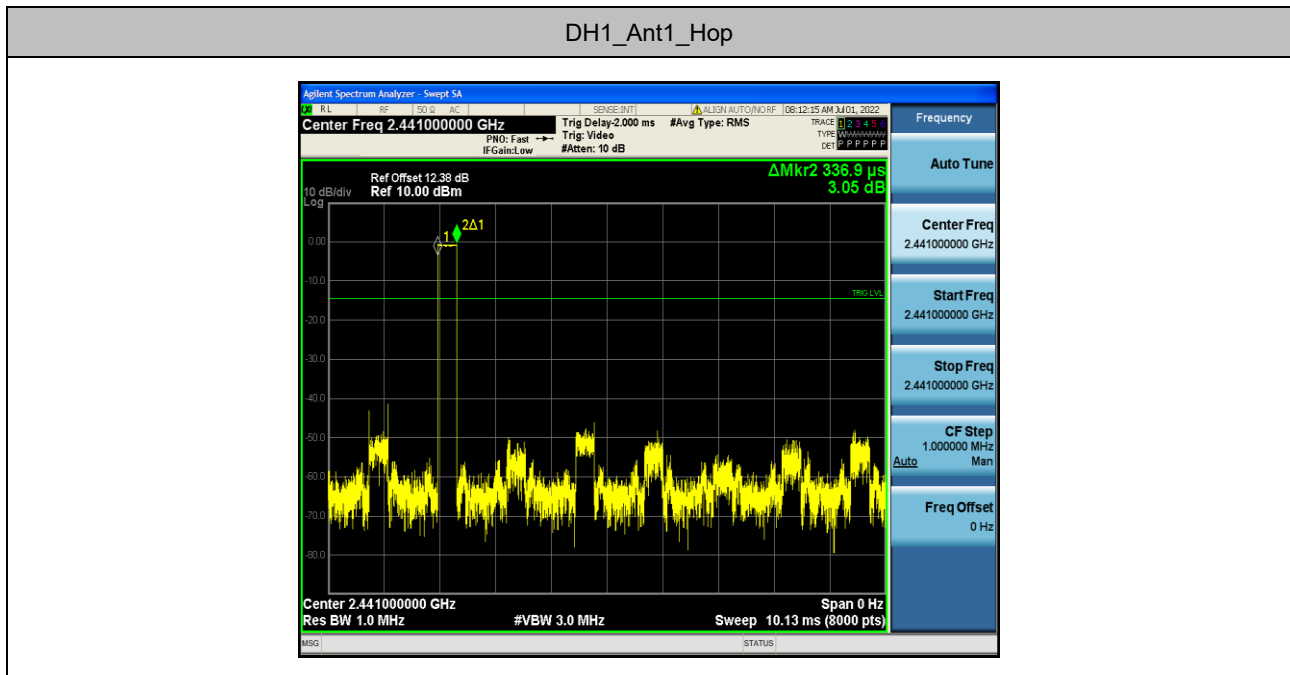





DH3_Ant1_Hop

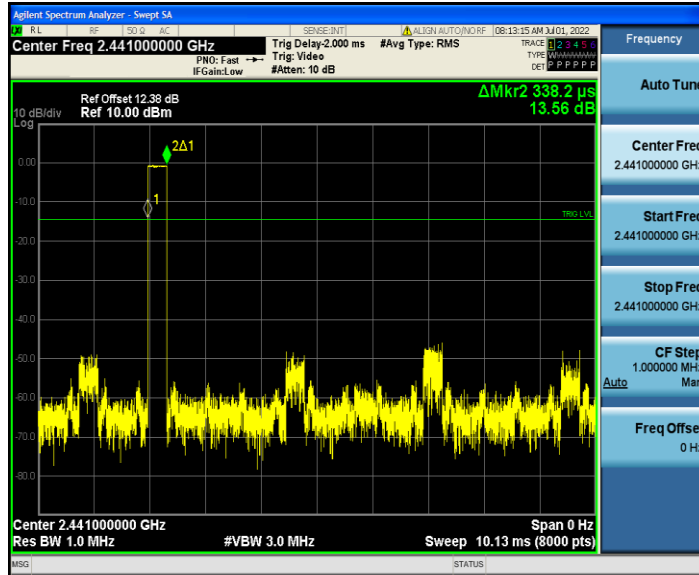


DH5_Ant1_Hop

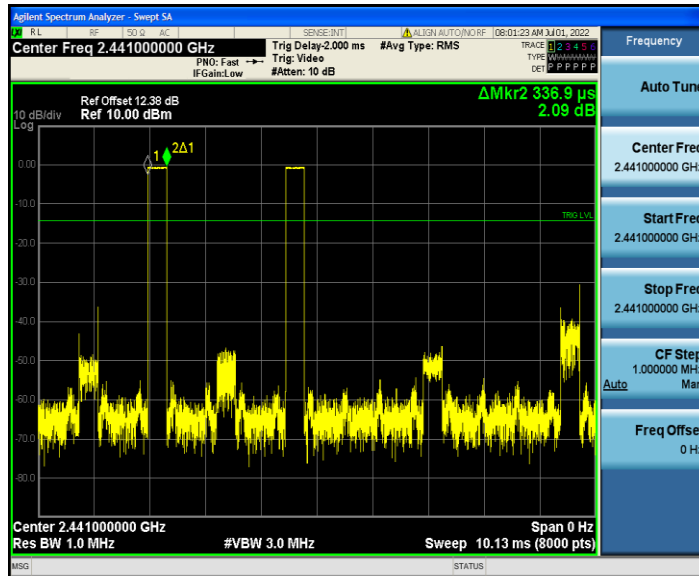


2DH1_Ant1_Hop

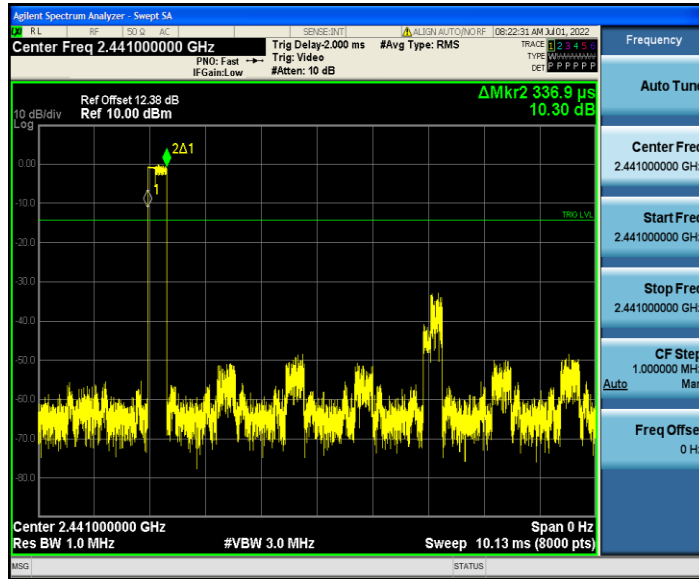


2DH3_Ant1_Hop

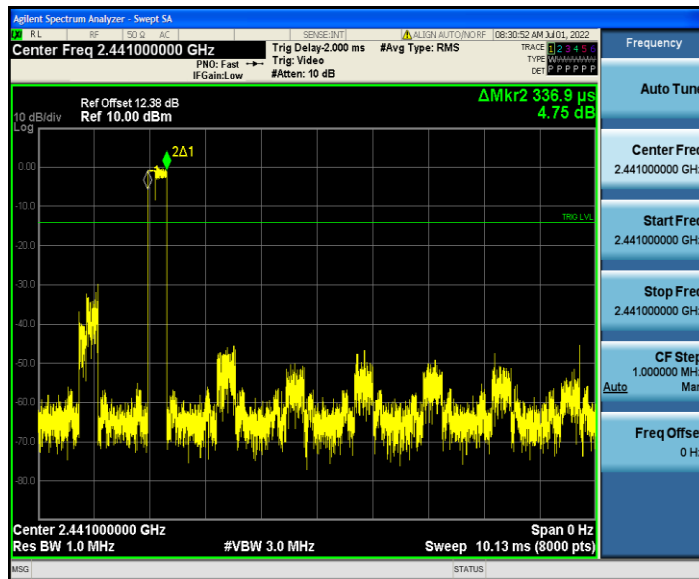


2DH5_Ant1_Hop

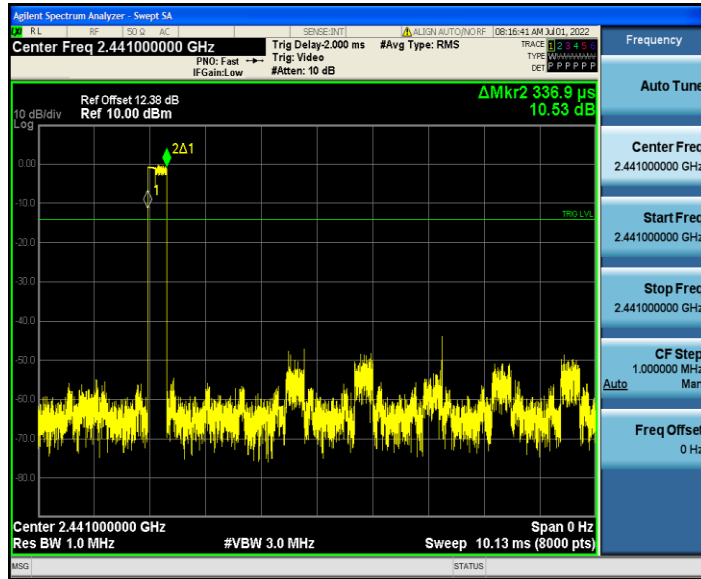


3DH1_Ant1_Hop

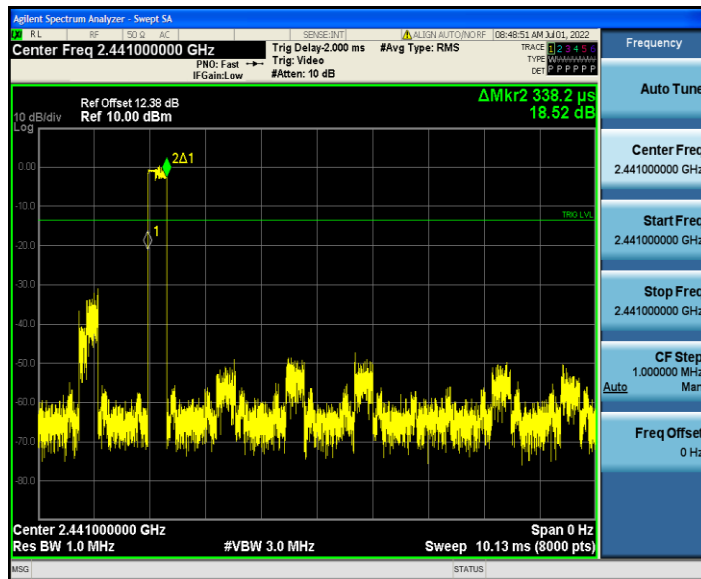

3DH3_Ant1_Hop

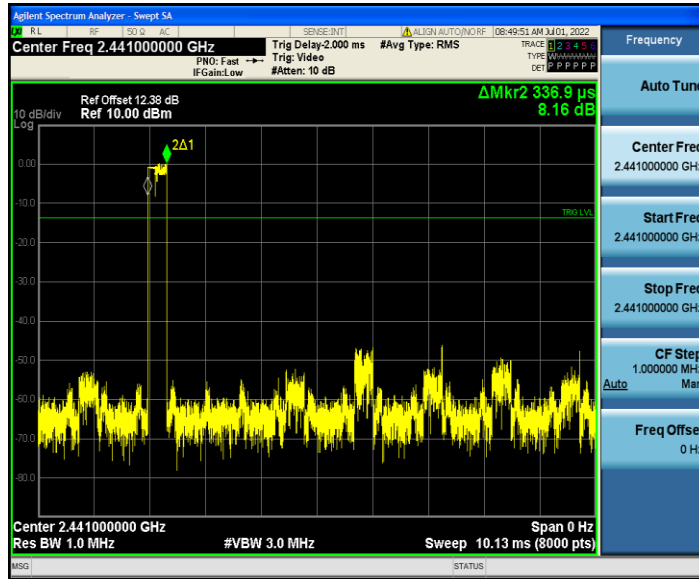

3DH5_Ant1_Hop

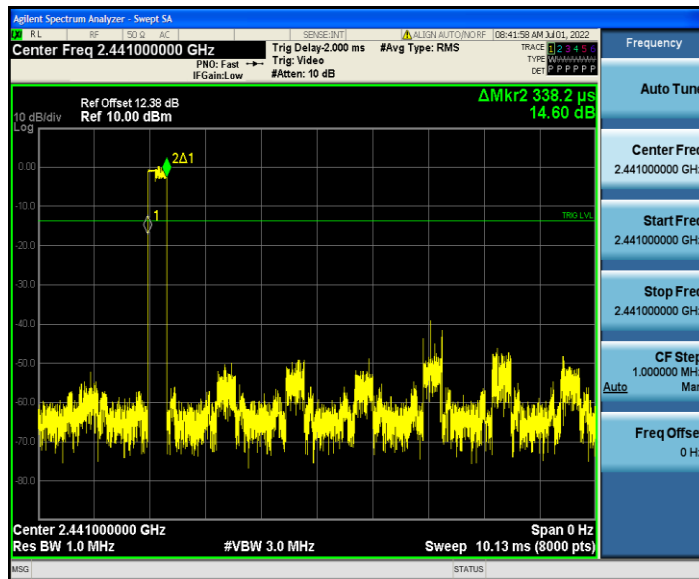


13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.




13.4 Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: AC 120V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-0.78	-43.19	≤-20.78	PASS
		High	2480	-0.08	-42.94	≤-20.08	PASS
		Low	Hop_2402	-3.62	-46.02	≤-23.62	PASS
		High	Hop_2480	-0.22	-43.5	≤-20.22	PASS
2DH5	Ant1	Low	2402	-0.90	-43.5	≤-20.9	PASS
		High	2480	-0.19	-43.95	≤-20.19	PASS
		Low	Hop_2402	-3.20	-46.18	≤-23.2	PASS
		High	Hop_2480	-1.70	-44.84	≤-21.7	PASS
3DH5	Ant1	Low	2402	-0.82	-44.31	≤-20.82	PASS
		High	2480	-0.15	-43.76	≤-20.15	PASS
		Low	Hop_2402	-2.80	-45.75	≤-22.8	PASS
		High	Hop_2480	-0.31	-43.82	≤-20.31	PASS




DH5_Ant1_Low_2402

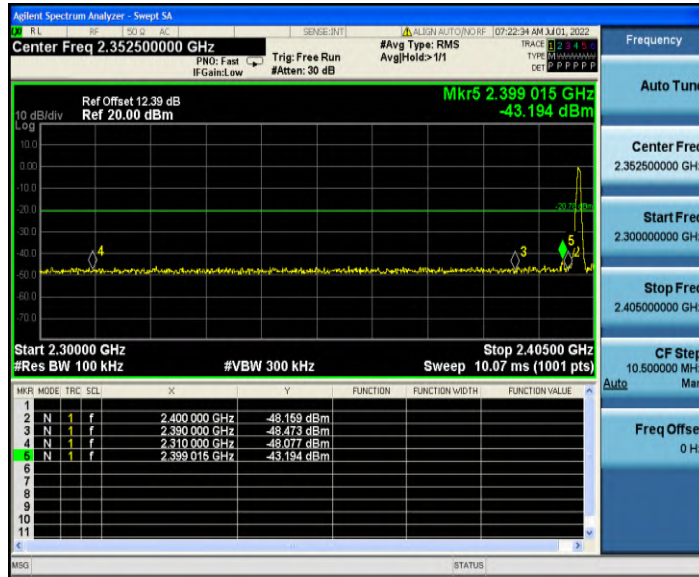


DH5_Ant1_High_2480

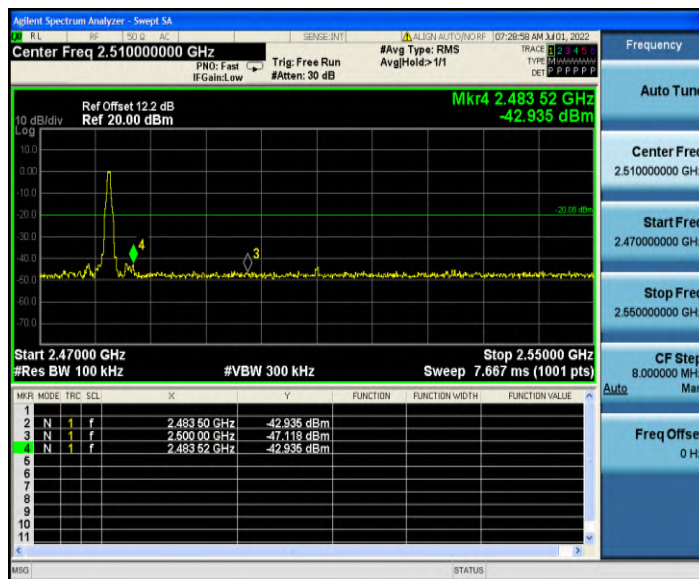


DH5_Ant1_Low_Hop_2402

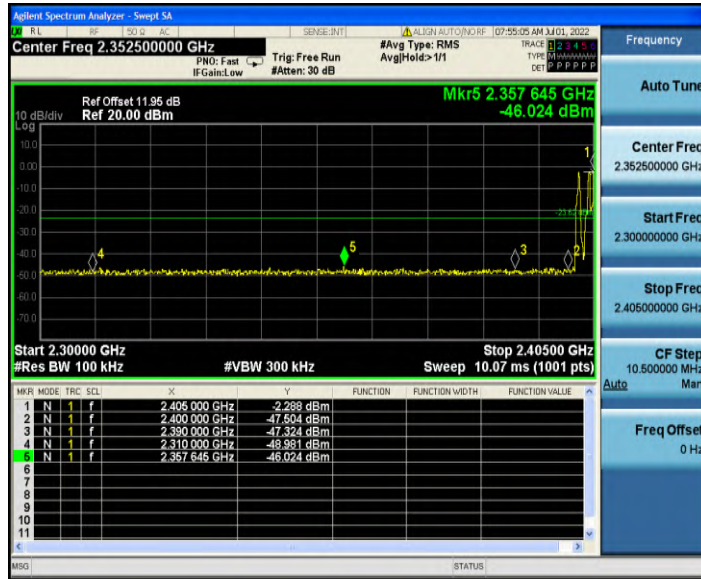


DH5_Ant1_High_Hop_2480

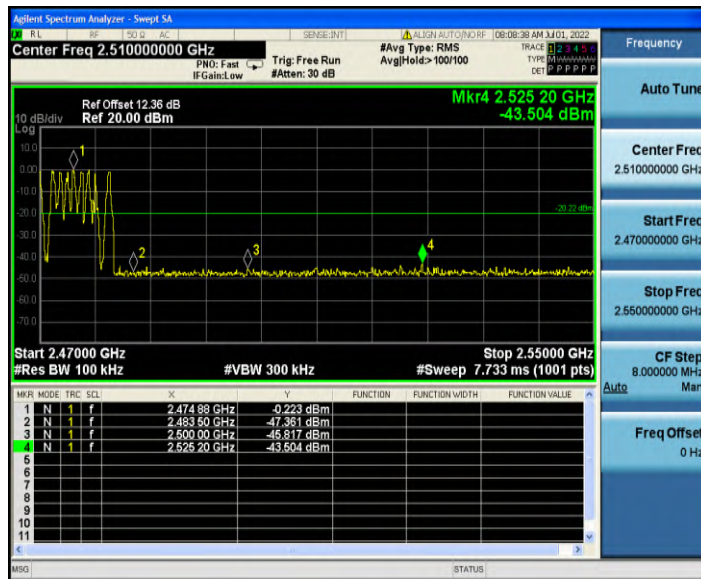


2DH5_Ant1_Low_2402

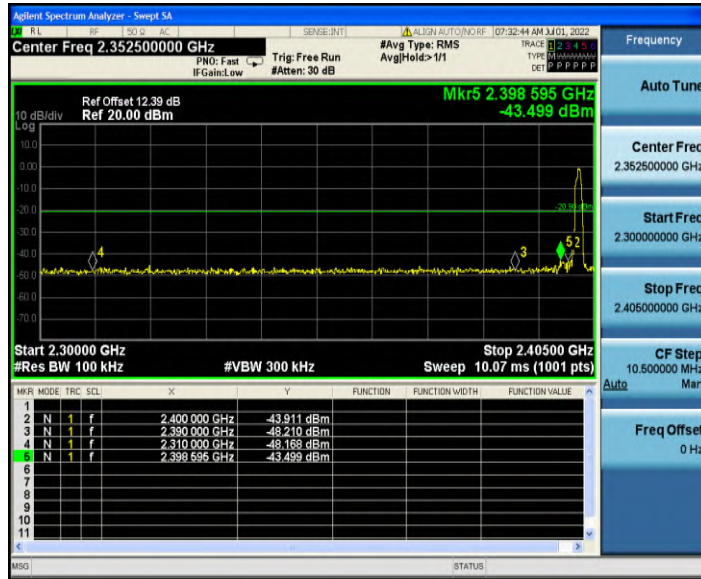


2DH5_Ant1_High_2480

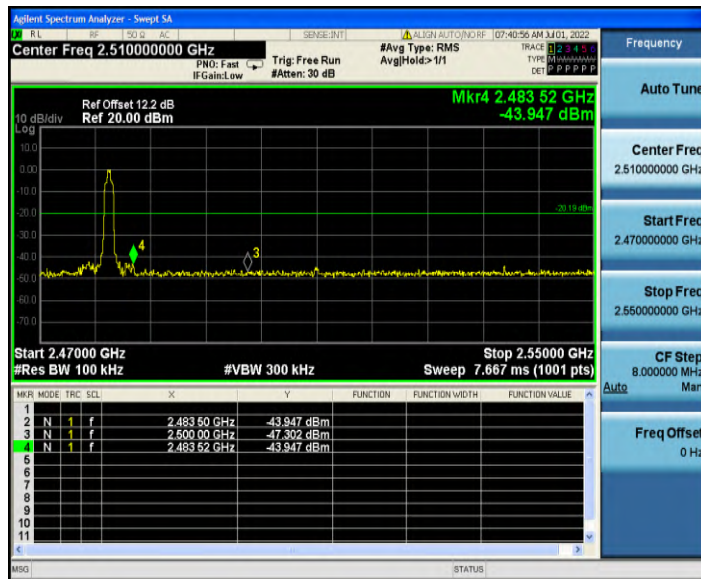


2DH5_Ant1_Low_Hop_2402

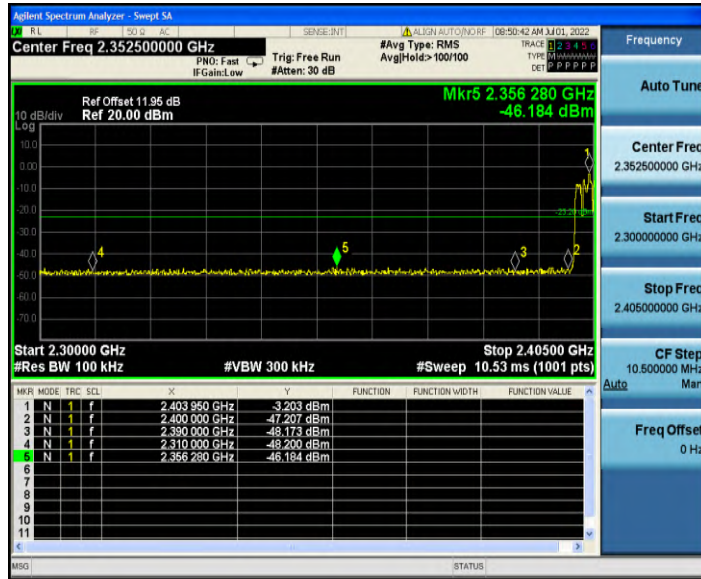


2DH5_Ant1_High_Hop_2480

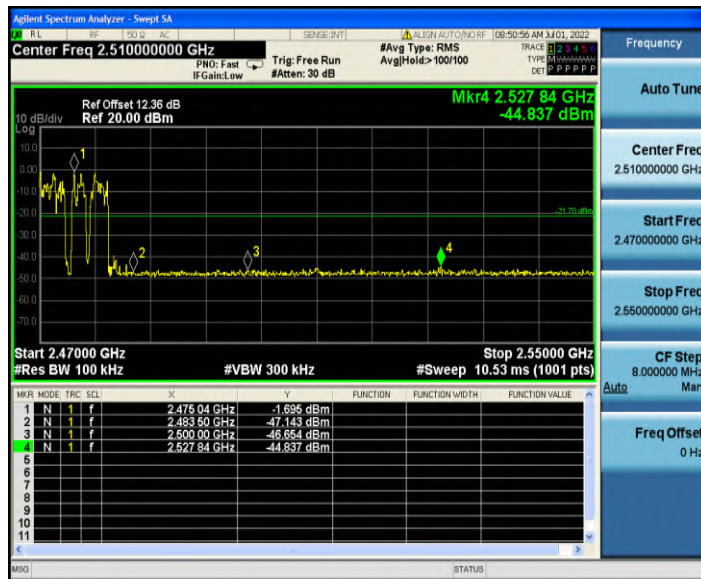


3DH5_Ant1_Low_2402

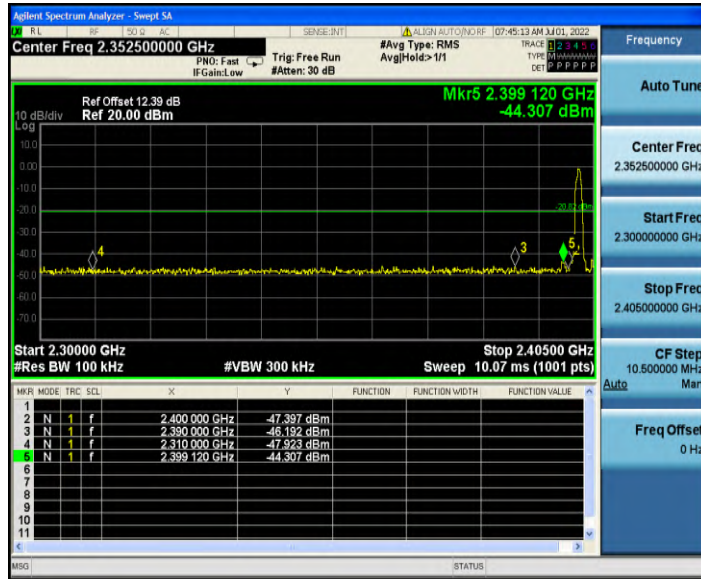


3DH5_Ant1_High_2480

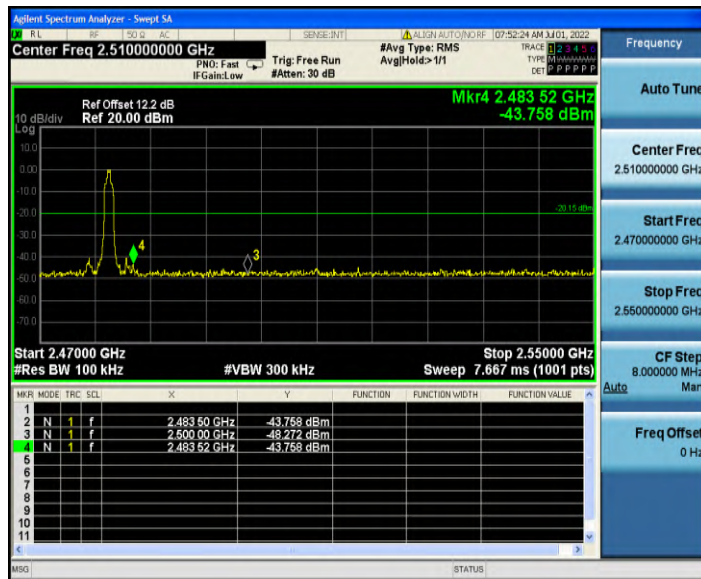

3DH5_Ant1_Low_Hop_2402

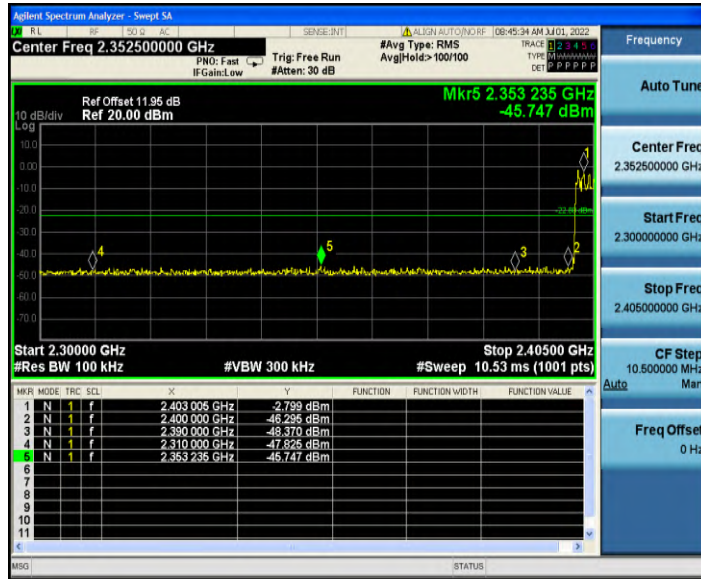

3DH5_Ant1_High_Hop_2480

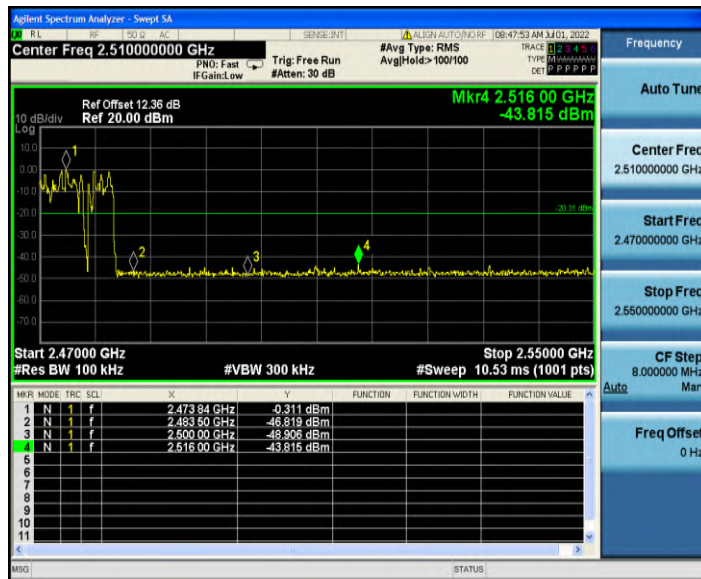



Conducted Emission:


Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	-0.78	-48.93	≤-20.78	PASS
			1000~26500	-0.78	-41.3	≤-20.78	PASS
		2441	30~1000	-0.60	-50.44	≤-20.6	PASS
			1000~26500	-0.60	-41.36	≤-20.6	PASS
		2480	30~1000	-0.08	-49.19	≤-20.08	PASS
			1000~26500	-0.08	-41.16	≤-20.08	PASS
2DH5	Ant1	2402	30~1000	-0.90	-48.85	≤-20.9	PASS
			1000~26500	-0.90	-41.25	≤-20.9	PASS
		2441	30~1000	-0.67	-50.18	≤-20.67	PASS
			1000~26500	-0.67	-41.17	≤-20.67	PASS
		2480	30~1000	-0.19	-49.77	≤-20.19	PASS
			1000~26500	-0.19	-42.25	≤-20.19	PASS
3DH5	Ant1	2402	30~1000	-0.82	-48.97	≤-20.82	PASS
			1000~26500	-0.82	-41.83	≤-20.82	PASS
		2441	30~1000	-0.61	-51.4	≤-20.61	PASS
			1000~26500	-0.61	-41.35	≤-20.61	PASS
		2480	30~1000	-0.15	-51.37	≤-20.15	PASS
			1000~26500	-0.15	-41.63	≤-20.15	PASS




Test Graphs


DH5_Ant1_2402_30MHz~1GHz

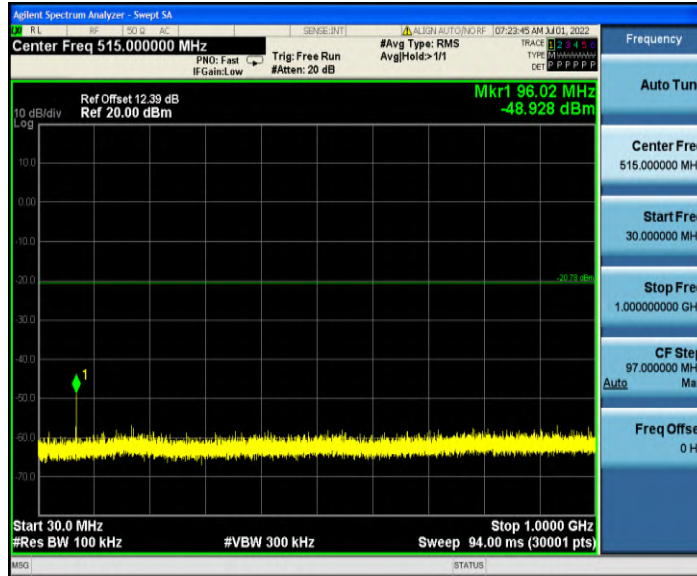


DH5_Ant1_2402_1GHz~26.50GHz

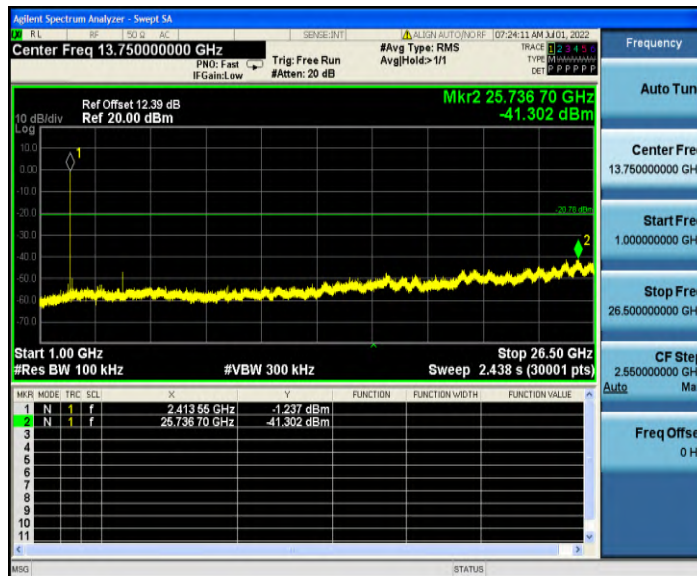


DH5_Ant1_2441_30MHz~1GHz

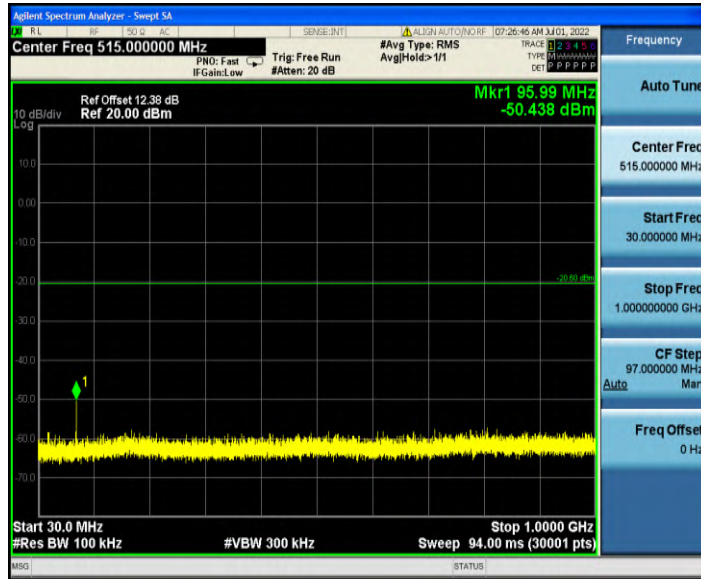


DH5_Ant1_2441_1GHz~26.50GHz

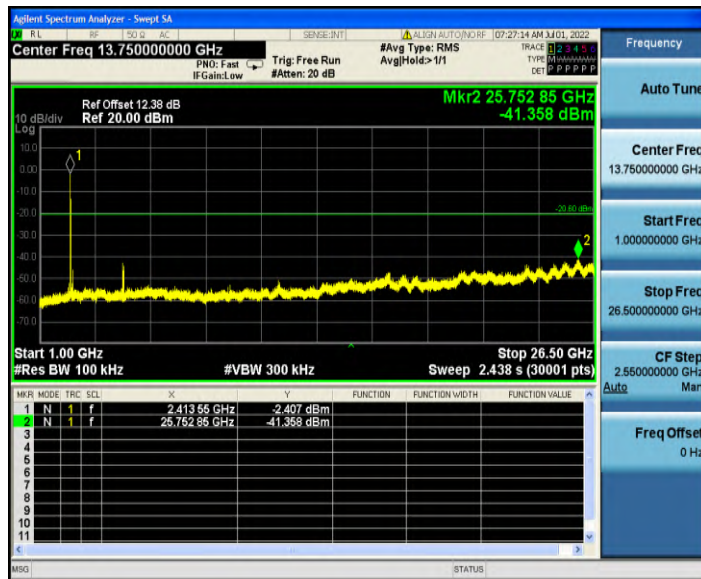


DH5_Ant1_2480_30MHz~1GHz

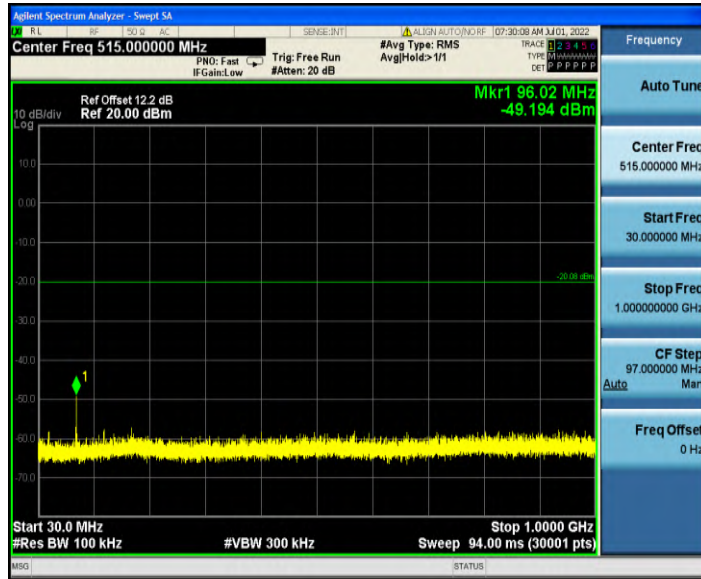

DH5_Ant1_2480_1GHz~26.50GHz

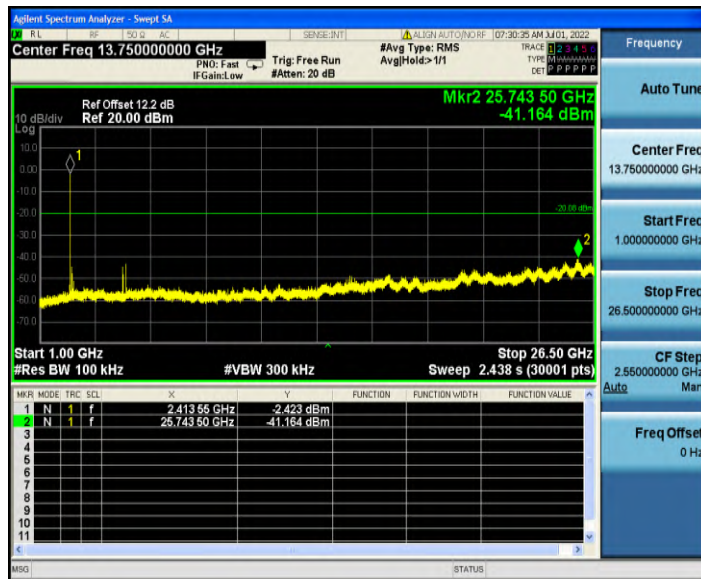


2DH5_Ant1_2402_30MHz~1GHz

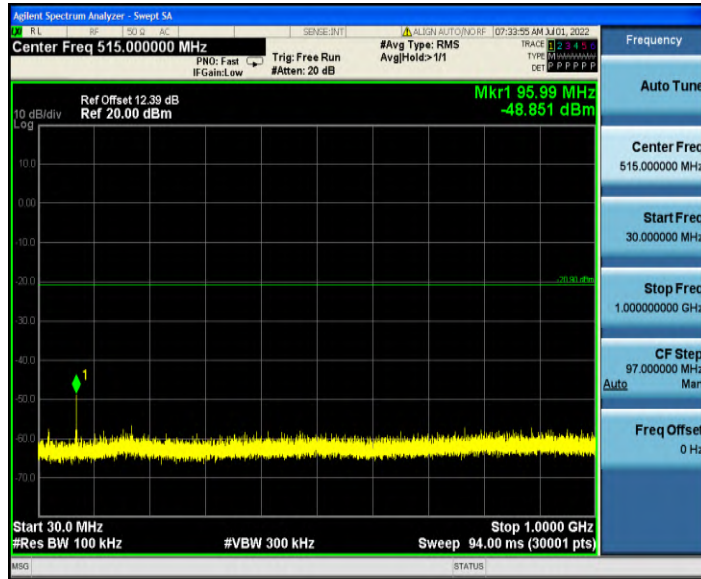


2DH5_Ant1_2402_1GHz~26.50GHz




2DH5_Ant1_2441_30MHz~1GHz

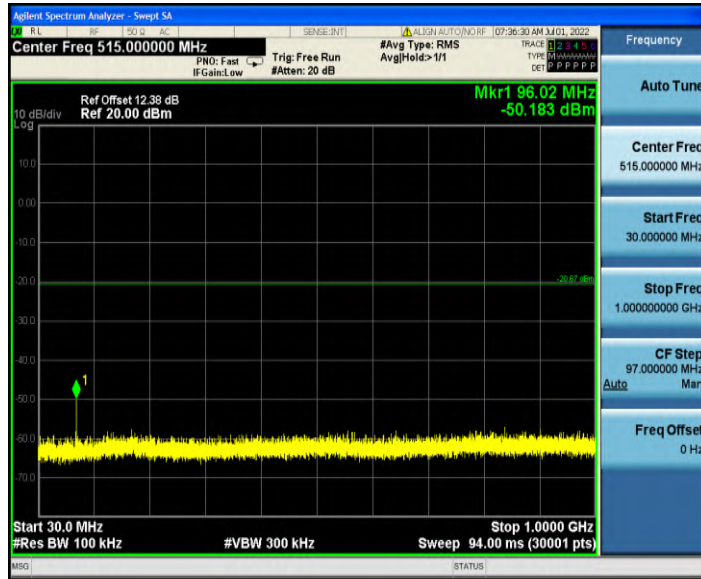


2DH5_Ant1_2441_1GHz~26.50GHz

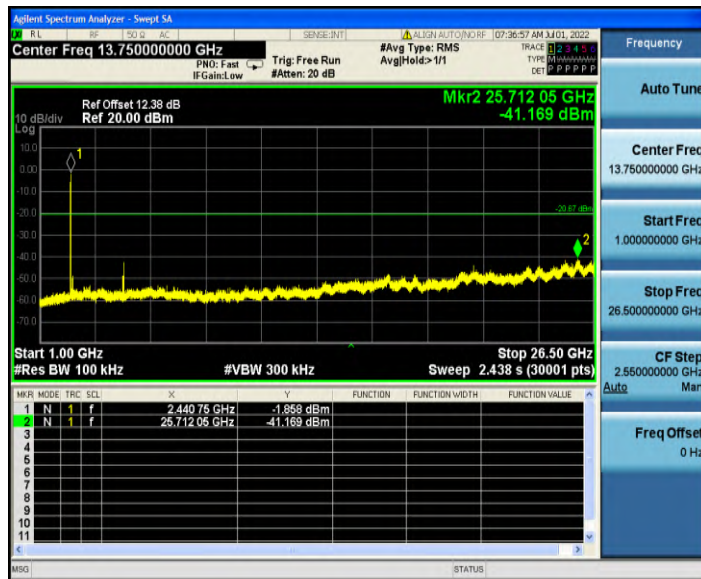


2DH5_Ant1_2480_30MHz~1GHz

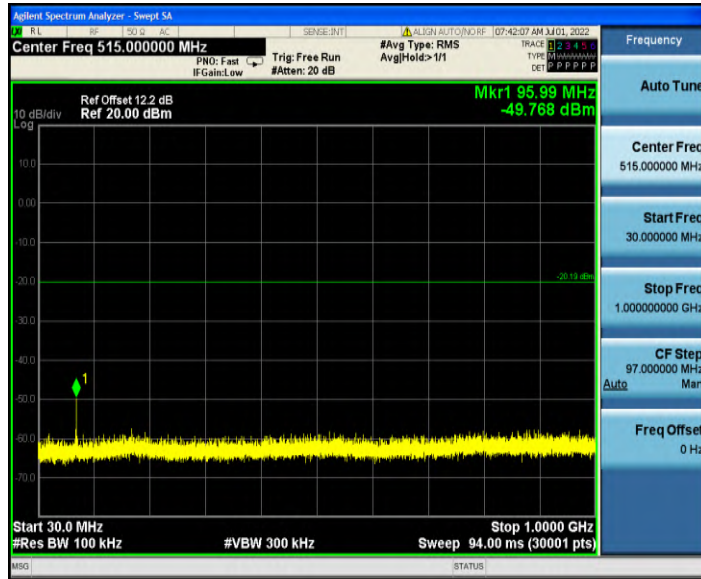

2DH5_Ant1_2480_1GHz~26.50GHz

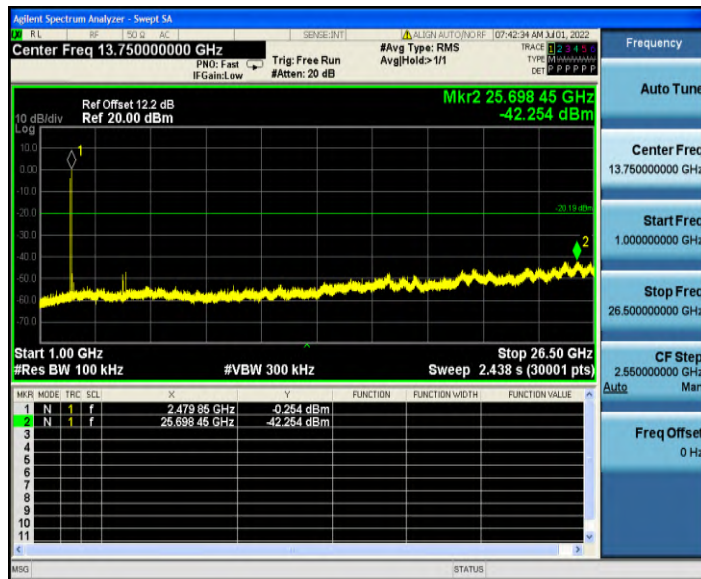


3DH5_Ant1_2402_30MHz~1GHz

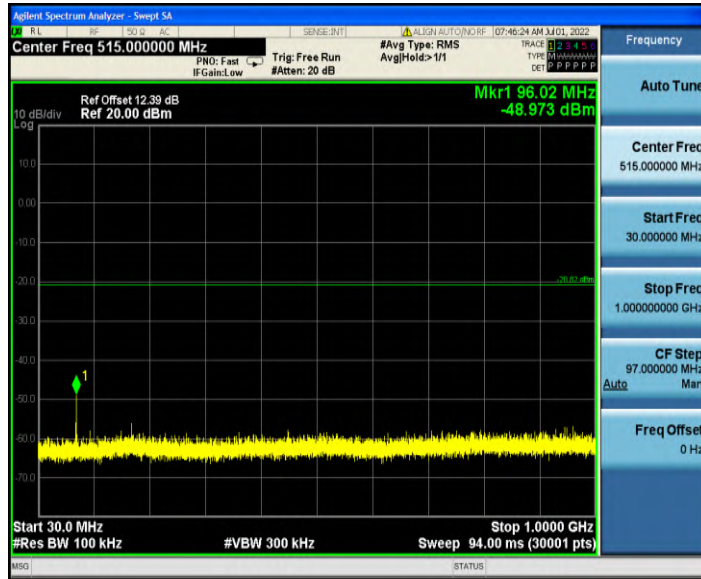


3DH5_Ant1_2402_1GHz~26.50GHz




3DH5_Ant1_2441_30MHz~1GHz

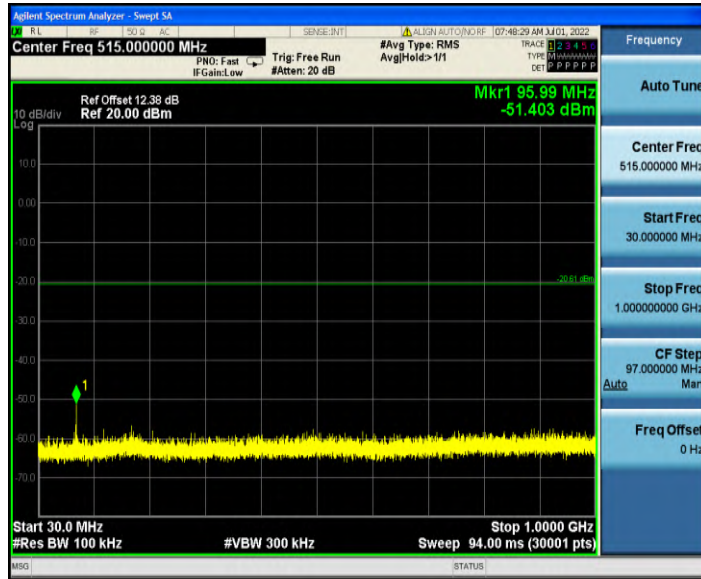


3DH5_Ant1_2441_1GHz~26.50GHz

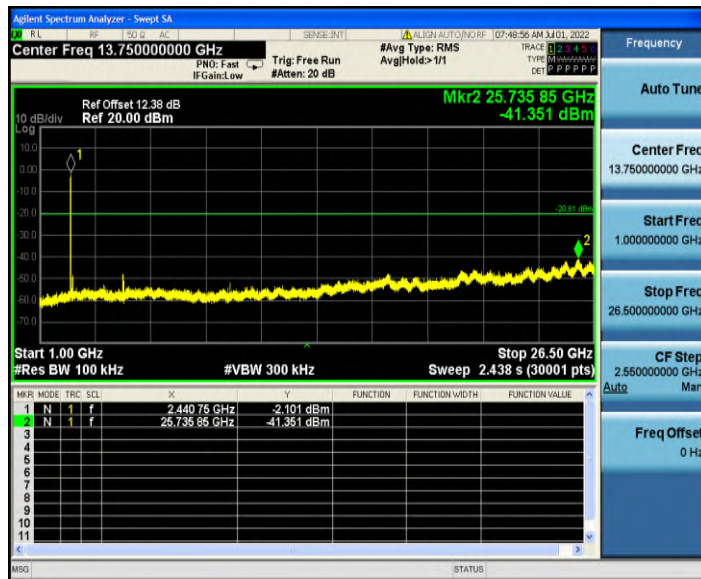

3DH5_Ant1_2480_30MHz~1GHz

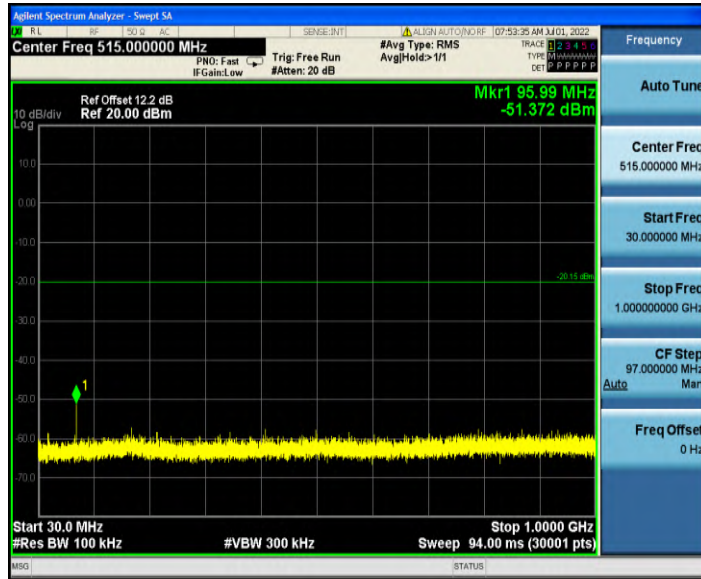

3DH5_Ant1_2480_1GHz~26.50GHz

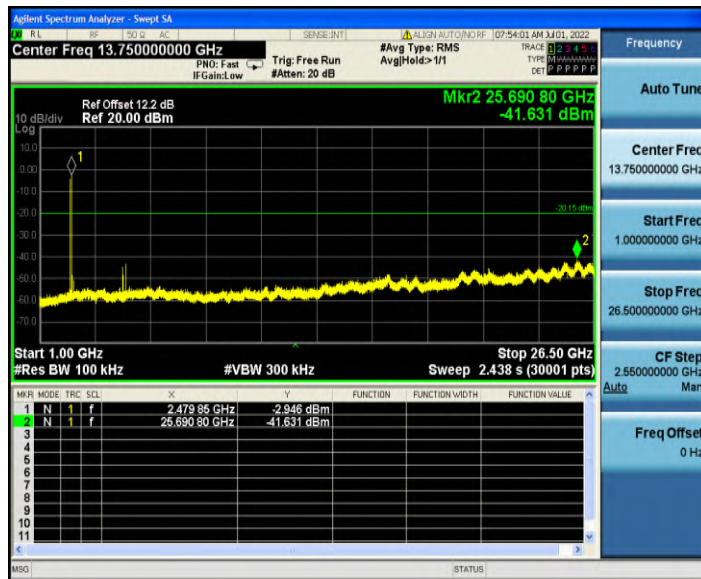


14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement:</p> <p>Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is -0.58dBi. It complies with the standard requirement.

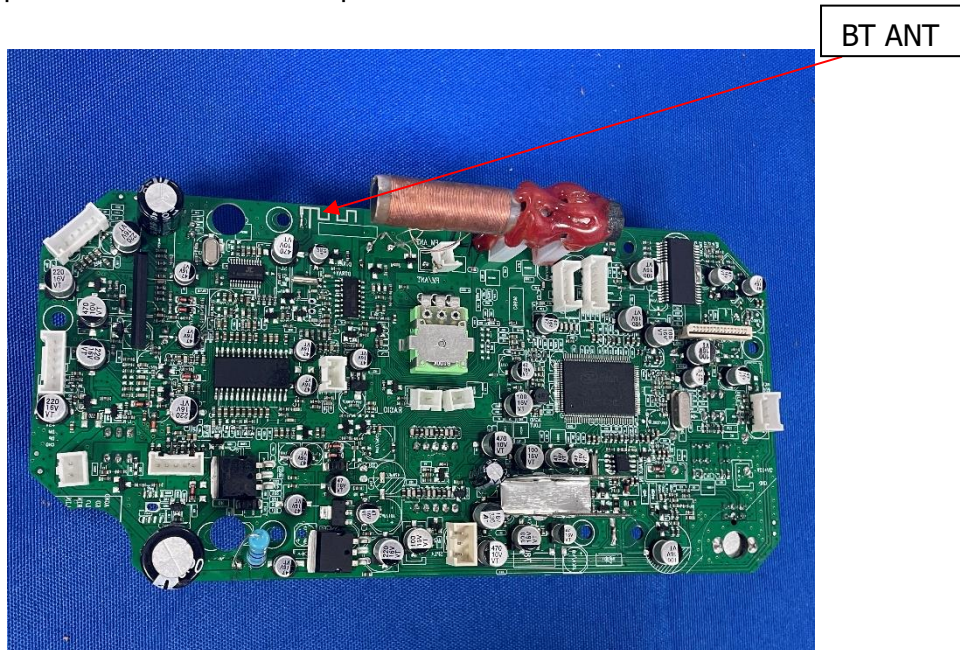


15 APPENDIX I -- TEST SETUP PHOTOGRAPH


Conducted Emissions



Radiated Emissions
From 30M-1GHz


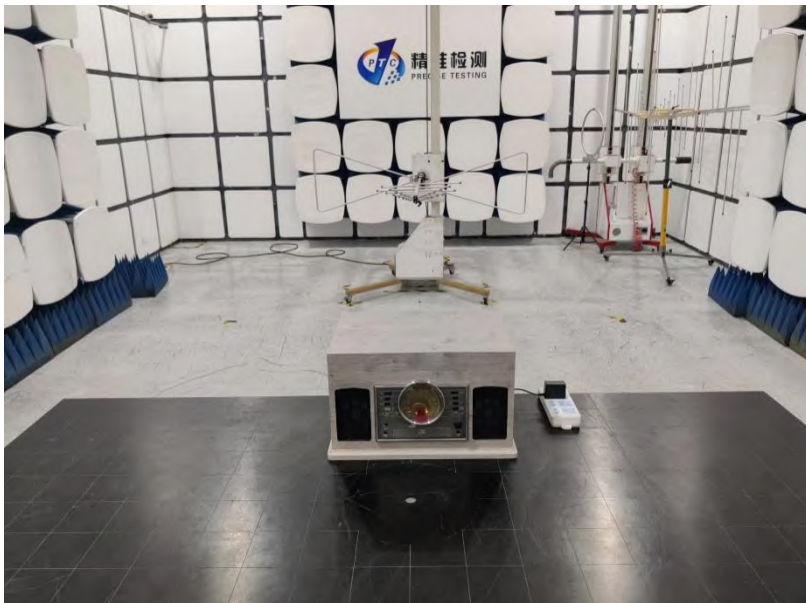


Above 1GHz

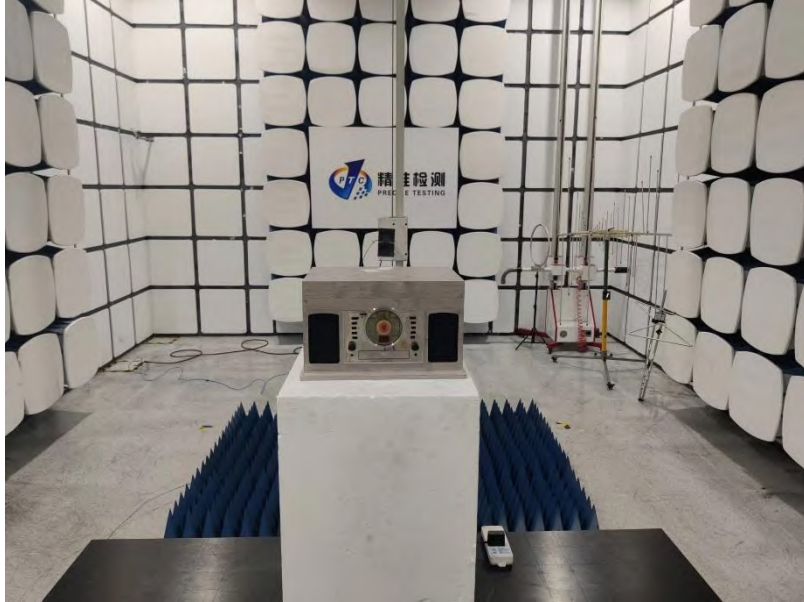



16 APPENDIX II -- EUT PHOTOGRAPH





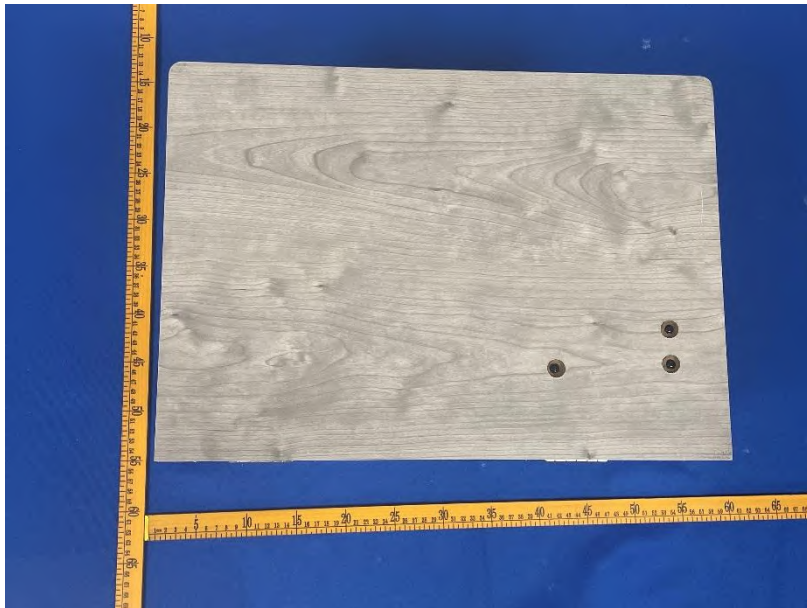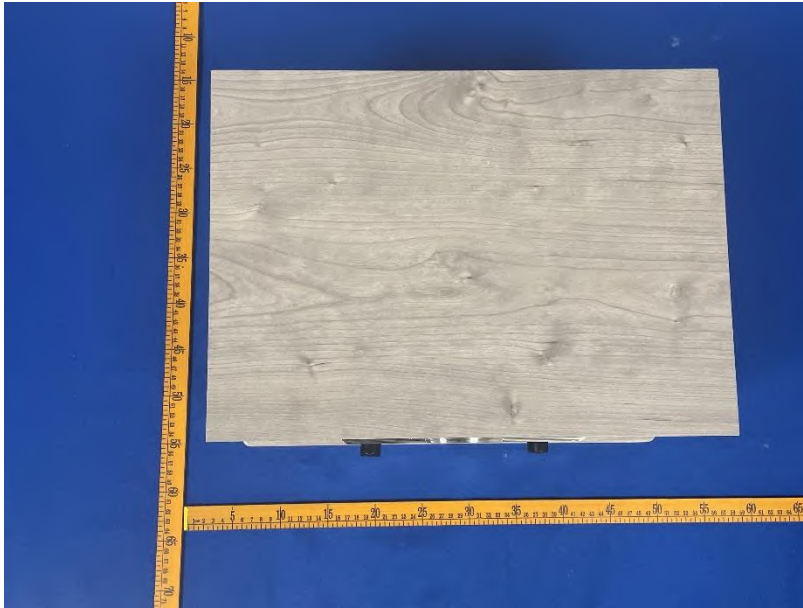





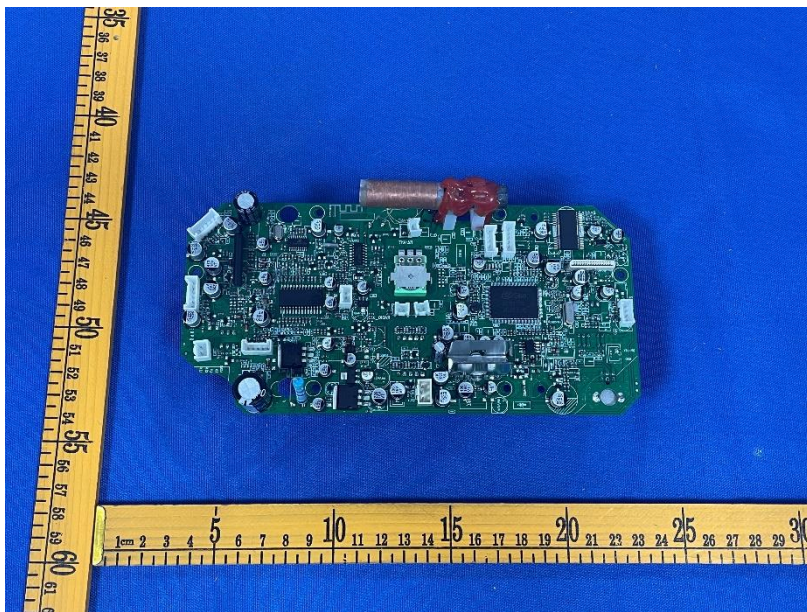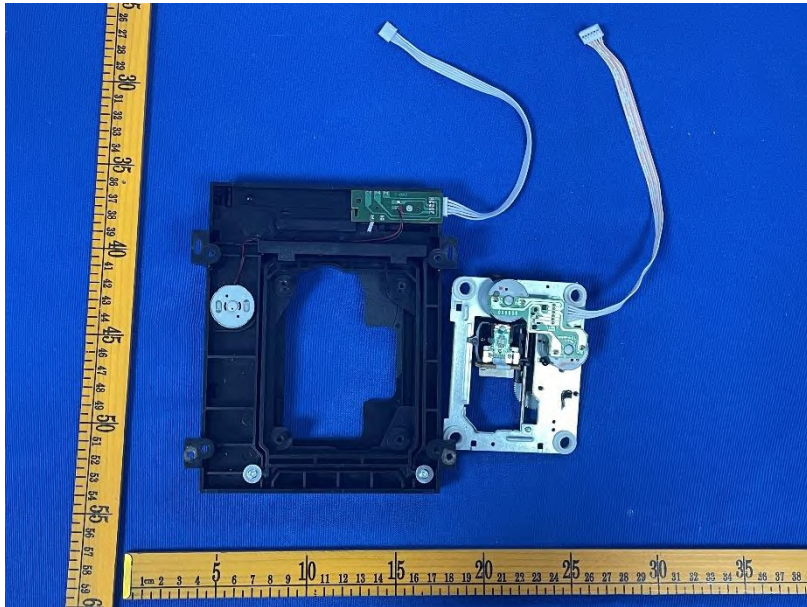

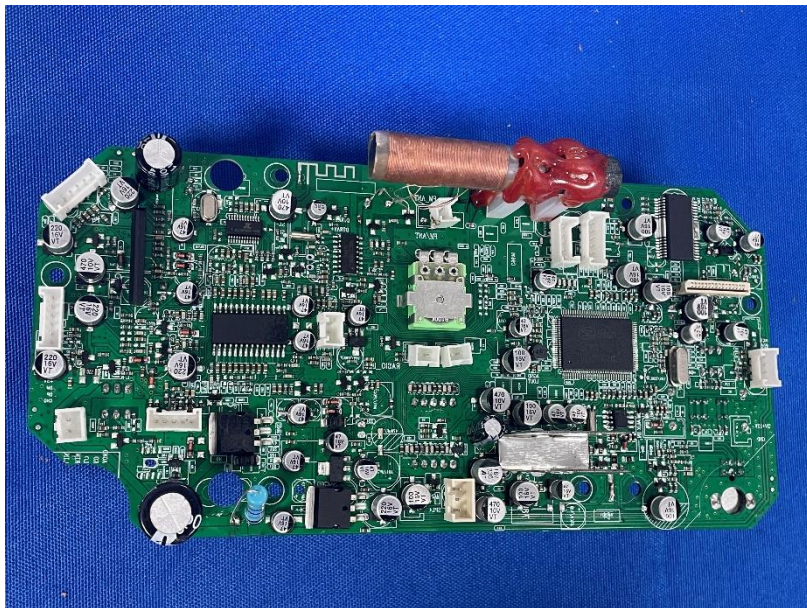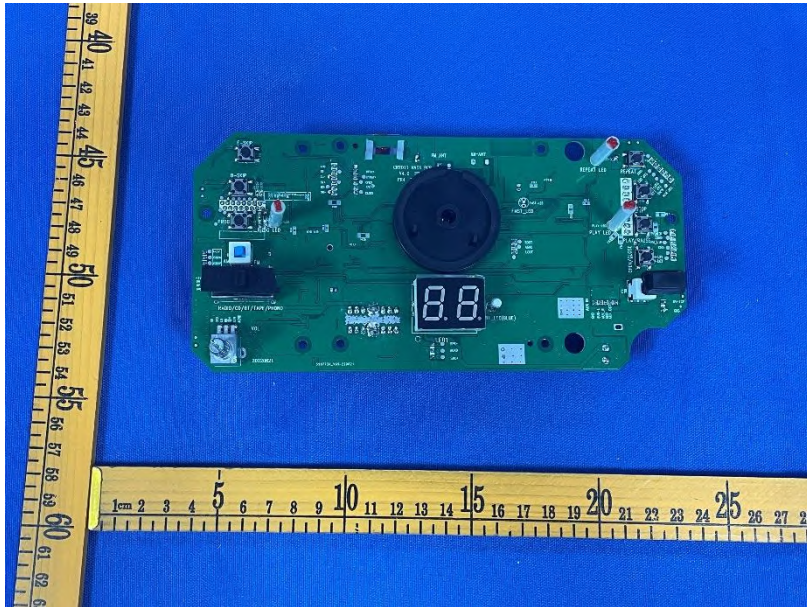

*******THE END REPORT*******