


																																
<p><b>MOTOROLA PENANG ADV. COMM. LABORATORY</b>  <b>Motorola Solutions Malaysia Sdn. Bhd.</b>  <b>Innoplex Plot 2A Medan Bayan Lepas,</b>  <b>Mukim 12, S.W.D. 11900 Bayan Lepas,</b>  <b>Penang, Malaysia.</b></p>	<p><b>FCC / IC TEST REPORT</b>  <b>Report Revision : Rev.D</b></p>																															
<table border="0"> <tr> <td><b>Date/s Tested</b></td> <td>: 27-November-2016 - 30-May-2017</td> <td rowspan="10" style="text-align: center; vertical-align: middle;">  </td> </tr> <tr> <td><b>Report Issue Date</b></td> <td>: 31-May-2017</td> </tr> <tr> <td><b>Manufacturer/Location</b></td> <td>: Motorola Solutions – Penang</td> </tr> <tr> <td><b>Requestor</b></td> <td>: MUNIANDY BARATH</td> </tr> <tr> <td><b>Product Type</b></td> <td>: Portable</td> </tr> <tr> <td><b>Model Number</b></td> <td>: H92QDH9PW7AN</td> </tr> <tr> <td><b>Frequency Band</b></td> <td>: 2.412-2.462 GHz</td> </tr> <tr> <td><b>Rated / Max RF Output Power</b></td> <td>: 802.11b - 16.6 mWatts / 22.4 mWatts                  802.11g - 6.6 mWatts / 8.3 mWatts                  802.11n - 10 mWatts / 12.6 mWatts</td> </tr> <tr> <td><b>Applicant Name</b></td> <td>: Motorola Solutions Malaysia Sdn Bhd</td> </tr> <tr> <td><b>Applicant Address</b></td> <td>: Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D.                  11900 Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td><b>FCC Registrations</b></td> <td>: 772092</td> </tr> <tr> <td><b>IC Registrations</b></td> <td>: 109AK</td> </tr> </table> <p><b>The equipment was tested accordance to the requirement listed below:</b></p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;"><b>(2.4GHz Wifi)</b></td> <td style="text-align: right;"><b>PASS</b></td> </tr> <tr> <td><b>Part 15C</b></td> <td></td> </tr> <tr> <td><b>IC RSS 247</b></td> <td></td> </tr> </table>		<b>Date/s Tested</b>	: 27-November-2016 - 30-May-2017		<b>Report Issue Date</b>	: 31-May-2017	<b>Manufacturer/Location</b>	: Motorola Solutions – Penang	<b>Requestor</b>	: MUNIANDY BARATH	<b>Product Type</b>	: Portable	<b>Model Number</b>	: H92QDH9PW7AN	<b>Frequency Band</b>	: 2.412-2.462 GHz	<b>Rated / Max RF Output Power</b>	: 802.11b - 16.6 mWatts / 22.4 mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts	<b>Applicant Name</b>	: Motorola Solutions Malaysia Sdn Bhd	<b>Applicant Address</b>	: Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia	<b>FCC Registrations</b>	: 772092	<b>IC Registrations</b>	: 109AK	<b>(2.4GHz Wifi)</b>	<b>PASS</b>	<b>Part 15C</b>		<b>IC RSS 247</b>	
<b>Date/s Tested</b>	: 27-November-2016 - 30-May-2017																															
<b>Report Issue Date</b>	: 31-May-2017																															
<b>Manufacturer/Location</b>	: Motorola Solutions – Penang																															
<b>Requestor</b>	: MUNIANDY BARATH																															
<b>Product Type</b>	: Portable																															
<b>Model Number</b>	: H92QDH9PW7AN																															
<b>Frequency Band</b>	: 2.412-2.462 GHz																															
<b>Rated / Max RF Output Power</b>	: 802.11b - 16.6 mWatts / 22.4 mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts																															
<b>Applicant Name</b>	: Motorola Solutions Malaysia Sdn Bhd																															
<b>Applicant Address</b>	: Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia																															
<b>FCC Registrations</b>	: 772092																															
<b>IC Registrations</b>	: 109AK																															
<b>(2.4GHz Wifi)</b>	<b>PASS</b>																															
<b>Part 15C</b>																																
<b>IC RSS 247</b>																																
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																																
<p>Prepared By:</p>  <p>_____</p> <p><b>GAN BOON TEONG</b>  <b>Test Personnel</b></p>	<p>Approved By:</p>  <p>_____</p> <p><b>GOH AIK HONG</b>  <b>Responsible Engineer</b></p>																															

## Table of Contents

1.0. General Information .....	3
1.1. Channel number and frequency information:.....	3
2.0. Summary of Test Results.....	4
3.0. Measurement Uncertainty .....	4
4.0. Equipment List .....	5
5.0. Test Mode Applicability and Test Channel Detail .....	6
6.0. Transmitter Test Parameters .....	8
6.1. 6dB Channel Bandwidth.....	8
6.1.1. Test Setup .....	8
6.1.2. Test Limits:.....	8
6.1.3. Test Data: .....	9
6.2. Conducted RF Output Power.....	13
6.2.1. Test Setup .....	13
6.2.2. Test Limits:.....	13
6.2.3. Test Data: .....	14
6.3. Duty Cycle of the test signal .....	17
6.3.1. Test Setup .....	17
6.3.2. Test Data.....	18
6.4. Maximum Peak Power Spectral Density .....	21
6.4.1. Test Setup .....	21
6.4.2. Test Limits.....	21
6.4.3. Test Result.....	22
6.5. Conducted Spurious Emission.....	28
6.5.1. Test Setup .....	28
6.5.2. Test Limits:.....	28
6.5.3. Test Result.....	28
6.6. Band edge Conducted Spurious Emission.....	42
6.6.1. Test Setup .....	42
6.6.2. Test Limits:.....	42
6.6.3. Test Result.....	42
6.7. Radiated Emission within restricted Bands .....	55
6.7.1. Test Setup .....	55
6.7.2. Test Limits:.....	56
6.7.3. Test Data: .....	57
6.8. AC Powerline Conducted Emission .....	111
6.8.1. Test Setup .....	111
6.8.2. Test Limits:.....	111
6.8.3. Test Result.....	112

### REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	10-January-2017	GAN BOON TEONG
Rev. B	Revise Section 6.7.1, Section 6.2, Section 6.6.3 and Section 6.5.3	20-February-2017	GAN BOON TEONG
Rev. C	Revise Section 6.2.3	03-March-2017	GAN BOON TEONG
Rev. D	Revise Section 6.4.1 Section 6.4.3	30-May-2017	GAN BOON TEONG

## 1.0. General Information

### EUT Description:

<b>Technologies</b>	2.4GHz Wi-Fi
<b>TX Frequency range</b>	2412MHz – 2462MHz
<b>Modulation Type</b>	DSSS, OFDM
<b>Input/Output</b>	RF Port
<b>Connector type</b>	PROGRAMMING, TEST & ALIGNMENT CABLE
<b>Antenna type</b>	ANTENNA, CHIP, BEIDOU BT/GPS ANTENNA MODULE

### 1.1. Channel number and frequency information:

11 Channels are provided for 802.11b, 802.11g and 802.11n (HT20)

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
Impres 3000 Mah, Li-Ion High Capacity Battery, Low Voltage, Ip68	MOTOROLA	PMNN4493A
Programming, Test & Alignment Cable	MOTOROLA	PMKN4013C

### General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

#### ANSI C63.10-2013

## 2.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark
15.247 (b)(1)	RSS-247 5.1(2)	6dB Channel Bandwidth	Pass	NA
15.247 (a)(1)	RSS-247 5.1(1) RSS-247 5.1(2)	Conducted RF Output Power (Peak)	Pass	NA
15.247(a)(1)(iii)	RSS-247 5.1(4)	Maximum Power Spectral Density	Pass	NA
15.247(a)(1)(iii)	RSS-247 5.1(4)	Conducted Spurious Emissions	Pass	NA
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	Pass	NA
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	NA
15.207	RSS-247 5.5	AC Powerline Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode
15.203	RSS-Gen 8.8	Antenna requirement	NA	Internal antenna is not accessible to the end-user

## 3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
	30MHz ~ 200MHz	5.01
Radiated Emissions up to 1 GHz	200MHz ~ 1000MHz	5.01
	1GHz ~ 18GHz	5.01
Radiated Emissions above 1 GHz	18GHz ~ 25GHz	5.01

4.0. Equipment List

**Bluetooth ATE # 1: (SW Version: Ate Main\_3.1.9\_R1)**

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6652A	3117A00162	6-Mar-16	6-Mar-17
POWER SUPPLY	6652A	3541A02403	7-Sep-15	7-Sep-17
SPECTRUM ANALYZER	E4445A	MY46181513	11-Dec-14	11-Dec-17
SPECTRUM ANALYZER	FSEK30	838495/014	29-Jun-15	29-Jun-17

**Radiated Emission Station (SW Version: EMC FCC RE v1.5.1)**

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	566	4-Sep-16	4-Sep-17
DRG HORN FREQ.	SAS-571	719	28-Apr-15	28-Apr-17
BILOG ANTENNA	CBL6112B	2964	23-Jan-15	23-Jan-17
POWER SUPPLY	6674A	3126A00133	12-Nov-15	12-Nov-17
MICROWAVE SIGNAL GENERATOR	SMP04	100127	3-Jul-16	3-Jul-17
EMI TEST RECEIVER	ESIB26	100336	19-Oct-16	19-Oct-17
SIGNAL ANALYZER	FSV40	101103	25-Jun-16	25-Jun-17
5M SEMI-ANECHOIC CHAMBER	S800-HX	J2308	29-Jul-16	29-Jul-17
BILOG ANTENNA	CBL6112D	25516	23-Jan-16	23-Jan-17
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	24-Nov-14	24-Feb-17
DATA LOGGER	TM320	12249289	27-Apr-16	27-Apr-17
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TRUNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONNING TOWER	TLT2	NA	Not Required	Not Required
18 - 40GHz PREAMPLIFIER	BBV9721	9721-007	Not Required	Not Required
PREAMPLIFIER	PAM-0118P	361	Not Required	Not Required

### 5.0. Test Mode Applicability and Test Channel Detail

#### Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5

#### Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5

#### Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
Application Mode	802.11bgn mixed	1 to 11	AUTO	DSSS, OFDM	AUTO	AUTO

**Antenna Port Conducted Measurement:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5


**Duty Cycle of Test Signal**

**802.11b, 802.11g and 802.11n (HT20): Duty cycle of test signal is  $\geq 98\%$ . (Refer to duty cycle test signal)**

6.0. Transmitter Test Parameters

6.1. 6dB Channel Bandwidth

6.1.1. **Test Setup**



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max hold
  - e. Sweep = auto
- e) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.

6.1.2. **Test Limits:**



<b>Normal Condition (25 ° C)</b>
<b><math>\geq 500</math> kHz</b>



6.1.3. Test Data:



**802.11 b**

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11b	DSSS	QPSK	2	2412	10.076	13.689	Pass
802.11b	DSSS	QPSK	2	2437	10.076	13.793	Pass
802.11b	DSSS	QPSK	2	2462	10.029	13.757	Pass

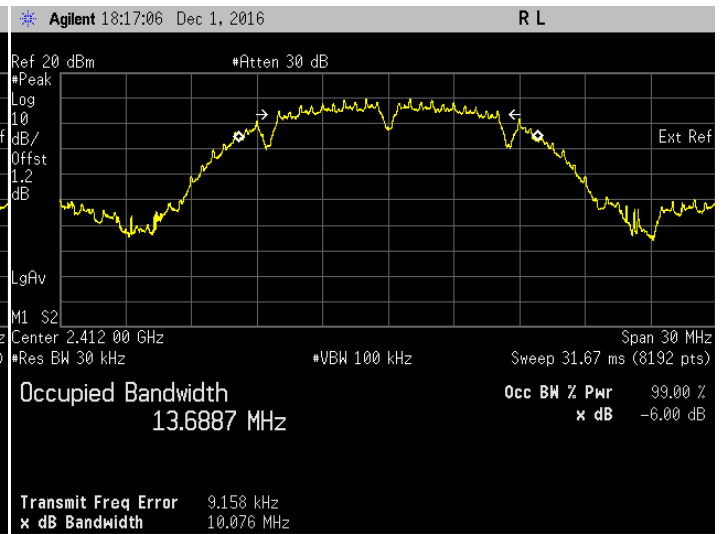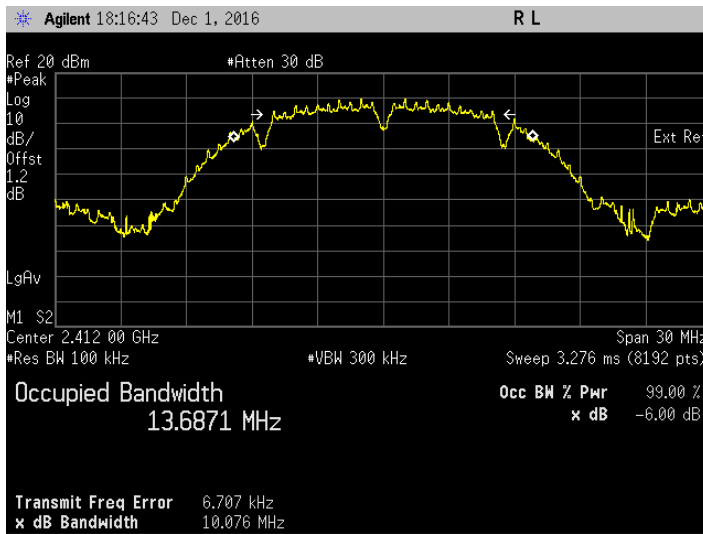


6dB Bandwidth. 802.11b Frequency 2412 MHz

99% Bandwidth. 802.11b Frequency 2412 MHz

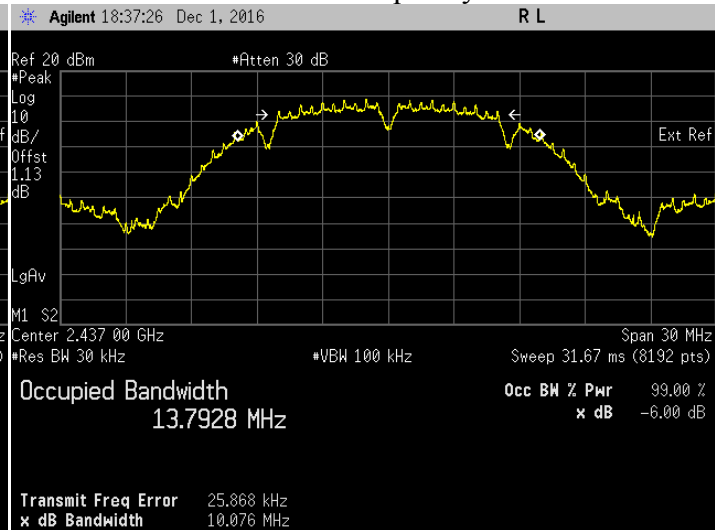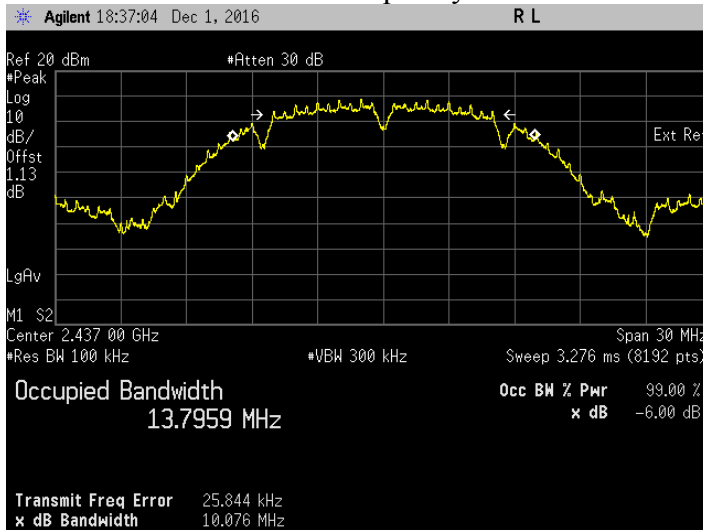


6dB Bandwidth. 802.11b Frequency 2437 MHz

99% Bandwidth. 802.11b Frequency 2437 MHz

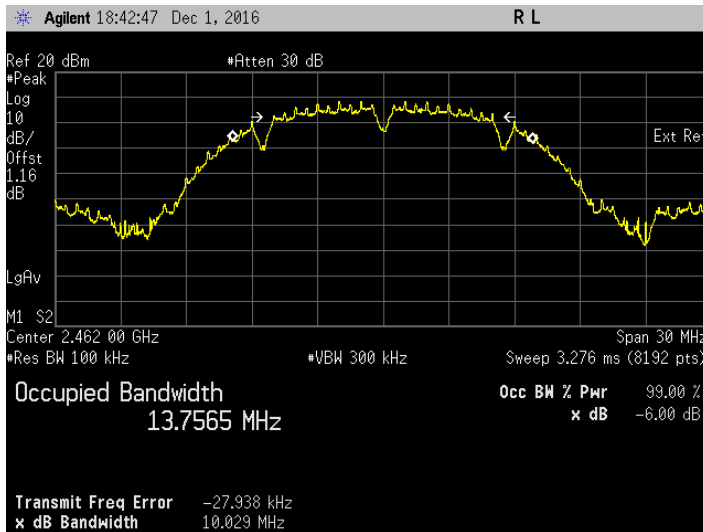


6dB Bandwidth. 802.11b Frequency 2462 MHz

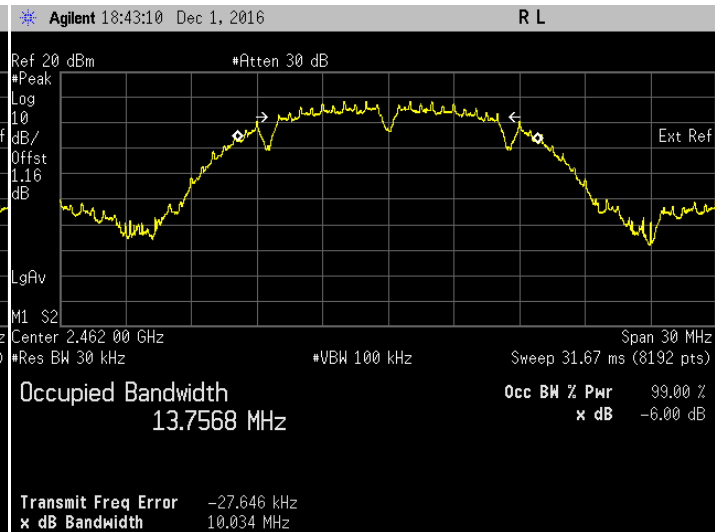


99% Bandwidth. 802.11b Frequency 2462 MHz

**802.11 g**



Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11g	OFDM	BPSK	6	2412	16.350	16.463	Pass
802.11g	OFDM	BPSK	6	2437	16.368	16.450	Pass
802.11g	OFDM	BPSK	6	2462	16.365	16.451	Pass

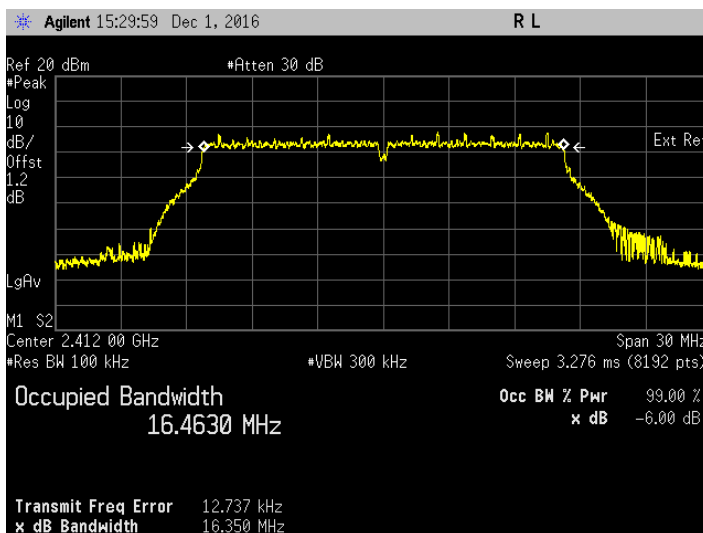

6dB Bandwidth. 802.11g Frequency 2412 MHz


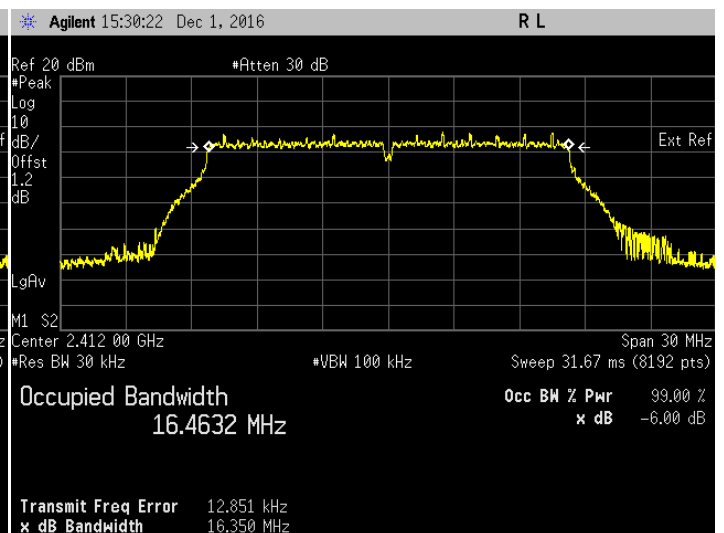


99% Bandwidth. 802.11g Frequency 2412 MHz

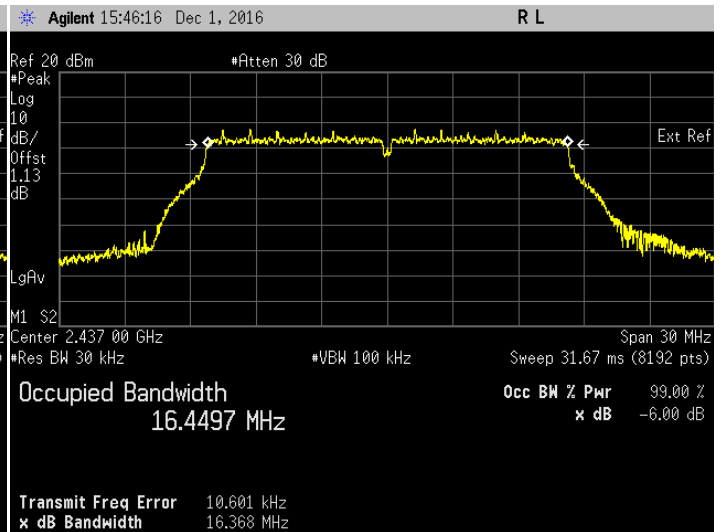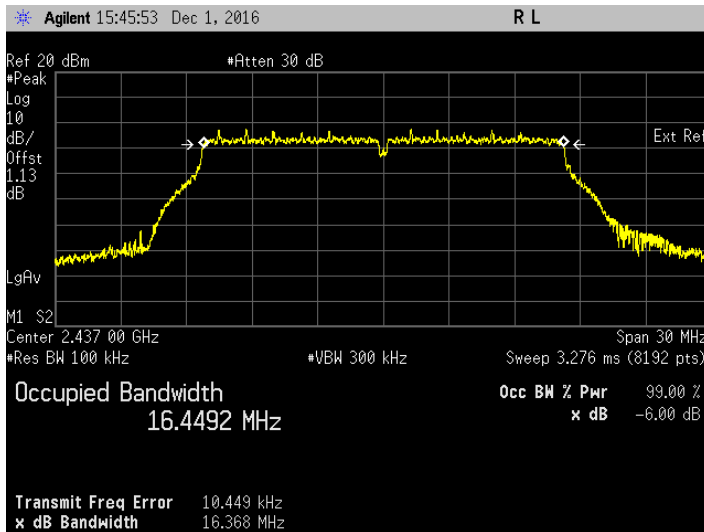

6dB Bandwidth. 802.11g Frequency 2437 MHz

99% Bandwidth. 802.11g Frequency 2437 MHz

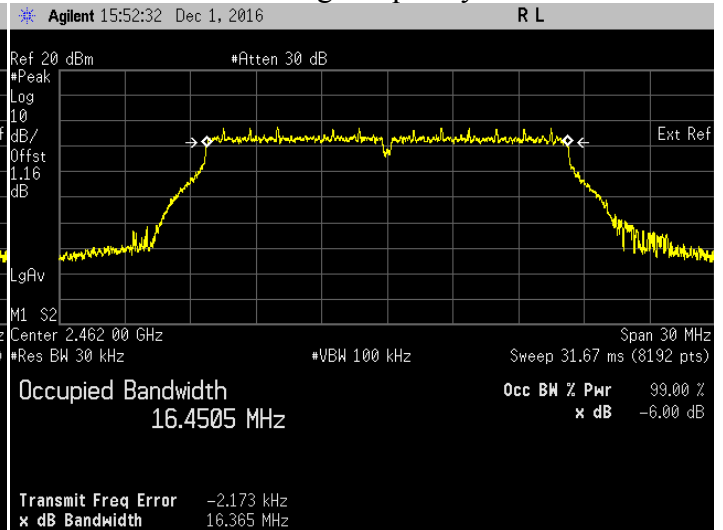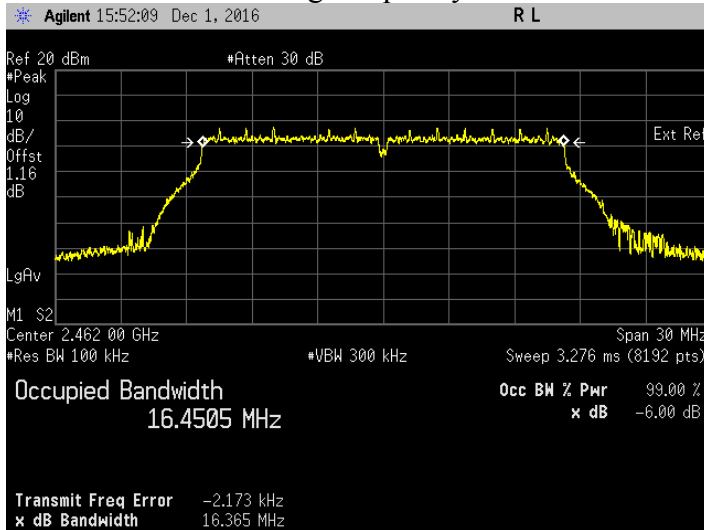


6dB Bandwidth. 802.11g Frequency 2462 MHz


99% Bandwidth. 802.11g Frequency 2462 MHz

**802.11n (HT20)**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	BPSK	6.5	2412	17.611	17.663	Pass
802.11n	OFDM	BPSK	6.5	2437	17.600	17.662	Pass
802.11n	OFDM	BPSK	6.5	2462	17.622	17.675	Pass

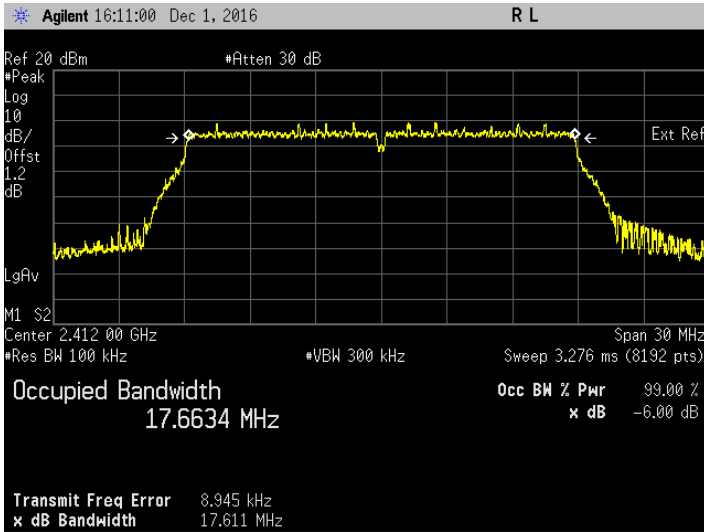


6dB Bandwidth. 802.11n Frequency 2412 MHz

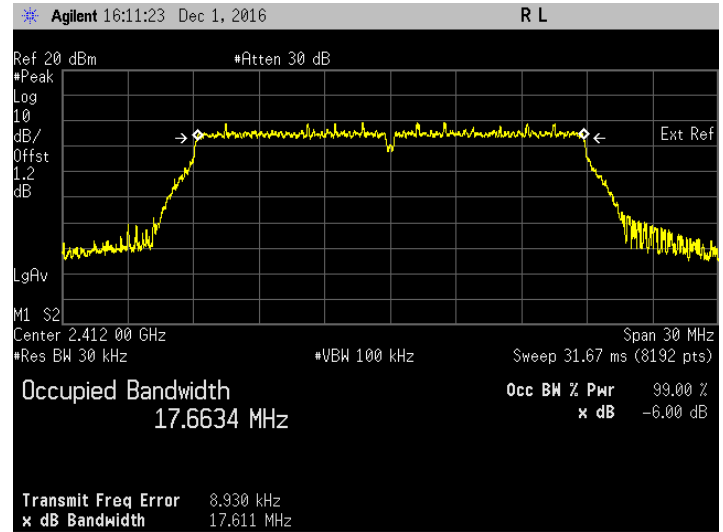


99% Bandwidth. 802.11n Frequency 2412 MHz

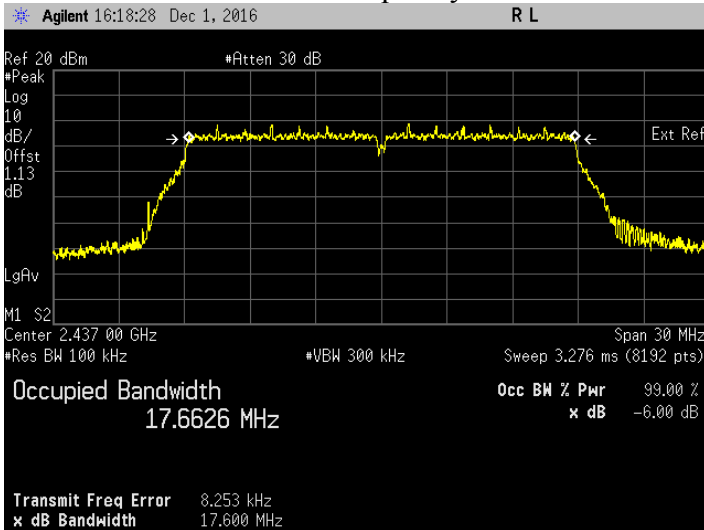


6dB Bandwidth. 802.11n Frequency 2437 MHz

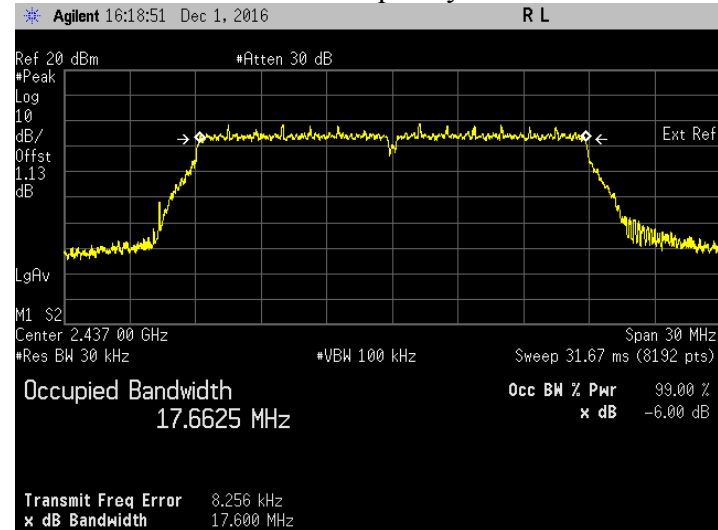

99% Bandwidth. 802.11n Frequency 2437 MHz

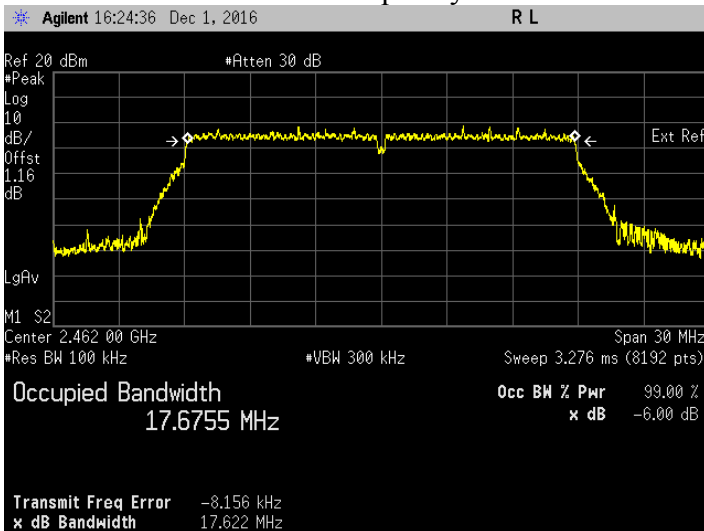


6dB Bandwidth. 802.11n Frequency 2462 MHz

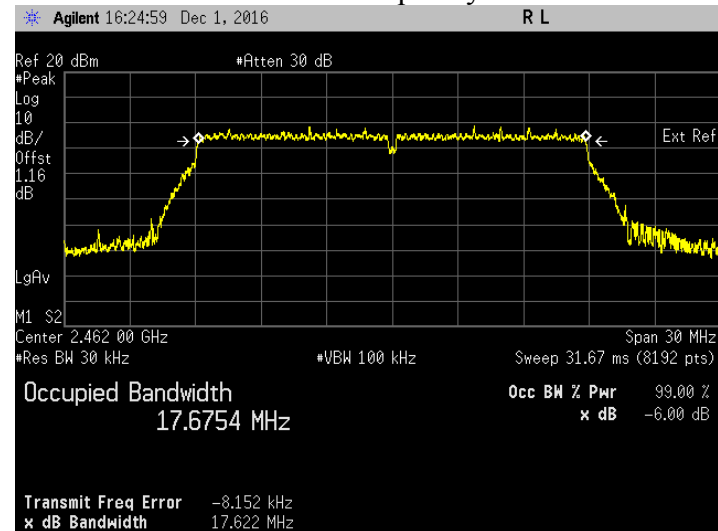

99% Bandwidth. 802.11n Frequency 2462 MHz

## 6.2. Conducted RF Output Power

### 6.2.1. Test Setup



#### Average

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Measure the duty cycle of transmitter output signal.
- d) Setting of Spectrum analyzer :
  - a. Set the RBW = 300 kHz.
  - b. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - c. Set the span  $\geq [1.5 \times \text{OBW bandwidth}]$ .
  - d. Detector = average.
  - e. Sweep time = auto couple.
  - f. Trace mode = free run.
  - g. Allow trace to fully stabilize.
- e) Add in duty cycle correction into final test result.
- f) Duty cycle correction is calculated as below:  
 $10 \log (1/x)$

### 6.2.2. Test Limits:

<b>Normal Condition (25 ° C)</b>
<b><math>\leq 1 \text{ Watt}(30 \text{ dBm})</math></b>


6.2.3. Test Data:

Average


802.11b

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	13.363	Pass
802.11b	DSSS	QPSK	2	2437	12.396	Pass
802.11b	DSSS	QPSK	2	2462	12.841	Pass


i. The Conducted RF Output Power test with result at low frequency, 802.11b.

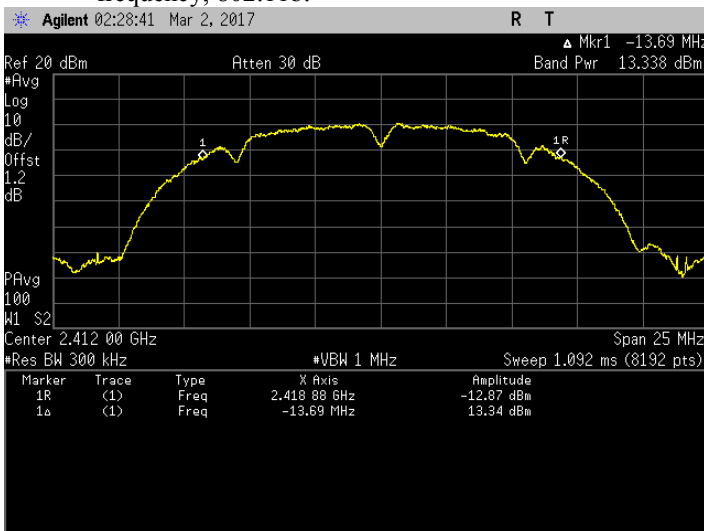

ii. The Conducted RF Output Power test with result at mid frequency, 802.11b.

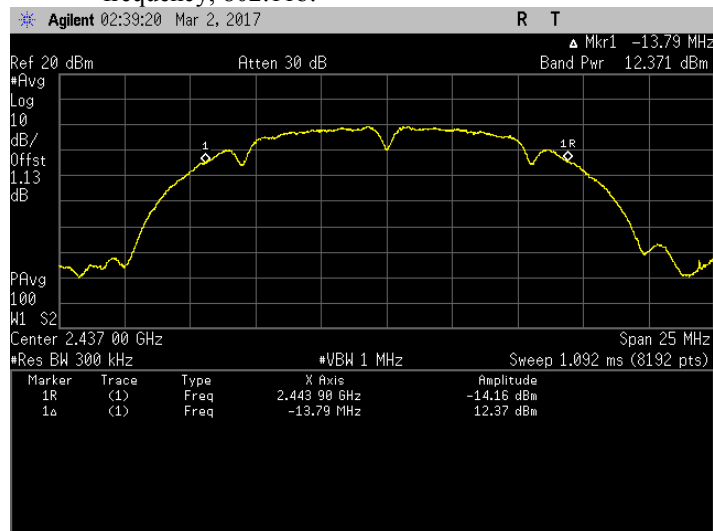


iii. The Conducted RF Output Power test with result at high frequency, 802.11b.

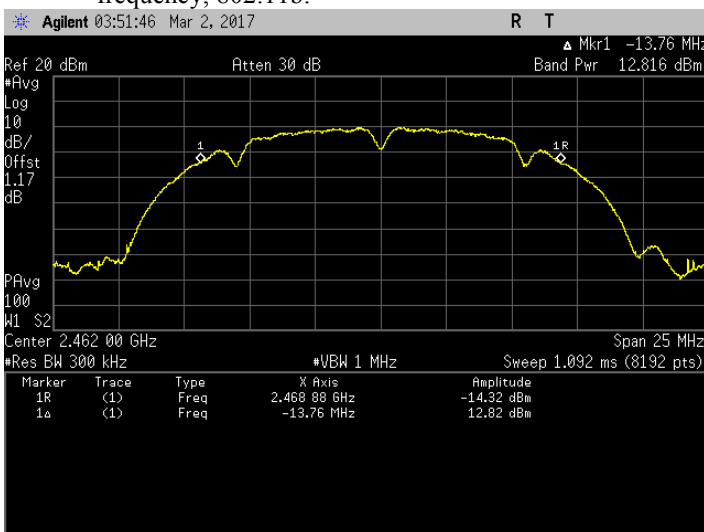


**802.11g**

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	8.874	Pass
802.11g	OFDM	BPSK	6	2437	8.922	Pass
802.11g	OFDM	BPSK	6	2462	8.956	Pass


i. The Conducted RF Output Power test with result at low frequency, 802.11g.

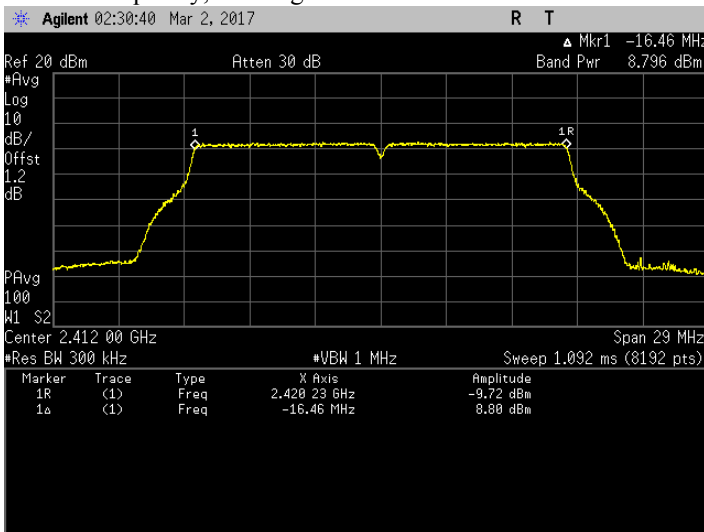

ii. The Conducted RF Output Power test with result at mid frequency, 802.11g.

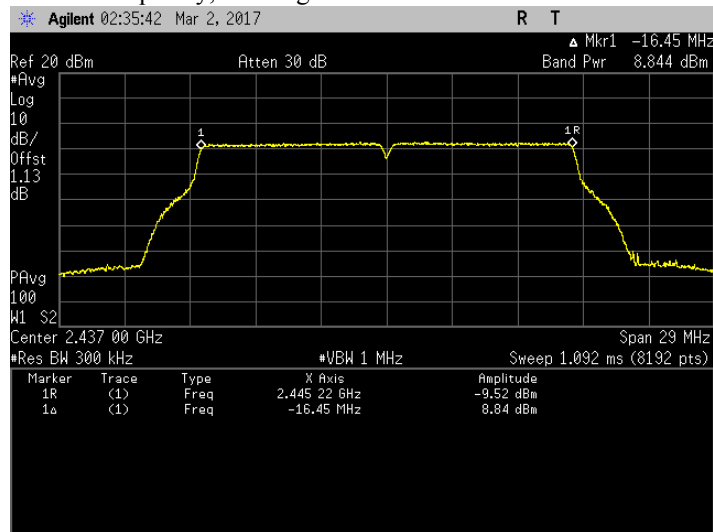


iii. The Conducted RF Output Power test with result at high frequency, 802.11g.

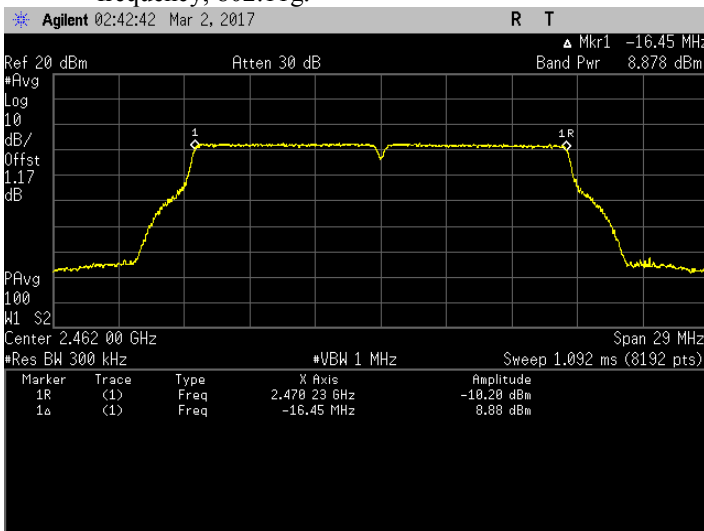


**802.11n (HT20)**

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	10.732	Pass
802.11n	OFDM	BPSK	6.5	2437	10.199	Pass
802.11n	OFDM	BPSK	6.5	2462	10.381	Pass


i. The Conducted RF Output Power test with result at low frequency, 802.11n (HT20).

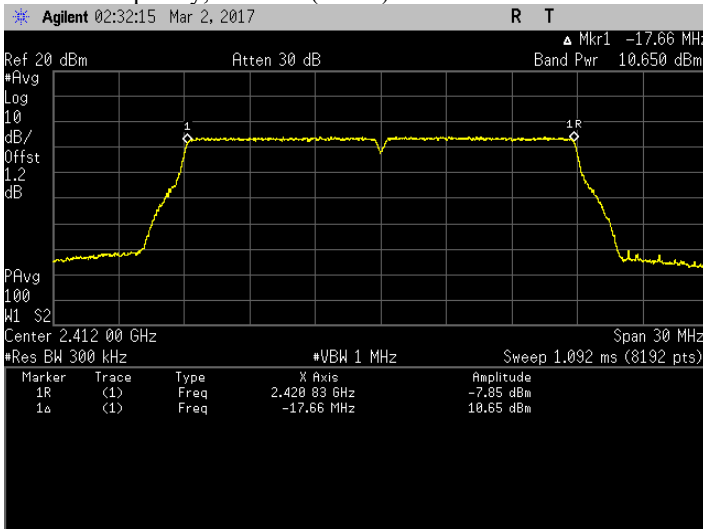

ii. The Conducted RF Output Power test with result at mid frequency, 802.11n (HT20).

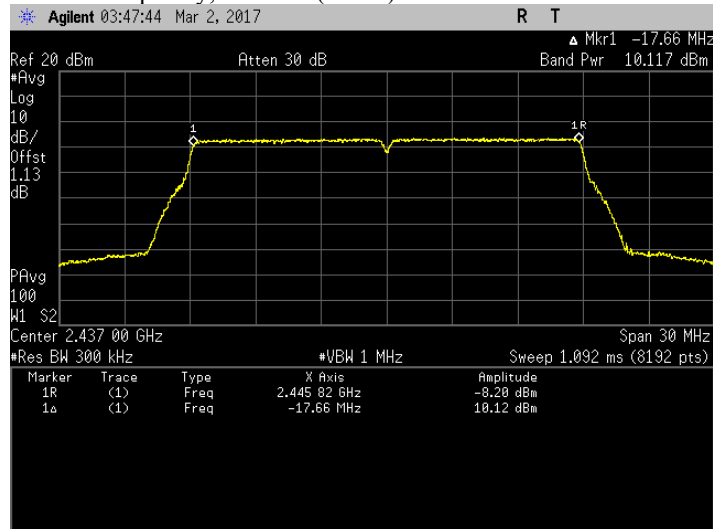


iii. The Conducted RF Output Power test with result at high frequency, 802.11n (HT20).

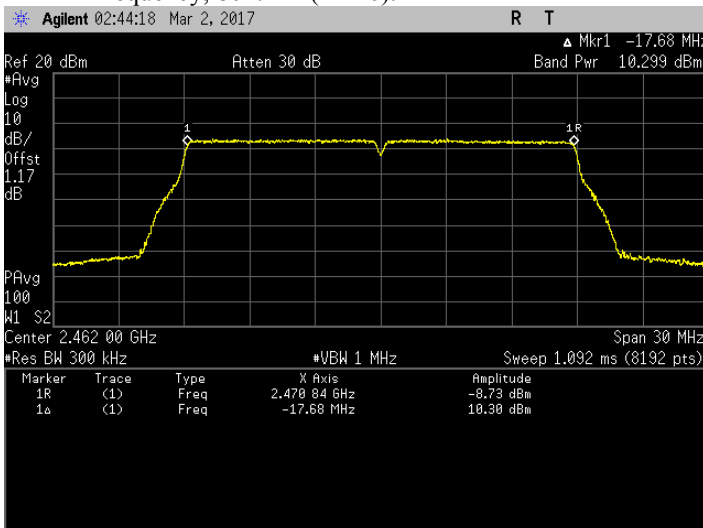



### 6.3.Duty Cycle of the test signal


#### 6.3.1. Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
  - b. Set the VBW  $\geq$  RBW.
  - c. Set the span  $\geq$  [1.5  $\times$  DTS bandwidth].
  - d. Detector = Peak.
  - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
  - f. Trace mode = max hold.
  - g. Allow trace to fully stabilize.
- 5) Record the duty cycle as X and save the plot.

6.3.2. Test Data

802.11b

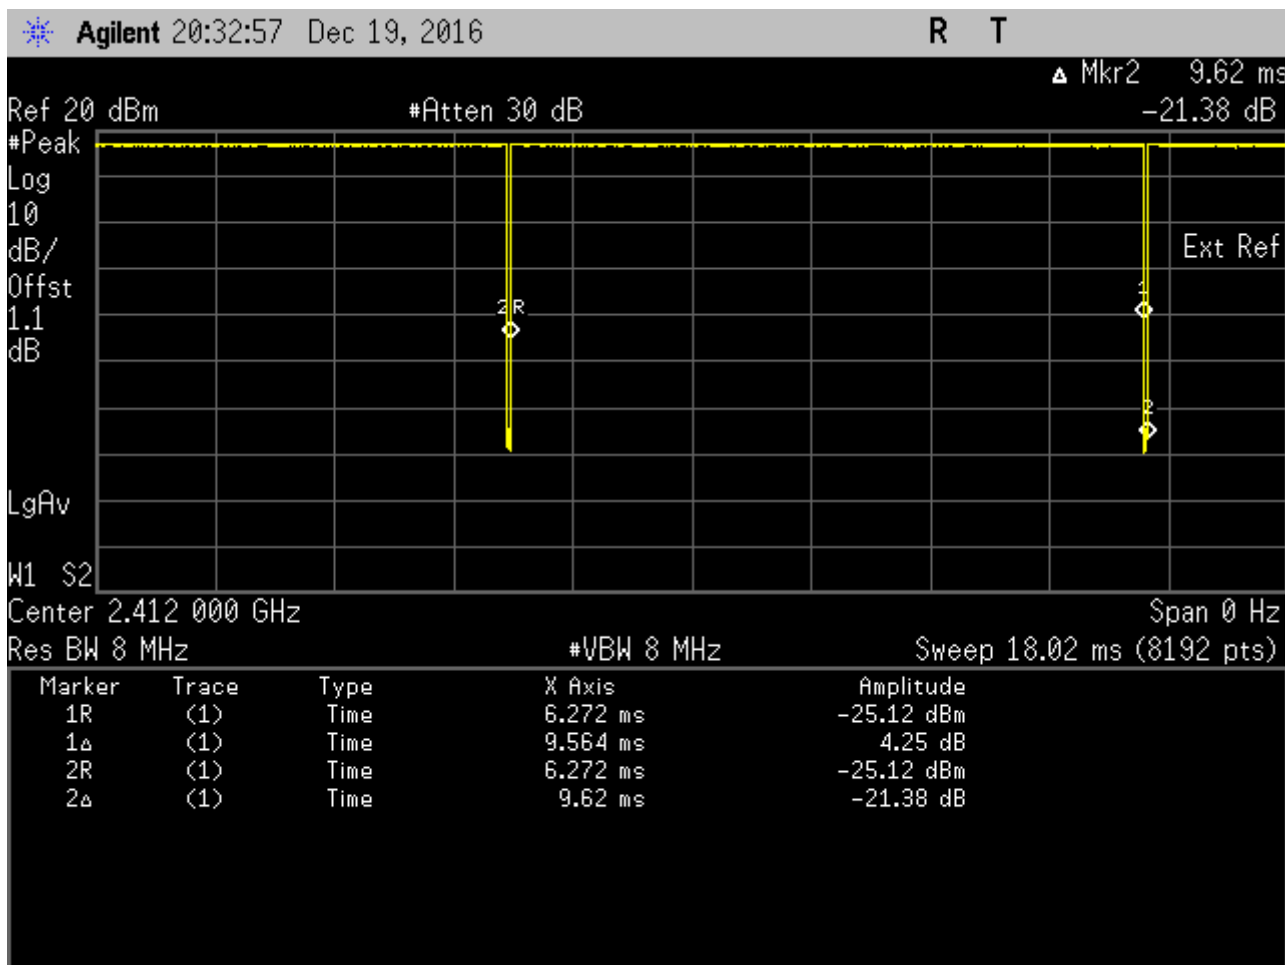


On time	9.564	ms
On + off time	9.62	ms
Duty cycle	0.9942	
Duty Cycle factor	0.025	

\*Duty cycle = On time/ On +off time

\*Duty Cycle factor = 10\*log(1/Duty Cycle)

**802.11g**

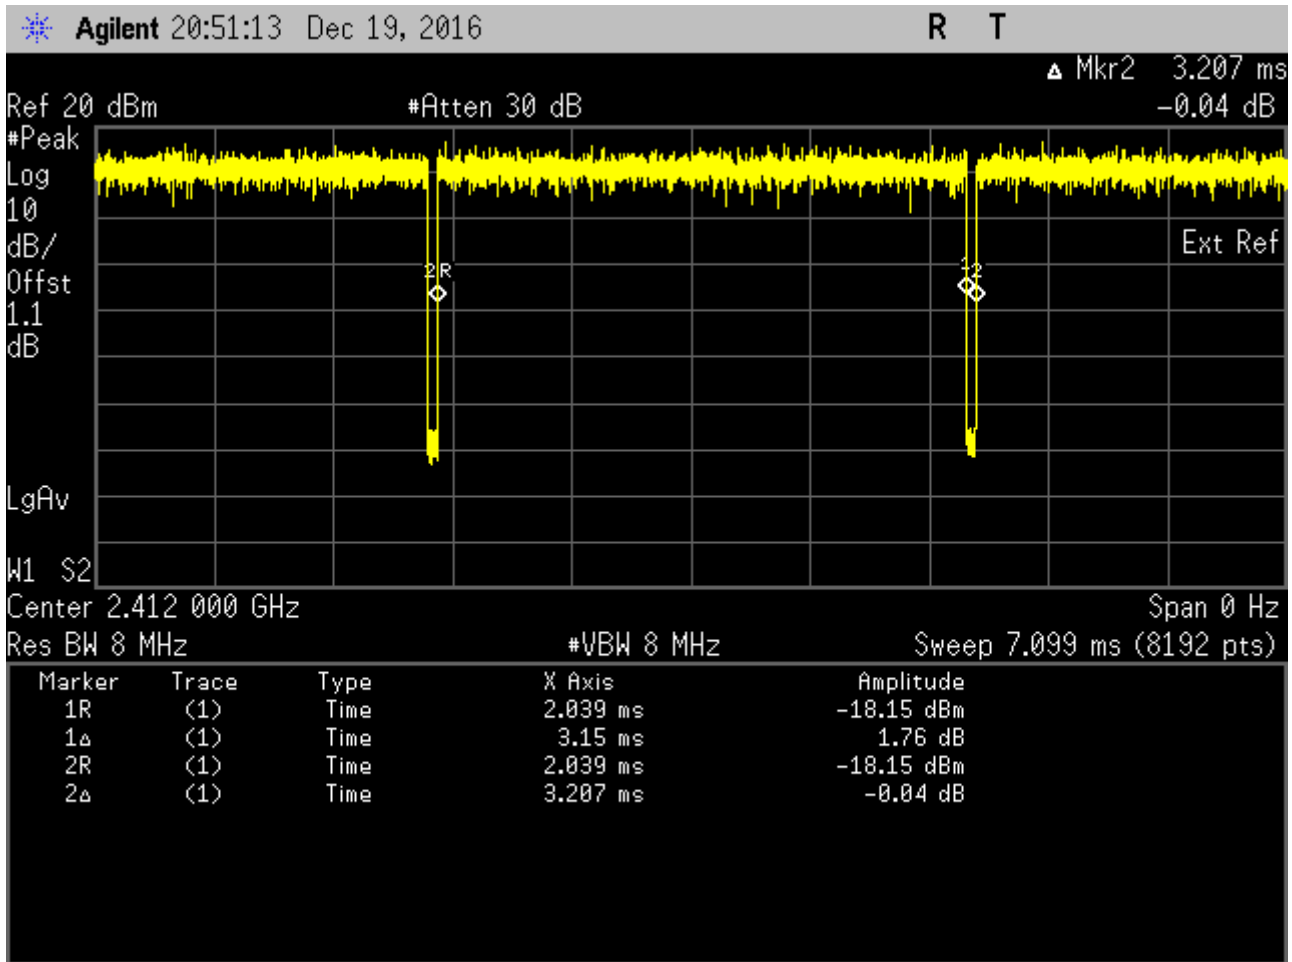


On time	3.15	ms
On + off time	3.207	ms
Duty cycle	0.9822	
Duty Cycle factor	0.078	

\*Duty cycle = On time/ On +off time

\*Duty Cycle factor = 10\*log(1/Duty Cycle)

**802.11n (HT20)**

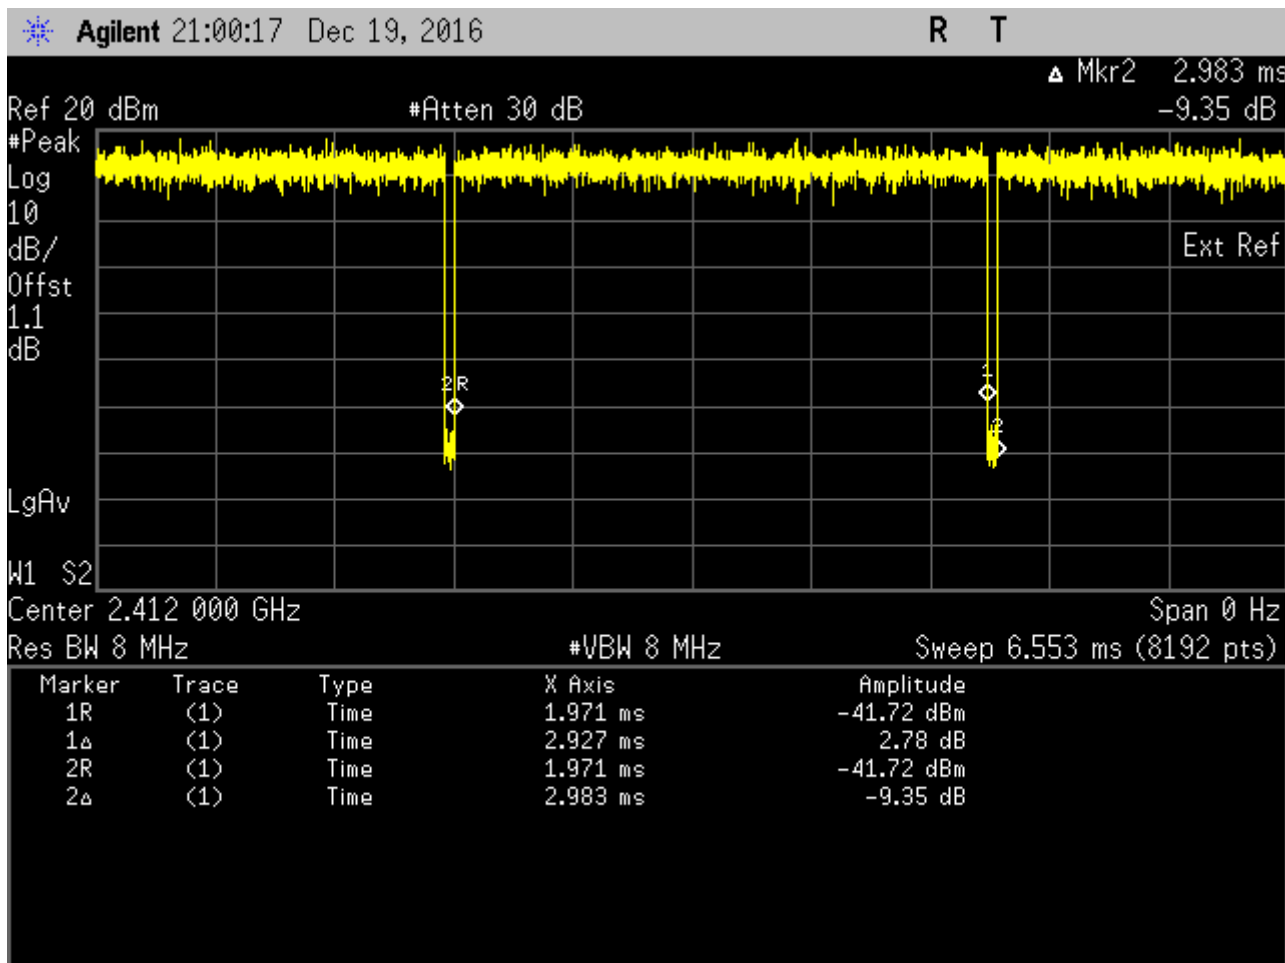


On time	2.927	ms
On + off time	2.983	ms
Duty cycle	0.9812	
Duty Cycle factor	0.082	

\*Duty cycle = On time/ On +off time

\*Duty Cycle factor = 10\*log(1/Duty Cycle)

## 6.4. Maximum Peak Power Spectral Density

### 6.4.1. Test Setup



#### Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. Set analyzer center frequency to DTS channel center frequency.
  - b. Set the span to 1.5 times the DTS bandwidth.
  - c. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - d. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e. Detector = peak.
  - f. Sweep time = auto couple.
  - g. Trace mode = max hold.
  - h. Allow trace to fully stabilize.
  - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


### 6.4.2. Test Limits

<b>Normal Condition (25 ° C)</b>
<b><math>\leq 8 \text{ dBm/3kHz}</math></b>


### 6.4.3. Test Result

#### 802.11b


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/100kHz)	Status
802.11b	DSSS	QPSK	2	2412	4.05	Pass
802.11b	DSSS	QPSK	2	2437	2.92	Pass
802.11b	DSSS	QPSK	2	2462	2.92	Pass

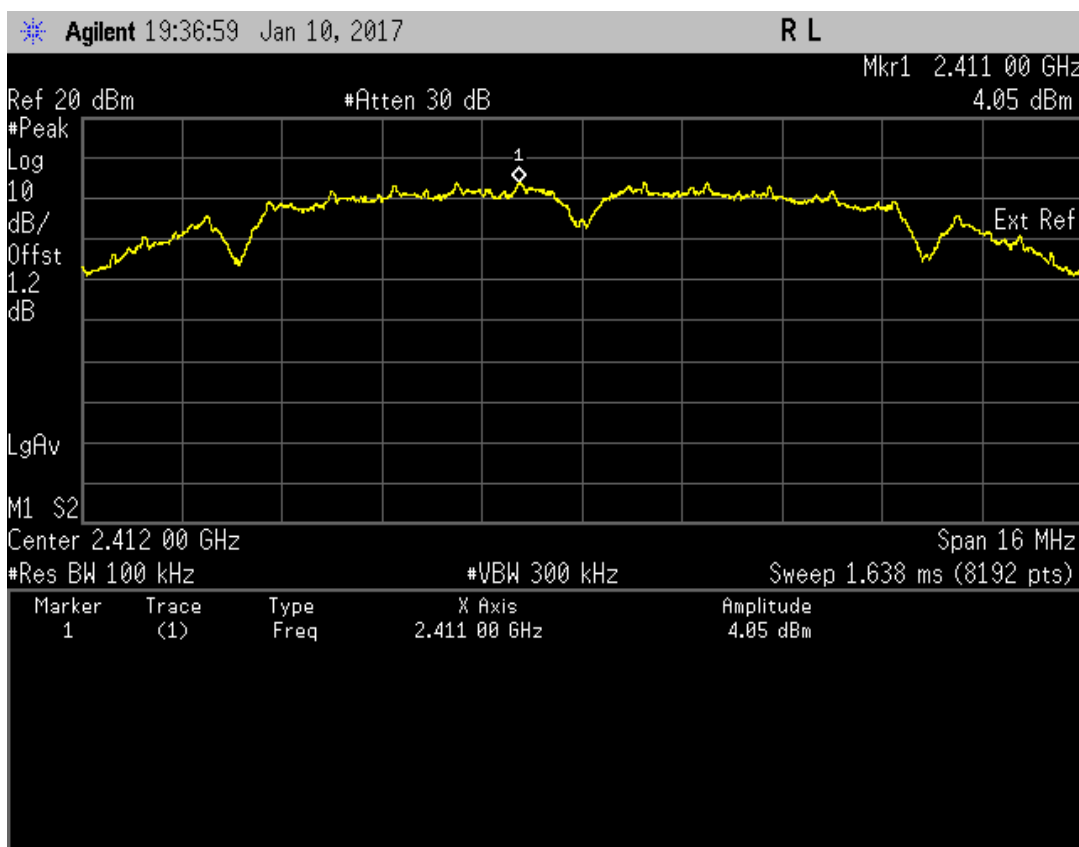

Maximum Power Spectral Density. 802.11b Frequency 2412 MHz

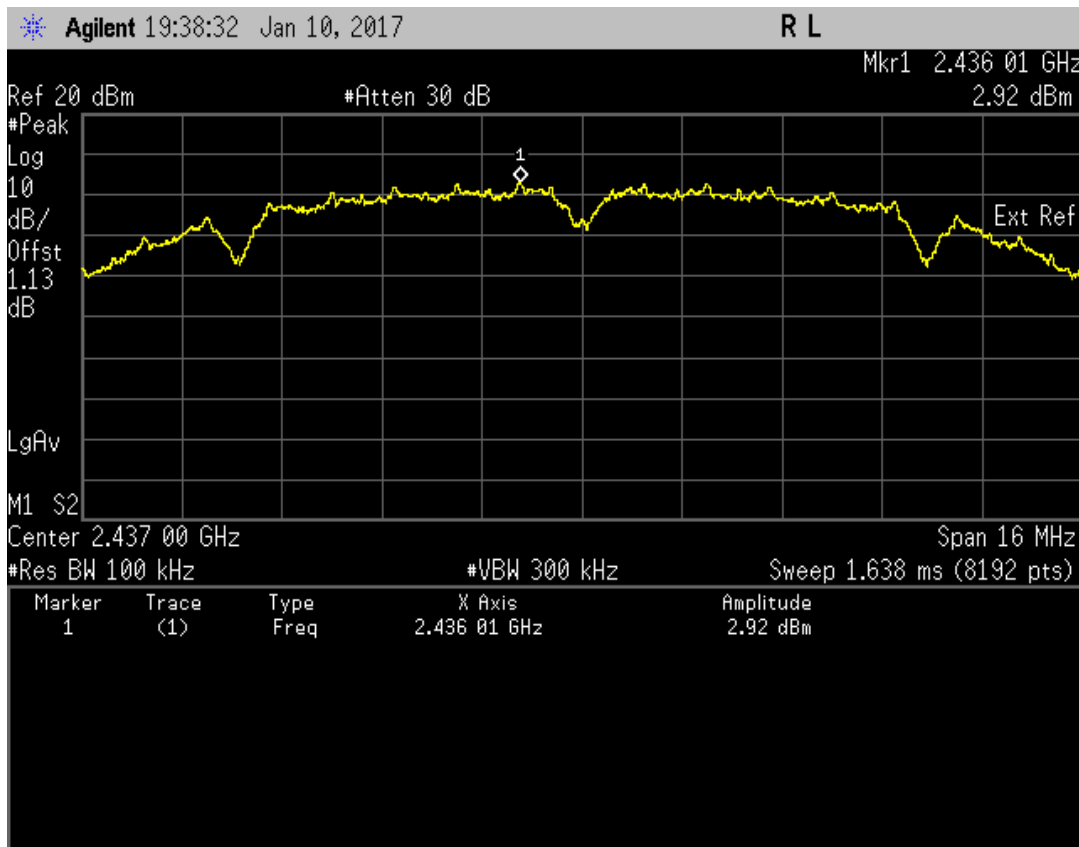


Maximum Power Spectral Density. 802.11b Frequency 2437 MHz

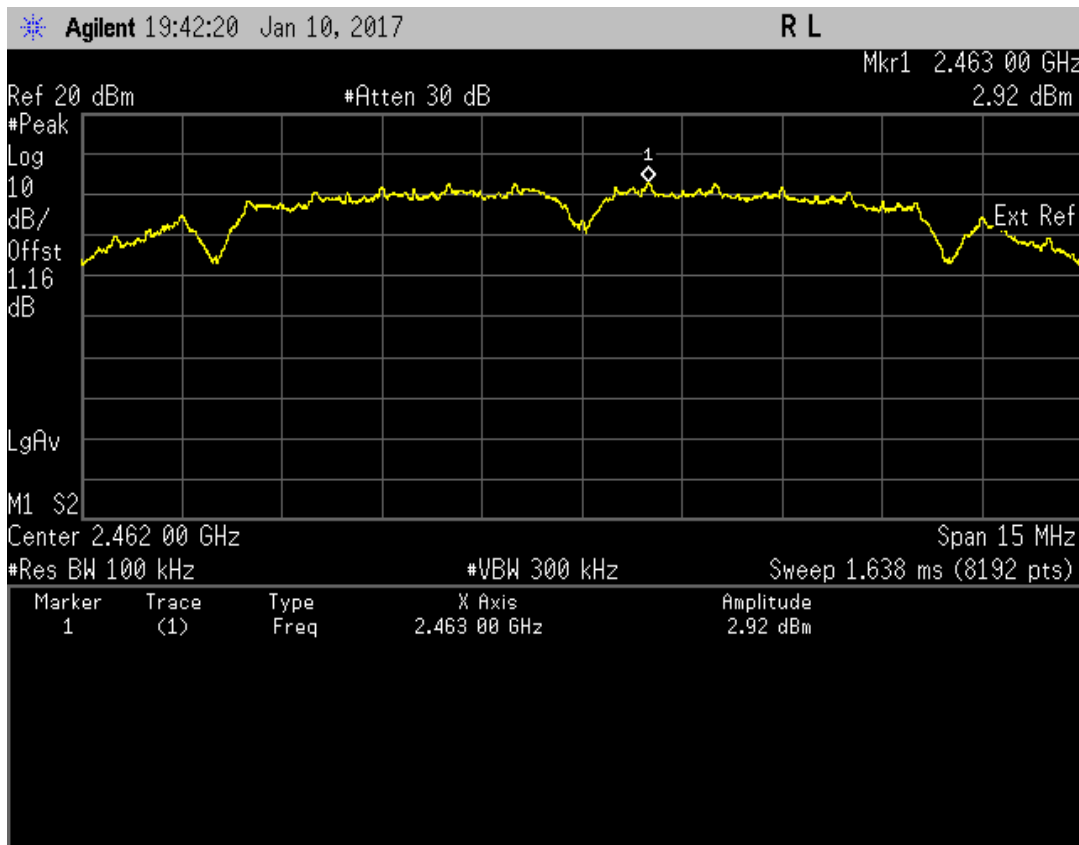

Maximum Power Spectral Density. 802.11b Frequency 2462 MHz


**802.11g**

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (Mbps)	Tx (MHz)	Power (dBm/100kHz)	Status
802.11g	OFDM	BPSK	6	2412	-2.21	Pass
802.11g	OFDM	BPSK	6	2437	-2.41	Pass
802.11g	OFDM	BPSK	6	2462	-2.74	Pass

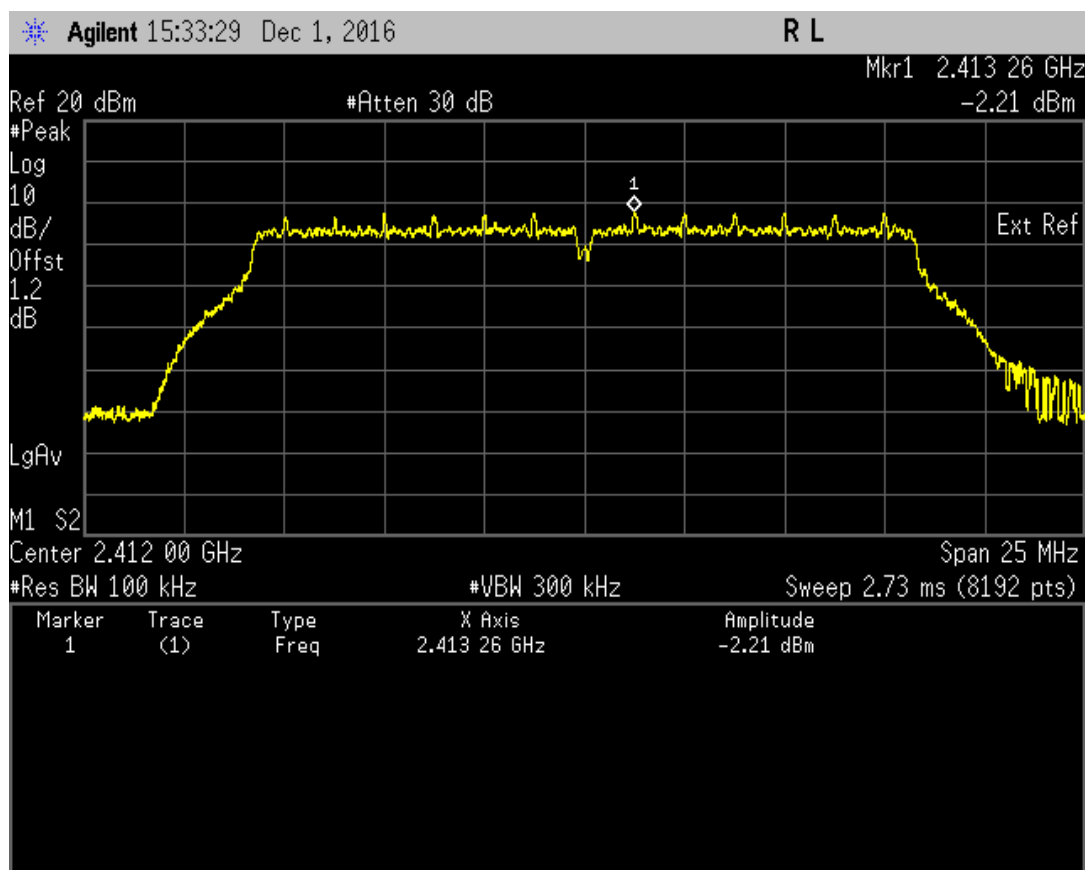


**Maximum Power Spectral Density. 802.11g Frequency 2412 MHz**



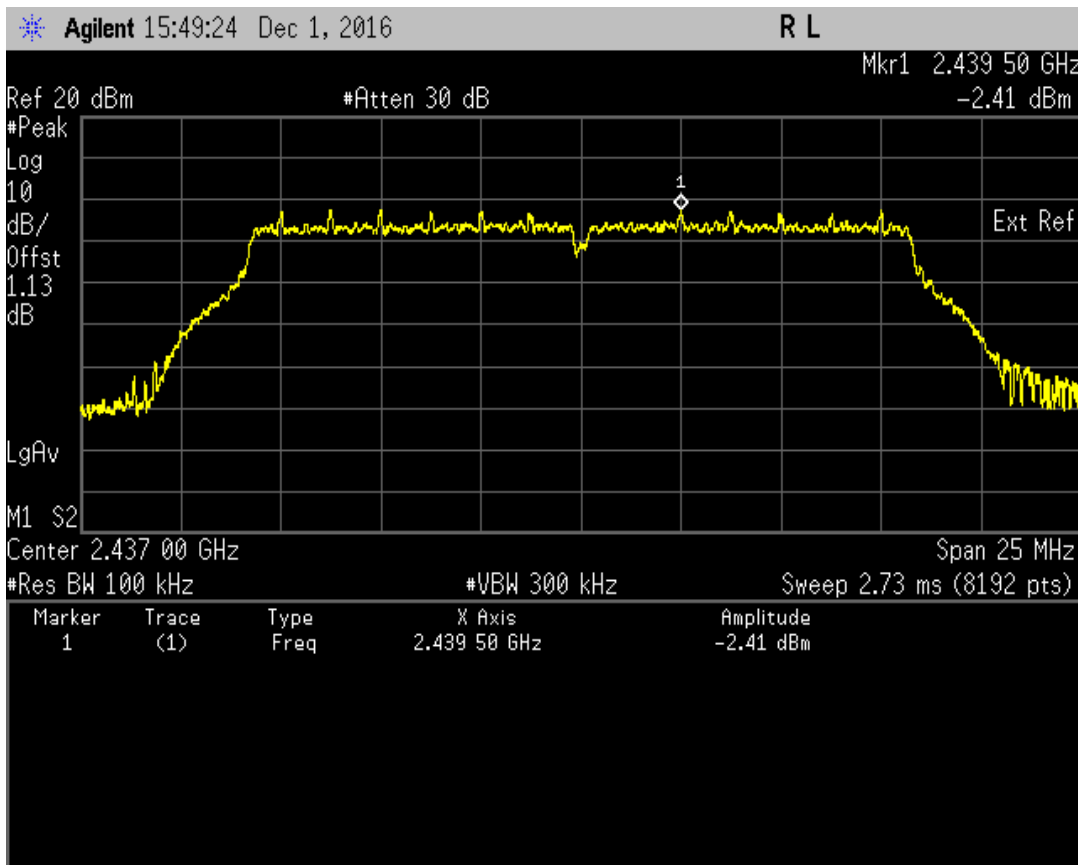


Maximum Power Spectral Density. 802.11g Frequency 2437 MHz

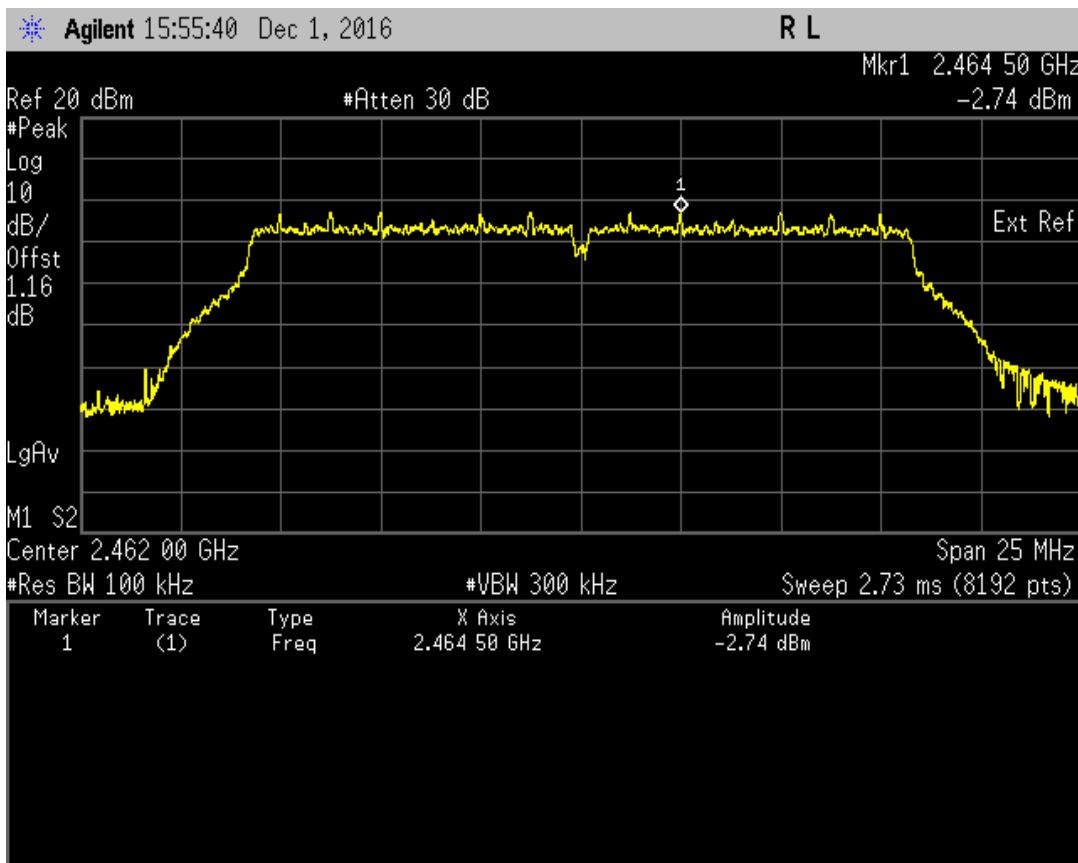


Maximum Power Spectral Density. 802.11g Frequency 2462 MHz

**802.11n (HT20)**


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/100kHz)	Status
802.11n	OFDM	BPSK	6.5	2412	-0.48	Pass
802.11n	OFDM	BPSK	6.5	2437	-1.52	Pass
802.11n	OFDM	BPSK	6.5	2462	-0.81	Pass

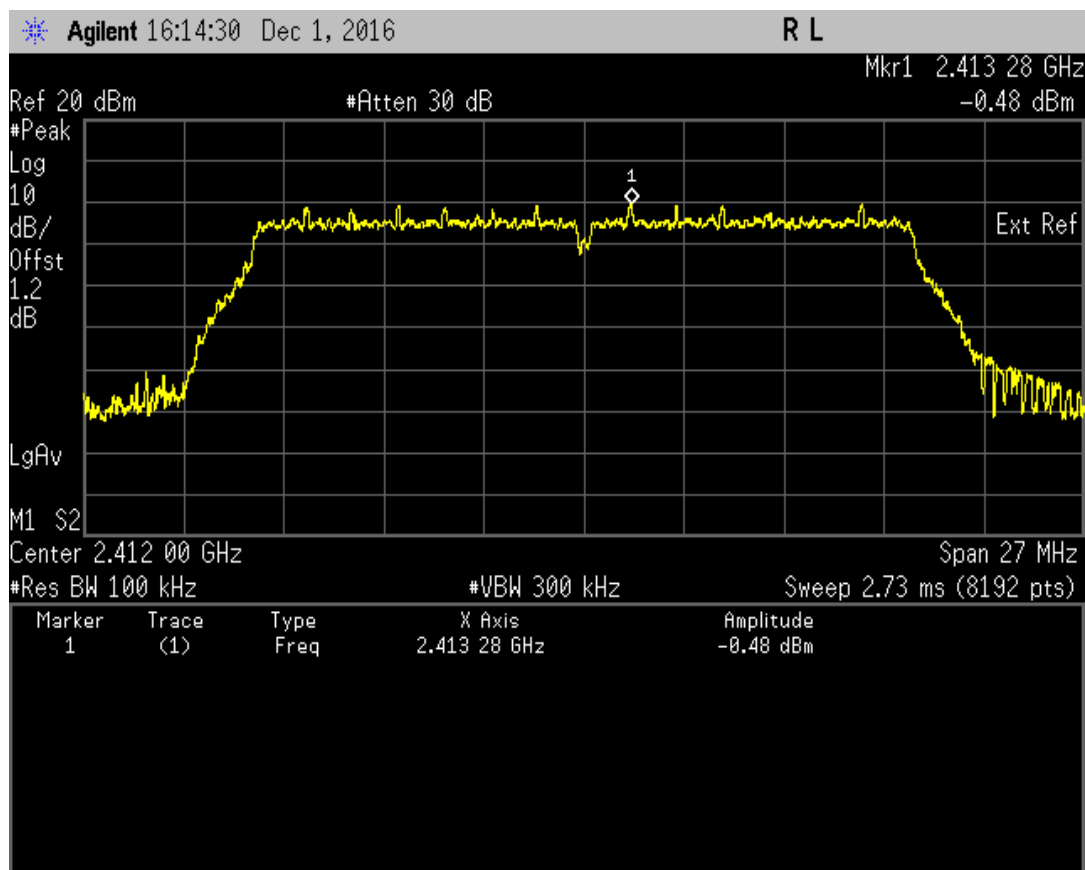

**Maximum Power Spectral Density. 802.11n (HT20) Frequency 2412 MHz**

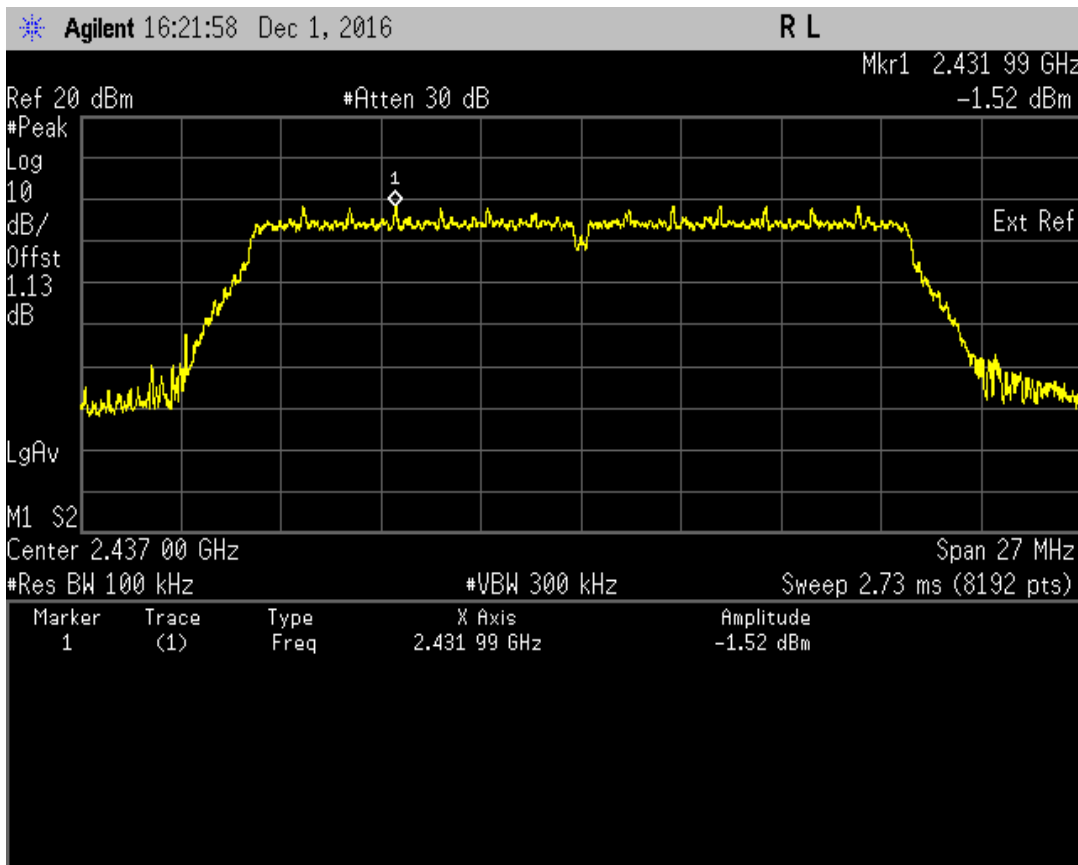


Maximum Power Spectral Density. 802.11n (HT20) Frequency 2437 MHz

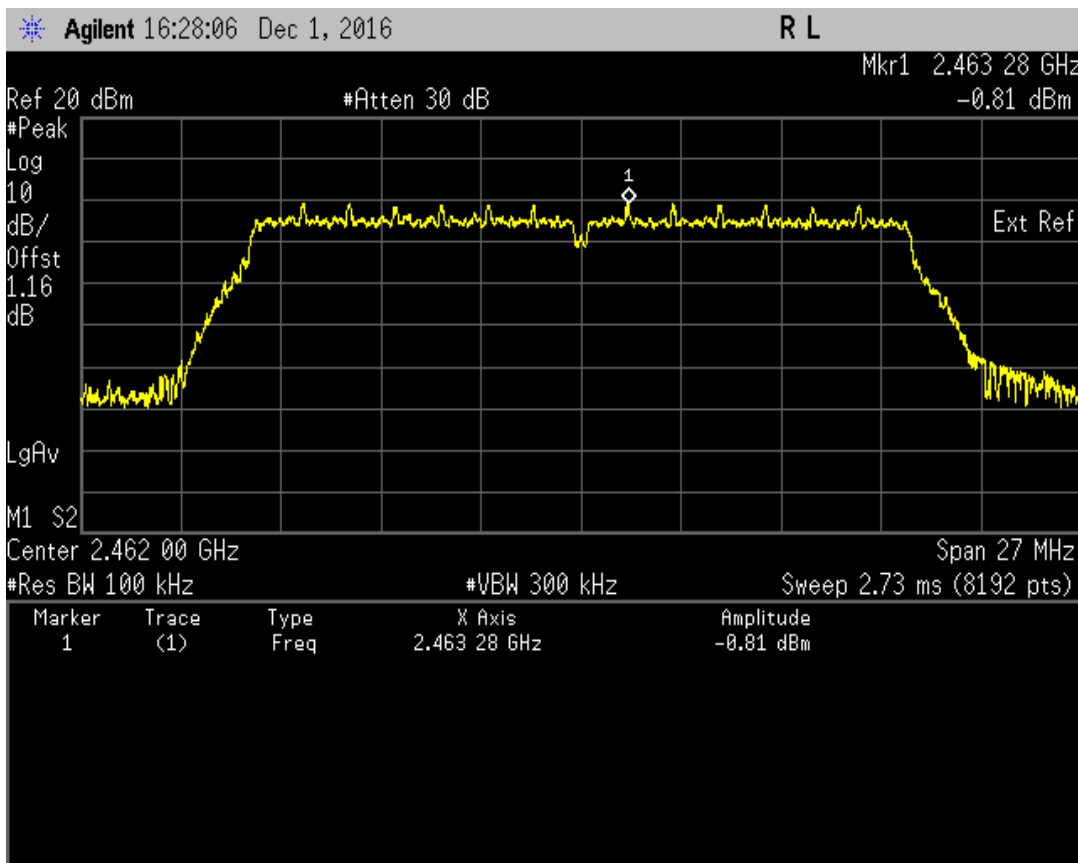

Maximum Power Spectral Density. 802.11n (HT20) Frequency 2462 MHz

### 6.5. Conducted Spurious Emission

#### 6.5.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT’s antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- e) Use the peak marker function to measure highest emission and scan up to 10<sup>th</sup> harmonic.


#### 6.5.2. Test Limits:

<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 30 dB below peak (max) power.</b>

#### 6.5.3. Test Result


##### 802.11b

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11b	DSSS	QPSK	2	2412	14198.40	-49.70	Pass
					6683.37	-50.73	Pass
					6963.93	-51.19	Pass
802.11b	DSSS	QPSK	2	2437	14188.38	-49.84	Pass
					6993.99	-50.86	Pass
					6723.45	-51.25	Pass
802.11b	DSSS	QPSK	2	2462	14188.38	-50.34	Pass
					12585.17	-51.11	Pass
					12695.39	-51.19	Pass

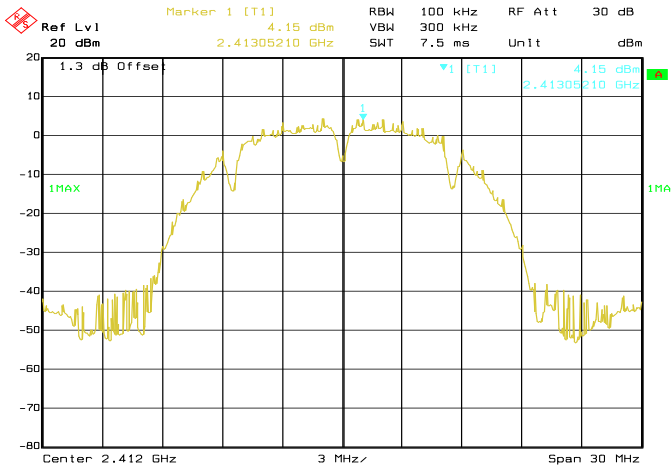


Date: 01.DEC.2016 14:31:17

**Conducted Emissions. 802.11b, Frequency 2412 MHz Reference Level**

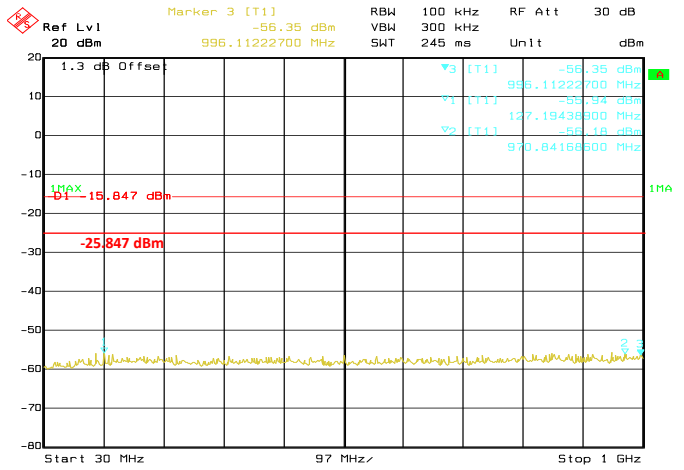


Date: 01.DEC.2016 14:31:51

**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz**

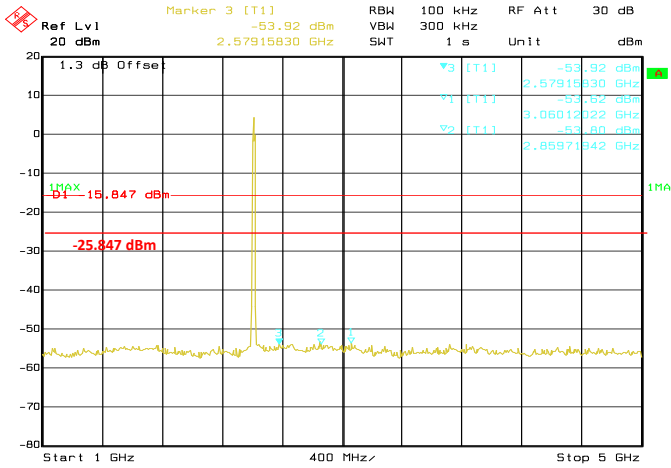


Date: 01.DEC.2016 14:32:23

**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz**

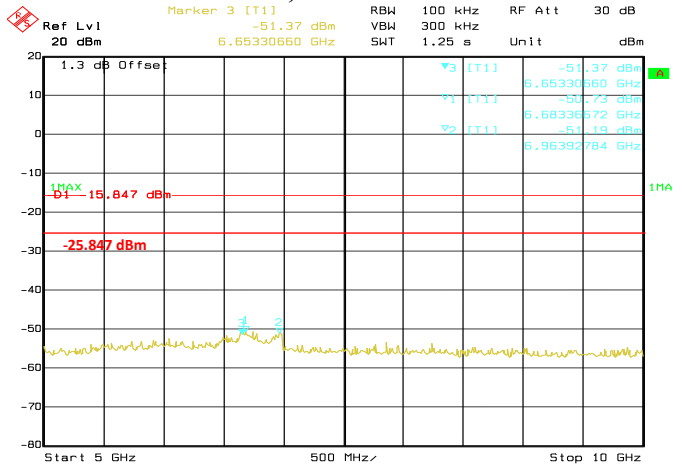


Date: 01.DEC.2016 14:32:56

**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz**

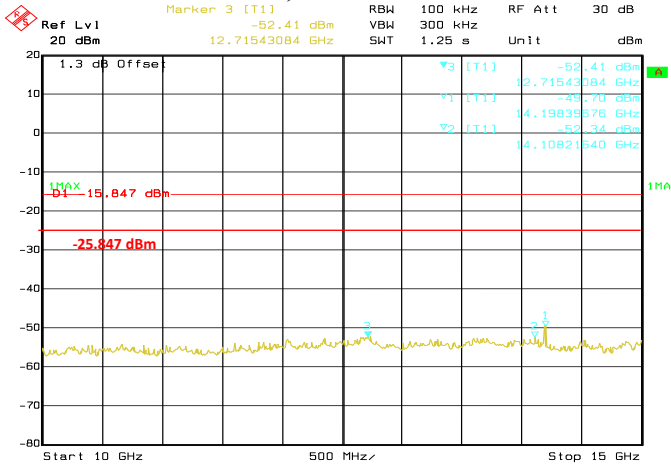


Date: 01.DEC.2016 14:33:29

**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz**

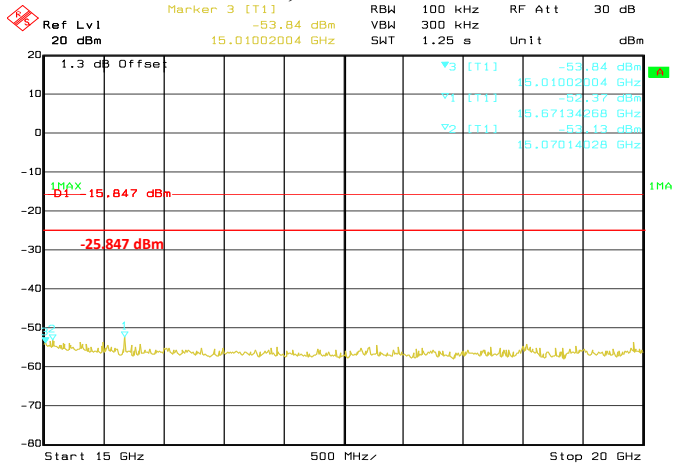


Date: 01.DEC.2016 14:34:01


**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz**

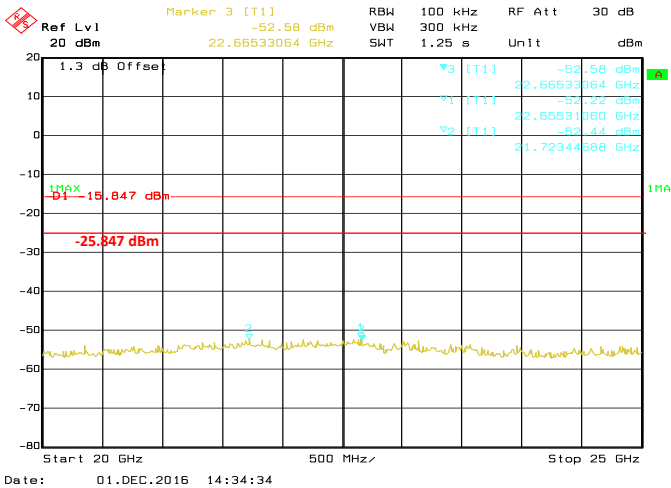


**Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz**

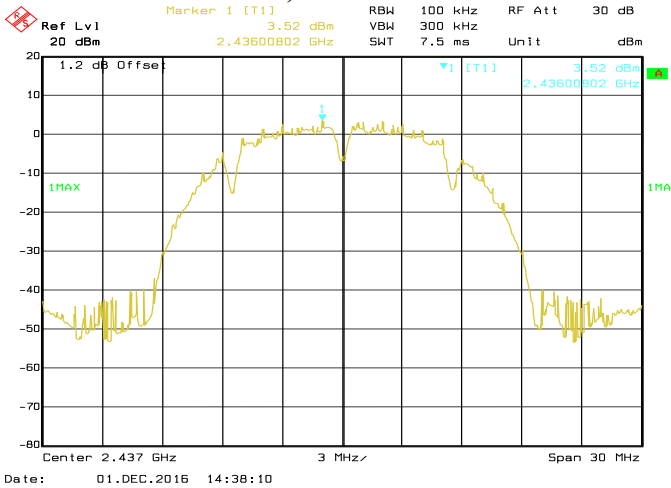


**Conducted Emissions. 802.11b, Frequency 2437 MHz Reference Level**

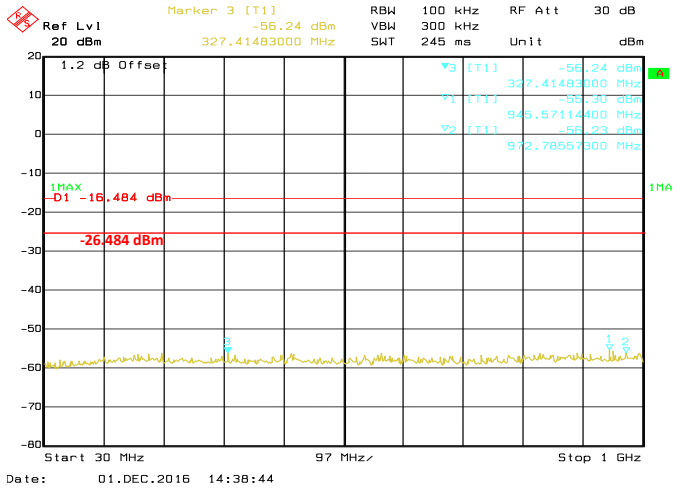


**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz**

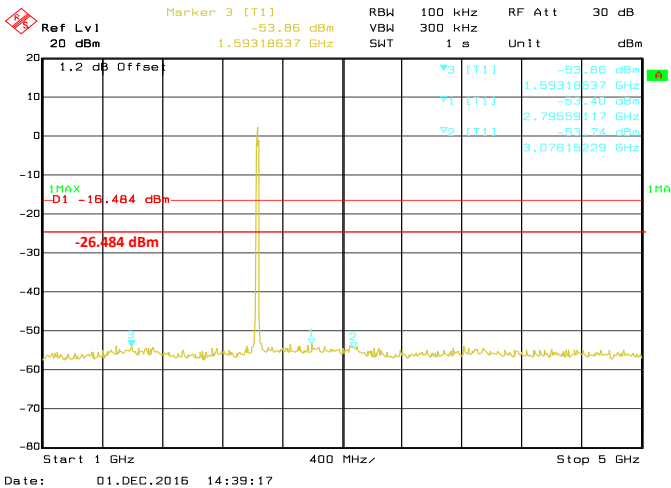

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz**

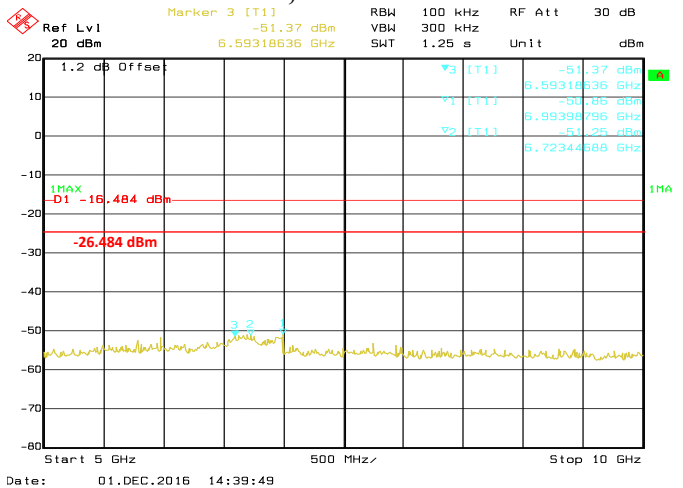


**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz**

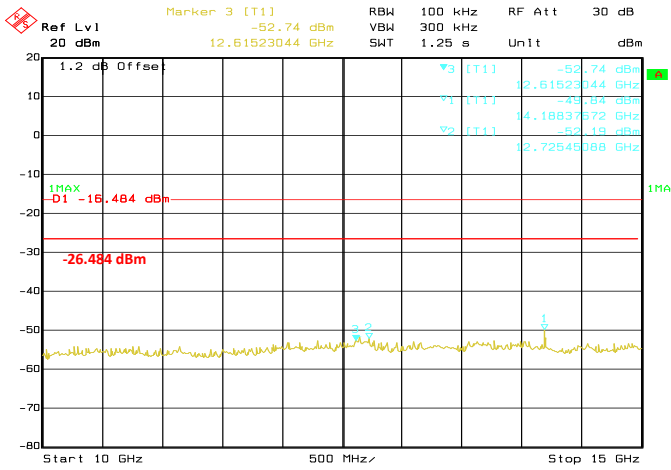


Date: 01.DEC.2016 14:40:22

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz**

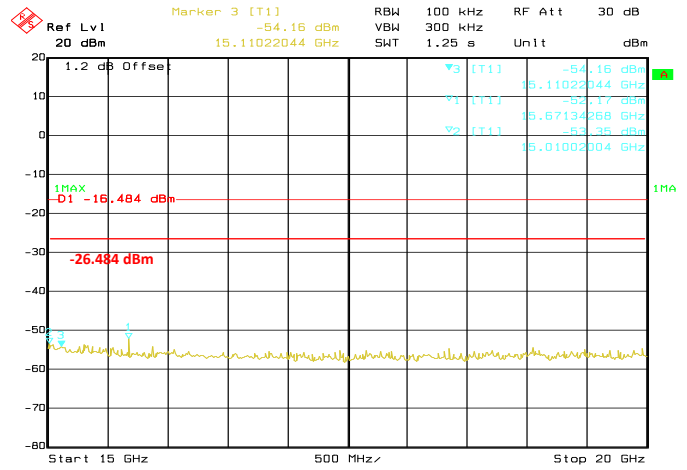


Date: 01.DEC.2016 14:40:55

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz**

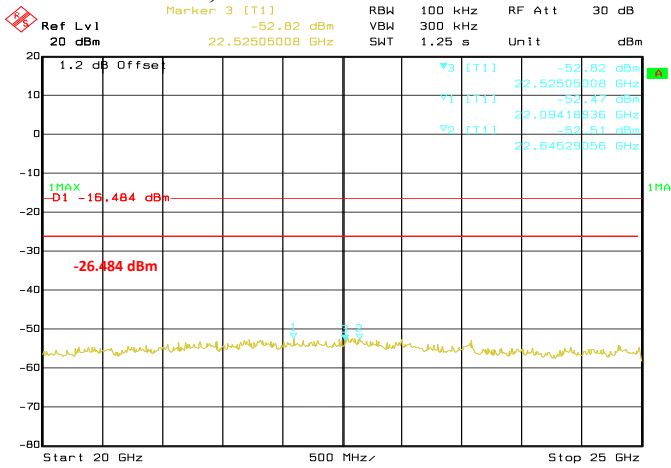


Date: 01.DEC.2016 14:41:28

**Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz**

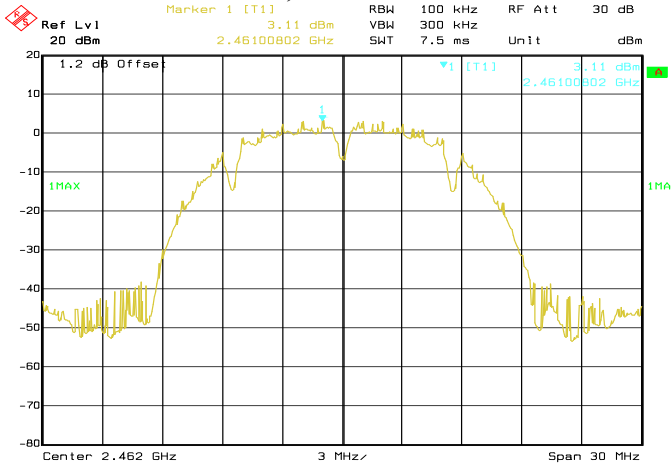


Date: 01.DEC.2016 14:42:41

**Conducted Emissions. 802.11b, Frequency 2462 MHz Reference Level**

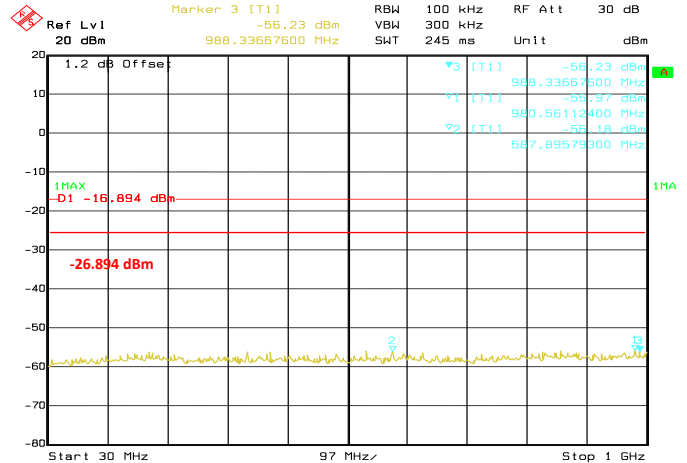


Date: 01.DEC.2016 14:43:14


**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz**

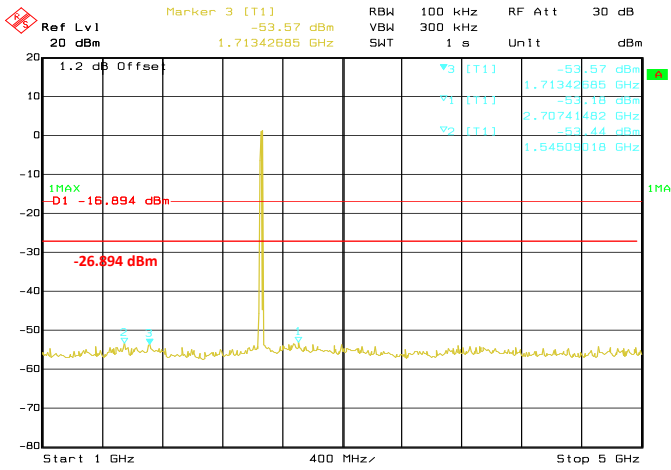


Date: 01.DEC.2016 14:43:46  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz**

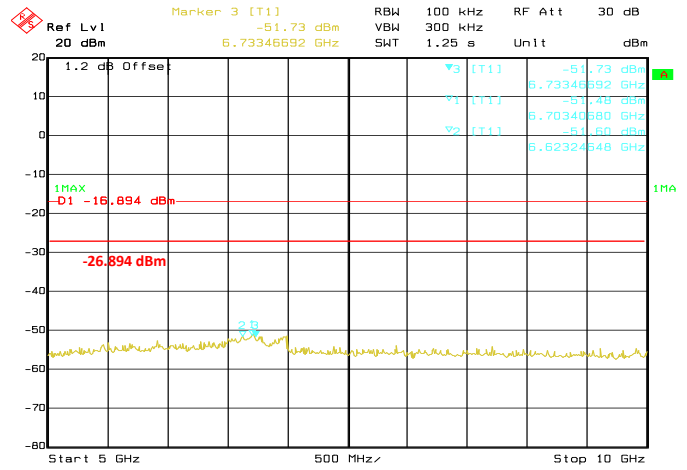


Date: 01.DEC.2016 14:44:19  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz**

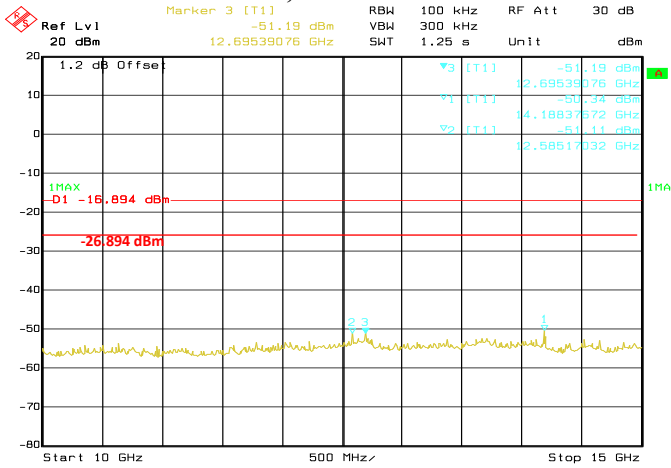

Date: 01.DEC.2016 14:44:52  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz**

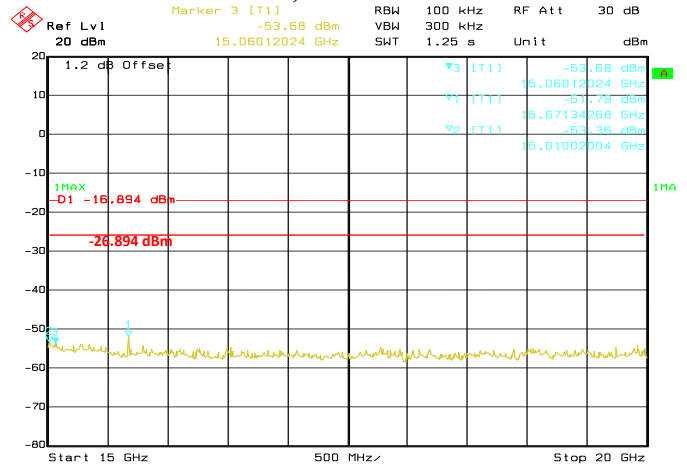

Date: 01.DEC.2016 14:45:25  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz**

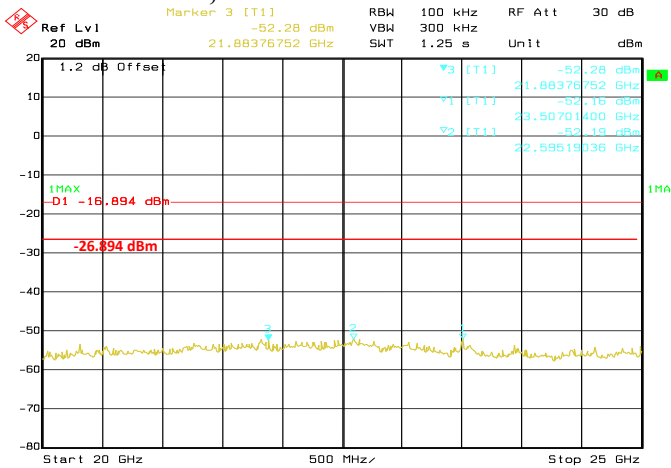


Date: 01.DEC.2016 14:45:58  
**Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz**




**802.11g**

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11g	OFDM	BPSK	6	2412	14188.38	-50.36	Pass
					6973.95	-50.63	Pass
					6723.45	-51.31	Pass
802.11g	OFDM	BPSK	6	2437	14188.38	-49.96	Pass
					6733.47	-51.38	Pass
					22645.29	-51.43	Pass
802.11g	OFDM	BPSK	6	2462	14188.38	-50.11	Pass
					6733.47	-50.36	Pass
					6983.97	-51.22	Pass

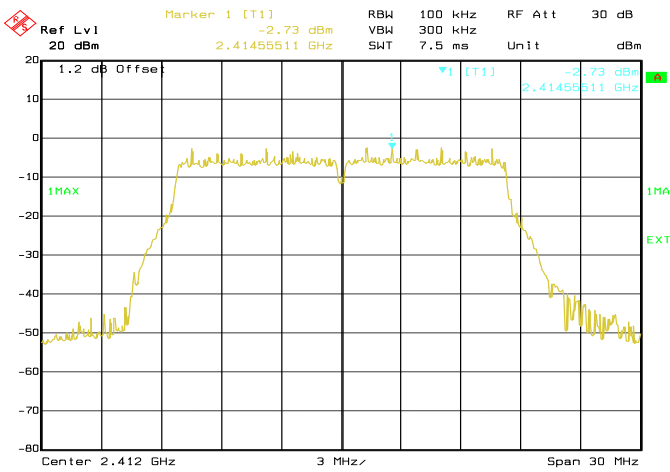


Date: 01.DEC.2016 15:09:45

**Conducted Emissions. 802.11g, Frequency 2412 MHz Reference Level**

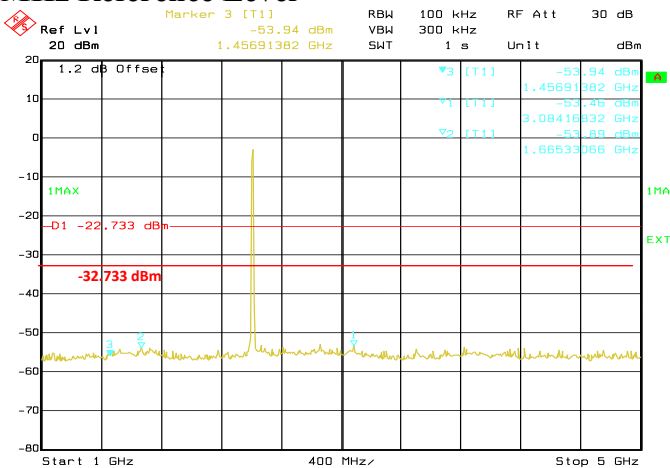


Date: 01.DEC.2016 15:10:51

**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz**

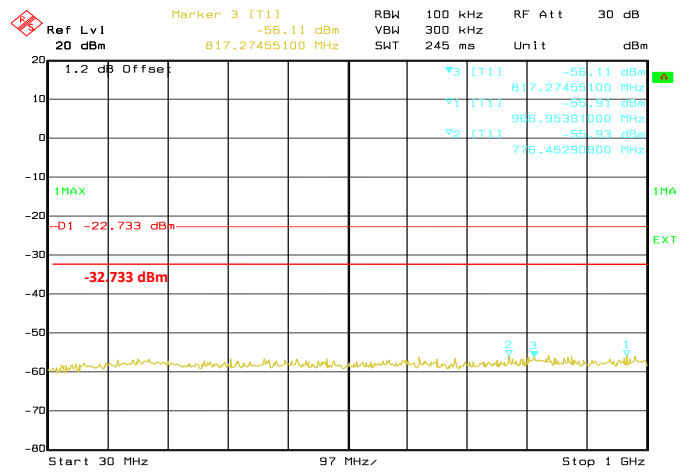


Date: 01.DEC.2016 15:10:18

**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz**

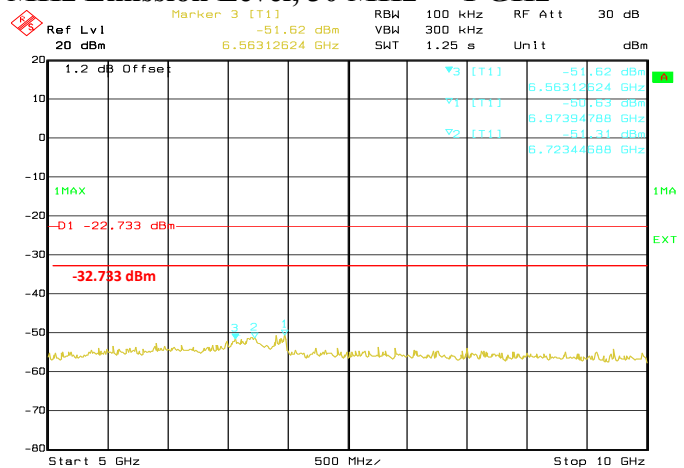


Date: 01.DEC.2016 15:11:24


**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz**

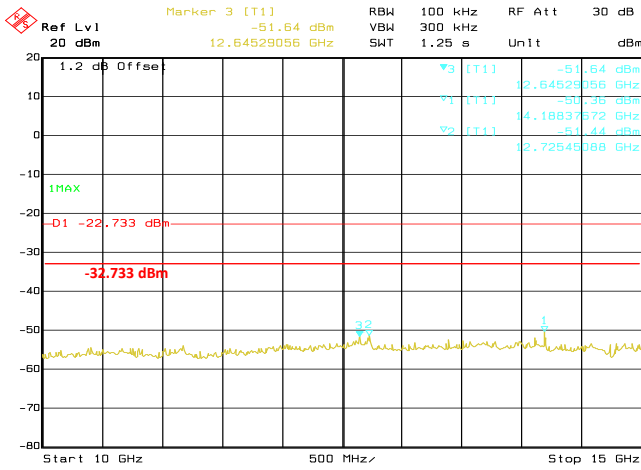


Date: 01.DEC.2016 15:11:57  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz**

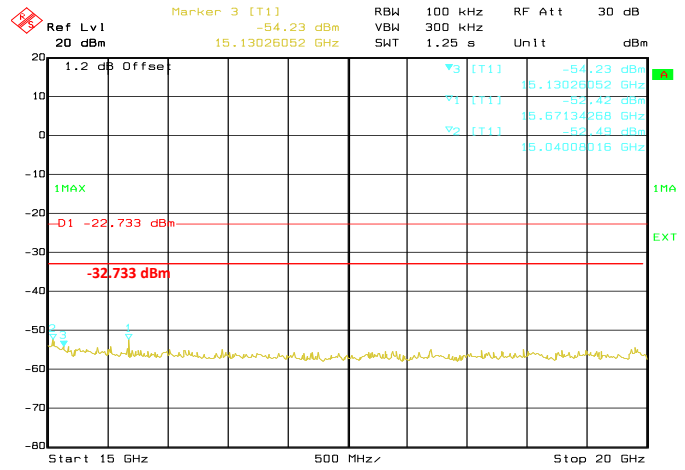


Date: 01.DEC.2016 15:12:29  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz**

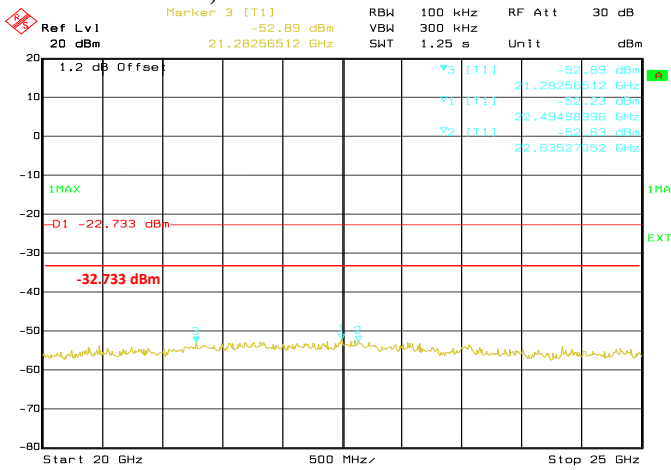


Date: 01.DEC.2016 15:13:02  
**Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz**

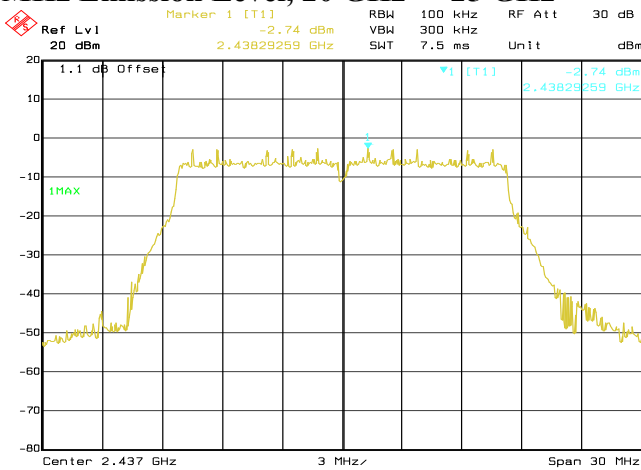


Date: 01.DEC.2016 15:32:51  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Reference Level**

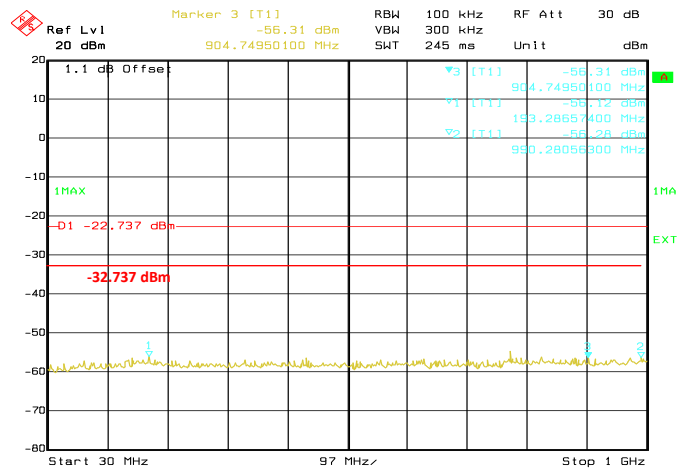


Date: 01.DEC.2016 15:33:24  
**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz**

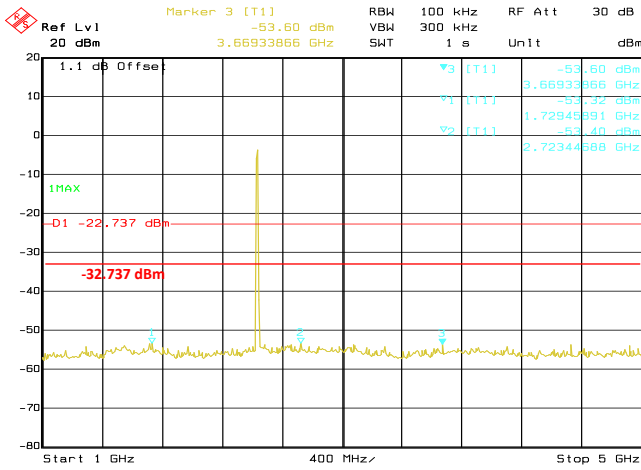


**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz**

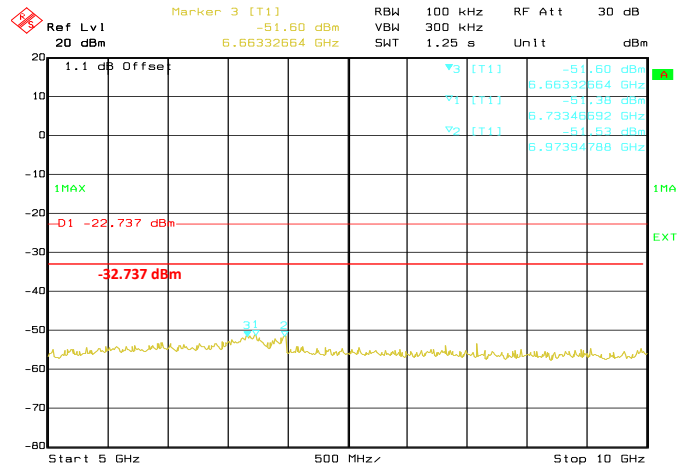


**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz**

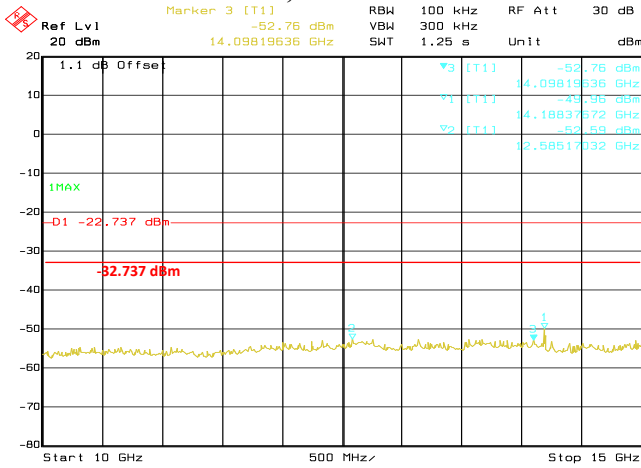


**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz**

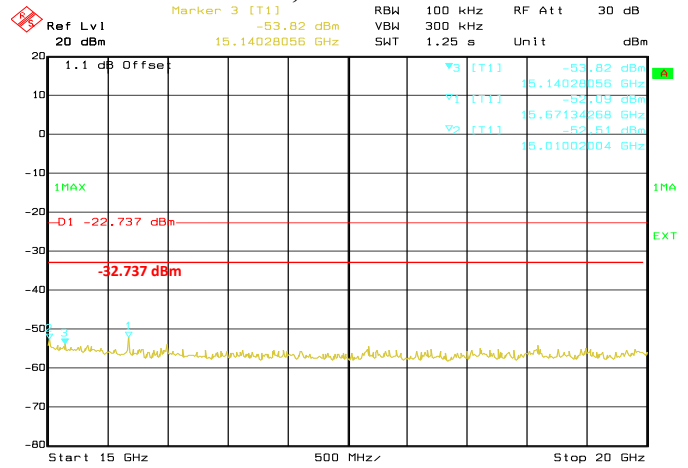


**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz**

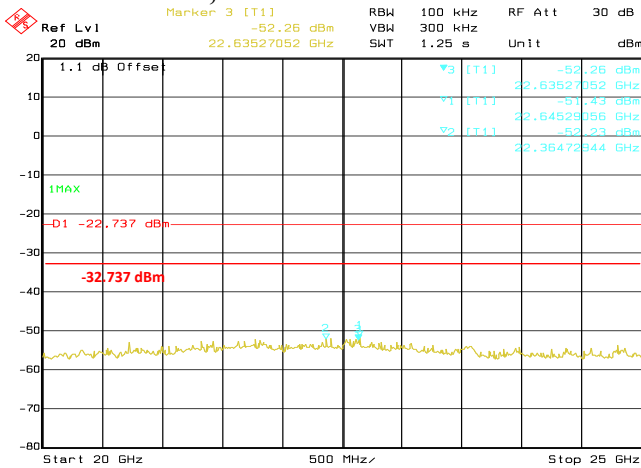


**Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz**

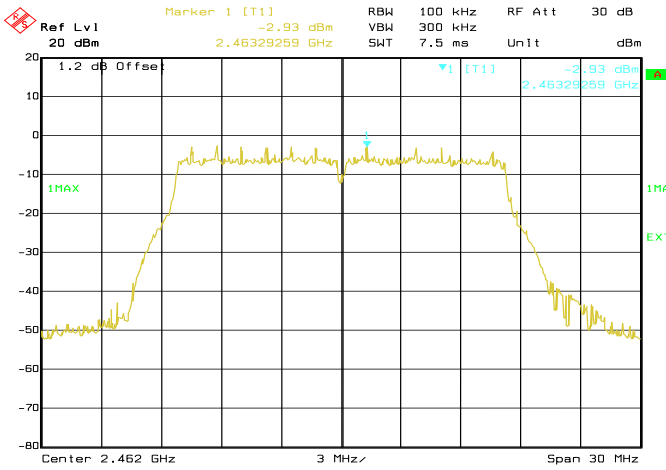


Date: 01.DEC.2016 16:00:31  
**Conducted Emissions. 802.11g, Frequency 2462 MHz Reference Level**

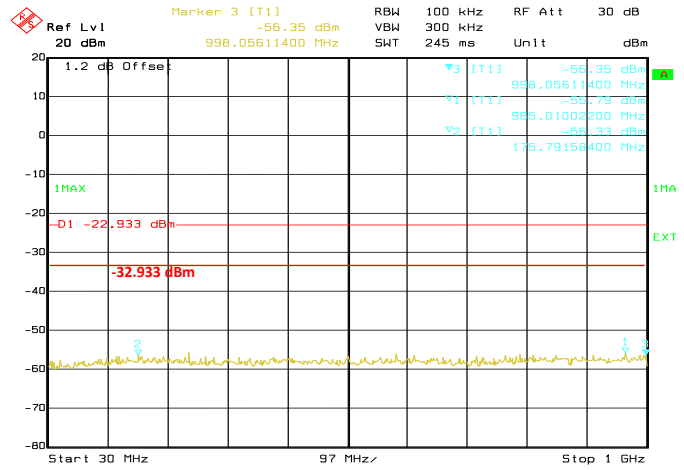


Date: 01.DEC.2016 16:01:04  
**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz**

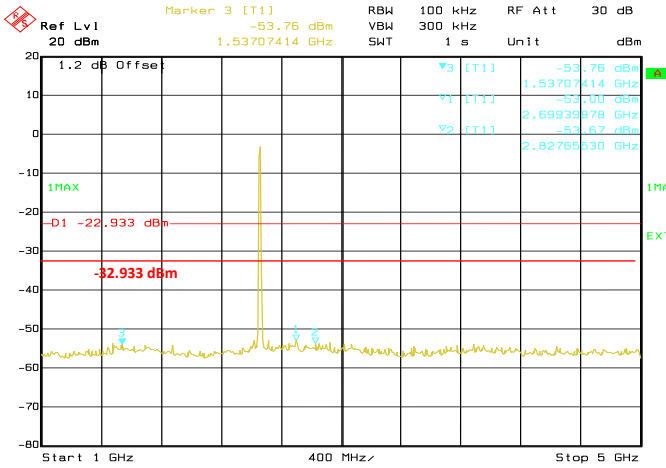


Date: 01.DEC.2016 16:01:36  
**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz**

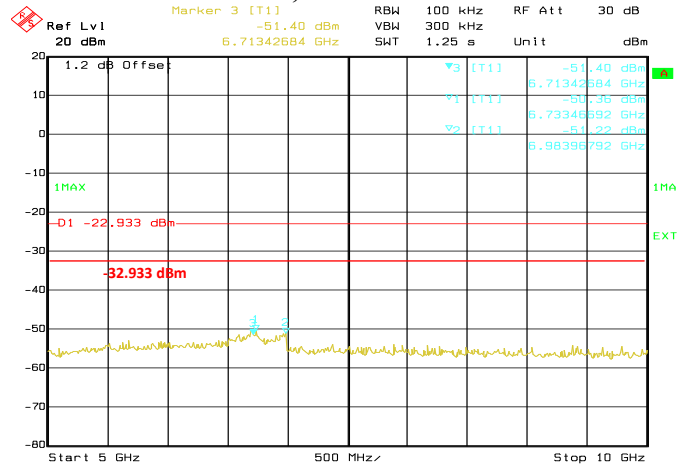


Date: 01.DEC.2016 16:02:09  
**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz**

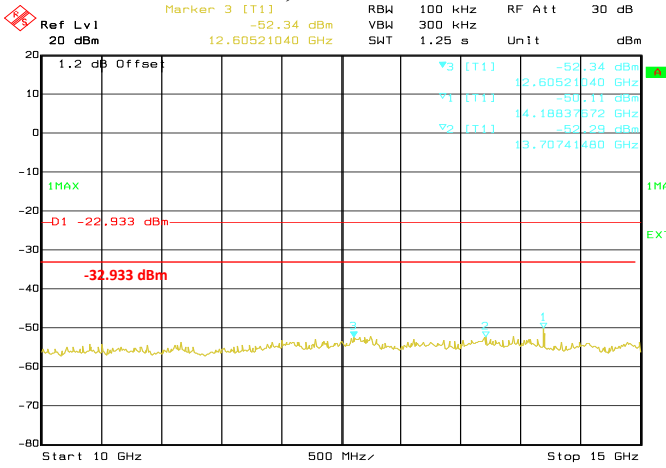

Date: 01.DEC.2016 16:02:42  
**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz**

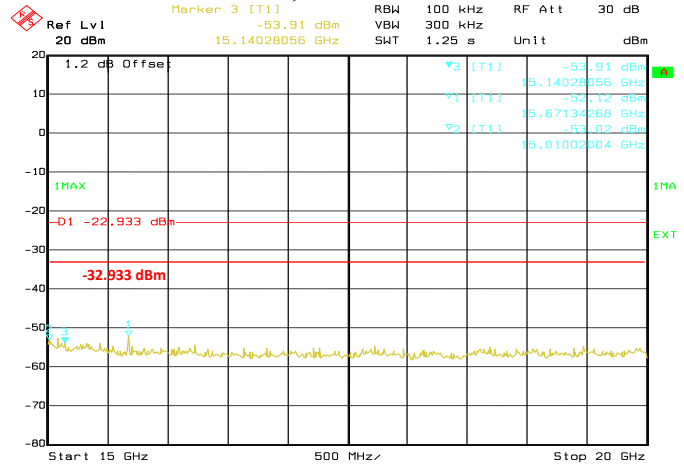


Date: 01.DEC.2016 16:03:15  
**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz**

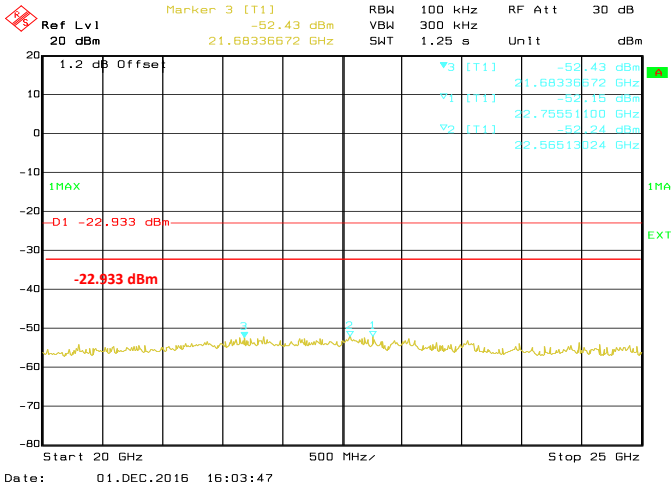


**Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz**

**802.11n (HT20)**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	6983.97	-50.56	Pass
					14188.38	-50.63	Pass
					6703.41	-50.97	Pass
802.11n	OFDM	BPSK	6.5	2437	6983.97	-50.70	Pass
					14188.38	-50.83	Pass
					6633.27	-51.31	Pass
802.11n	OFDM	BPSK	6.5	2462	6983.97	-49.66	Pass
					14188.38	-50.28	Pass
					12655.31	-50.80	Pass

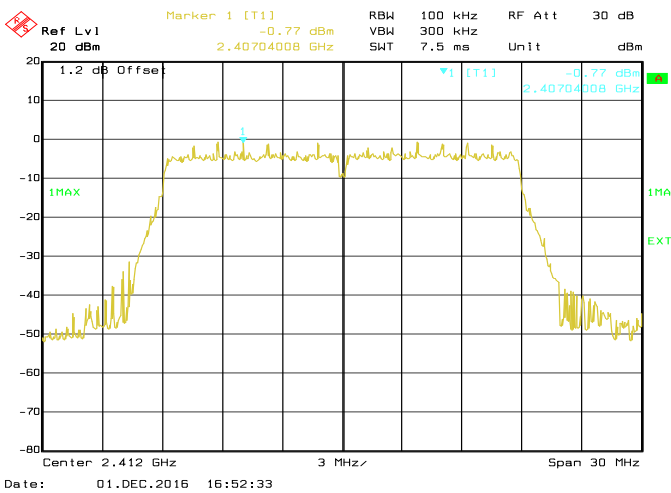

**Conducted Emissions. 802.11n (HT20), Frequency 2412 MHz Reference Level**

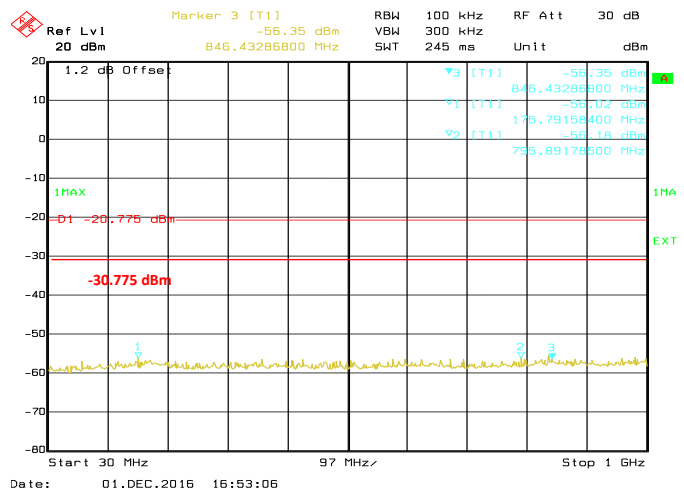


**Conducted Emissions. 802.11n (HT20), Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz**

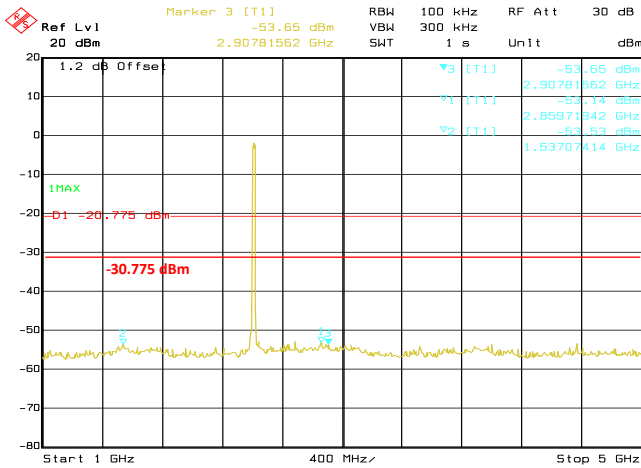


Date: 01.DEC.2016 16:53:39

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2412 MHz Emission Level, 1 GHz ->  
 5 GHz**

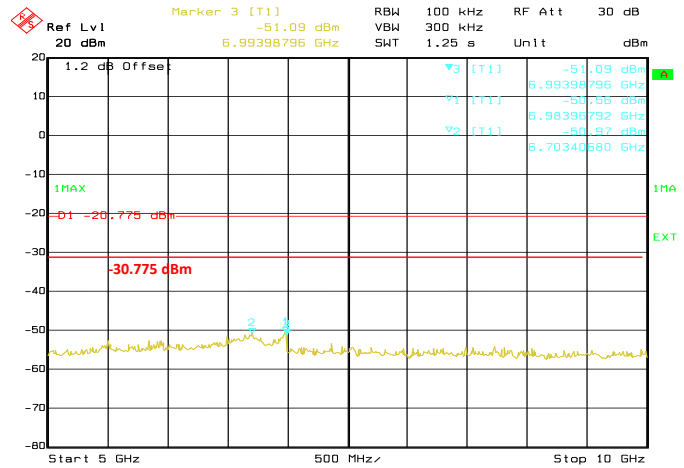


Date: 01.DEC.2016 16:54:11

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2412 MHz Emission Level, 5 GHz ->  
 10 GHz**

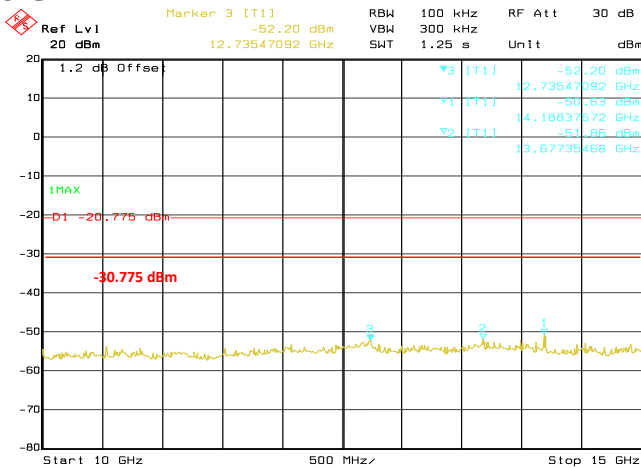


Date: 01.DEC.2016 16:54:44

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2412 MHz Emission Level, 10 GHz ->  
 15 GHz**

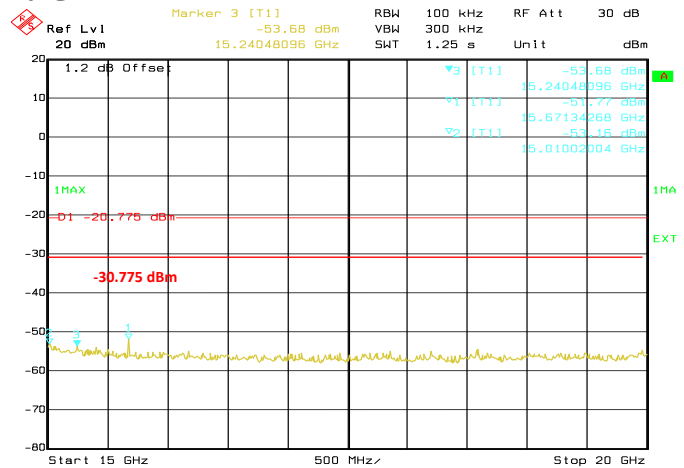


Date: 01.DEC.2016 16:55:17

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2412 MHz Emission Level, 15 GHz -  
 > 20 GHz**

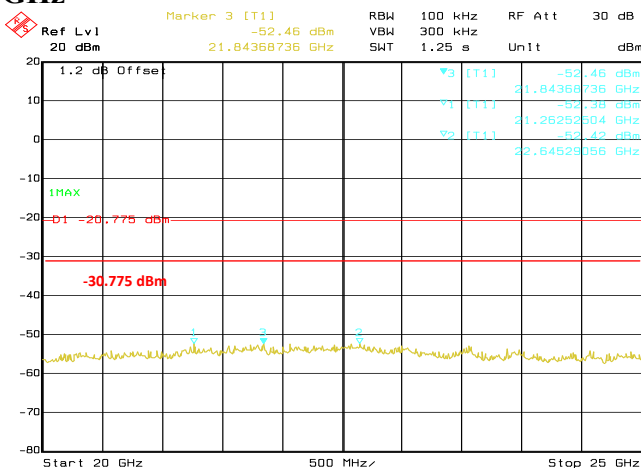


Date: 01.DEC.2016 16:55:49

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2412 MHz Emission Level, 20 GHz -  
 > 25 GHz**

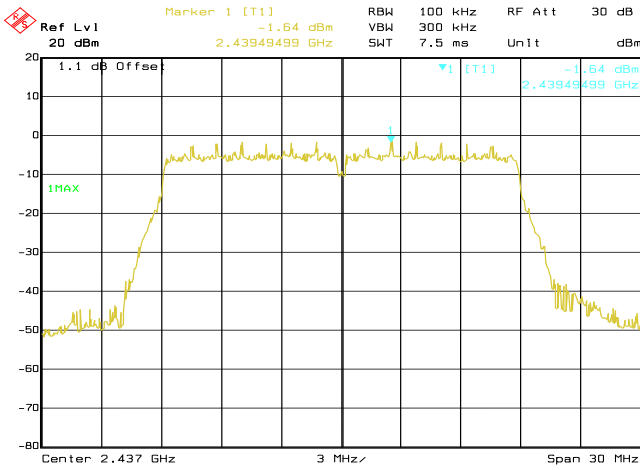


Date: 01.DEC.2016 17:04:11

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Reference Level**

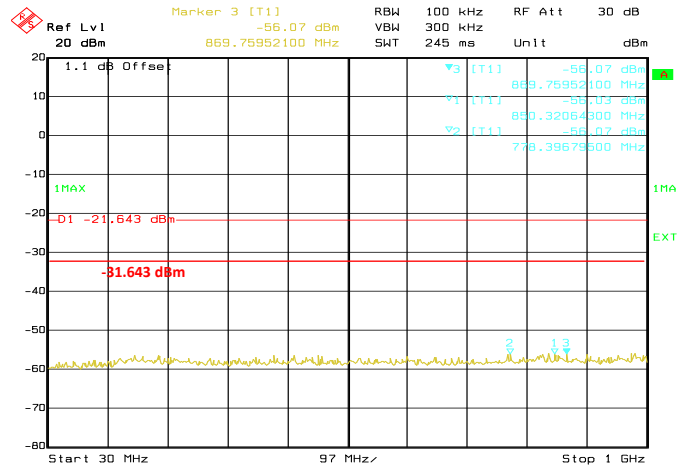


Date: 01.DEC.2016 17:04:44

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Emission Level, 30 MHz -  
 > 1 GHz**

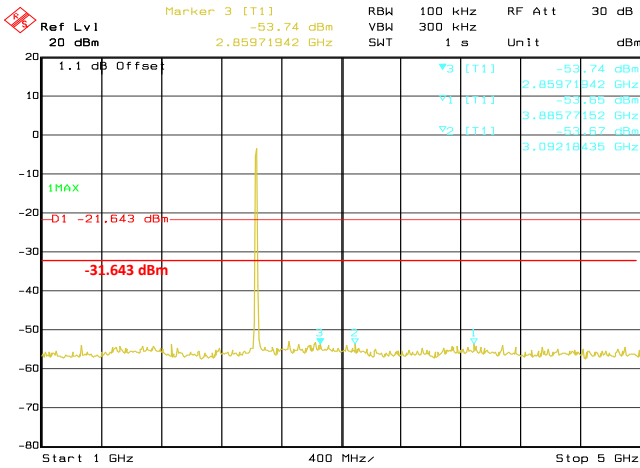


Date: 01.DEC.2016 17:05:16

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Emission Level, 1 GHz ->  
 5 GHz**

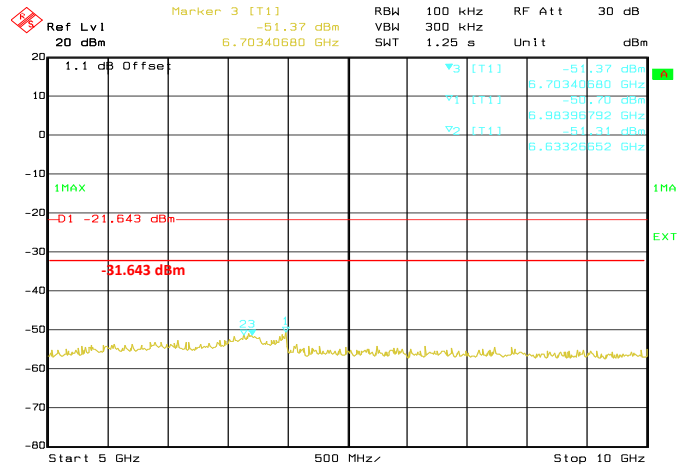


Date: 01.DEC.2016 17:05:49

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Emission Level, 5 GHz ->  
 10 GHz**

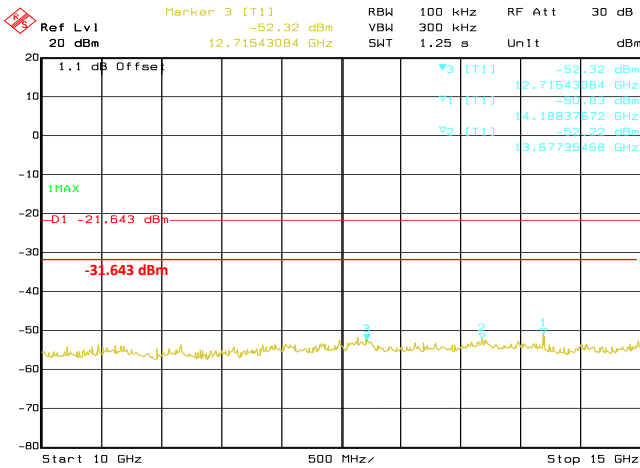


Date: 01.DEC.2016 17:06:22

**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Emission Level, 10 GHz ->  
 15 GHz**

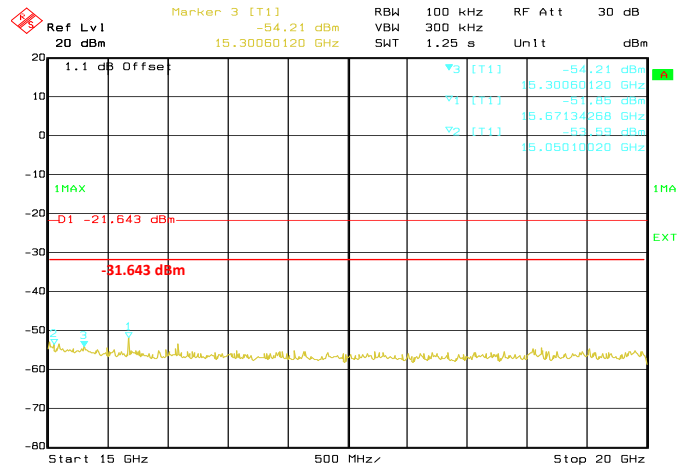


Date: 01.DEC.2016 17:06:55


**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Emission Level, 15 GHz -  
 > 20 GHz**

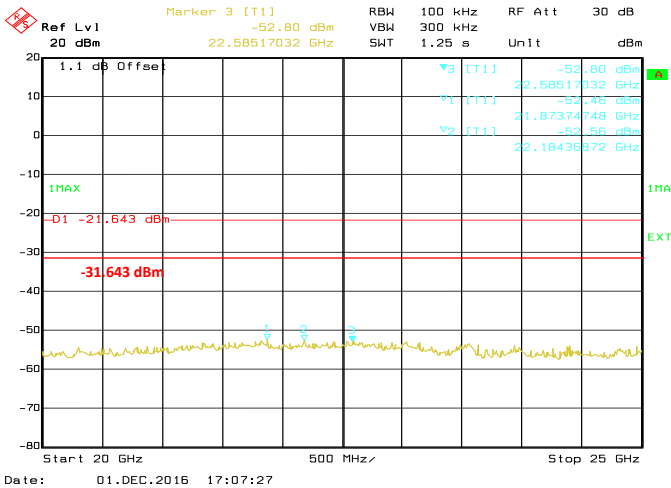


Date: 01.DEC.2016 17:07:27  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2437 MHz Emission Level, 20 GHz -  
 > 25 GHz**

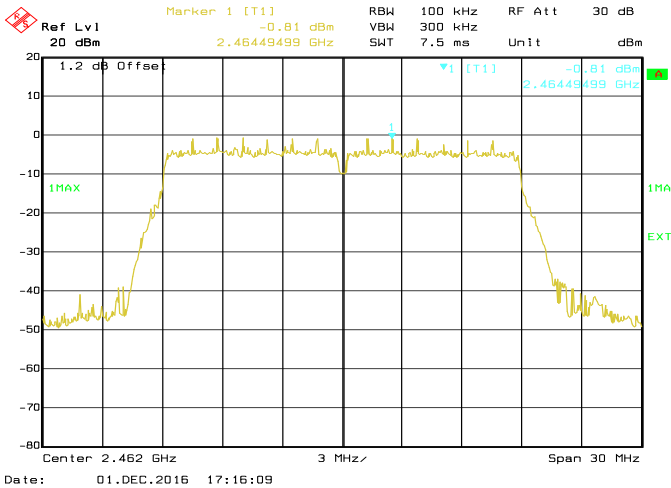


Date: 01.DEC.2016 17:16:09  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Reference Level**

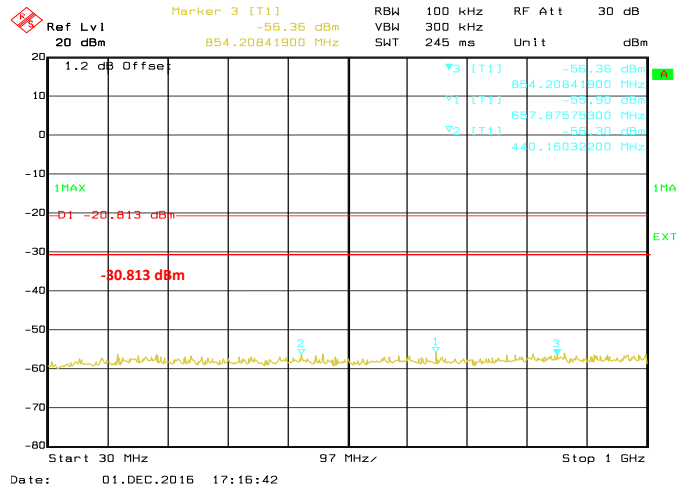

Date: 01.DEC.2016 17:16:42  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Emission Level, 30 MHz -  
 > 1 GHz**

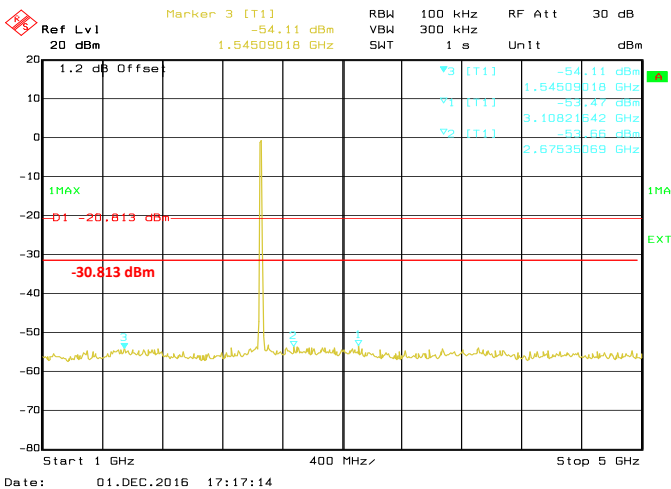


Date: 01.DEC.2016 17:17:14  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Emission Level, 1 GHz ->  
 5 GHz**

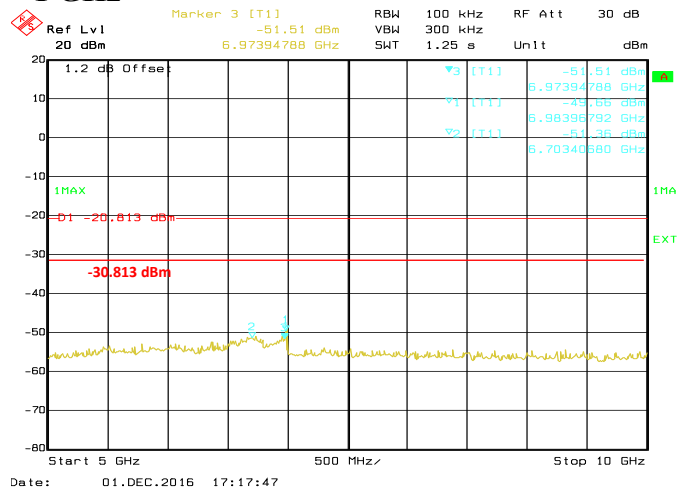


Date: 01.DEC.2016 17:17:47  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Emission Level, 5 GHz ->  
 10 GHz**




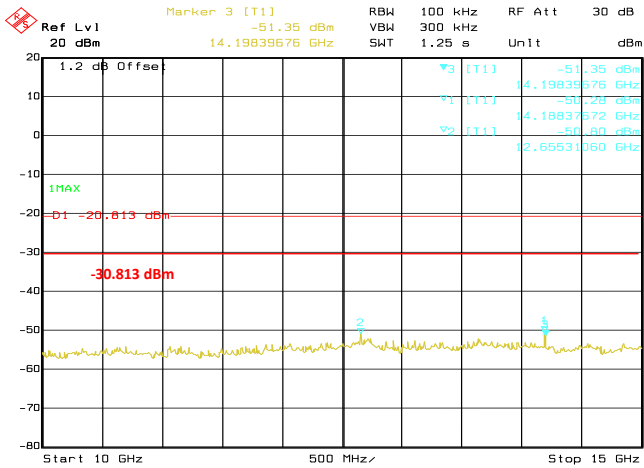

Date: 01.DEC.2016 17:18:20  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz**

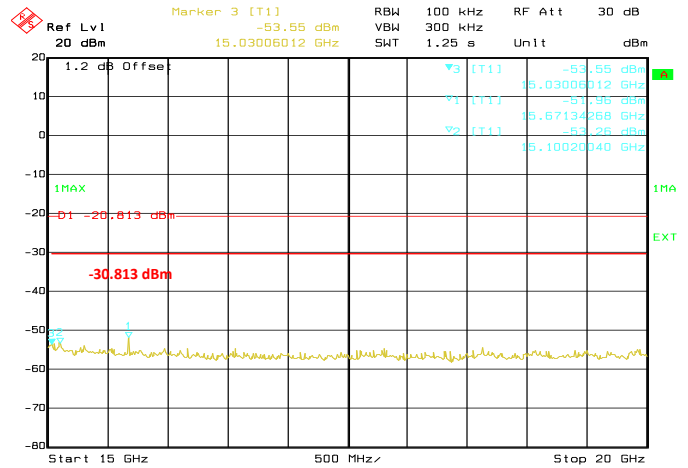


Date: 01.DEC.2016 17:18:53  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz**

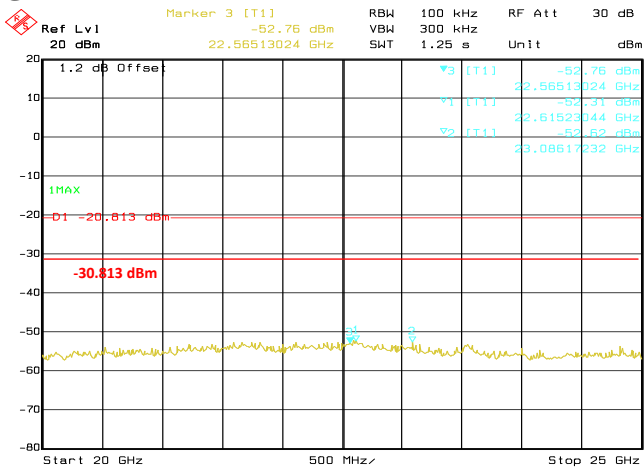

Date: 01.DEC.2016 17:19:25  
**Conducted Emissions. 802.11n (HT20),  
 Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz**

6.6. Band edge Conducted Spurious Emission

6.6.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT’s antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.


6.6.2. Test Limits:

<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 30 dB below peak (max) power.</b>


6.6.3. Test Result

**802.11b**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	2399.99	-41.79	Pass
802.11b	DSSS	QPSK	2	2462	2483.50	-59.21	Pass

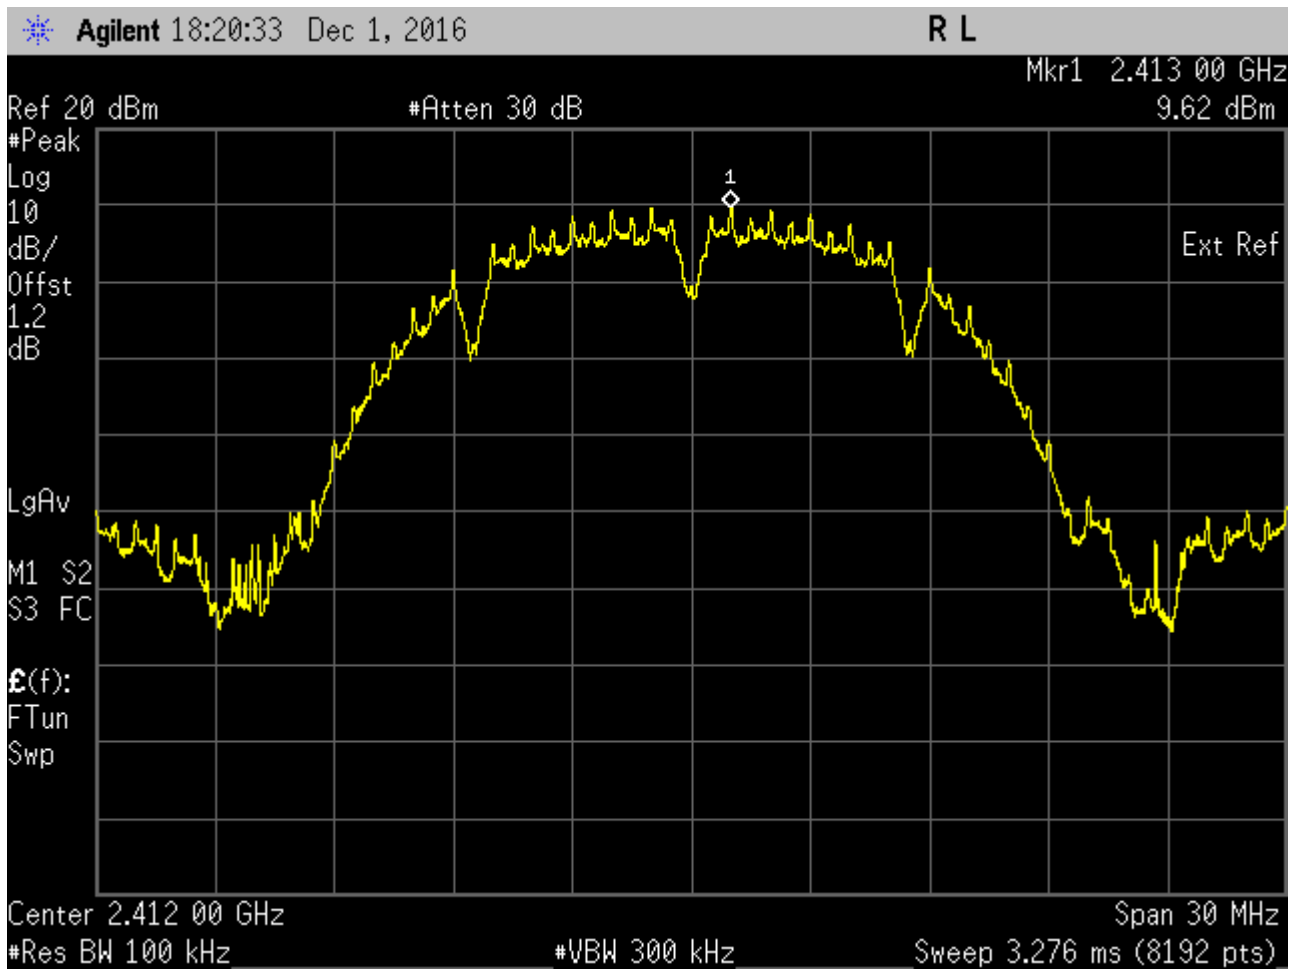


**Band Edge. 802.11b Frequency 2412 MHz Reference Level**

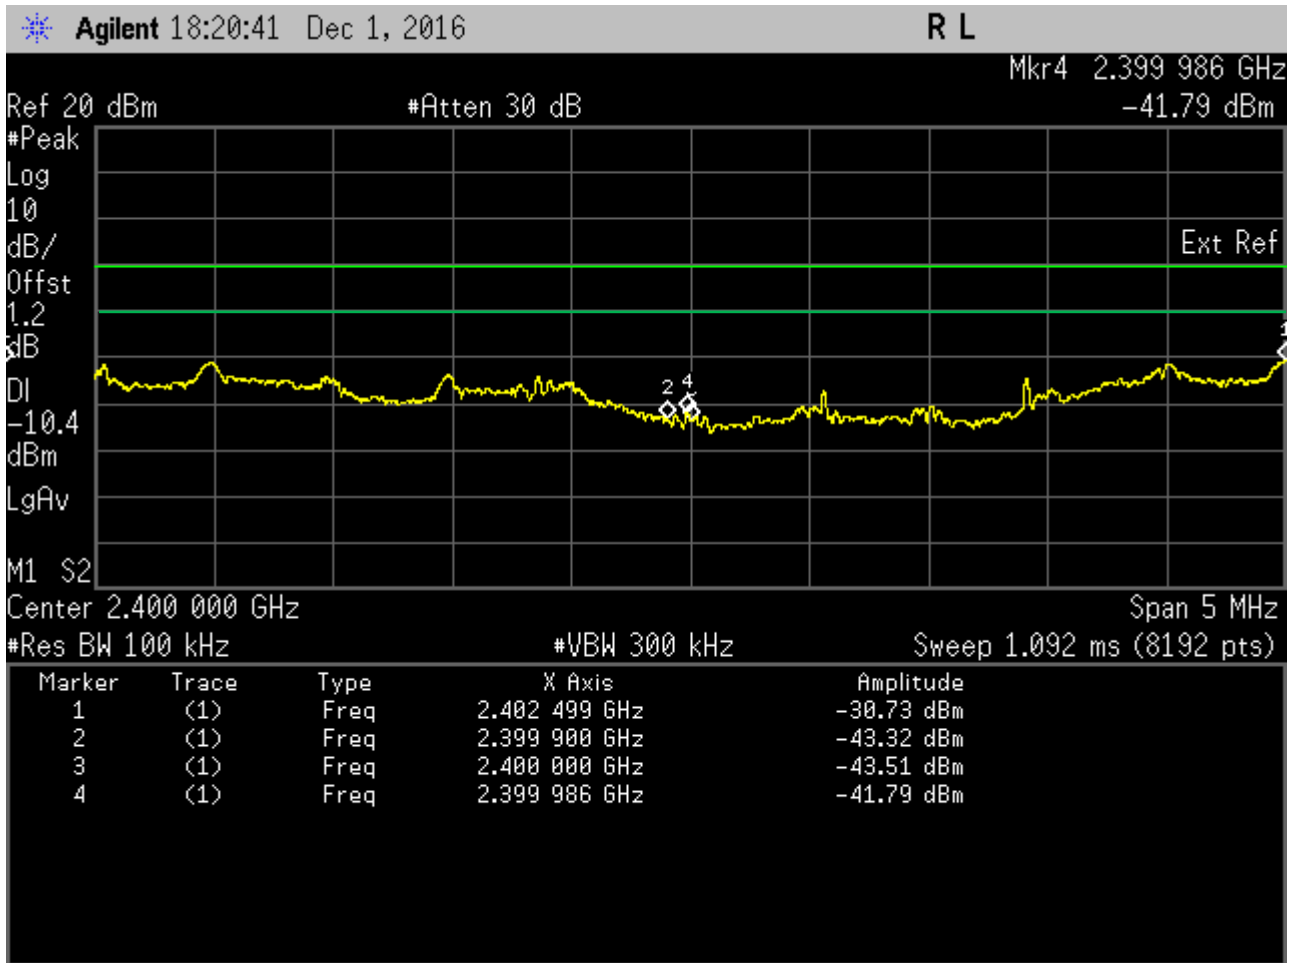

Band Edge. 802.11b Frequency 2412 MHz Band Edge

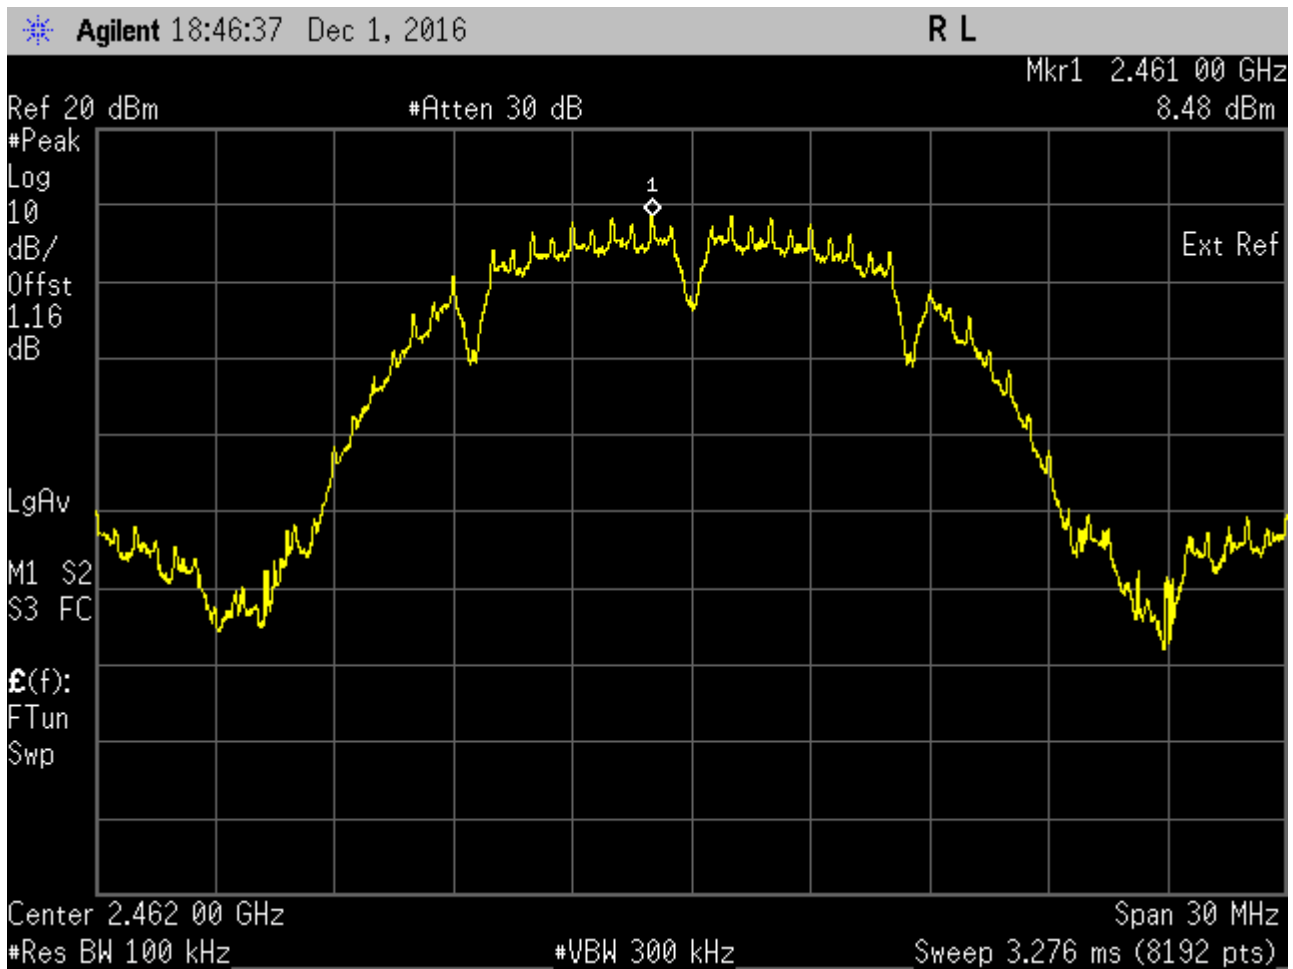


**Band Edge. 802.11b Frequency 2462 MHz Reference Level**

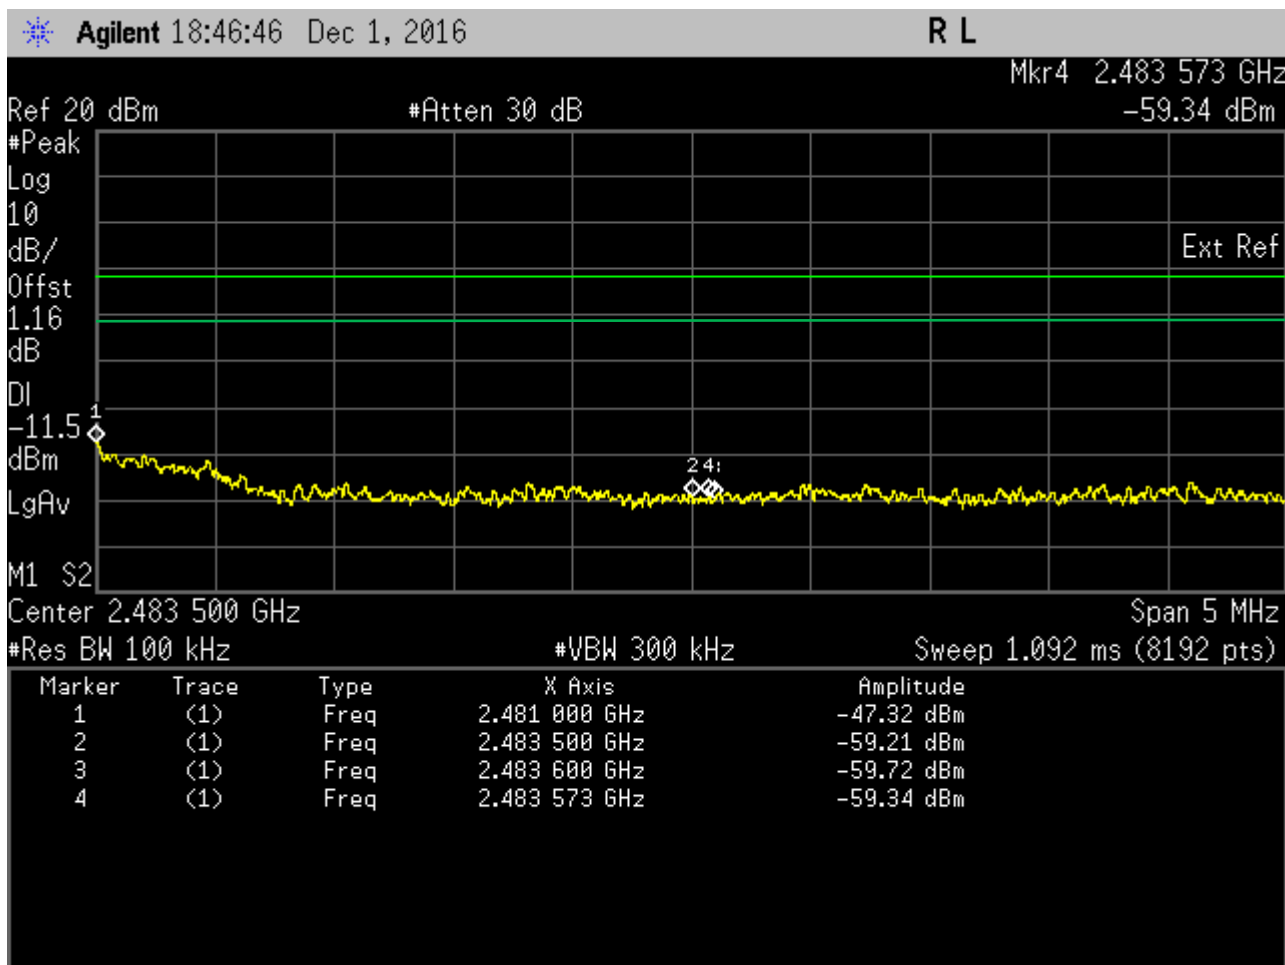


Band Edge. 802.11b Frequency 2462 MHz Band Edge

**802.11g**

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	2399.96	-49.90	Pass
802.11g	OFDM	BPSK	6	2462	2483.60	-60.18	Pass

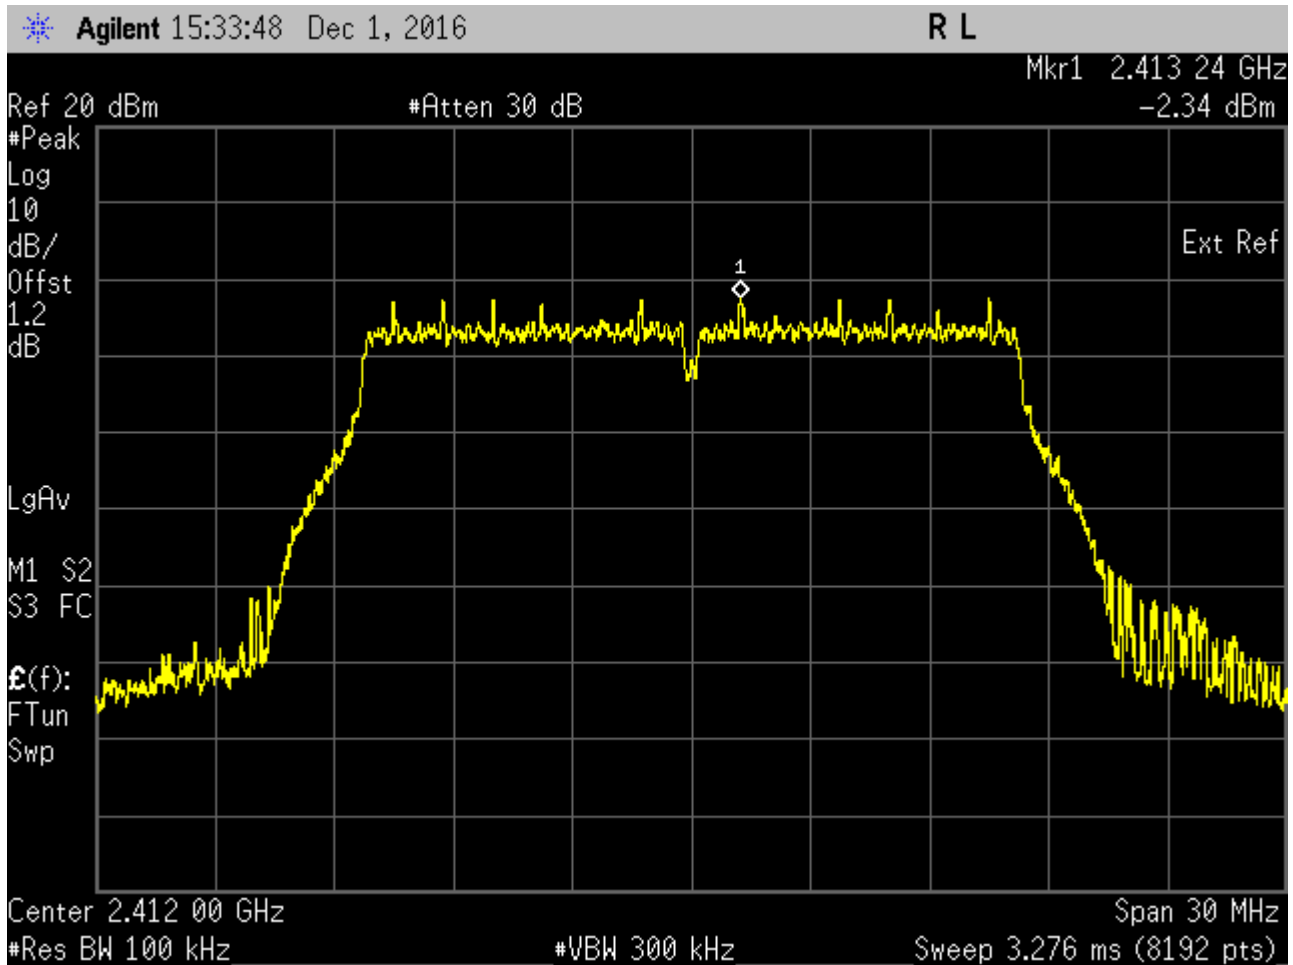


**Band Edge. 802.11g Frequency 2412 MHz Reference Level**

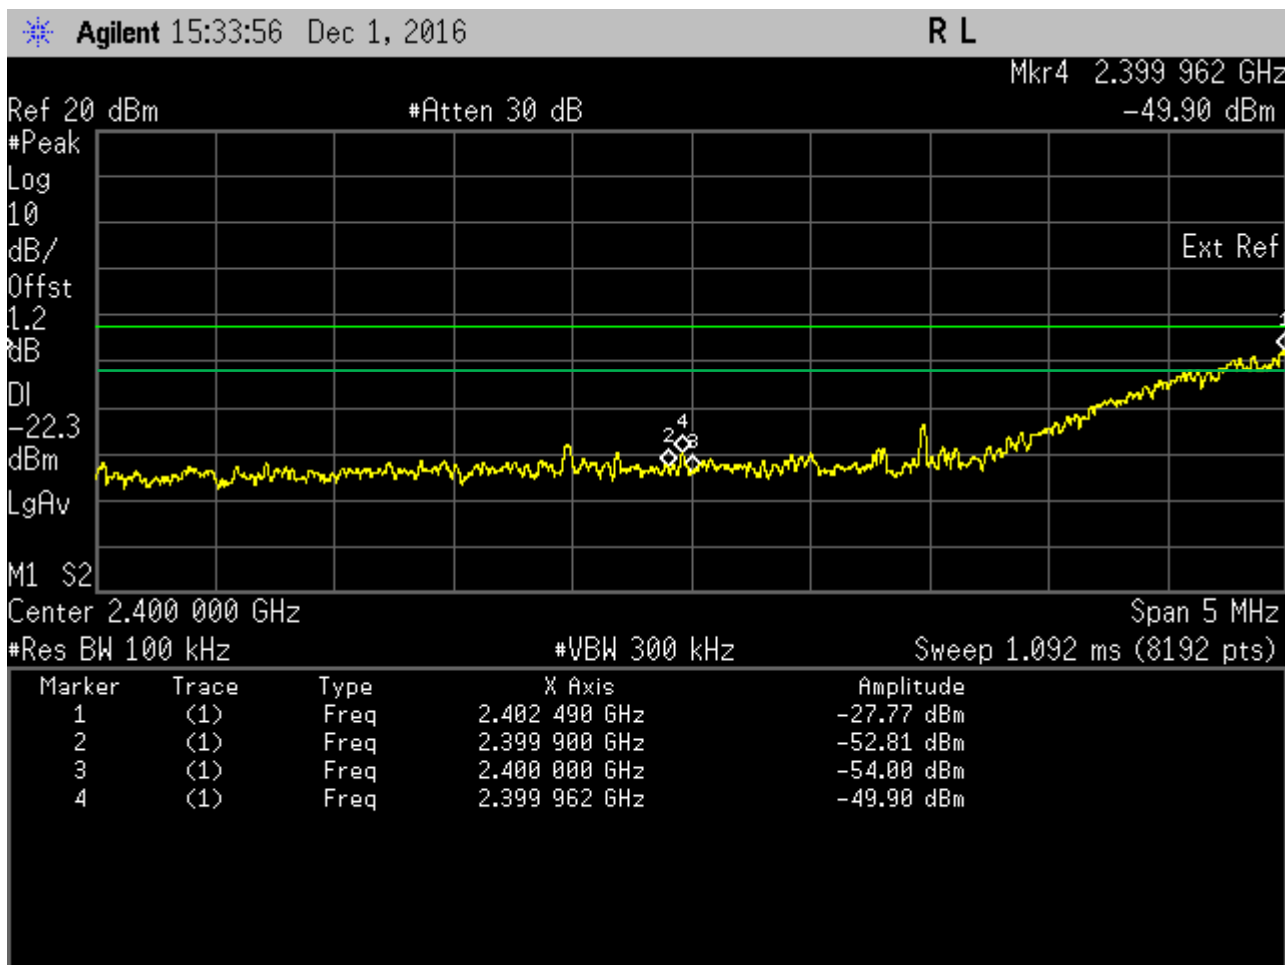


Band Edge. 802.11g Frequency 2412 MHz Band Edge



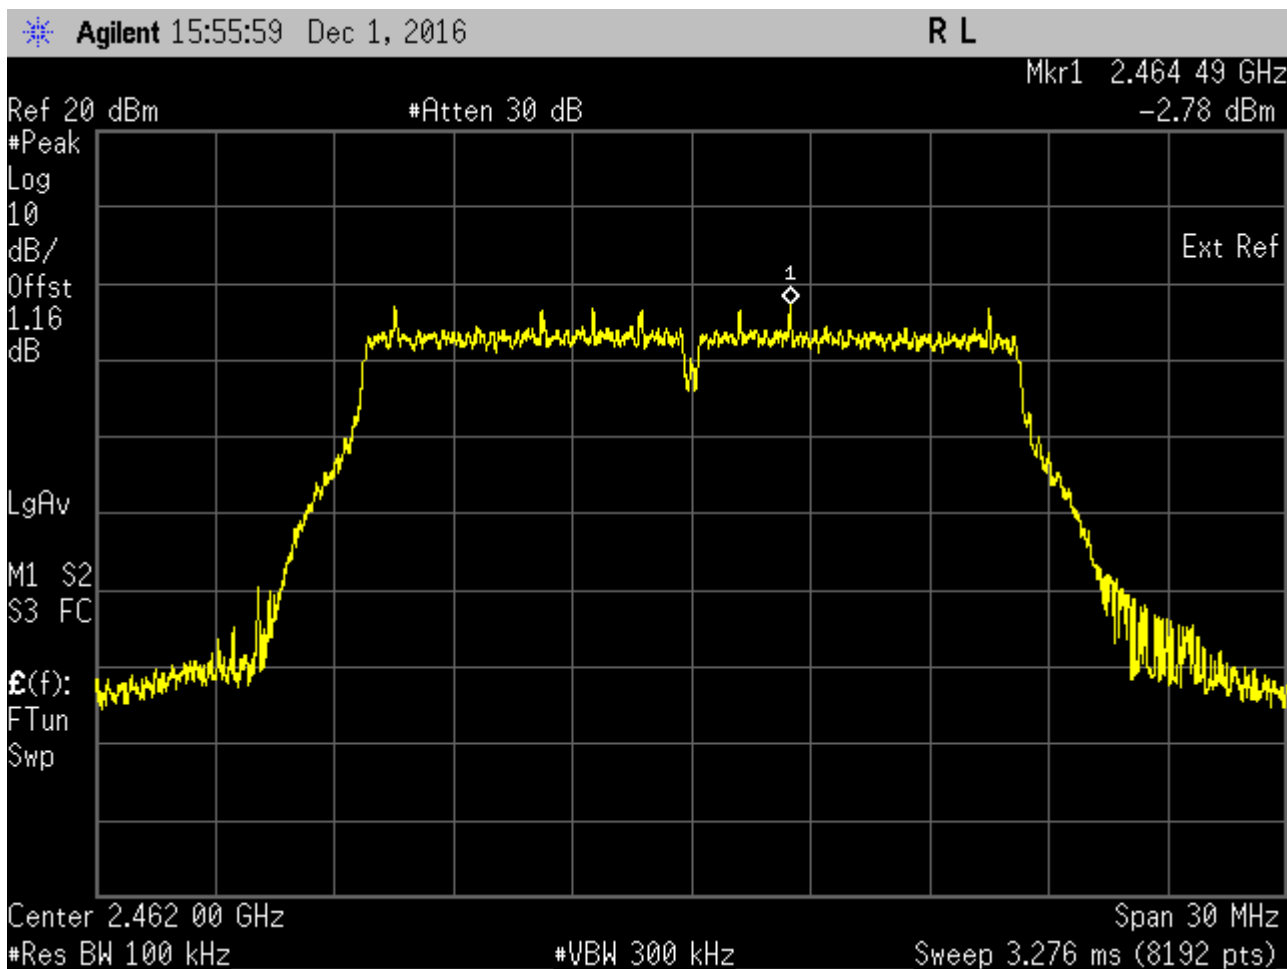


**Band Edge. 802.11g Frequency 2462 MHz Reference Level**

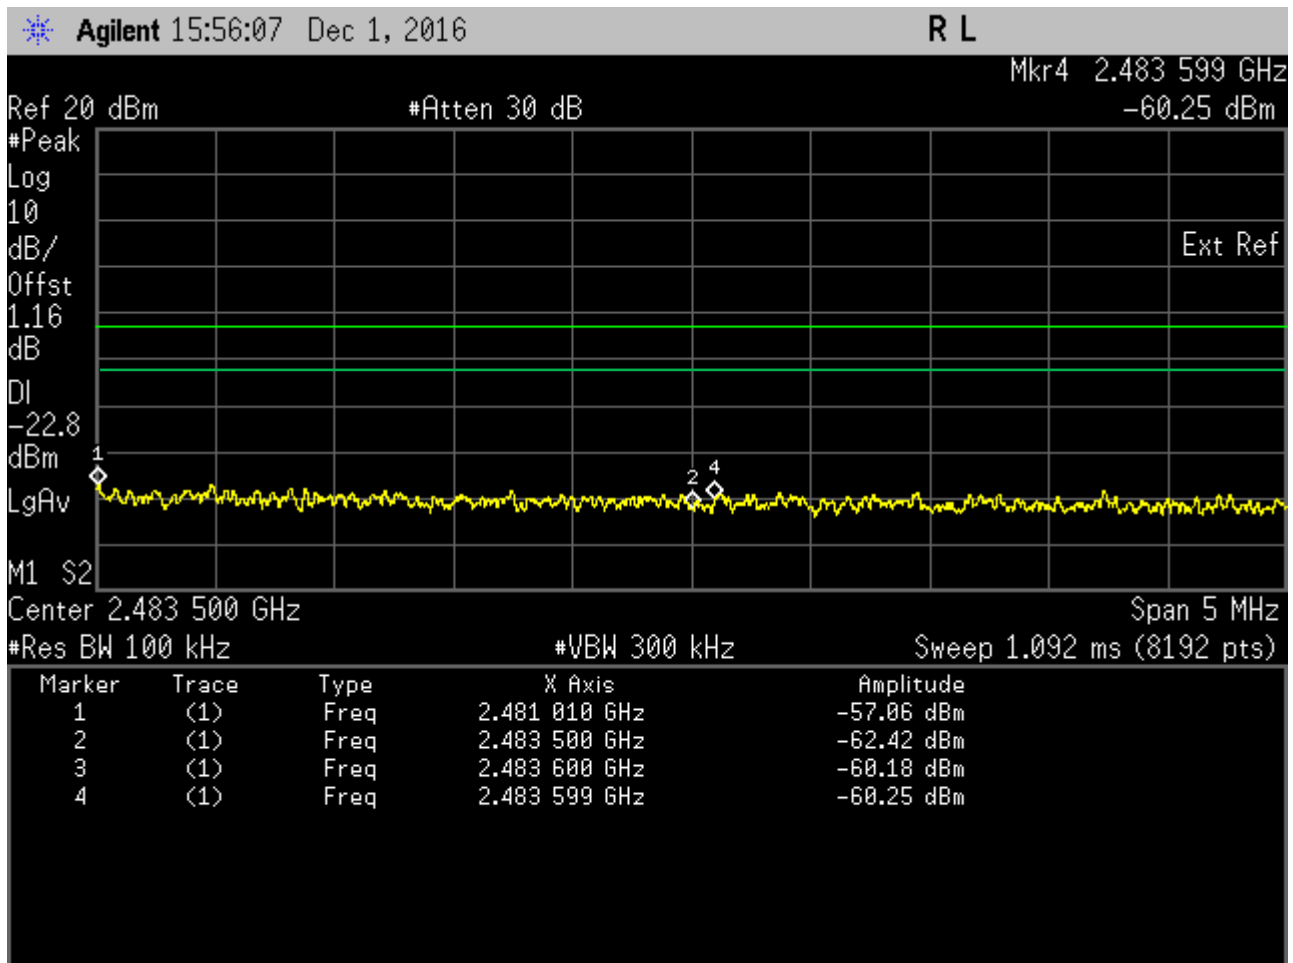


**Band Edge. 802.11g Frequency 2462 MHz Band Edge**

**802.11n (HT20)**


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	2399.90	-50.29	Pass
802.11n	OFDM	BPSK	6.5	2462	2483.51	-56.41	Pass

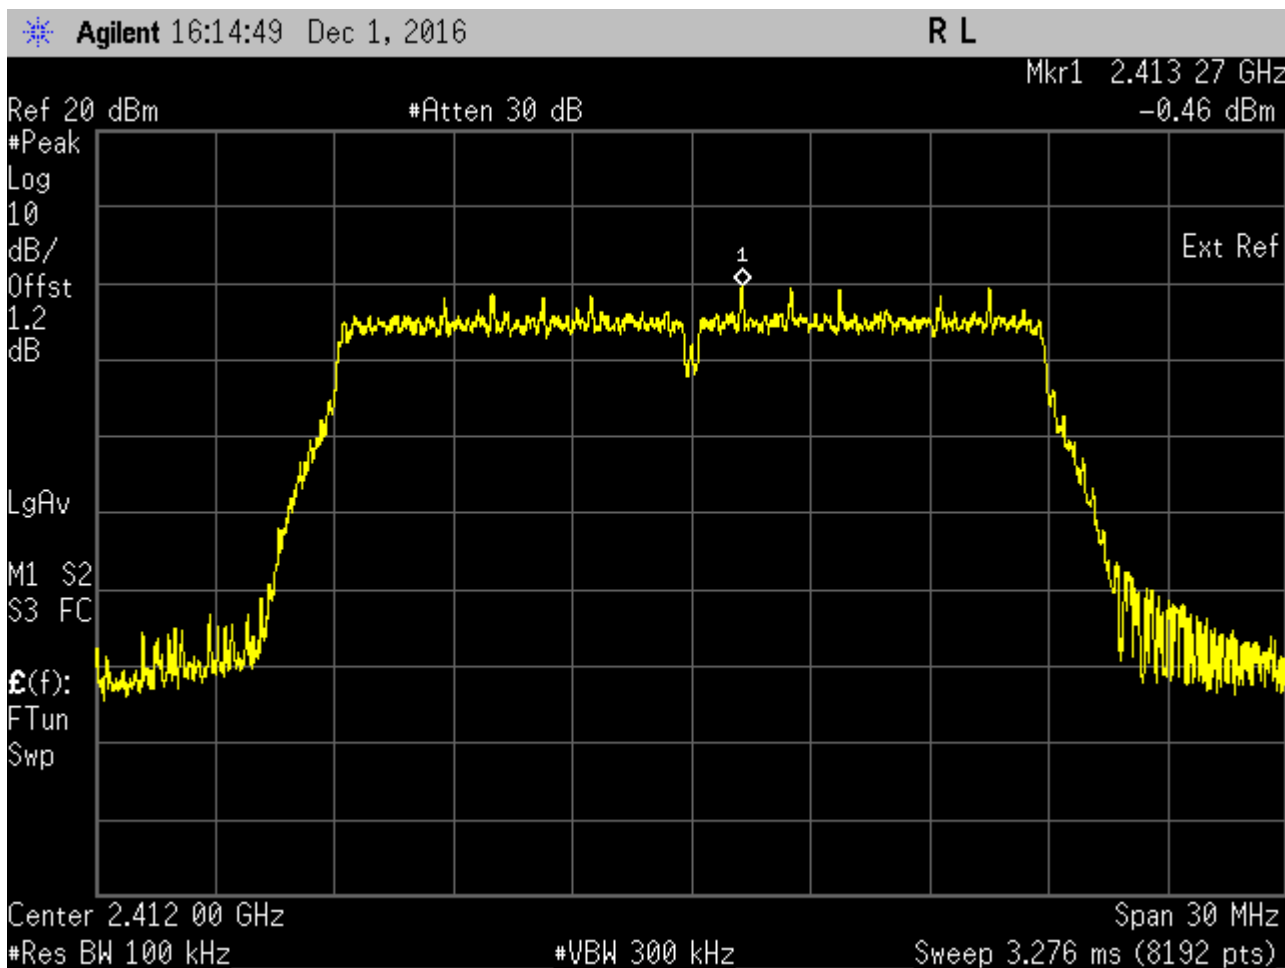


**Band Edge. 802.11n (HT20) Frequency 2412 MHz Reference Level**

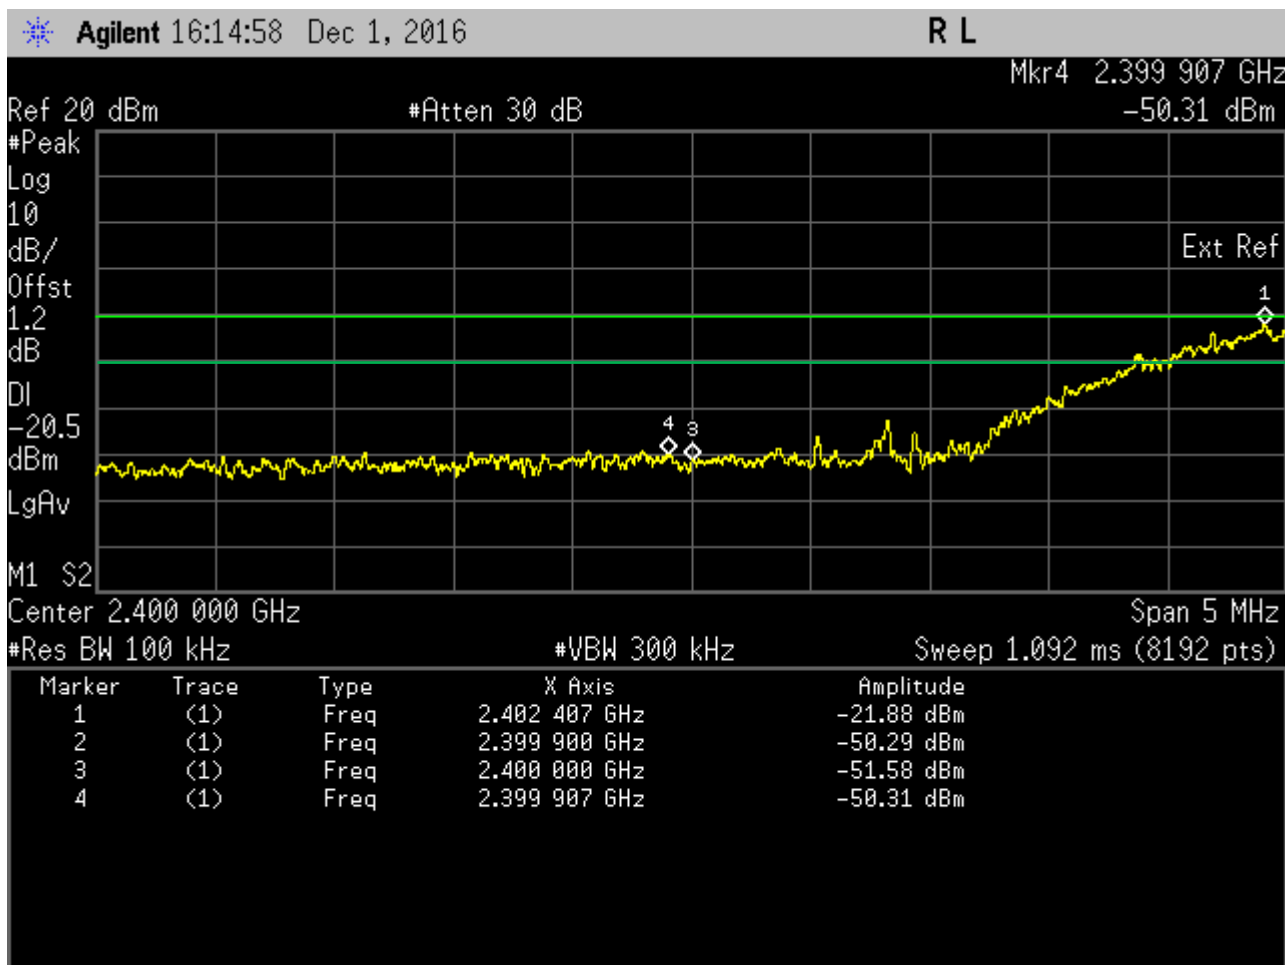

Band Edge. 802.11n (HT20) Frequency 2412 MHz Band Edge

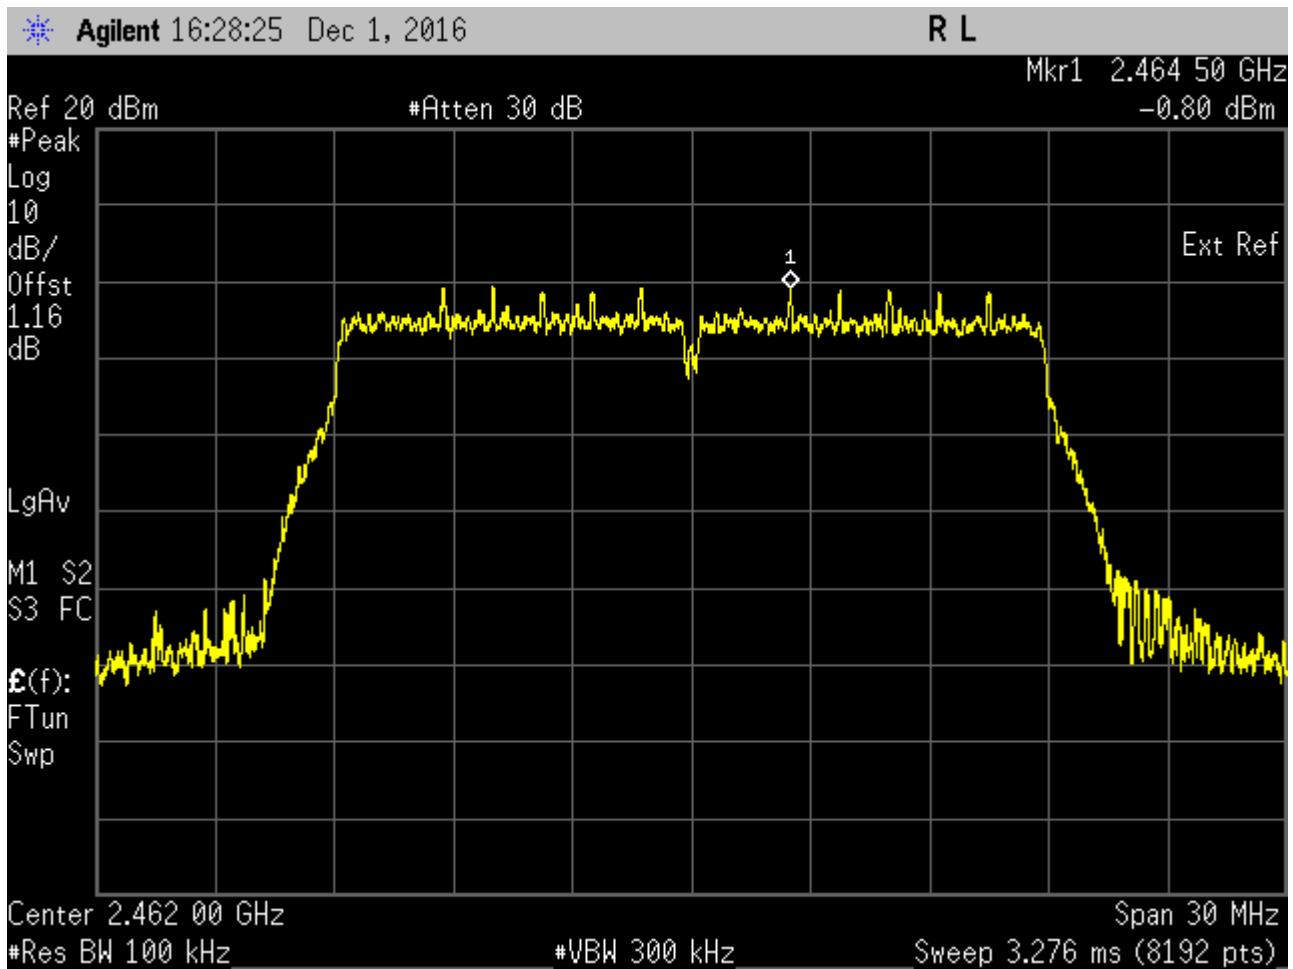


**Band Edge. 802.11n (HT20) Frequency 2462 MHz Reference Level**

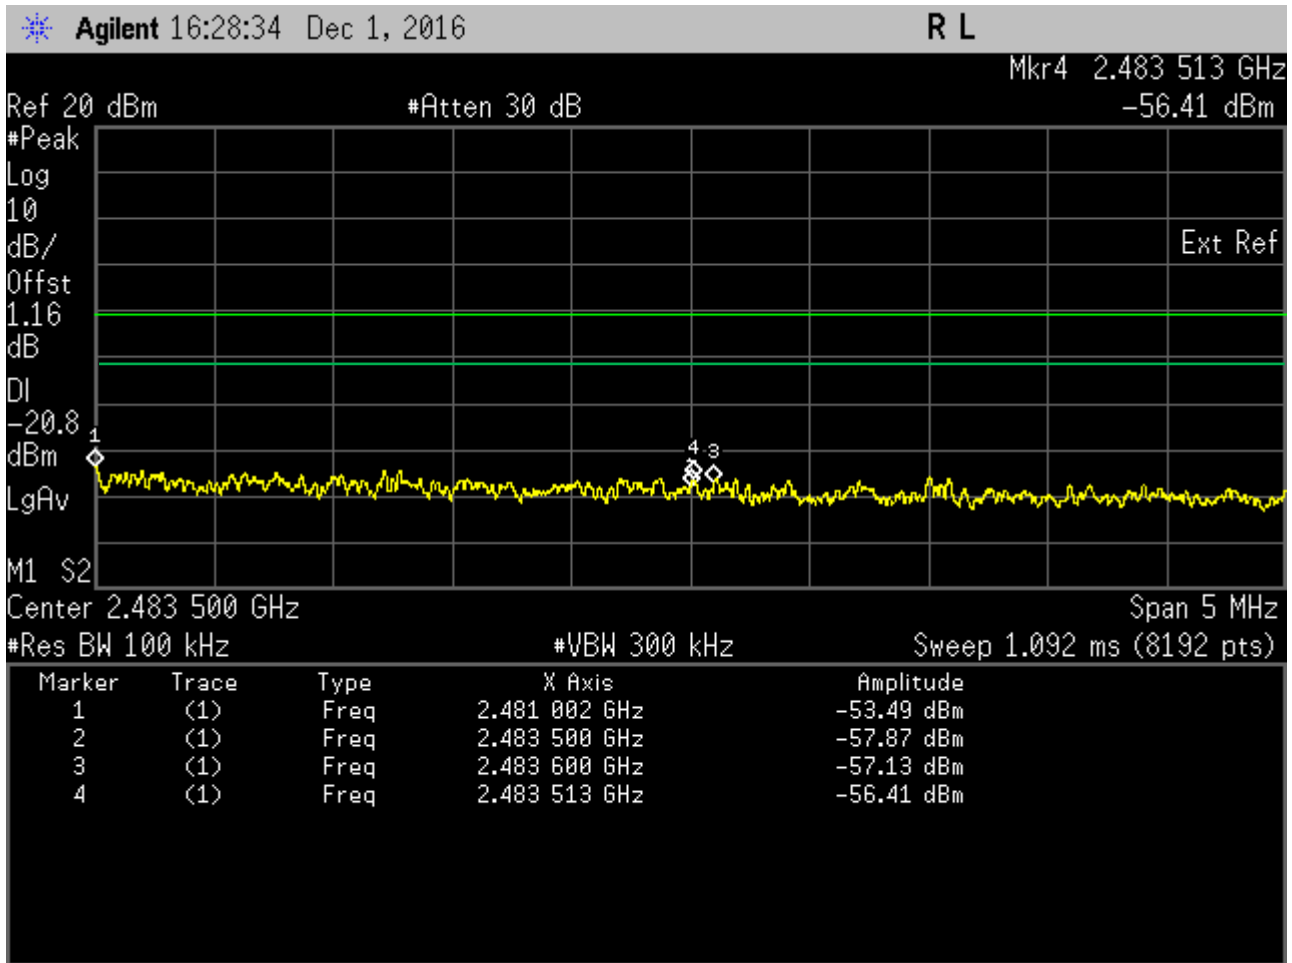

Band Edge. 802.11n (HT20) Frequency 2462 MHz Band Edge

## 6.7. Radiated Emission within restricted Bands

### 6.7.1. Test Setup

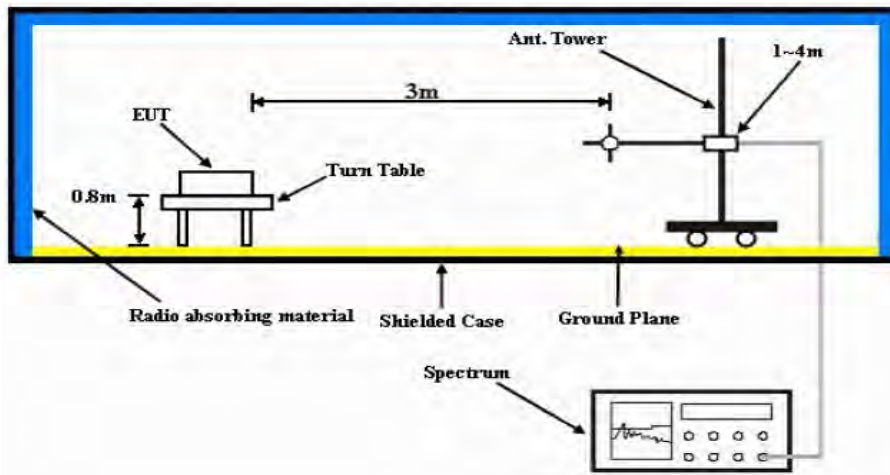

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

**6.7.2. Test Limits:**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


**NOTE:**

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.






**Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot**

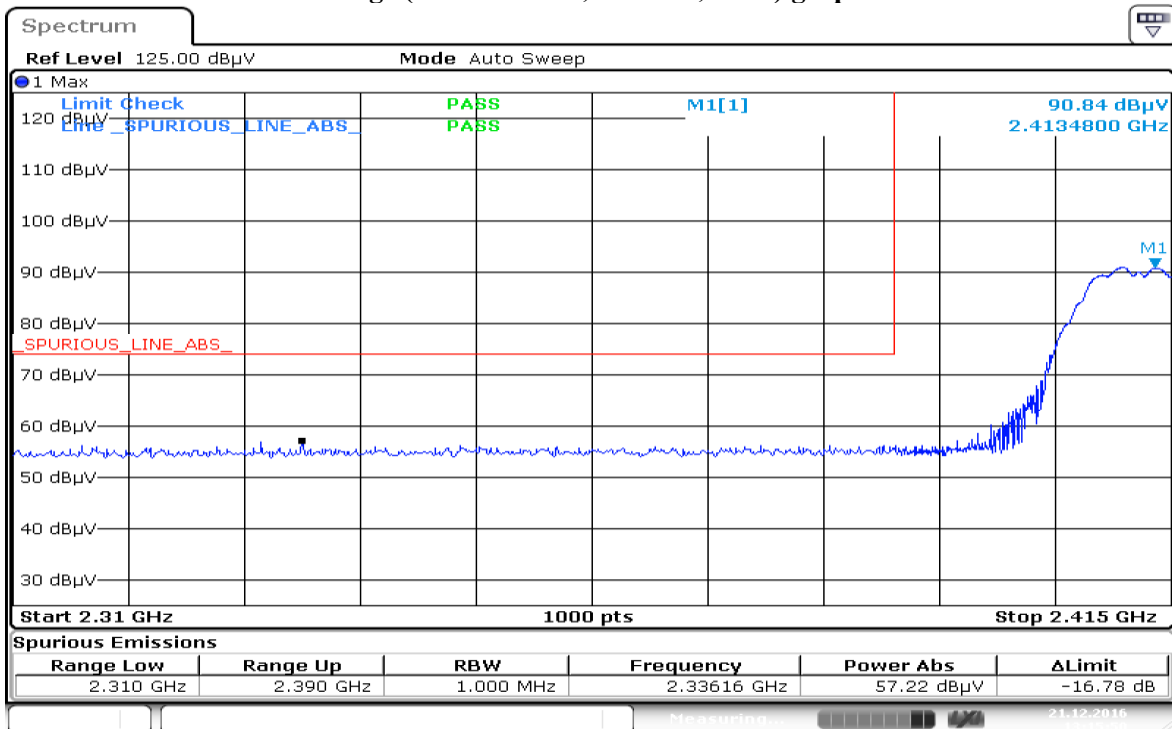


Date: 21.DEC.2016 13:15:50

**Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot**

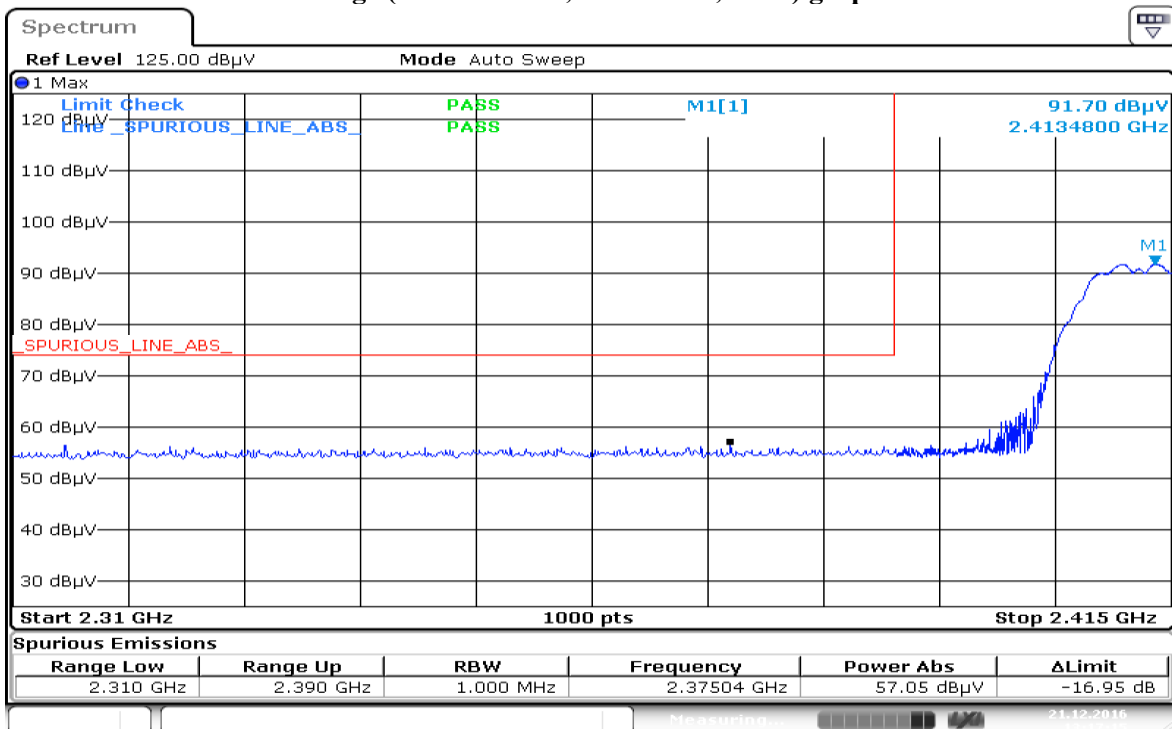


Date: 21.DEC.2016 13:17:15

**Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot**

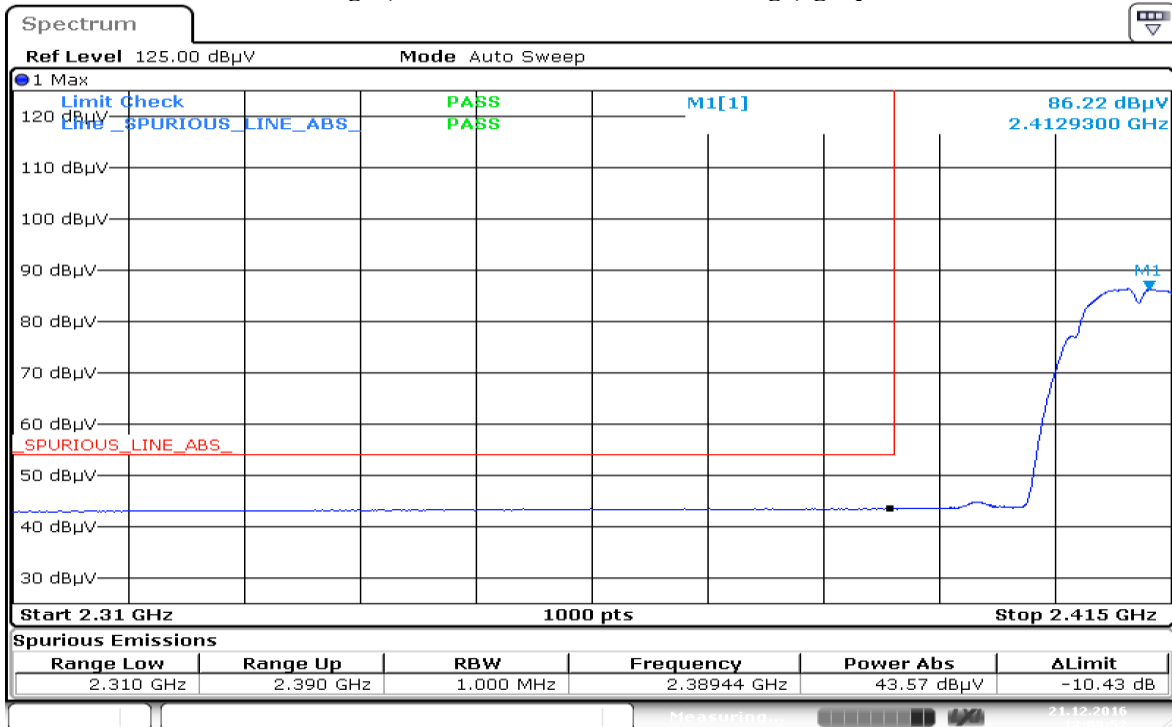

Date: 21.DEC.2016 13:09:53

**Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot**

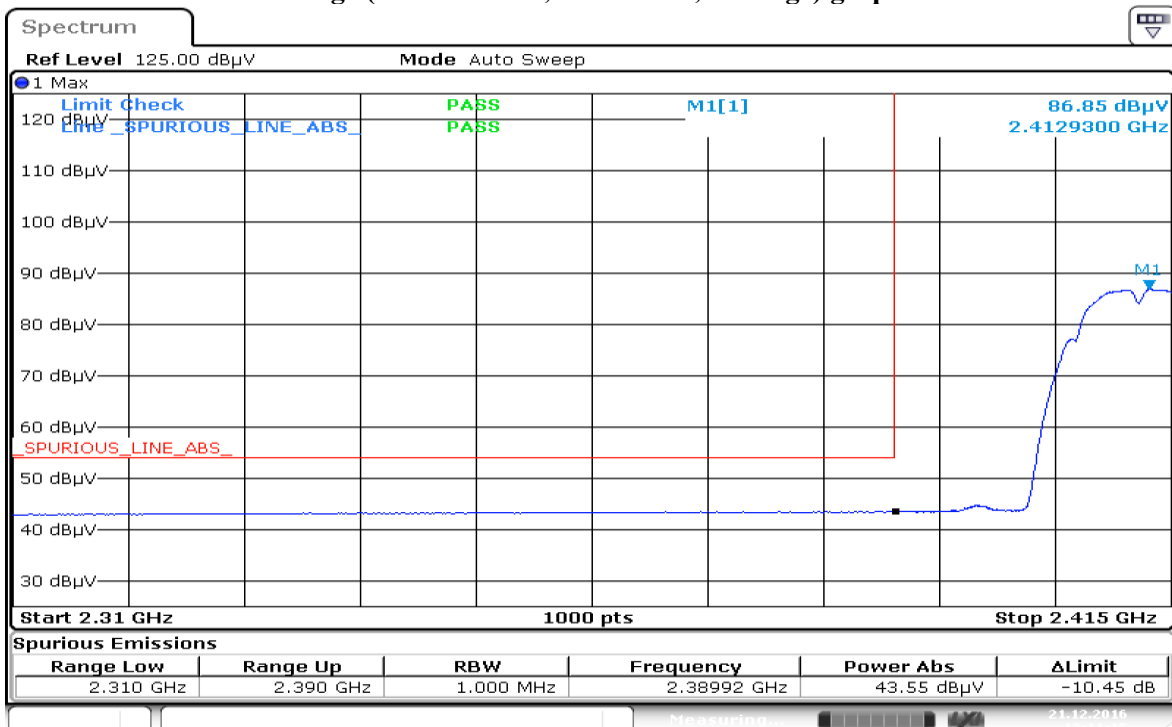

Date: 21.DEC.2016 13:11:15

**Test: WIFI SAC Restricted Band Edge**  
**Model Number: H92QDH9PW7AN**      **S/N: 837TSX0063**      **EMC SR ID#: 05756-EMC-00019**  
**Battery: PMNN4493A**      **Accessory: NA**  
**Test Channel: High**      **Test Frequency: 2462.00 MHz**      **Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (802.11b)**

**Restricted Band Edge (High Channel) tabular data**


<b>Vertical Radiated Emission Result</b>										
Spur Freq (MHz)	Spur level QPK (dB $\mu$ V/m)	Spur level PK (dB $\mu$ V/m)	Spur level AV (dB $\mu$ V/m)	Limit QPK (dB $\mu$ V/m)	Limit PK (dB $\mu$ V/m)	Limit AV (dB $\mu$ V/m)	Margin QPK (dB $\mu$ V/m)	Margin PK (dB $\mu$ V/m)	Margin AV (dB $\mu$ V/m)	Carrier PK Power (dB $\mu$ V/m)
<b>Horizontal Radiated Emission Result</b>										

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

**Temperature (degC): 23.4**      **Humidity (%): 71.6**  
**Test Performed by: Nazrin&Qawiman**      **Test Date: Tue, Nov 29, 2016**  
**System MU: 5.01dB**      **Duty Cycle (%): > 98%**


**Note: No spurs were found in this test.**

**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

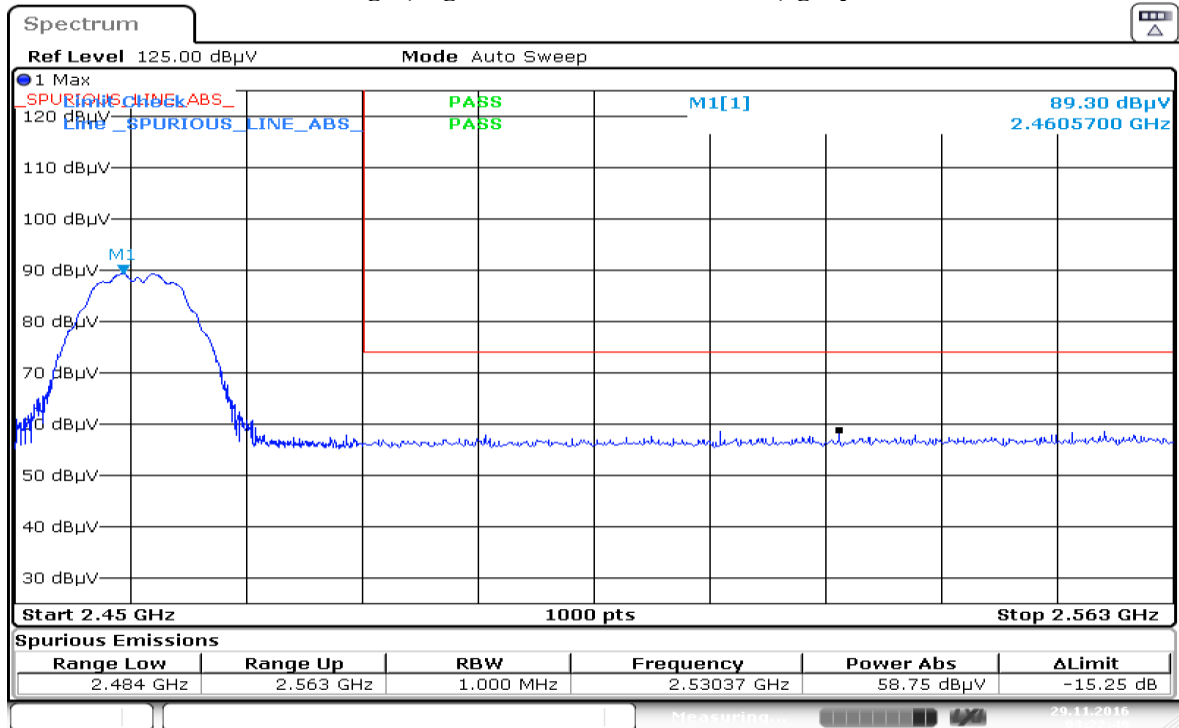


Date: 29.NOV.2016 03:22:49

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

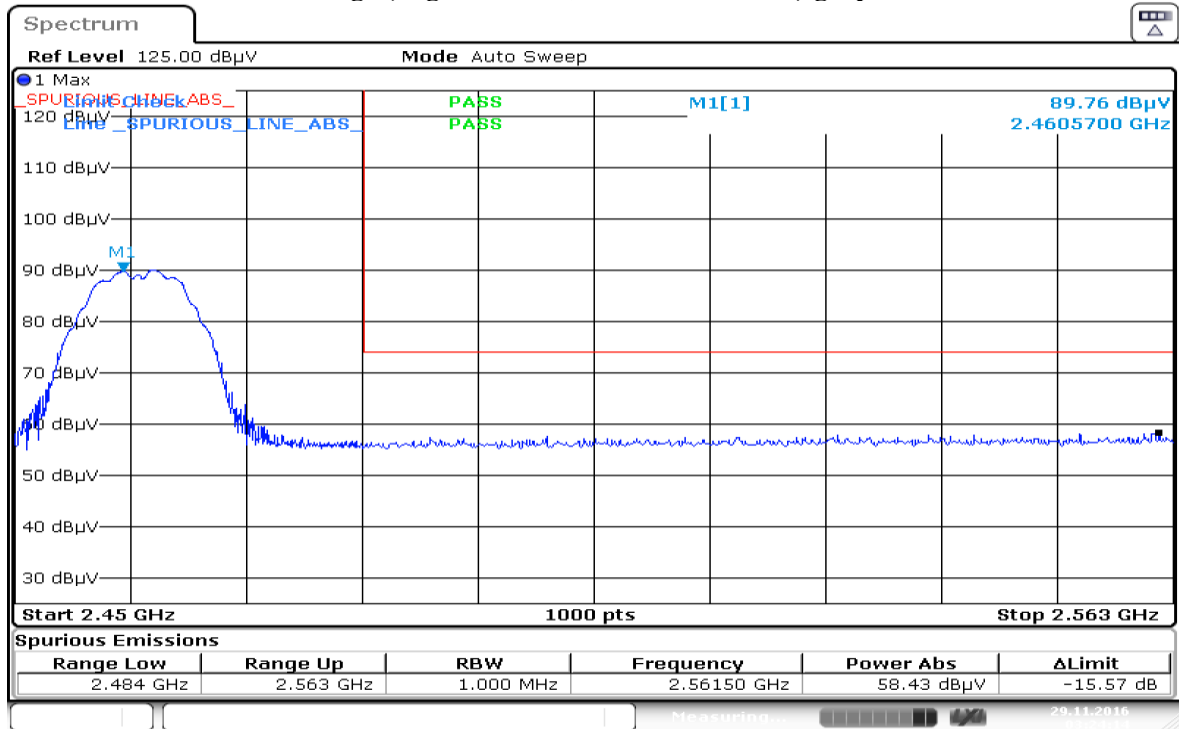


Date: 29.NOV.2016 03:24:14

**Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot**

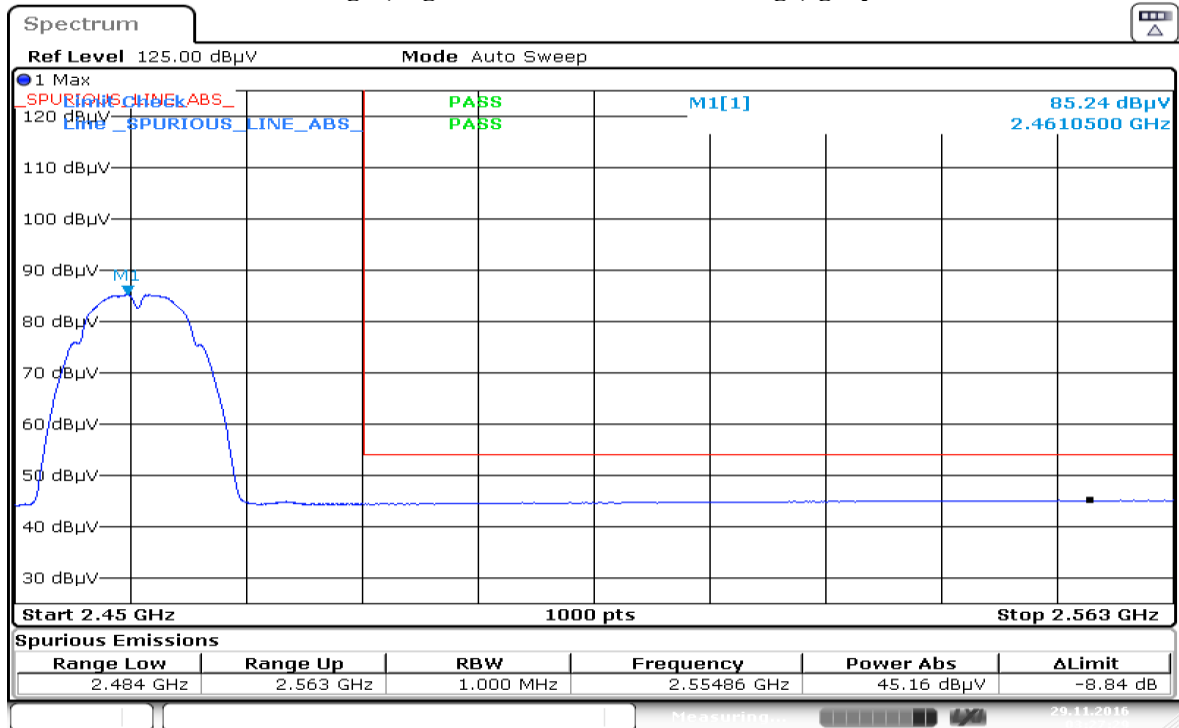

Date: 29.NOV.2016 03:27:29

**Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot**

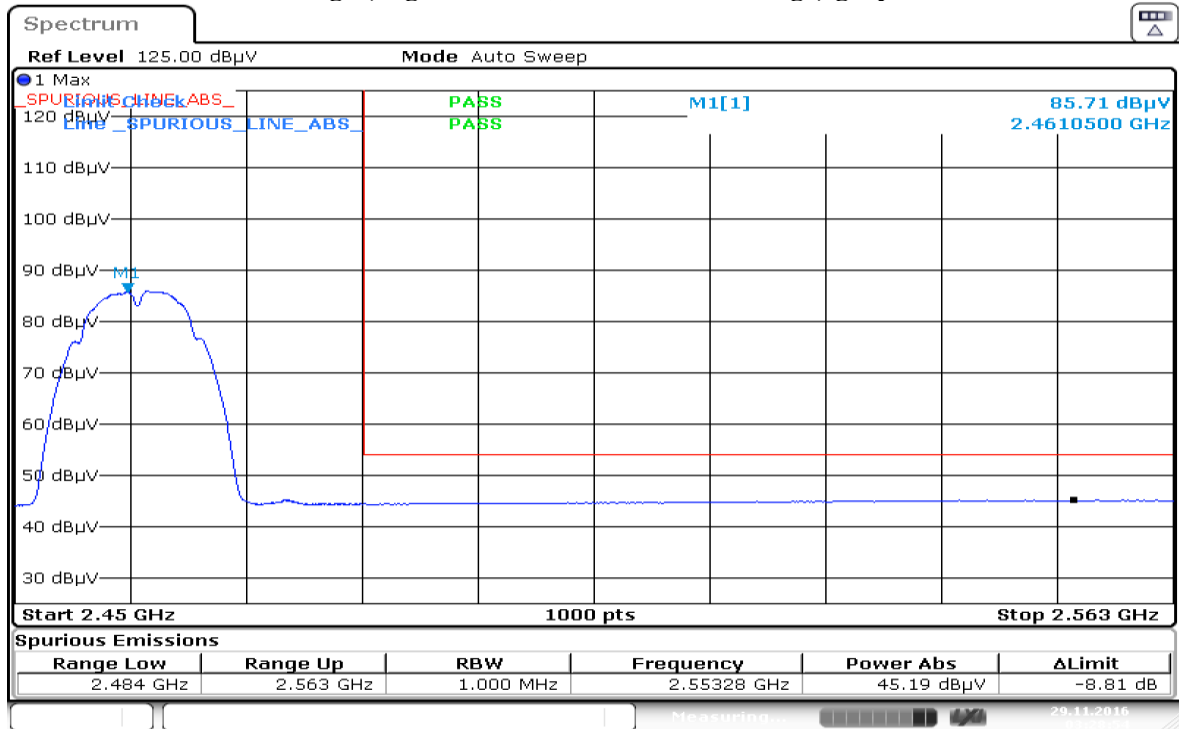

Date: 29.NOV.2016 03:28:54

**802.11g**

**Test: WIFI SAC Restricted Band Edge**  
**Model Number: H92QDH9PW7AN**                  **S/N: 837TSX0063**                  **EMC SR ID#: 05756-EMC-00019**  
**Battery: PMNN4493A**                  **Accessory: NA**  
**Test Channel: Low**                  **Test Frequency: 2412.00 MHz**                  **Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (802.11g)**

**Restricted Band Edge (Low Channel) tabular data**


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
Horizontal Radiated Emission Result										

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

<b>Temperature (degC): 23.4</b>	<b>Humidity (%): 71.6</b>
<b>Test Performed by: Nazrin&amp;Qawiman</b>	<b>Test Date: Tue, Nov 29, 2016</b>
<b>System MU: 5.01dB</b>	<b>Duty Cycle (%): &gt; 98%</b>


**Note: No spurs were found in this test.**

**Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot**

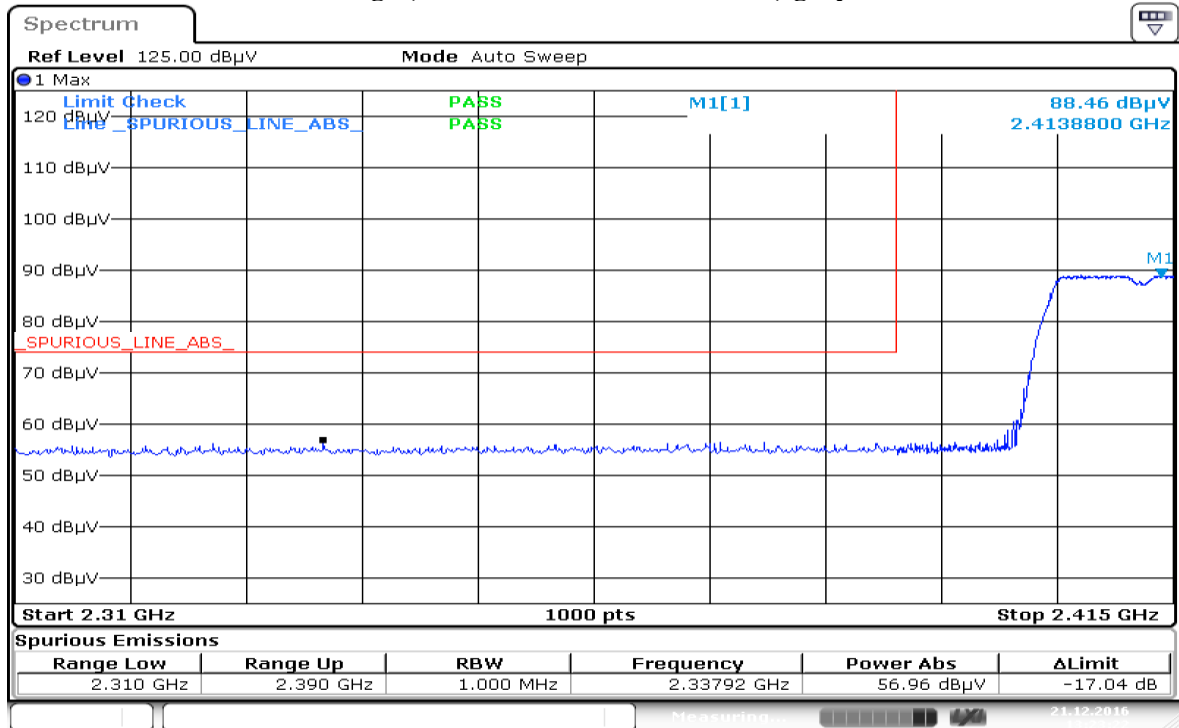

Date: 21.DEC.2016 13:23:23


**Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot**

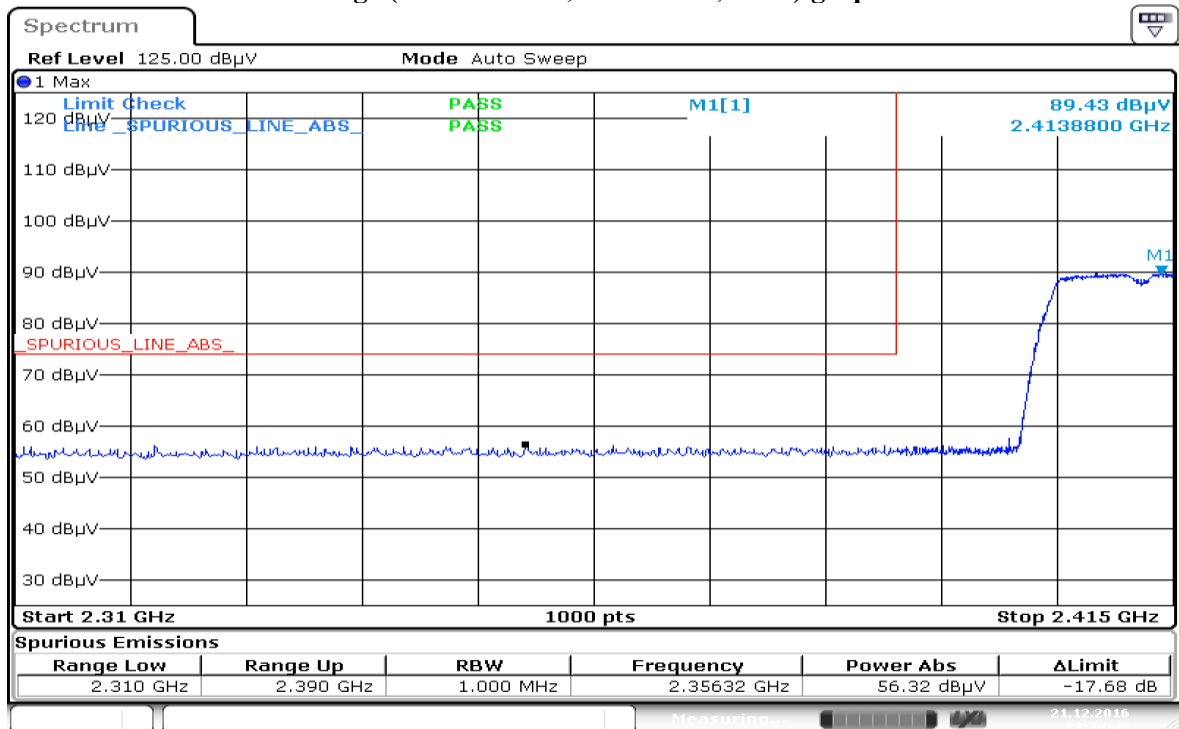

Date: 21.DEC.2016 13:24:45




**Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot**

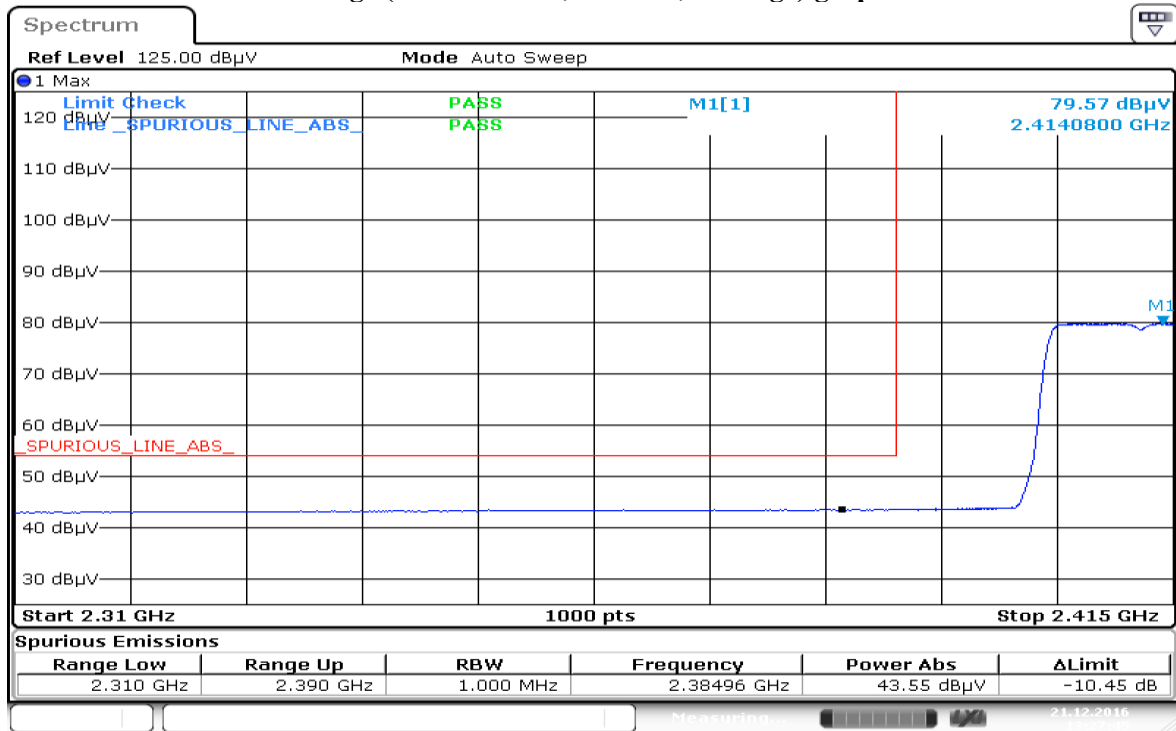

Date: 21.DEC.2016 13:27:45

**Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot**

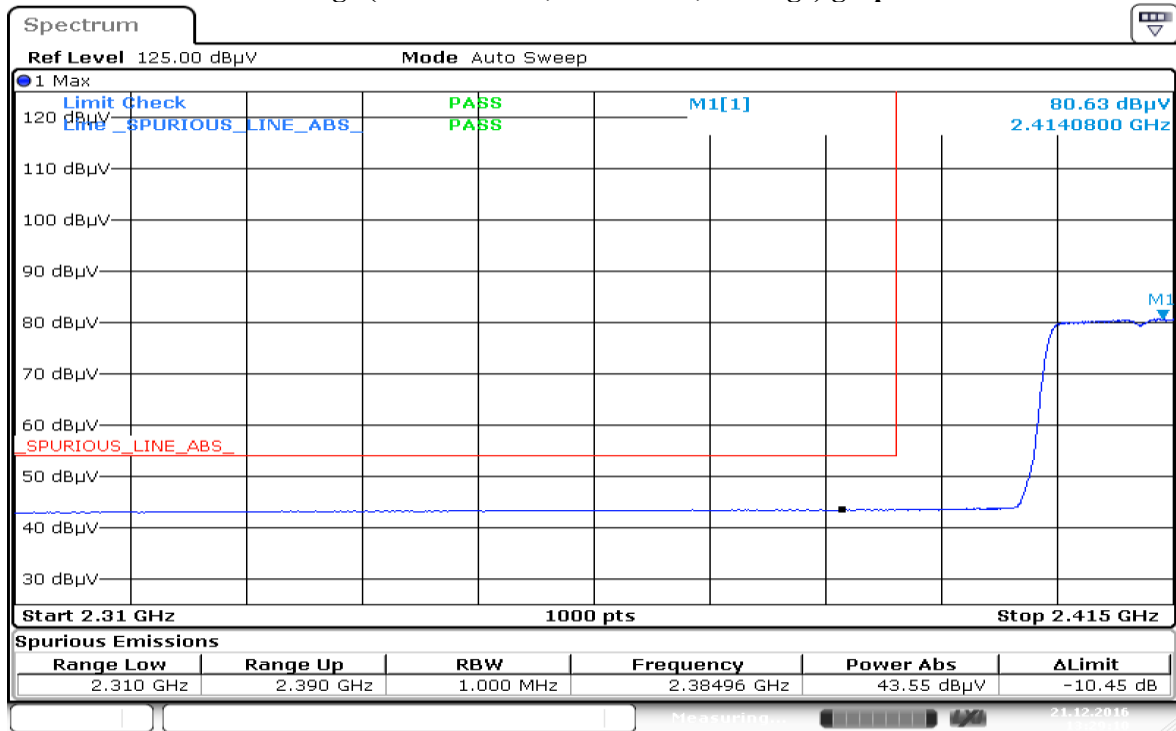

Date: 21.DEC.2016 13:29:10

**Test: WIFI SAC Restricted Band Edge**  
 Model Number: H92QDH9PW7AN S/N: 837TSX0063 EMC SR ID#: 05756-EMC-00019  
 Battery: PMNN4493A Accessory: NA  
 Test Channel: High Test Frequency: 2462.00 MHz Test Standard: ANSI C63.10-2013  
 Worst Case Plane: X-Plane (802.11g)

**Restricted Band Edge (High Channel) tabular data**

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB $\mu$ V/m)	Spur level PK (dB $\mu$ V/m)	Spur level AV (dB $\mu$ V/m)	Limit QPK (dB $\mu$ V/m)	Limit PK (dB $\mu$ V/m)	Limit AV (dB $\mu$ V/m)	Margin QPK (dB $\mu$ V/m)	Margin PK (dB $\mu$ V/m)	Margin AV (dB $\mu$ V/m)	Carrier PK Power (dB $\mu$ V/m)
Horizontal Radiated Emission Result										


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4  
 Test Performed by: Nazrin&Qawiman  
 System MU: 5.01dB

Humidity (%): 71.6  
 Test Date: Tue, Nov 29, 2016  
 Duty Cycle (%): > 98%


Note: No spurs were found in this test.

**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

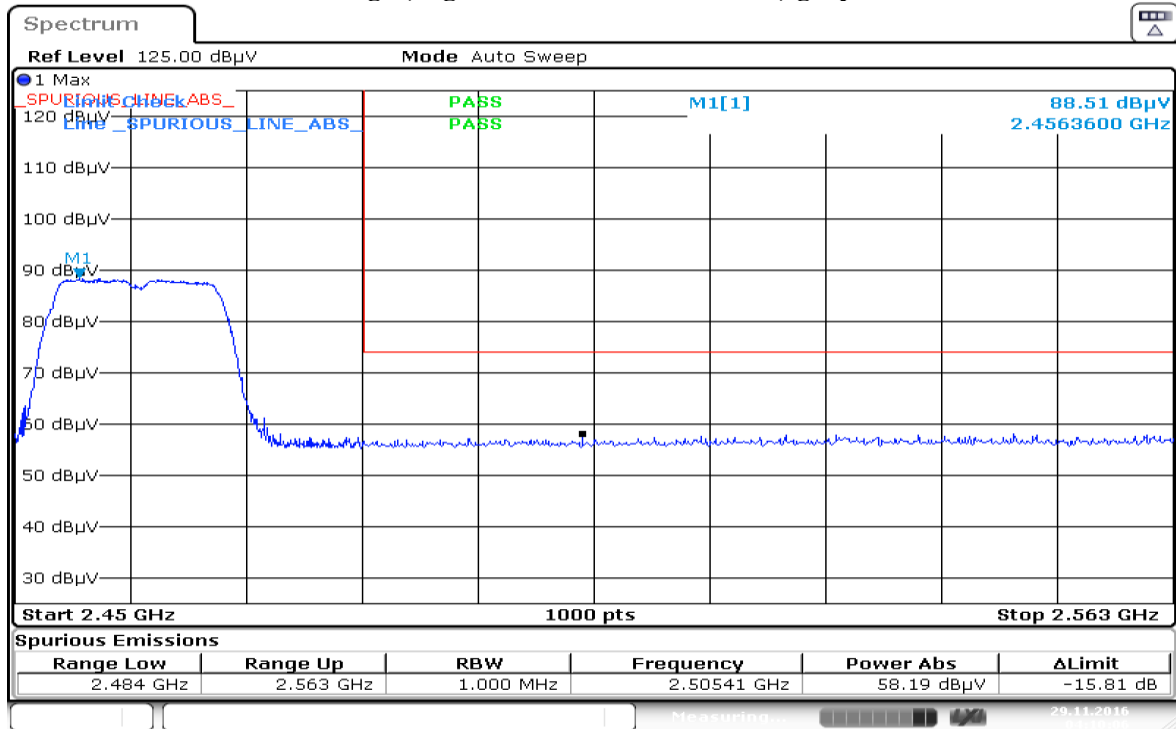


Date: 29.NOV.2016 04:10:07

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

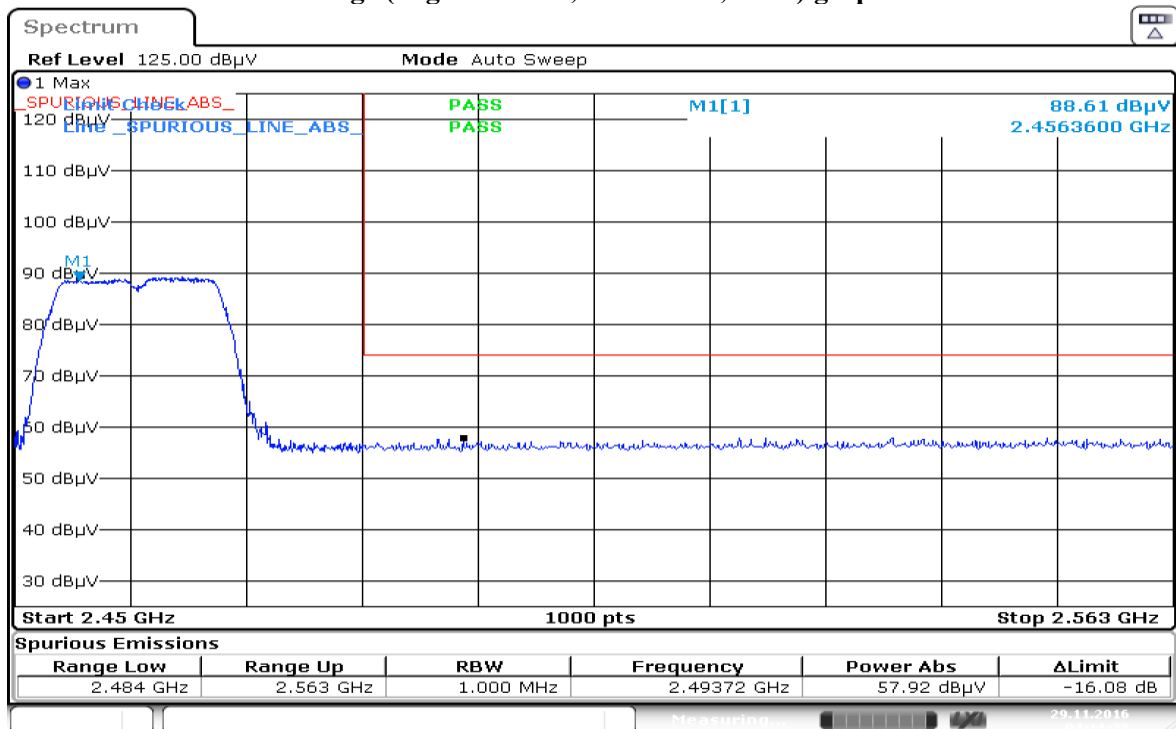


Date: 29.NOV.2016 04:11:29

**Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot**

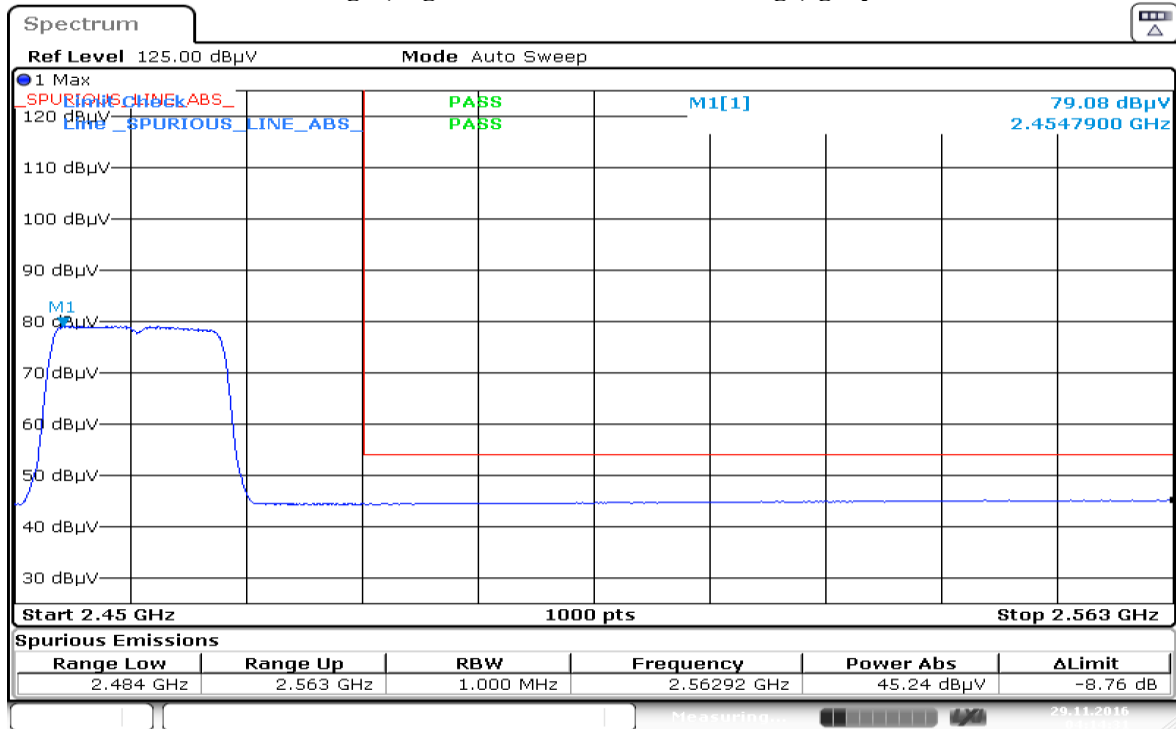

Date: 29.NOV.2016 04:14:32

**Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot**

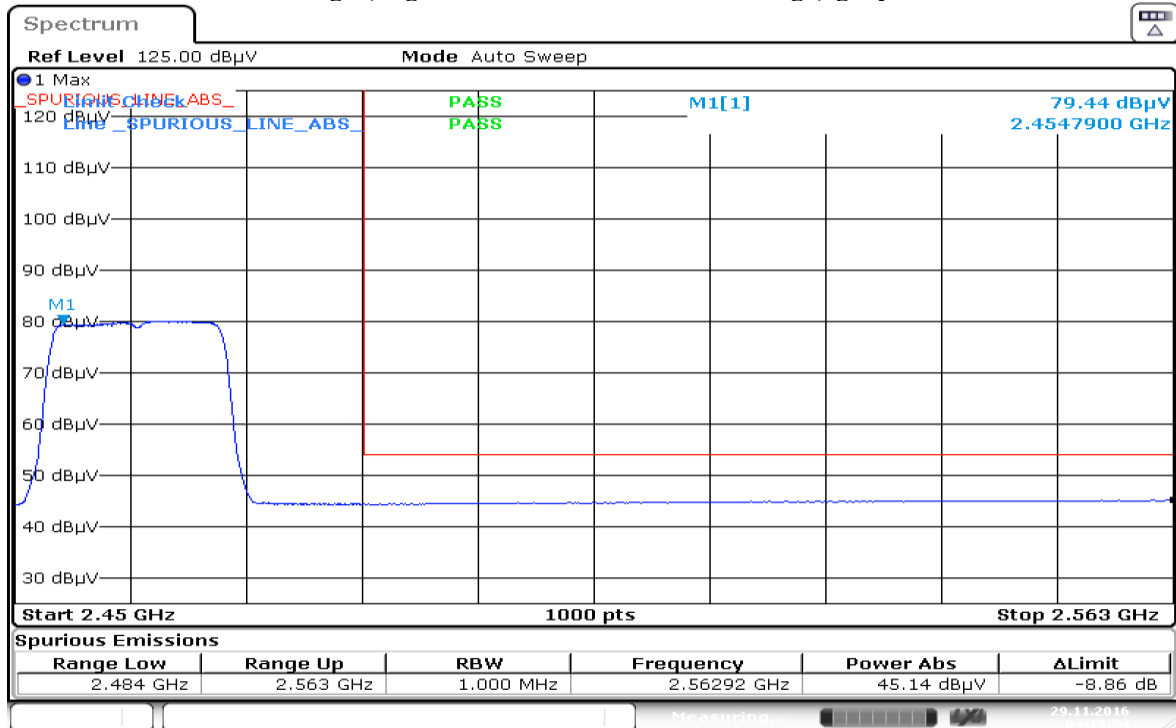

Date: 29.NOV.2016 04:15:54

**802.11n (HT20)**

Test: WIFI SAC Restricted Band Edge  
 Model Number: H92QDH9PW7AN S/N: 837TSX0063 EMC SR ID#: 05756-EMC-00019  
 Battery: PMNN4493A Accessory: NA  
 Test Channel: Low Test Frequency: 2412.00 MHz Test Standard: ANSI C63.10-2013  
 Worst Case Plane: X-Plane (802.11n)

**Restricted Band Edge (Low Channel) tabular data**

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
Horizontal Radiated Emission Result										


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4  
 Test Performed by: Nazrin&Qawiman  
 System MU: 5.01dB

Humidity (%): 71.6  
 Test Date: Tue, Nov 29, 2016  
 Duty Cycle (%): > 98%


Note: No spurs were found in this test.

**Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot**

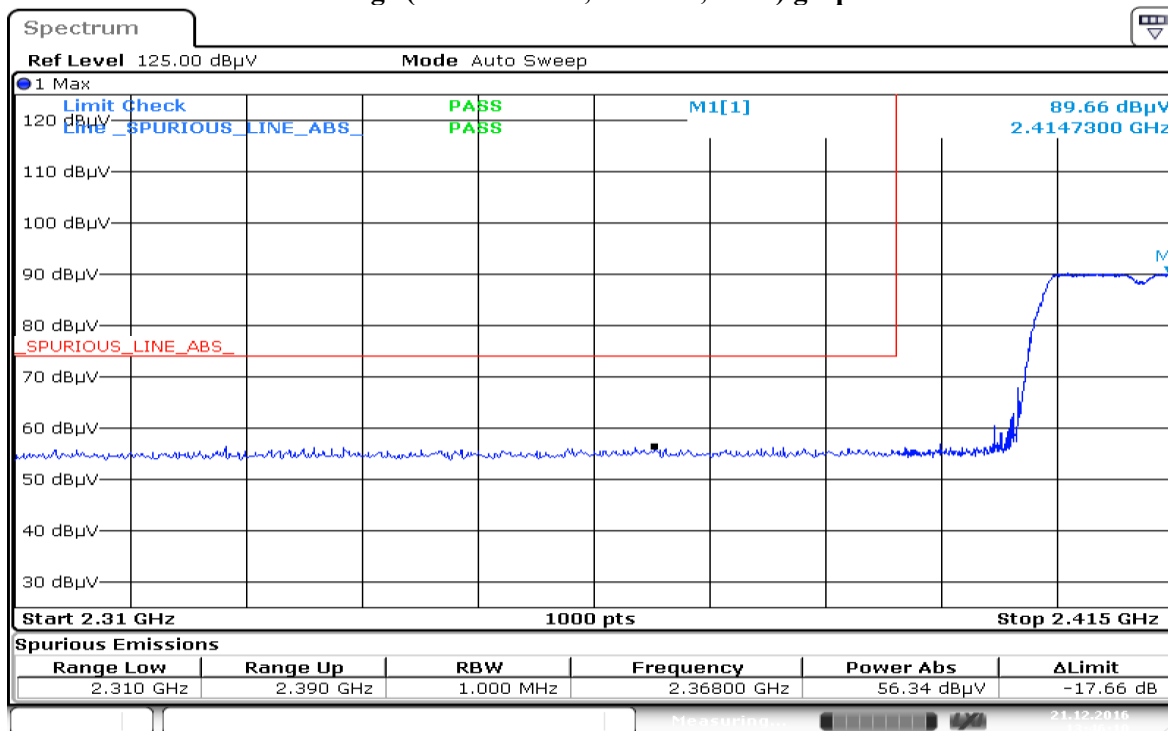


Date: 21.DEC.2016 13:46:10

**Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot**

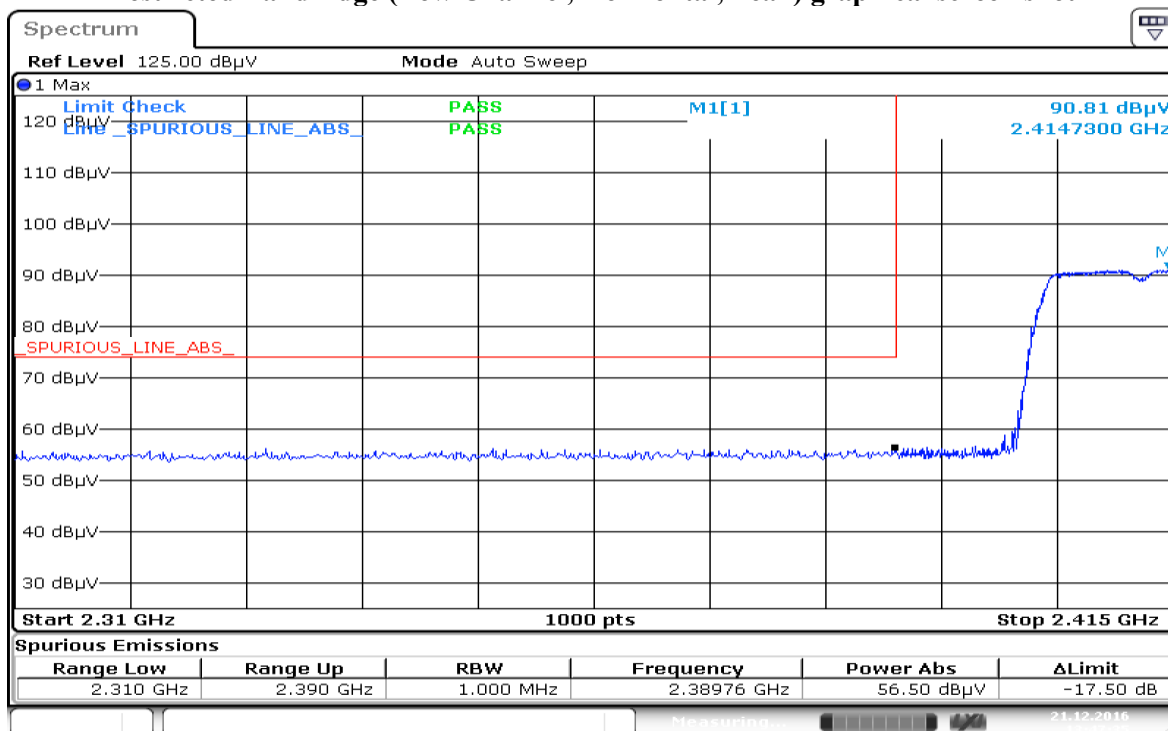


Date: 21.DEC.2016 13:47:35

**Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot**

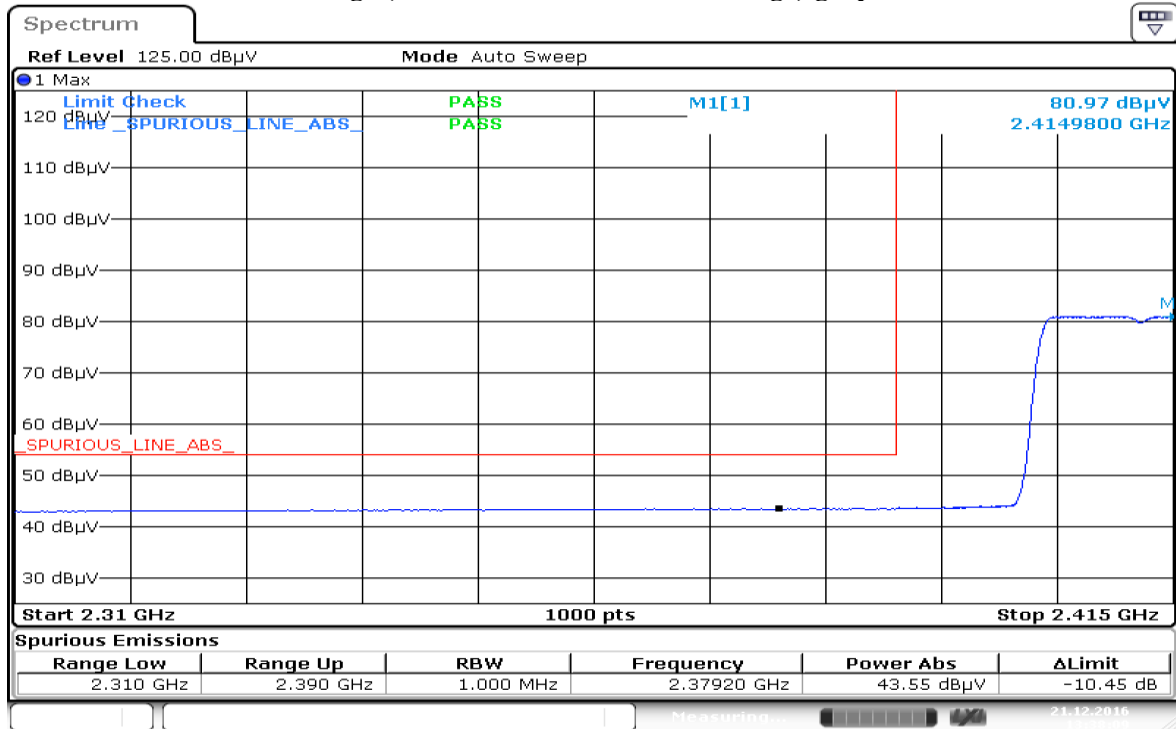

Date: 21.DEC.2016 13:38:10

**Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot**

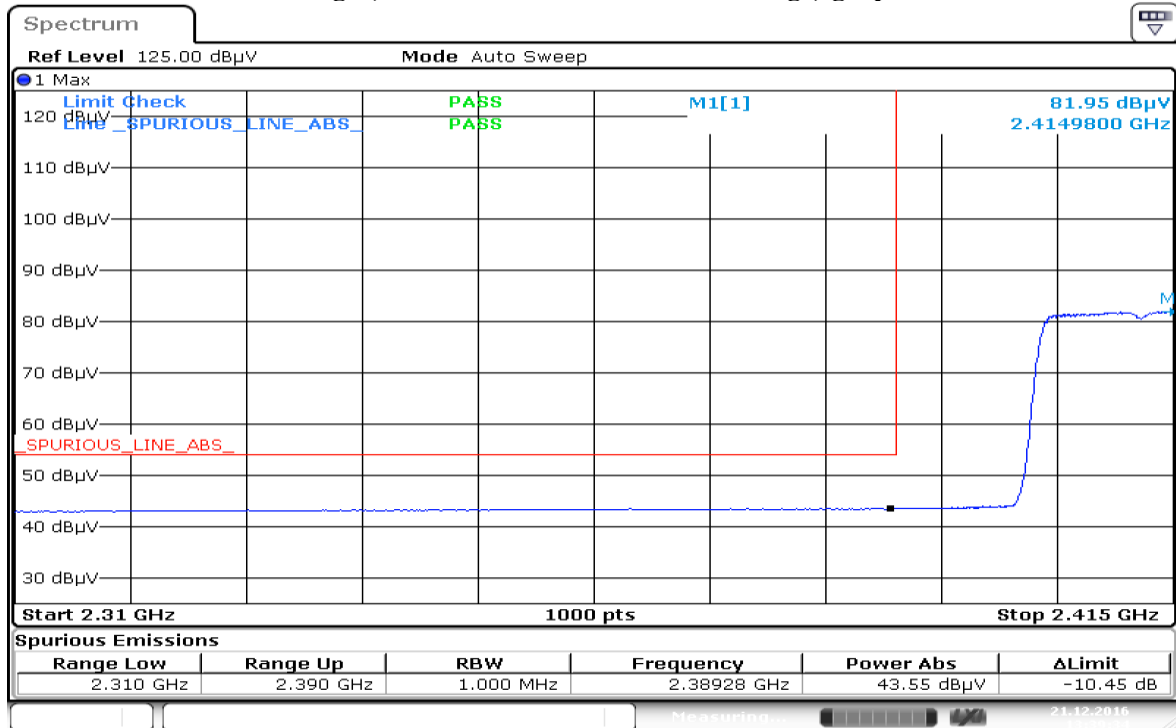


Date: 21.DEC.2016 13:39:35






**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

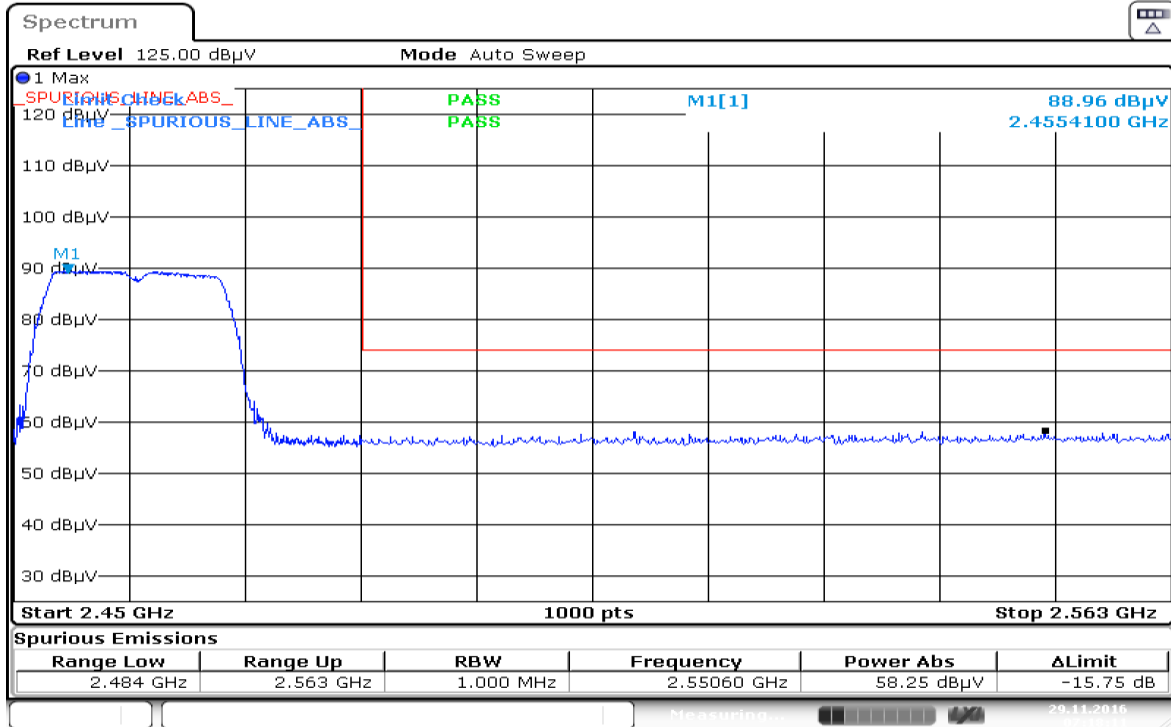


Date: 29.NOV.2016 07:18:12

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

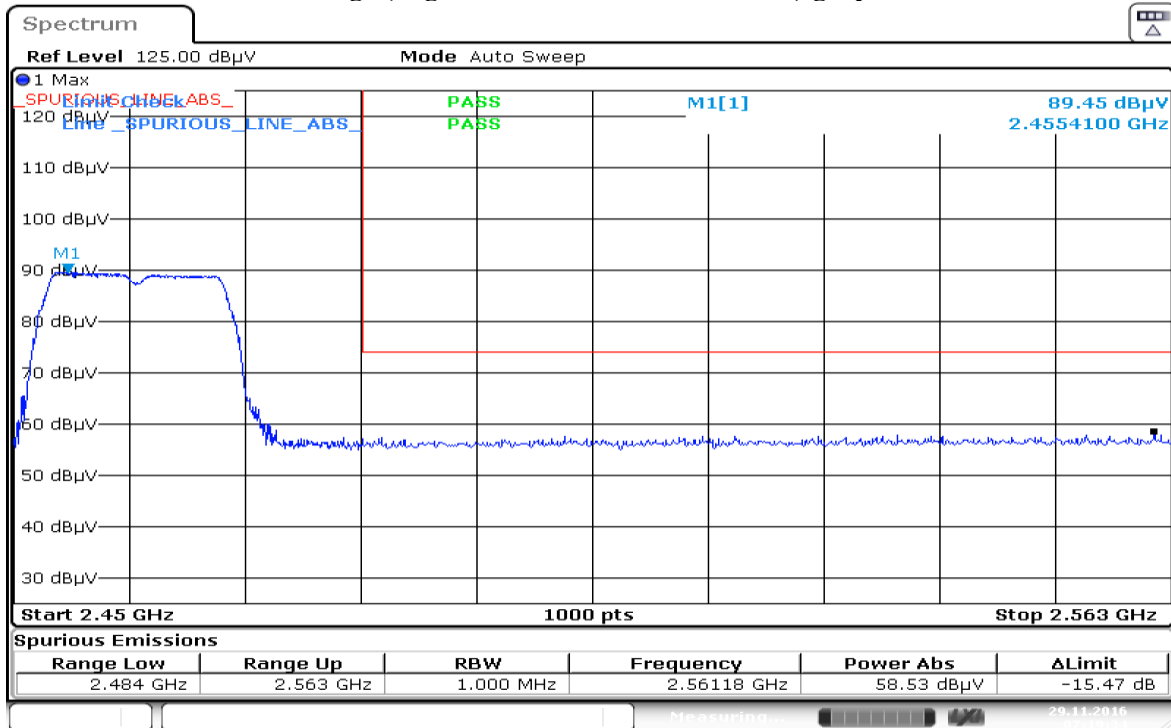


Date: 29.NOV.2016 07:19:34

**Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot**

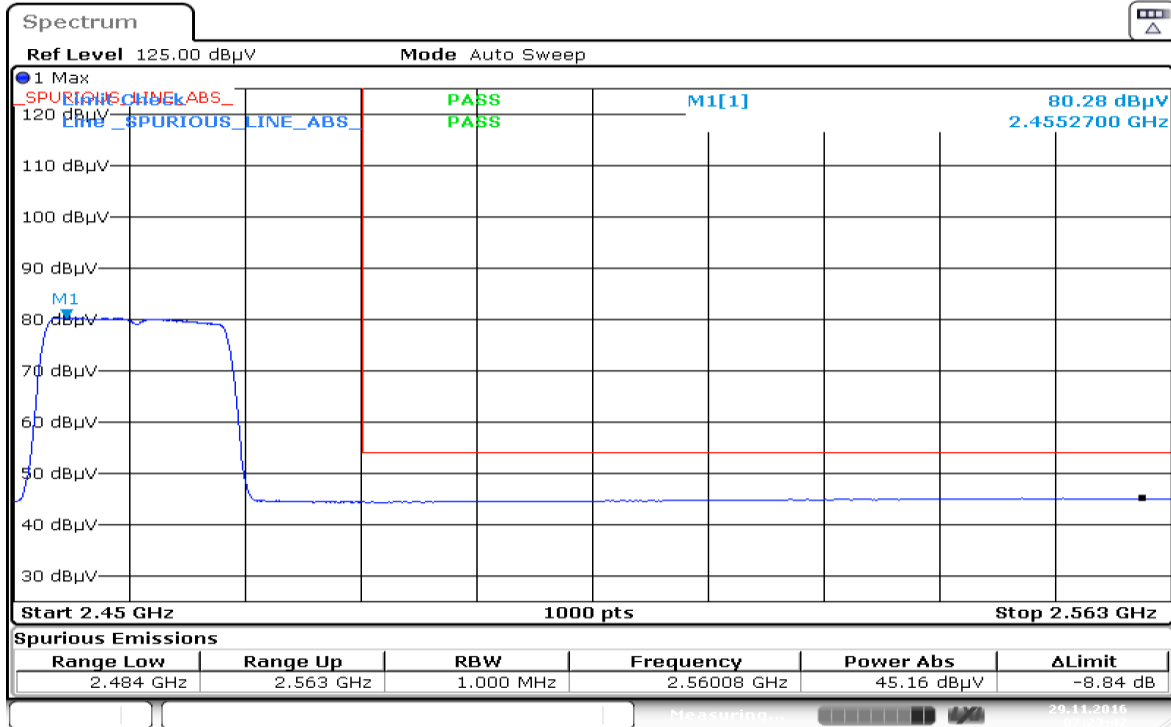

Date: 29.NOV.2016 07:23:42

**Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot**

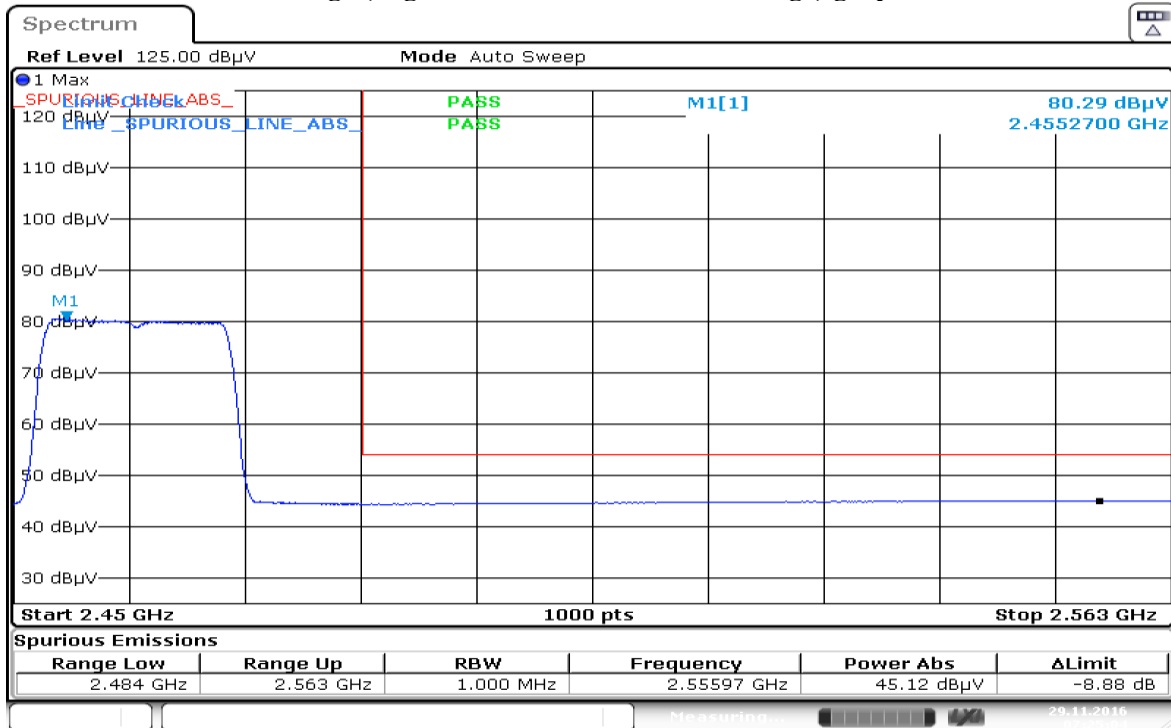

Date: 29.NOV.2016 07:25:04

**802.11b**

**Test: WIFI SAC Transmitter Radiated Emission**

Model#: H92QDH9PW7AN                      S/N: 837TSX0063                      EMC SR ID#: 05756-EMC-00019  
Battery: PMNN4493A                      Accessory: NA  
Test Channel: Low                      Test Frequency: 2412.00 MHz                      Test Standard: ANSI C63.10-2013  
Worst Case Plane: X-Plane (802.11b)

**Radiated Emission (Low Channel) tabular data**

<b>Vertical Radiated Emission Result</b>									
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)	Carrier AV Power (dBµV/m)
4824	-	40.5533**	**	74	54	33.45**	-	-	-
7236	-	44.7454**	**	74	54	29.25**	-	-	-
9648	-	44.2861**	**	74	54	29.71**	-	-	-
12060	-	49.2078**	**	74	54	24.79**	-	-	-
14472	-	53.3127**	**	74	54	20.69**	-	-	-
16884	-	55.0593**	**	74	54	18.94**	-	-	-
19296	-	41.7383**	**	74	54	32.26**	-	-	-
21708	-	41.4330**	**	74	54	32.57**	-	-	-
24120	-	41.5866**	**	74	54	32.41**	-	-	-
<b>Horizontal Radiated Emission Result</b>									
4824	-	40.1335**	**	74	54	33.87**	-	-	-
7236	-	44.9218**	**	74	54	29.08**	-	-	-
9648	-	44.6606**	**	74	54	29.34**	-	-	-
12060	-	49.4490**	**	74	54	24.55**	-	-	-
14472	-	52.6765**	**	74	54	21.32**	-	-	-
16884	-	54.3241**	**	74	54	19.68**	-	-	-
19296	-	41.9159**	**	74	54	32.08**	-	-	-
21708	-	41.4830**	**	74	54	32.52**	-	-	-
24120	-	41.6122**	**	74	54	32.39**	-	-	-


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4  
Test Performed by: Nazrin&Qawiman  
System MU: 5.01dB


Humidity (%): 71.6  
Test Date: Wed, Nov 30, 2016  
Duty Cycle (%): > 98%

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.


### VERTICAL, QPK

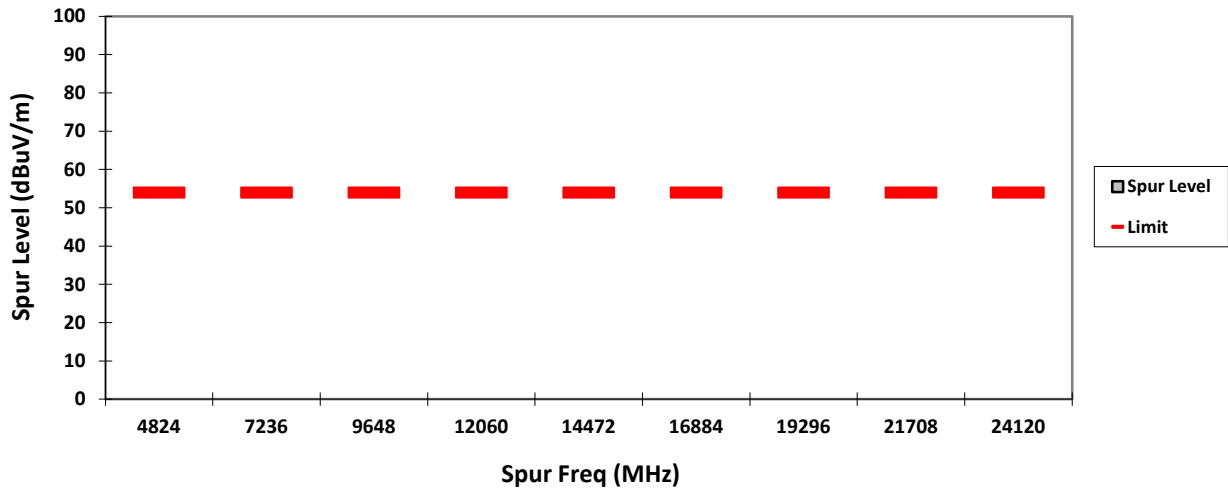


### HORIZONTAL, QPK

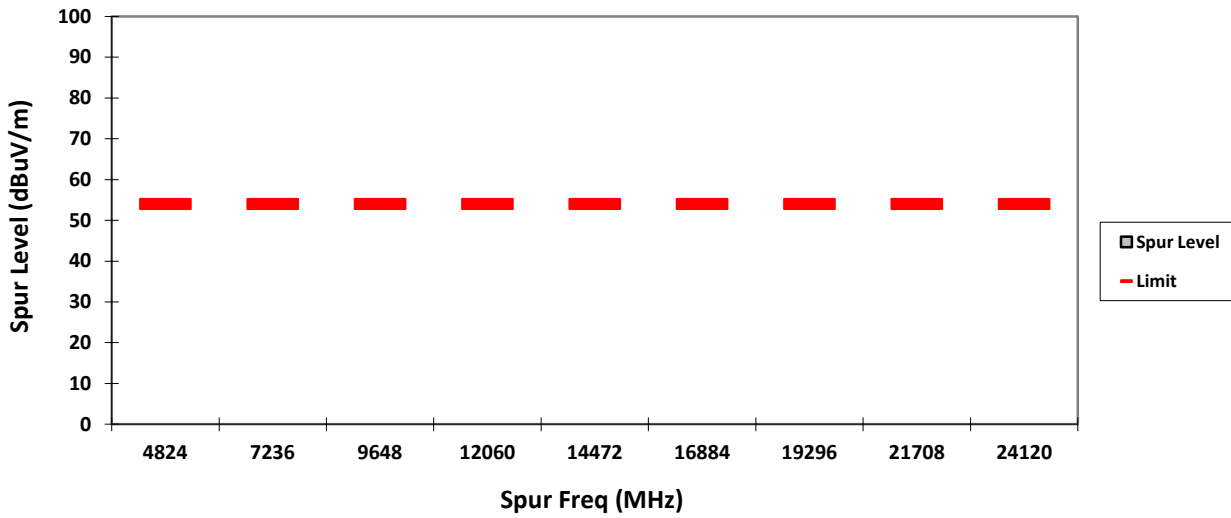


VERTICAL, PK

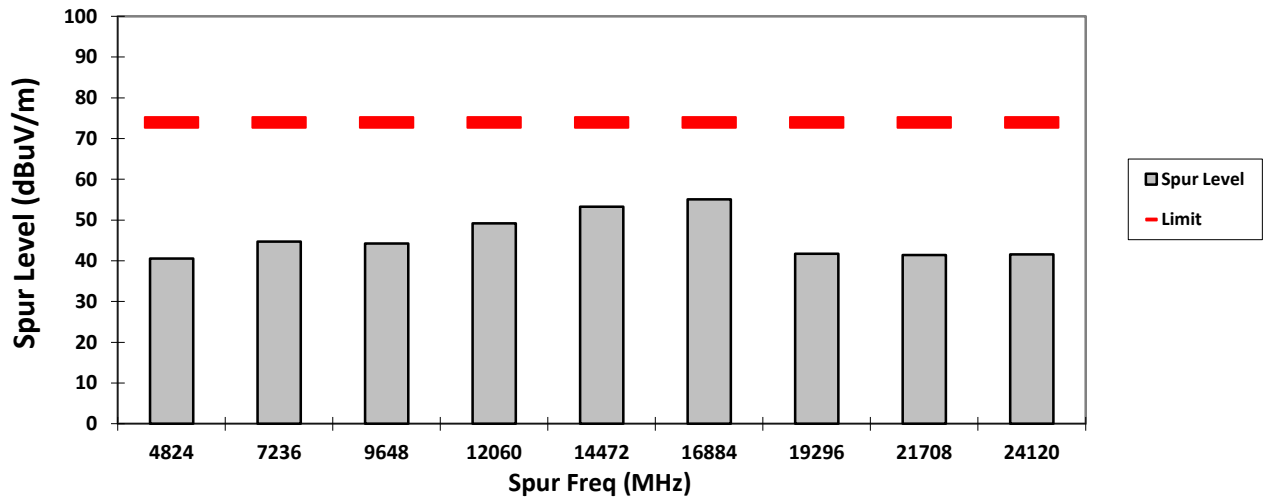


HORIZONTAL, PK

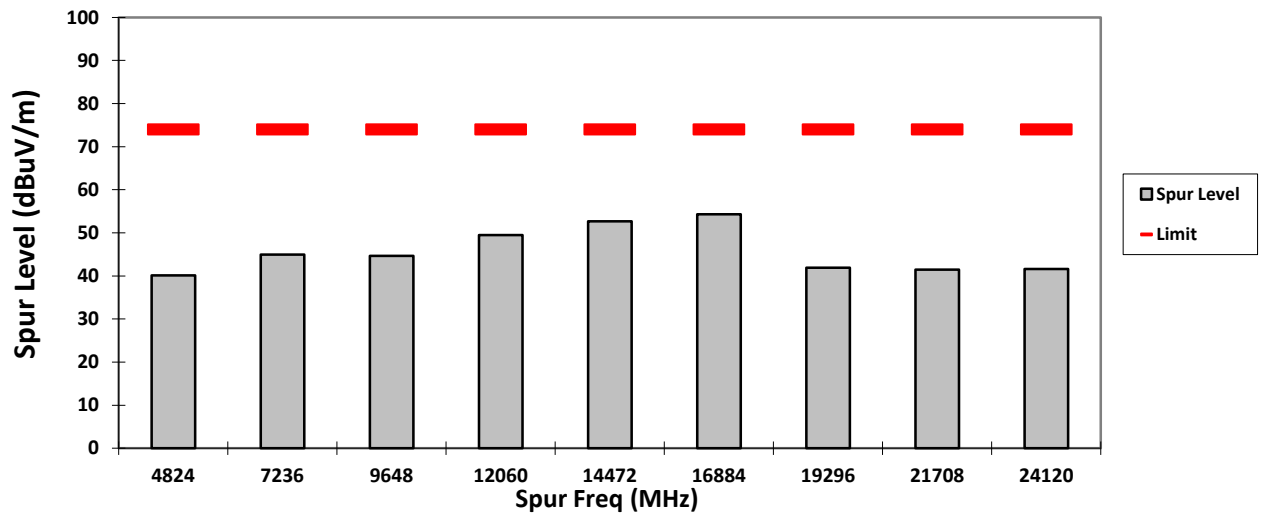

### VERTICAL, AV

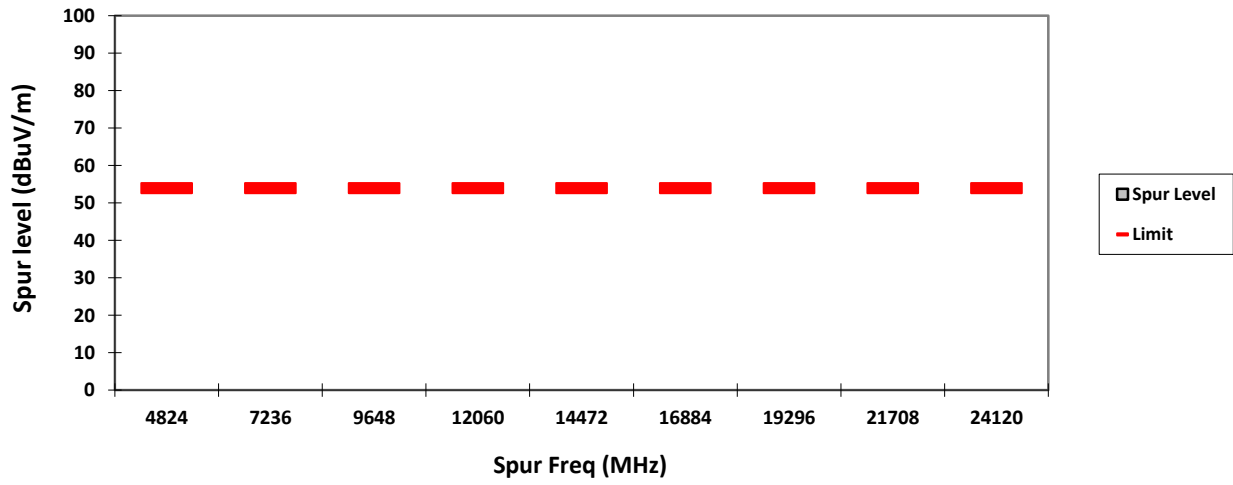

### HORIZONTAL, AV

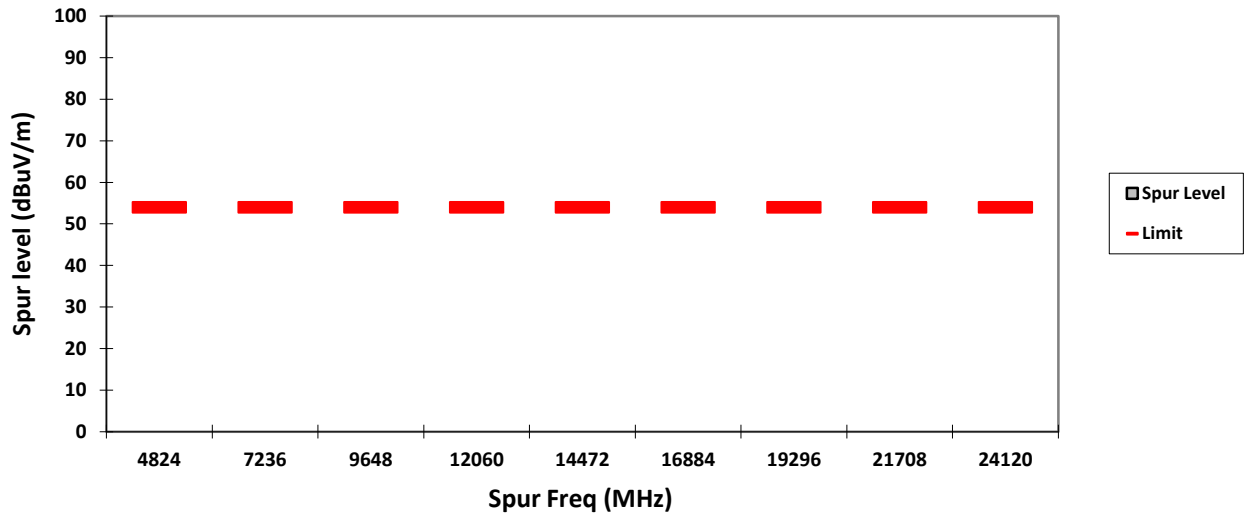

**Test: WIFI SAC Transmitter Radiated Emission**  
**Model#: H92QDH9PW7AN**      **S/N: 837TSX0063**      **EMC SR ID#: 05756-EMC-00019**  
**Battery: PMNN4493A**      **Accessory: NA**  
**Test Channel: Mid**      **Test Frequency: 2437.00 MHz**      **Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (802.11b)**

**Radiated Emission (Mid Channel) tabular data**


Vertical Radiated Emission Result									
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)	Carrier AV Power (dBµV/m)
4874	-	40.3108**	**	74	54	33.69**	-	-	-
7311	-	44.8018**	**	74	54	29.20**	-	-	-
9748	-	42.2266**	**	74	54	31.77**	-	-	-
12185	-	50.3475**	**	74	54	23.65**	-	-	-
14622	-	51.5231**	**	74	54	22.48**	-	-	-
17059	-	54.8358**	**	74	54	19.16**	-	-	-
19496	-	40.3821**	**	74	54	33.62**	-	-	-
21933	-	42.4626**	**	74	54	31.54**	-	-	-
24370	-	42.6320**	**	74	54	31.37**	-	-	-
Horizontal Radiated Emission Result									
4874	-	40.2804**	**	74	54	33.72**	-	-	-
7311	-	44.5384**	**	74	54	29.46**	-	-	-
9748	-	42.6513**	**	74	54	31.35**	-	-	-
12185	-	49.9624**	**	74	54	24.04**	-	-	-
14622	-	51.6673**	**	74	54	22.33**	-	-	-
17059	-	53.9789**	**	74	54	20.02**	-	-	-
19496	-	40.2961**	**	74	54	33.70**	-	-	-
21933	-	41.8429**	**	74	54	32.16**	-	-	-
24370	-	42.8314**	**	74	54	31.17**	-	-	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


**Temperature (degC): 23.4**      **Humidity (%): 71.6**  
**Test Performed by: Nazrin&Qawiman**      **Test Date: Tue, Nov 29, 2016**  
**System MU: 5.01dB**      **Duty Cycle (%): > 98%**

**Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.**

### VERTICAL, QPK

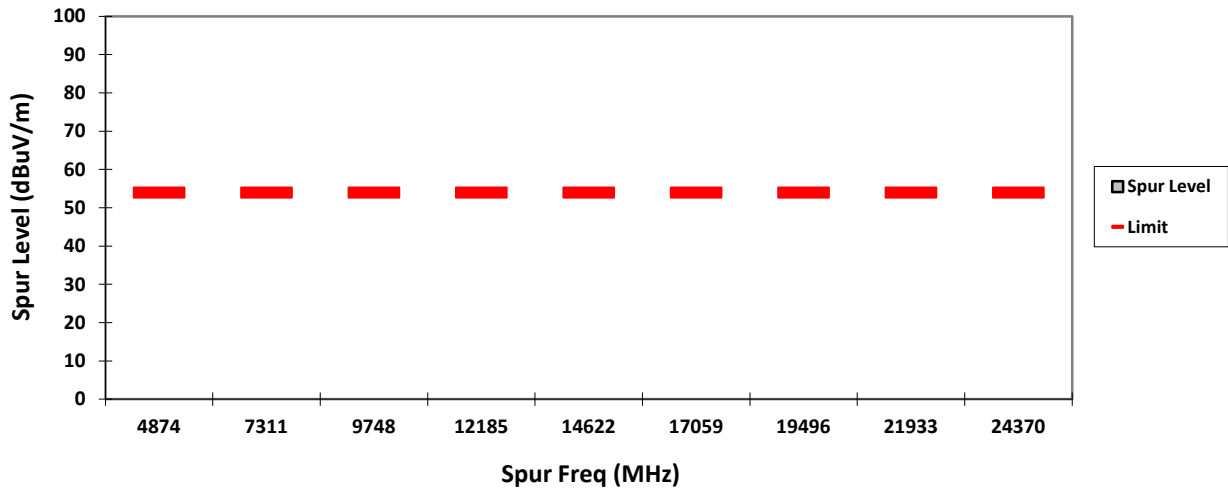


### HORIZONTAL, QPK

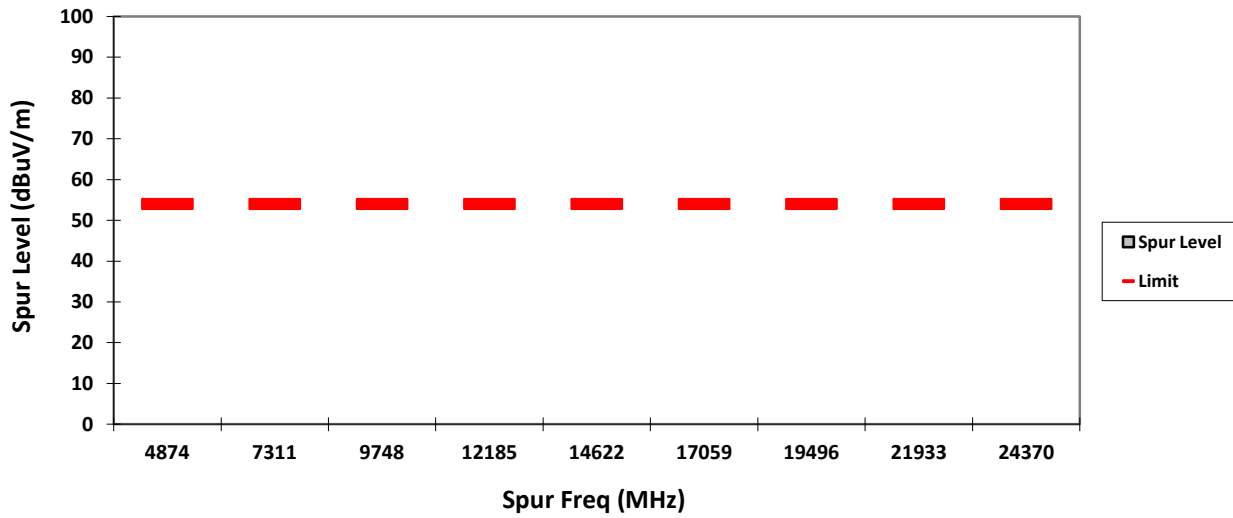





VERTICAL, PK

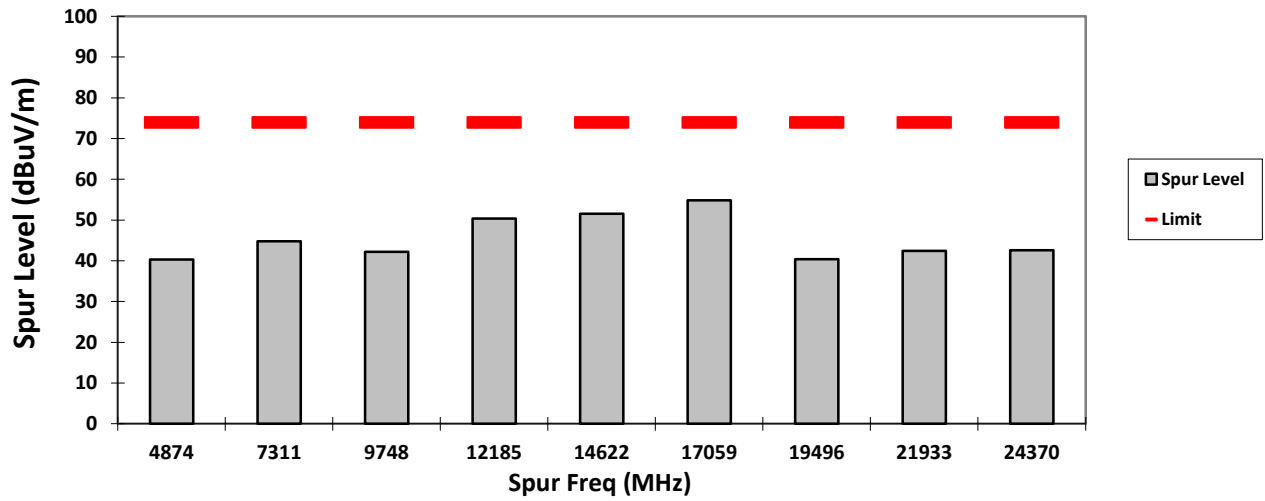


HORIZONTAL, PK

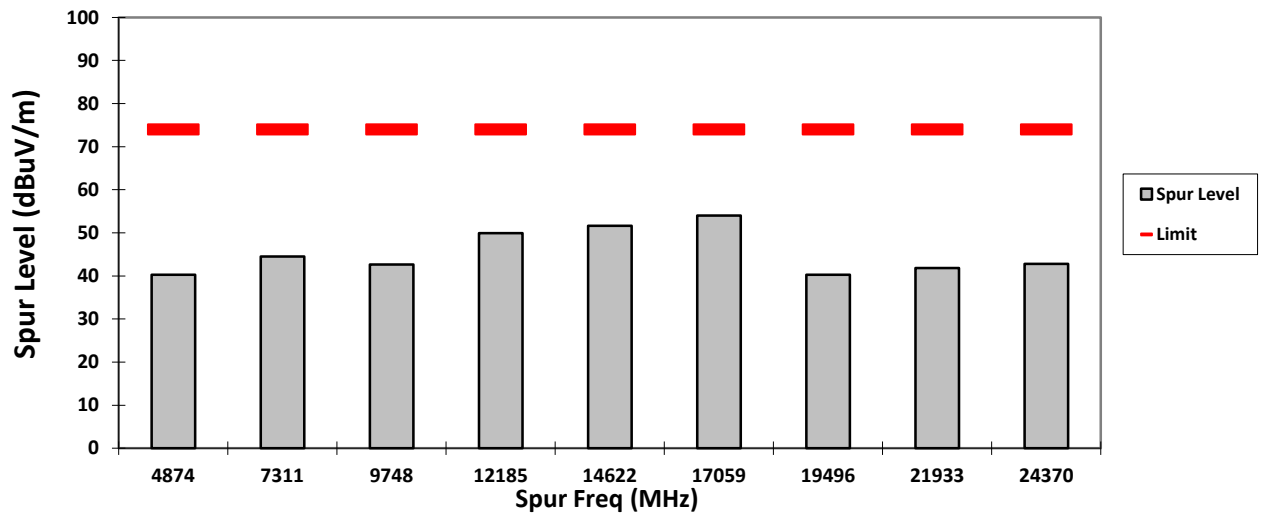

### VERTICAL, AV

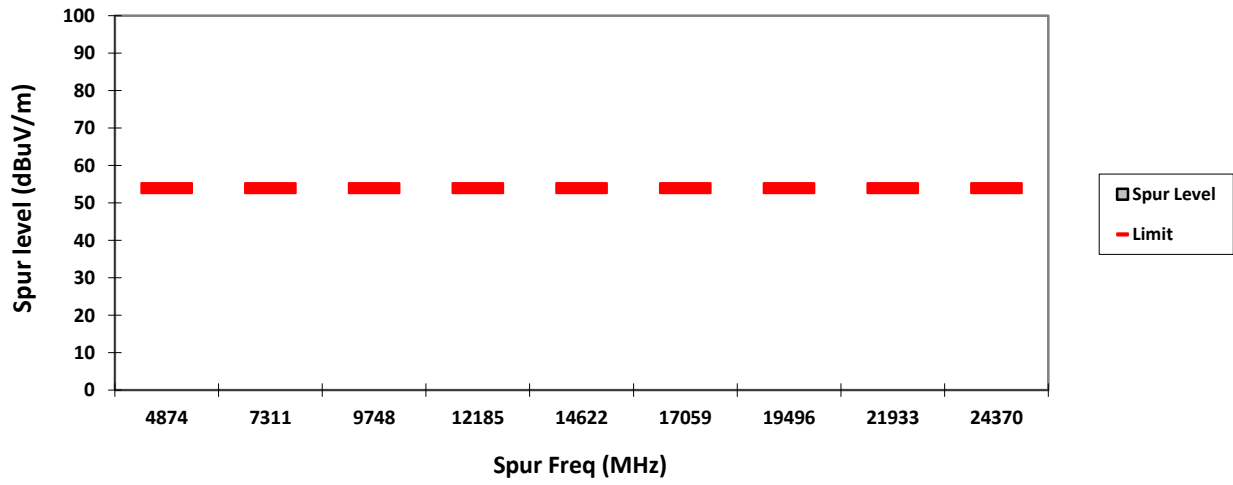

### HORIZONTAL, AV

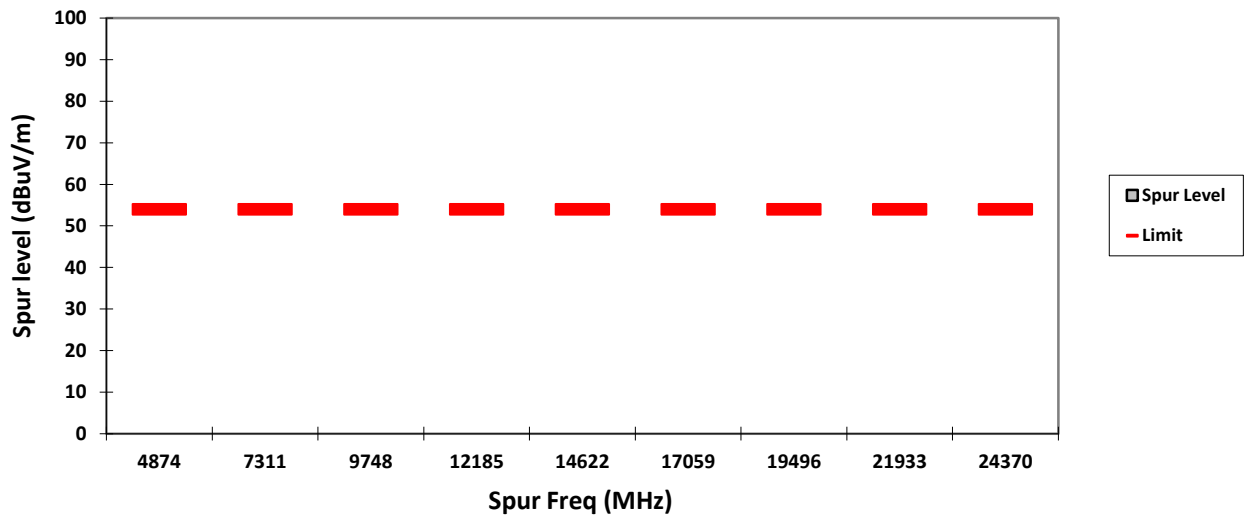

Test: WIFI SAC Transmitter Radiated Emission  
Model#: H92QDH9PW7AN S/N: 837TSX0063 EMC SR ID#: 05756-EMC-00019  
Battery: PMNN4493A Accessory: NA  
Test Channel: High Test Frequency: 2462.00 MHz Test Standard: ANSI C63.10-2013  
Worst Case Plane: X-Plane (802.11b)

**Radiated Emission (High Channel) tabular data**


Vertical Radiated Emission Result									
Spur Freq (MHz)	Spur level QPK (dB $\mu$ V/m)	Spur level PK (dB $\mu$ V/m)	Spur level AV (dB $\mu$ V/m)	Limit PK (dB $\mu$ V/m)	Limit AV (dB $\mu$ V/m)	Margin PK (dB $\mu$ V/m)	Margin AV (dB $\mu$ V/m)	Carrier PK Power (dB $\mu$ V/m)	Carrier AV Power (dB $\mu$ V/m)
4924	-	40.5713**	**	74	54	33.43**	-	-	-
7386	-	44.3730**	**	74	54	29.63**	-	-	-
9848	-	40.3623**	**	74	54	33.64**	-	-	-
12310	-	51.2208**	**	74	54	22.78**	-	-	-
14772	-	50.8189**	**	74	54	23.18**	-	-	-
17234	-	55.0255**	**	74	54	18.97**	-	-	-
19696	-	41.6153**	**	74	54	32.38**	-	-	-
22158	-	41.9083**	**	74	54	32.09**	-	-	-
24620	-	42.1724**	**	74	54	31.83**	-	-	-
Horizontal Radiated Emission Result									
4924	-	40.9783**	**	74	54	33.02**	-	-	-
7386	-	44.6205**	**	74	54	29.38**	-	-	-
9848	-	40.6075**	**	74	54	33.39**	-	-	-
12310	-	50.8970**	**	74	54	23.10**	-	-	-
14772	-	50.8482**	**	74	54	23.15**	-	-	-
17234	-	54.3758**	**	74	54	19.62**	-	-	-
19696	-	42.4617**	**	74	54	31.54**	-	-	-
22158	-	41.4965**	**	74	54	32.50**	-	-	-
24620	-	42.6984**	**	74	54	31.30**	-	-	-

Remarks:	Marginal Result	Fail Result
Pass Result		


Temperature (degC): 23.4 Humidity (%): 71.6  
Test Performed by: Nazrin&Qawiman Test Date: Wed, Nov 30, 2016  
System MU: 5.01dB Duty Cycle (%): > 98%

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.


### VERTICAL, QPK

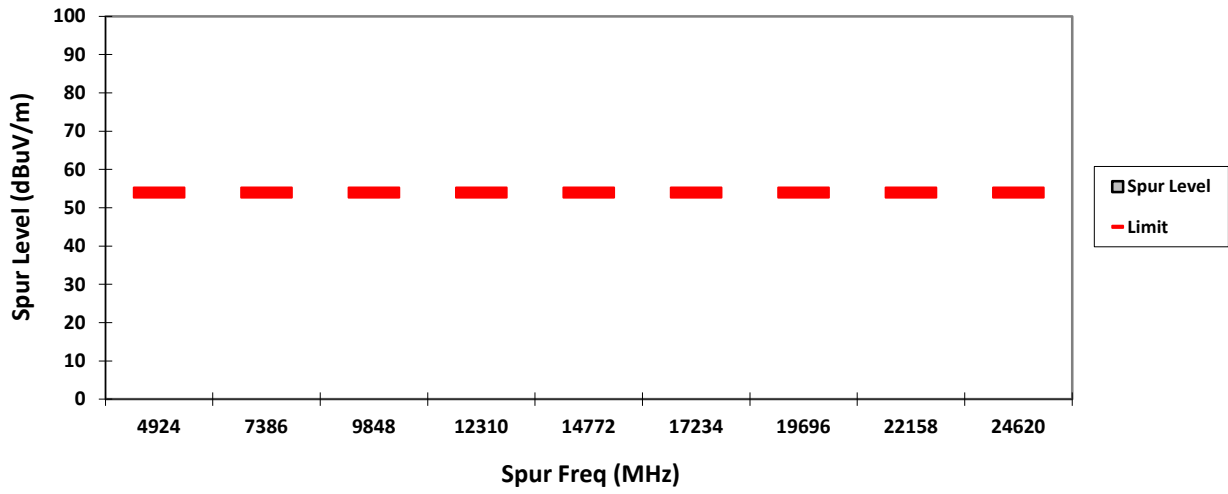


### HORIZONTAL, QPK

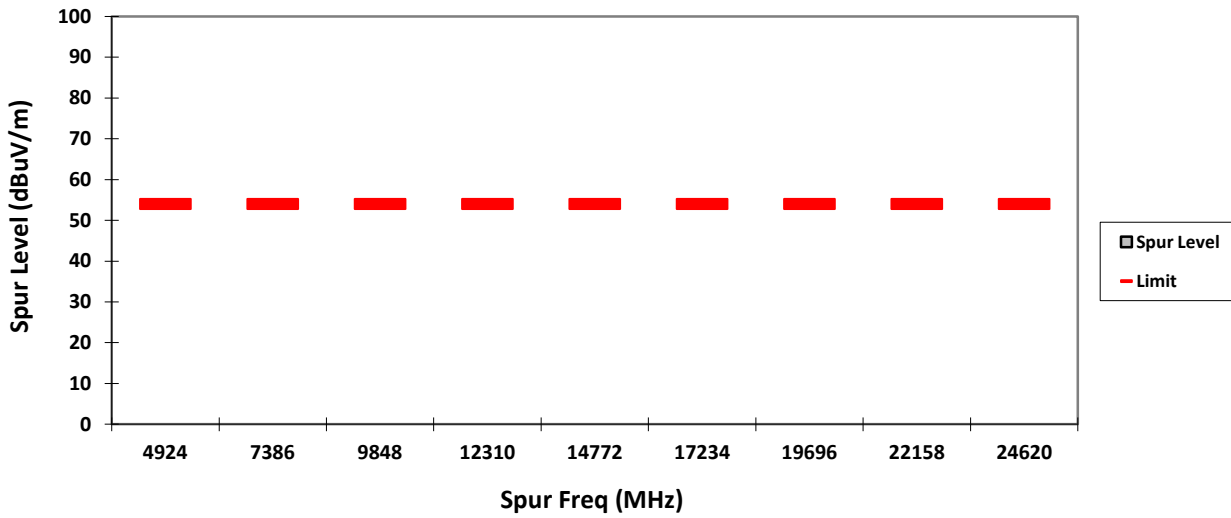


**VERTICAL, PK**

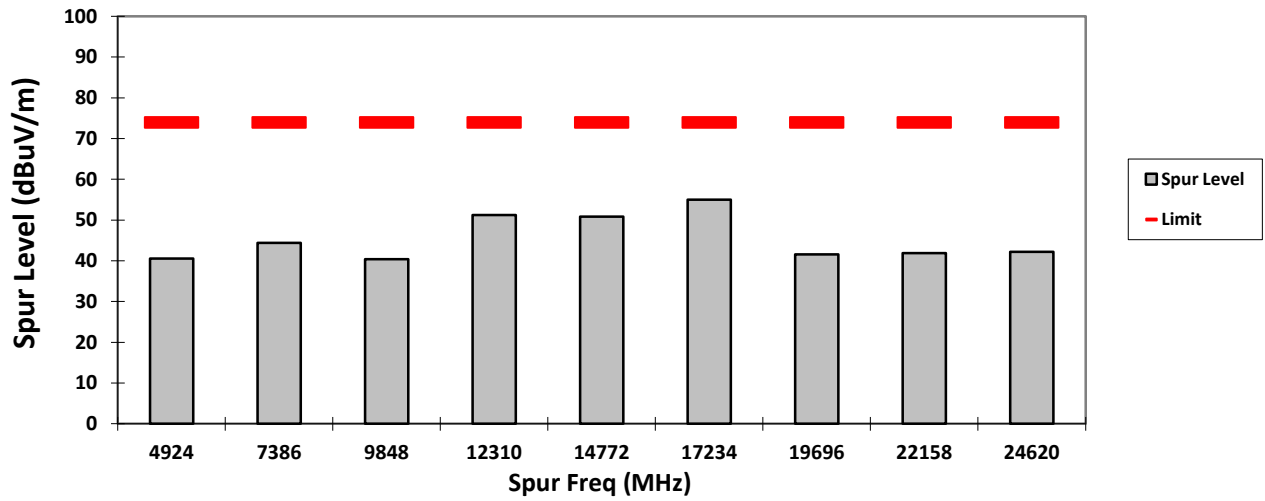


**HORIZONTAL, PK**

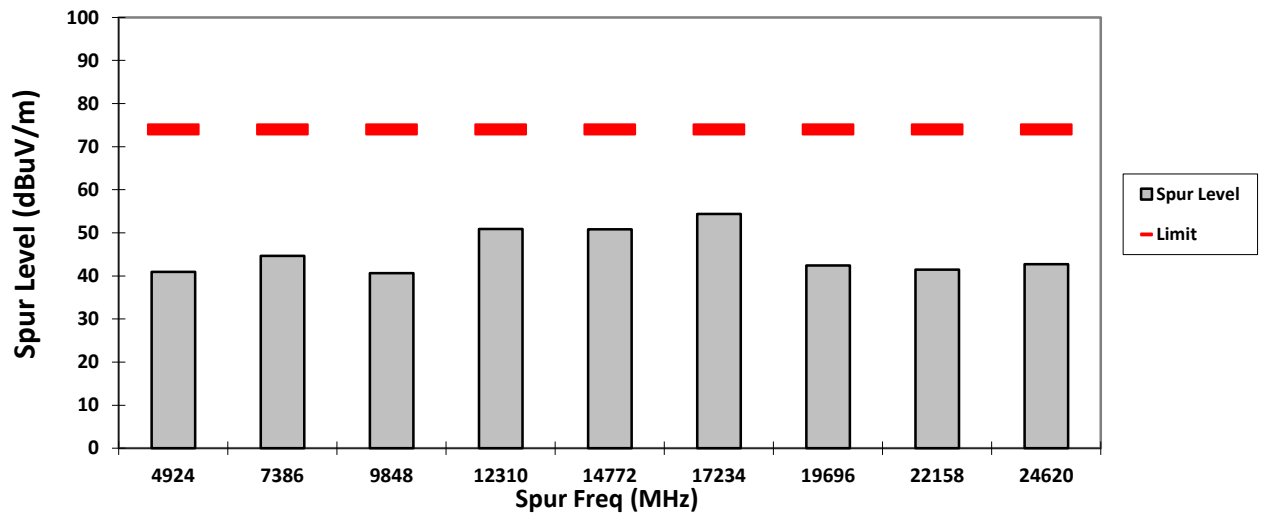

### VERTICAL, AV

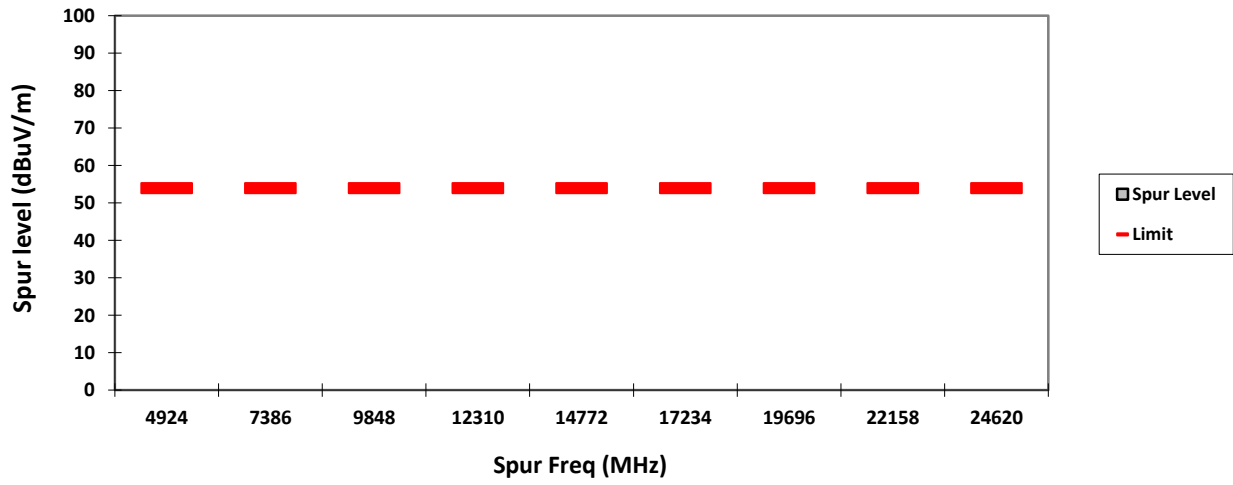


### HORIZONTAL, AV

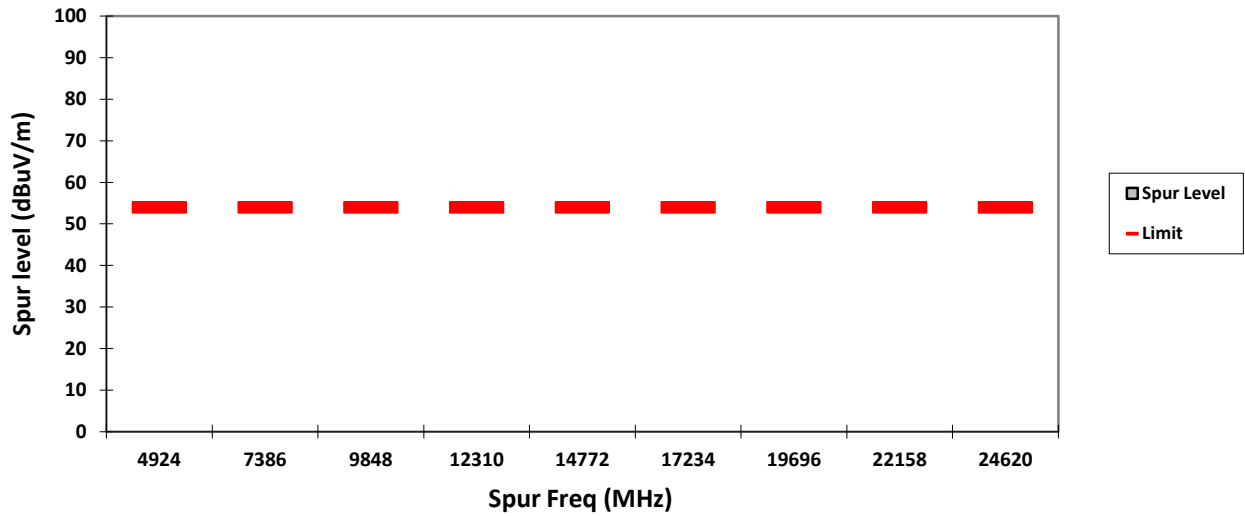




### VERTICAL, QPK

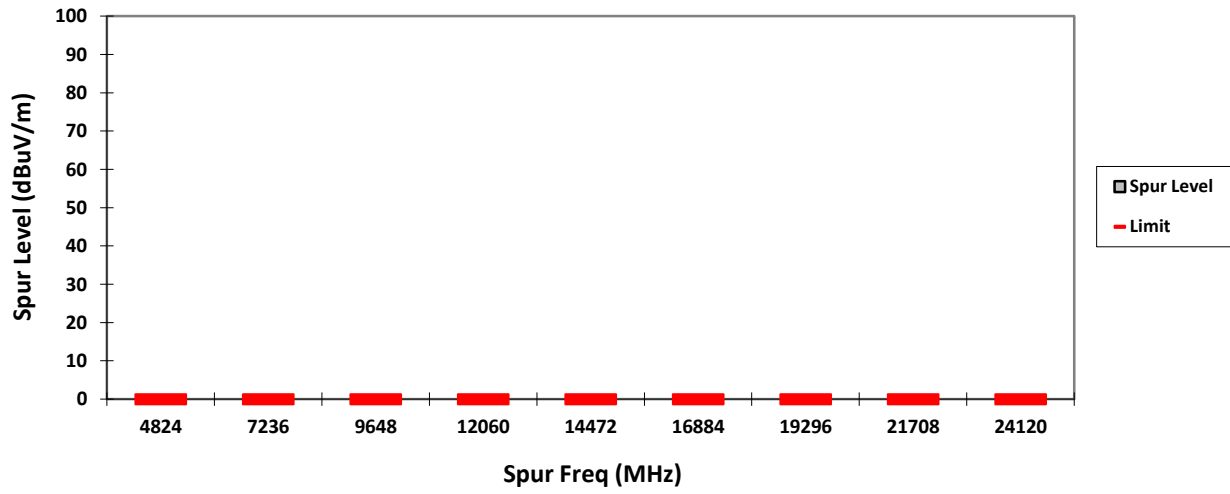


### HORIZONTAL, QPK

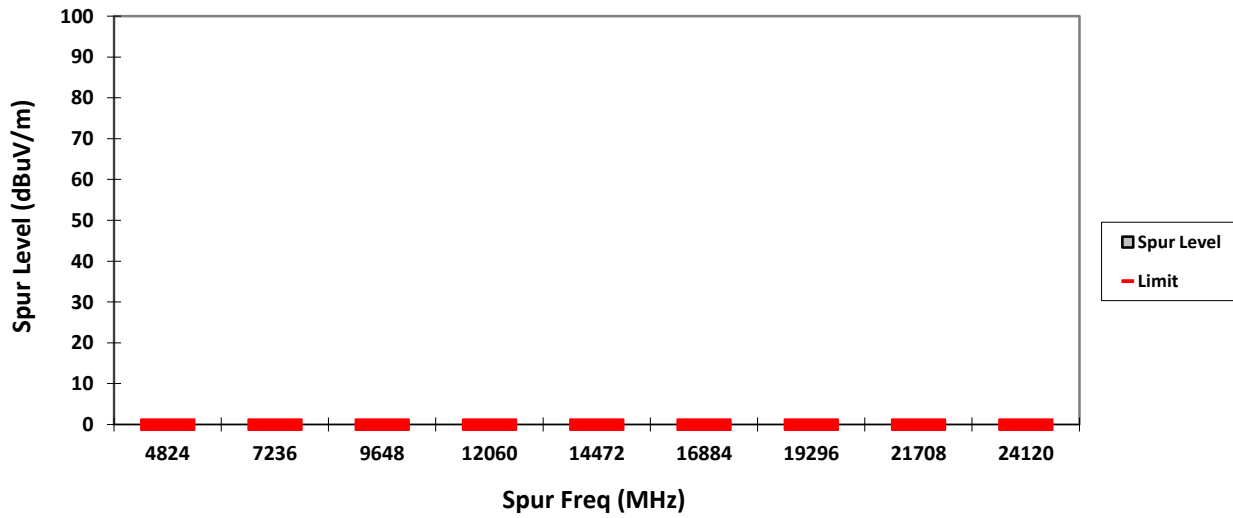





VERTICAL, PK

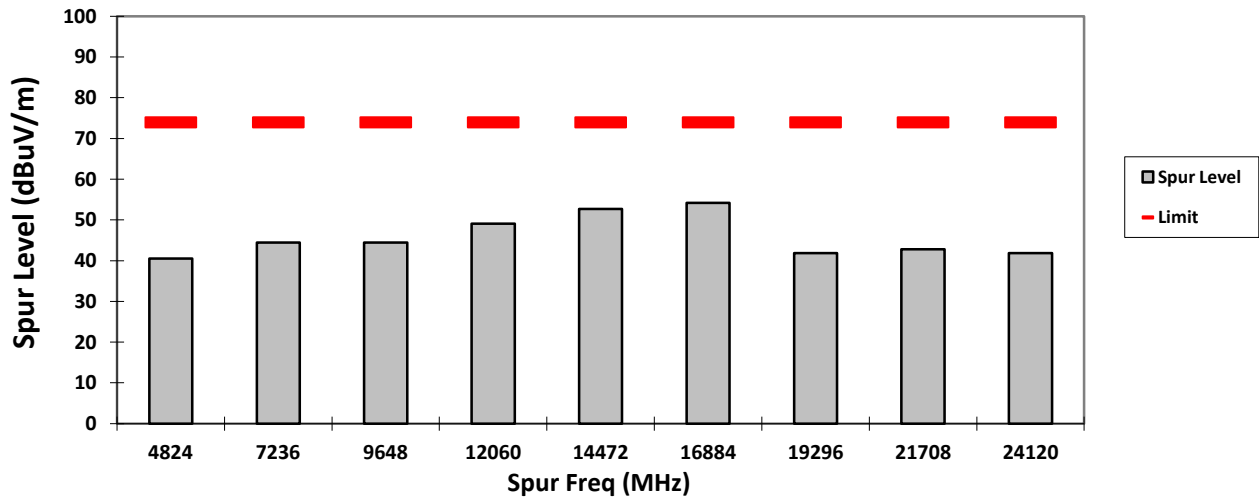


HORIZONTAL, PK

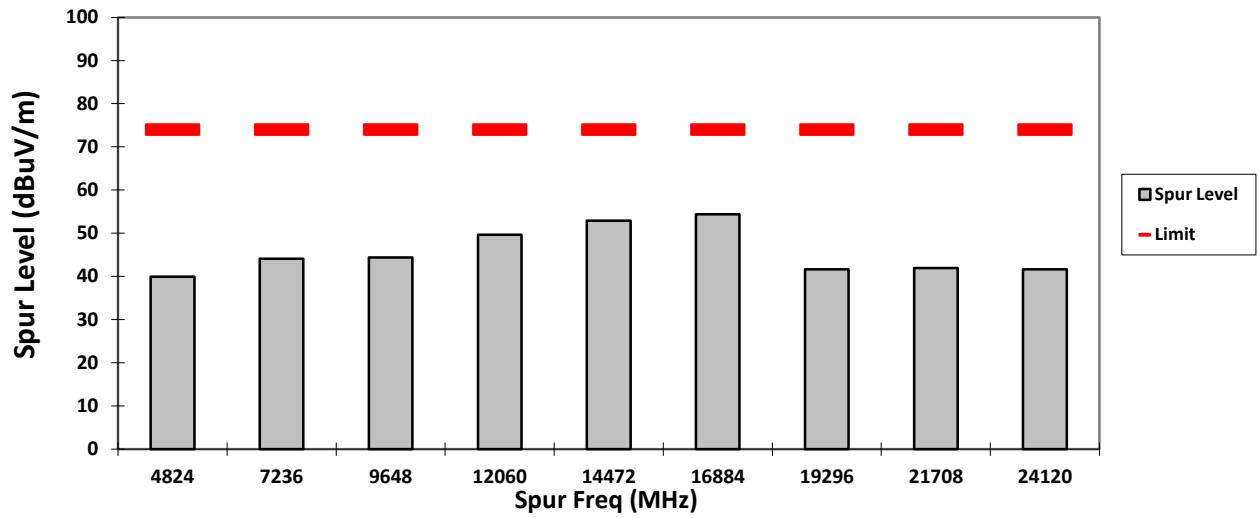

### VERTICAL, AV

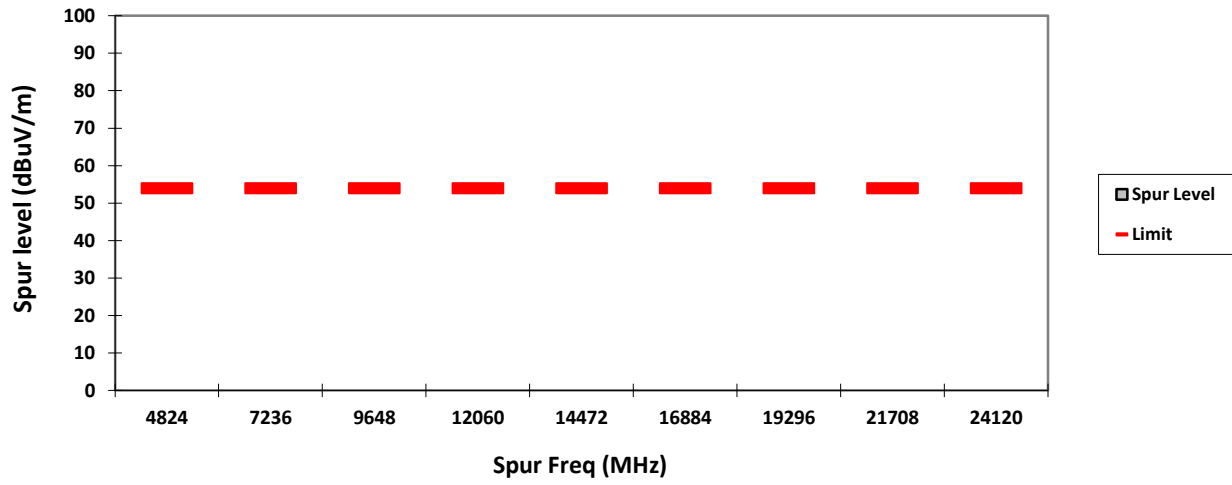

### HORIZONTAL, AV

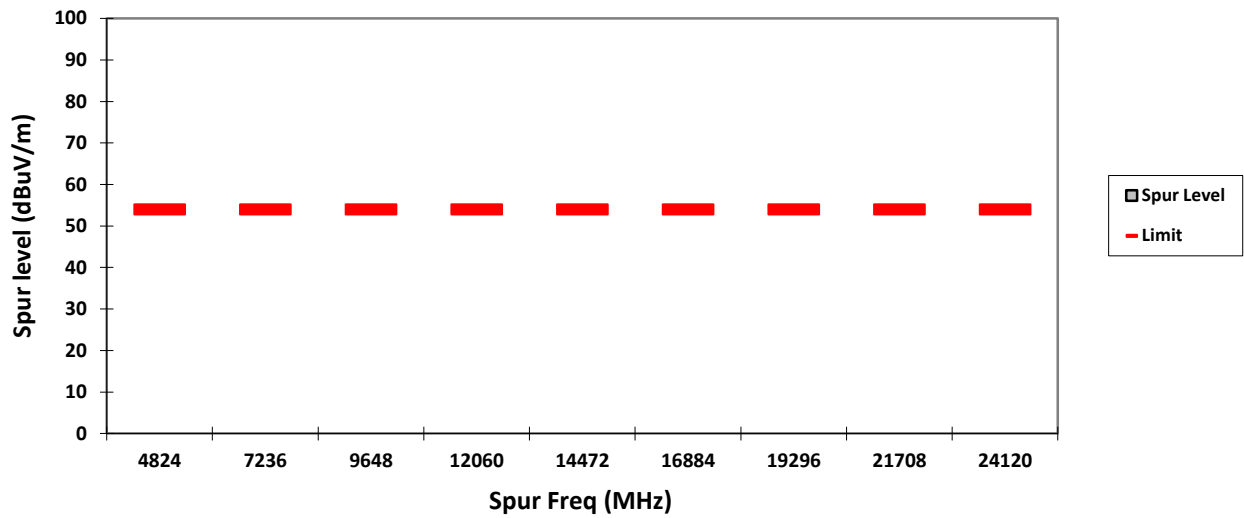

Test: WIFI SAC Transmitter Radiated Emission  
 Model#: H92QDH9PW7AN S/N: 837TSX0063 EMC SR ID#: 05756-EMC-00019  
 Battery: PMNN4493A Accessory: NA  
 Test Channel: Mid Test Frequency: 2437.00 MHz Test Standard: ANSI C63.10-2013  
 Worst Case Plane: X-Plane (802.11g)

**Radiated Emission (Mid Channel) tabular data**

<b>Vertical Radiated Emission Result</b>										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4874	-	40.9302**	**	-	74	54	-	33.07**	-	-
7311	-	44.8698**	**	-	74	54	-	29.13**	-	-
9748	-	42.3826**	**	-	74	54	-	31.62**	-	-
12185	-	50.8939**	**	-	74	54	-	23.11**	-	-
14622	-	51.7392**	**	-	74	54	-	22.26**	-	-
17059	-	54.6696**	**	-	74	54	-	19.33**	-	-
19496	-	40.6292**	**	-	74	54	-	33.37**	-	-
21933	-	42.1743**	**	-	74	54	-	31.83**	-	-
24370	-	42.7454**	**	-	74	54	-	31.25**	-	-
<b>Horizontal Radiated Emission Result</b>										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4874	-	40.5084**	**	-	74	54	-	33.49**	-	-
7311	-	44.7390**	**	-	74	54	-	29.26**	-	-
9748	-	41.6748**	**	-	74	54	-	32.33**	-	-
12185	-	50.0560**	**	-	74	54	-	23.94**	-	-
14622	-	52.2195**	**	-	74	54	-	21.78**	-	-
17059	-	55.2805**	**	-	74	54	-	18.72**	-	-
19496	-	40.4212**	**	-	74	54	-	33.58**	-	-
21933	-	42.5169**	**	-	74	54	-	31.48**	-	-
24370	-	42.6310**	**	-	74	54	-	31.37**	-	-


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4  
 Test Performed by: Nazrin&Qawiman  
 System MU: 5.01dB


Humidity (%): 71.6  
 Test Date: Tue, Nov 29, 2016  
 Duty Cycle (%): > 98%

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.


### VERTICAL, QPK

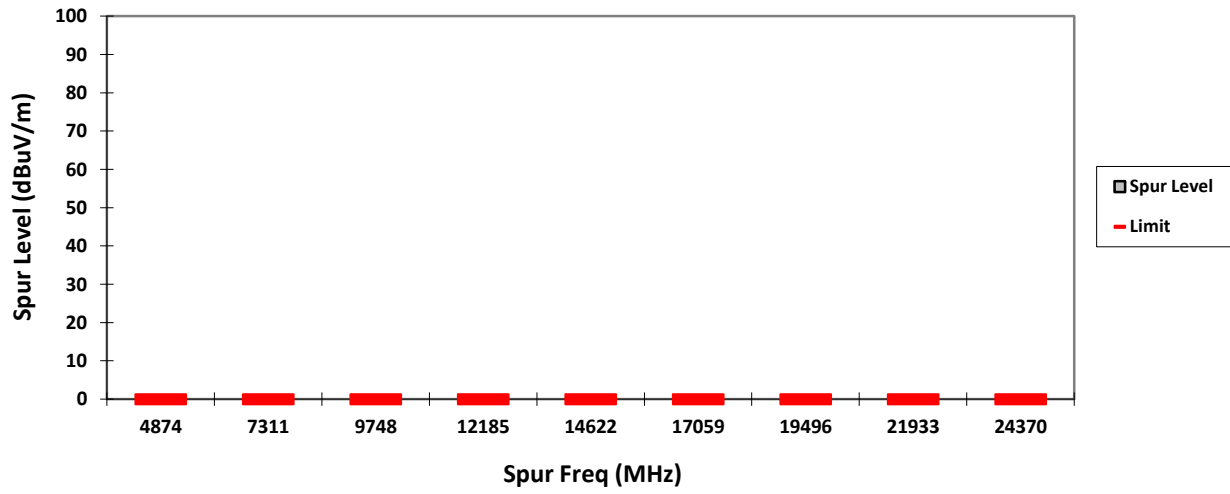


### HORIZONTAL, QPK

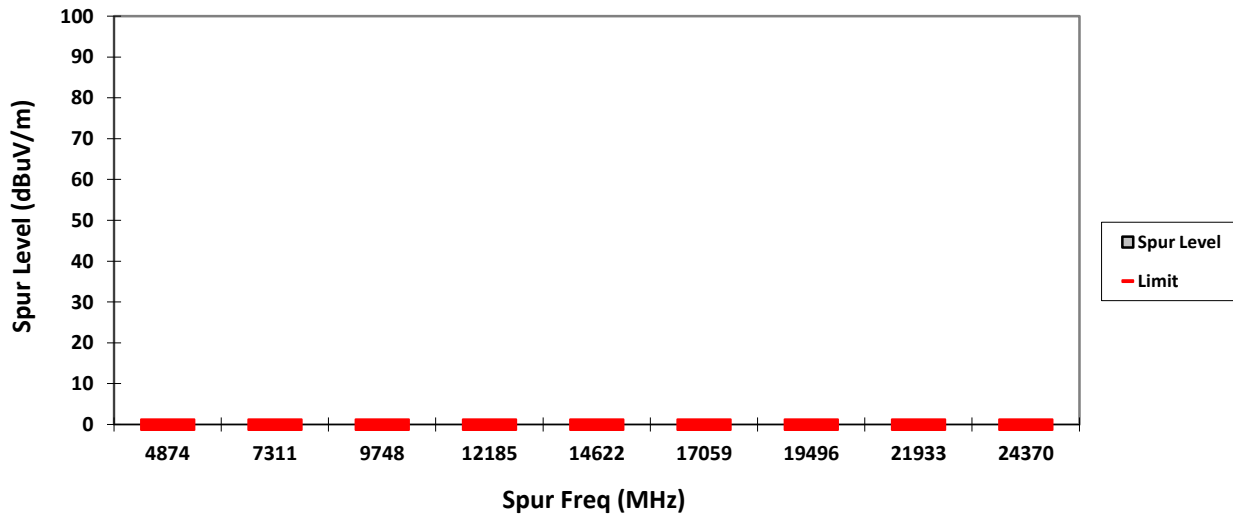


VERTICAL, PK

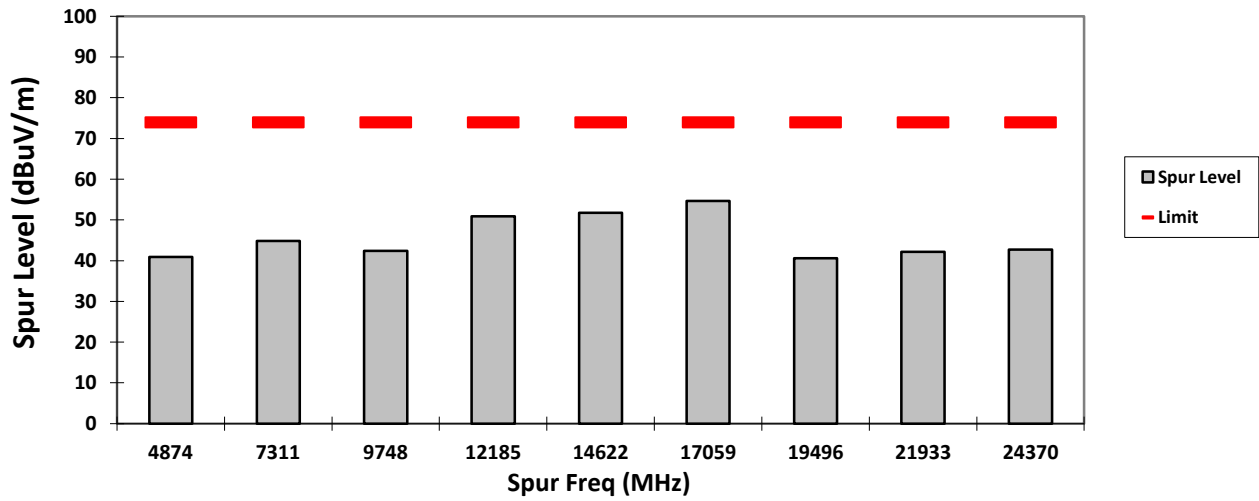


HORIZONTAL, PK

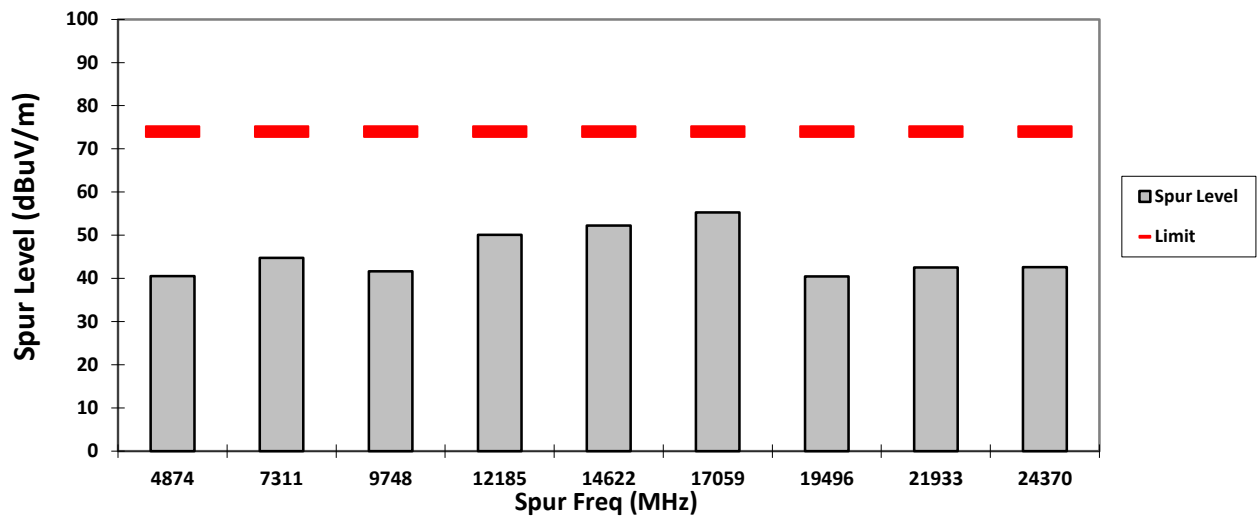

### VERTICAL, AV

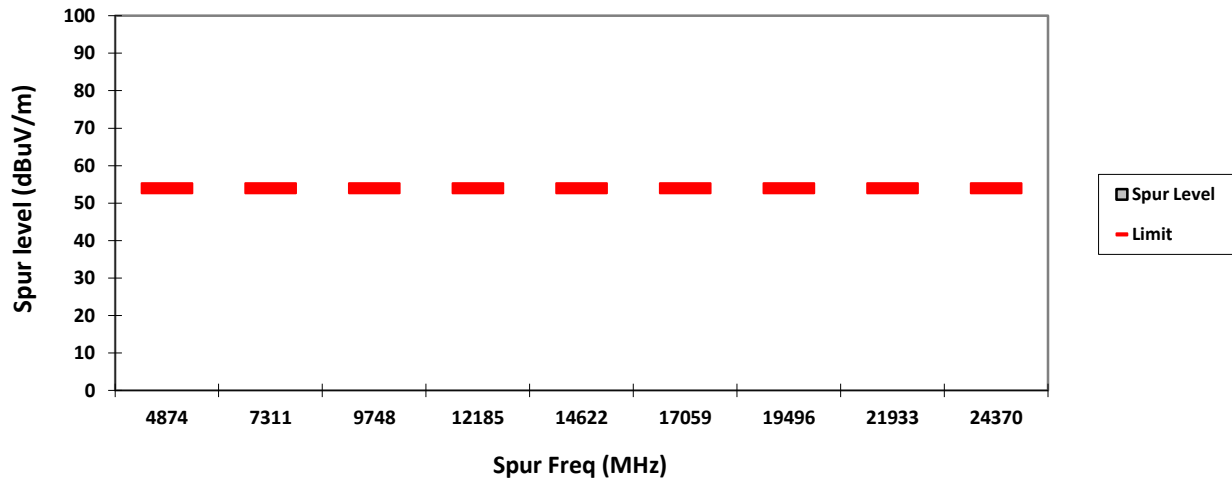

### HORIZONTAL, AV

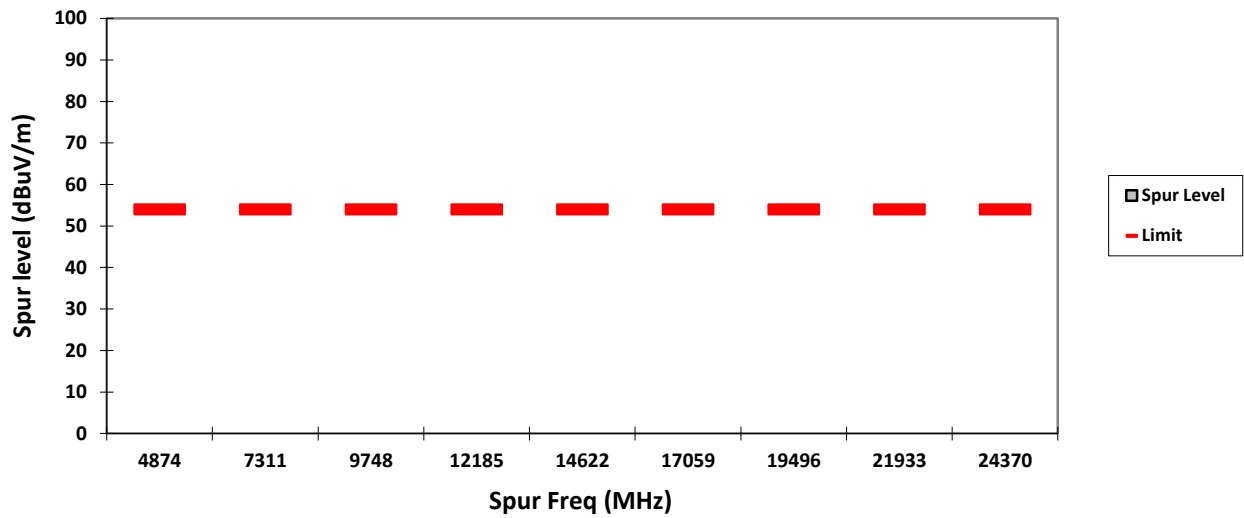

**Test: WIFI SAC Transmitter Radiated Emission**  
**Model#: H92QDH9PW7AN**      **S/N: 837TSX0063**      **EMC SR ID#: 05756-EMC-00019**  
**Battery: PMNN4493A**      **Accessory: NA**  
**Test Channel: High**      **Test Frequency: 2462.00 MHz**      **Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (802.11g)**

**Radiated Emission (High Channel) tabular data**

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBµV/m)	Spur level PK (dBµV/m)	Spur level AV (dBµV/m)	Limit QPK (dBµV/m)	Limit PK (dBµV/m)	Limit AV (dBµV/m)	Margin QPK (dBµV/m)	Margin PK (dBµV/m)	Margin AV (dBµV/m)	Carrier PK Power (dBµV/m)
4924	-	40.3908**	**	-	74	54	-	33.61**	-	-
7386	-	44.4384**	**	-	74	54	-	29.56**	-	-
9848	-	40.5306**	**	-	74	54	-	33.47**	-	-
12310	-	50.3438**	**	-	74	54	-	23.66**	-	-
14772	-	49.2667**	**	-	74	54	-	24.73**	-	-
17234	-	52.6207**	**	-	74	54	-	21.38**	-	-
19696	-	42.2534**	**	-	74	54	-	31.75**	-	-
22158	-	41.3120**	**	-	74	54	-	32.69**	-	-
24620	-	42.0092**	**	-	74	54	-	31.99**	-	-
Horizontal Radiated Emission Result										
4924	-	40.6689**	**	-	74	54	-	33.33**	-	-
7386	-	44.0940**	**	-	74	54	-	29.91**	-	-
9848	-	40.4606**	**	-	74	54	-	33.54**	-	-
12310	-	50.5544**	**	-	74	54	-	23.45**	-	-
14772	-	49.9063**	**	-	74	54	-	24.09**	-	-
17234	-	52.8655**	**	-	74	54	-	21.13**	-	-
19696	-	41.7798**	**	-	74	54	-	32.22**	-	-
22158	-	41.4435**	**	-	74	54	-	32.56**	-	-
24620	-	42.0378**	**	-	74	54	-	31.96**	-	-


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

**Temperature (degC): 23.4**  
**Test Performed by: Nazrin&Qawiman**  
**System MU: 5.01dB**


**Humidity (%): 71.6**  
**Test Date: Tue, Nov 29, 2016**  
**Duty Cycle (%): > 98%**

**Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.**

### VERTICAL, QPK

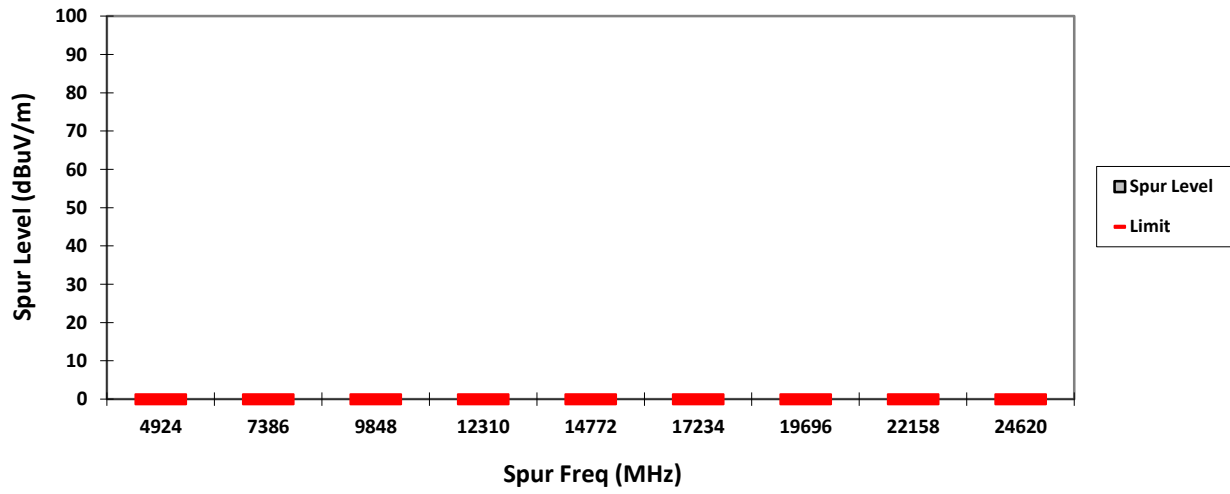


### HORIZONTAL, QPK

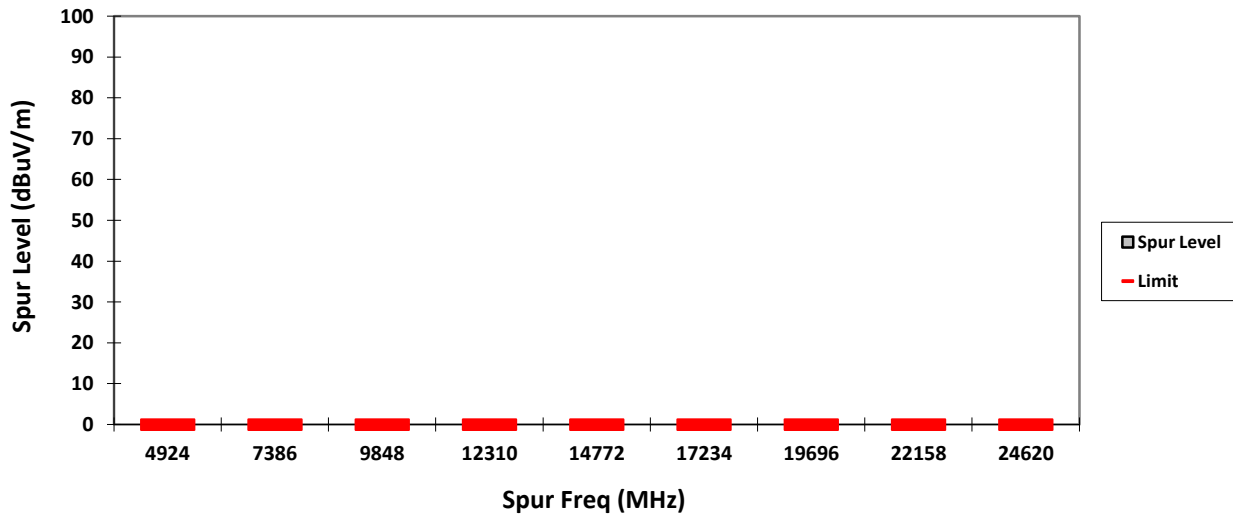





### VERTICAL, PK

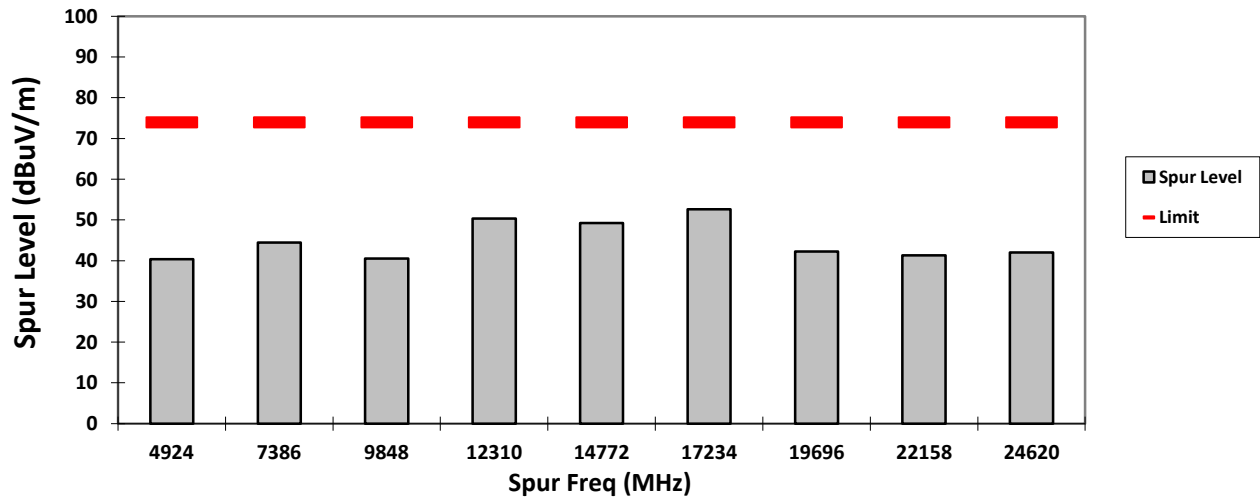


### HORIZONTAL, PK

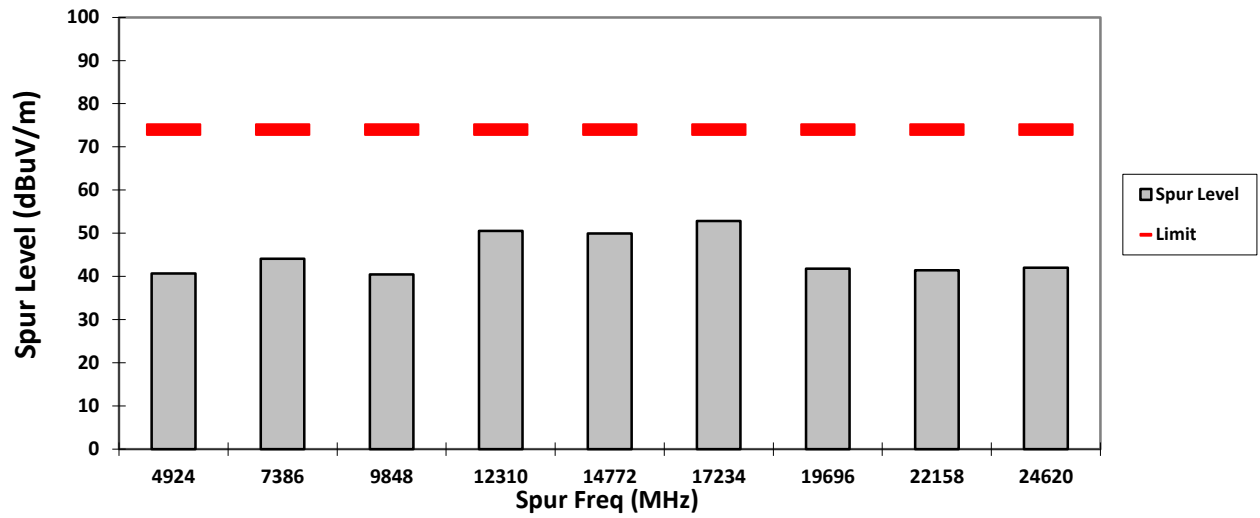

### VERTICAL, AV

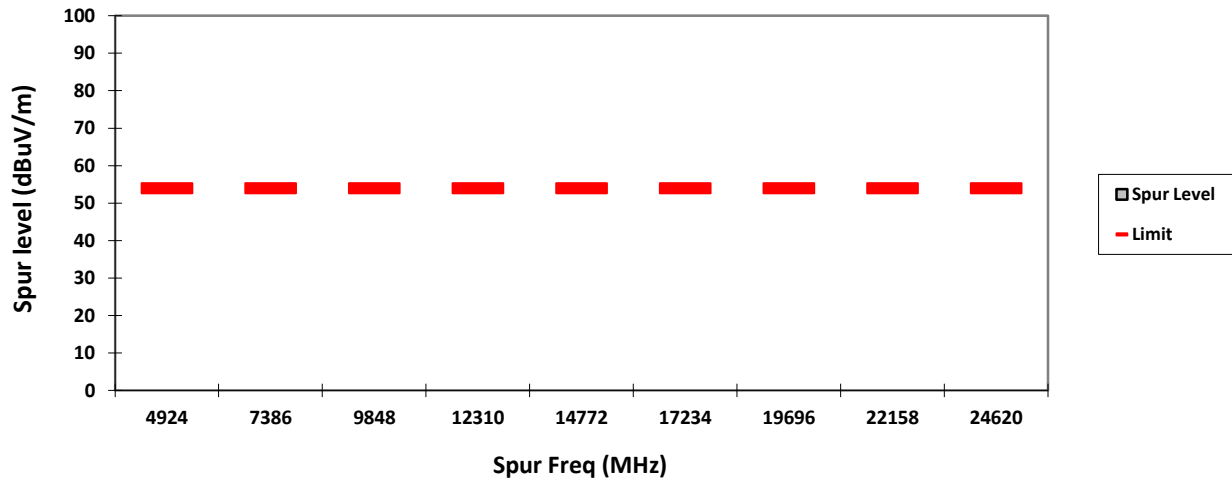


### HORIZONTAL, AV

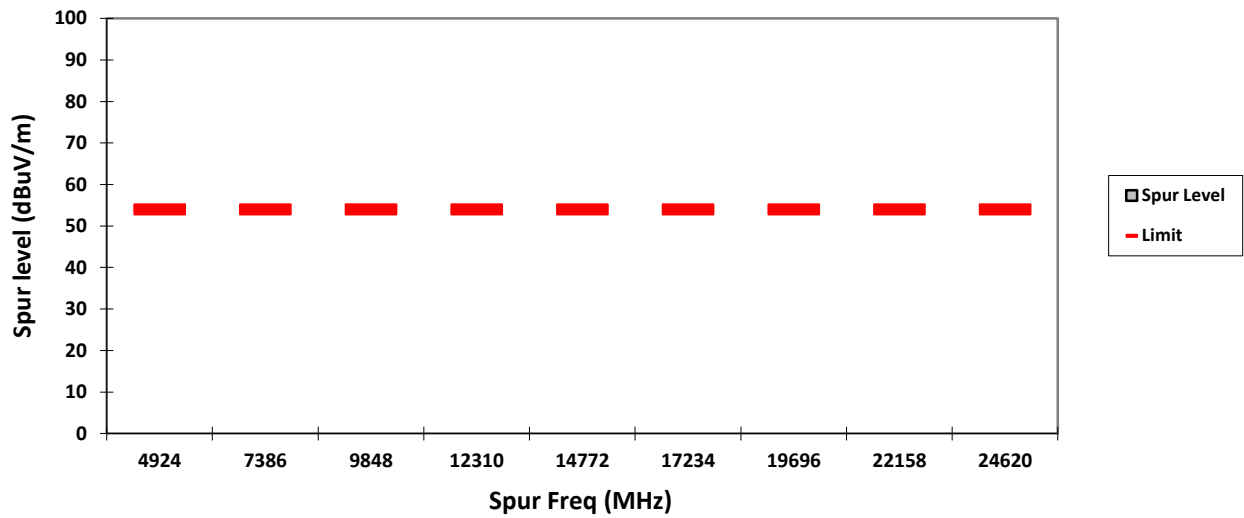





### VERTICAL, QPK

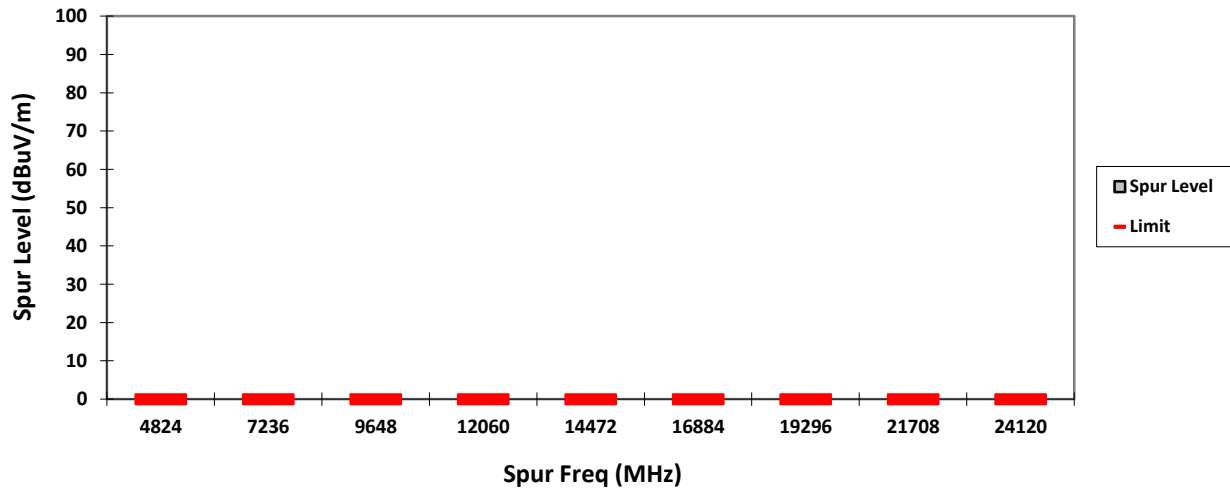


### HORIZONTAL, QPK

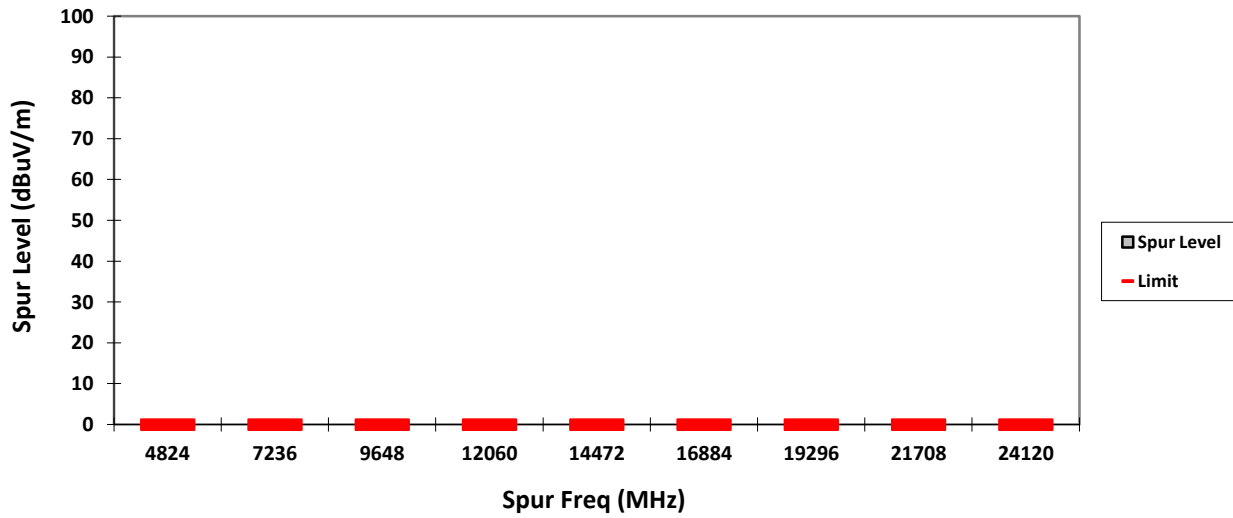


### VERTICAL, PK

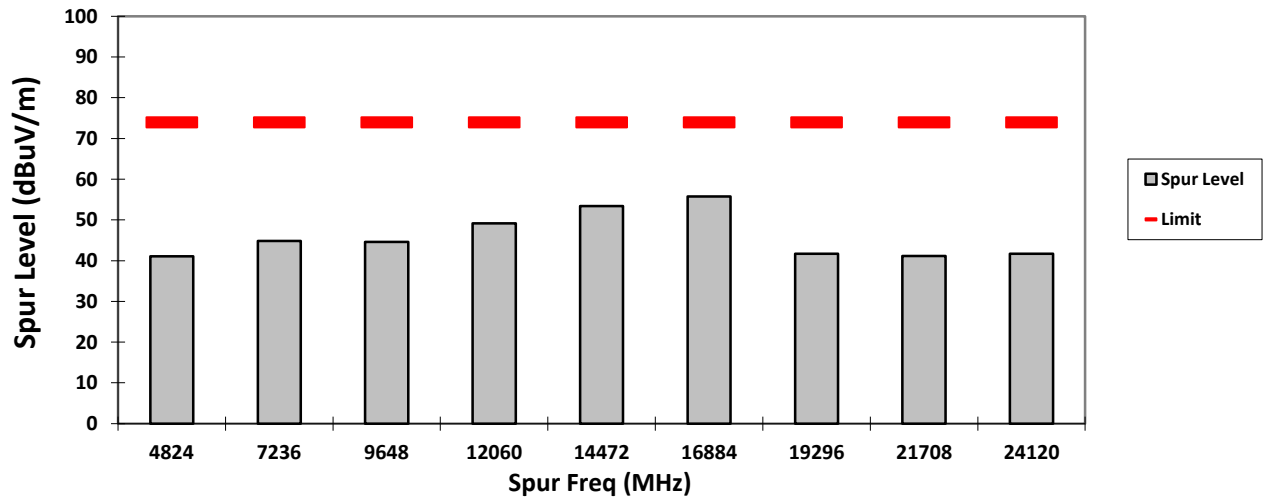


### HORIZONTAL, PK

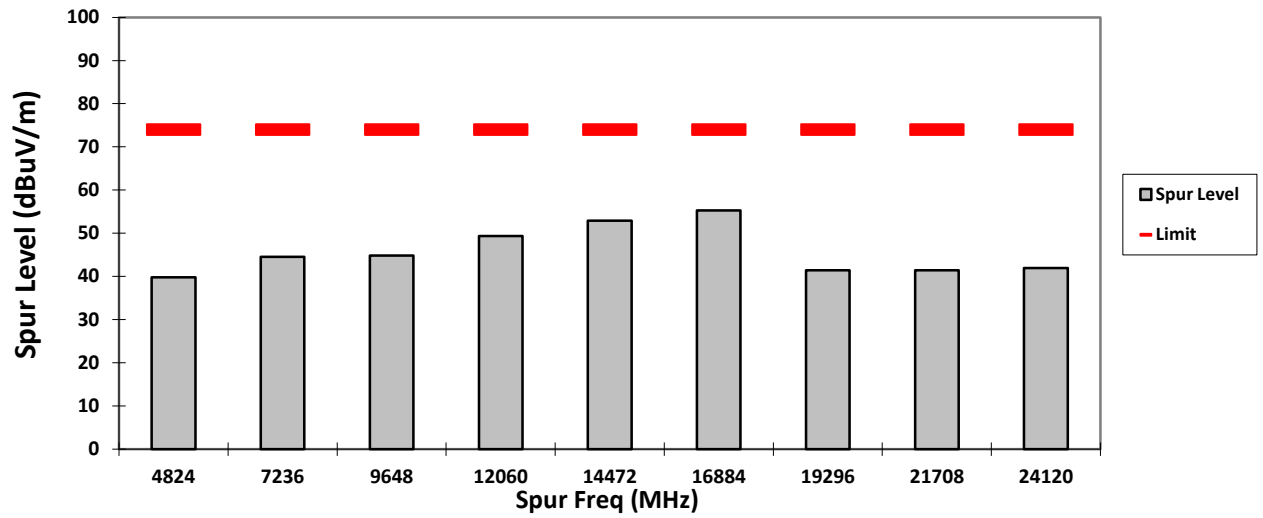

### VERTICAL, AV

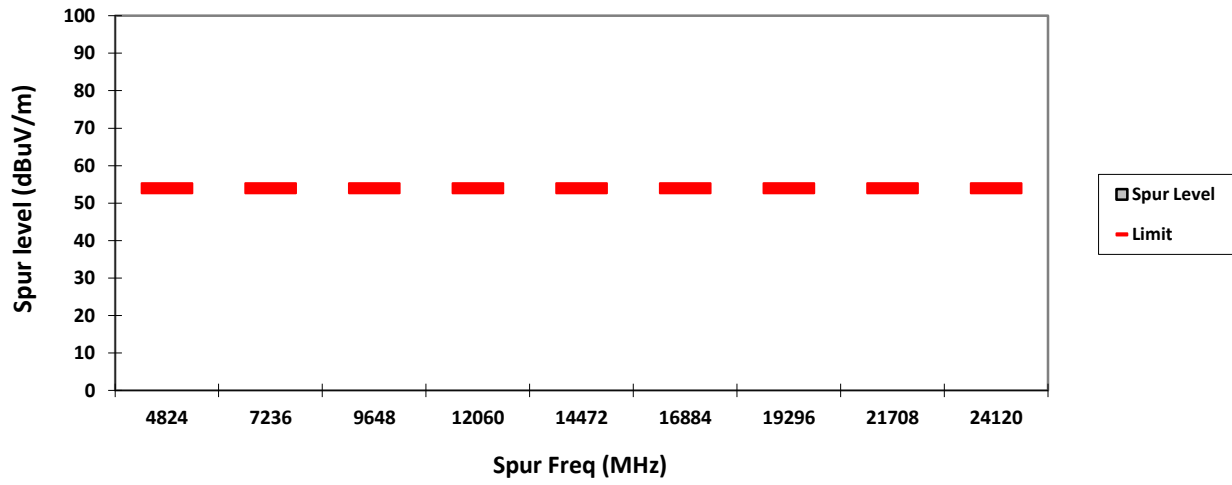

### HORIZONTAL, AV

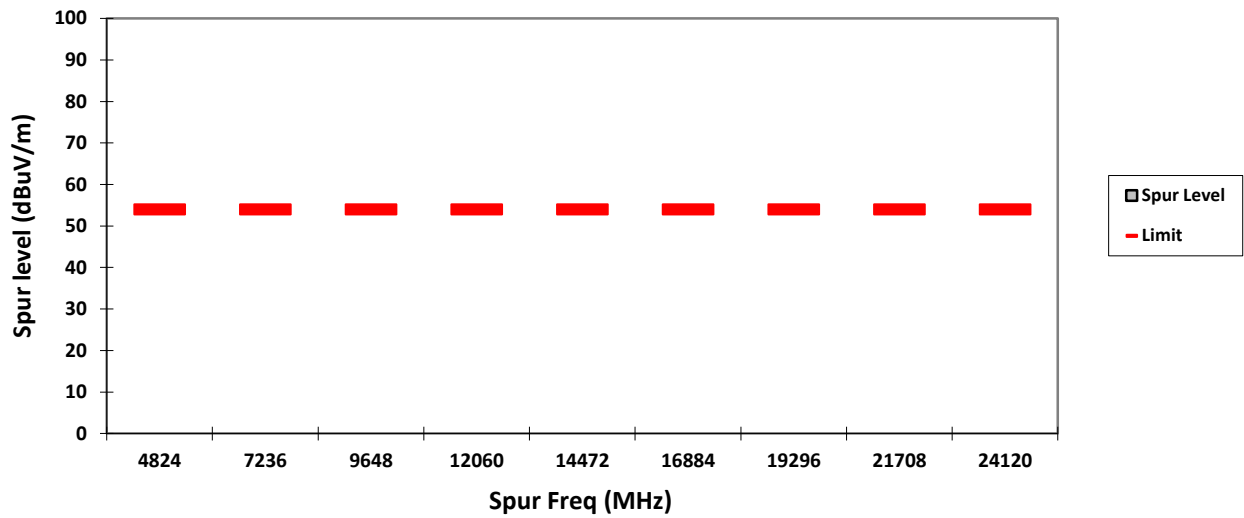

**Test: WIFI SAC Transmitter Radiated Emission**  
**Model#: H92QDH9PW7AN**      **S/N: 837TSX0063**      **EMC SR ID#: 05756-EMC-00019**  
**Battery: PMNN4493A**      **Accessory: NA**  
**Test Channel: Mid**      **Test Frequency: 2437.00 MHz**      **Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (802.11n)**

**Radiated Emission (Mid Channel) tabular data**


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4874	-	40.7504**	**	-	74	54	-	33.25**	-	-
7311	-	44.8963**	**	-	74	54	-	29.10**	-	-
9748	-	43.2344**	**	-	74	54	-	30.77**	-	-
12185	-	50.7330**	**	-	74	54	-	23.27**	-	-
14622	-	50.8582**	**	-	74	54	-	23.14**	-	-
17059	-	55.0839**	**	-	74	54	-	18.92**	-	-
19496	-	40.2715**	**	-	74	54	-	33.73**	-	-
21933	-	42.5131**	**	-	74	54	-	31.49**	-	-
24370	-	42.4185**	**	-	74	54	-	31.58**	-	-

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 23.4      Humidity (%): 71.6  
 Test Performed by: Nazrin&Qawiman      Test Date: Tue, Nov 29, 2016  
 System MU: 5.01dB      Duty Cycle (%): > 98%

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.

### VERTICAL, QPK

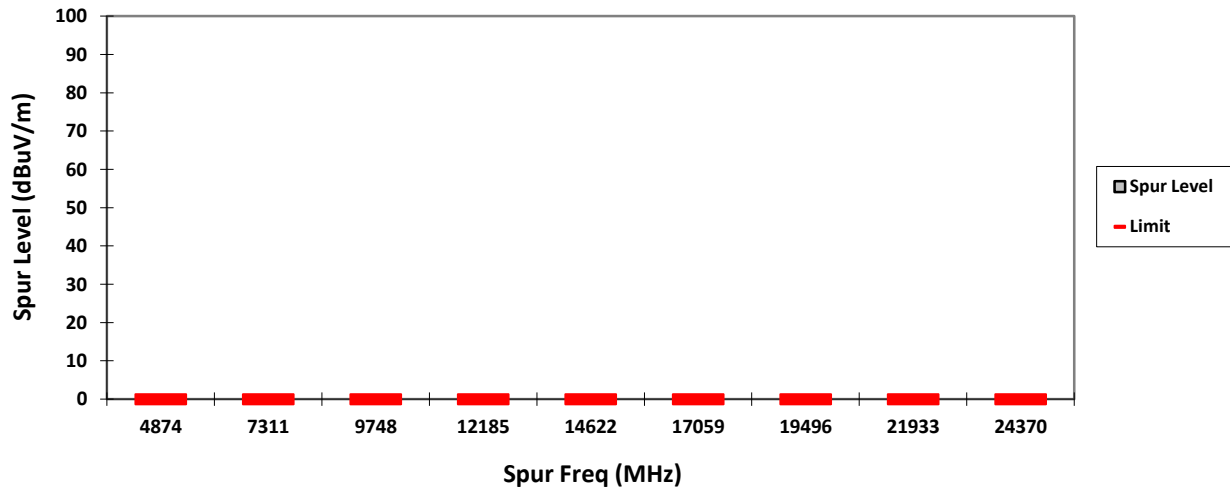


### HORIZONTAL, QPK

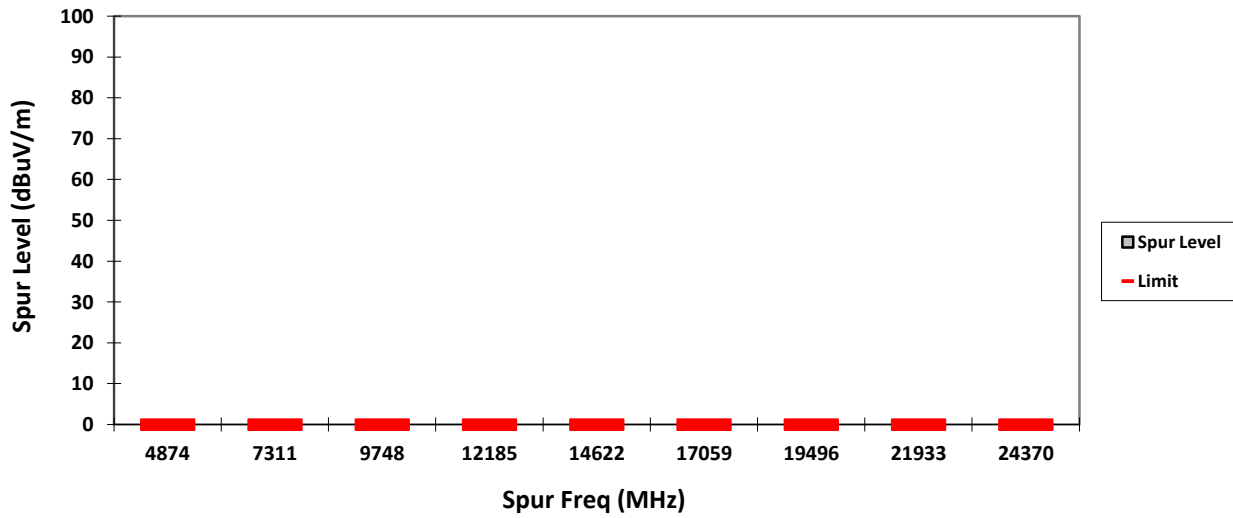





**VERTICAL, PK**

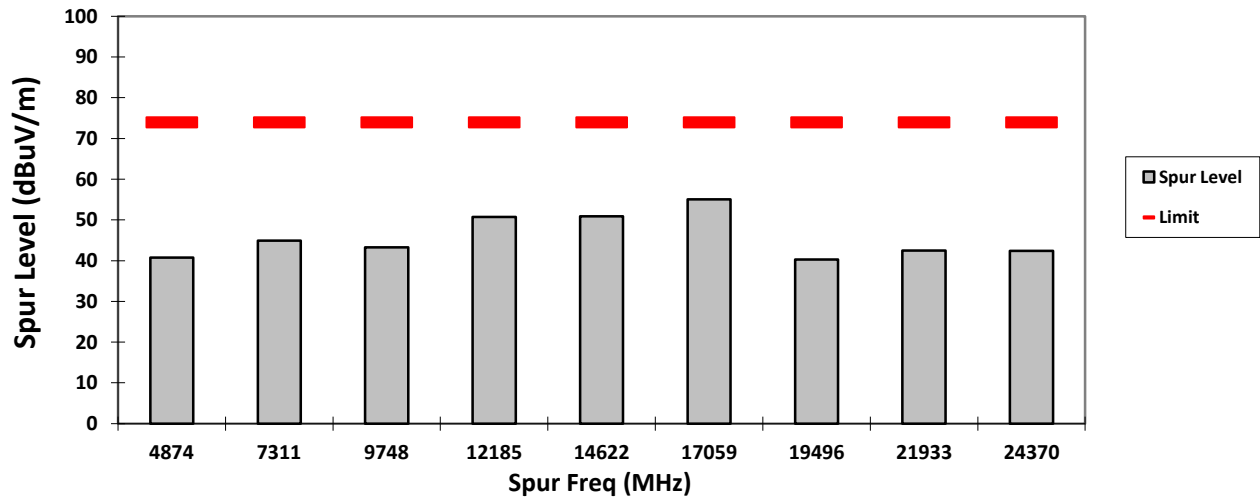


**HORIZONTAL, PK**

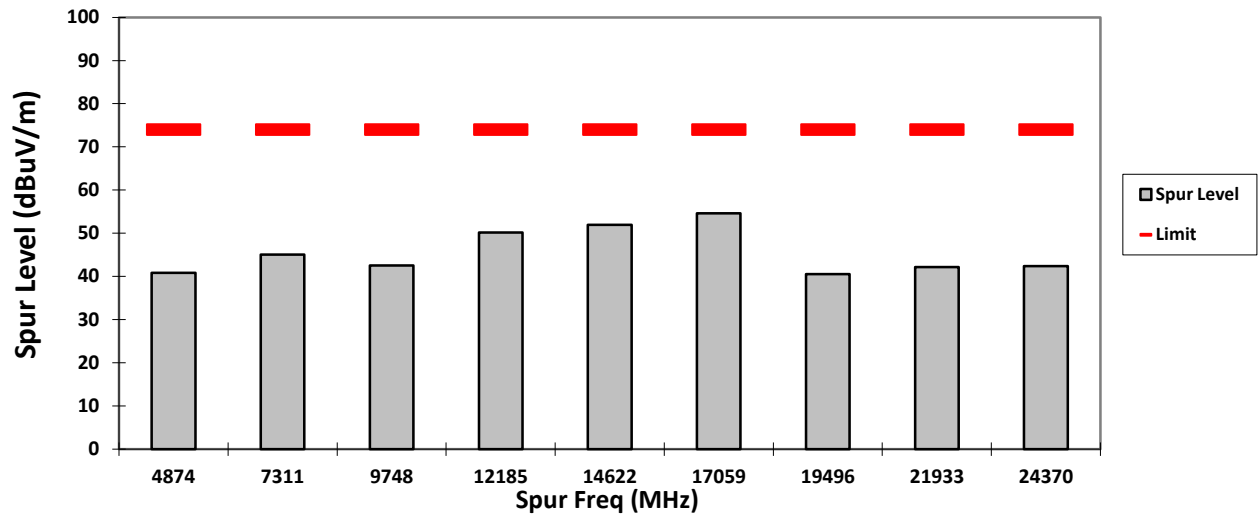

### VERTICAL, AV

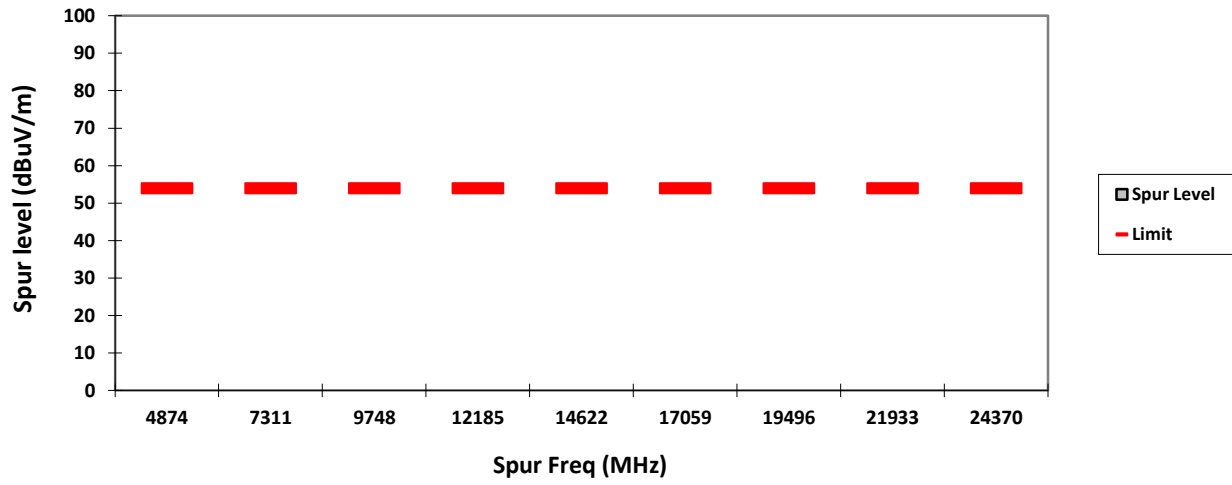

### HORIZONTAL, AV

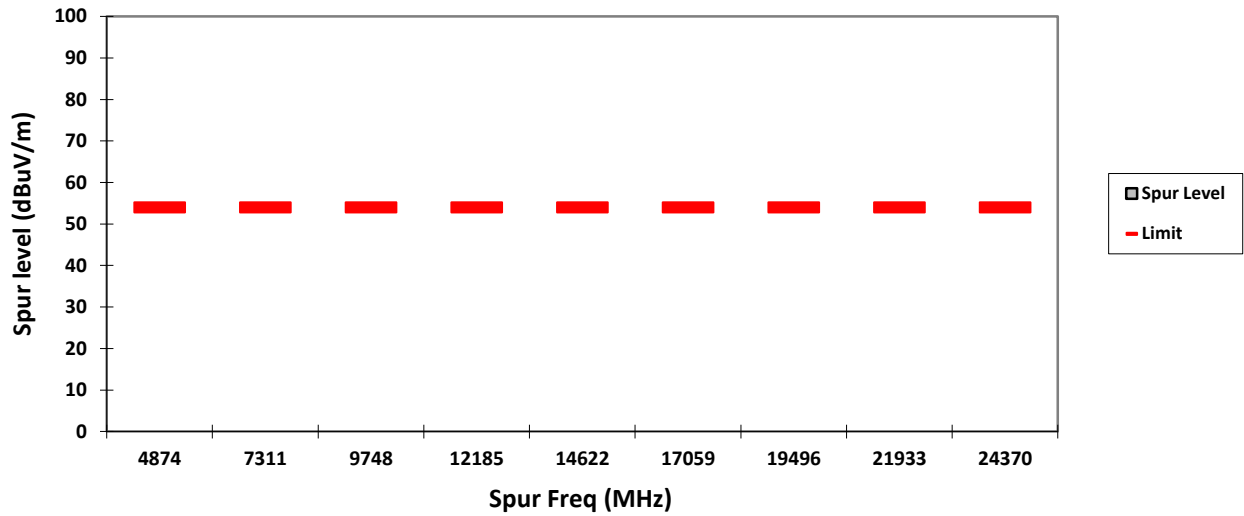

**Test: WIFI SAC Transmitter Radiated Emission**  
**Model#: H92QDH9PW7AN**      **S/N: 837TSX0063**      **EMC SR ID#: 05756-EMC-00019**  
**Battery: PMNN4493A**      **Accessory: NA**  
**Test Channel: High**      **Test Frequency: 2462.00 MHz**      **Test Standard: ANSI C63.10-2013**  
**Worst Case Plane: X-Plane (802.11n)**

**Radiated Emission (High Channel) tabular data**


Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dB $\mu$ V/m)	Spur level PK (dB $\mu$ V/m)	Spur level AV (dB $\mu$ V/m)	Limit QPK (dB $\mu$ V/m)	Limit PK (dB $\mu$ V/m)	Limit AV (dB $\mu$ V/m)	Margin QPK (dB $\mu$ V/m)	Margin PK (dB $\mu$ V/m)	Margin AV (dB $\mu$ V/m)	Carrier PK Power (dB $\mu$ V/m)
4924	-	40.9618**	**	-	74	54	-	33.04**	-	-
7386	-	45.0224**	**	-	74	54	-	28.98**	-	-
9848	-	40.9968**	**	-	74	54	-	33.00**	-	-
12310	-	50.3528**	**	-	74	54	-	23.65**	-	-
14772	-	50.7144**	**	-	74	54	-	23.29**	-	-
17234	-	53.8029**	**	-	74	54	-	20.20**	-	-
19696	-	42.3989**	**	-	74	54	-	31.60**	-	-
22158	-	41.6127**	**	-	74	54	-	32.39**	-	-
24620	-	42.1537**	**	-	74	54	-	31.85**	-	-
Horizontal Radiated Emission Result										
4924	-	41.2732**	**	-	74	54	-	32.73**	-	-
7386	-	45.0146**	**	-	74	54	-	28.99**	-	-
9848	-	40.4401**	**	-	74	54	-	33.56**	-	-
12310	-	50.9382**	**	-	74	54	-	23.06**	-	-
14772	-	50.8984**	**	-	74	54	-	23.10**	-	-
17234	-	53.5670**	**	-	74	54	-	20.43**	-	-
19696	-	41.7699**	**	-	74	54	-	32.23**	-	-
22158	-	41.3261**	**	-	74	54	-	32.67**	-	-
24620	-	42.3255**	**	-	74	54	-	31.67**	-	-

Remarks:	Marginal Result	Fail Result
Pass Result		


Temperature (degC): 23.4      Humidity (%): 71.6  
 Test Performed by: Nazrin&Qawiman      Test Date: Wed, Nov 30, 2016  
 System MU: 5.01dB      Duty Cycle (%): > 98%

Remarks: \*\* Indicates the spurious emission could not be detected due to noise limitation or ambient.


### VERTICAL, QPK

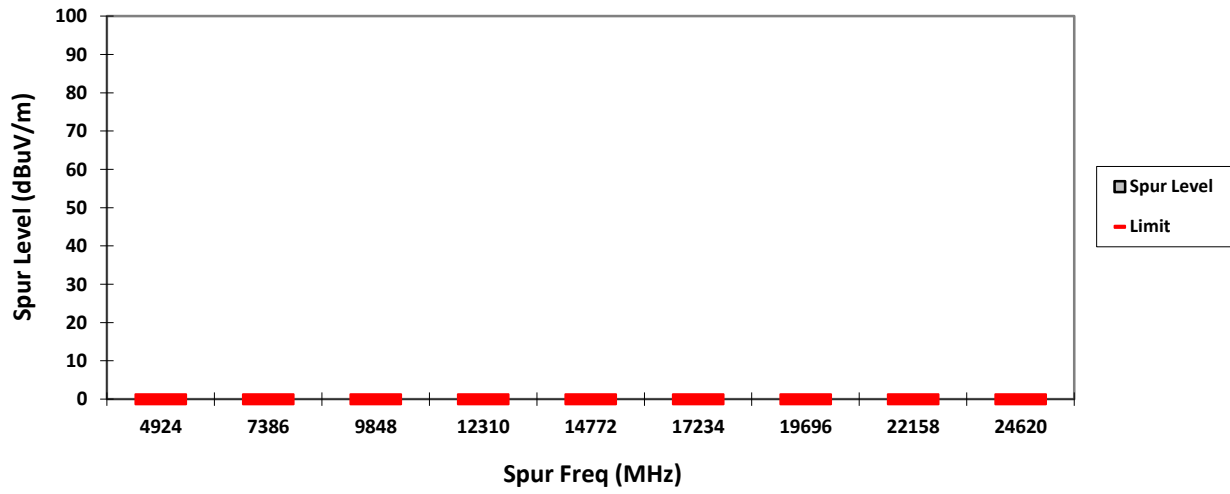


### HORIZONTAL, QPK

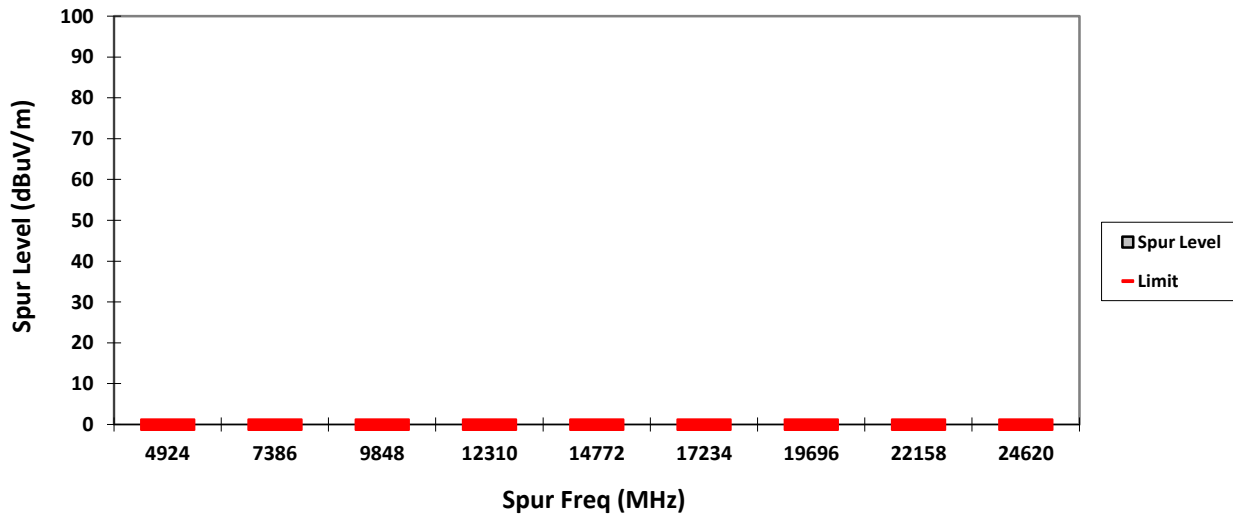


VERTICAL, PK

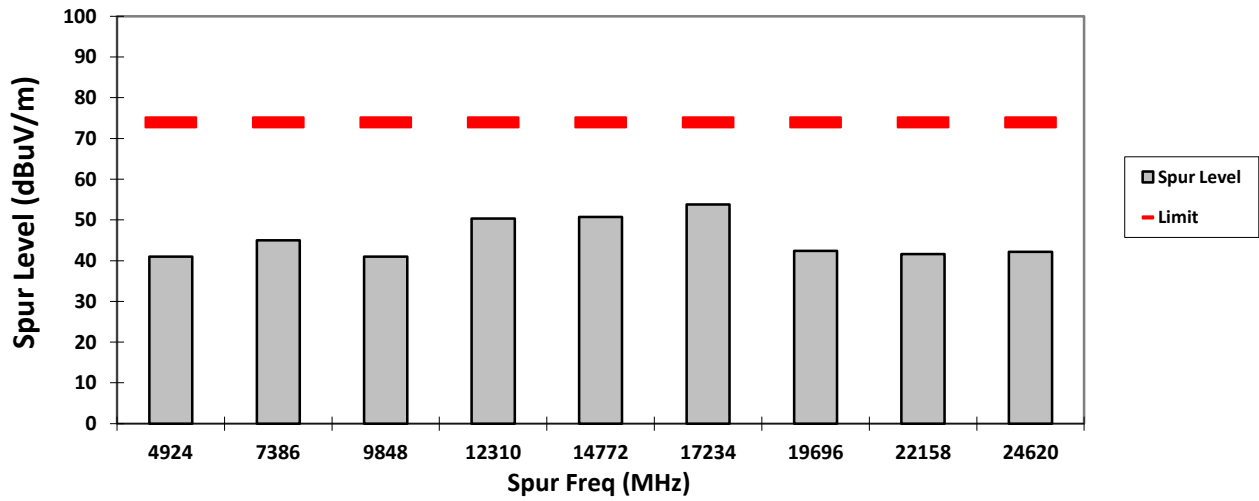


HORIZONTAL, PK

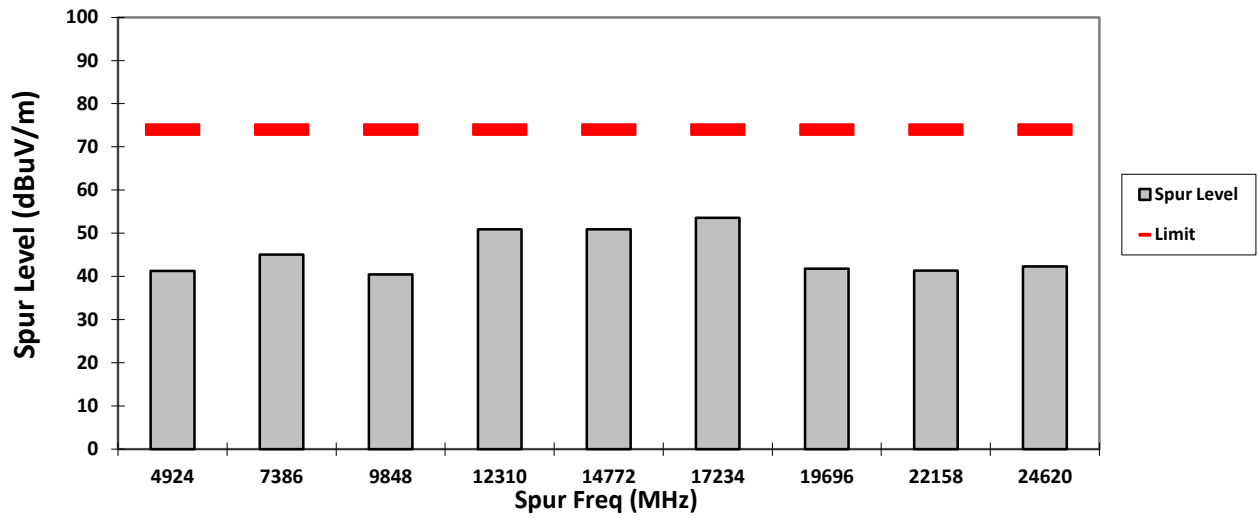

### VERTICAL, AV

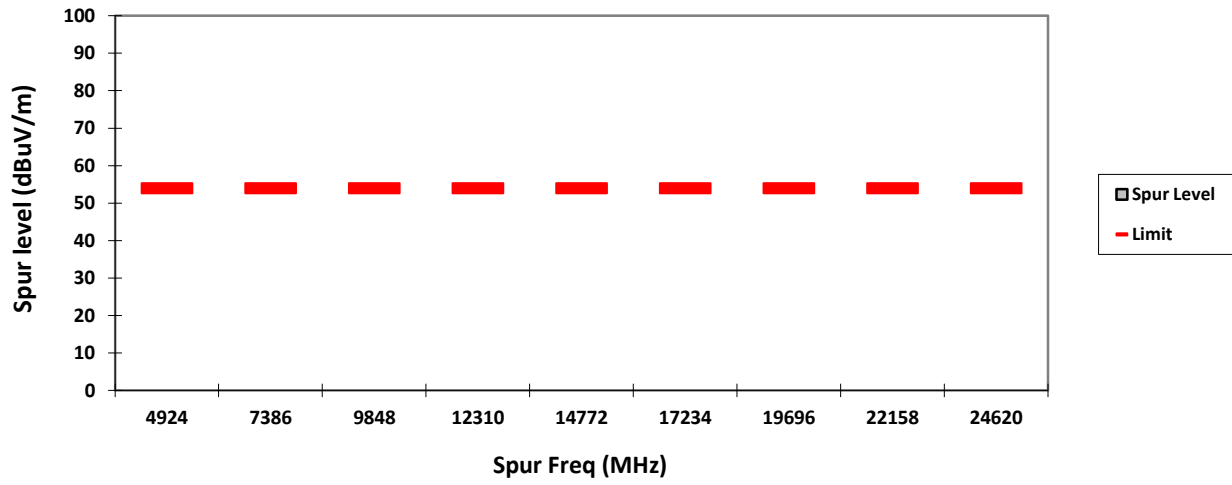


### HORIZONTAL, AV

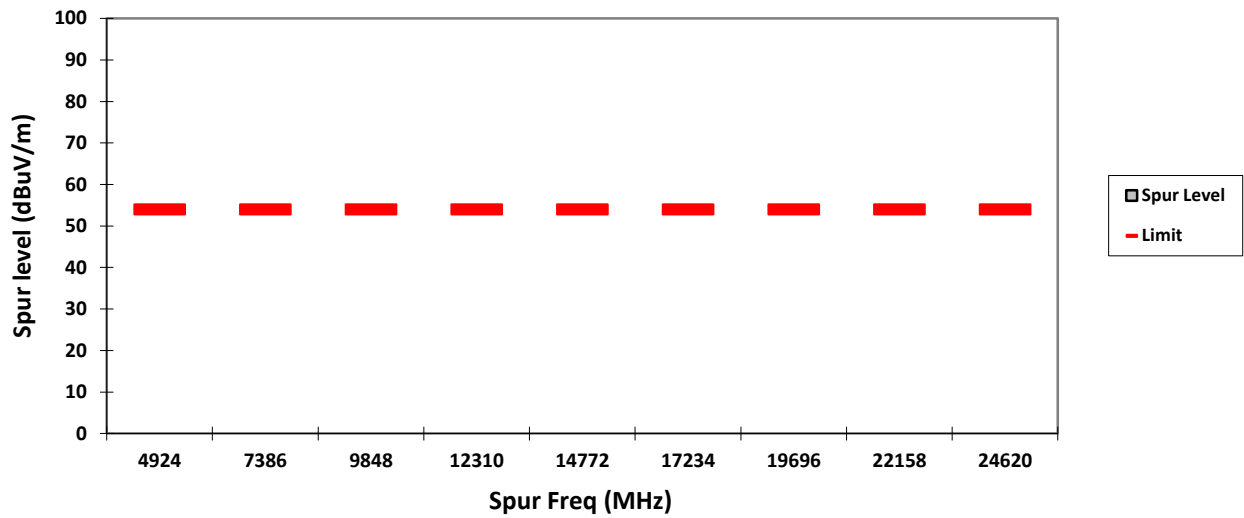

## 6.8. AC Powerline Conducted Emission

### 6.8.1. Test Setup

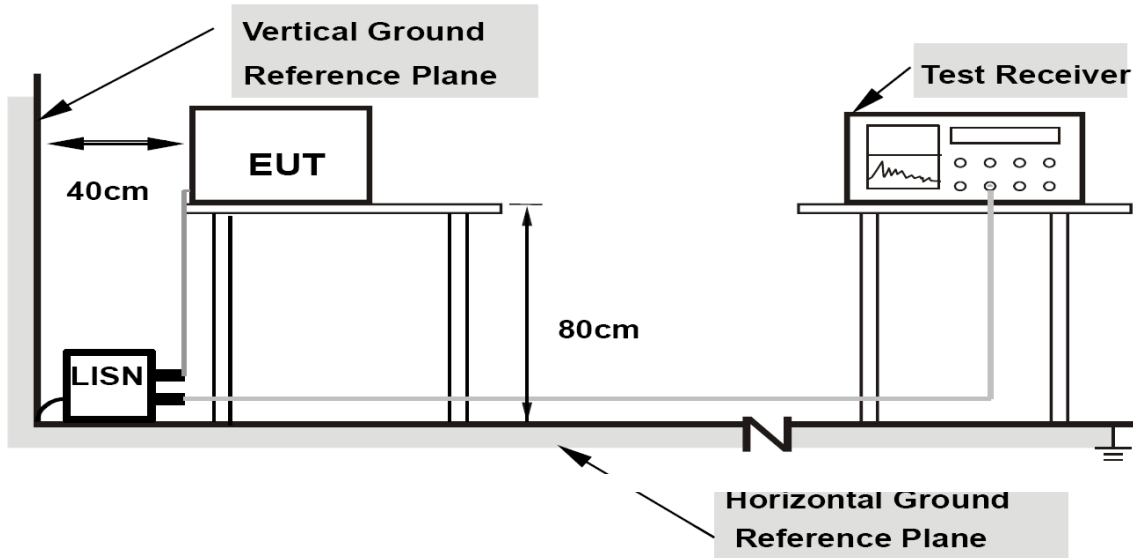

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

### 6.8.2. Test Limits:

**For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.**

**Limits for conducted disturbance at the mains ports of class A ITE**

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

**Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.**

**Limits for conducted disturbance at the mains ports  
of class B ITE**

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE**

### 6.8.3. Test Result

**Not Applicable. Testing is not required, radio shall turn off during charging mode.**