


																																
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Innoplex Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / IC TEST REPORT Report Revision : Rev.A</p>																															
<table border="0"> <tr> <td>Date/s Tested</td> <td>: 1-July-2017 - 2-July-2017</td> <td rowspan="12" style="text-align: center; vertical-align: middle;">  </td> </tr> <tr> <td>Report Issue Date</td> <td>: 3-July-2017</td> </tr> <tr> <td>Manufacturer/Location</td> <td>: Motorola Solutions - Penang</td> </tr> <tr> <td>Requestor</td> <td>: Yee Teng Teoh</td> </tr> <tr> <td>Product Type</td> <td>: Portable</td> </tr> <tr> <td>Model Number</td> <td>: H92SDH9PW7AN</td> </tr> <tr> <td>Frequency Band</td> <td>: 2.402 - 2.480 GHz</td> </tr> <tr> <td>Rated / Max RF Output Power</td> <td>: 8.9 mWatts / 10 mWatts</td> </tr> <tr> <td>Applicant Name</td> <td>: Motorola Solution Malaysia Sdn Bhd</td> </tr> <tr> <td>Applicant Address</td> <td>: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td>FCC Registrations</td> <td>: 772092</td> </tr> <tr> <td>IC Registrations</td> <td>: 109AK</td> </tr> </table> <p>The equipment was tested accordance to the requirement listed below:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;">(2.4GHz BT LE)</td> <td style="text-align: right;">PASS</td> </tr> <tr> <td>Part 15C</td> <td></td> </tr> <tr> <td>IC RSS 247</td> <td></td> </tr> </table>		Date/s Tested	: 1-July-2017 - 2-July-2017		Report Issue Date	: 3-July-2017	Manufacturer/Location	: Motorola Solutions - Penang	Requestor	: Yee Teng Teoh	Product Type	: Portable	Model Number	: H92SDH9PW7AN	Frequency Band	: 2.402 - 2.480 GHz	Rated / Max RF Output Power	: 8.9 mWatts / 10 mWatts	Applicant Name	: Motorola Solution Malaysia Sdn Bhd	Applicant Address	: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia	FCC Registrations	: 772092	IC Registrations	: 109AK	(2.4GHz BT LE)	PASS	Part 15C		IC RSS 247	
Date/s Tested	: 1-July-2017 - 2-July-2017																															
Report Issue Date	: 3-July-2017																															
Manufacturer/Location	: Motorola Solutions - Penang																															
Requestor	: Yee Teng Teoh																															
Product Type	: Portable																															
Model Number	: H92SDH9PW7AN																															
Frequency Band	: 2.402 - 2.480 GHz																															
Rated / Max RF Output Power	: 8.9 mWatts / 10 mWatts																															
Applicant Name	: Motorola Solution Malaysia Sdn Bhd																															
Applicant Address	: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia																															
FCC Registrations	: 772092																															
IC Registrations	: 109AK																															
(2.4GHz BT LE)	PASS																															
Part 15C																																
IC RSS 247																																
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																																
<p>Prepared By:</p> <p>_____</p> <p>Jino Lim Test Personnel</p>	<p>Approved By:</p> <p>_____</p> <p>Goh Aik Hong Responsible Engineer</p>																															

Table of Contents

1.0 General Information	3
2.0 Summary of Test Results.....	4
3.0. Measurement Uncertainty	4
4.0 Equipment List	5
5.0 Test Mode Applicability and Test Channel Detail	6
6.0 Transmitter Test Parameters.....	7
6.1 6dB Channel Bandwidth.....	7
6.1.1 Test Setup.....	7
6.1.2 Test Limits:	7
6.1.3 Test Data:	7
6.2 Maximum Peak Conducted RF Output Power	9
6.2.1 Test Setup.....	9
6.2.2 Test Limits:	9
6.2.3 Test Data:	9
6.3 Maximum Peak Power Spectral Density	11
6.3.1 Test Setup.....	11
6.3.2 Test Limits:	11
6.3.3 Test Result	12
6.4 Conducted Spurious Emission.....	13
6.4.1 Test Setup.....	13
6.4.2 Test Limits:	13
6.4.3 Test Result	13
6.5 Band edge Conducted Spurious Emission.....	20
6.5.1 Test Setup.....	20
6.5.2 Test Limits:	20
6.5.3 Test Result	20
6.6 Radiated Emission within Restricted Bands.....	22
6.6.1 Test Setup.....	22
6.6.2 Test Limits:	23
6.6.3 Test Results:.....	24
6.7 AC Powerline Conducted Emission	25
6.7.1 Test Setup.....	25
6.7.2 Test Limits:	25
6.7.3 Test Result	26

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	3-July-2017	Jino Lim

1.0 General Information

EUT Description:

Technologies	2.4GHz BT LE
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK
Input/Output	RF Port
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	ANTENNA, CHIP, GLONASS BT/GPS ANTENNA MODULE

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
IMPRES 3000 MAH, LI-ION HIGH CAPACITY BATTERY, LOW VOLTAGE, IP68.	MOTOROLA	PMNN4493
PROGRAMMING, TEST & ALIGNMENT CABLE	MOTOROLA	PMKN4013

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.10-2013

2.0 Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark
15.247 (b)(2)	RSS-247 5.2(1)	6dB Channel Bandwidth	Pass	NA
15.247 (a)(3)	RSS-247 5.1(4)	Conducted RF Output Power (Average)	Pass	NA
15.247(e)	RSS-247 5.2(2)	Maximum Power Spectral Density	Pass	NA
15.247(b)	RSS-247 5.5	Conducted Spurious Emissions	Pass	NA
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	Pass	NA
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	NA
15.207	RSS-Gen 8.8	AC Powerline Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode
15.203	-	Antenna requirement	NA	Internal antenna is not accessible to the end-user

3.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.9_R1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	E4445A	MY46181597	21-Dec-16	21-Dec-18
POWER SUPPLY	6652A	3541A02403	7-Sep-15	7-Sep-17
SPECTRUM ANALYZER	FSEK30	838495/014	29-Jun-16	29-Jun-18

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
Test Mode	0 to 39	0,19,39	GFSK

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
Test Mode	0 to 39	0,19,39	GFSK

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
Application Mode	0 to 39	AUTO	AUTO

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
Test Mode	0 to 39	0,19,39	GFSK

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup

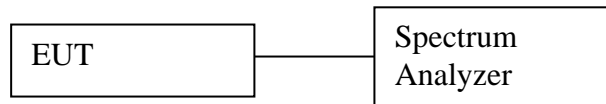


- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.

6.1.2 Test Limits:


Normal Condition (25 ° C)
≥500 kHz

6.1.3 Test Data:


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	0.7530	1.0576	Pass
Bluetooth L.E	GFSK	2440	0.7554	1.0593	Pass
Bluetooth L.E	GFSK	2480	0.7500	1.0570	Pass

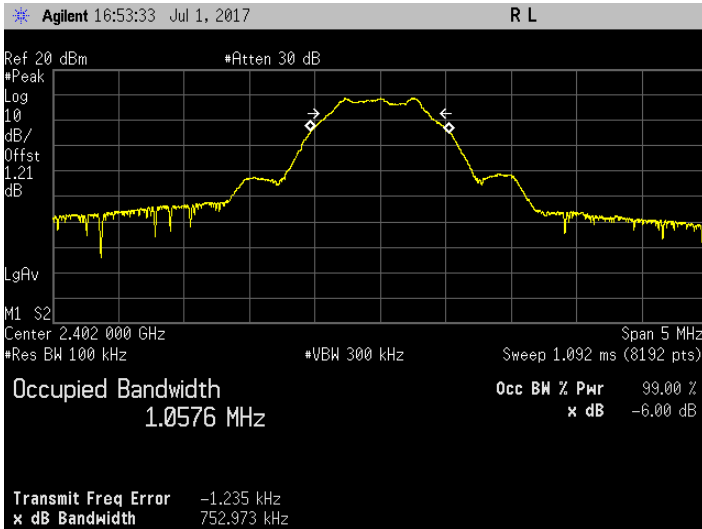


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

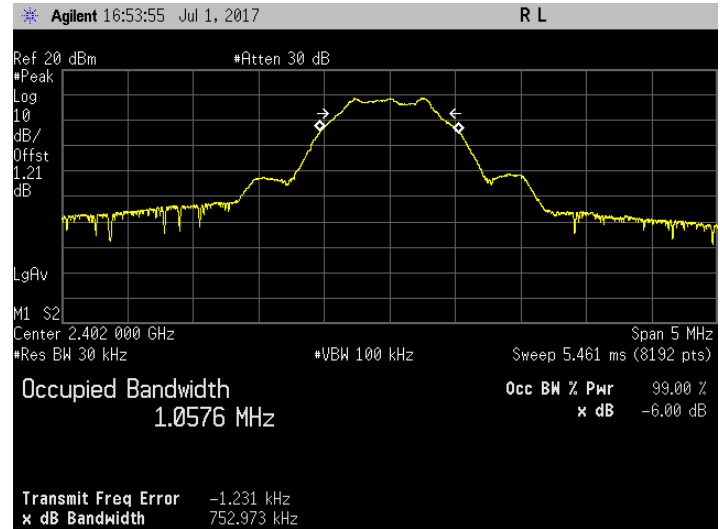


99% Bandwidth. Bluetooth LE Frequency 2402 MHz

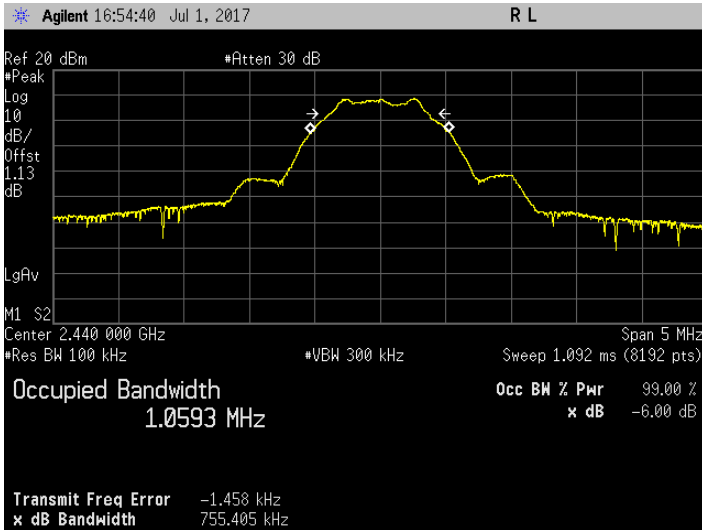


6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

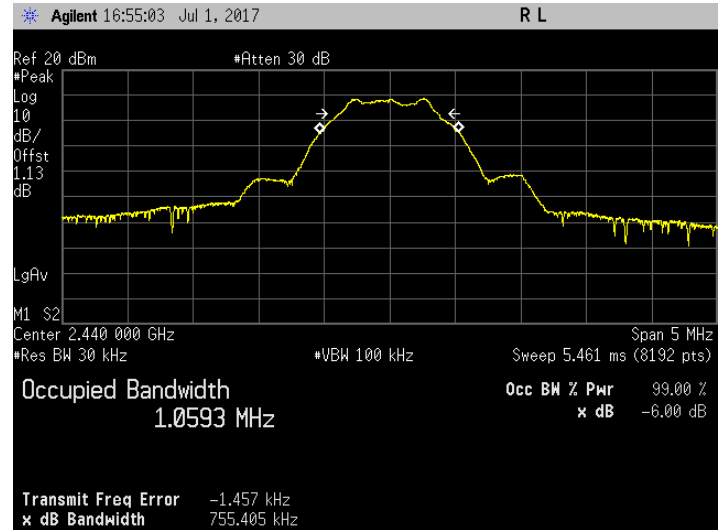

99% Bandwidth. Bluetooth LE Frequency 2440 MHz

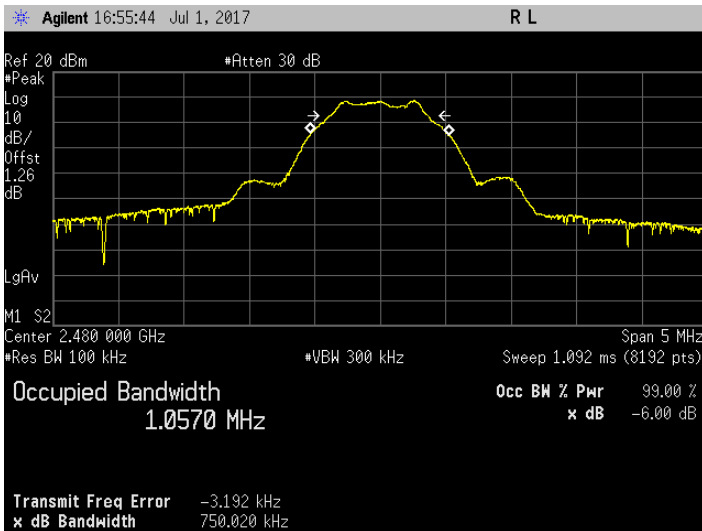


6dB Bandwidth. Bluetooth LE Frequency 2480 MHz

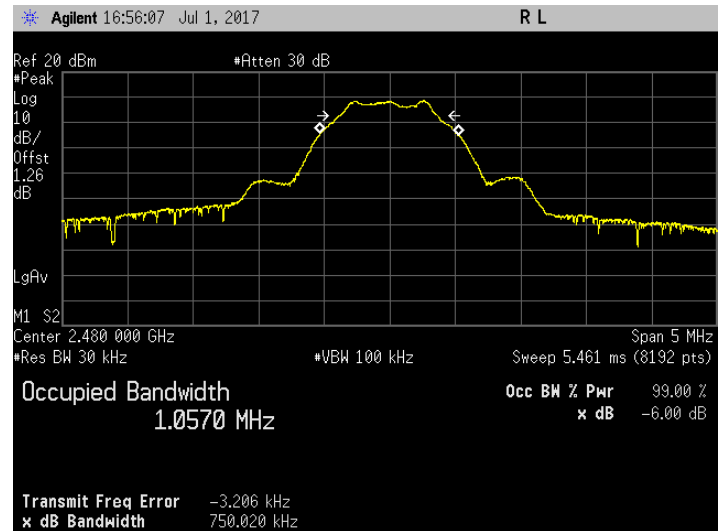

99% Bandwidth. Bluetooth LE Frequency 2480 MHz

6.2 Maximum Peak Conducted RF Output Power

6.2.1 Test Setup

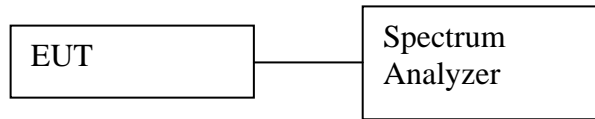

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW \geq DTS bandwidth.
 - b. Set the VBW \geq $[3 \times \text{RBW}]$.
 - c. Set the span \geq $[3 \times \text{RBW}]$.
 - d. Detector = peak.
 - e. Sweep time = auto couple.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
 - h. Use peak marker function to determine the peak amplitude level.


6.2.2 Test Limits:

Normal Condition (25 ° C)
≤ 1 Watt(30 dBm)


6.2.3 Test Data:

Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	9.53	Pass
Bluetooth L.E	GFSK	2440	9.63	Pass
Bluetooth L.E	GFSK	2480	9.41	Pass


i. The Conducted RF Output Power test with result at low frequency.

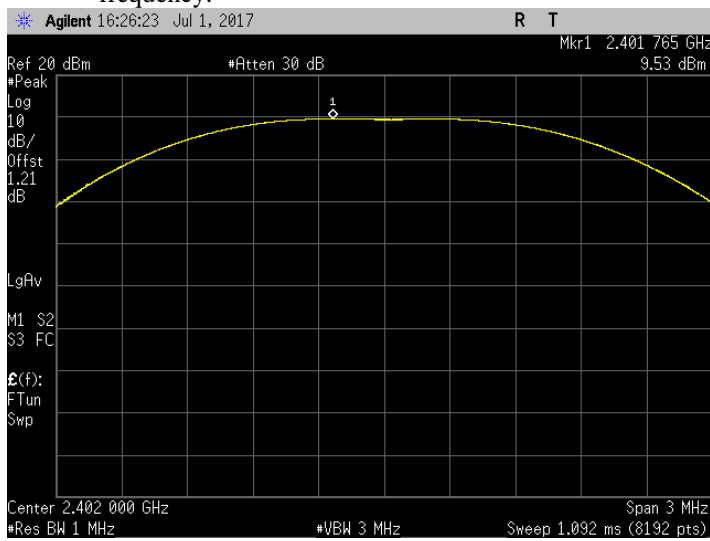

ii. The Conducted RF Output Power test with result at mid frequency.

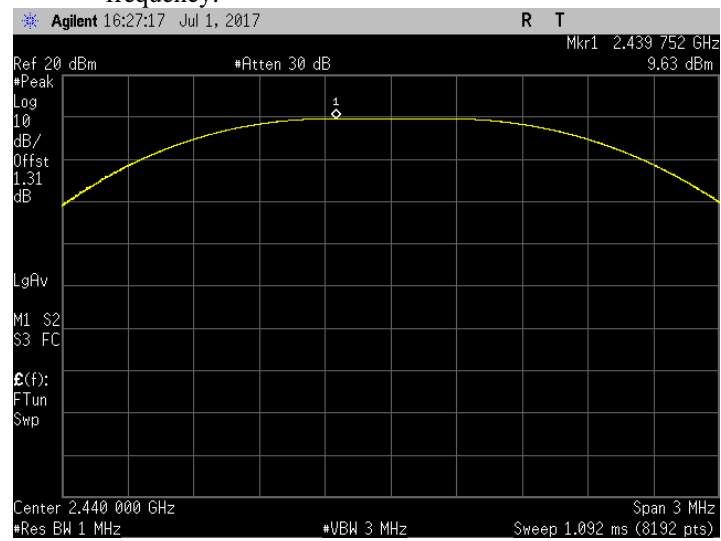


iii. The Conducted RF Output Power test with result at high frequency.

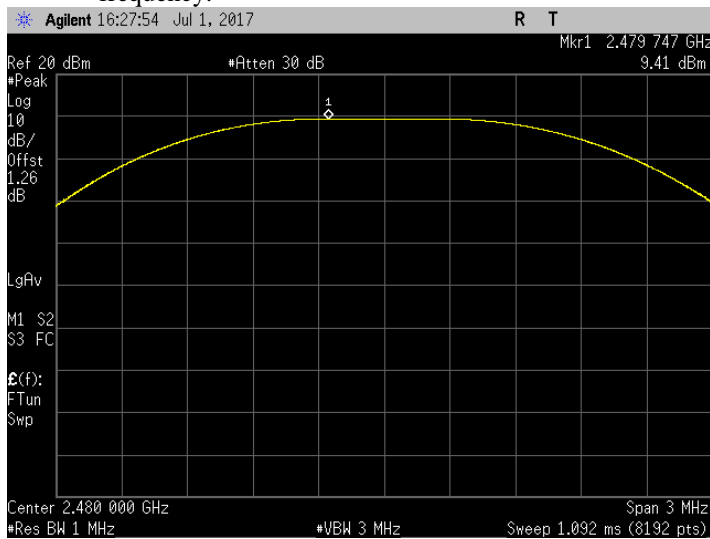

6.3 Maximum Peak Power Spectral Density

6.3.1 Test Setup

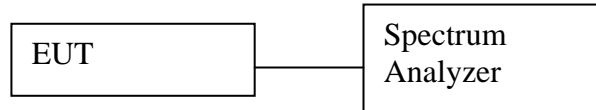

Maximum Peak


- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.3.2 Test Limits:


Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$

6.3.3 Test Result


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2402	-5.38	Pass
Bluetooth L.E.	GFSK	2440	-5.50	Pass
Bluetooth L.E.	GFSK	2480	-5.56	Pass

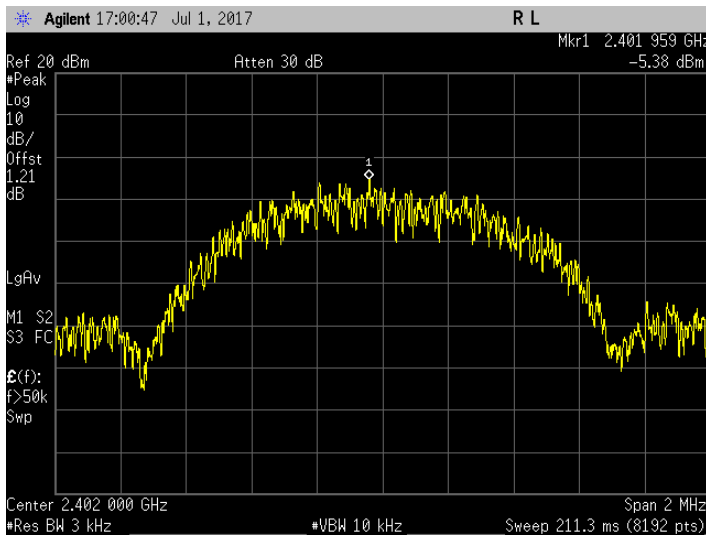

Maximum Power Spectral Density. Bluetooth LE Frequency 2402 MHz

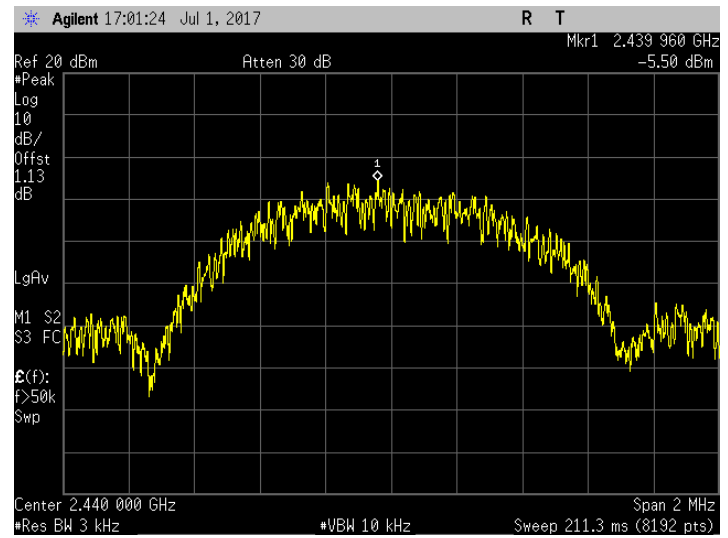


Maximum Power Spectral Density. Bluetooth LE Frequency 2440 MHz

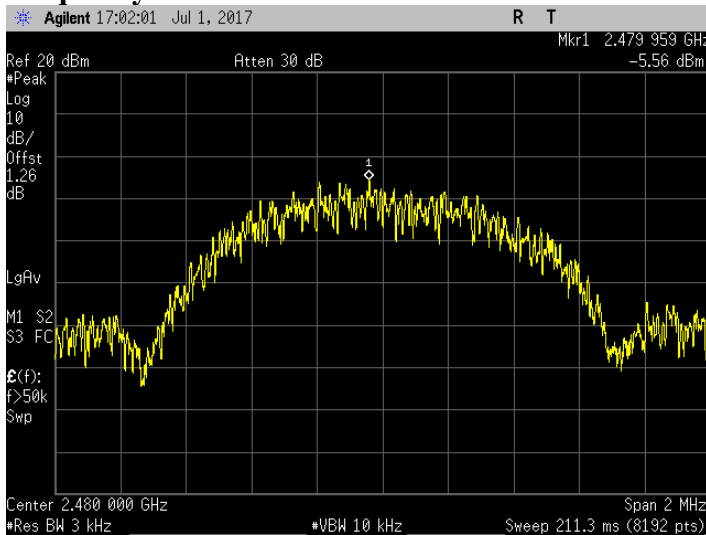

Maximum Power Spectral Density. Bluetooth LE Frequency 2480 MHz

6.4 Conducted Spurious Emission

6.4.1 Test Setup




- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10th harmonic.

6.4.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.


6.4.3 Test Result

Test Conditions			Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth L.E.	GFSK	2402	6693.39	-50.35	Pass
			14188.38	-49.81	Pass
			6643.29	-50.53	Pass
Bluetooth L.E.	GFSK	2440	14198.40	-50.74	Pass
			6673.35	-50.94	Pass
			6953.91	-50.44	Pass
Bluetooth L.E.	GFSK	2480	6993.99	-49.93	Pass
			14188.38	-49.52	Pass
			6973.95	-50.32	Pass

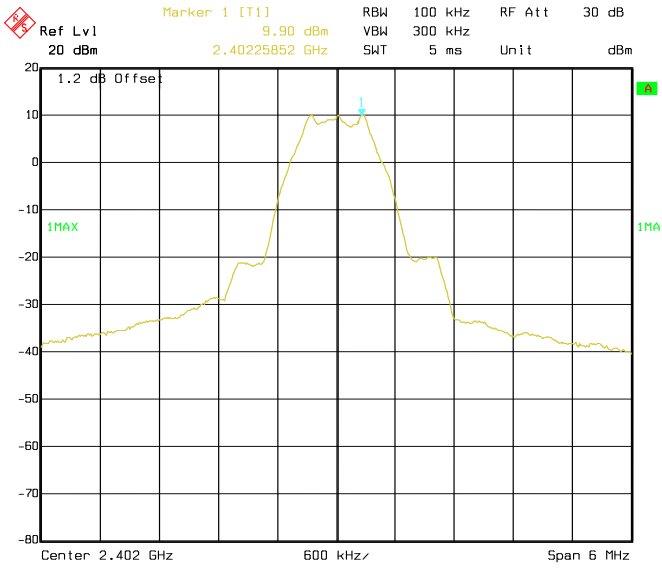


Date: 02.JUL.2017 09:55:07

Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Reference Level

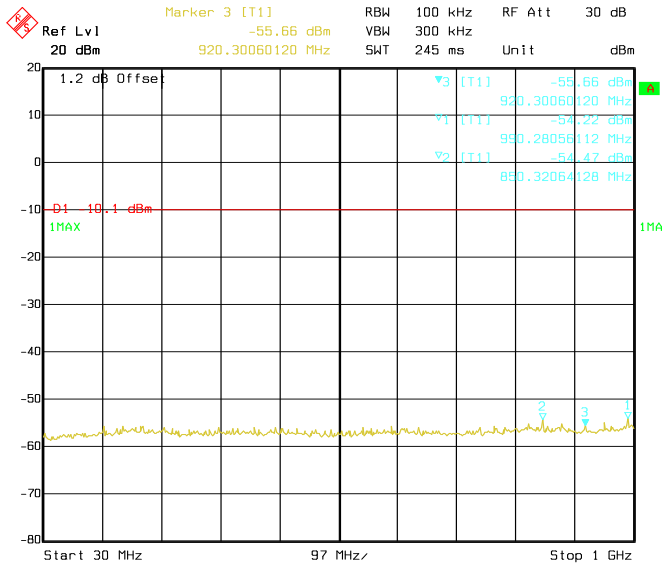


Date: 02.JUL.2017 09:57:19

Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 30 MHz -> 1 GHz

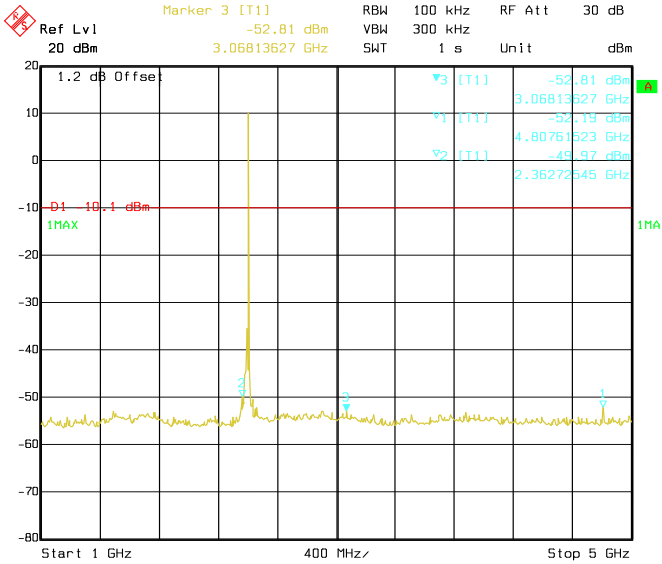


Date: 02.JUL.2017 09:58:34

Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 1 GHz -> 5 GHz

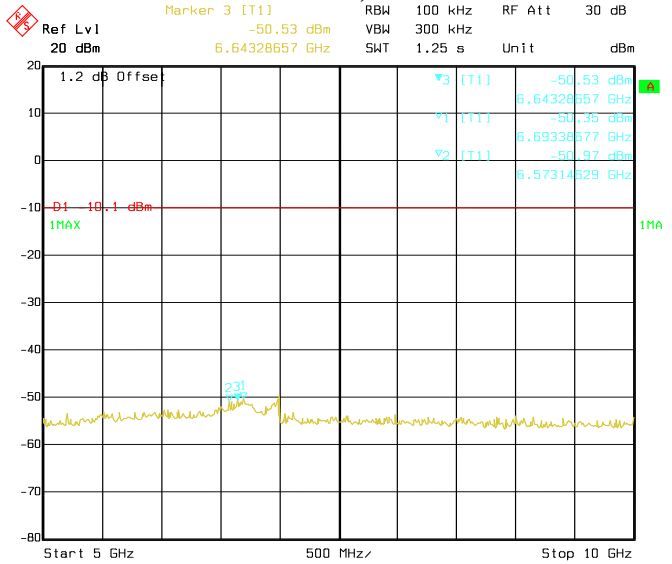


Date: 02.JUL.2017 09:59:17

Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 5 GHz -> 10 GHz

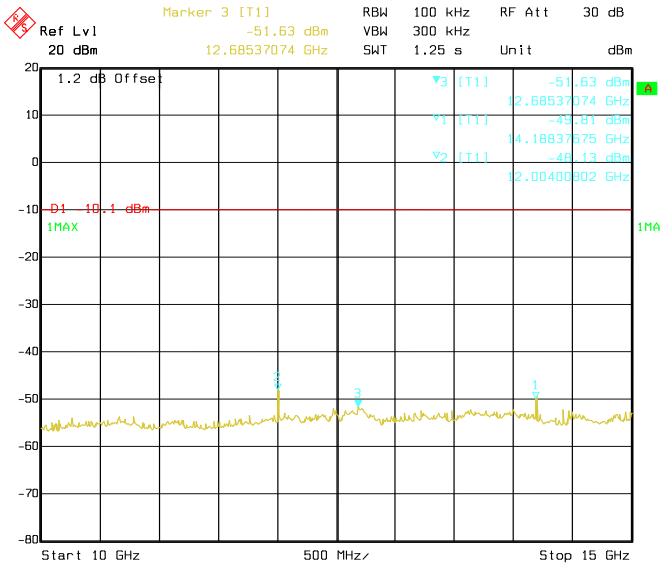


Date: 02.JUL.2017 09:59:56

Conducted Emissions. Bluetooth LE, Frequency 2402 Emission Level, 10 GHz -> 15 GHz

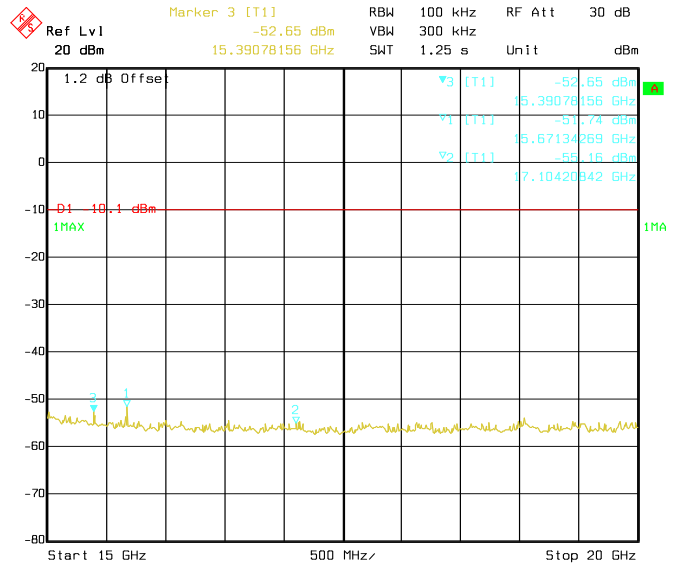


Date: 02.JUL.2017 10:00:35

Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 15 GHz -> 20 GHz

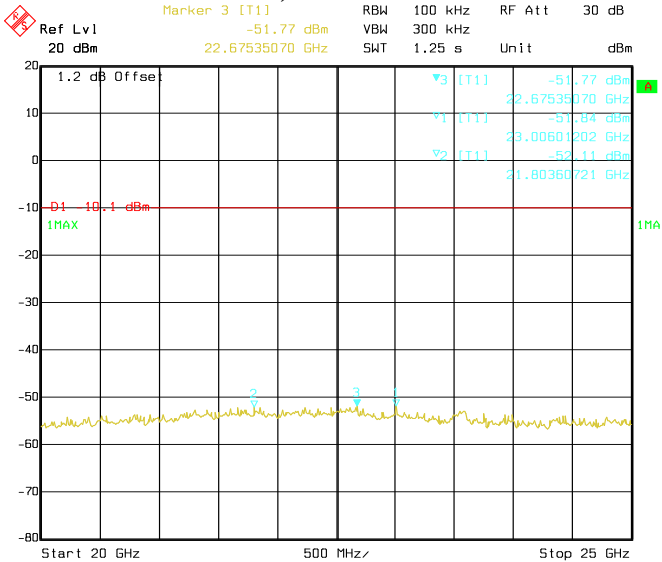


Date: 02.JUL.2017 10:01:29

Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 20 GHz -> 25 GHz

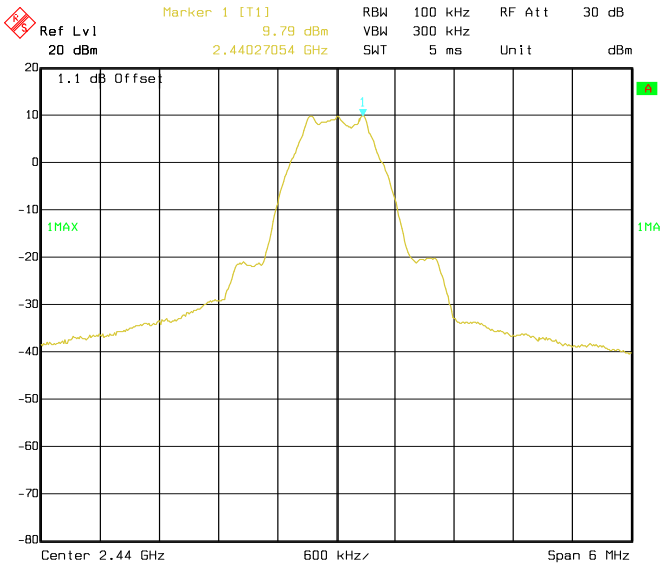


Date: 02.JUL.2017 10:06:23

Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Reference Level

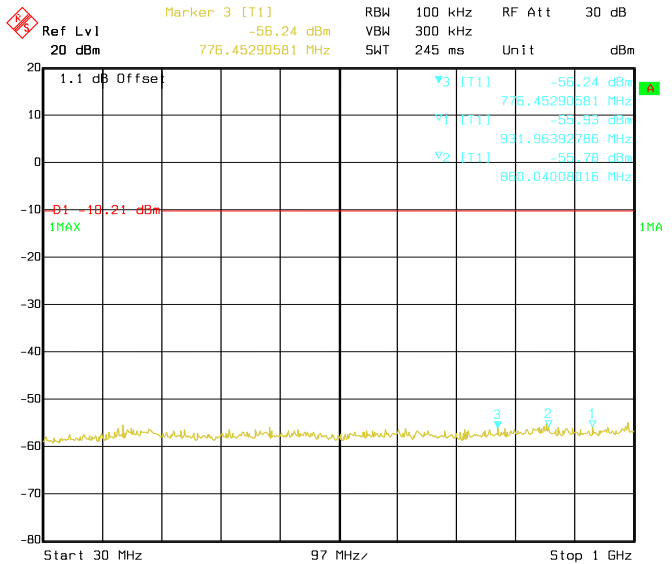


Date: 02.JUL.2017 10:07:14

Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 30 MHz -> 1 GHz

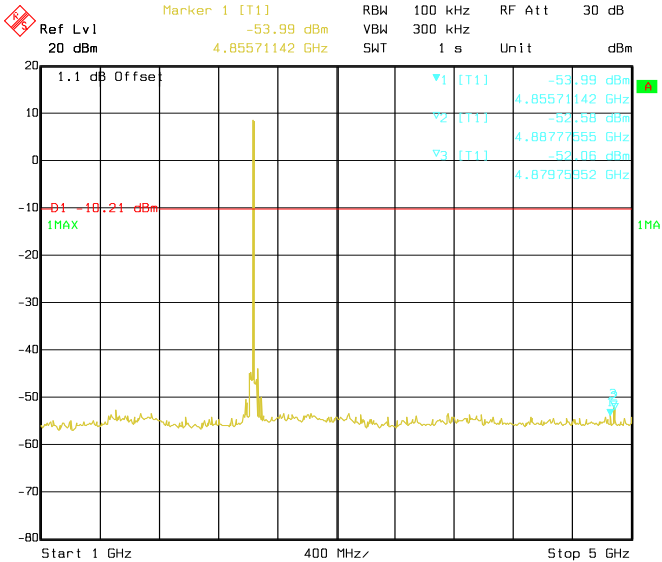


Date: 02.JUL.2017 10:08:03

Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

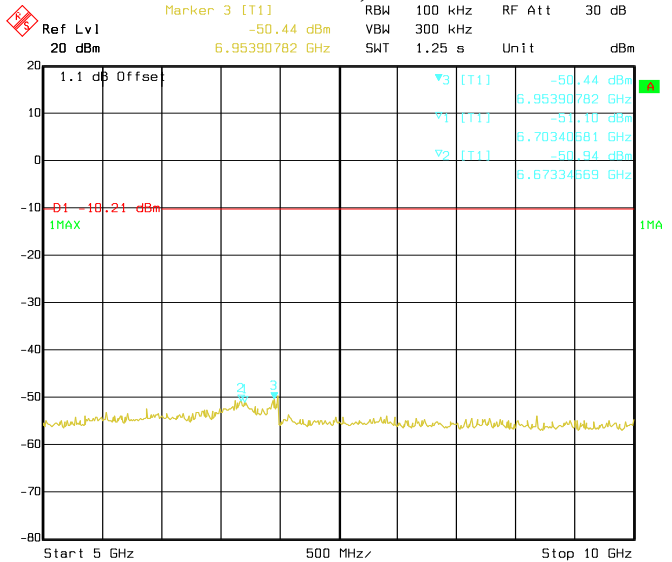


Date: 02.JUL.2017 10:08:34

Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

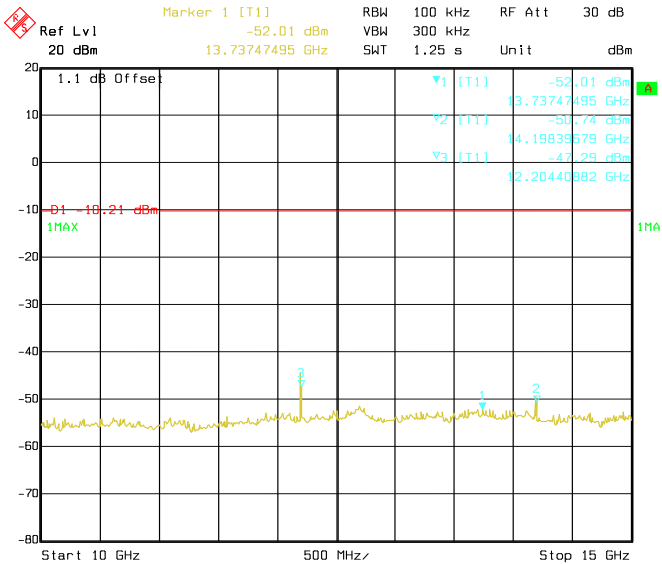


Date: 02.JUL.2017 10:09:19

Conducted Emissions. Bluetooth LE, Frequency 2440 Emission Level, 10 GHz -> 15 GHz

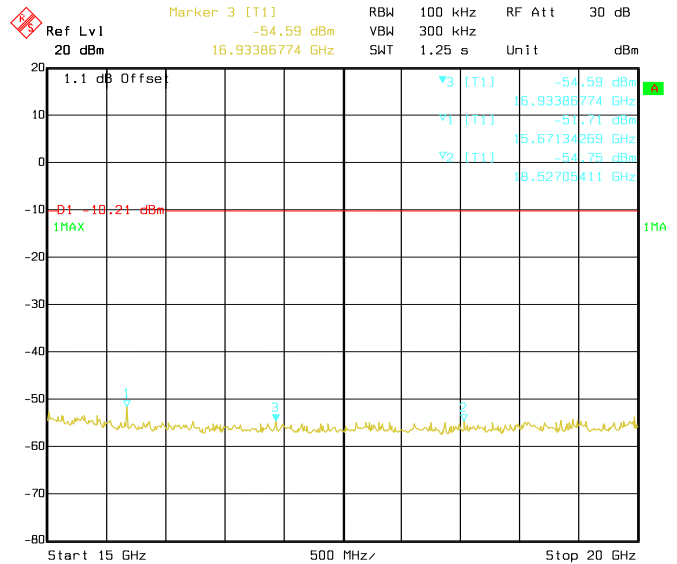


Date: 02.JUL.2017 10:10:02

Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 15 GHz -> 20 GHz

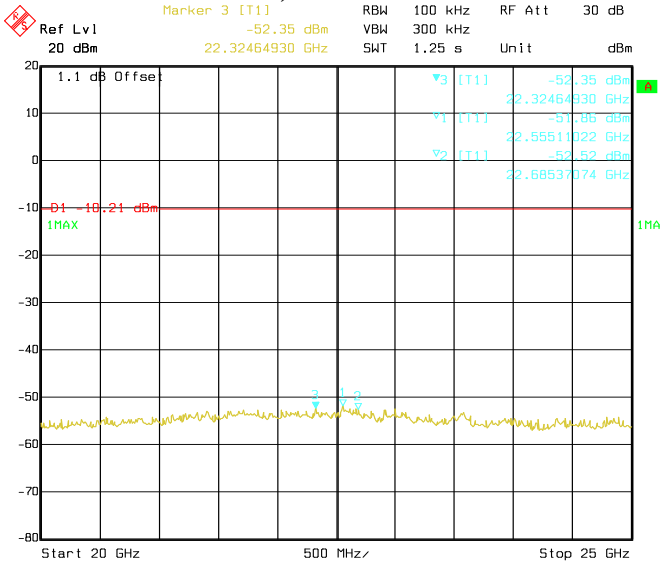


Date: 02.JUL.2017 10:10:32

Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 20 GHz -> 25 GHz

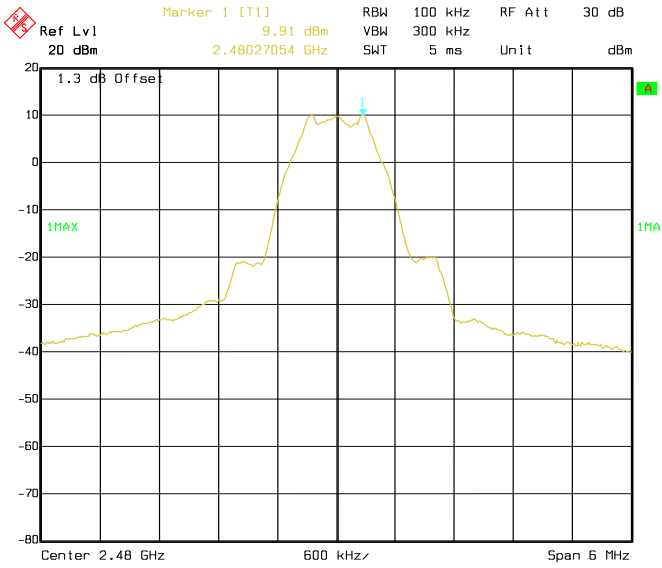


Date: 02.JUL.2017 10:12:48

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Reference Level

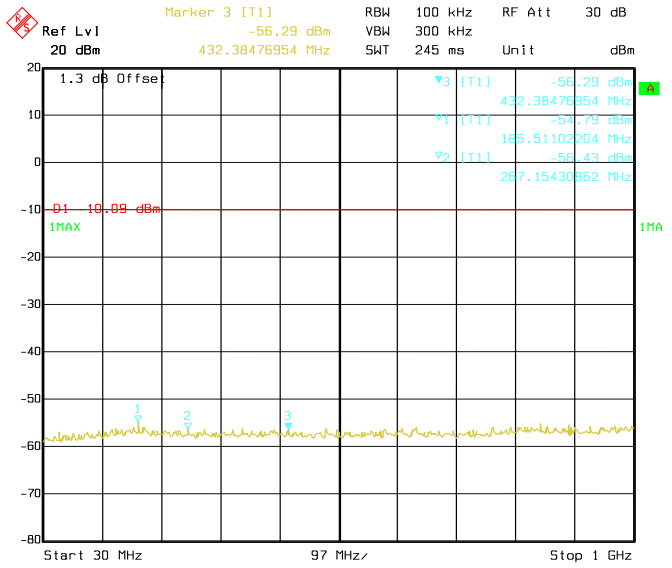


Date: 02.JUL.2017 10:13:49

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 30 MHz -> 1 GHz

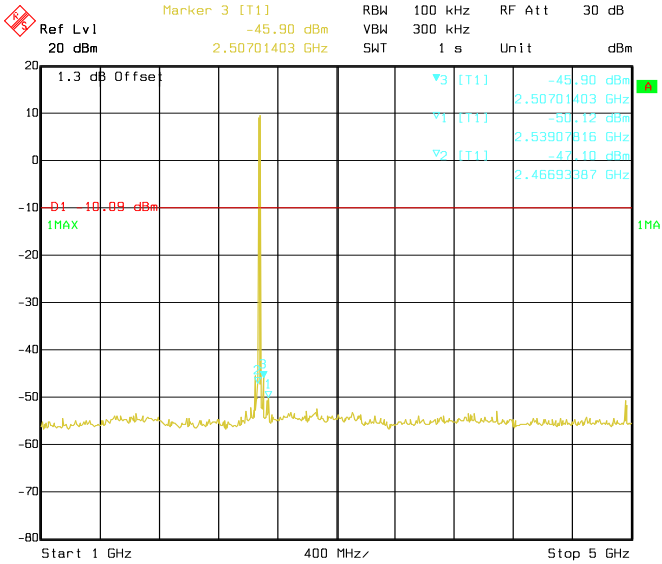


Date: 02.JUL.2017 10:14:32

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 1 GHz -> 5 GHz

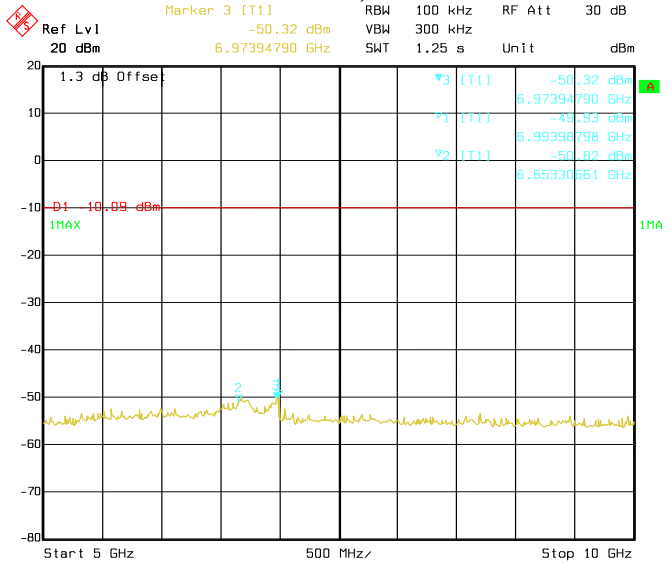


Date: 02.JUL.2017 10:15:28

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 5 GHz -> 10 GHz

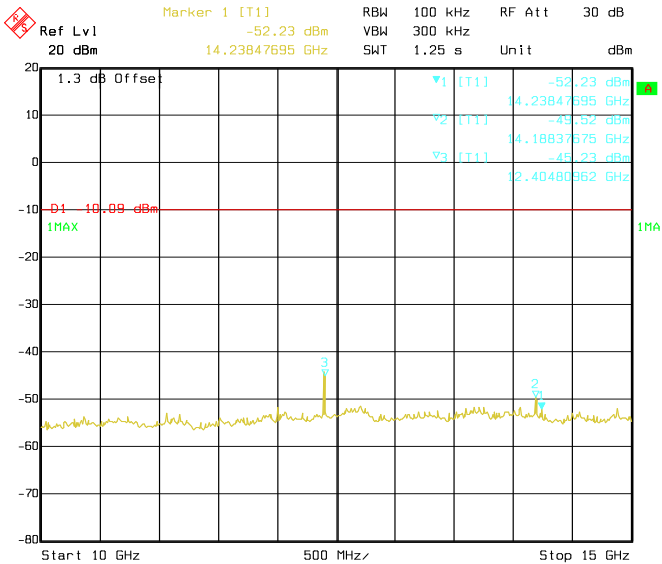


Date: 02.JUL.2017 10:16:18

Conducted Emissions. Bluetooth LE, Frequency 2480 Emission Level, 10 GHz -> 15 GHz

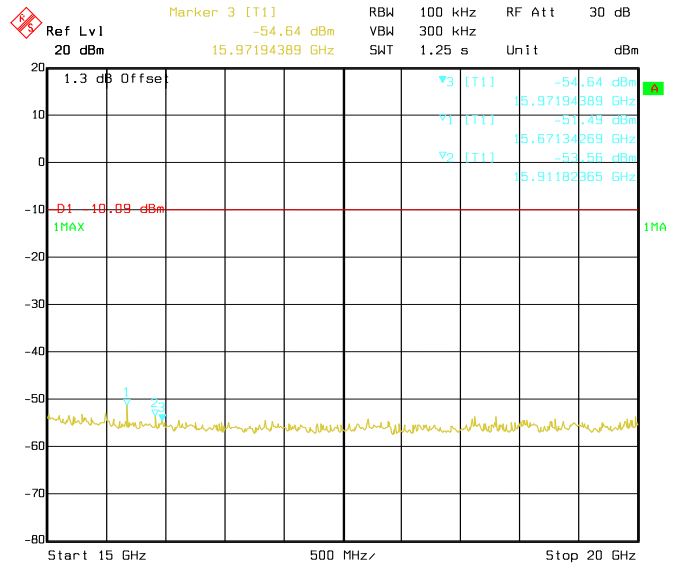

Date: 02.JUL.2017 10:16:58

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 15 GHz -> 20 GHz

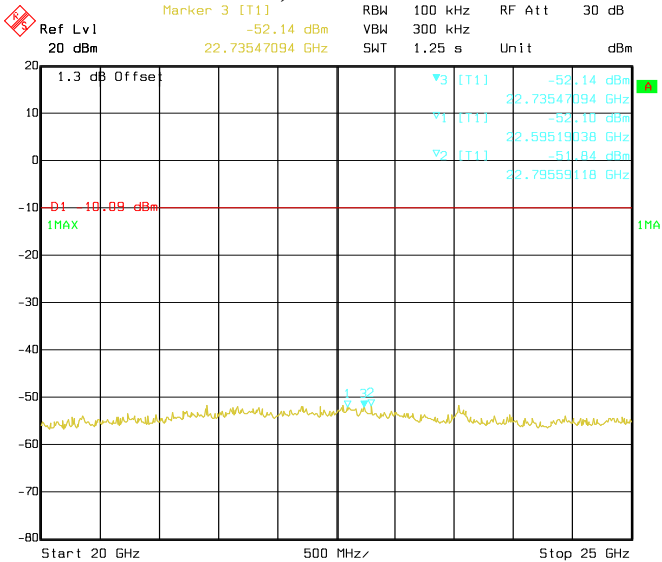


Date: 02.JUL.2017 10:17:38

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 20 GHz -> 25 GHz

6.5 Band edge Conducted Spurious Emission

6.5.1 Test Setup

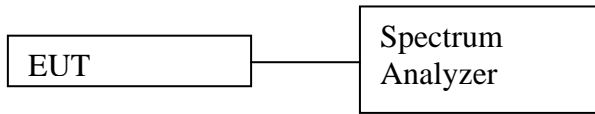


- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.

6.5.2 Test Limits:


Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.

6.5.3 Test Result


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2402	2399.99	-35.61	Pass
Bluetooth L.E	GFSK	2480	2483.54	-42.79	Pass

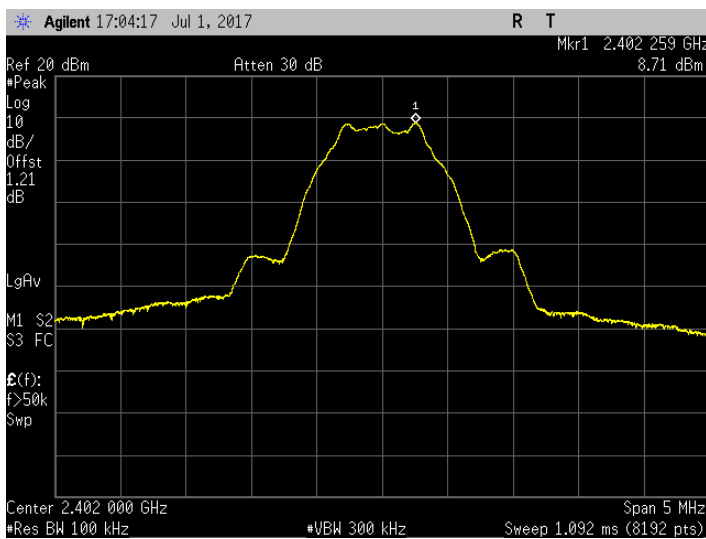


Band Edge. Bluetooth LE Frequency 2402 MHz Reference Level

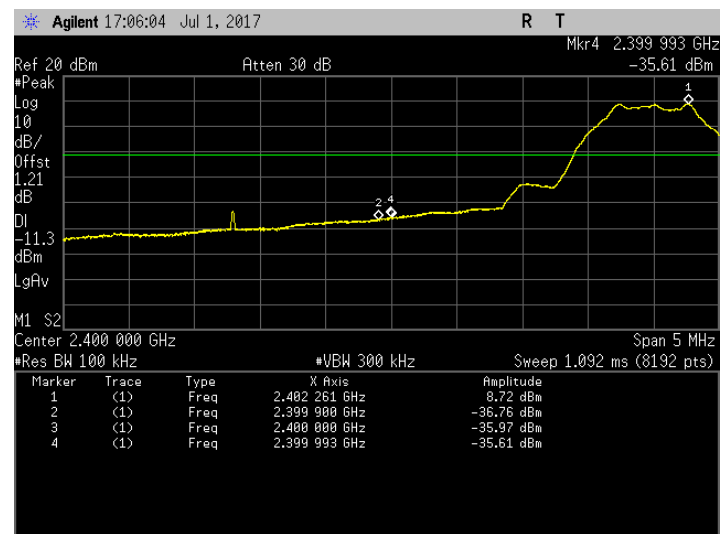

Band Edge. Bluetooth LE Frequency 2402 MHz Band Edge

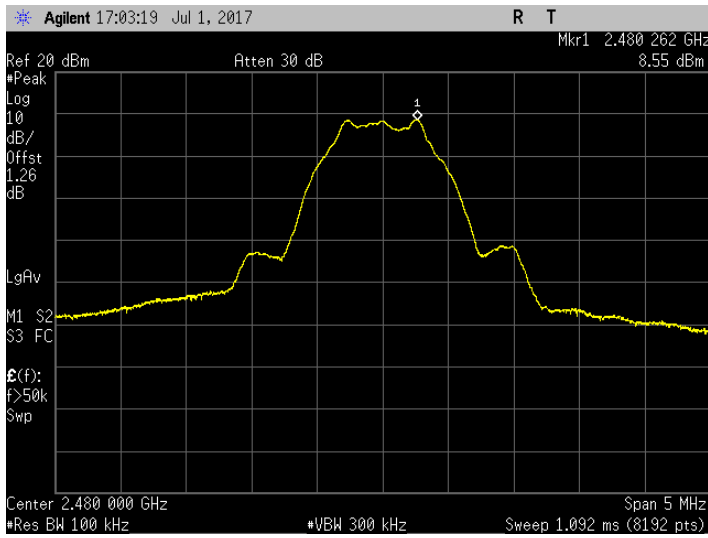


Band Edge. Bluetooth LE Frequency 2480 MHz
 Reference Level

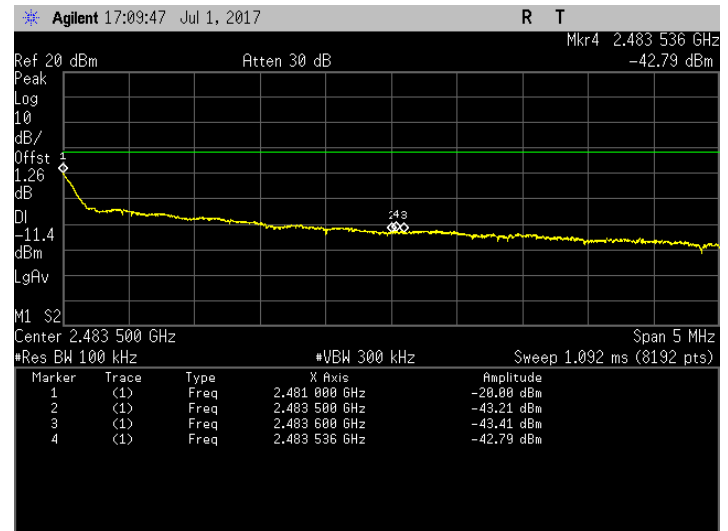

Band Edge. Bluetooth LE Frequency 2480 MHz Band
 Edge

6.6 Radiated Emission within Restricted Bands

6.6.1 Test Setup

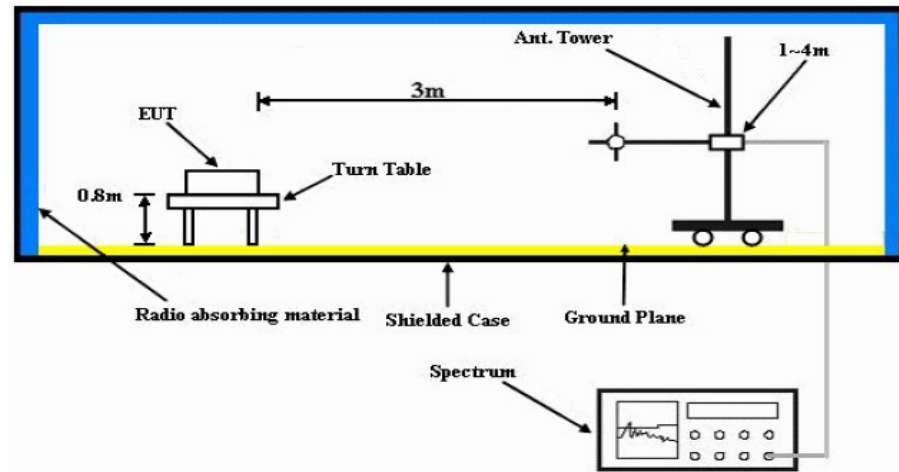

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.6.2 Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:


- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.6.3 Test Results:

Not Applicable.

6.7 AC Powerline Conducted Emission

6.7.1 Test Setup

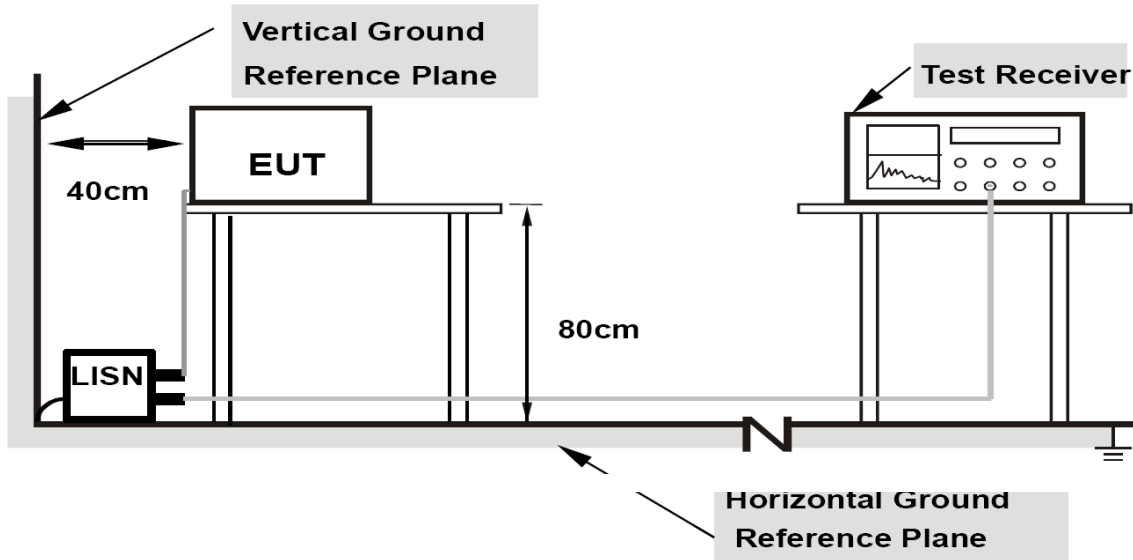

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.7.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.7.3 Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.