
																															
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Innoplex Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC / IC TEST REPORT Report Revision : Rev.B</p>																														
<table><tr><td>Date/s Tested</td><td>: 1-July-2017 - 2-July-2017</td></tr><tr><td>Report Issue Date</td><td>: 3-July-2017</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solutions - Penang</td></tr><tr><td>Requestor</td><td>: Yee Teng Teoh</td></tr><tr><td>Product Type</td><td>: Portable</td></tr><tr><td>Model Number</td><td>: H92SDH9PW7AN</td></tr><tr><td>Frequency Band</td><td>: 2.402 - 2.462 GHz</td></tr><tr><td>Rated / Max RF Output Power</td><td>: 802.11b - 16.6 mWatts / 22.4 mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solution Malaysia Sdn Bhd</td></tr><tr><td>Applicant Address</td><td>: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>FCC Registrations</td><td>: 772092</td></tr><tr><td>IC Registrations</td><td>: 109AK</td></tr></table> <p>The equipment was tested accordance to the requirement listed below:</p> <table><tr><td>(2.4GHz Wi-Fi)</td><td>PASS</td></tr><tr><td>Part 15C</td><td></td></tr><tr><td>IC RSS 247</td><td></td></tr></table> 		Date/s Tested	: 1-July-2017 - 2-July-2017	Report Issue Date	: 3-July-2017	Manufacturer/Location	: Motorola Solutions - Penang	Requestor	: Yee Teng Teoh	Product Type	: Portable	Model Number	: H92SDH9PW7AN	Frequency Band	: 2.402 - 2.462 GHz	Rated / Max RF Output Power	: 802.11b - 16.6 mWatts / 22.4 mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts	Applicant Name	: Motorola Solution Malaysia Sdn Bhd	Applicant Address	: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia	FCC Registrations	: 772092	IC Registrations	: 109AK	(2.4GHz Wi-Fi)	PASS	Part 15C		IC RSS 247	
Date/s Tested	: 1-July-2017 - 2-July-2017																														
Report Issue Date	: 3-July-2017																														
Manufacturer/Location	: Motorola Solutions - Penang																														
Requestor	: Yee Teng Teoh																														
Product Type	: Portable																														
Model Number	: H92SDH9PW7AN																														
Frequency Band	: 2.402 - 2.462 GHz																														
Rated / Max RF Output Power	: 802.11b - 16.6 mWatts / 22.4 mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts																														
Applicant Name	: Motorola Solution Malaysia Sdn Bhd																														
Applicant Address	: Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia																														
FCC Registrations	: 772092																														
IC Registrations	: 109AK																														
(2.4GHz Wi-Fi)	PASS																														
Part 15C																															
IC RSS 247																															
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																															
<p>Prepared By:</p> <p>_____</p> <p>Jino Lim Test Personnel</p>	<p>Approved By:</p> <p>_____</p> <p>Goh Aik Hong Responsible Engineer</p>																														

Table of Contents

1.0 General Information.....	3
2.0 Summary of Test Results.....	4
3.0. Measurement Uncertainty.....	4
4.0 Equipment List.....	5
5.0 Test Mode Applicability and Test Channel Detail	6
6.0 Transmitter Test Parameters	8
6.1 6dB Channel Bandwidth.....	8
6.1.1 Test Setup.....	8
6.1.2 Test Limits:.....	8
6.1.3 Test Data:	8
6.2 Conducted RF Output Power	13
6.2.1 Test Setup.....	13
6.2.2 Test Limits:.....	13
6.2.3 Test Data:	14
6.3 Duty Cycle of the test signal.....	17
6.3.1 Test Setup.....	17
6.3.2 Test Data.....	18
6.4 Maximum Peak Power Spectral Density	21
6.4.1 Test Setup.....	21
6.4.2 Test Limits:.....	21
6.4.3 Test Result.....	22
6.5 Conducted Spurious Emission	25
6.5.1 Test Setup.....	25
6.5.2 Test Limits:.....	25
6.5.3 Test Result.....	25
6.6 Band edge Conducted Spurious Emission	46
6.6.1 Test Setup.....	46
6.6.2 Test Limits:.....	46
6.6.3 Test Results:	46
6.7 Radiated Emission within restricted bands.....	50
6.7.1 Test Setup.....	50
6.7.2 Test Limits:.....	51
6.7.3 Test Data:	52
6.8 AC Powerline Conducted Emission.....	53
6.8.1 Test Setup.....	53
6.8.2 Test Limits:.....	54
6.8.3 Test Result.....	54

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	3-July-2017	Jino Lim
Rev. B	Revise section 6.2.3	16-Aug-2017	Jino Lim

1.0 General Information

EUT Description:

Technologies	2.4GHz Wi-Fi
TX Frequency range	2412MHz – 2462MHz
Modulation Type	DSSS, OFDM
Input/Output	RF Port
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	ANTENNA, CHIP, GLONASS BT/GPS ANTENNA MODULE

1.1 Channel number and frequency information:

11 Channels are provided for 802.11b, 802.11g and 802.11n (HT20)

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
IMPRES 3000 MAH, LI-ION HIGH CAPACITY BATTERY, LOW VOLTAGE, IP68.	MOTOROLA	PMNN4493
PROGRAMMING, TEST & ALIGNMENT CABLE	MOTOROLA	PMKN4013

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.10-2013

2.0 Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark
15.247 (b)(2)	RSS-247 5.2(1)	6dB Channel Bandwidth	Pass	NA
15.247 (a)(3)	RSS-247 5.1(4)	Conducted RF Output Power (Peak)	Pass	NA
15.247(e)	RSS-247 5.2(2)	Maximum Power Spectral Density	Pass	NA
15.247(b)	RSS-247 5.5	Conducted Spurious Emissions	Pass	NA
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	Pass	NA
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	NA
15.207	RSS-Gen 8.8	AC Powerline Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode
15.203	-	Antenna requirement	NA	Internal antenna is not accessible to the end-user

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.9_R1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	E4445A	MY46181597	21-Dec-16	21-Dec-18
POWER SUPPLY	6652A	3541A02403	7-Sep-15	7-Sep-17
SPECTRUM ANALYZER	FSEK30	838495/014	29-Jun-16	29-Jun-18

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5

Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
Application Mode	802.11bgn mixed	1 to 11	AUTO	DSSS, OFDM	AUTO	AUTO

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5


Duty Cycle of Test Signal

802.11b, 802.11g and 802.11n (HT20): Duty cycle of test signal is $\geq 98\%$. (Refer to duty cycle test signal)

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup

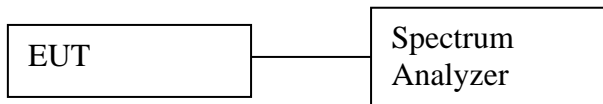

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


6.1.2 Test Limits:

Normal Condition (25 ° C)
≥ 500 kHz


6.1.3 Test Data:

802.11 b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11b	DSSS	QPSK	2	2412	10.039	13.4795	Pass
802.11b	DSSS	QPSK	2	2437	10.080	13.4999	Pass
802.11b	DSSS	QPSK	2	2462	10.076	13.4868	Pass

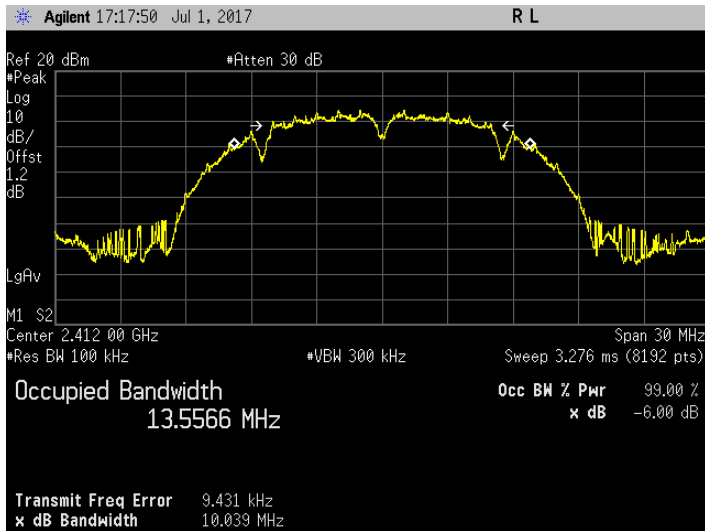


6dB Bandwidth. 802.11b Frequency 2412 MHz

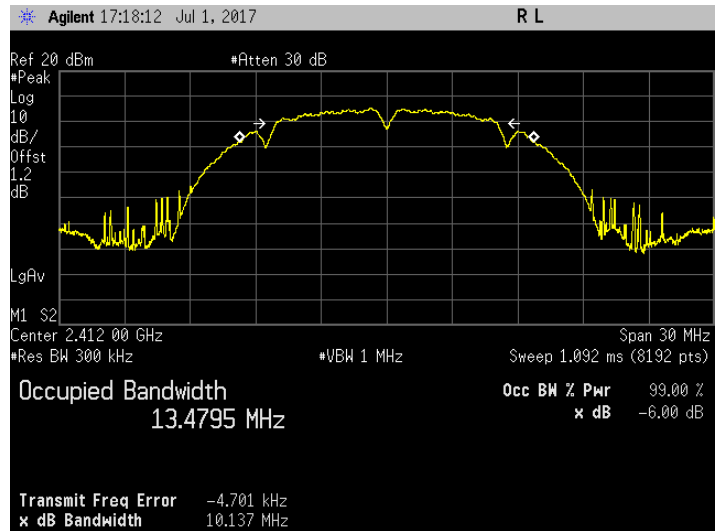


99% Bandwidth. 802.11b Frequency 2412 MHz

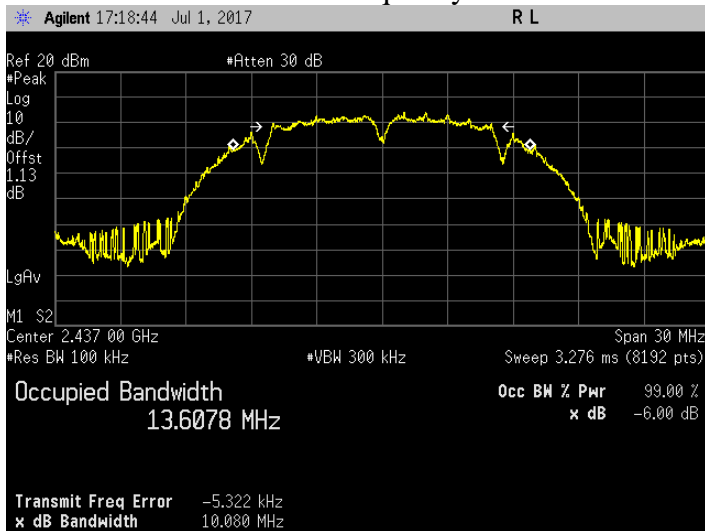


6dB Bandwidth. 802.11b Frequency 2437 MHz

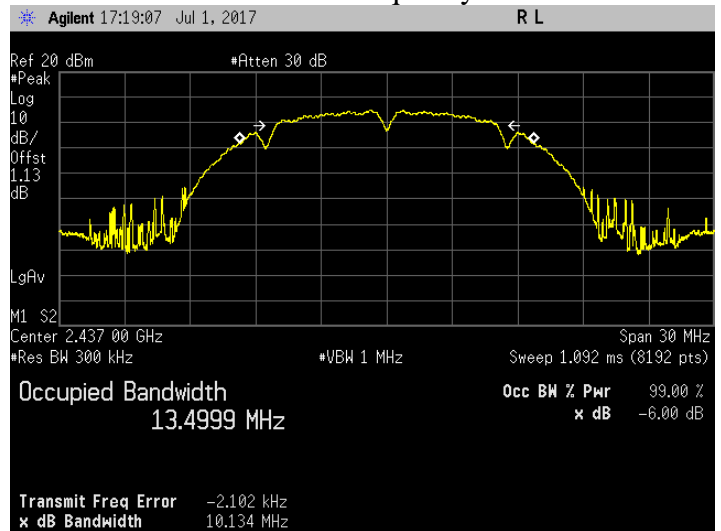

99% Bandwidth. 802.11b Frequency 2437 MHz

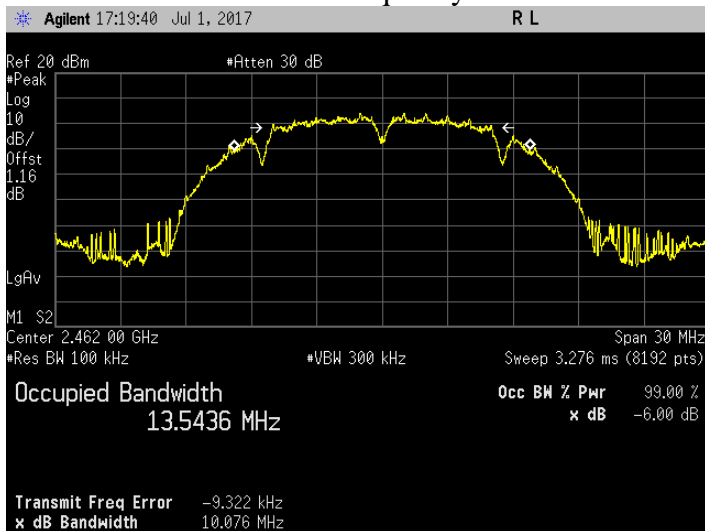



6dB Bandwidth. 802.11b Frequency 2462 MHz

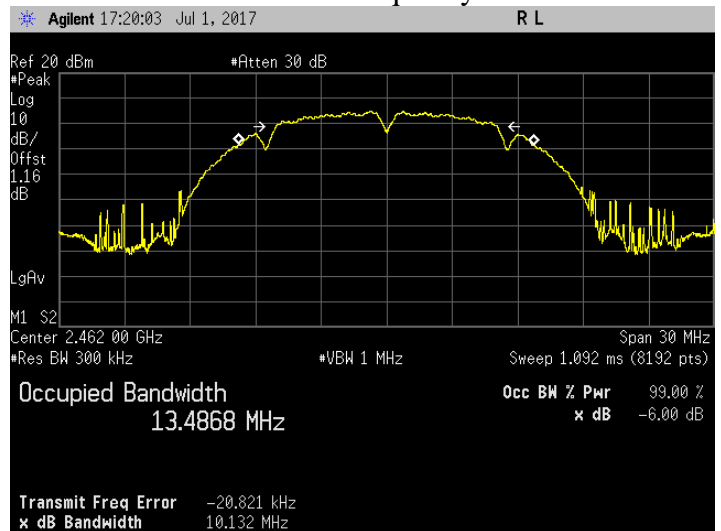

99% Bandwidth. 802.11b Frequency 2462 MHz



802.11 g

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11g	OFDM	BPSK	6	2412	16.386	16.7989	Pass
802.11g	OFDM	BPSK	6	2437	16.362	16.8096	Pass
802.11g	OFDM	BPSK	6	2462	16350	16.7933	Pass

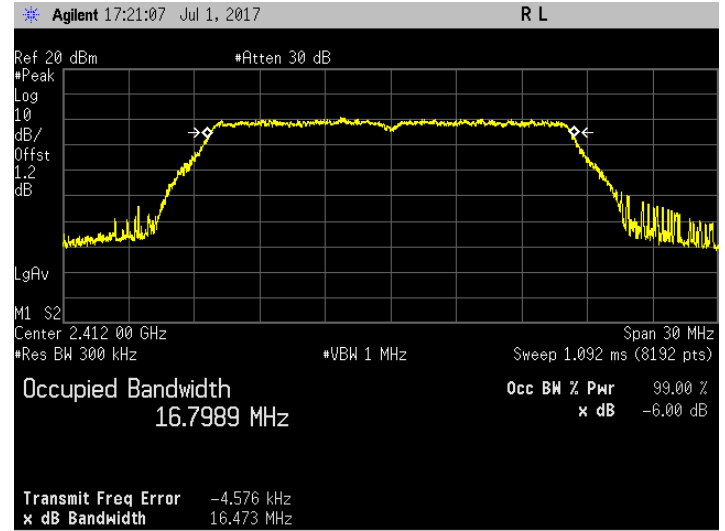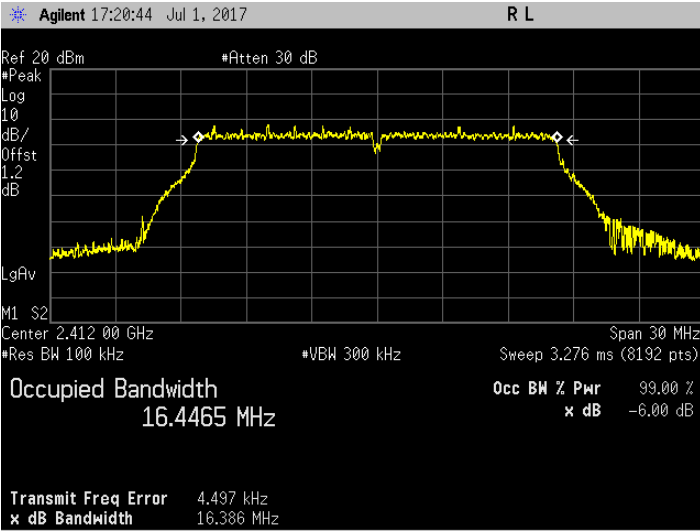


6dB Bandwidth. 802.11g Frequency 2412 MHz

99% Bandwidth. 802.11g Frequency 2412 MHz

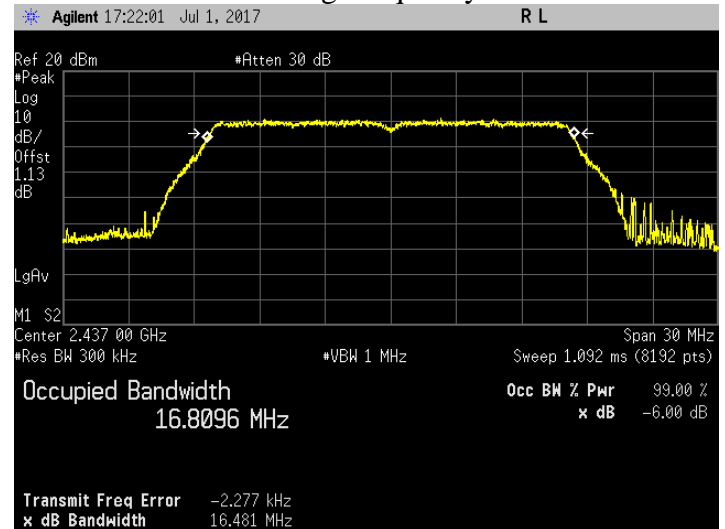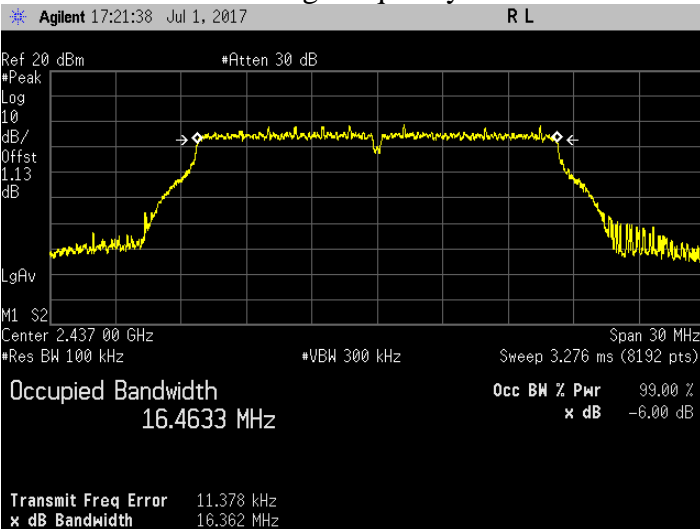


6dB Bandwidth. 802.11g Frequency 2437 MHz

99% Bandwidth. 802.11g Frequency 2437 MHz

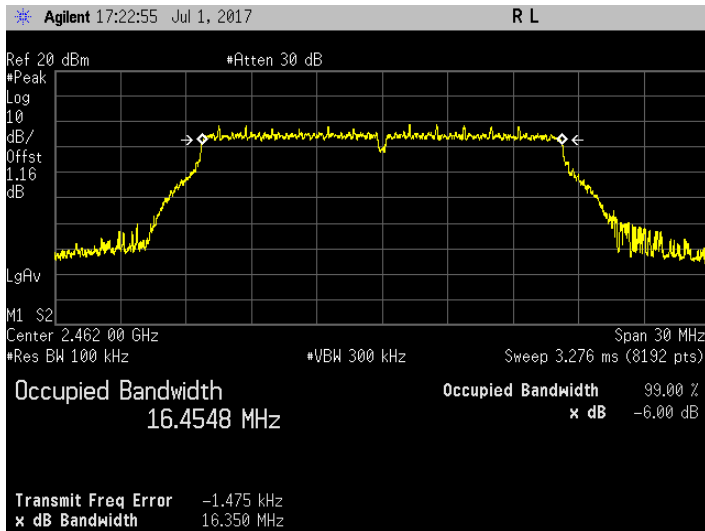


6dB Bandwidth. 802.11g Frequency 2462 MHz

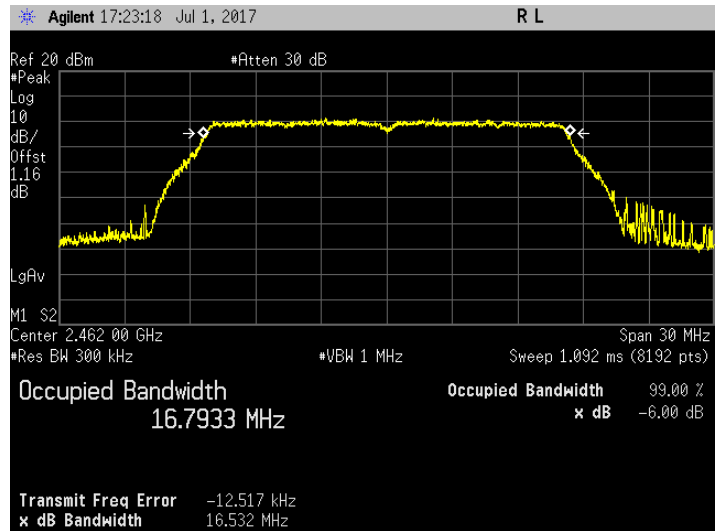


99% Bandwidth. 802.11g Frequency 2462 MHz

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	BPSK	6.5	2412	17.595	17.9322	Pass
802.11n	OFDM	BPSK	6.5	2437	17.615	17.9361	Pass
802.11n	OFDM	BPSK	6.5	2462	17.628	17.9409	Pass

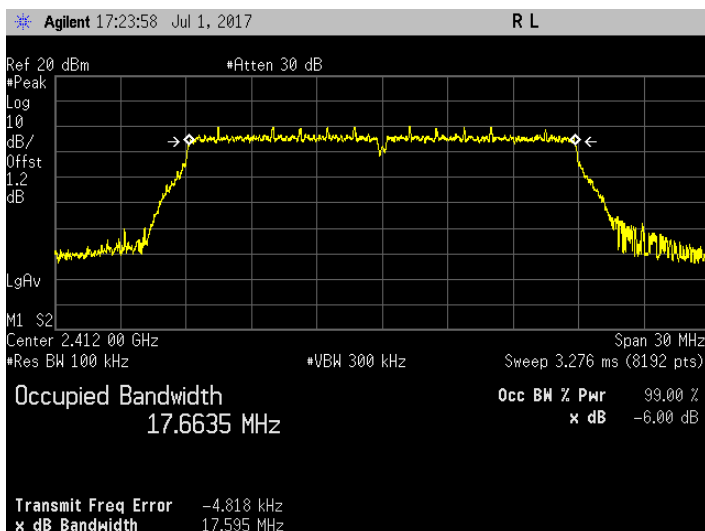


6dB Bandwidth. 802.11n Frequency 2412 MHz

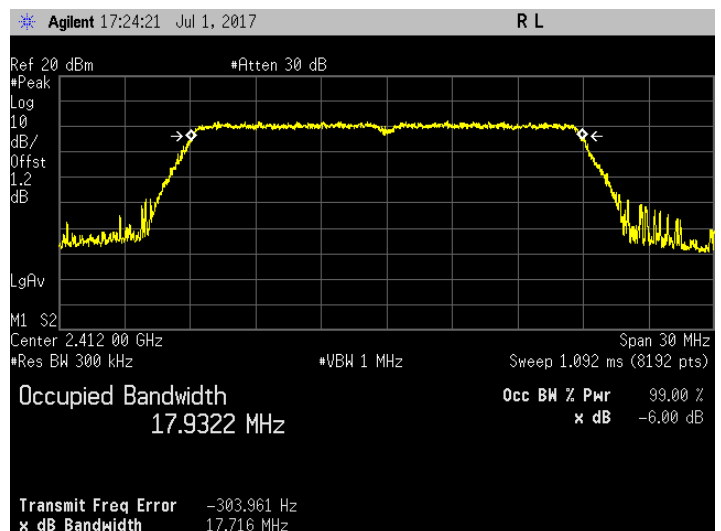


99% Bandwidth. 802.11n Frequency 2412 MHz

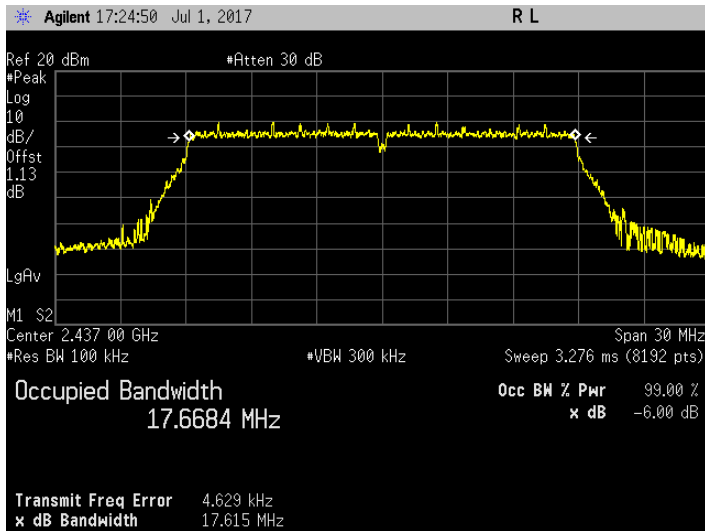


6dB Bandwidth. 802.11n Frequency 2437 MHz

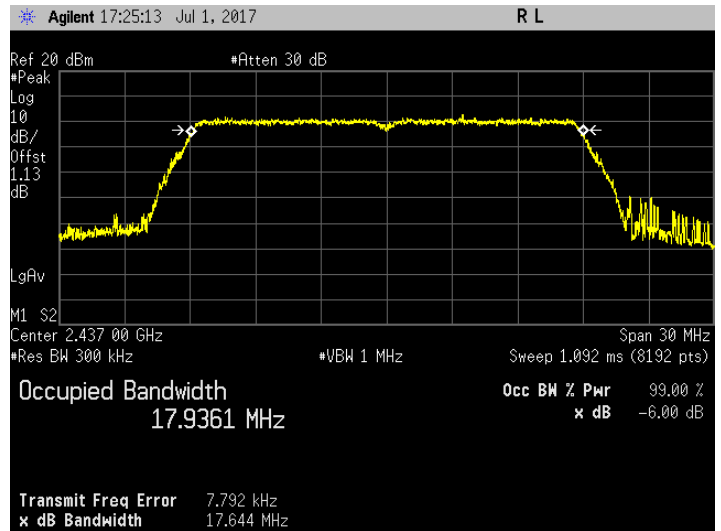

99% Bandwidth. 802.11n Frequency 2437 MHz

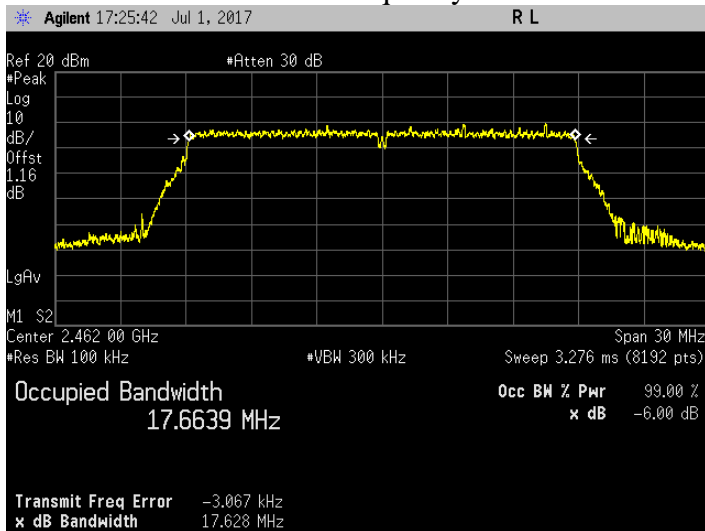


6dB Bandwidth. 802.11n Frequency 2462 MHz

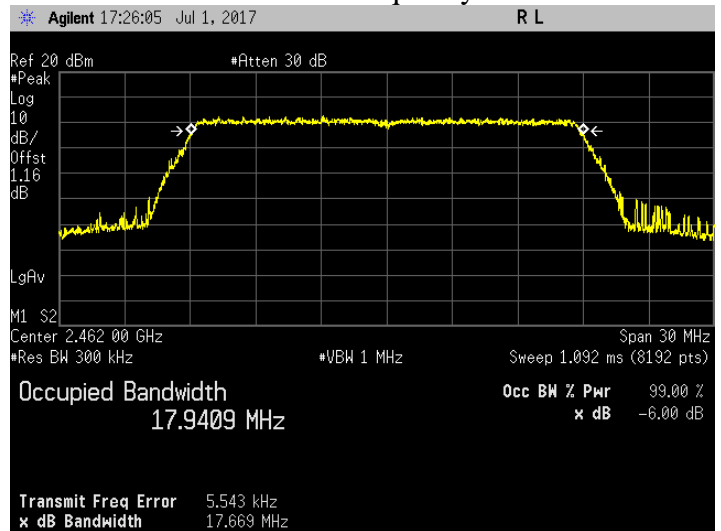

99% Bandwidth. 802.11n Frequency 2462 MHz

6.2 Conducted RF Output Power

6.2.1 Test Setup

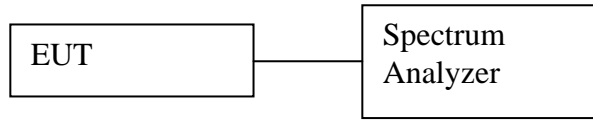

Average

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 300 kHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = average.
 - e. Sweep time = auto couple.
 - f. Trace mode = free run.
 - g. Allow trace to fully stabilize.
- 5) Add in duty cycle correction into final test result.
- 6) Duty cycle correction is calculated as below:
 $10 \log (1/x)$

6.2.2 Test Limits:

Normal Condition (25 ° C)
$\leq 1 \text{ Watt}(30 \text{ dBm})$


6.2.3 Test Data:

Average


802.11b

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	12.614	Pass
802.11b	DSSS	QPSK	2	2437	12.292	Pass
802.11b	DSSS	QPSK	2	2462	11.889	Pass


i. The Conducted RF Output Power test with result at low frequency, 802.11b.

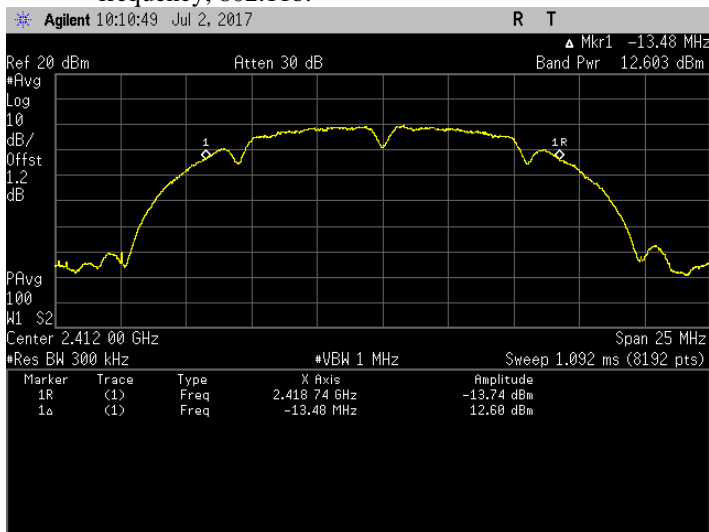

ii. The Conducted RF Output Power test with result at mid frequency, 802.11b.

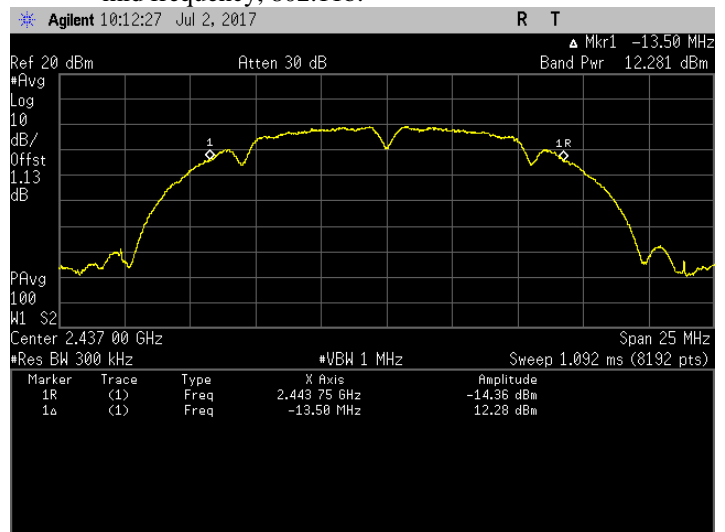


iii. The Conducted RF Output Power test with result at high frequency, 802.11b.

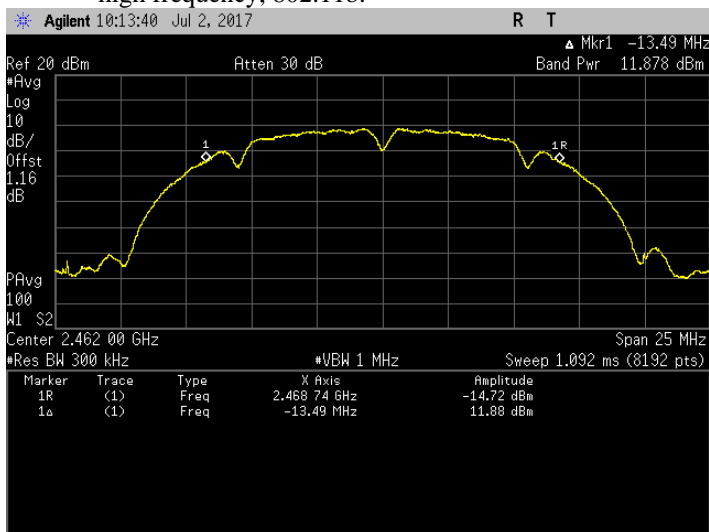


802.11g

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	8.331	Pass
802.11g	OFDM	BPSK	6	2437	8.922	Pass
802.11g	OFDM	BPSK	6	2462	8.798	Pass


i. The Conducted RF Output Power test with result at low frequency, 802.11g.

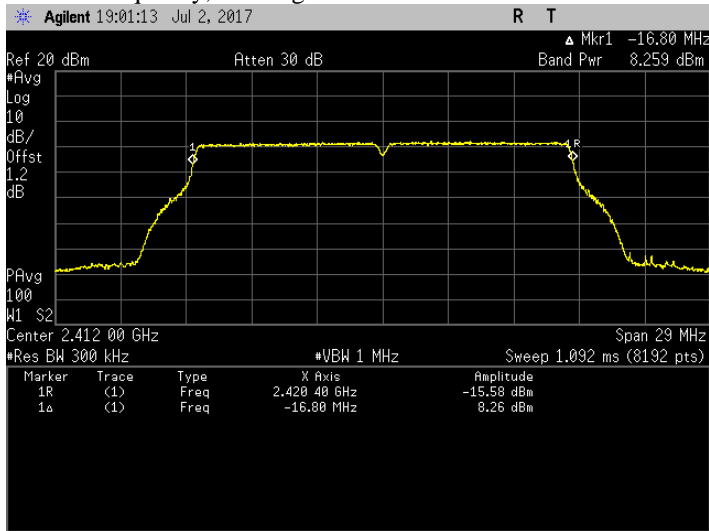

ii. The Conducted RF Output Power test with result at mid frequency, 802.11g.

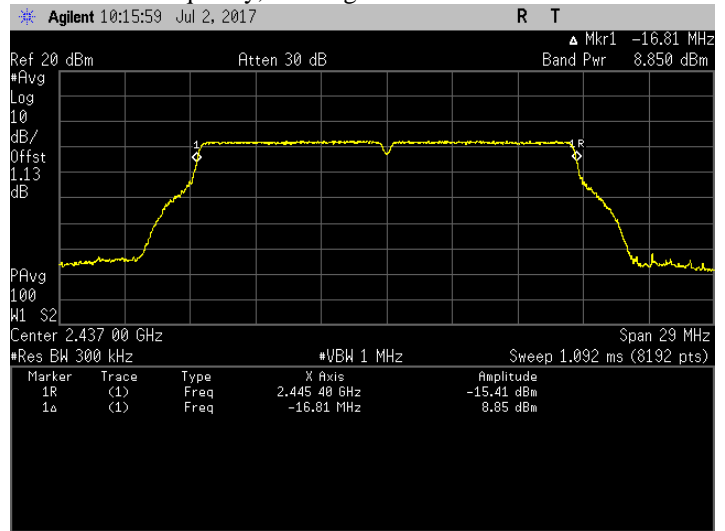


iii. The Conducted RF Output Power test with result at high frequency, 802.11g.

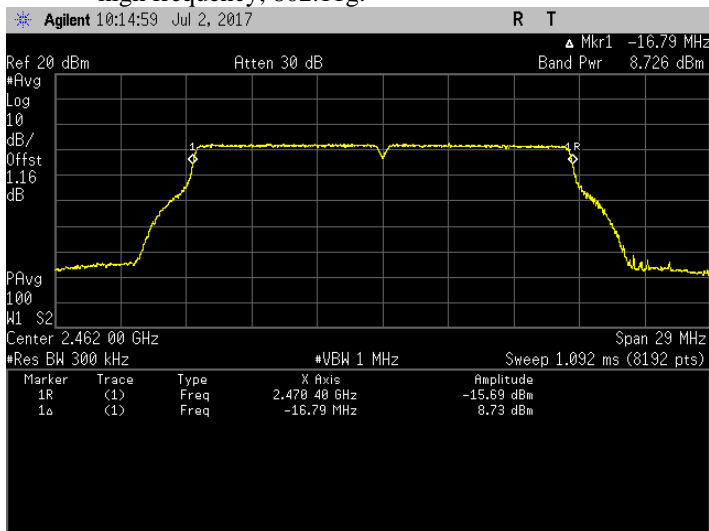


802.11n (HT20)

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	10.133	Pass
802.11n	OFDM	BPSK	6.5	2437	10.777	Pass
802.11n	OFDM	BPSK	6.5	2462	10.428	Pass


i. The Conducted RF Output Power test with result at low frequency, 11n (HT20).

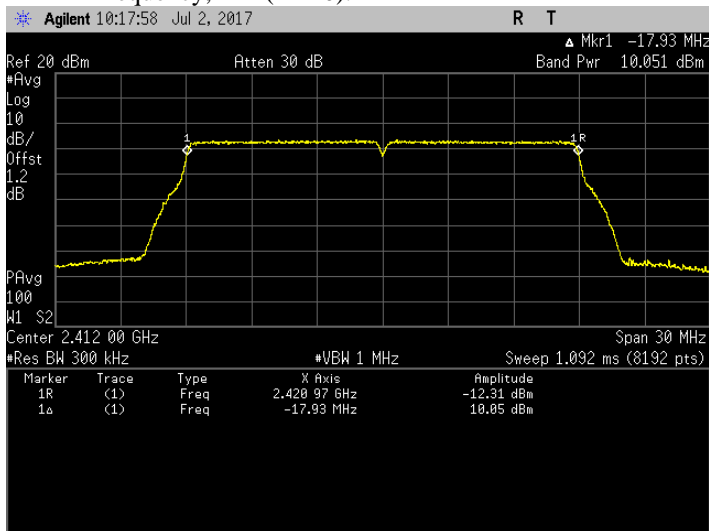

ii. The Conducted RF Output Power test with result at mid frequency, 802. 11n (HT20).

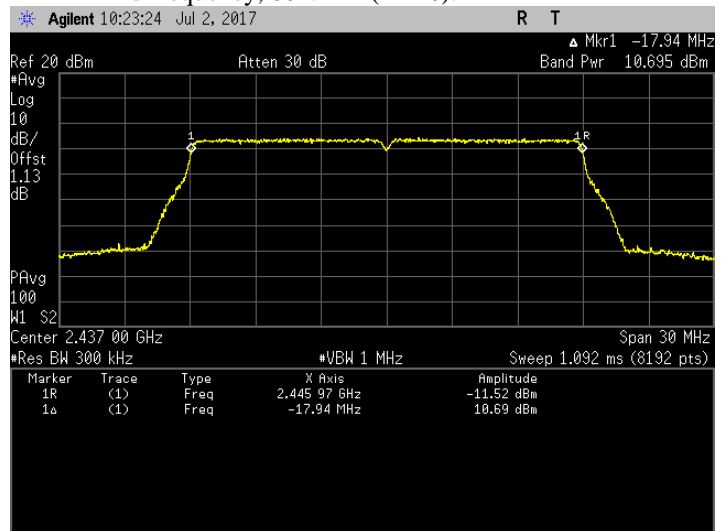


iii. The Conducted RF Output Power test with result at high frequency, 802. 11n (HT20).

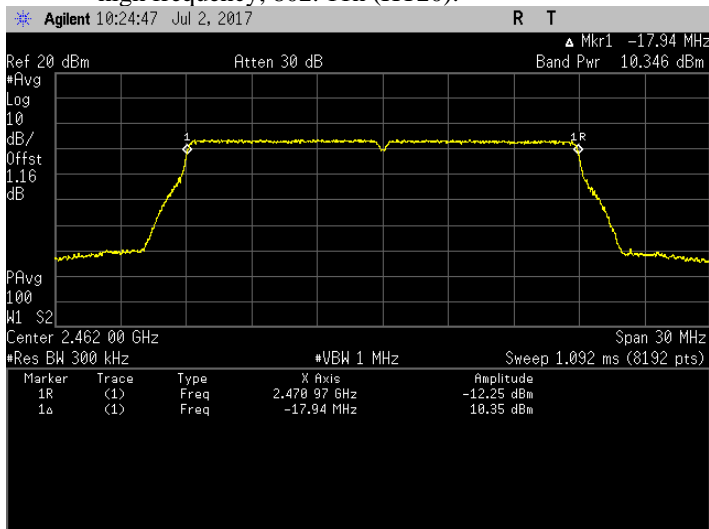

6.3 Duty Cycle of the test signal


6.3.1 Test Setup

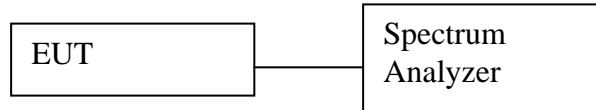

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
 - b. Set the VBW \geq RBW.
 - c. Set the span \geq [1.5 \times DTS bandwidth].
 - d. Detector = Peak.
 - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
- 5) Record the duty cycle as X and save the plot.

6.3.2 Test Data

802.11b

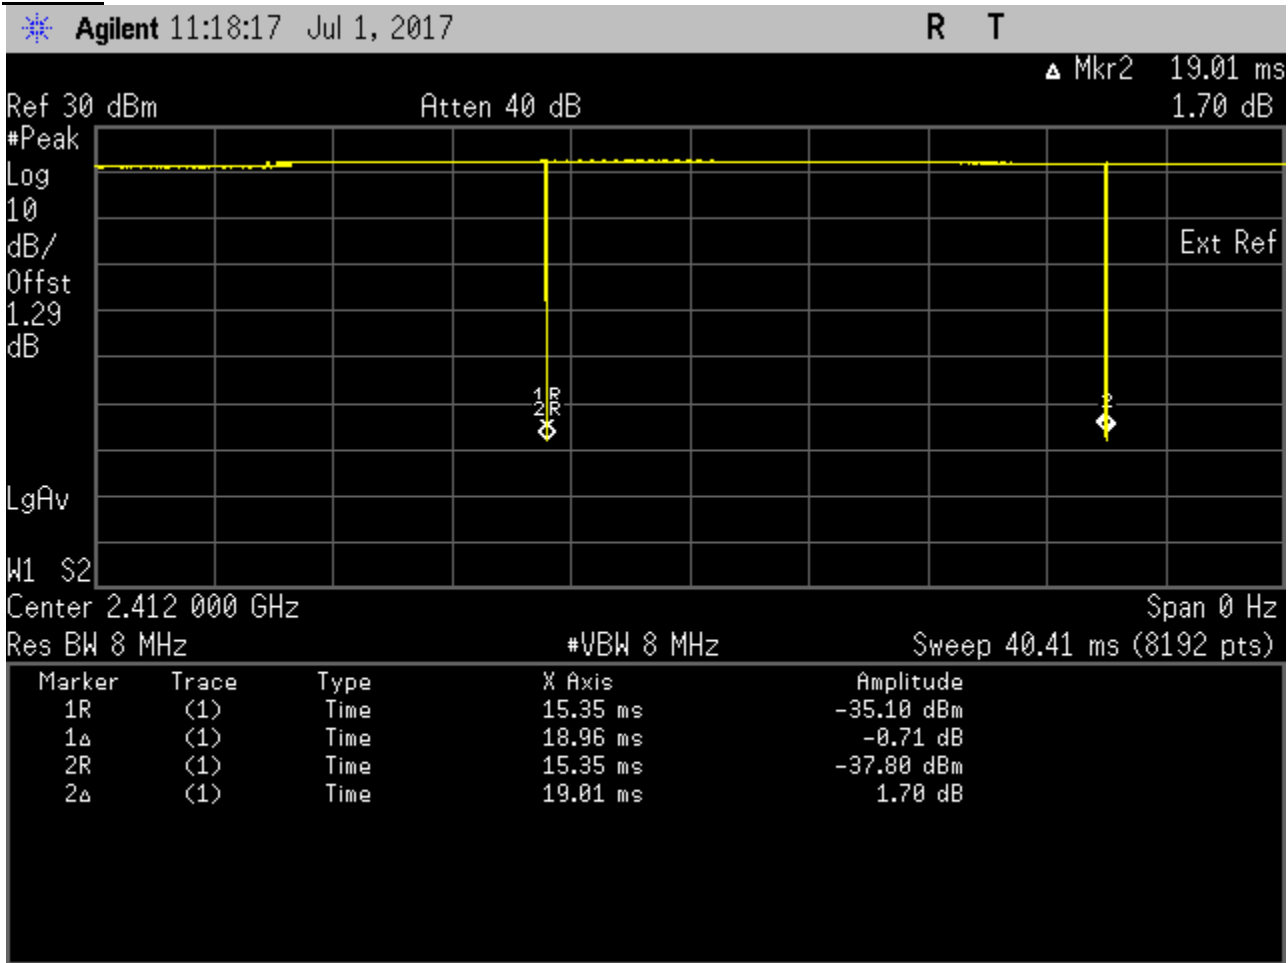


On time	18.96	ms
On + off time	19.01	ms
Duty cycle	0.9974	
Duty Cycle factor	0.011	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = 10*log(1/Duty Cycle)

802.11g

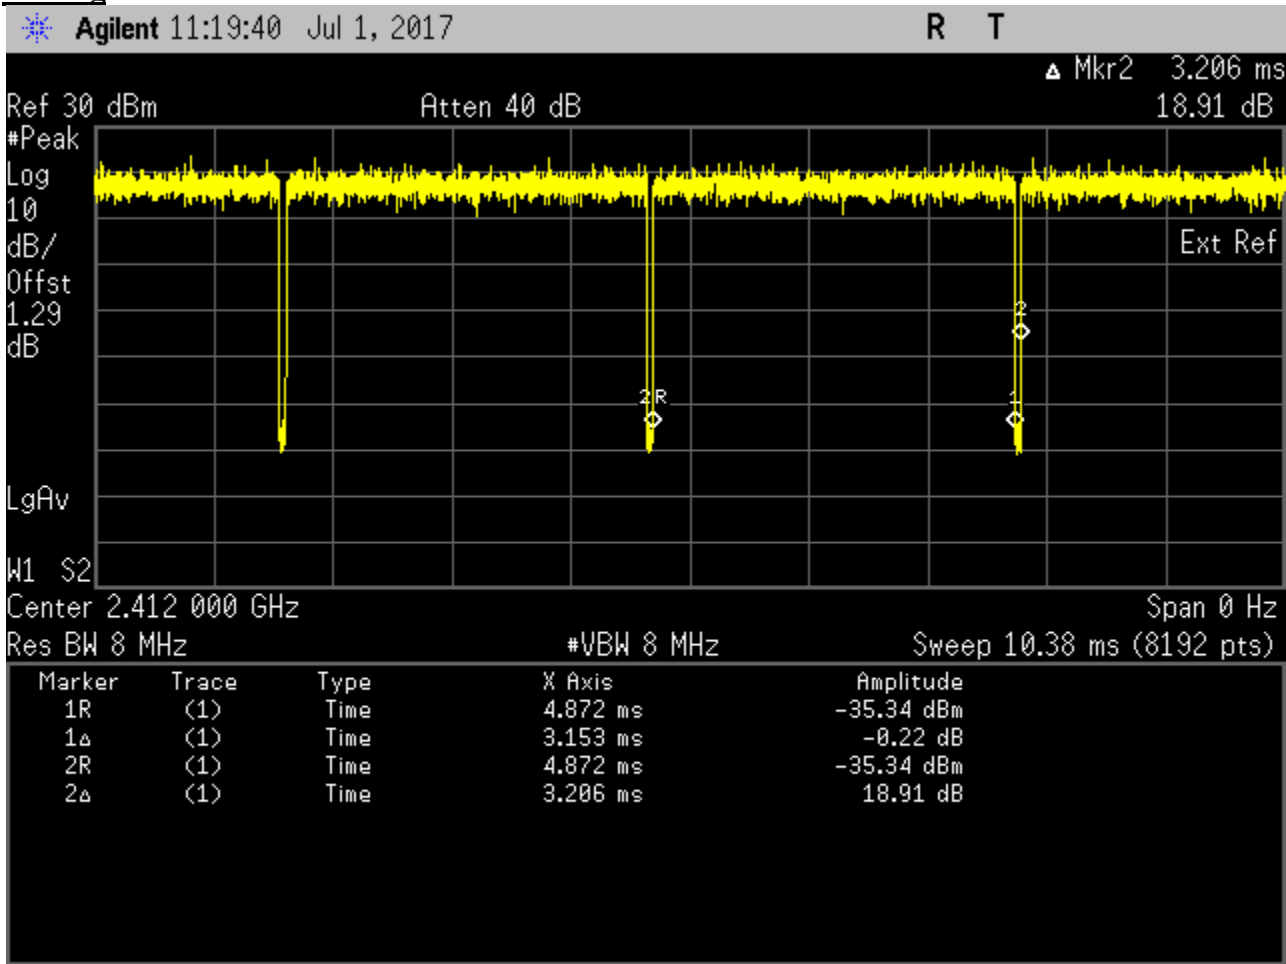


On time	3.153	ms
On + off time	3.206	ms
Duty cycle	0.9835	
Duty Cycle factor	0.072	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = 10*log(1/Duty Cycle)

802.11n (HT20)

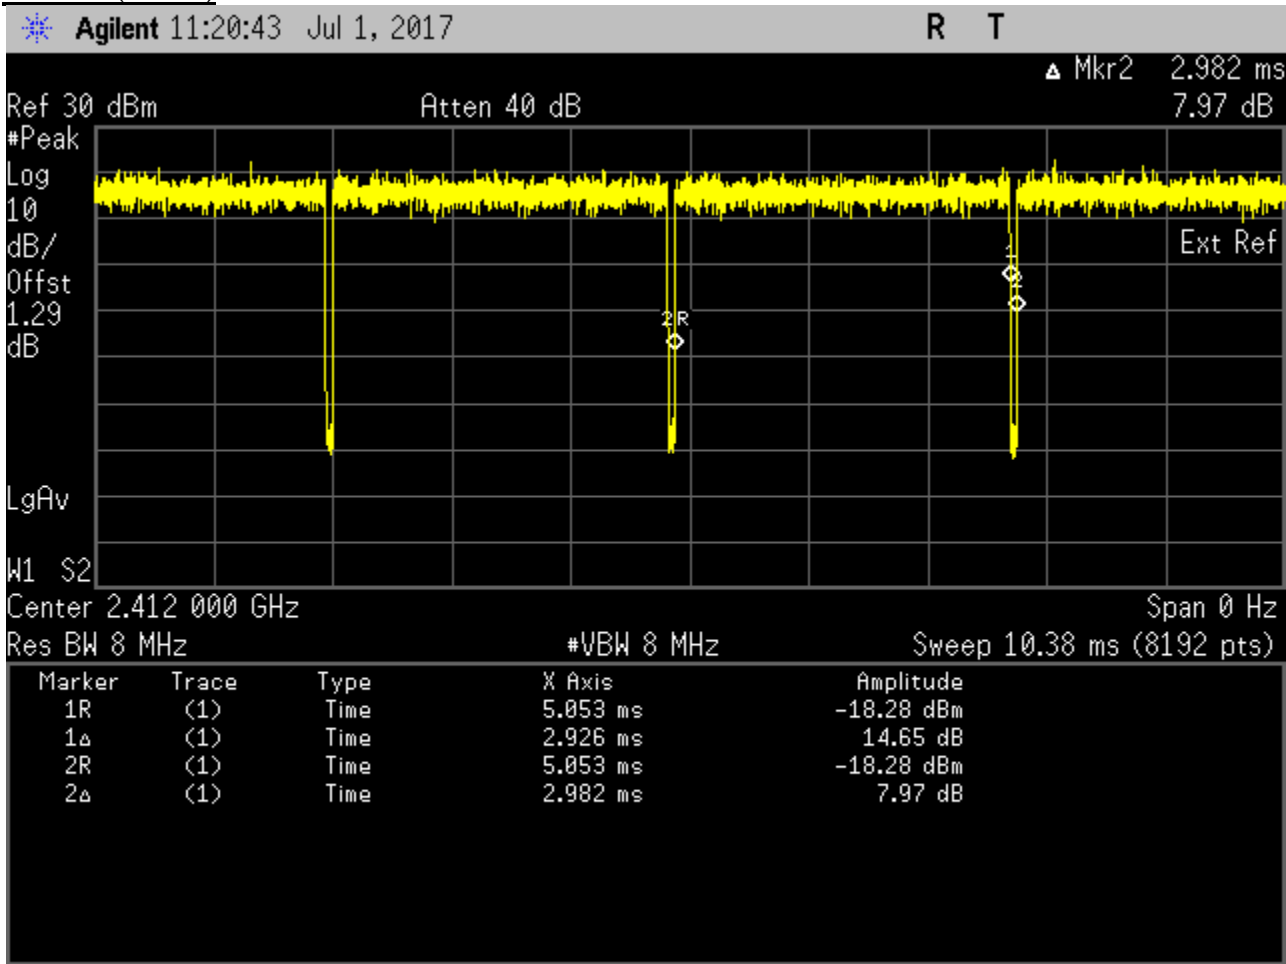


On time	2.926	ms
On + off time	2.982	ms
Duty cycle	0.9812	
Duty Cycle factor	0.082	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = 10*log(1/Duty Cycle)

6.4 Maximum Peak Power Spectral Density

6.4.1 Test Setup



Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


6.4.2 Test Limits:

Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$


6.4.3 Test Result

802.11b


Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Power (dBm/3kHz)	Status
802.11b	DSSS	QPSK	2	2412	-7.787	Pass
802.11b	DSSS	QPSK	2	2437	-8.056	Pass
802.11b	DSSS	QPSK	2	2462	-8.709	Pass

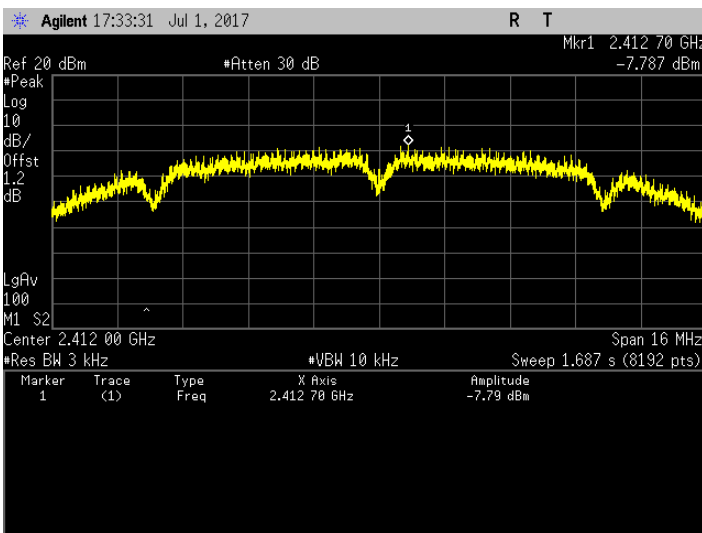

Maximum Power Spectral Density. 802.11b
 Frequency 2412 MHz

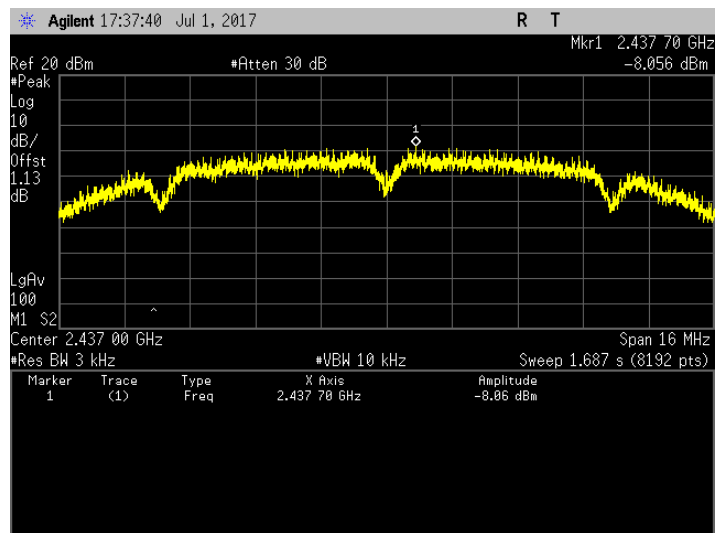


Maximum Power Spectral Density. 802.11b
 Frequency 2437 MHz

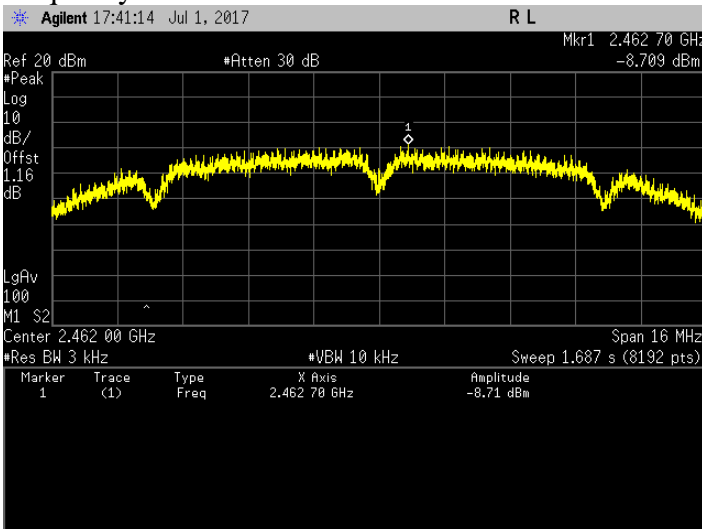


Maximum Power Spectral Density. 802.11b
 Frequency 2462 MHz

802.11g


Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Power (dBm/3kHz)	Status
802.11g	OFDM	BPSK	6	2412	-15.868	Pass
802.11g	OFDM	BPSK	6	2437	-15.781	Pass
802.11g	OFDM	BPSK	6	2462	-15.924	Pass

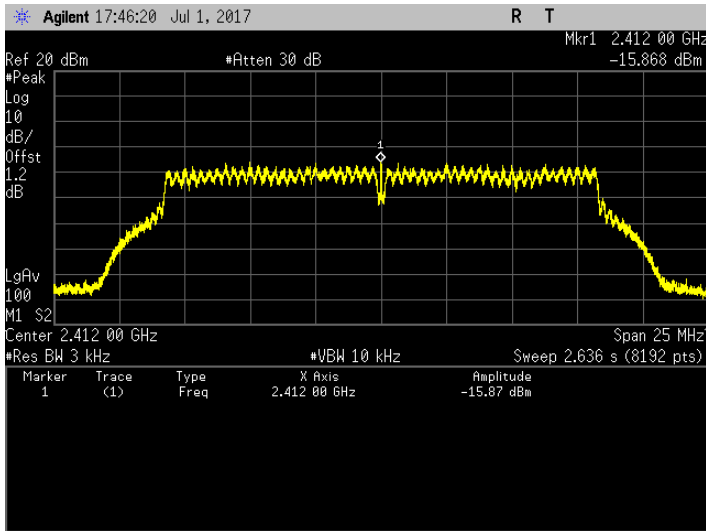

Maximum Power Spectral Density. 802.11g
 Frequency 2412 MHz

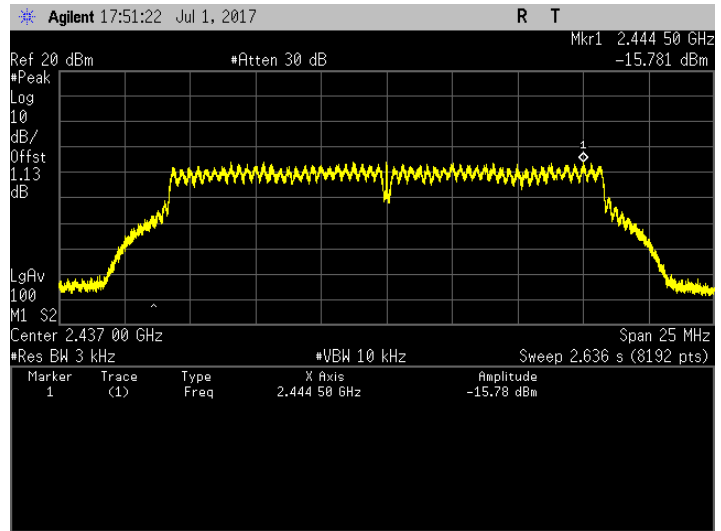


Maximum Power Spectral Density. 802.11g
 Frequency 2437 MHz

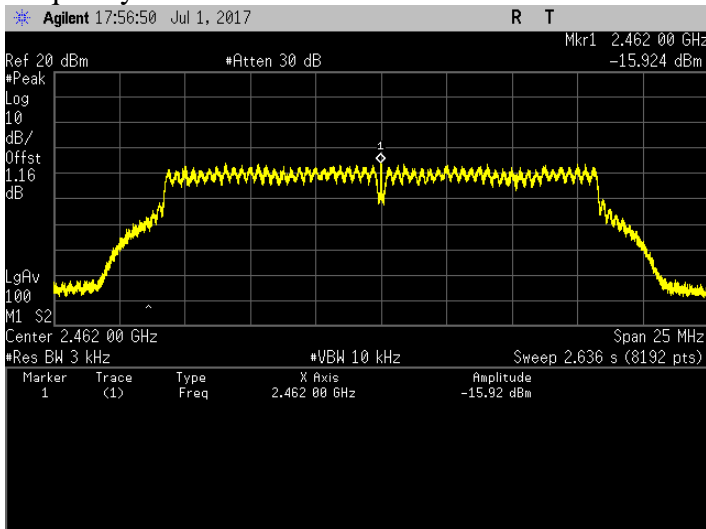


Maximum Power Spectral Density. 802.11g
 Frequency 2462 MHz

802.11n (HT20)


Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Power (dBm/3kHz)	Status
802.11n	OFDM	BPSK	6.5	2412	-13.601	Pass
802.11n	OFDM	BPSK	6.5	2437	-14.183	Pass
802.11n	OFDM	BPSK	6.5	2462	-10.343	Pass

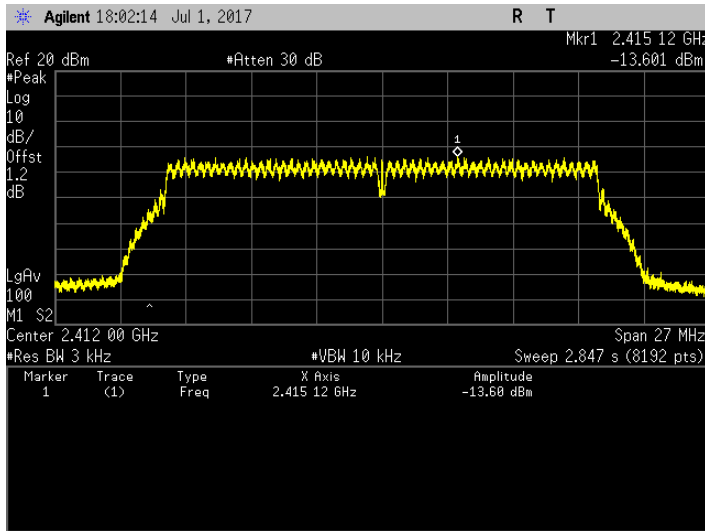

Maximum Power Spectral Density. 802.11n
 Frequency 2412 MHz

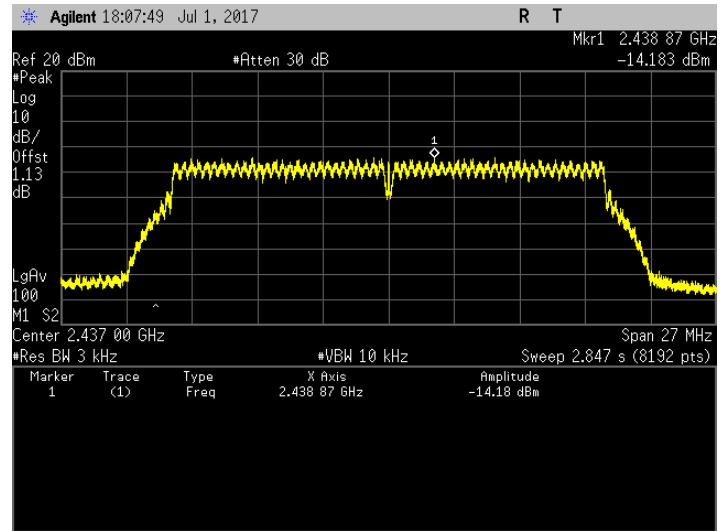


Maximum Power Spectral Density. 802.11n
 Frequency 2437 MHz

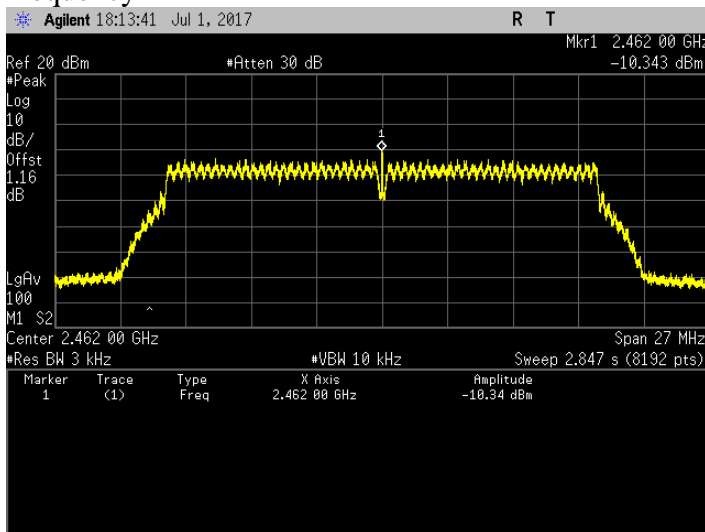

Maximum Power Spectral Density. 802.11n
 Frequency 2462 MHz

6.5 Conducted Spurious Emission

6.5.1 Test Setup

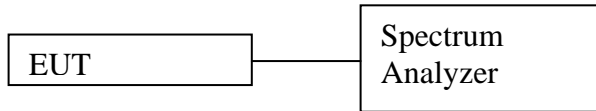

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission and scan up to 10th harmonic.


6.5.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.

6.5.3 Test Result


802.11b

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11b	DSSS	QPSK	2	2412	14188.38	-49.89	Pass
					6993.99	-50.56	Pass
					6723.45	-50.57	Pass
802.11b	DSSS	QPSK	2	2437	14188.38	-49.79	Pass
					6983.97	-51.05	Pass
					6643.29	-51.17	Pass
802.11b	DSSS	QPSK	2	2462	6683.37	-49.91	Pass
					6993.99	-50.11	Pass
					14188.38	-50.76	Pass

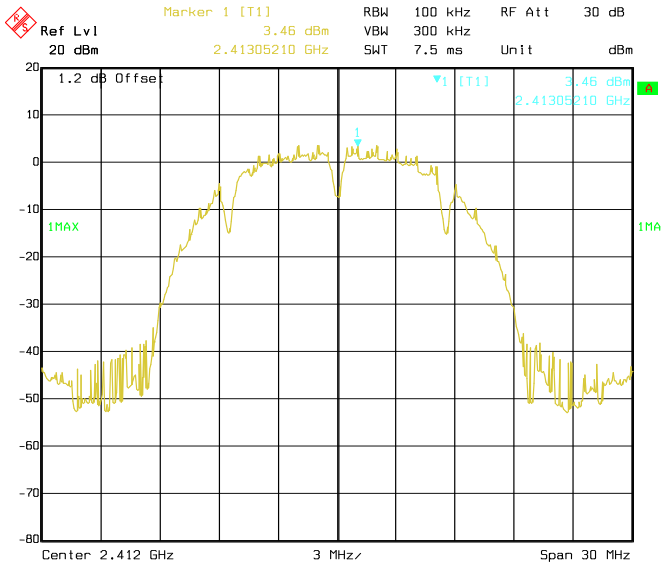


Date: 01.JUL.2017 17:24:30

Conducted Emissions. 802.11b, Frequency 2412 MHz Reference Level

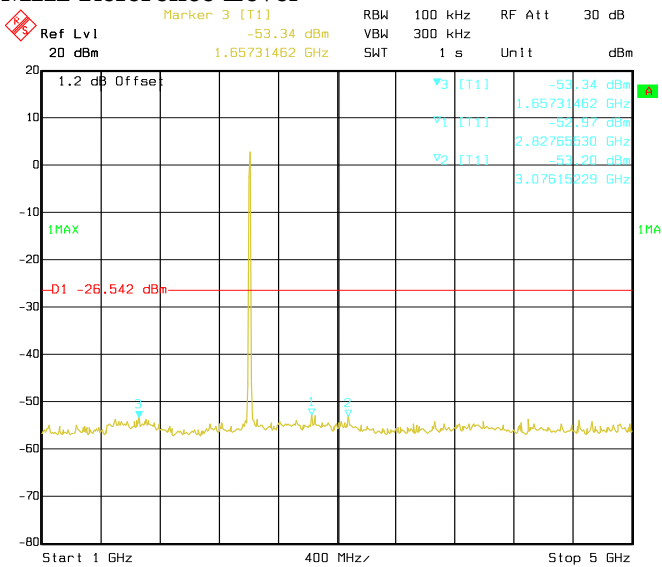


Date: 01.JUL.2017 17:25:35

Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

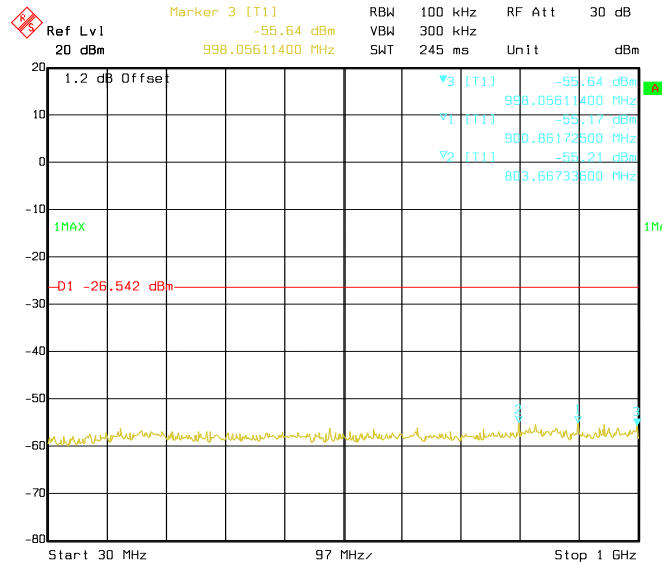


Date: 01.JUL.2017 17:25:03

Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

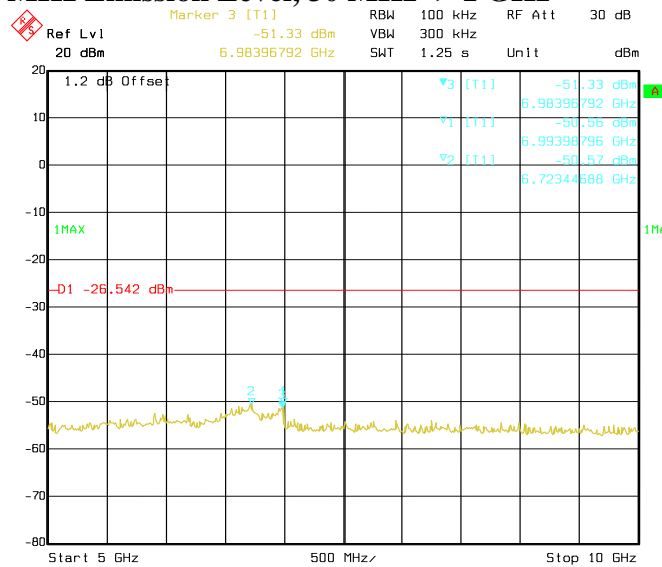


Date: 01.JUL.2017 17:26:08


Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

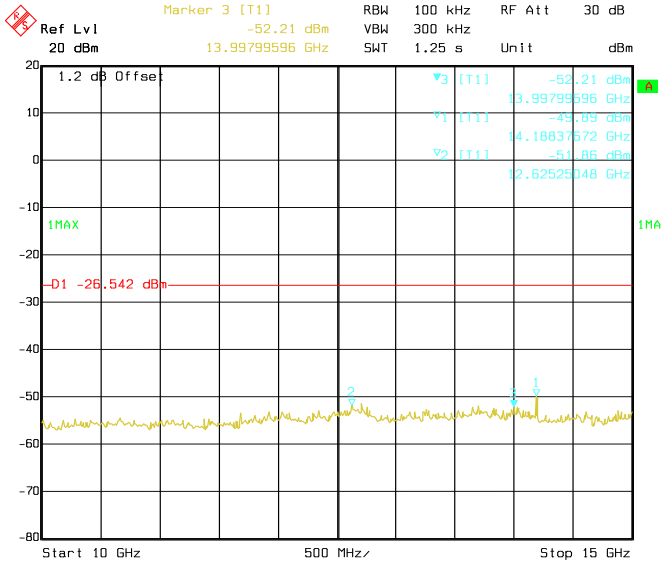


Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

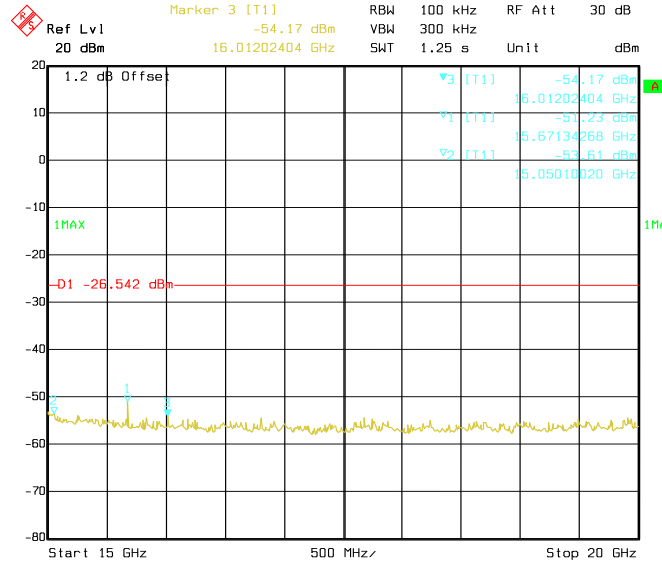

Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz

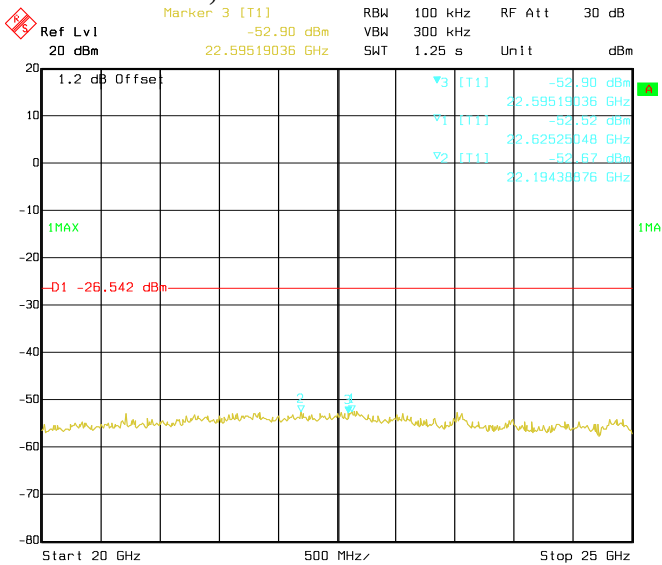


Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz

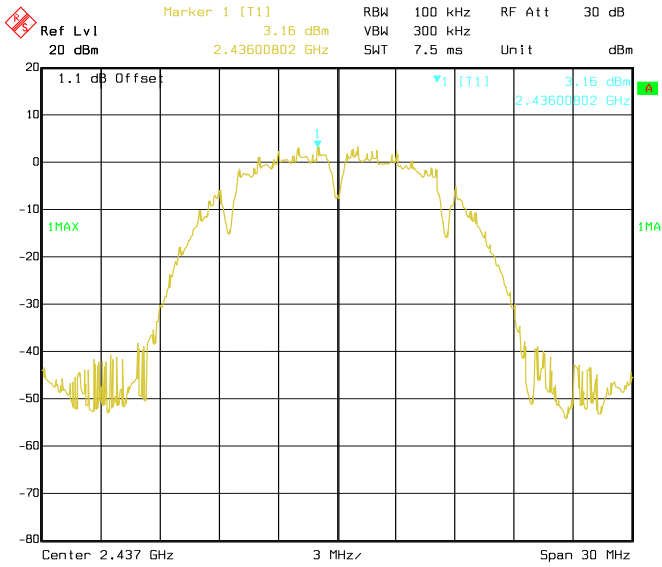


Date: 02.JUL.2017 07:55:49

Conducted Emissions. 802.11b, Frequency 2437 MHz Reference Level

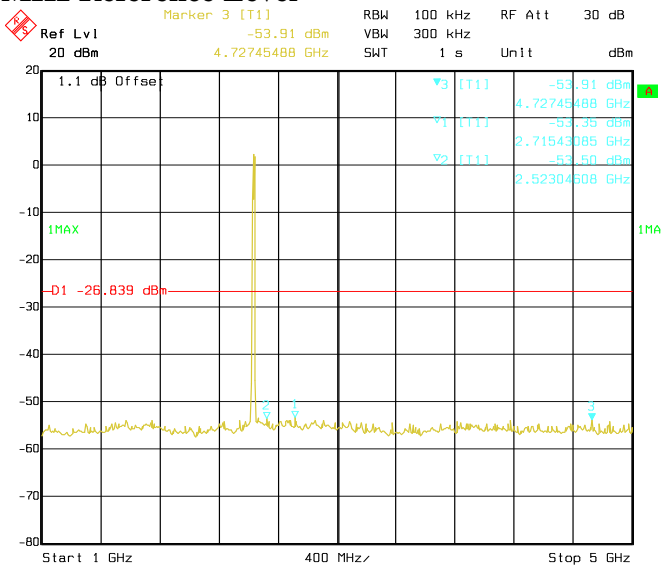


Date: 02.JUL.2017 07:56:55

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

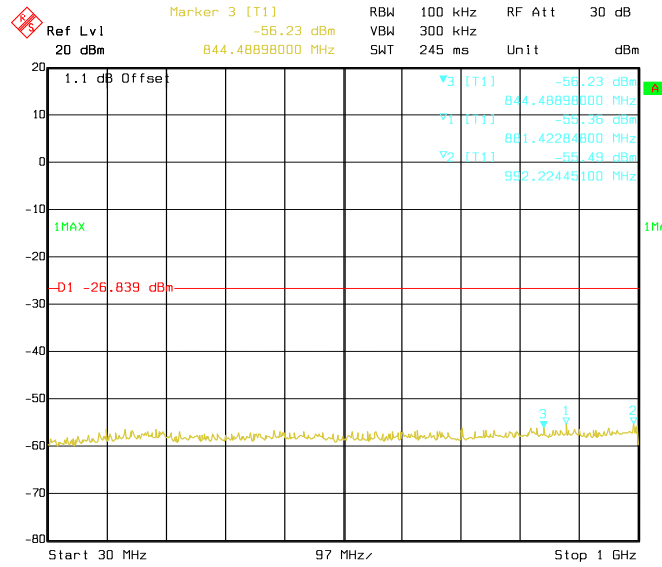


Date: 02.JUL.2017 07:56:22

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

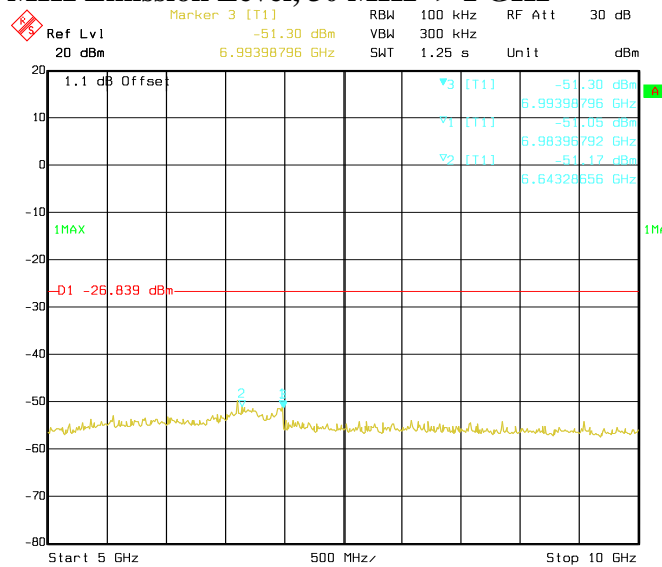


Date: 02.JUL.2017 07:57:28

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

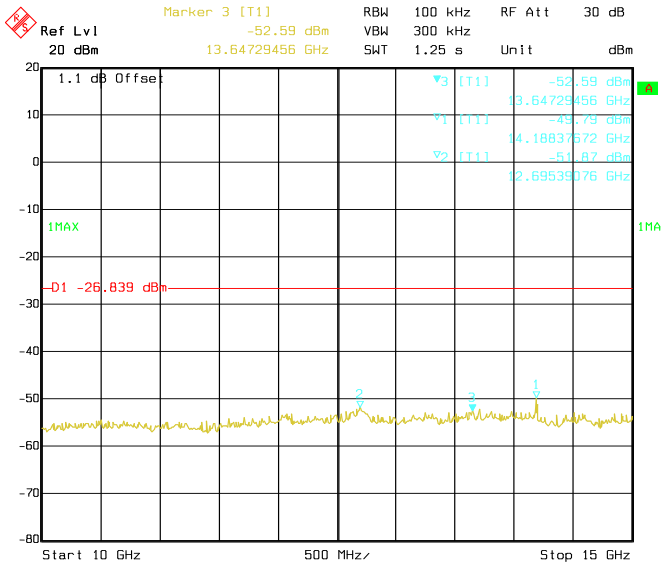


Date: 02.JUL.2017 07:58:00

**Conducted Emissions. 802.11b, Frequency 2437
 Emission Level, 10 GHz -> 15 GHz**

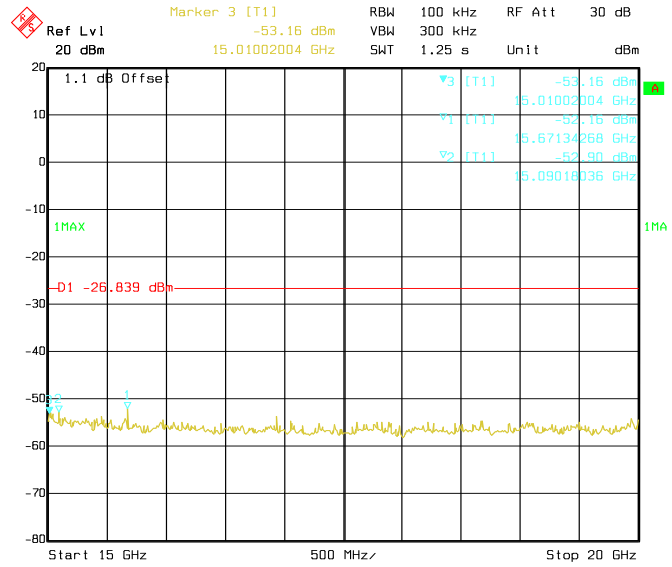


Date: 02.JUL.2017 07:58:33

**Conducted Emissions. 802.11b, Frequency 2437
 MHz Emission Level, 15 GHz -> 20 GHz**

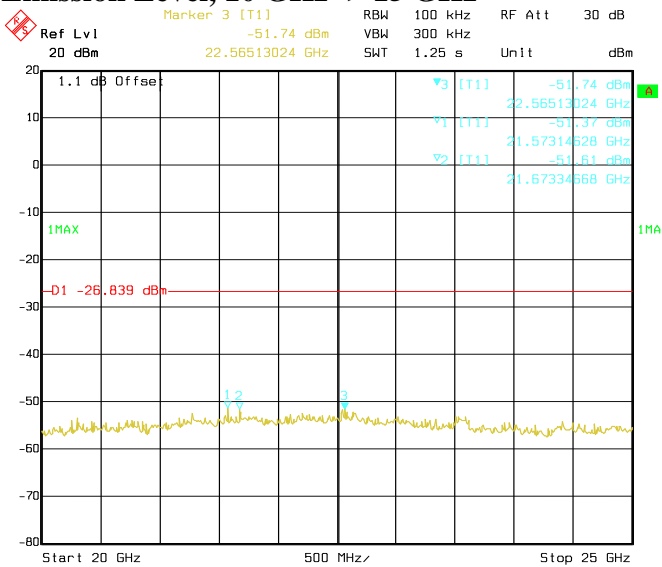


Date: 02.JUL.2017 07:59:06

**Conducted Emissions. 802.11b, Frequency 2437
 MHz Emission Level, 20 GHz -> 25 GHz**

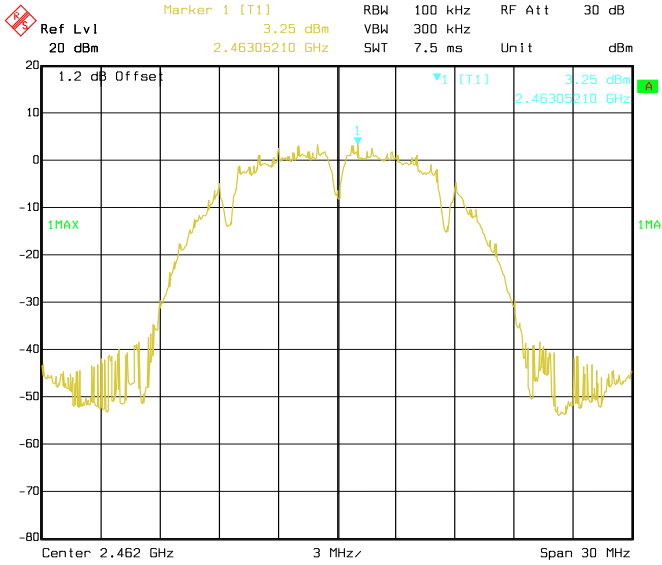


Date: 02.JUL.2017 08:00:20

Conducted Emissions. 802.11b, Frequency 2462 MHz Reference Level

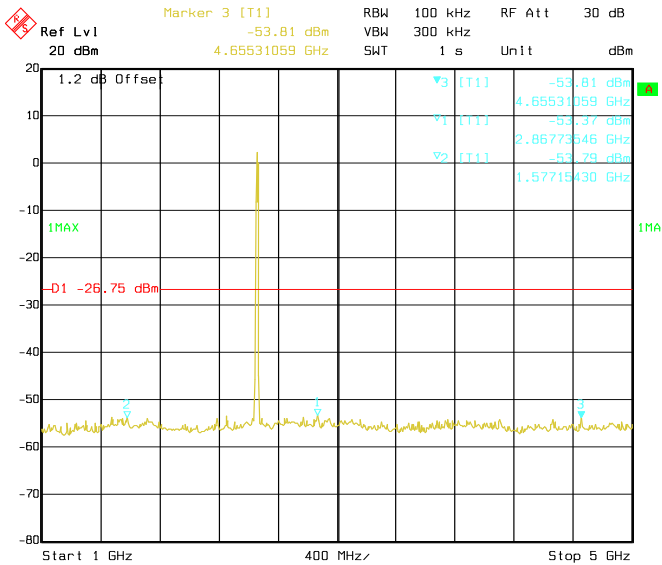


Date: 02.JUL.2017 08:01:26

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

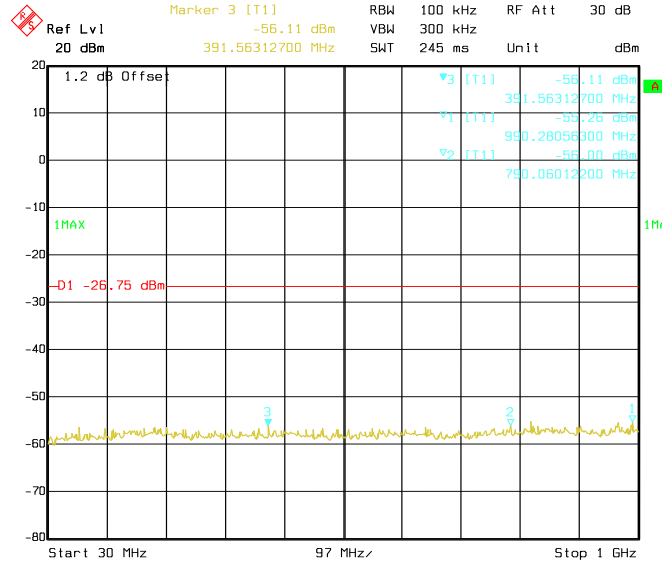


Date: 02.JUL.2017 08:00:53

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

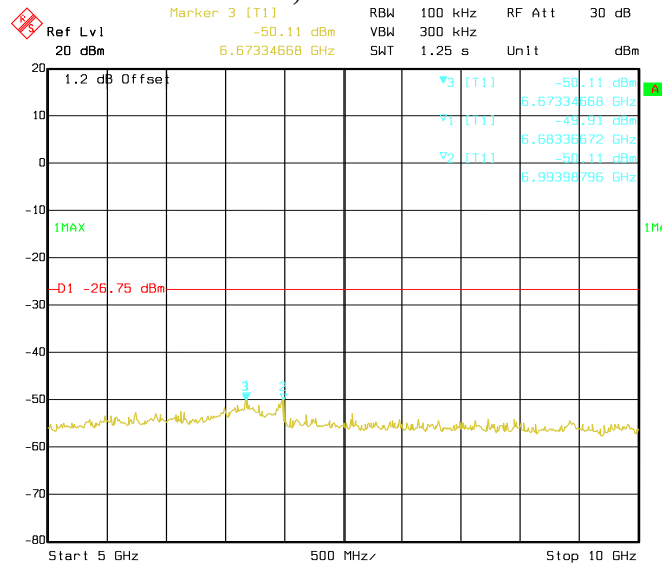


Date: 02.JUL.2017 08:01:58

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

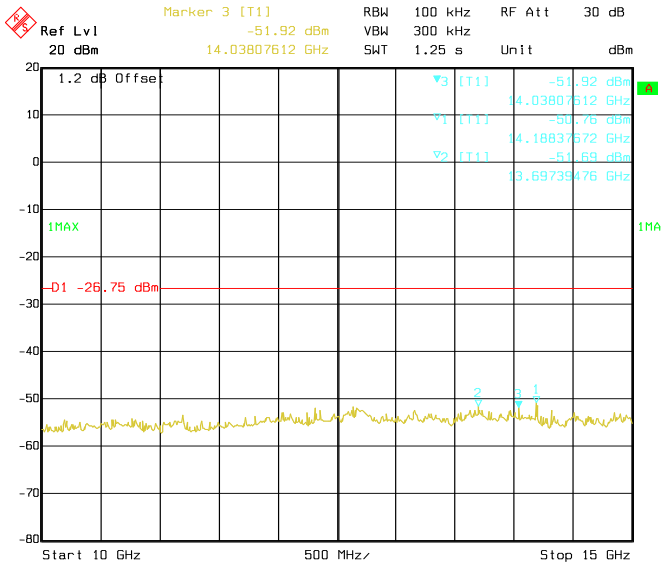


Date: 02.JUL.2017 08:02:31

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

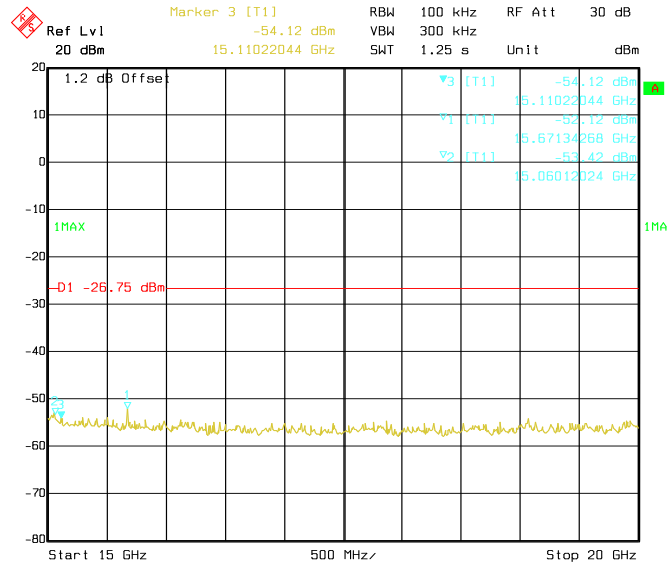

Date: 02.JUL.2017 08:03:04

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

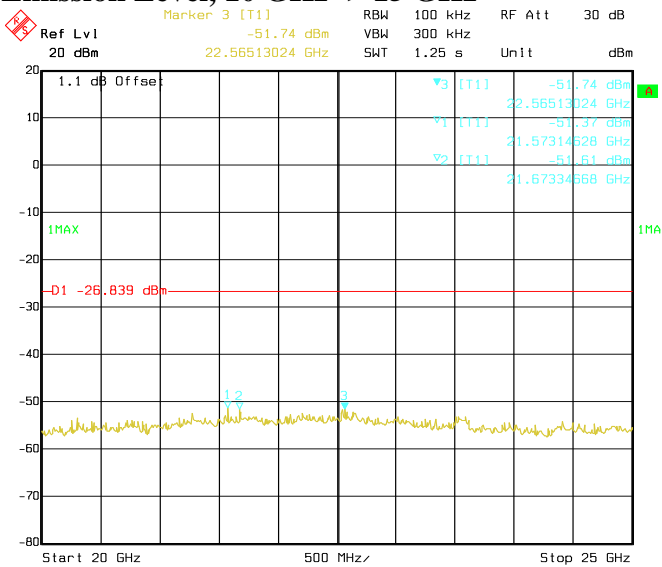


Date: 02.JUL.2017 07:59:06

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz


802.11g

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11g	OFDM	DBPSK	6	2412	14188.38	-49.99	Pass
					6723.45	-51.13	Pass
					6993.99	-51.32	Pass
802.11g	OFDM	DBPSK	6	2437	6713.43	-50.25	Pass
					14188.38	-50.29	Pass
					6993.99	-51.30	Pass
802.11g	OFDM	DBPSK	6	2462	14188.38	-50.26	Pass
					6993.99	-50.47	Pass
					6713.43	-51.51	Pass

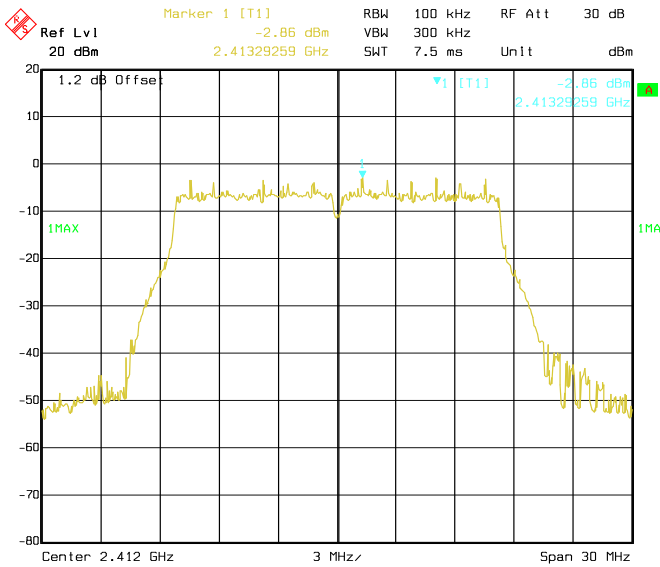


Date: 01.JUL.2017 17:36:39

Conducted Emissions. 802.11g, Frequency 2412 MHz Reference Level

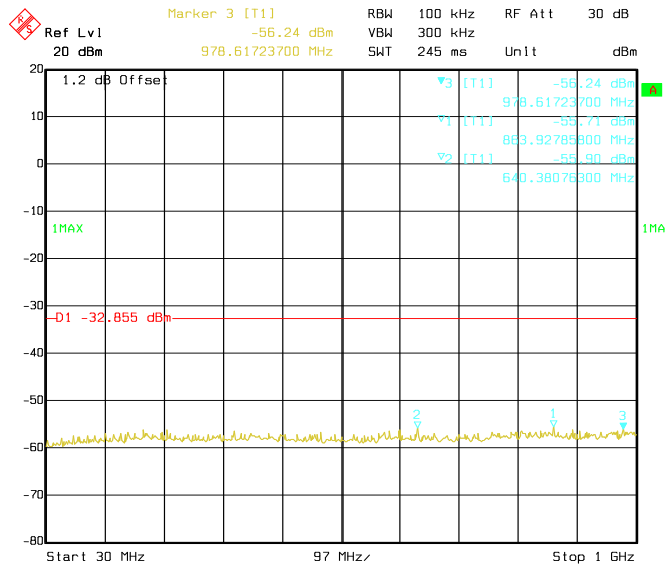


Date: 01.JUL.2017 17:37:13

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

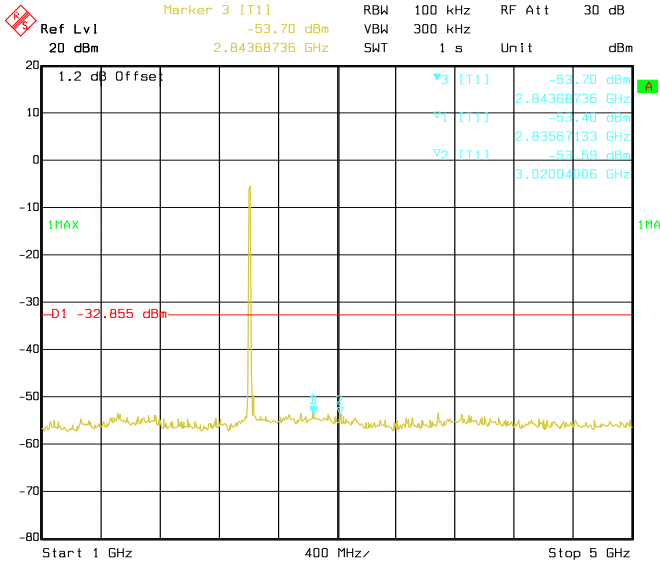


Date: 01.JUL.2017 17:37:46

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

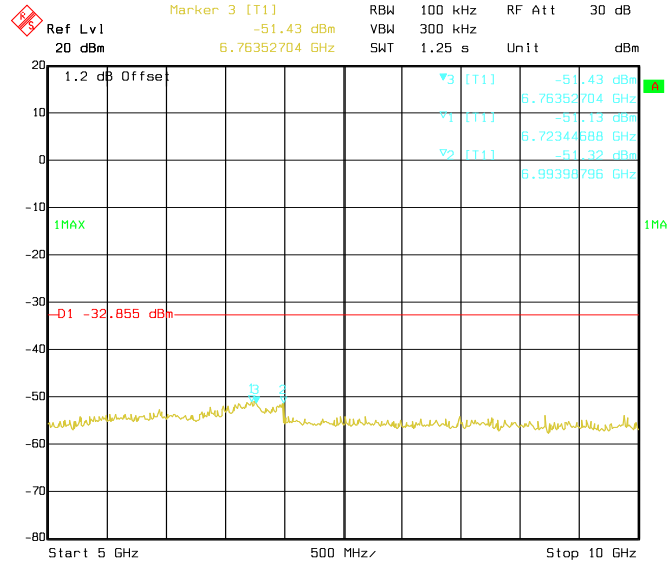


Date: 01.JUL.2017 17:38:18

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

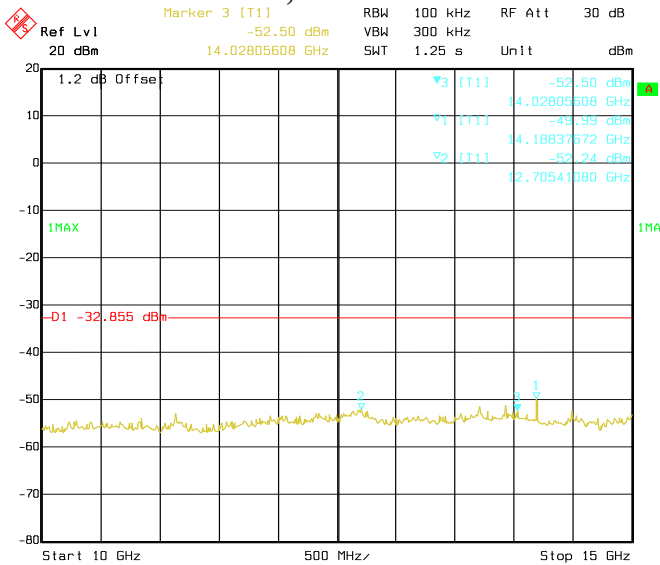


Date: 01.JUL.2017 17:38:51

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

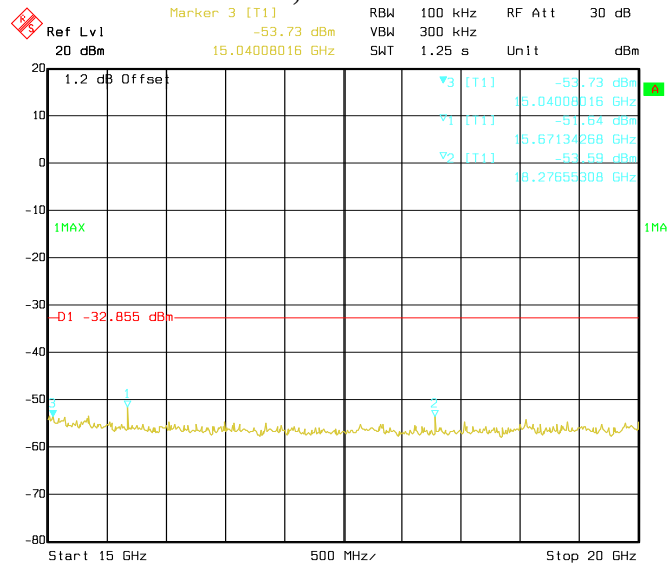


Date: 01.JUL.2017 17:39:24

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz

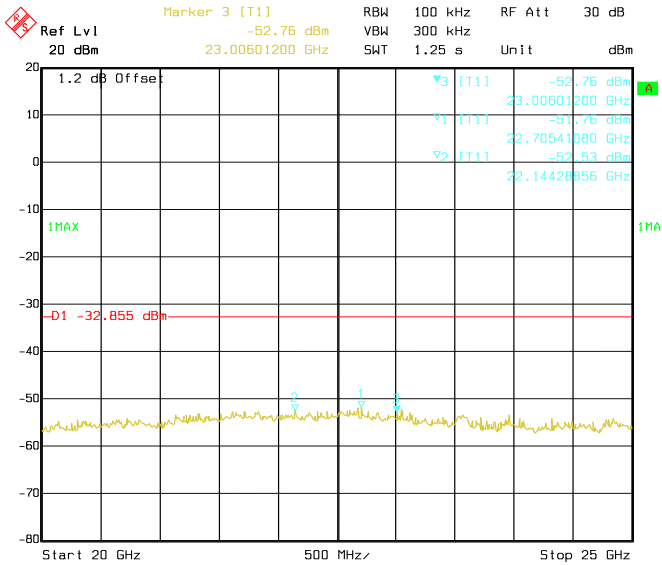


Date: 01.JUL.2017 17:39:57

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz

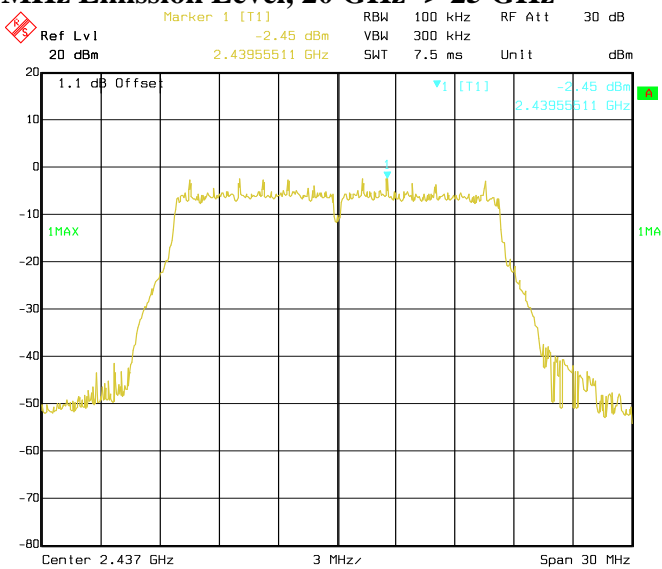


Date: 01.JUL.2017 17:40:52

Conducted Emissions. 802.11g, Frequency 2437 MHz Reference Level

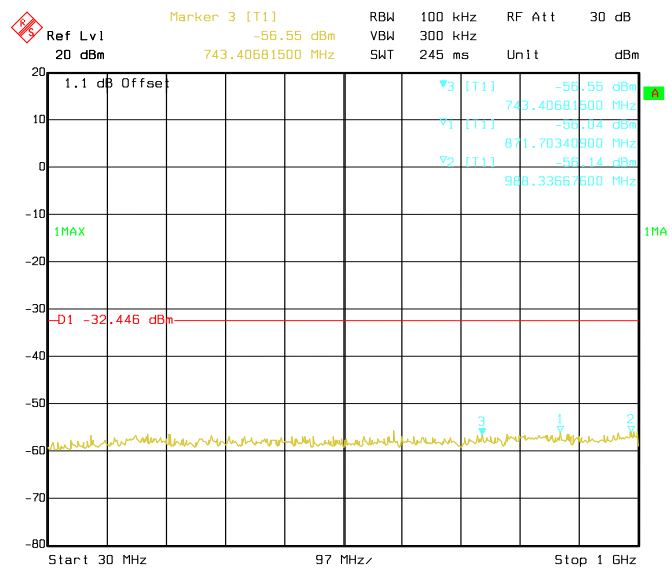


Date: 01.JUL.2017 17:41:25


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

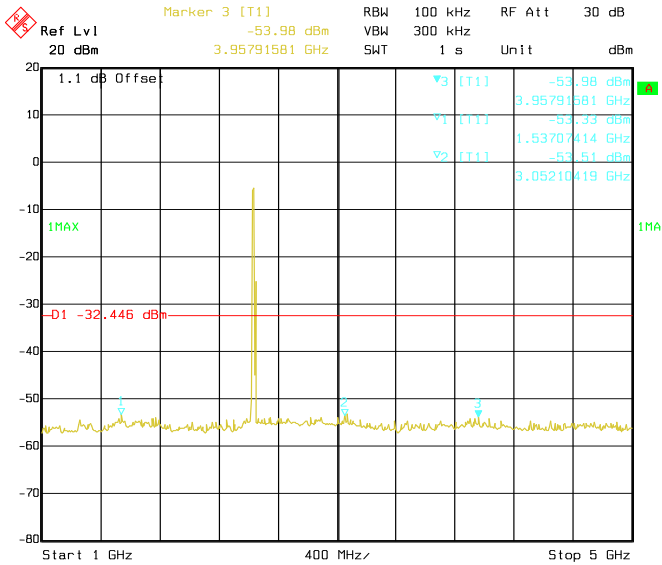


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

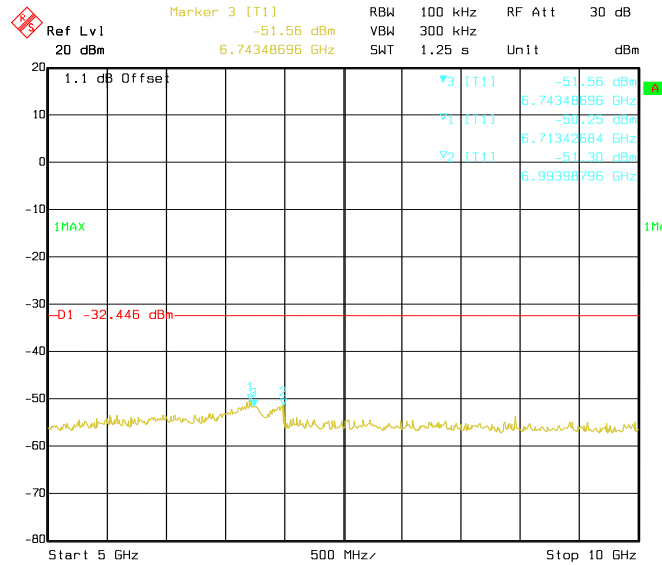


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

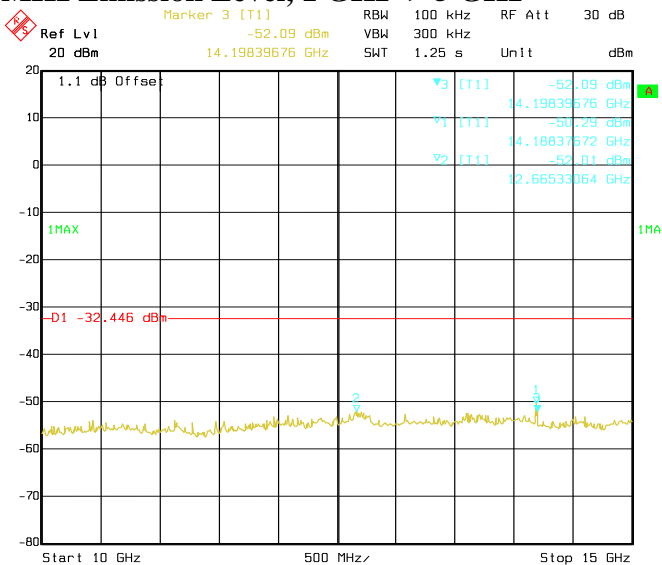

Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

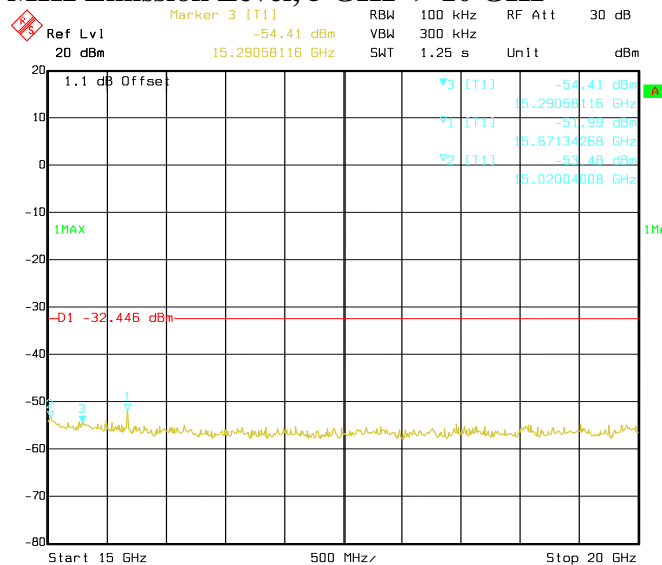


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz

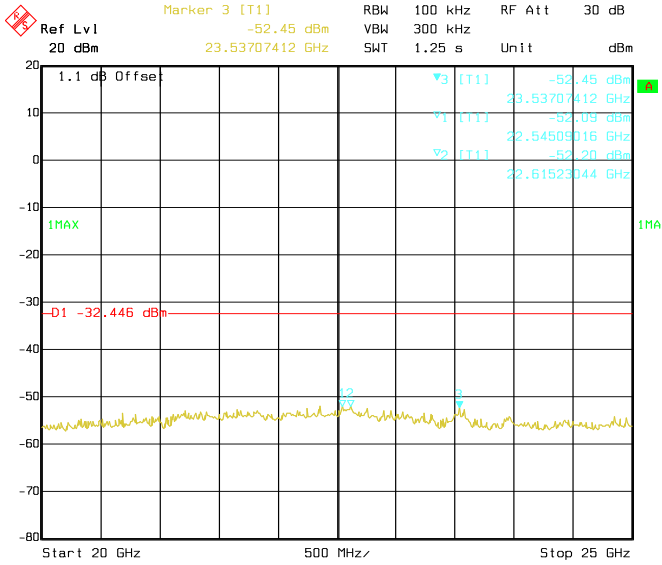


Date: 01.JUL.2017 17:44:08

Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

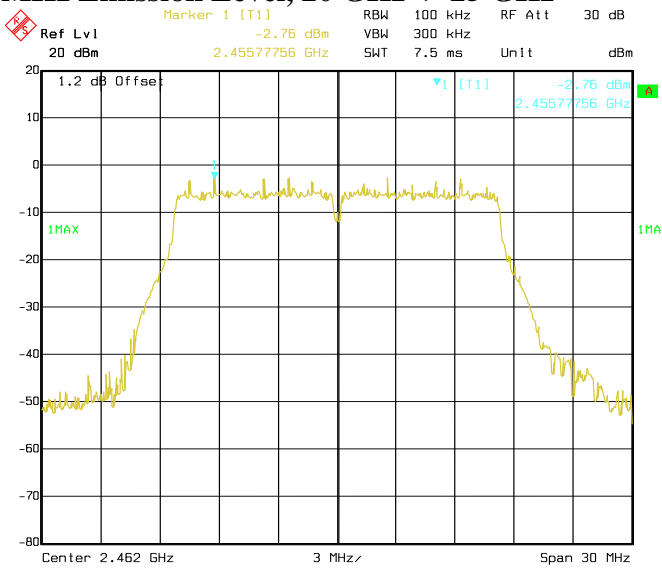


Date: 01.JUL.2017 17:44:54

Conducted Emissions. 802.11g, Frequency 2462 MHz Reference Level

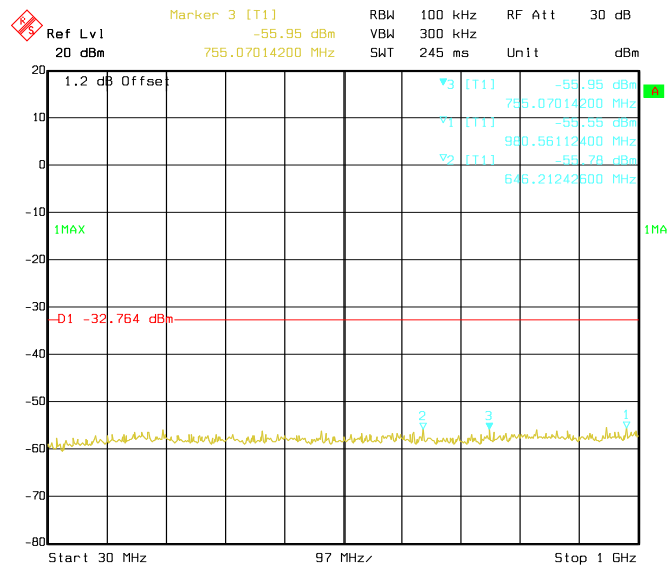


Date: 01.JUL.2017 17:45:27


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

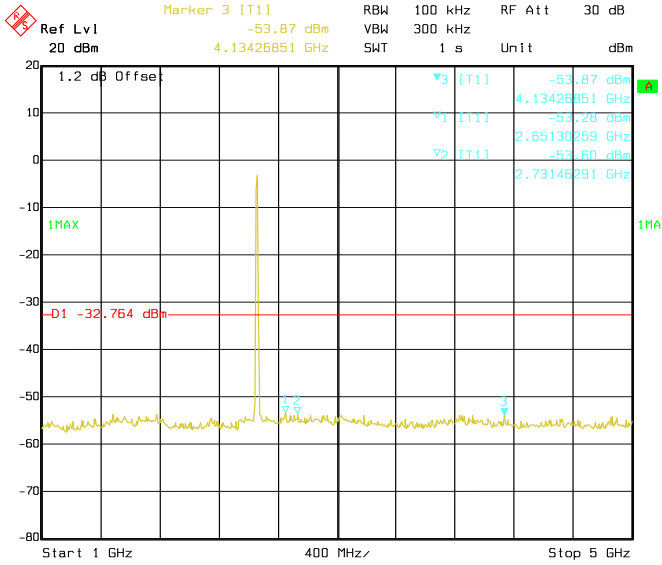


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

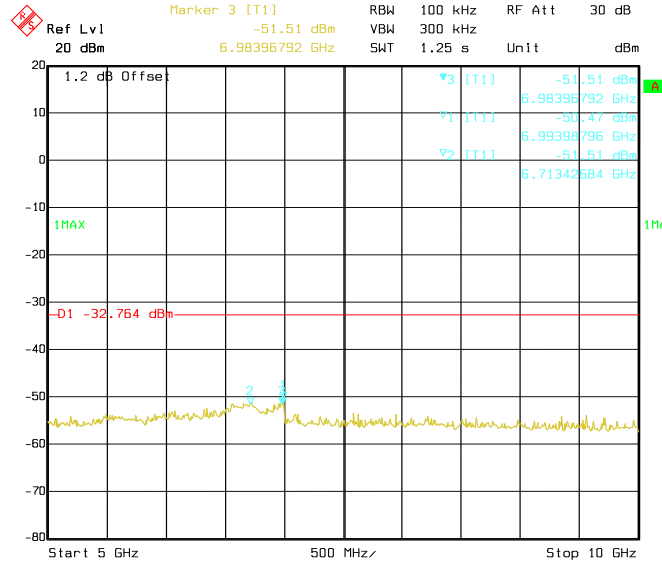


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

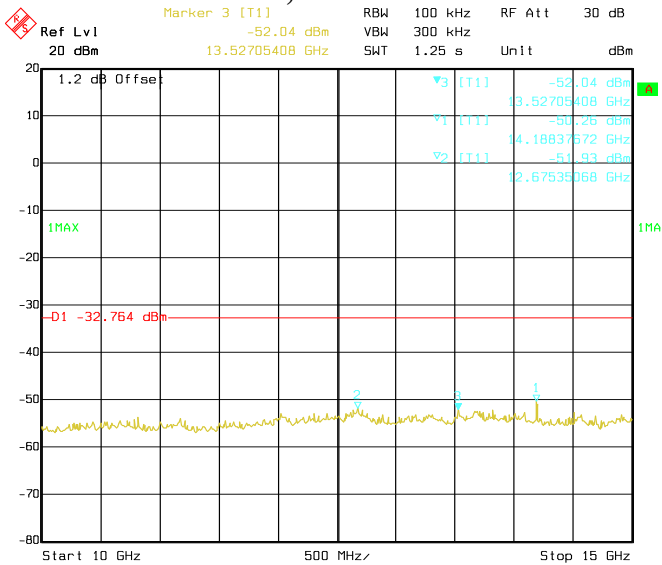

Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

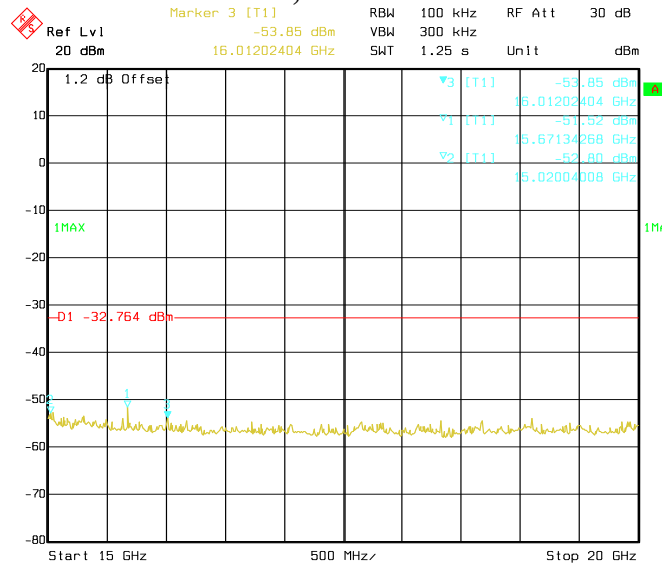

Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

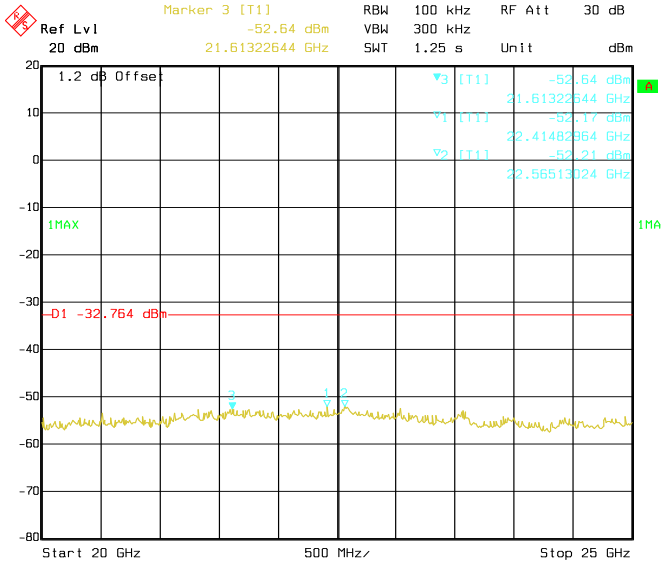


Date: 01.JUL.2017 17:48:12


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz

802.11n (HT20)


				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11n	OFDM	DBPSK	6.5	2412	14188.38	-50.09	Pass
					6993.99	-50.52	Pass
					6743.49	-50.78	Pass
802.11n	OFDM	DBPSK	6.5	2437	14188.38	-49.49	Pass
					6993.99	-49.72	Pass
					6563.13	-51.18	Pass
802.11n	OFDM	DBPSK	6.5	2462	14188.38	-49.93	Pass
					6723.45	-50.20	Pass
					6643.29	-51.09	Pass

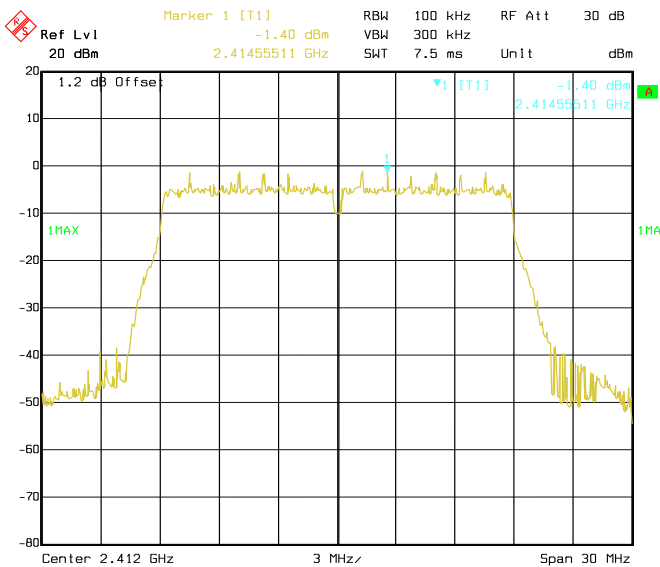


Date: 01.JUL.2017 17:48:58
Conducted Emissions. 802.11n, Frequency 2412 MHz Reference Level

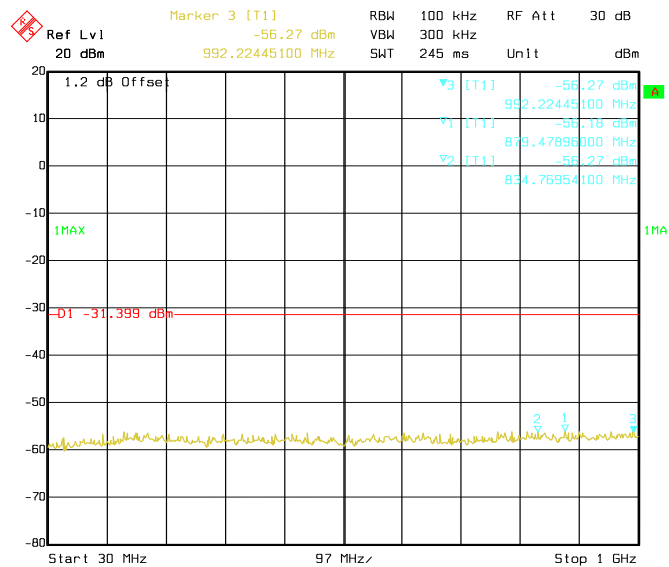


Date: 01.JUL.2017 17:49:32
Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

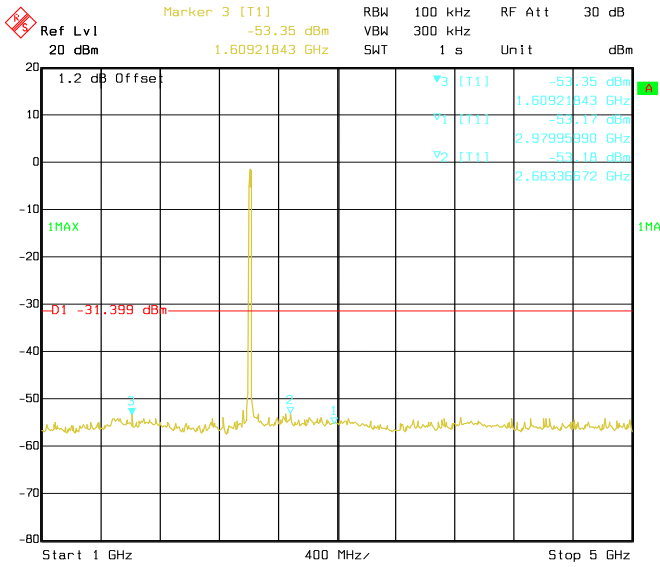


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

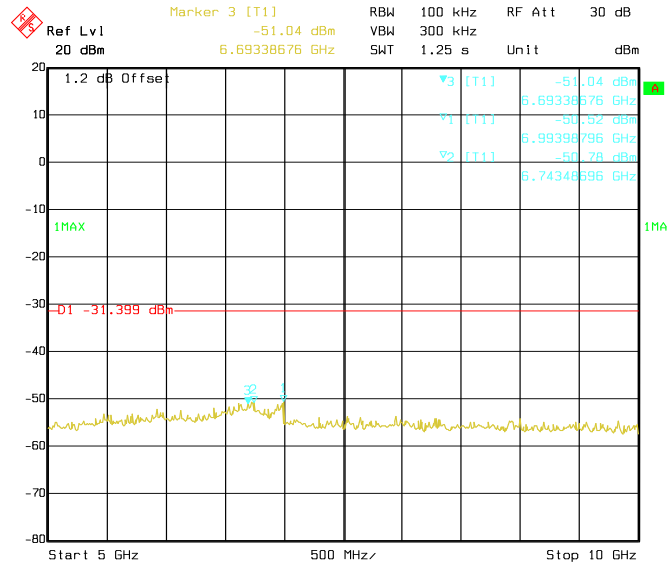


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

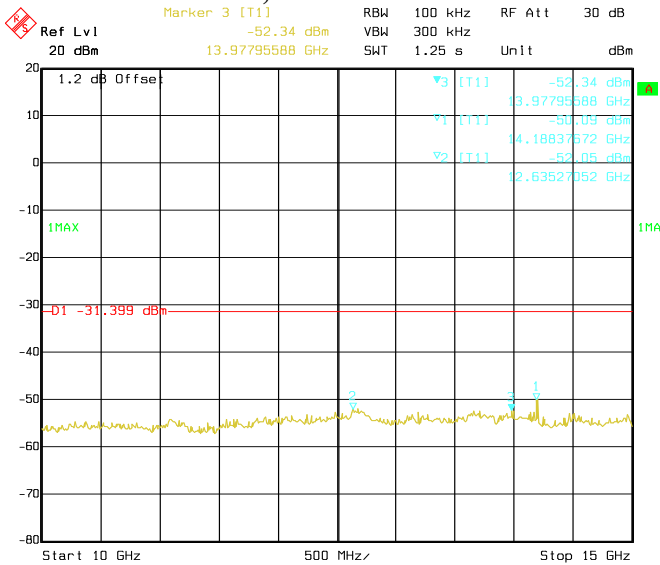

Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

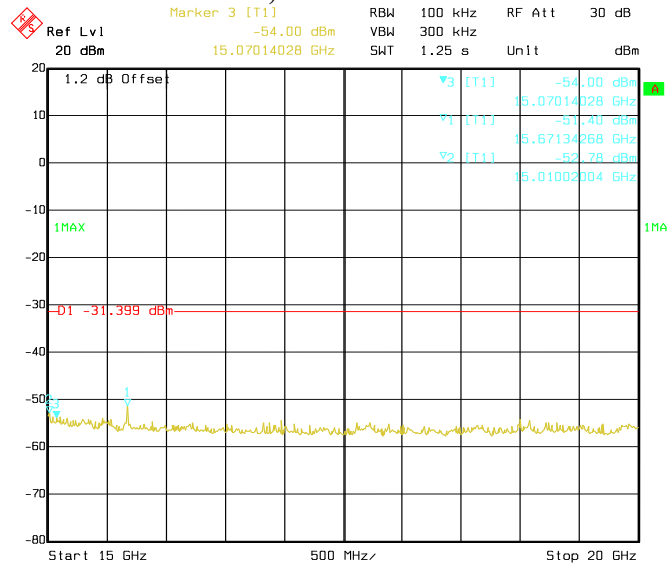


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz

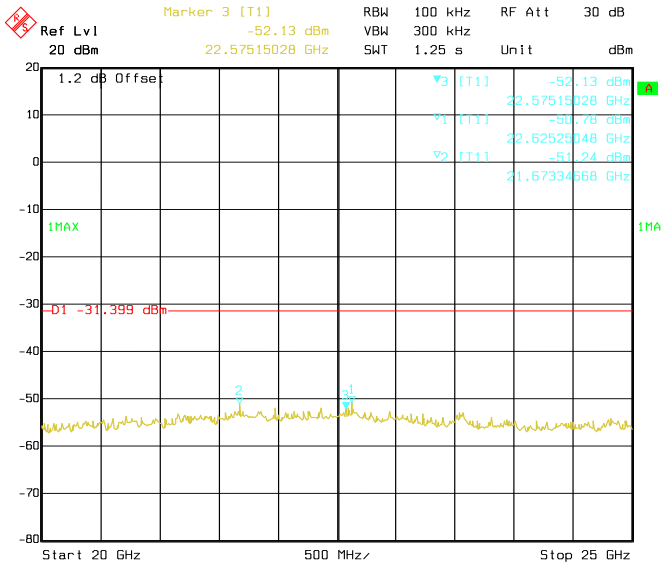


Date: 01.JUL.2017 17:52:17

Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz

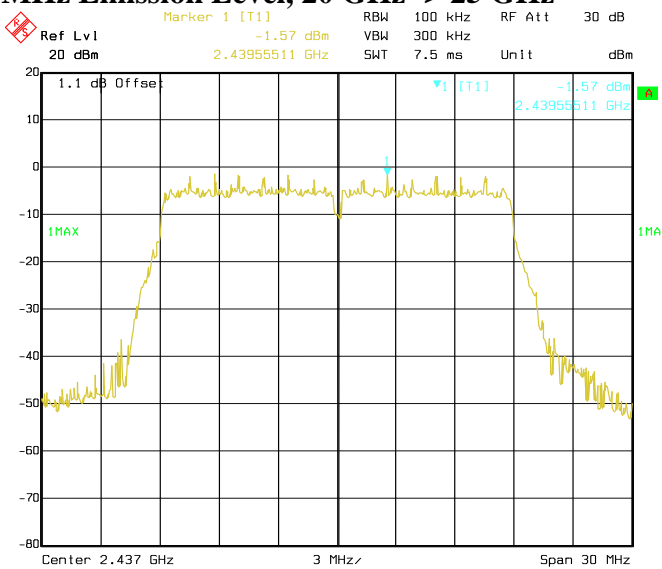


Date: 01.JUL.2017 17:53:00

Conducted Emissions. 802.11n, Frequency 2437 MHz Reference Level

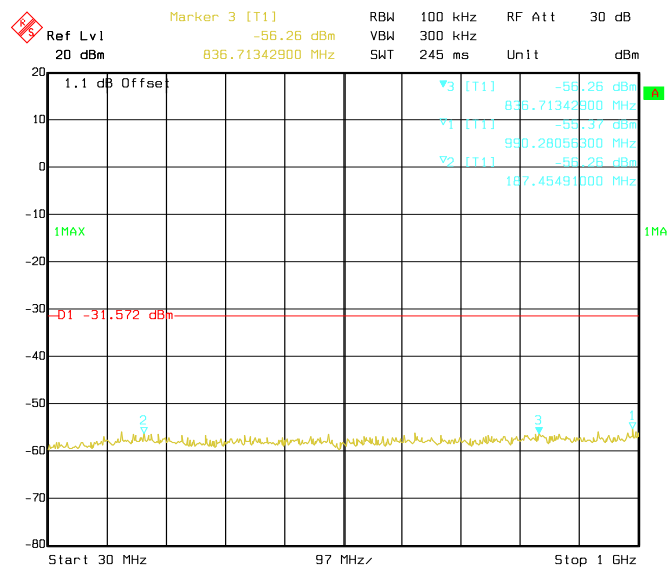


Date: 01.JUL.2017 17:53:33


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

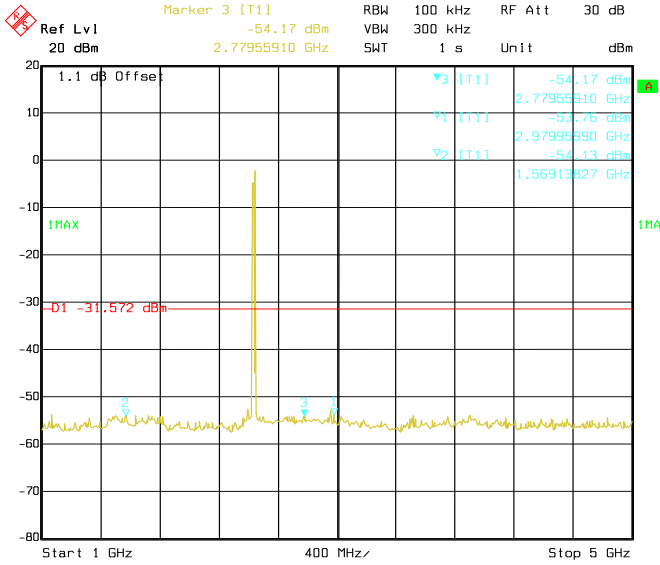


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

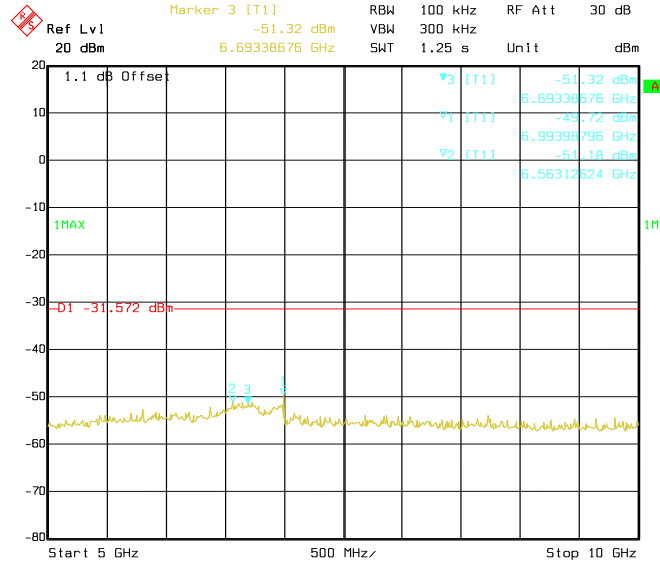


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

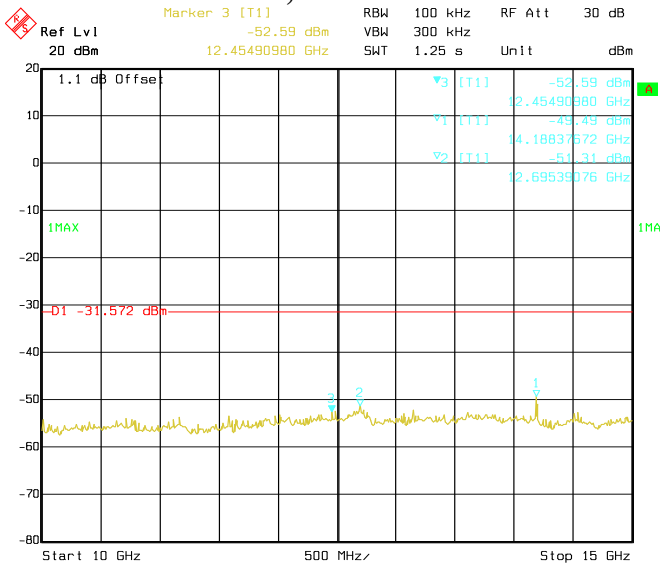

Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

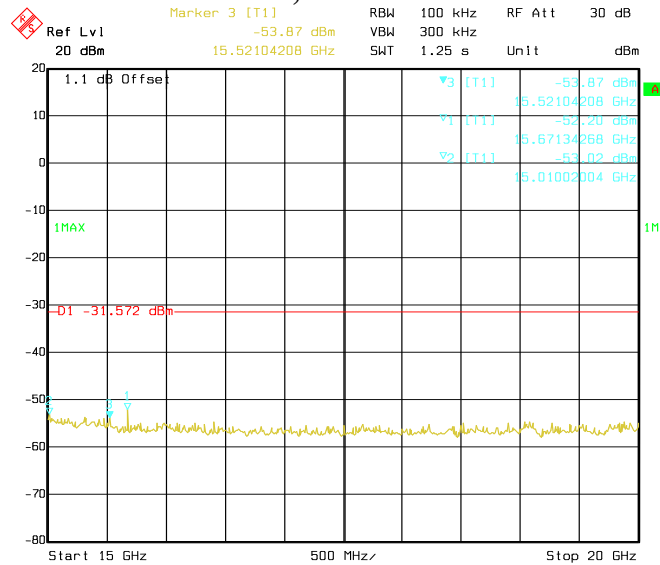


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz

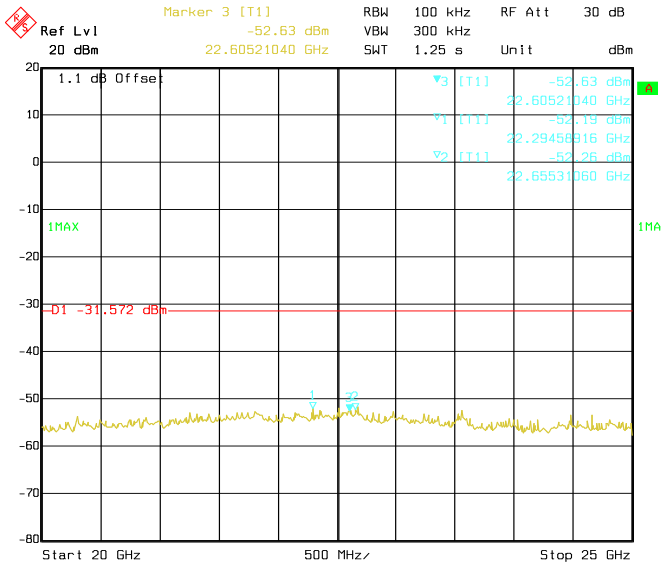


Date: 01.JUL.2017 17:56:17

Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

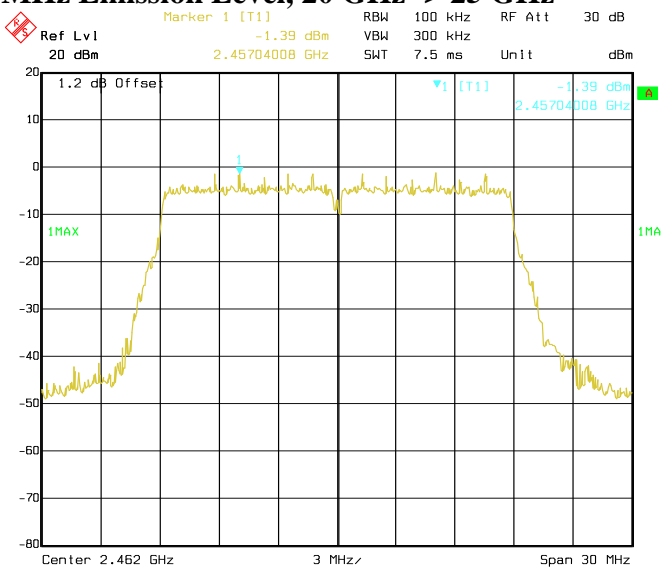


Date: 01.JUL.2017 17:57:03

Conducted Emissions. 802.11n, Frequency 2462 MHz Reference Level

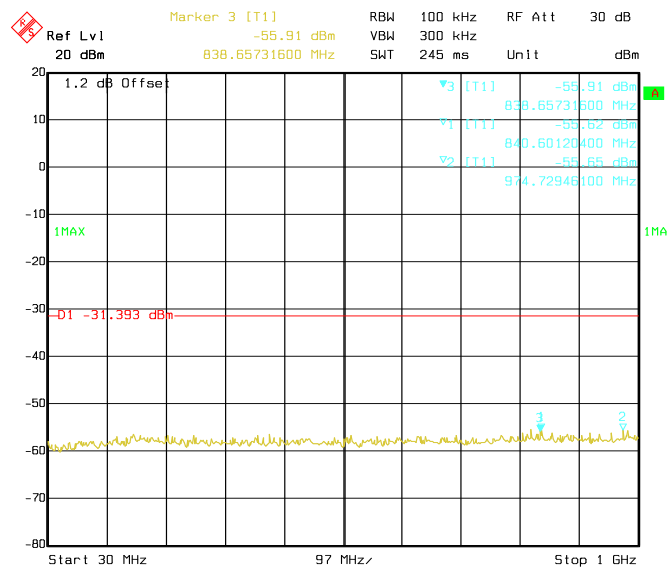


Date: 01.JUL.2017 17:57:36

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

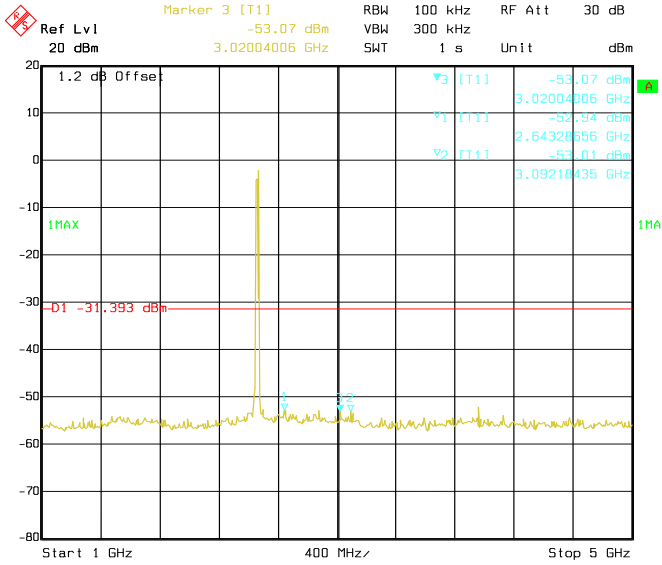


Date: 01.JUL.2017 17:58:09

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

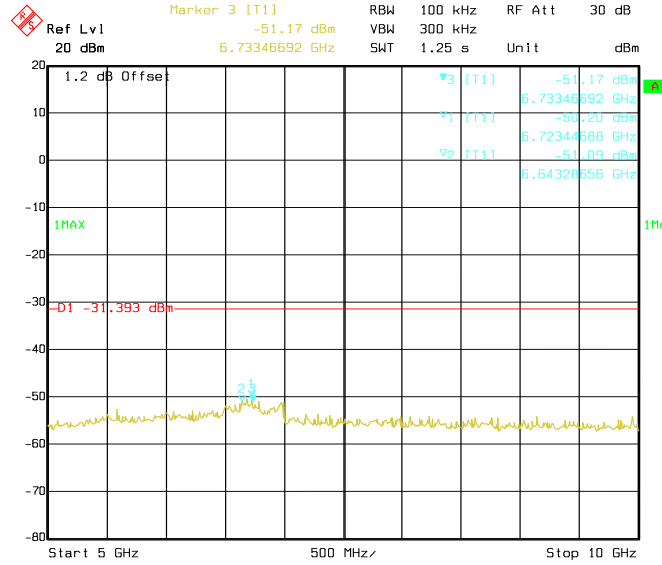


Date: 01.JUL.2017 17:58:42

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

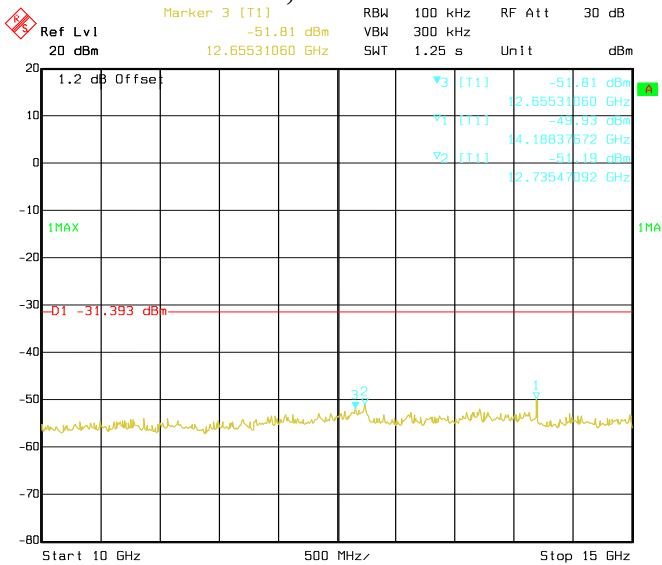


Date: 01.JUL.2017 17:59:14

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

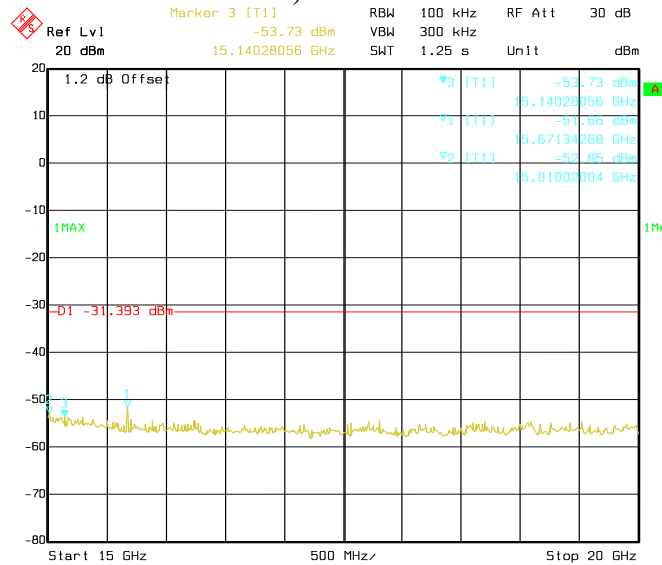

Date: 01.JUL.2017 17:59:47


Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

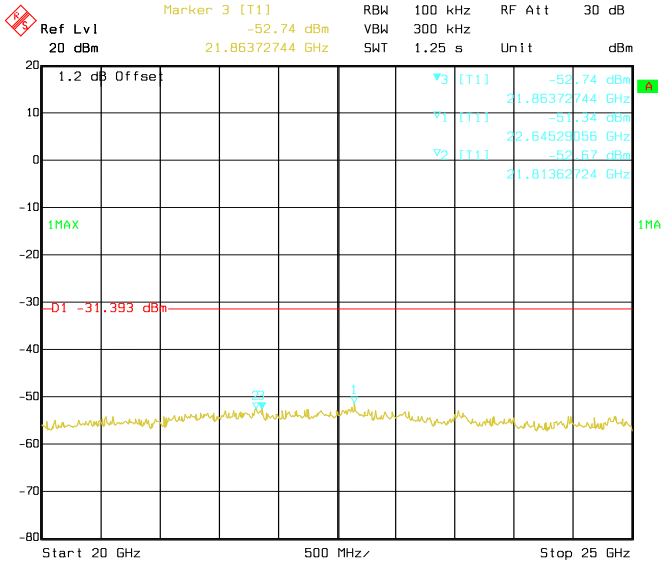

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz

6.6 Band edge Conducted Spurious Emission

6.6.1 Test Setup

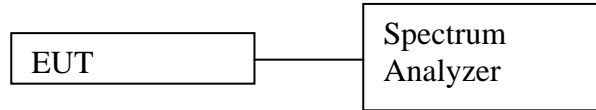

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.


6.6.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.


6.6.3 Test Results:

802.11b


Test Conditions					Results		
Standard	Modulation Type	Modulation Technology	Data Rate (Mbps)	Test Frequency (MHz)	Frequencies (MHz)	Level (dBm)	Status
802.11b	DSSS	QPSK	2	2412	2399.92	-42.58	Pass
802.11b	DSSS	QPSK	2	2462	2483.57	-57.59	Pass

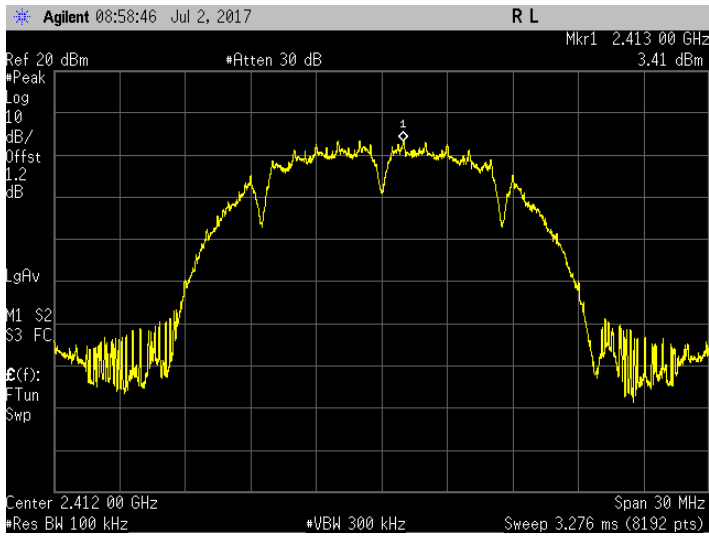


Band Edge. 802.11b Frequency 2412 MHz Reference Level

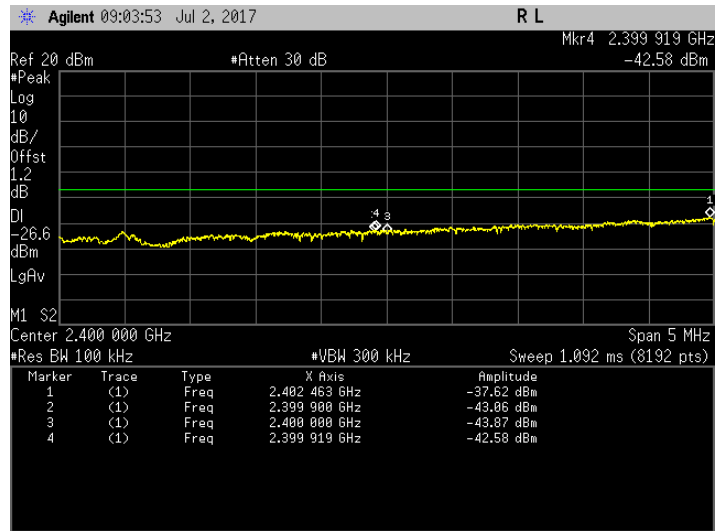

Band Edge. 802.11b Frequency 2412 MHz Band Edge

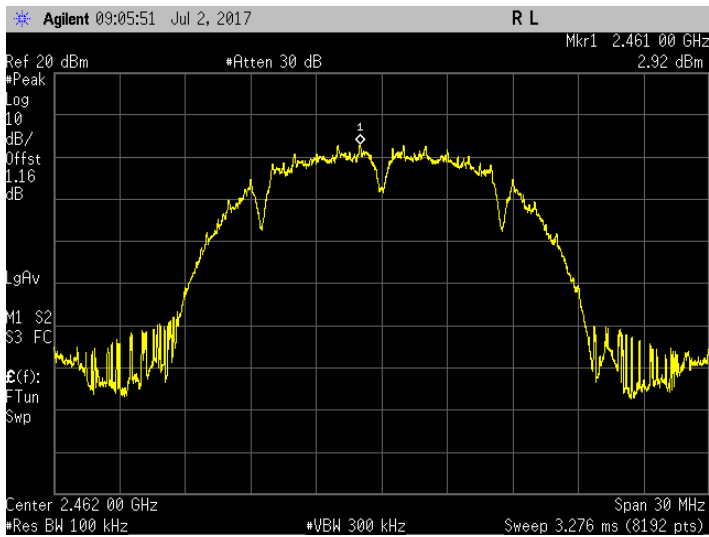


Band Edge. 802.11b Frequency 2462 MHz Reference Level

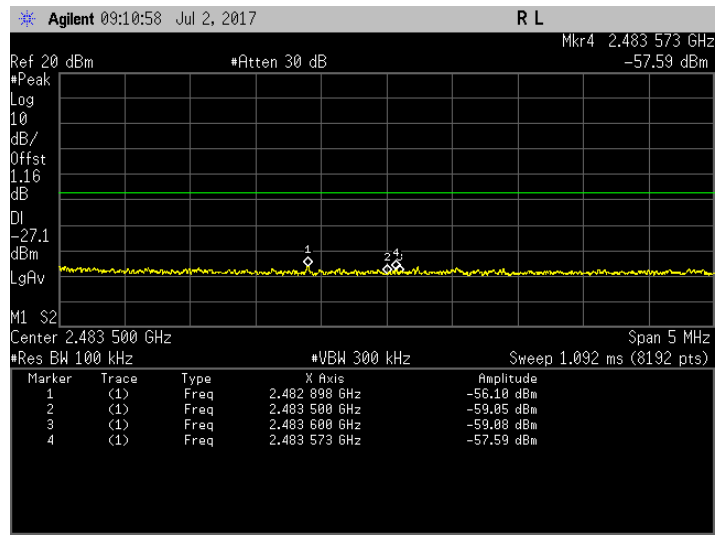


Band Edge. 802.11b Frequency 2462 MHz Band Edge

802.11g


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (Mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	2399.98	-43.88	Pass
802.11g	OFDM	BPSK	6	2462	2483.50	-57.21	Pass

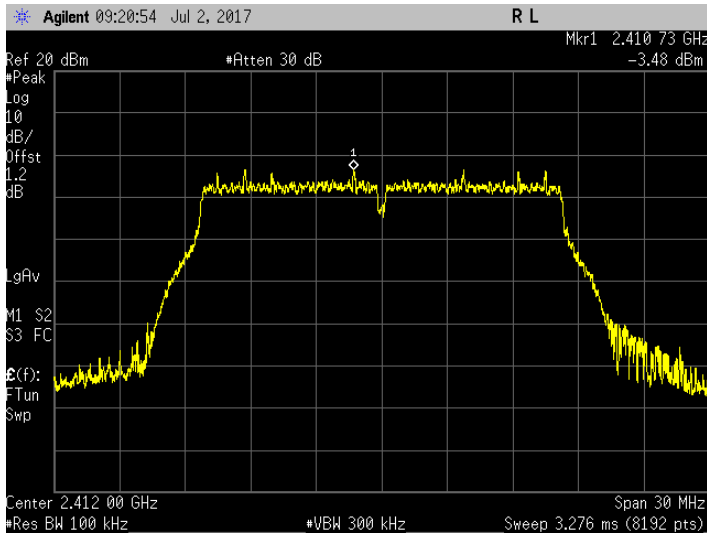


Band Edge. 802.11g Frequency 2412 MHz Reference Level

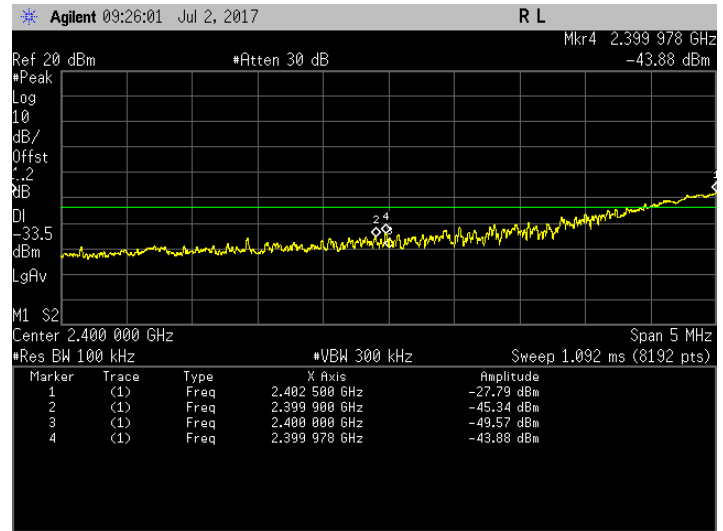

Band Edge. 802.11g Frequency 2412 MHz Band Edge

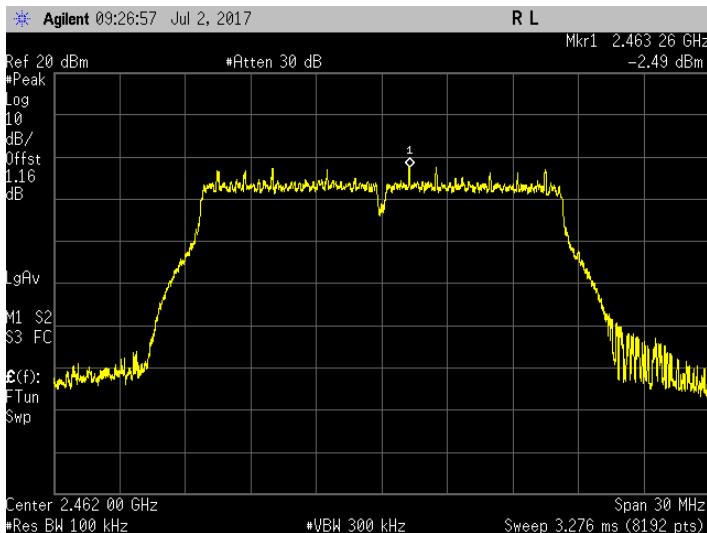


Band Edge. 802.11g Frequency 2462 MHz Reference Level

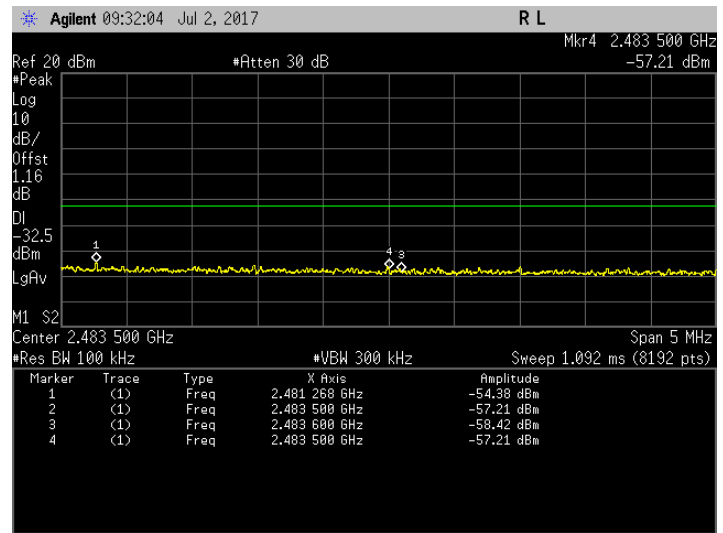


Band Edge. 802.11g Frequency 2462 MHz Band Edge

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (Mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	2399.93	-40.43	Pass
802.11n	OFDM	BPSK	6.5	2462	2483.59	-51.34	Pass

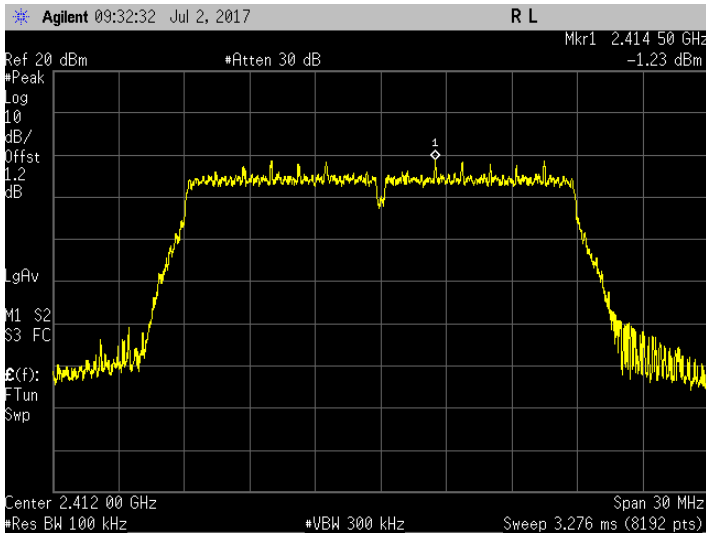


Band Edge. 802.11n Frequency 2412 MHz Reference Level

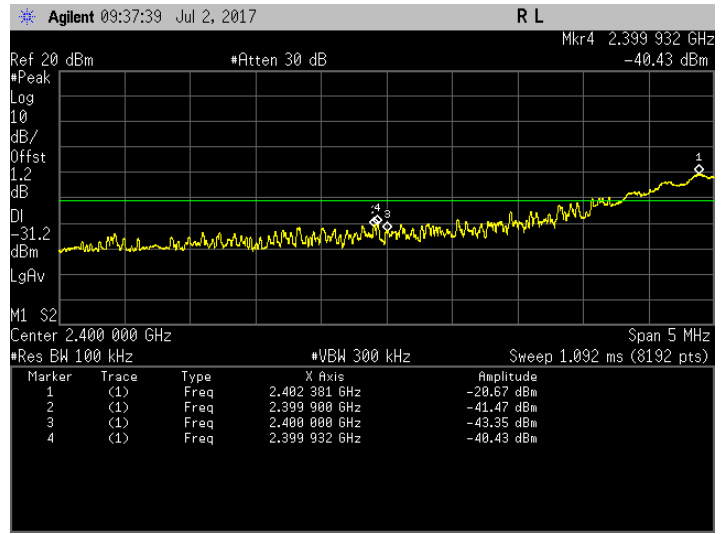

Band Edge. 802.11n Frequency 2412 MHz Band Edge

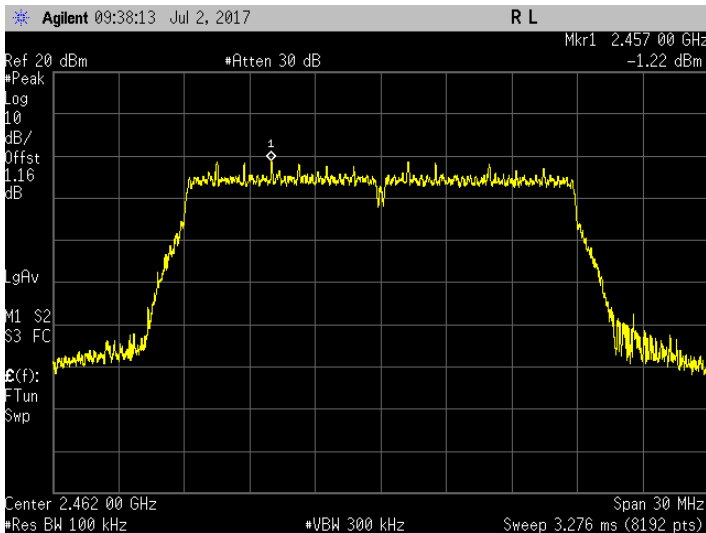


Band Edge. 802.11n Frequency 2462 MHz Reference Level

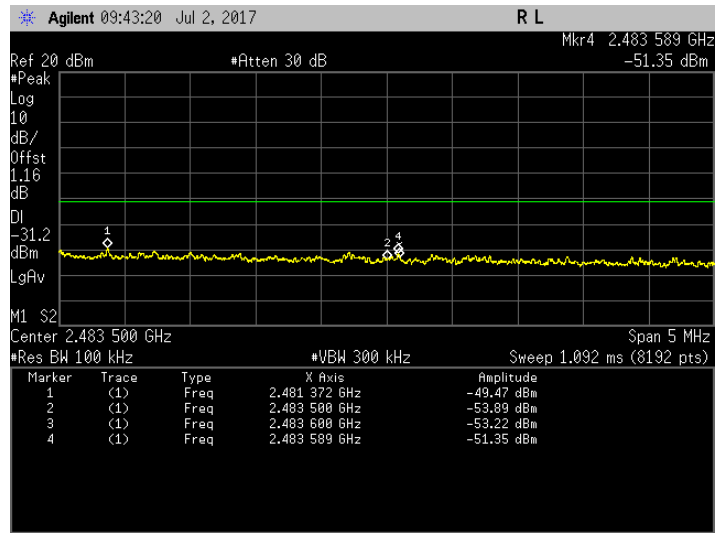

Band Edge. 802.11n Frequency 2462 MHz Band Edge

6.7 Radiated Emission within restricted bands

6.7.1 Test Setup

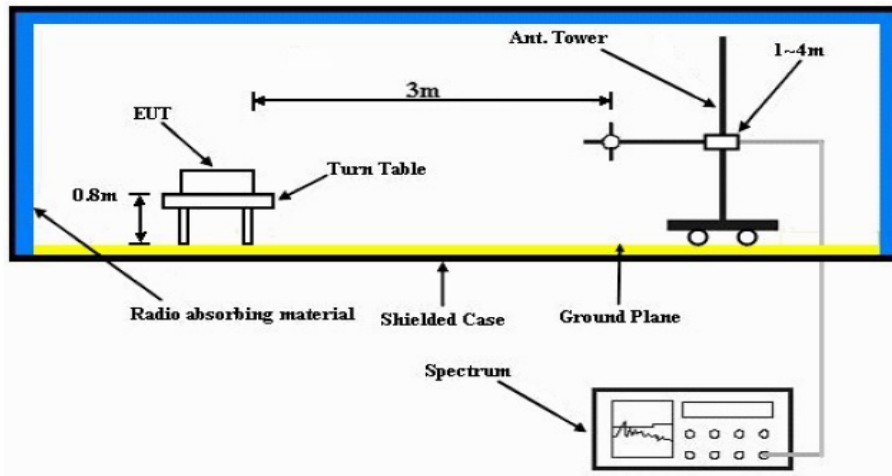

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.7.2 Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:


- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.7.3 Test Data:

Not Applicable.

6.8 AC Powerline Conducted Emission

6.8.1 Test Setup

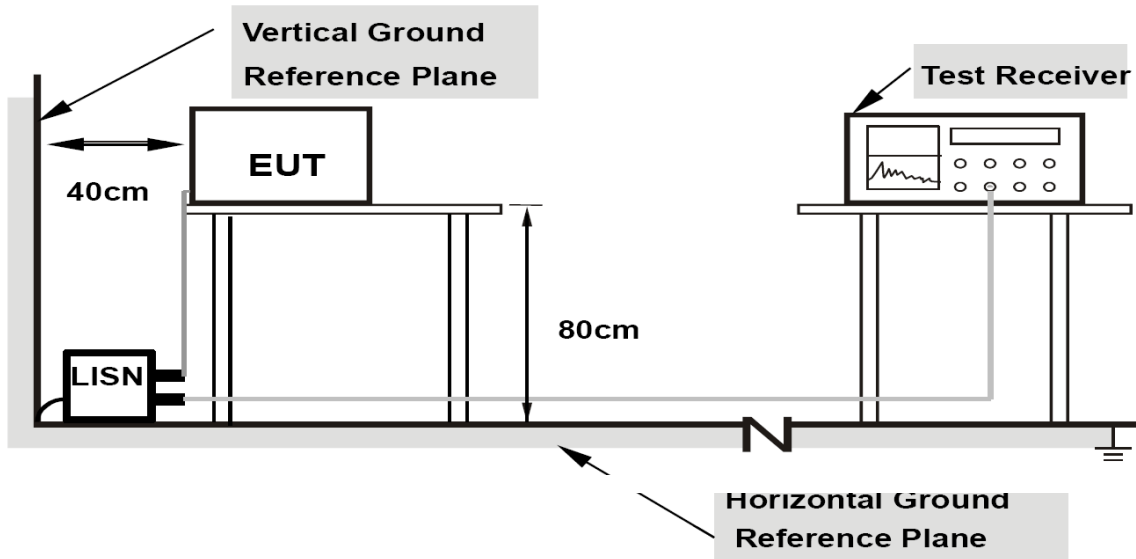

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.8.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

**Limits for conducted disturbance at the mains ports
of class A ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.8.3 Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.